



FCC PART 15.231

## TEST REPORT

For

**ETROG SYSTEMS LTD.**

124 Hertzels street, Jerusalem, Israel

**FCC ID: 2ATHKES005**

|                                                                                                                                                                                                                                                                                                                             |                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                                      | <b>Product Type:</b><br>Medical Alert System |
| <b>Report Number:</b> RSZ190606002-00B                                                                                                                                                                                                                                                                                      |                                              |
| <b>Report Date:</b> 2019-07-16                                                                                                                                                                                                                                                                                              |                                              |
| Simon Wang <i>Simon wang</i>                                                                                                                                                                                                                                                                                                |                                              |
| <b>Reviewed By:</b> RF Engineer                                                                                                                                                                                                                                                                                             |                                              |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial<br>Building, Shihua Road, Futian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                              |

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

## **TABLE OF CONTENTS**

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                     | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....            | 3         |
| OBJECTIVE .....                                                     | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                  | 3         |
| TEST METHODOLOGY .....                                              | 3         |
| MEASUREMENT UNCERTAINTY .....                                       | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                               | <b>5</b>  |
| JUSTIFICATION .....                                                 | 5         |
| SPECIAL ACCESSORIES.....                                            | 5         |
| EQUIPMENT MODIFICATIONS .....                                       | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                            | 5         |
| EXTERNAL I/O CABLE.....                                             | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                   | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                | <b>7</b>  |
| <b>TEST EQUIPMENT LIST AND DETAILS .....</b>                        | <b>8</b>  |
| <b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>                       | <b>9</b>  |
| APPLICABLE STANDARD .....                                           | 9         |
| ANTENNA CONNECTOR CONSTRUCTION .....                                | 9         |
| <b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>          | <b>10</b> |
| APPLICABLE STANDARD .....                                           | 10        |
| EUT SETUP.....                                                      | 10        |
| EMI TEST RECEIVER SETUP.....                                        | 10        |
| TEST PROCEDURE .....                                                | 10        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                         | 11        |
| TEST RESULTS SUMMARY .....                                          | 11        |
| TEST DATA .....                                                     | 11        |
| <b>FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS .....</b> | <b>14</b> |
| APPLICABLE STANDARD .....                                           | 14        |
| EUT SETUP.....                                                      | 14        |
| EMI TEST RECEIVER SETUP.....                                        | 15        |
| TEST PROCEDURE .....                                                | 15        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                      | 16        |
| TEST RESULTS SUMMARY .....                                          | 16        |
| TEST DATA .....                                                     | 16        |
| <b>FCC §15.231(A) (1) - DEACTIVATION TESTING.....</b>               | <b>20</b> |
| APPLICABLE STANDARD .....                                           | 20        |
| TEST PROCEDURE .....                                                | 20        |
| TEST DATA .....                                                     | 20        |
| <b>FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING .....</b>      | <b>22</b> |
| APPLICABLE STANDARD .....                                           | 22        |
| TEST PROCEDURE .....                                                | 22        |
| TEST DATA .....                                                     | 22        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                             |                                                                                     |
|-----------------------------|-------------------------------------------------------------------------------------|
| Product                     | Medical Alert System                                                                |
| Tested Model                | ES005                                                                               |
| Multiple Model <sup>#</sup> | ES005-BP, ES005-BC, ES005-BW, ES005-BM                                              |
| Frequency Range             | 434.21MHz                                                                           |
| Field Strength              | 80 dBuV/m@3m                                                                        |
| Modulation Technique        | ASK                                                                                 |
| Antenna Specification       | 2 dBi                                                                               |
| Voltage Range               | DC 3.7V from battery or DC 5V from adapter                                          |
| Date of Test                | 2019-06-18 ~ 2019-07-16                                                             |
| Sample serial number        | 190606002                                                                           |
| Received date               | 2019-06-06                                                                          |
| Sample/EUT Status           | Good condition                                                                      |
| Adapter information         | Model: JF005WR-0500100UH<br>Input: AC 100-240V, 50/60Hz, 0.18A<br>Output: DC 5V, 1A |

#### Manufacturer information

Company Name: Shenzhen Joy Technology Co. Ltd

Company Address: 5/F,3rd Building, Shunchengji Park, Huayun Road of Dalang, Longhua, Shenzhen, China

*Notes: This series products model: ES005-BP, ES005-BC, ES005-BW, ES005-BM and ES005 are identical schematics, they have different model name. Model ES005 was selected for fully testing, the detailed information can be referred to the declaration.*

### Objective

This test report is prepared on behalf of *ETROG SYSTEMS LTD.*. All the test measurements were performed according to the measurement procedure described in ANSI C63.10 - 2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.35(c) and 15.231 rules.

### Related Submittal(s)/Grant(s)

Not Related Submittal(s)/Grant(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10 - 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Parameter                          |            | Uncertainty |
|------------------------------------|------------|-------------|
| Occupied Channel Bandwidth         |            | ±5%         |
| RF Output Power with Power meter   |            | ±0.5dB      |
| RF conducted test with spectrum    |            | ±1.5dB      |
| AC Power Lines Conducted Emissions |            | ±1.95dB     |
| Radiated Emissions                 | Below 1GHz | ±4.75dB     |
|                                    | Above 1GHz | ±4.88dB     |
| Temperature                        |            | ±3°C        |
| Humidity                           |            | ±6%         |
| Supply voltages                    |            | ±0.4%       |

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing by manufacturer.

Operating frequency:434.21 MHz.

### Special Accessories

No special accessories was used

### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description | Model       | Serial Number |
|--------------|-------------|-------------|---------------|
| Yeastar      | PBX         | MY PBX_SOHO | 1103020       |
| Kinhao       | Telephone   | N/A         | 14589612      |
| Herene       | Telephone   | HD-70       | N/A           |

### External I/O Cable

| Cable Description                   | Length (m) | From / Port | To        |
|-------------------------------------|------------|-------------|-----------|
| Un-shielding detachable RJ11 cable  | 1.5        | EUT         | PBX       |
| Un-shielding detachable RJ11 cable  | 2.0        | Telephone   | PBX       |
| Un-shielding detachable RJ11 cable  | 2.0        | EUT         | Telephone |
| Un-shielding Un-detachable AC cable | 1.2        | PBX         | LISN 2    |
| Un-shielding Un-detachable DC cable | 1.0        | EUT         | Adapter   |

## Block Diagram of Test Setup

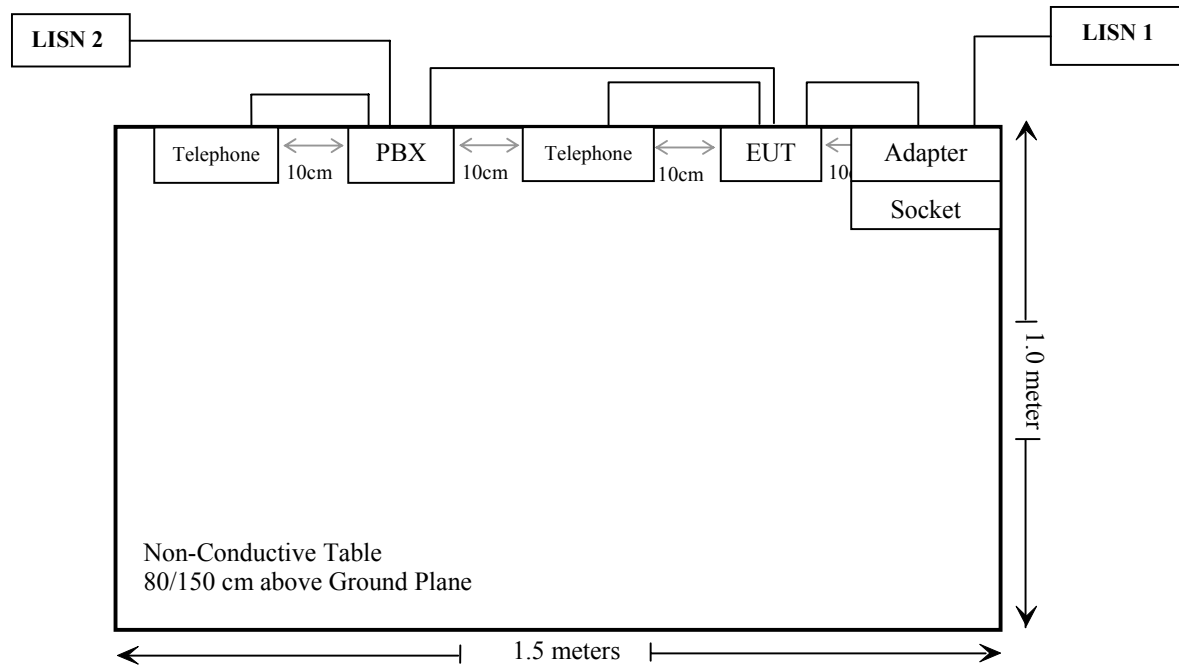

**SUMMARY OF TEST RESULTS**

| FCC Rules                    | Description of Test     | Result     |
|------------------------------|-------------------------|------------|
| §15.203                      | Antenna Requirement     | Compliance |
| §15.207 (a)                  | Conducted Emissions     | Compliance |
| §15.205, §15.209, §15.231(b) | Radiated Emissions      | Compliance |
| §15.231 (c)                  | 20dB Emission Bandwidth | Compliance |
| §15.231 (a) (1)              | Deactivation            | Compliance |

**TEST EQUIPMENT LIST AND DETAILS**

| Manufacturer                           | Description              | Model               | Serial Number          | Calibration Date | Calibration Due Date |
|----------------------------------------|--------------------------|---------------------|------------------------|------------------|----------------------|
| <b>AC Line Conducted Emission Test</b> |                          |                     |                        |                  |                      |
| Rohde & Schwarz                        | EMI Test Receiver        | ESCS30              | 100176                 | 2018-07-11       | 2019-07-11           |
| Rohde & Schwarz                        | LISN                     | ENV216              | 3560.6650.12-101613-Yb | 2019-01-25       | 2020-01-25           |
| Rohde & Schwarz                        | Transient Limiter        | ESH3Z2              | DE25985                | 2019-03-02       | 2020-03-01           |
| Unknown                                | Conducted Emission Cable | 78652               | UF A210B-1-0720-504504 | 2018-11-12       | 2019-11-12           |
| Rohde & Schwarz                        | CE Test software         | EMC 32              | V 09.10.0              | NCR              | NCR                  |
| <b>Radiated Emission Test</b>          |                          |                     |                        |                  |                      |
| A.H. System                            | Horn Antenna             | SAS-200/571         | 135                    | 2018-09-01       | 2021-08-31           |
| Rohde & Schwarz                        | Signal Analyzer          | FSEM                | 845987/005             | 2018-06-23       | 2019-06-23           |
| Rohde & Schwarz                        | Signal Analyzer          | FSEM                | 845987/005             | 2019-06-23       | 2020-06-23           |
| COM-POWER                              | Pre-amplifier            | PA-122              | 181919                 | 2018-11-12       | 2019-11-12           |
| Sonoma Instrument                      | Amplifier                | 310N                | 186238                 | 2018-11-12       | 2019-11-12           |
| Sunol Sciences                         | Broadband Antenna        | JB1                 | A040904-1              | 2017-12-22       | 2020-12-21           |
| Rohde & Schwarz                        | EMI Test Receiver        | ESR                 | 1316.3003K03-101746-zn | 2018-07-11       | 2019-07-11           |
| Rohde & Schwarz                        | EMI Test Receiver        | ESR                 | 1316.3003K03-101746-zn | 2019-07-11       | 2020-07-11           |
| Rohde & Schwarz                        | Spectrum Analyzer        | FSU26               | 200120                 | 2019-03-02       | 2020-03-01           |
| UTiFLEX MICRO-C0AX                     | RF Cable                 | UFA147A-2362-100100 | MFR64639 231029-003    | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies                  | RF Cable                 | 104PEA              | 218124002              | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies                  | RF Cable                 | RG-214              | 1                      | 2018-11-19       | 2019-05-21           |
| Ducommun Technologies                  | RF Cable                 | RG-214              | 1                      | 2019-05-21       | 2019-11-19           |
| Ducommun Technologies                  | RF Cable                 | RG-214              | 2                      | 2018-11-12       | 2019-11-12           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).



---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement, which used a unique coupling to this product. And the antenna is 2dBi; fulfill the requirement of this section. Please refer to EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

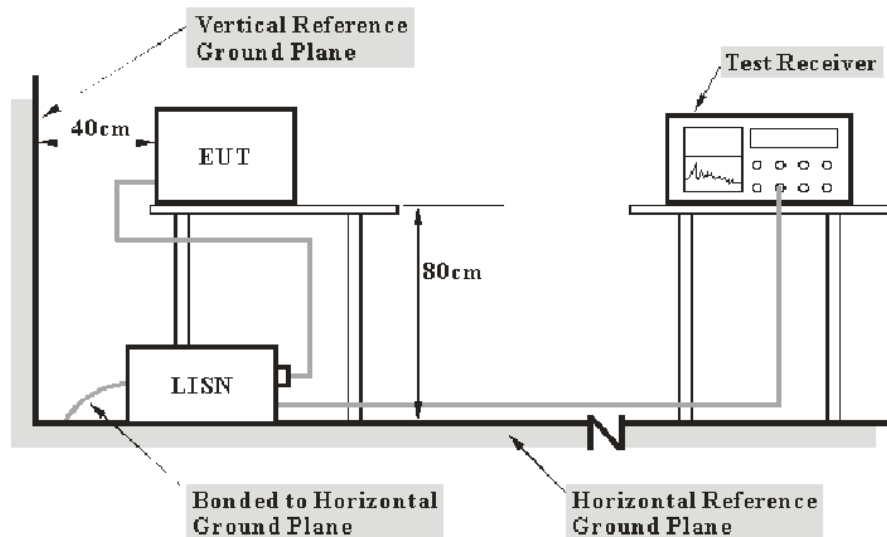

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cisp}}r$$

In BACL,  $U_{(Lm)}$  is less than  $U_{\text{cisp}}r$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.


## Test Data

### Environmental Conditions


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Haiguo Li on 2019-06-26.*

*EUT operation mode: Transmitting & Talking*

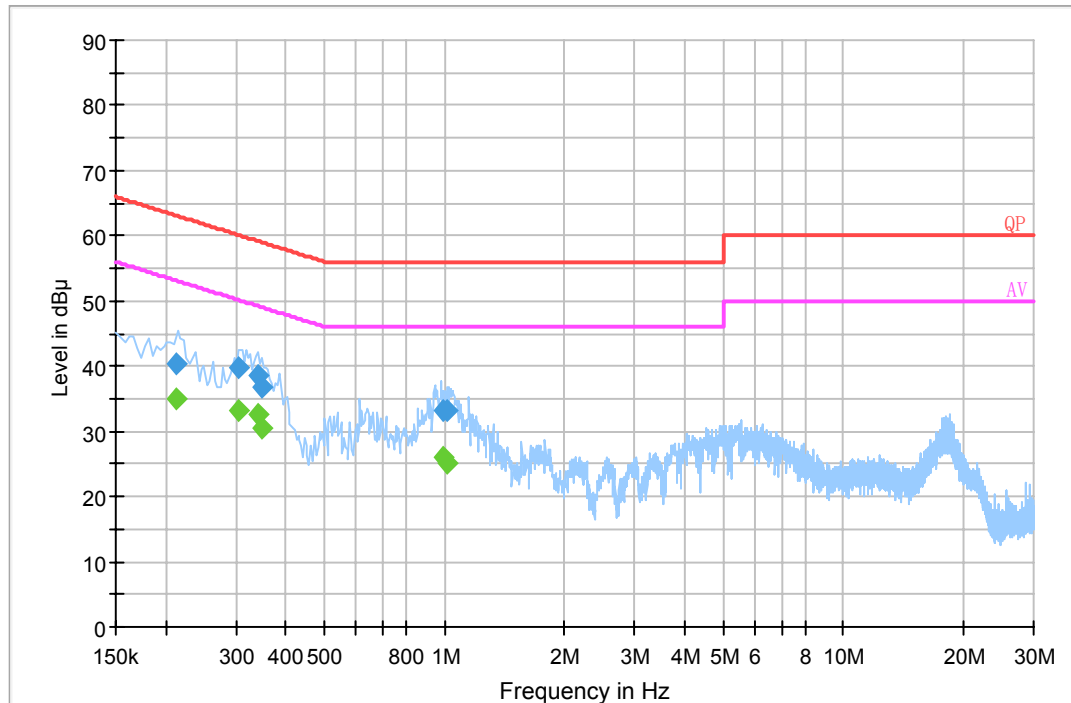**AC 120V/60 Hz, Line**

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.213500        | 40.4                       | 19.8                   | 63.1         | 22.7        | QP                    |
| 0.305350        | 39.8                       | 19.7                   | 60.1         | 20.3        | QP                    |
| 0.340870        | 38.4                       | 19.9                   | 59.2         | 20.8        | QP                    |
| 0.348690        | 36.8                       | 19.9                   | 59.0         | 22.2        | QP                    |
| 0.996730        | 33.2                       | 19.9                   | 56.0         | 22.8        | QP                    |
| 1.010730        | 33.3                       | 19.9                   | 56.0         | 22.7        | QP                    |
| 0.213500        | 34.9                       | 19.8                   | 53.1         | 18.2        | Ave.                  |
| 0.305350        | 33.3                       | 19.7                   | 50.1         | 16.8        | Ave.                  |
| 0.340870        | 32.6                       | 19.9                   | 49.2         | 16.6        | Ave.                  |
| 0.348690        | 30.4                       | 19.9                   | 49.0         | 18.6        | Ave.                  |
| 0.996730        | 26.1                       | 19.9                   | 46.0         | 19.9        | Ave.                  |
| 1.010730        | 25.3                       | 19.9                   | 46.0         | 20.7        | Ave.                  |

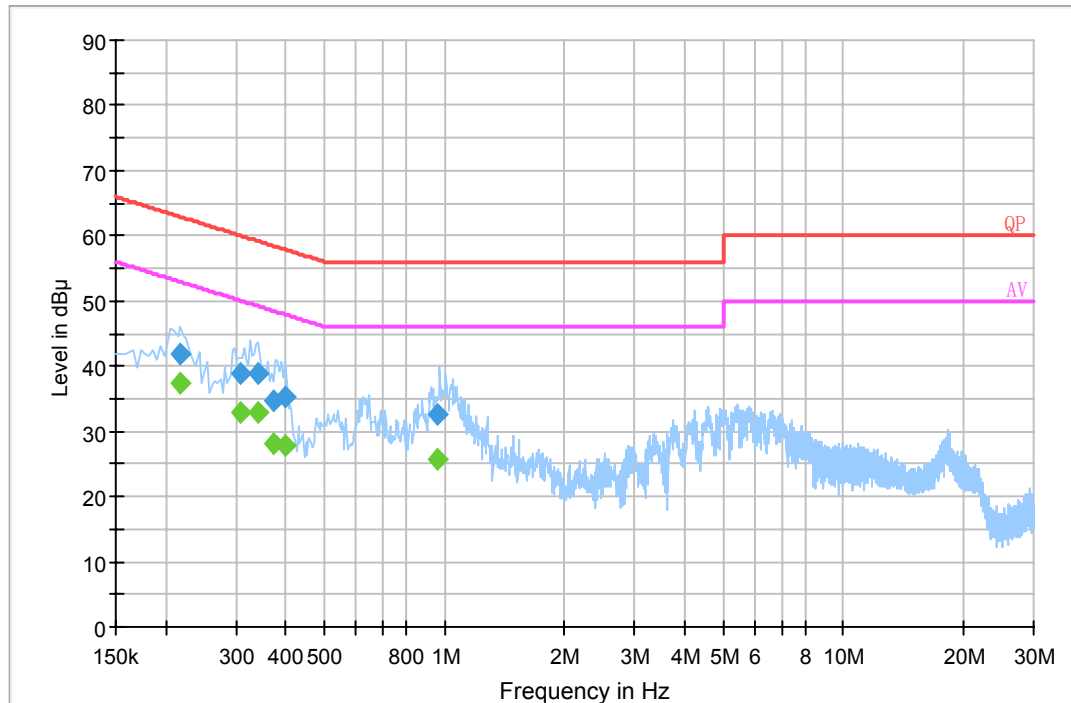**AC 120V/60 Hz, Neutral**

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.217500        | 42.0                       | 19.8                   | 62.9         | 20.9        | QP                    |
| 0.309290        | 38.8                       | 19.7                   | 60.0         | 21.2        | QP                    |
| 0.340870        | 38.8                       | 19.8                   | 59.2         | 20.4        | QP                    |
| 0.372330        | 34.8                       | 19.8                   | 58.4         | 23.6        | QP                    |
| 0.400030        | 35.2                       | 19.8                   | 57.9         | 22.7        | QP                    |
| 0.959390        | 32.6                       | 19.8                   | 56.0         | 23.4        | QP                    |
| 0.217500        | 37.3                       | 19.8                   | 52.9         | 15.6        | Ave.                  |
| 0.309290        | 32.9                       | 19.7                   | 50.0         | 17.1        | Ave.                  |
| 0.340870        | 32.8                       | 19.8                   | 49.2         | 16.4        | Ave.                  |
| 0.372330        | 28.2                       | 19.8                   | 48.4         | 20.2        | Ave.                  |
| 0.400030        | 27.9                       | 19.8                   | 47.9         | 20.0        | Ave.                  |
| 0.959390        | 25.6                       | 19.8                   | 46.0         | 20.4        | Ave.                  |

**Note:**

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

## FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS

### Applicable Standard

FCC §15.205, §15.209, §15.231 (b)

According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


| Fundamental frequency (MHz) | Field Strength of Fundamental (Microvolts /meter) | Field Strength of spurious emissions ((Microvolts /meter) |
|-----------------------------|---------------------------------------------------|-----------------------------------------------------------|
| 40.66-40.70                 | 2250                                              | 225                                                       |
| 70-130                      | 1250                                              | 125                                                       |
| 130-174                     | 1250 to 3750**                                    | 125 to 375**                                              |
| 174-260                     | 3750                                              | 375                                                       |
| 260-470                     | 3750 to 12500**                                   | 375 to 1250**                                             |
| Above 470                   | 12500                                             | 1250                                                      |


\*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

### EUT Setup

Below 1 GHz:

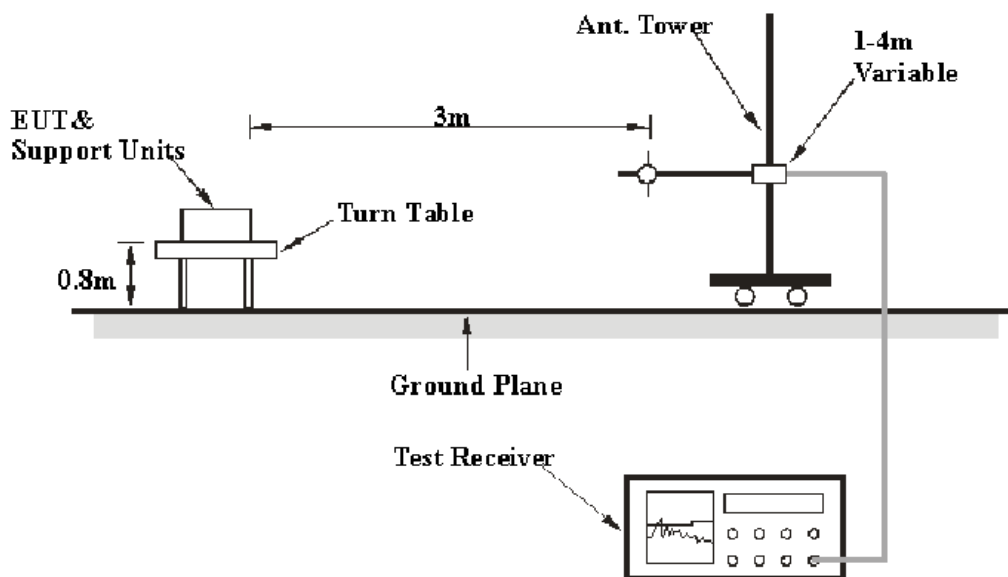

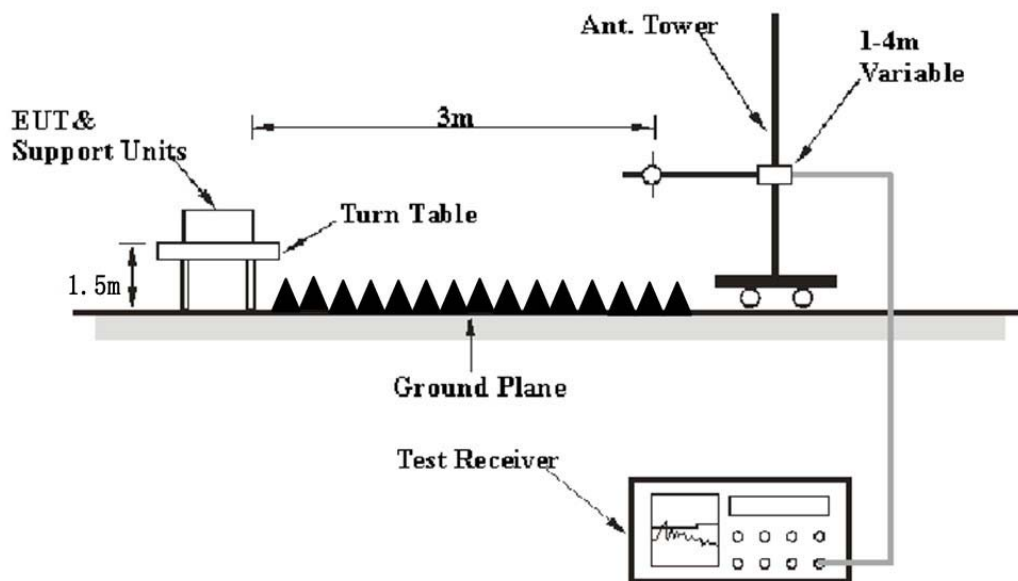**Above 1 GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

**EMI Test Receiver Setup**

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

| Frequency Range  | RBW     | Video B/W | IF B/W  | Measurement |
|------------------|---------|-----------|---------|-------------|
| 30MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz      | 1 MHz   | 3 MHz     | /       | PK          |

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231 (b)

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL,  $U_{(L_m)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

## Test Data


### Environmental Conditions

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 23~25 °C        |
| <b>Relative Humidity:</b> | 49~50 %         |
| <b>ATM Pressure:</b>      | 100.0~101.0 kPa |

*The testing was performed by Alan He from 2019-06-18 to 2019-07-16.*

*Test mode: Transmitting&talking*



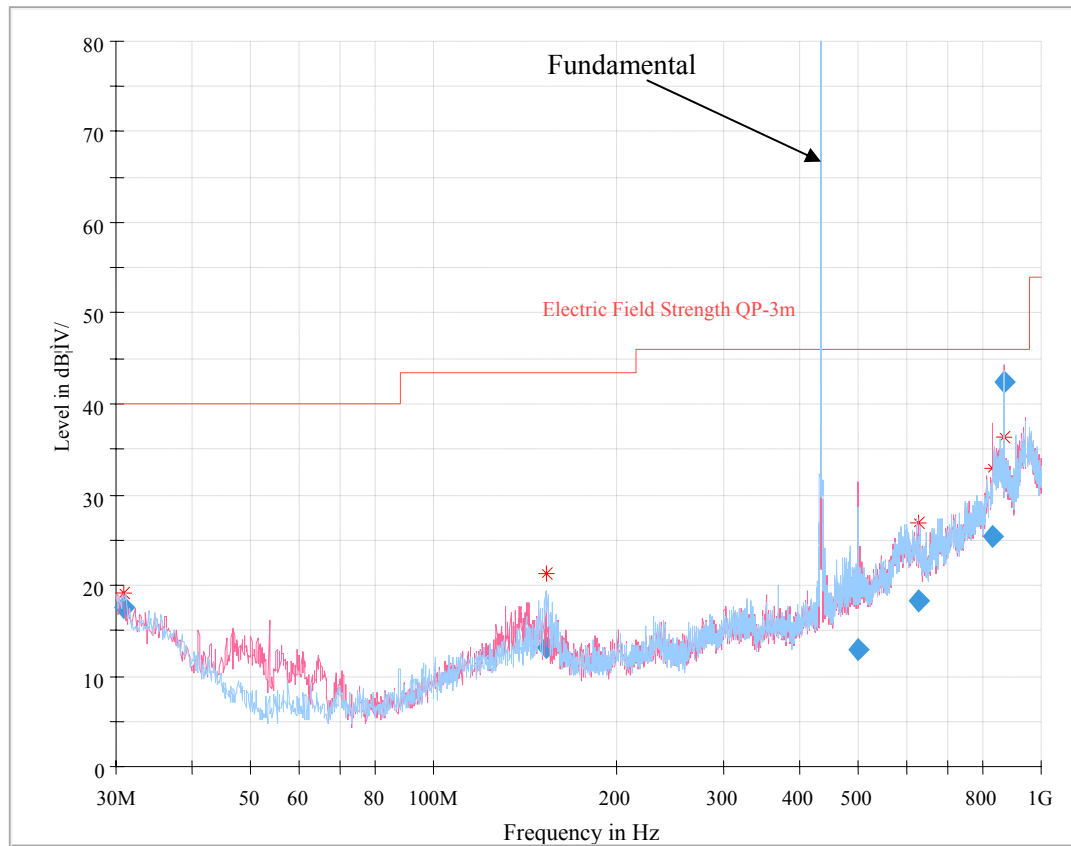

| Frequency (MHz) | Corrected Amplitude (dBµV/m) | Detector (PK/QP/Ave.) | Antenna Height (cm) | Antenna Polarity | Turntable Position (degree) | Correction Factor (dB/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|------------------------------|-----------------------|---------------------|------------------|-----------------------------|--------------------------|----------------|-------------|
| 30.975375       | 17.70                        | QP                    | 389.0               | H                | 179.0                       | -8.2                     | 22.30          | 40.00       |
| 153.599750      | 13.13                        | QP                    | 365.0               | H                | 119.0                       | -14.3                    | 13.13          | 43.50       |
| 497.874750      | 12.92                        | QP                    | 302.0               | V                | 284.0                       | -7.2                     | 12.92          | 46.00       |
| 626.145000      | 18.23                        | QP                    | 275.0               | V                | 0.0                         | -2.6                     | 18.23          | 46.00       |
| 832.569875      | 25.42                        | QP                    | 278.0               | V                | 223.0                       | 5.2                      | 25.42          | 46.00       |
| 868.016750      | 42.61                        | QP                    | 105.0               | V                | 44.0                        | 6.0                      | 3.39           | 46.00       |

| Frequency<br>(MHz) | Receiver          |                          | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part 15.231(b) |                |             |
|--------------------|-------------------|--------------------------|---------------------|----------------|----------------|-------------------------------|------------------------------------|--------------------|----------------|-------------|
|                    | Reading<br>(dBμV) | Detector<br>(PK/QP/Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                               |                                    | Limit<br>(dBμV/m)  | Margin<br>(dB) | Comment     |
| 434.21             | 89.86             | PK                       | 359                 | 1              | H              | -8.9                          | 80.00                              | 80.8               | 0.80           | Fundamental |
| 434.21             | 79.35             | PK                       | 165                 | 1.1            | V              | -8.9                          | 70.45                              | 80.8               | 10.35          | Fundamental |
| 1302.63            | 50.44             | PK                       | 349                 | 1.6            | H              | -4.31                         | 46.13                              | 54                 | 7.87           | Harmonic    |
| 1302.63            | 46.93             | PK                       | 98                  | 2.0            | V              | -4.31                         | 42.62                              | 54                 | 11.38          | Harmonic    |
| 1736.84            | 53.86             | PK                       | 285                 | 2.2            | H              | -2.01                         | 51.85                              | 60.8               | 8.95           | Harmonic    |
| 1736.84            | 53.00             | PK                       | 151                 | 2.4            | V              | -2.01                         | 50.99                              | 60.8               | 9.81           | Harmonic    |

**Note:**


Peak detector data complies with the average limit, average results are not necessary to provide.

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor


Margin = Limit - Corr. Amplitude

### Horizontal

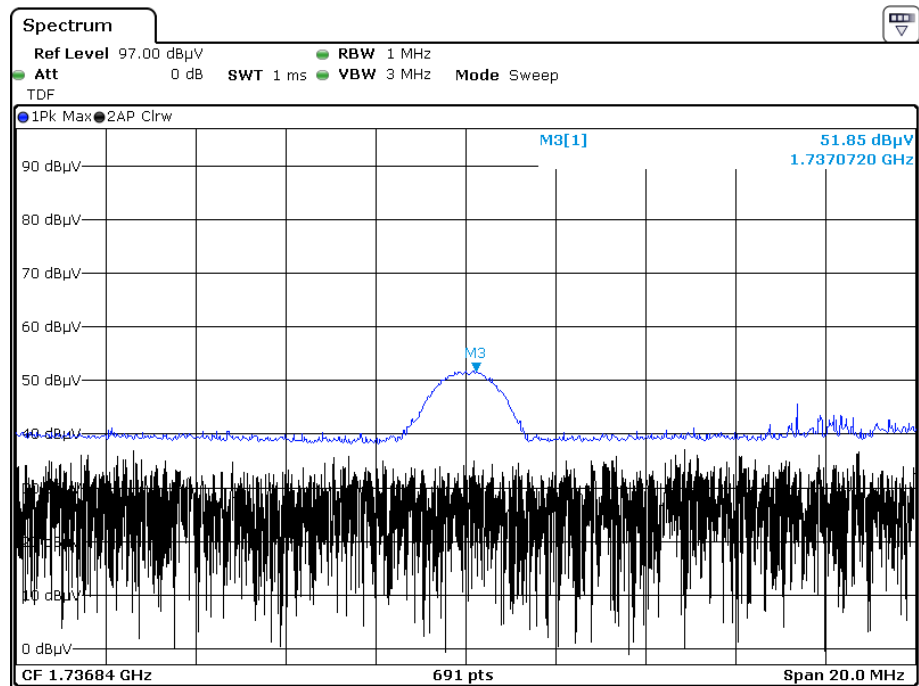

Date: 16.JUL.2019 20:16:47

### Vertical

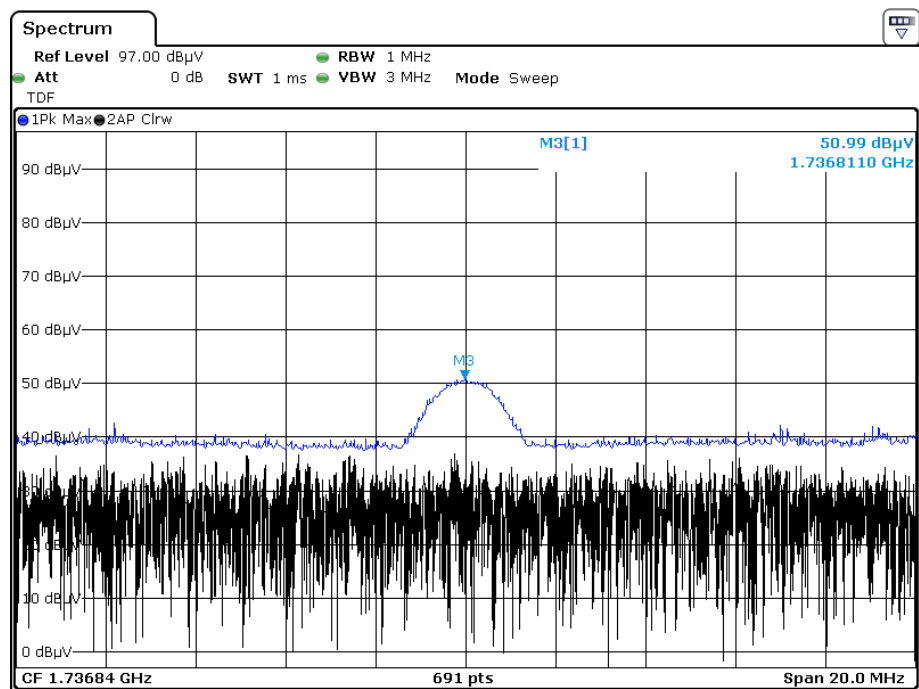

Date: 16.JUL.2019 20:16:48

**FCC §15.231(a) (1) - DEACTIVATION TESTING****Applicable Standard**

Per FCC §15.231(a) (1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

**Test Procedure**

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=100kHz/ VBW=300kHz/ Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.


**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Andy Yu on 2019-06-26.*

*Test mode: Transmitting*

**Test Result:** Compliant. This product will cease transmission within 5 seconds after activation. Please refer to following plots.

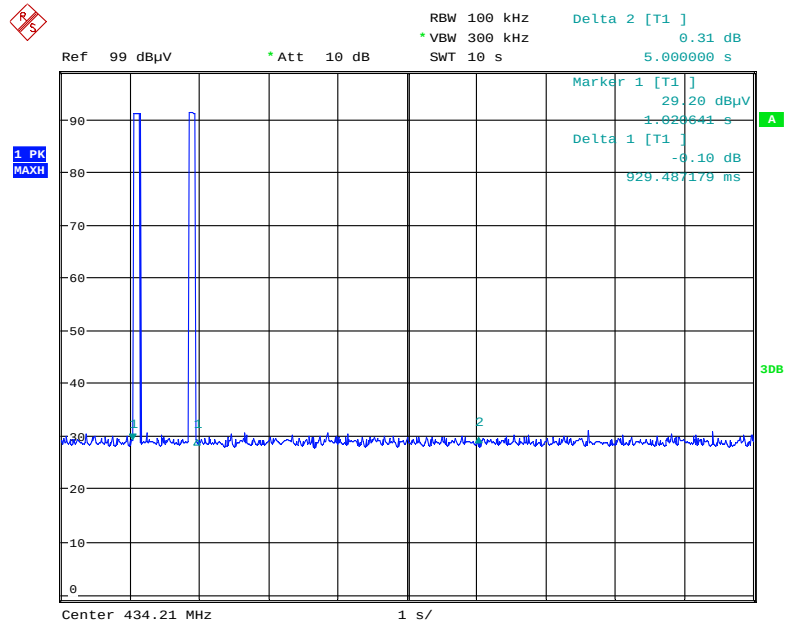

Date: 26.JUN.2019 16:04:23

**FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING****Applicable Standard**

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

**Test Procedure**

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

**Test Data****Environmental Conditions**


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Andy Yu on 2019-06-26.*

*Test Mode: Transmitting*

Please refer to following table and plots.

| Channel Frequency<br>(MHz ) | 20 dB Emission Bandwidth<br>(kHz) | <Limit<br>(kHz) | Result |
|-----------------------------|-----------------------------------|-----------------|--------|
| 434.21                      | 93.59                             | 1085.525        | Pass   |

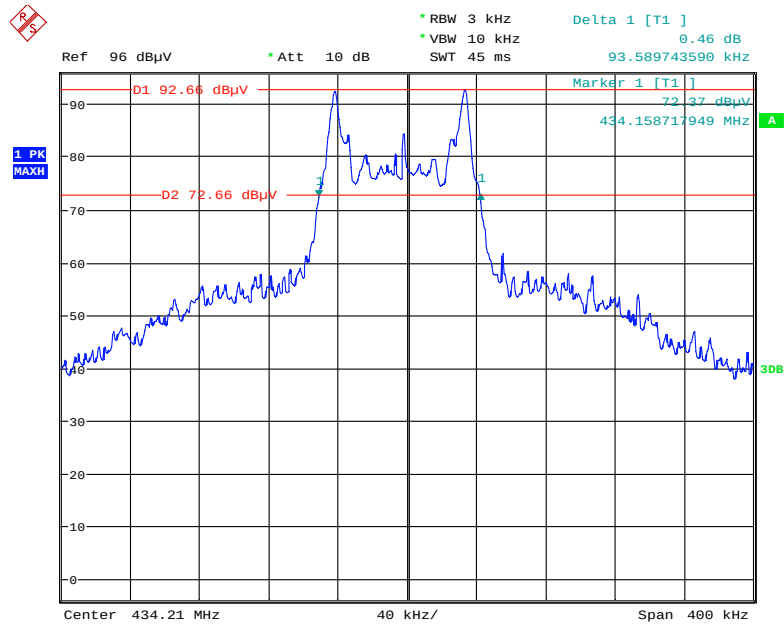**20 dB Emission Bandwidth**

Date: 26.JUN.2019 15:41:41

**\*\*\*\*\* END OF REPORT \*\*\*\*\***