

8. PEAK OUTPUT POWER TEST

8.1 Test Limit

| FCC Part15(15.247), Subpart C | | | | |
|-------------------------------|-------------------|-----------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(b)(3) | Peak Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |

8.2 Test Procedure

1. The EUT was directly connected to the Power meter.

8.3 Measurement Equipment Used

Same as Radiated Emission Measurement

8.4 Test Result

PASS

All the test modes completed for test.

| TX 802.11b Mode | | | |
|-------------------|-----------|-------------------------------------|-------|
| Test | Frequency | Maximum Peak Conducted Output Power | LIMIT |
| Channel | (MHz) | (dBm) | (dBm) |
| CH01 | 2412 | 11.845 | 30 |
| CH06 | 2437 | 12.096 | 30 |
| CH11 | 2462 | 12.268 | 30 |
| TX 802.11g Mode | | | |
| CH01 | 2412 | 10.169 | 30 |
| CH06 | 2437 | 10.462 | 30 |
| CH11 | 2462 | 10.759 | 30 |
| TX 802.11n20 Mode | | | |
| CH01 | 2412 | 10.027 | 30 |
| CH06 | 2437 | 10.214 | 30 |
| CH11 | 2462 | 10.436 | 30 |
| TX 802.11n40 Mode | | | |
| CH03 | 2422 | 9.687 | 30 |
| CH06 | 2437 | 9.752 | 30 |
| CH09 | 2452 | 9.866 | 30 |

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss.

9. OUT OF BAND EMISSIONS TEST


9.1 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

9.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.

9.3 Test Setup

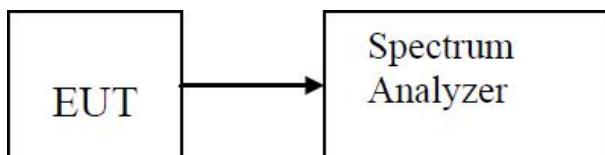

9.4 Test Result

PASS

| 802.11b | | | |
|---|--|-------------|---------|
| Frequency (MHz) | Delta Peak to Band emission (dBc) | Limit (dBc) | Verdict |
| 2400.00 | 34.869 | 20 | PASS |
| 2483.50 | 54.791 | 20 | PASS |
|  |  | | |
| 2412 | 2462 | | |

| 802.11g | | | |
|---|--|-------------|---------|
| Frequency (MHz) | Delta Peak to Band emission (dBc) | Limit (dBc) | Verdict |
| 2400.00 | 24.409 | 20 | PASS |
| 2483.05 | 34.547 | 20 | PASS |
|  |  | | |
| 2412 | 2462 | | |

| 802.11n HT20 | | | |
|---|-----------------------------------|-------------|--|
| Frequency (MHz) | Delta Peak to Band emission (dBc) | Limit (dBc) | Verdict |
| 2400.00 | 23.37 | 20 | PASS |
| 2483.50 | 30.925 | 20 | PASS |
|  | | |  |
| 2412 | | | 2462 |

| 802.11n HT40 | | | |
|---|-----------------------------------|-------------|--|
| Frequency (MHz) | Delta Peak to Band emission (dBc) | Limit (dBc) | Verdict |
| 2400.00 | 21.657 | 20 | PASS |
| 2483.50 | 23.897 | 20 | PASS |
|  | | |  |
| 2422 | | | 2452 |

10. SPURIOUS RF CONDUCTED EMISSION


10.1 Test Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by "10lg(BW1/BW2)". for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

10.2 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013, For 9KHz-150kHz, Set RBW=1kHz and VBW= 3KHz; For 150KHz-10MHz, Set RBW=10kHz and VBW= 30KHz; For 10MHz-25GHz, Set RBW=100kHz and VBW= 300KHz in order to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

10.3 Test Setup

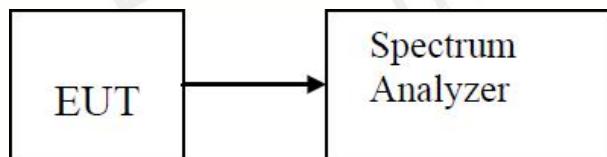

10.4 Test Result

PASS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandwidth measurement data. and record the worst data for 802.11b in report .

Test Mode:


802.11b

Test channel :

01



Channel 01

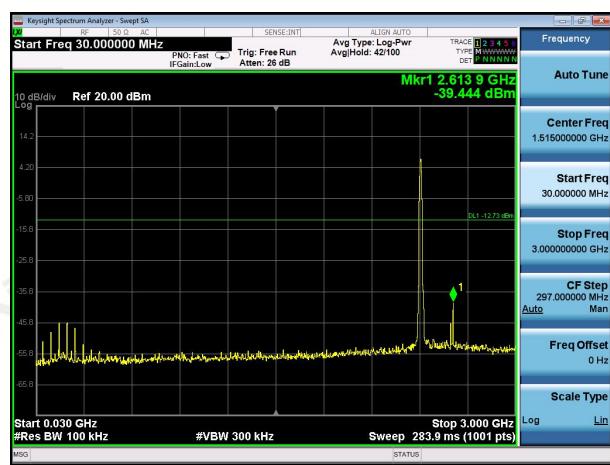

30MHz ~3GHz



3GHz~25GHz

Test Mode:

802.11b

Test channel :


06



Channel 06



30MHz ~3GHz

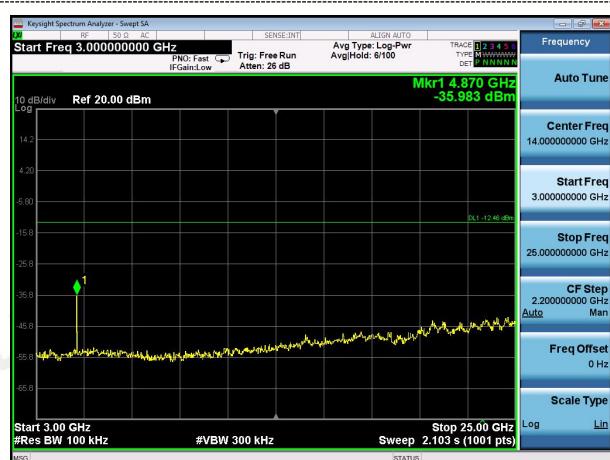

3GHz~25GHz

Test Mode:


802.11b

Test channel :

11



Channel 11

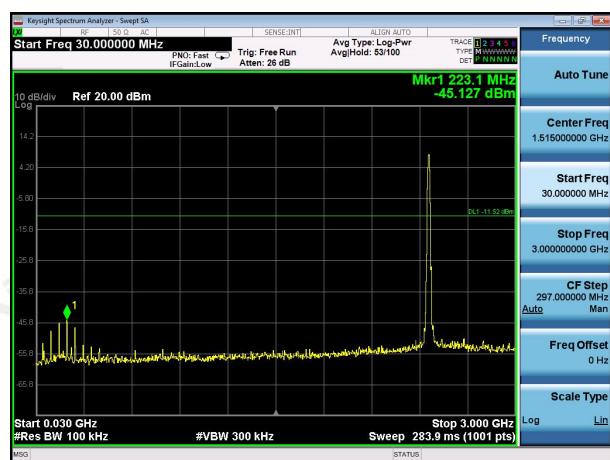

30MHz ~3GHz



3GHz~25GHz

11. ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


Antenna Connected Construction

The antenna used in this product is an Internal Antenna, The directional gains of antenna used for transmitting is 2dBi.

ANTENNA:

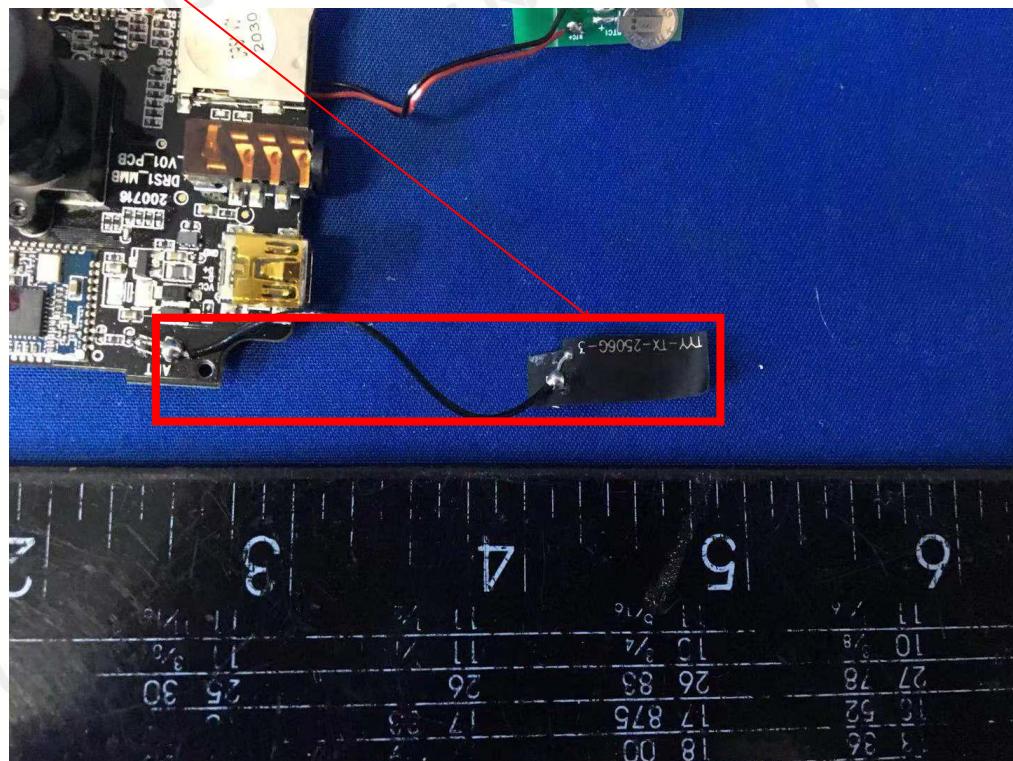

**Radiated Emission
(Below 1G)**

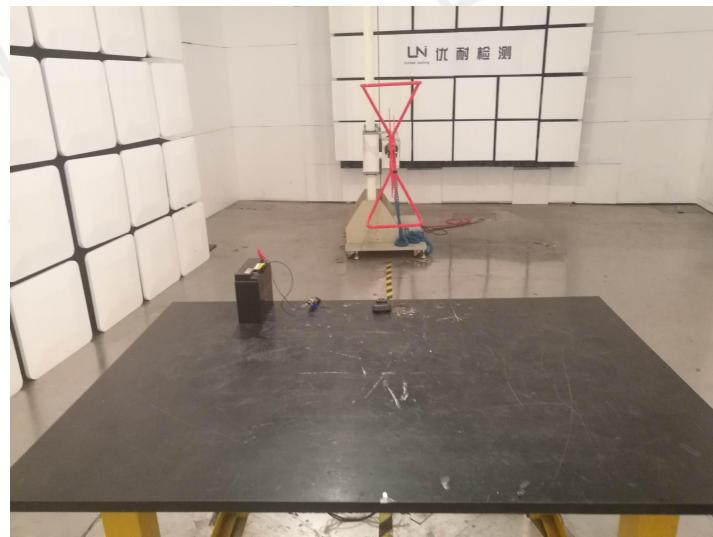

**Radiated Emission
(Above 1G)**



End of Report