

TEST REPORT

Product Name	:	True Wireless Earbuds
Brand Mark	:	AUKEY
Model No.	:	EP-N8
FCC ID	:	2ATIH-EPN8
Report Number	:	BLA-EMC-202103-A6203
Date of Sample Receipt	:	2021/3/18
Date of Test	:	2021/3/18 to 2021/5/13
Date of Issue	:	2021/5/17
Test Standard	:	47 CFR Part 15, Subpart C 15.247
Test Result	:	Pass

Prepared for:

Aukey Technology Co.,Ltd

**Room 102, Building P09, South China City Electronics Trading Center,
Longgang District, Shenzhen, Guangdong, 518111, China**

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Sven

Approved by:

Jiemen Li

Review by:

Sweet. Liang

Date: 2021/5/17



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/5/17	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	5
2 GENERAL INFORMATION	6
3 GENERAL DESCRIPTION OF E.U.T.....	6
4 TEST ENVIRONMENT	7
5 TEST MODE	7
6 MEASUREMENT UNCERTAINTY	7
7 DESCRIPTION OF SUPPORT UNIT.....	8
8 LABORATORY LOCATION.....	8
9 TEST INSTRUMENTS LIST.....	9
1 RADIATED SPURIOUS EMISSIONS.....	12
1.1 LIMITS	12
1.2 BLOCK DIAGRAM OF TEST SETUP	13
1.3 PROCEDURE	13
1.4 TEST DATA	15
2 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	23
2.1 LIMITS	23
2.2 BLOCK DIAGRAM OF TEST SETUP	23
2.3 PROCEDURE	23
2.4 TEST DATA	25
3 CONDUCTED BAND EDGES MEASUREMENT.....	27
3.1 LIMITS	27
3.2 BLOCK DIAGRAM OF TEST SETUP	27
3.3 TEST DATA	28
4 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	29
4.1 LIMITS	29
4.2 BLOCK DIAGRAM OF TEST SETUP	30
4.3 PROCEDURE	30
4.4 TEST DATA	32
5 CONDUCTED SPURIOUS EMISSIONS	36
5.1 LIMITS	36

5.2	BLOCK DIAGRAM OF TEST SETUP	36
5.3	TEST DATA	37
6	POWER SPECTRUM DENSITY.....	38
6.1	LIMITS	38
6.2	BLOCK DIAGRAM OF TEST SETUP	38
6.3	TEST DATA	38
7	CONDUCTED PEAK OUTPUT POWER	39
7.1	LIMITS	39
7.2	BLOCK DIAGRAM OF TEST SETUP	39
7.3	TEST DATA	40
8	MINIMUM 6DB BANDWIDTH	41
8.1	LIMITS	41
8.2	BLOCK DIAGRAM OF TEST SETUP	41
8.3	TEST DATA	41
9	ANTENNA REQUIREMENT.....	42
9.1	CONCLUSION	42
10	APPENDIX.....	43
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		57
APPENDIX B: PHOTOGRAPHS OF EUT		59

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

2 GENERAL INFORMATION

Applicant	Aukey Technology Co.,Ltd
Address	Room 102, Building P09, South China City Electronics Trading Center, Longgang District, Shenzhen, Guangdong, 518111, China
Manufacturer	Aukey Technology Co.,Ltd
Address	Room 102, Building P09, South China City Electronics Trading Center, Longgang District, Shenzhen, Guangdong, 518111, China
Factory	Aukey Technology Co.,Ltd
Address	Room 102, Building P09, South China City Electronics Trading Center, Longgang District, Shenzhen, Guangdong, 518111, China
Product Name	True Wireless Earbuds
Test Model No.	EP-N8

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402MHz~2480MHz
Modulation Type:	GFSK,
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	Internal Antenna
Antenna Gain:	1.06dBi(Provided by the applicant)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	+25°C	3.7Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation

Remark: Only the data of the worst mode would be recorded in this report.

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30MHz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	--	--

Note:

-- means no any support device during testing.

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11

Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

1 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel
Tester	Sven
Temperature	25°C
Humidity	52%

1.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

1.2 BLOCK DIAGRAM OF TEST SETUP

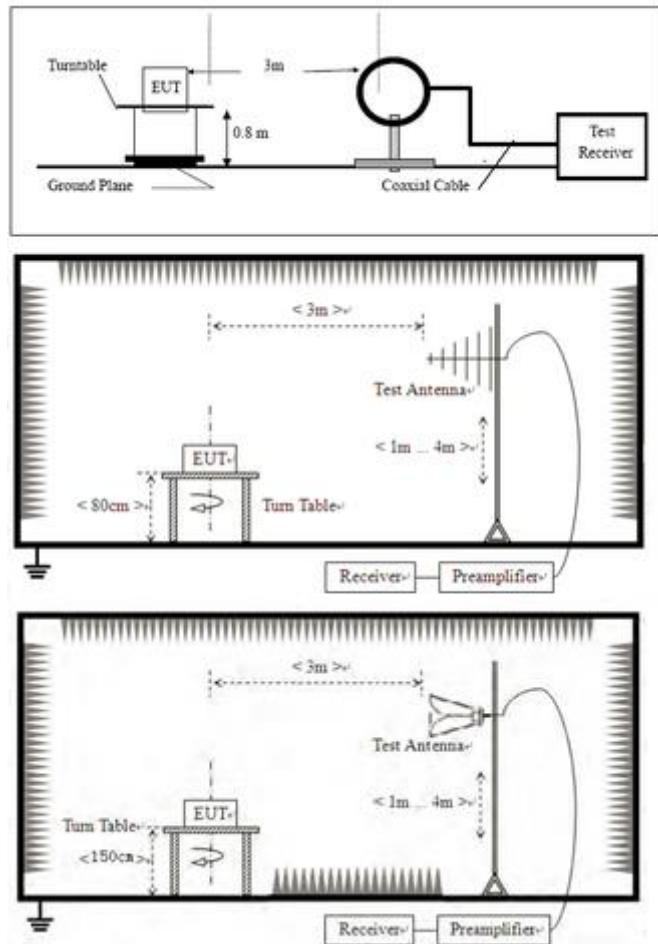

1.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75 and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

1.4 TEST DATA

[TestMode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

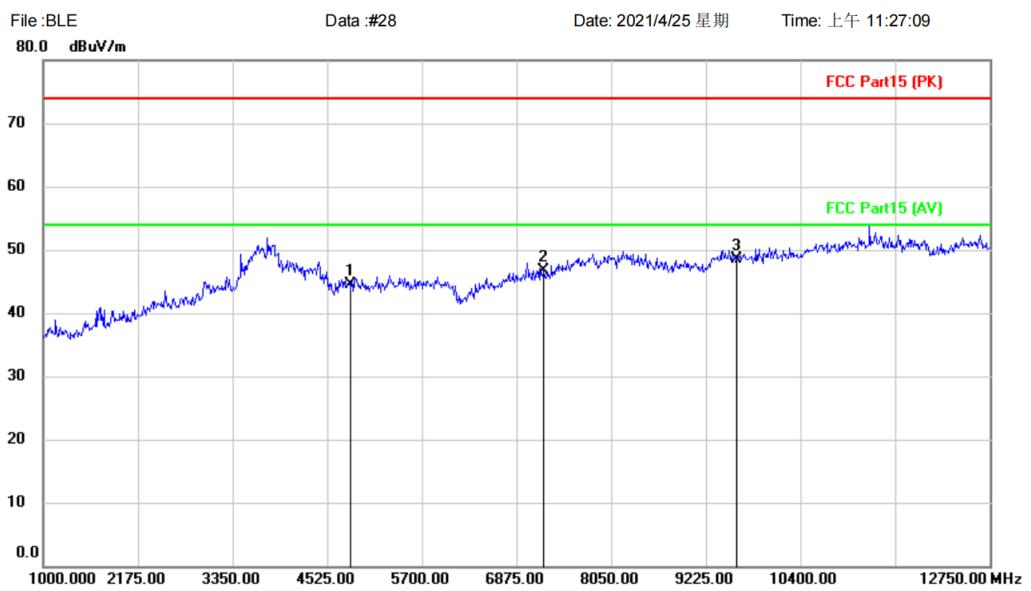

Site Polarization: **Horizontal** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: True Wireless Earbuds Distance: 3m
 M/N: EP-N8
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4804.000	40.86	3.71	44.57	74.00	-29.43	peak	150	0
2		7206.000	40.78	5.96	46.74	74.00	-27.26	peak	150	0
3	*	9608.000	39.16	9.29	48.45	74.00	-25.55	peak	150	0

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#27

Date: 2021/4/25 星期

Time: 上午 11:25:32

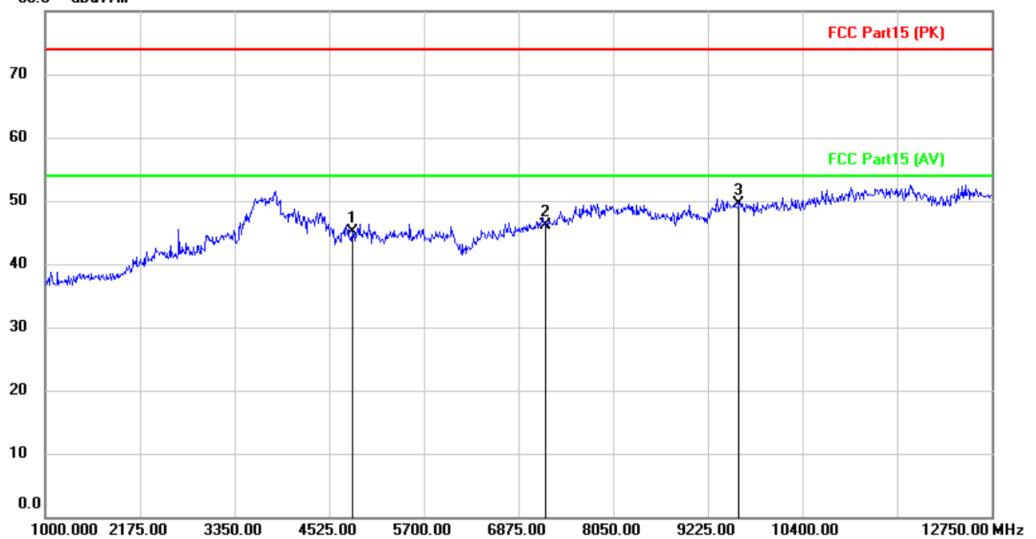

Site

Polarization: *Vertical*

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX-L

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	41.39	3.71	45.10	74.00	-28.90	peak	150	0	
2		7206.000	40.17	5.96	46.13	74.00	-27.87	peak	150	0	
3	*	9608.000	40.24	9.29	49.53	74.00	-24.47	peak	150	0	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]


Radiated Emission Measurement

File :BLE

Data :#30

Date: 2021/4/25 星期

Time: 上午 11:30:52

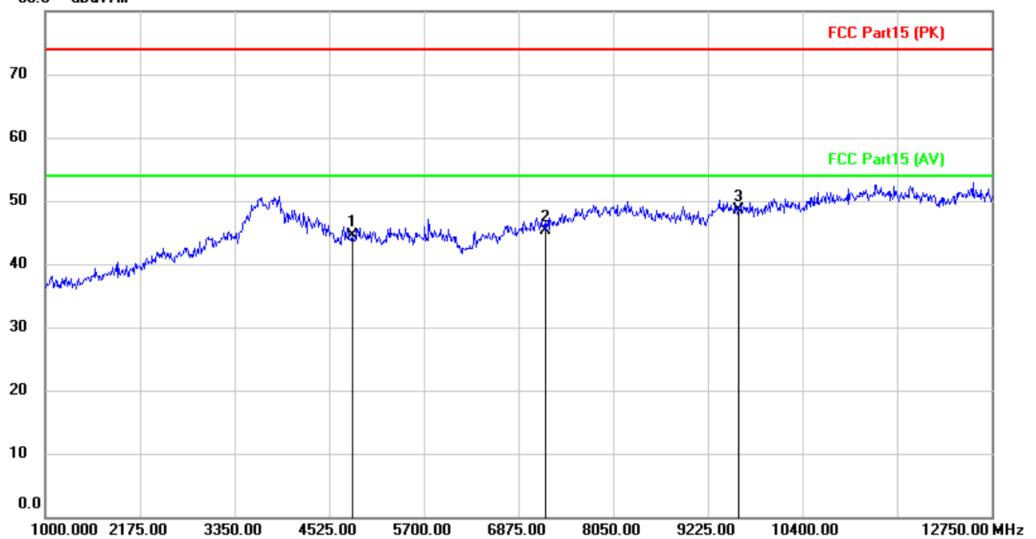

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX-M

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	40.84	3.71	44.55	74.00	-29.45	peak	150	0	
2		7206.000	39.42	5.96	45.38	74.00	-28.62	peak	150	0	
3	*	9608.000	39.28	9.29	48.57	74.00	-25.43	peak	150	0	

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#29

Date: 2021/4/25 星期

Time: 上午 11:28:52

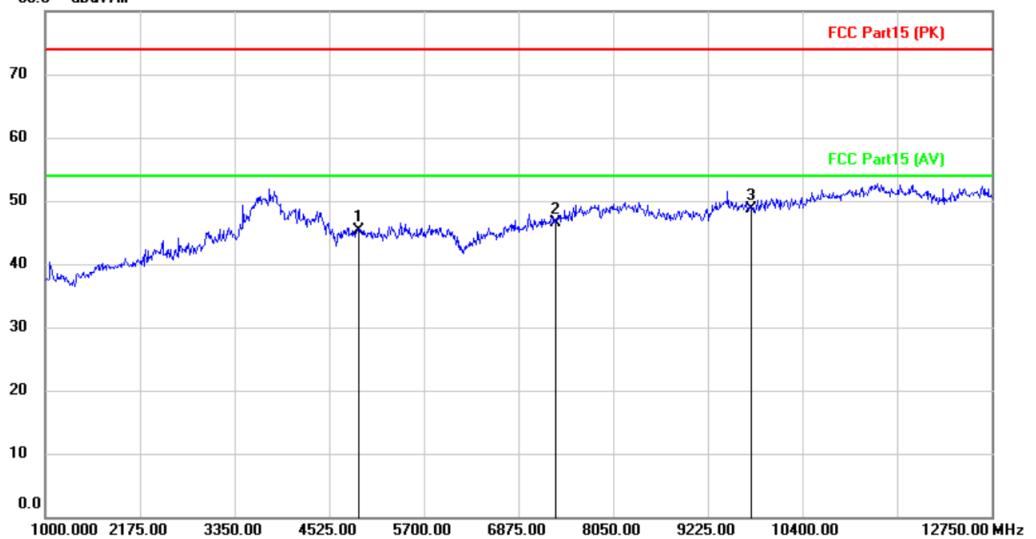

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX-M

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4884.000	42.04	3.34	45.38	74.00	-28.62	peak	150	0	
2		7323.000	40.15	6.43	46.58	74.00	-27.42	peak	150	0	
3	*	9764.000	39.07	9.63	48.70	74.00	-25.30	peak	150	0	


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

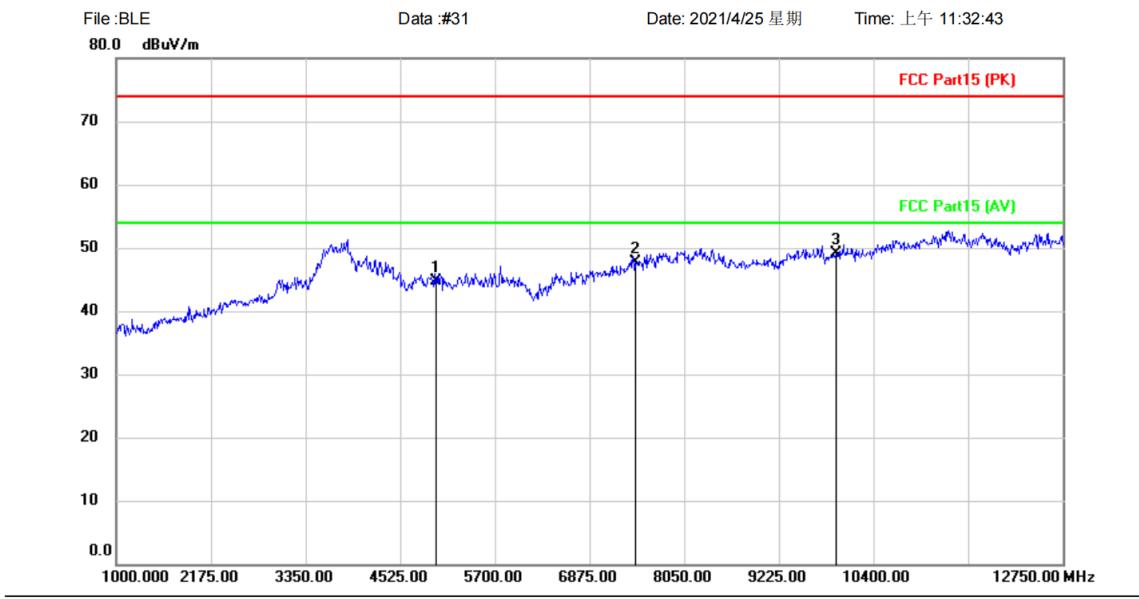

Site

Polarization: *Horizontal*

Temperature:

Limit: FCC Part15 (PK)

Power

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	41.02	3.75	44.77	74.00	-29.23	peak	150	0	
2		7440.000	40.78	6.86	47.64	74.00	-26.36	peak	150	0	
3	*	9920.000	38.93	10.16	49.09	74.00	-24.91	peak	150	0	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#32

Date: 2021/4/25 星期

Time: 上午 11:34:09

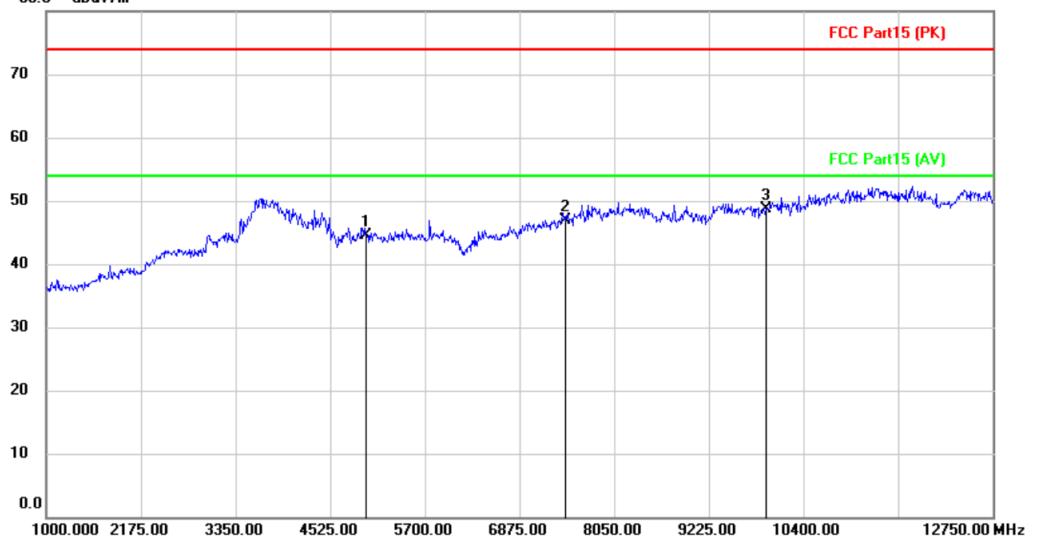

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	40.73	3.75	44.48	74.00	-29.52	peak	150	0	
2		7440.000	39.98	6.86	46.84	74.00	-27.16	peak	150	0	
3	*	9920.000	38.60	10.16	48.76	74.00	-25.24	peak	150	0	

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Horizontal]


Radiated Emission Measurement

File :BLE

Data :#42

Date: 2021/4/27 星期

Time: 下午 3:52:56

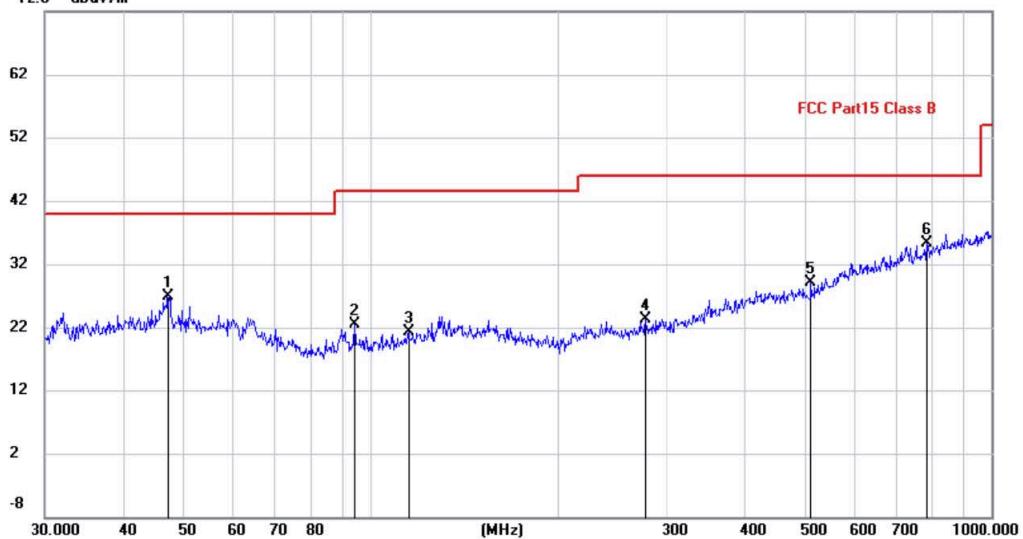

Site

Polarization: *Horizontal*

Temperature:

Limit: FCC Part15 Class B

Power:

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX

Note:

No.	Mk.	Reading Level		Correct Factor	Measure- ment		Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV		dB	dBuV/m				cm	degree
1	47.1600	3.06	23.86	26.92	40.00	-13.08	QP	100	0		
2	94.4282	2.83	19.74	22.57	43.50	-20.93	QP	100	0		
3	115.3204	-0.81	22.08	21.27	43.50	-22.23	QP	100	0		
4	277.0935	-0.21	23.53	23.32	46.00	-22.68	QP	100	0		
5	511.8351	0.33	28.78	29.11	46.00	-16.89	QP	100	0		
6 *	785.0933	1.05	34.32	35.37	46.00	-10.63	QP	100	0		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#41

Date: 2021/4/27 星期

Time: 下午 3:51:19

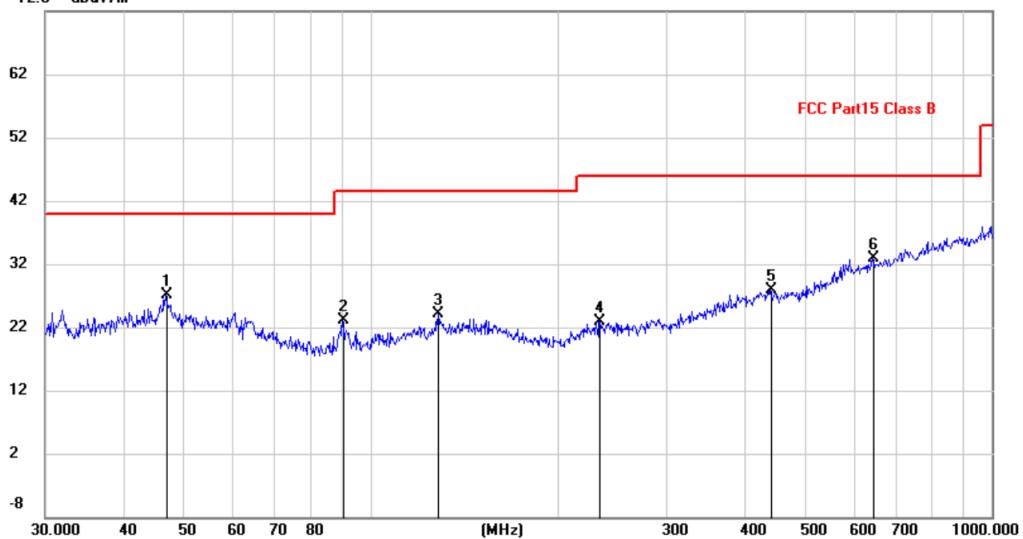

Site

Polarization: *Vertical*

Temperature:

Limit: FCC Part15 Class B

Power:

Humidity: %

EUT: True Wireless Earbuds

Distance: 3m

M/N: EP-N8

Mode: TX

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	46.8303	3.25	23.86	27.11	40.00	-12.89	QP	100	0	
2		90.2205	3.87	19.20	23.07	43.50	-20.43	QP	100	0	
3		128.5629	1.15	22.90	24.05	43.50	-19.45	QP	100	0	
4		234.1683	0.34	22.60	22.94	46.00	-23.06	QP	100	0	
5		440.1963	-0.06	27.97	27.91	46.00	-18.09	QP	100	0	
6		642.8613	0.90	32.04	32.94	46.00	-13.06	QP	100	0	

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

2 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

2.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

2.2 BLOCK DIAGRAM OF TEST SETUP

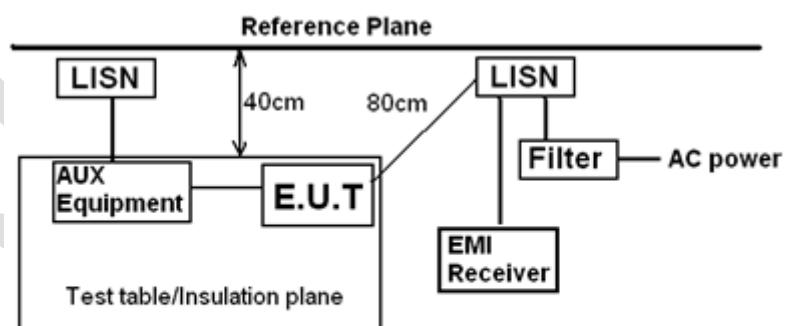

Remark
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

2.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 50hm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.


- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia


2.4 TEST DATA

[TestMode: TX]; [Line: Line]

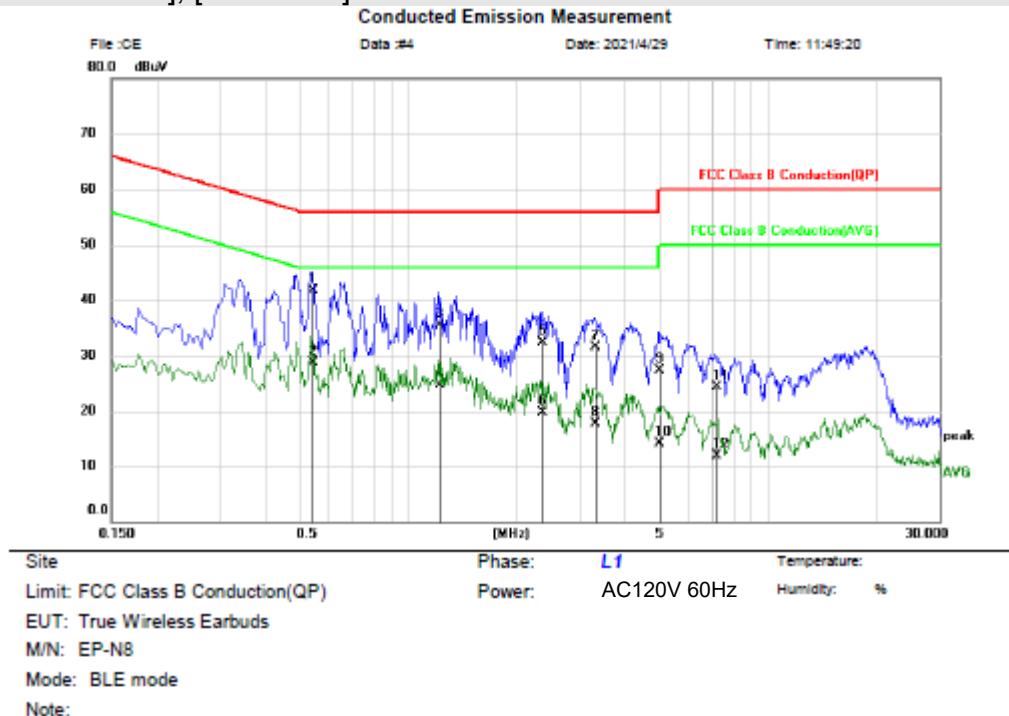

No.	Mk.	Reading MHz	Correct Level dBuV	Measure- ment dB	Limit dBuV	Over dB	Detector	Comment
		MHz	dBuV	dB	dBuV	dB		
1	*	0.5420	31.92	9.79	41.71	56.00	-14.29	QP
2		0.5420	19.01	9.79	28.80	46.00	-17.20	AVG
3		1.2180	25.75	9.84	35.59	56.00	-20.41	QP
4		1.2180	14.93	9.84	24.77	46.00	-21.23	AVG
5		2.3540	22.46	9.87	32.33	56.00	-23.67	QP
6		2.3540	9.85	9.87	19.72	46.00	-26.28	AVG
7		3.3020	21.57	9.90	31.47	56.00	-24.53	QP
8		3.3020	7.78	9.90	17.68	46.00	-28.32	AVG
9		5.0020	17.30	9.95	27.25	60.00	-32.75	QP
10		5.0020	4.20	9.95	14.15	50.00	-35.85	AVG
11		7.1860	14.25	10.03	24.28	60.00	-35.72	QP
12		7.1860	1.90	10.03	11.93	50.00	-38.07	AVG

Test Result: Pass

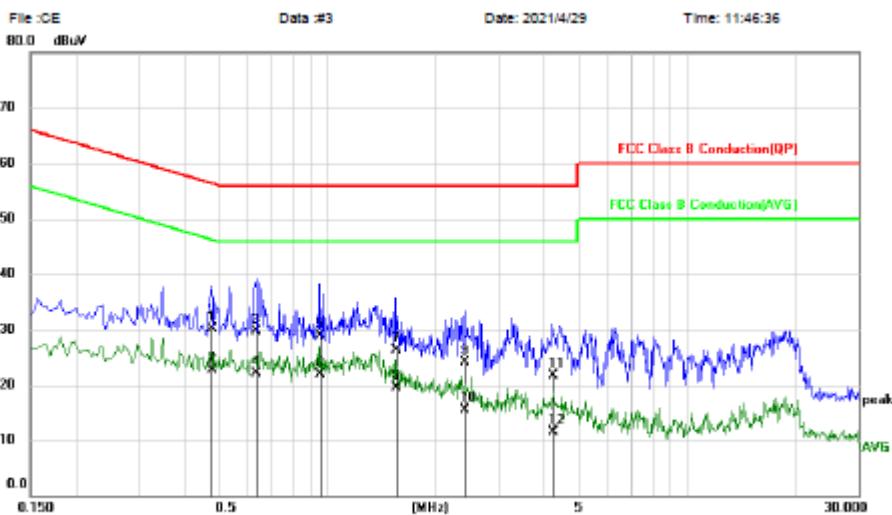[TestMode: TX]; [Line: Neutral]
Conducted Emission Measurement


Site: **N** Temperature:

Limit: FCC Class B Conduction(QP)

EUT: True Wireless Earbuds

Power: AC120V 60Hz

Humidity: %

M/N: EP-N8

Mode: BLE mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dB			
1		0.4780	20.27	0.79	30.06	56.37	-26.31	QP	
2	*	0.4780	12.88	0.79	22.67	46.37	-23.70	AVG	
3		0.6340	19.98	0.80	29.78	56.00	-26.22	QP	
4		0.6340	12.40	0.80	22.20	46.00	-23.80	AVG	
5		0.9540	19.03	0.84	28.87	56.00	-27.13	QP	
6		0.9540	12.16	0.84	22.00	46.00	-24.00	AVG	
7		1.5540	16.44	0.85	26.29	56.00	-29.71	QP	
8		1.5540	9.60	0.85	19.45	46.00	-26.55	AVG	
9		2.4100	14.23	0.87	24.10	56.00	-31.90	QP	
10		2.4100	5.55	0.87	15.42	46.00	-30.58	AVG	
11		4.2280	11.88	0.92	21.80	56.00	-34.20	QP	
12		4.2280	1.56	0.92	11.48	46.00	-34.52	AVG	

Test Result: Pass


3 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

3.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

3.2 BLOCK DIAGRAM OF TEST SETUP

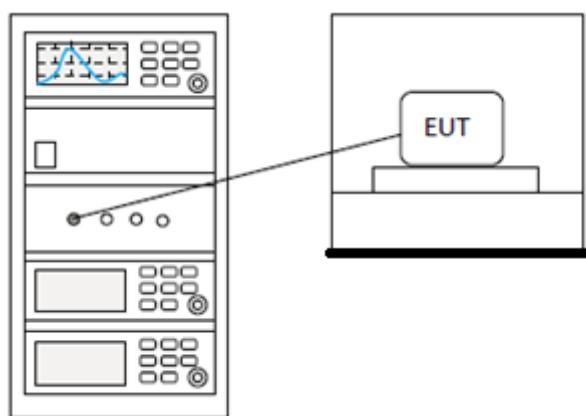

3.3 TEST DATA

Pass: Please Refer To Appendix: For Details
--

BlueAsia

4 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Sven
Temperature	25 °C
Humidity	52%

4.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

4.2 BLOCK DIAGRAM OF TEST SETUP

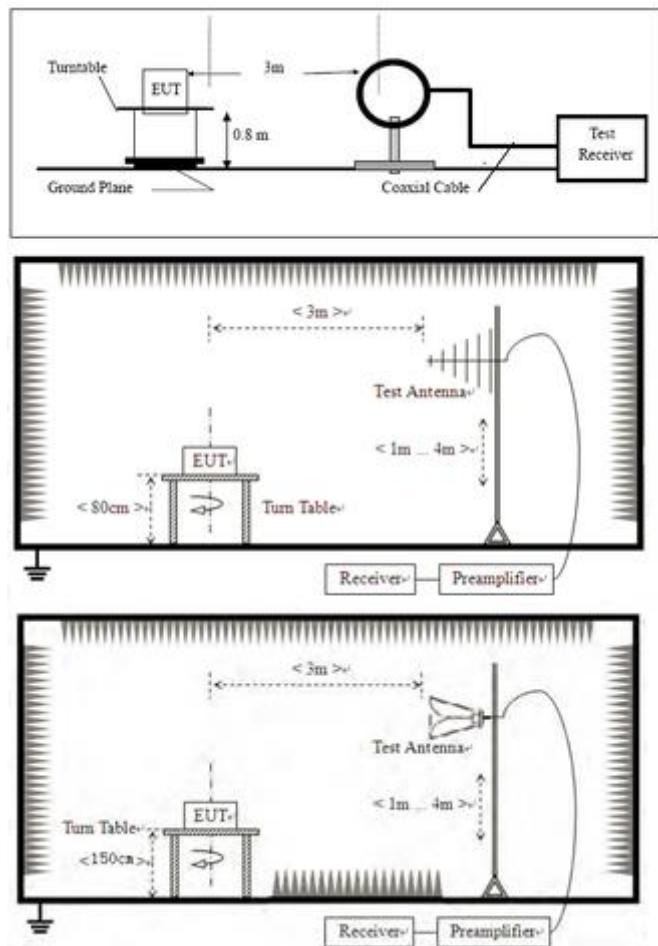

4.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

4.4 TEST DATA

[TestMode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

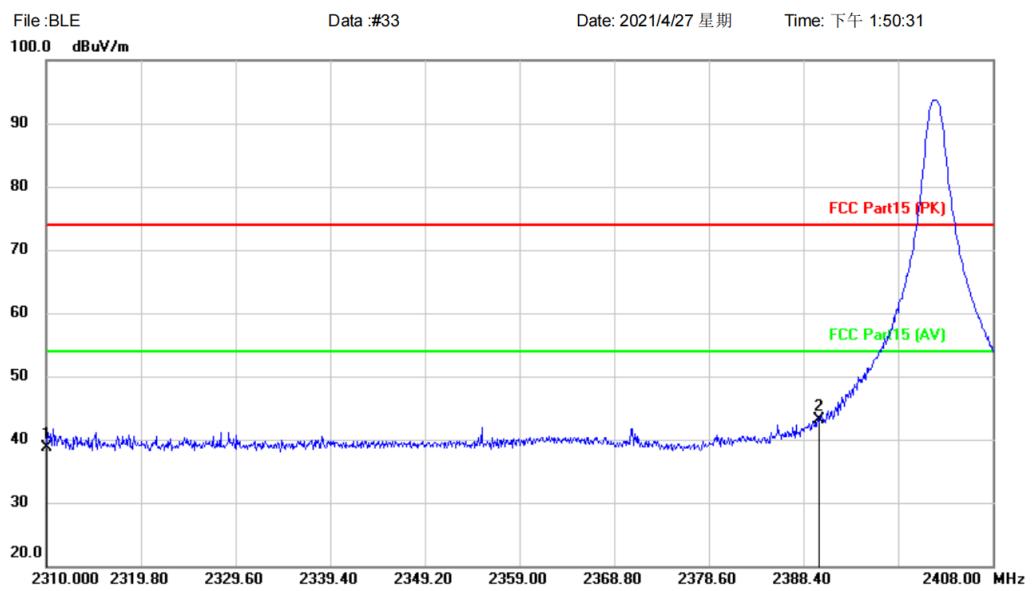


Site Polarization: **Horizontal** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: True Wireless Earbuds Distance: 3m
 M/N: EP-N8
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	43.38	-4.61	38.77	74.00	-35.23	peak	150	270
2	*	2390.000	47.29	-4.27	43.02	74.00	-30.98	peak	150	270

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

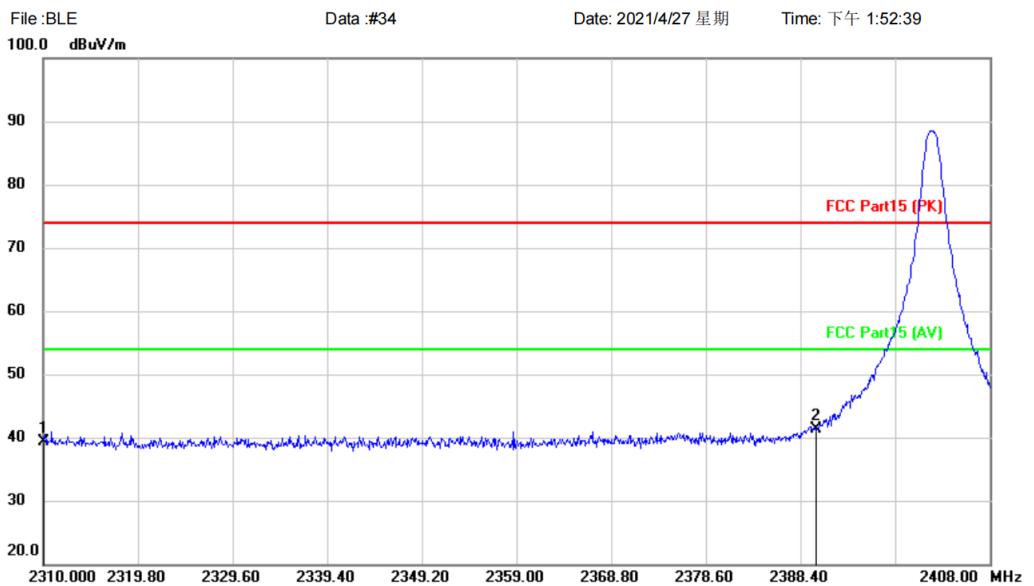
[TestMode: TX Low channel]; [Polarity: Vertical]
Radiated Emission Measurement

Site
Polarization: Vertical
Temperature:
Limit: FCC Part15 (PK)
Power:
Humidity: %
EUT: True Wireless Earbuds
Distance: 3m
M/N: EP-N8
Mode: TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	43.81	-4.61	39.20	74.00	-34.80	peak	150	270
2	*	2390.000	45.58	-4.27	41.31	74.00	-32.69	peak	150	270

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

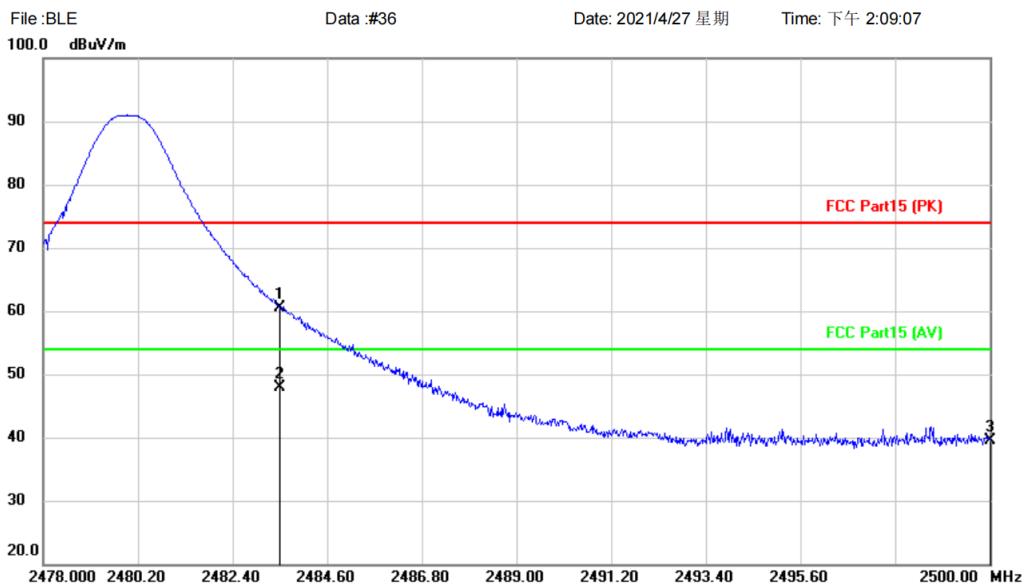Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement


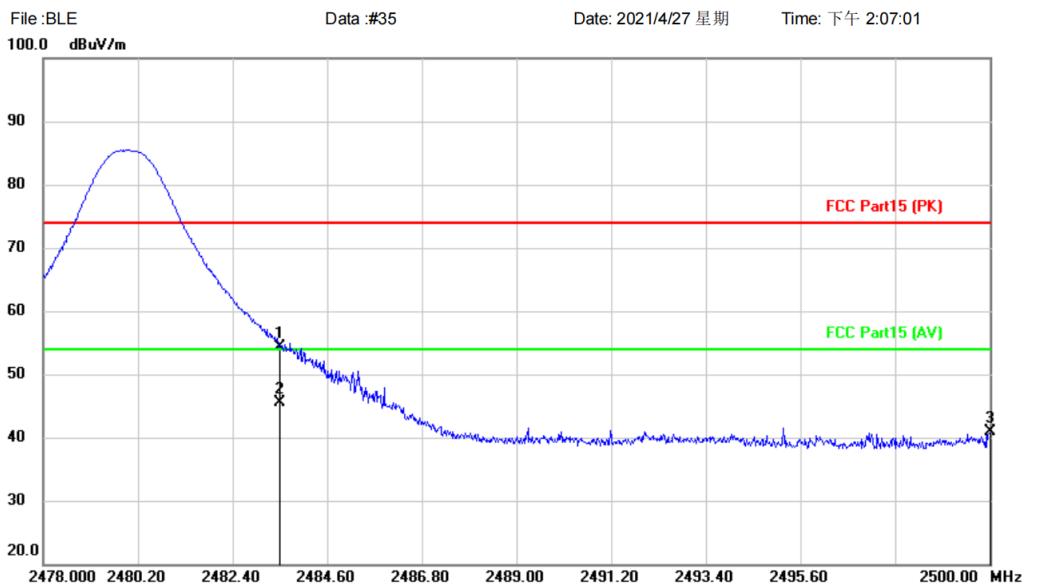
Site Polarization: **Horizontal** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: True Wireless Earbuds Distance: 3m
 M/N: EP-N8
 Mode: TX-H
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	64.31	-3.84	60.47	74.00	-13.53	peak	150	60
2	*	2483.500	51.83	-3.84	47.99	54.00	-6.01	AVG	150	60
3		2500.000	43.30	-3.78	39.52	74.00	-34.48	peak	150	60

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement

Site
Polarization: Vertical
Temperature:
Limit: FCC Part15 (PK)
Power:
Humidity: %
EUT: True Wireless Earbuds
Distance: 3m
M/N: EP-N8
Mode: TX-H
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB		dBuV/m	dB	Detector	cm	degree
1		2483.500	58.17	-3.84	54.33	74.00	-19.67	peak	150	186
2	*	2483.500	49.33	-3.84	45.49	54.00	-8.51	AVG	150	186
3		2500.000	44.66	-3.78	40.88	74.00	-33.12	peak	150	186

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass


5 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

5.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

5.2 BLOCK DIAGRAM OF TEST SETUP

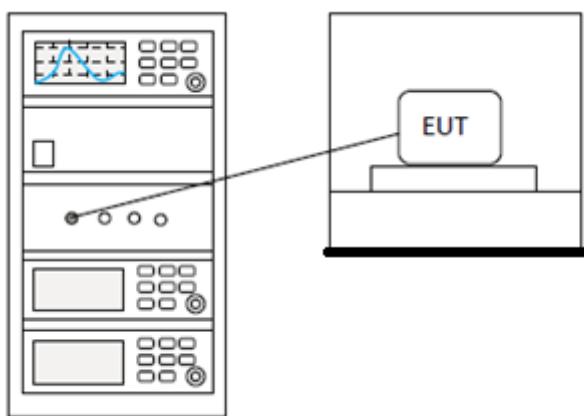

5.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


6 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

6.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

6.2 BLOCK DIAGRAM OF TEST SETUP

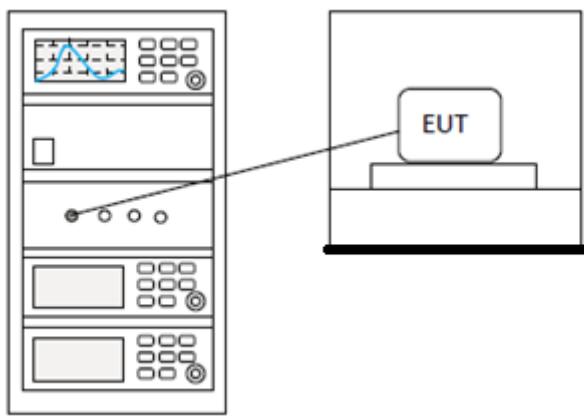

6.3 TEST DATA

Pass: Please Refer To Appendix: For Details


7 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

7.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2 BLOCK DIAGRAM OF TEST SETUP

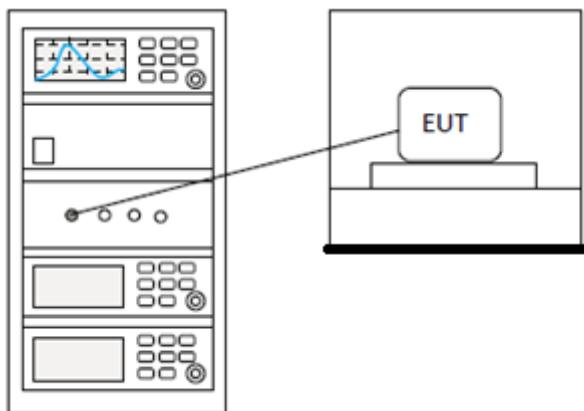

7.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


8 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

8.1 LIMITS

Limit: ≥ 500 kHz

8.2 BLOCK DIAGRAM OF TEST SETUP

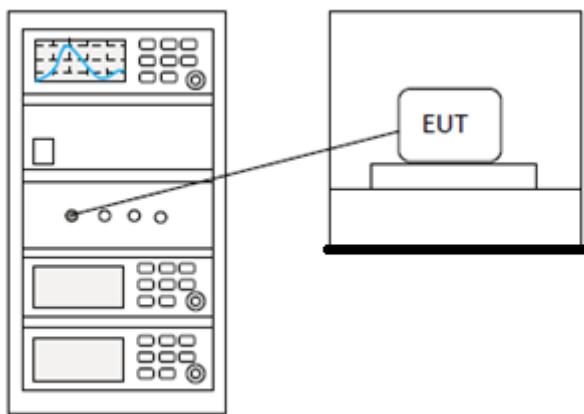

8.3 TEST DATA

Pass: Please Refer To Appendix: For Details

9 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


9.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.06dBi.

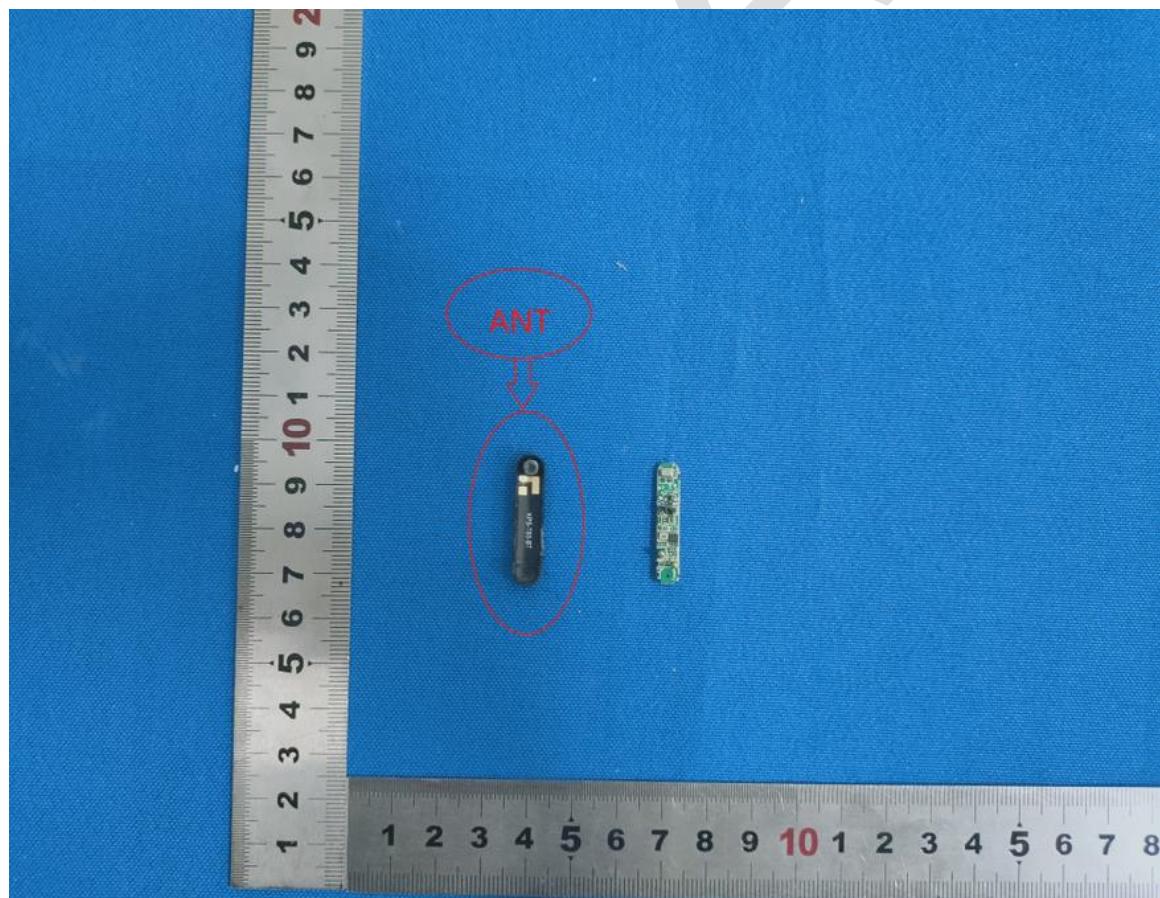


10 APPENDIX


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.413	0.413	30	Pass
NVNT	BLE 1M	2442	Ant1	0.631	0.631	30	Pass
NVNT	BLE 1M	2480	Ant1	0.222	0.222	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

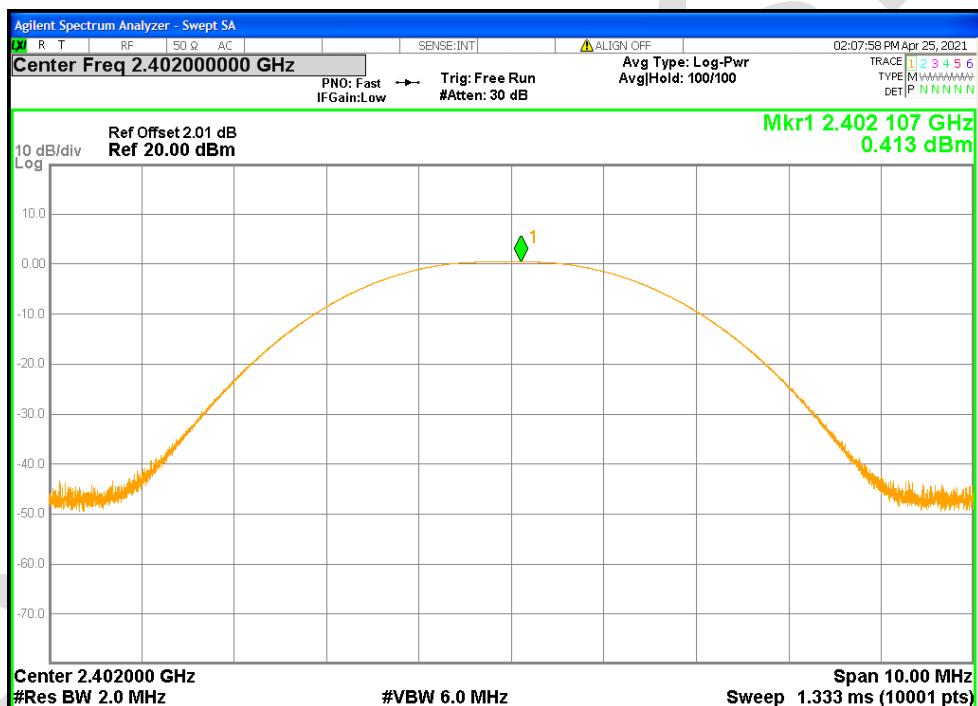

Power NVNT BLE 1M 2442MHz Ant1

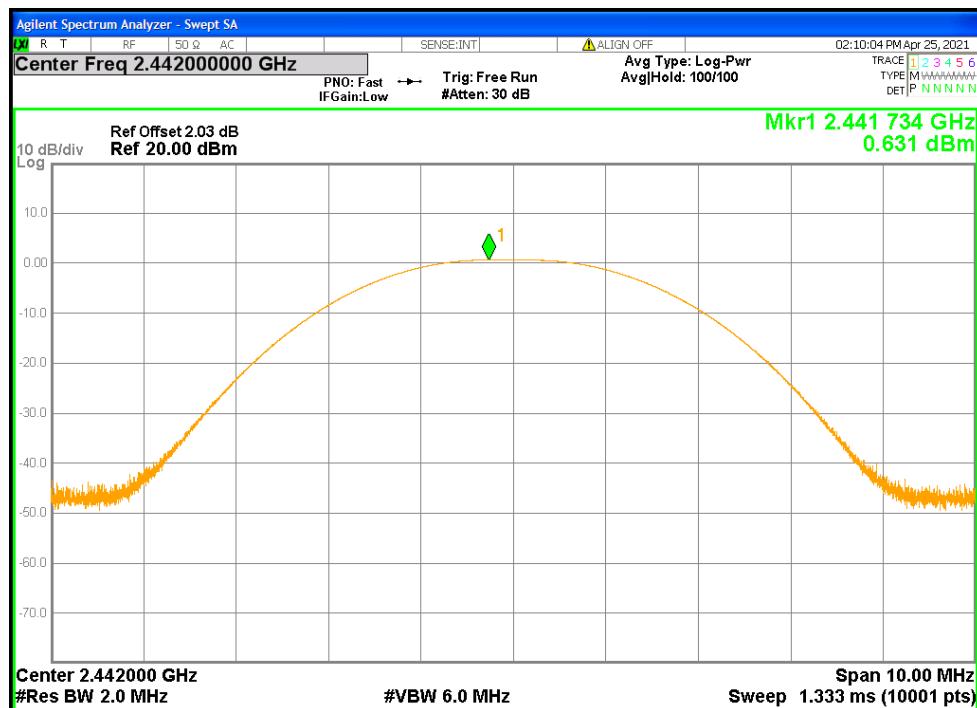


Power NVNT BLE 1M 2480MHz Ant1

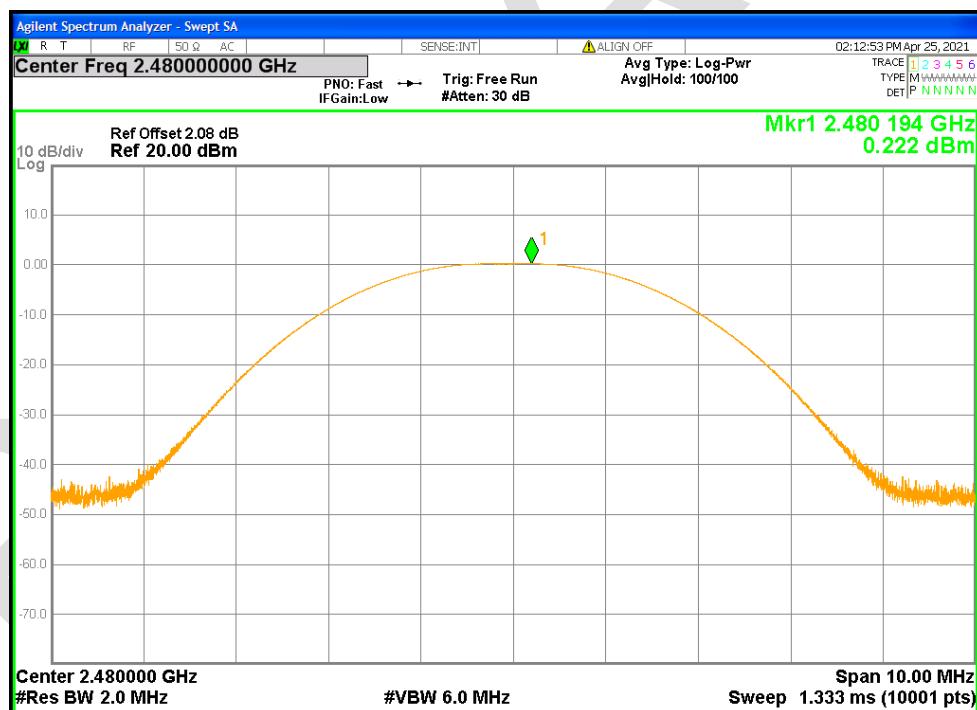


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.671	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.671	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.658	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

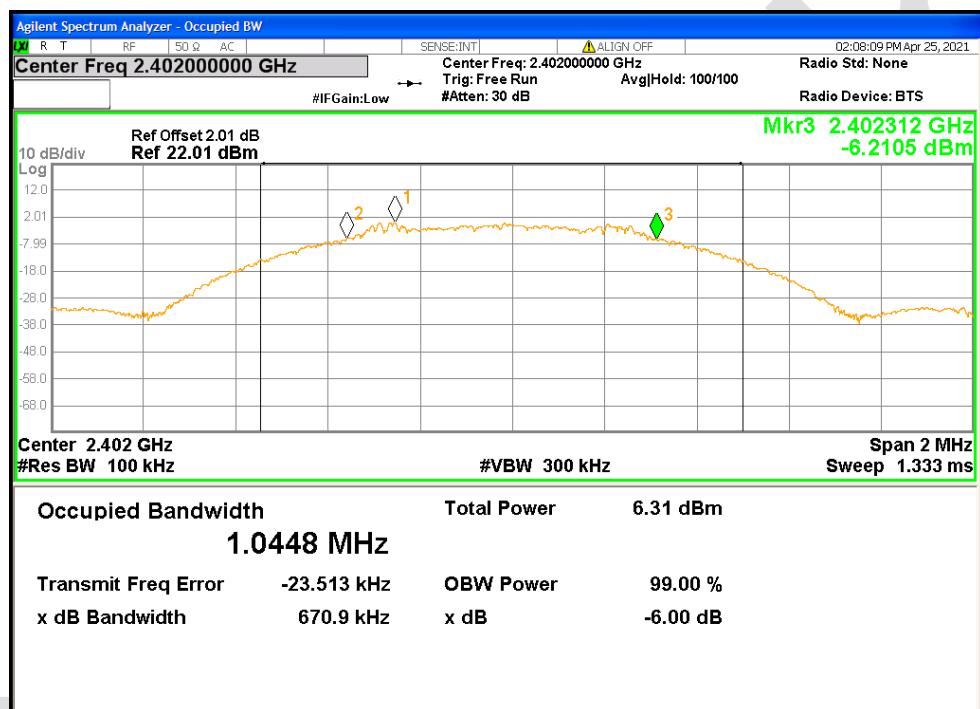

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

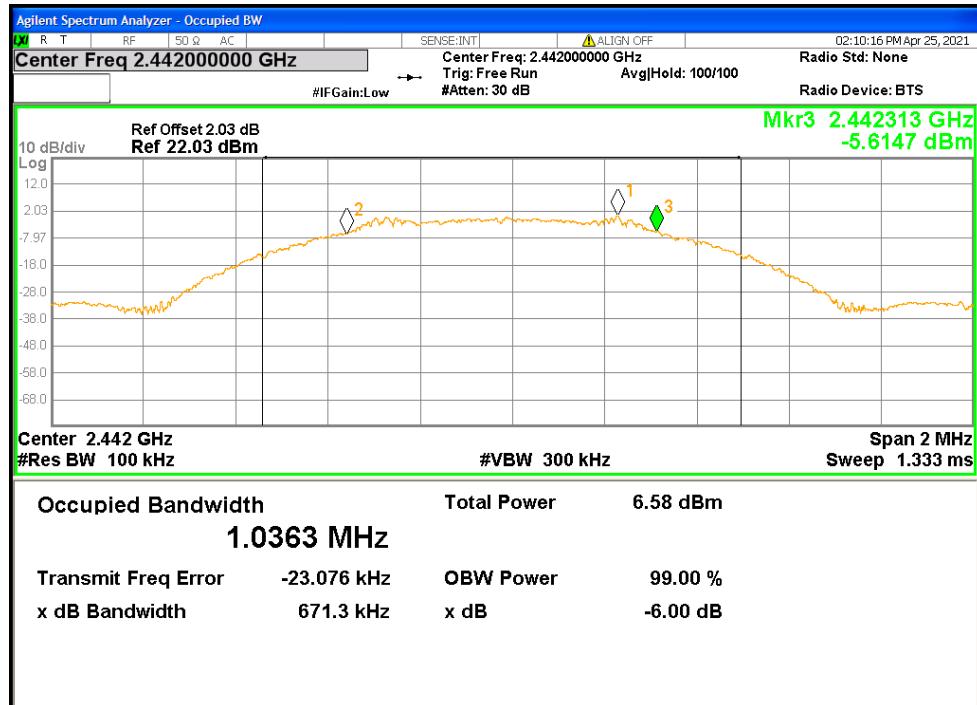


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

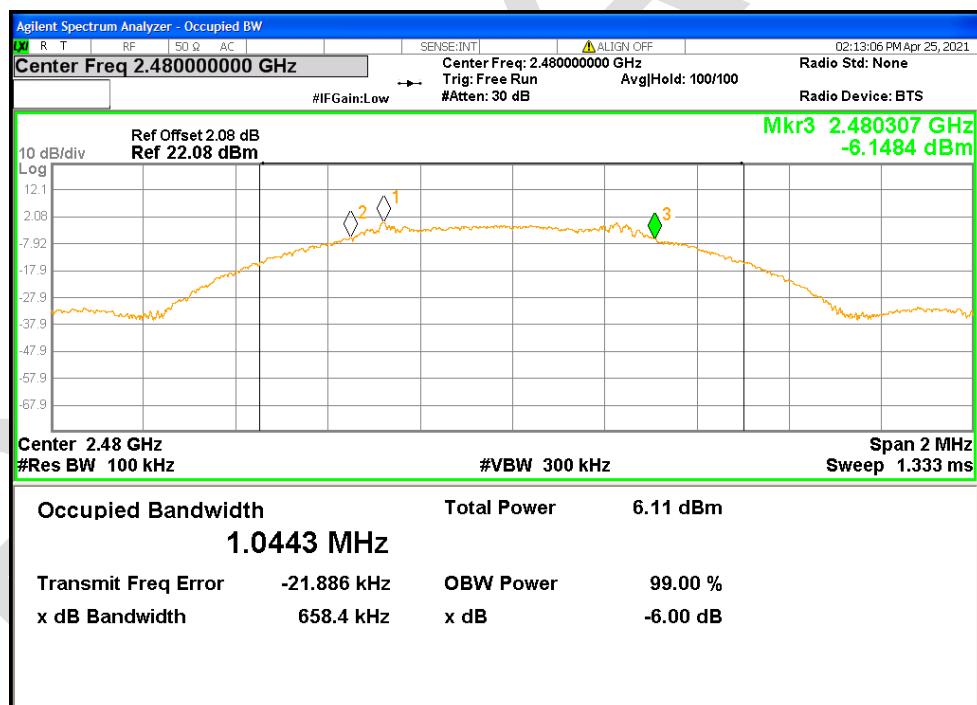


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.038312917
NVNT	BLE 1M	2442	Ant1	1.030321627
NVNT	BLE 1M	2480	Ant1	1.029208562


OBW NVNT BLE 1M 2402MHz Ant1

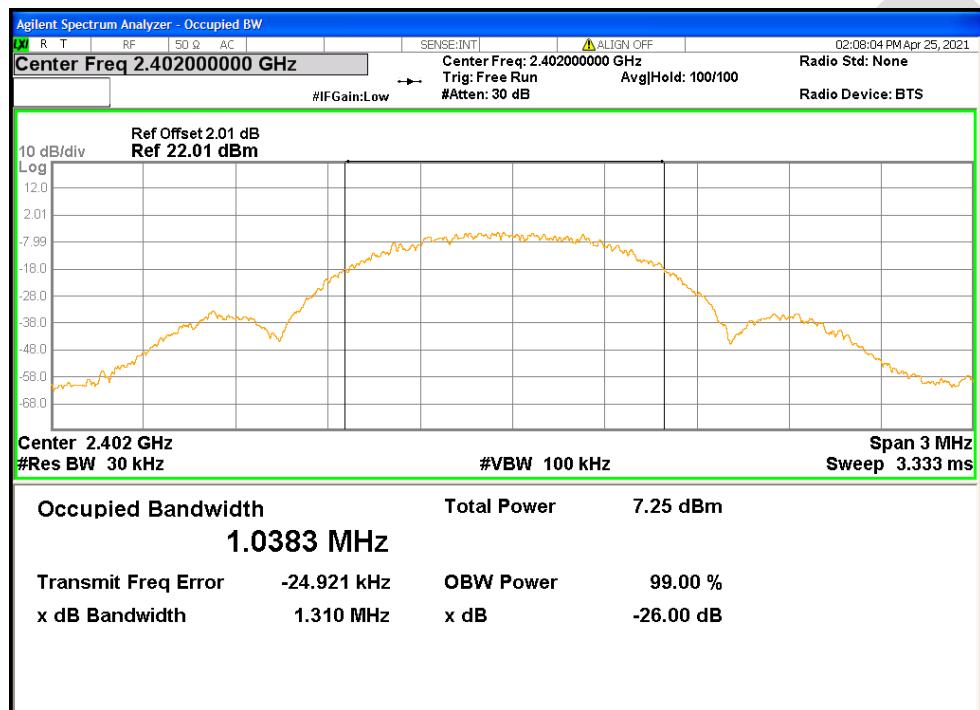

OBW NVNT BLE 1M 2442MHz Ant1

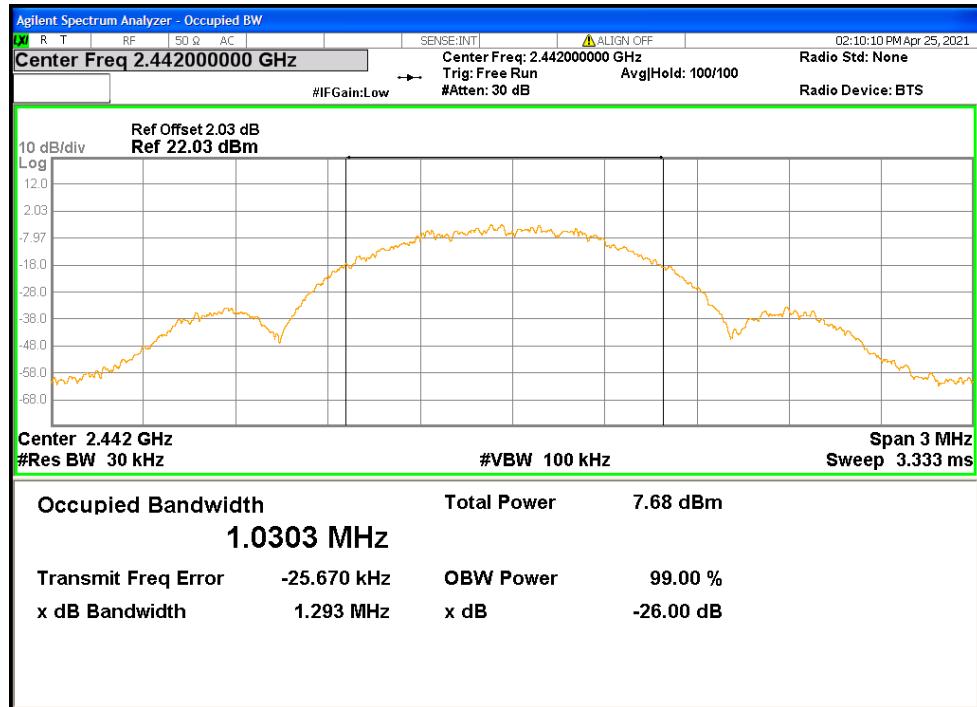



OBW NVNT BLE 1M 2480MHz Ant1

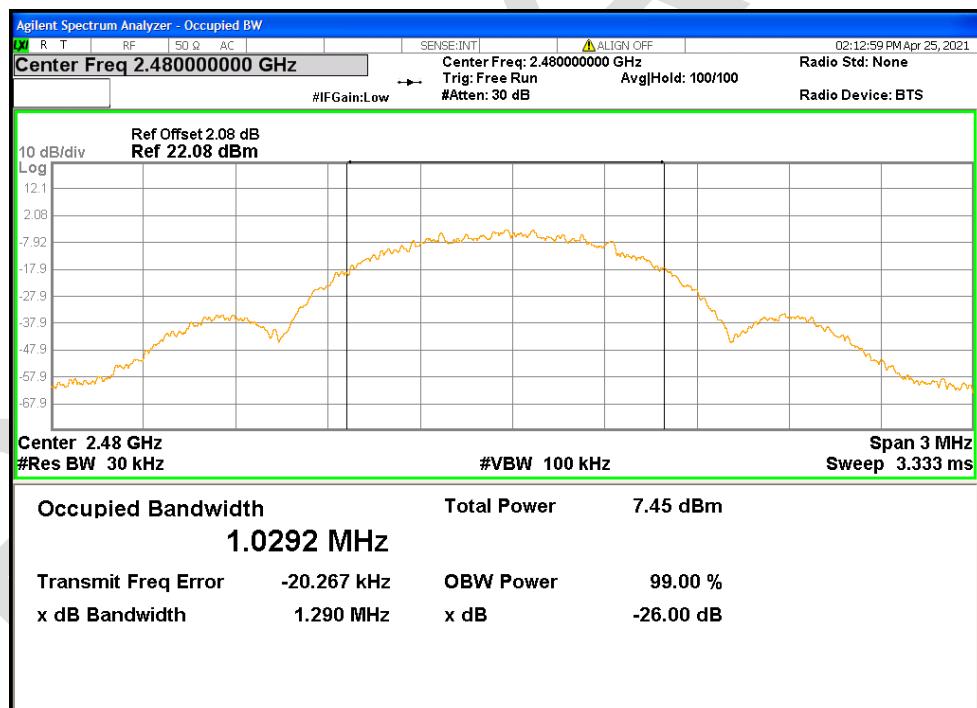


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.481	8	Pass
NVNT	BLE 1M	2442	Ant1	-0.006	8	Pass
NVNT	BLE 1M	2480	Ant1	-0.702	8	Pass

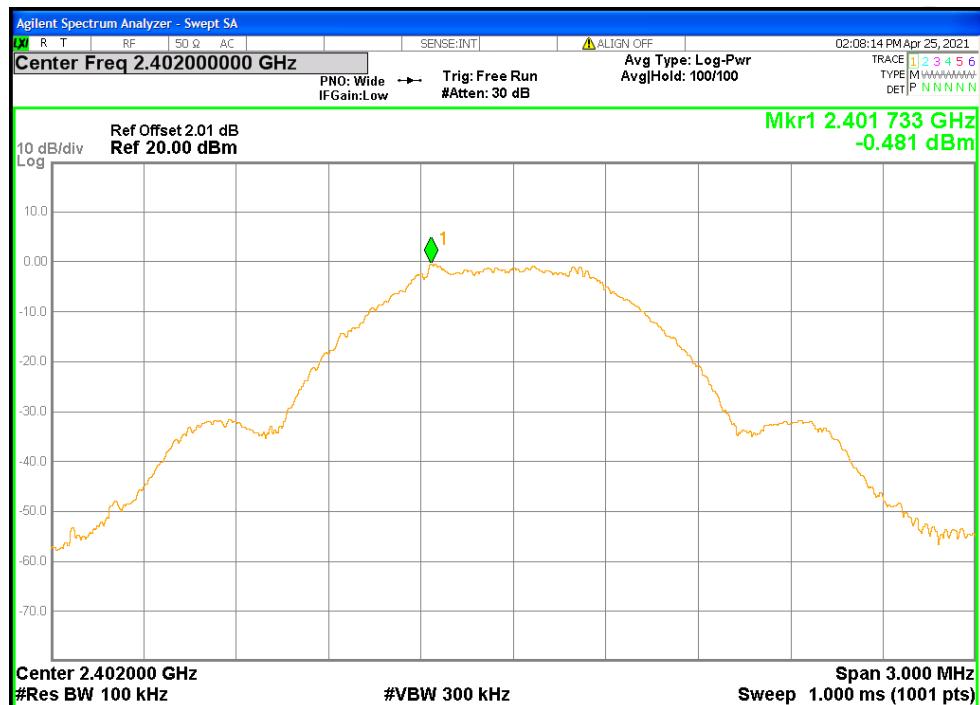PSD NVNT BLE 1M 2402MHz Ant1

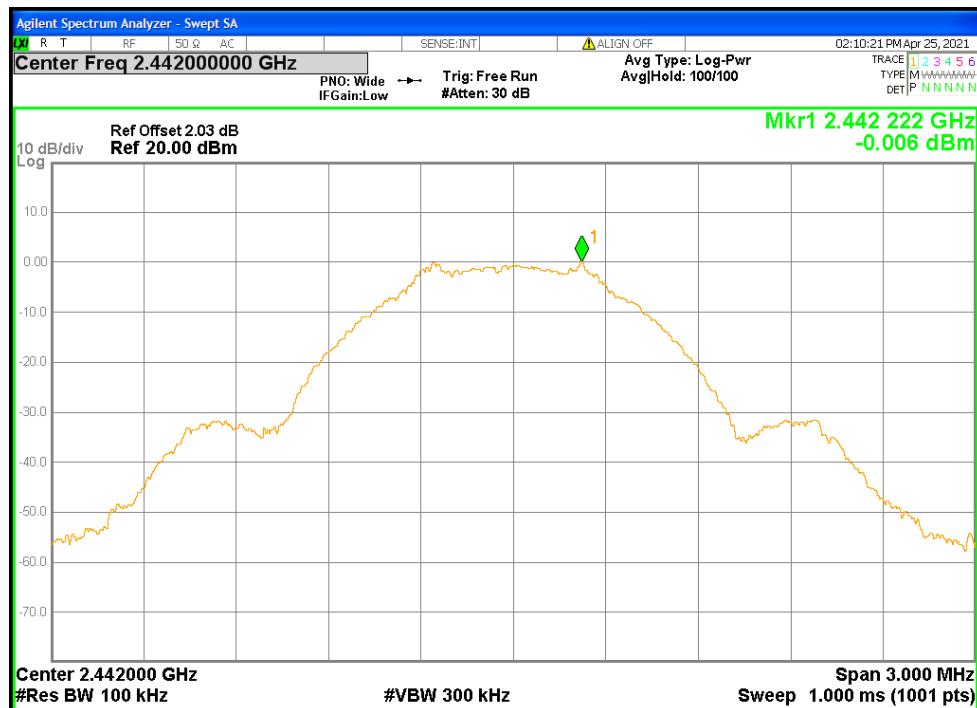PSD NVNT BLE 1M 2442MHz Ant1

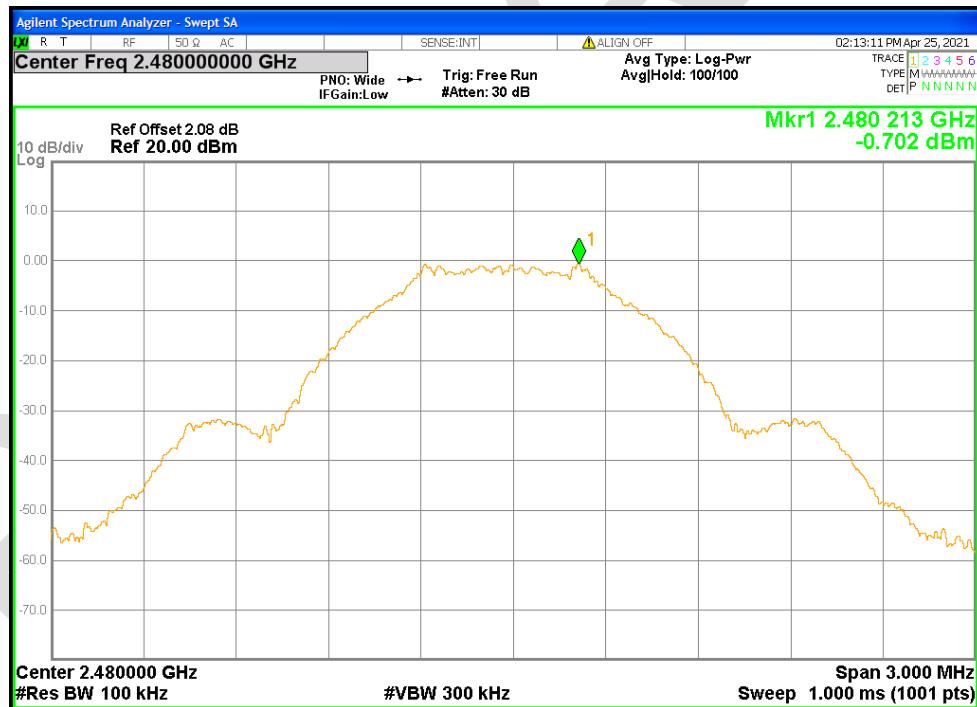


PSD NVNT BLE 1M 2480MHz Ant1




Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-55.86	-30	Pass
NVNT	BLE 1M	2480	Ant1	-55.69	-30	Pass


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

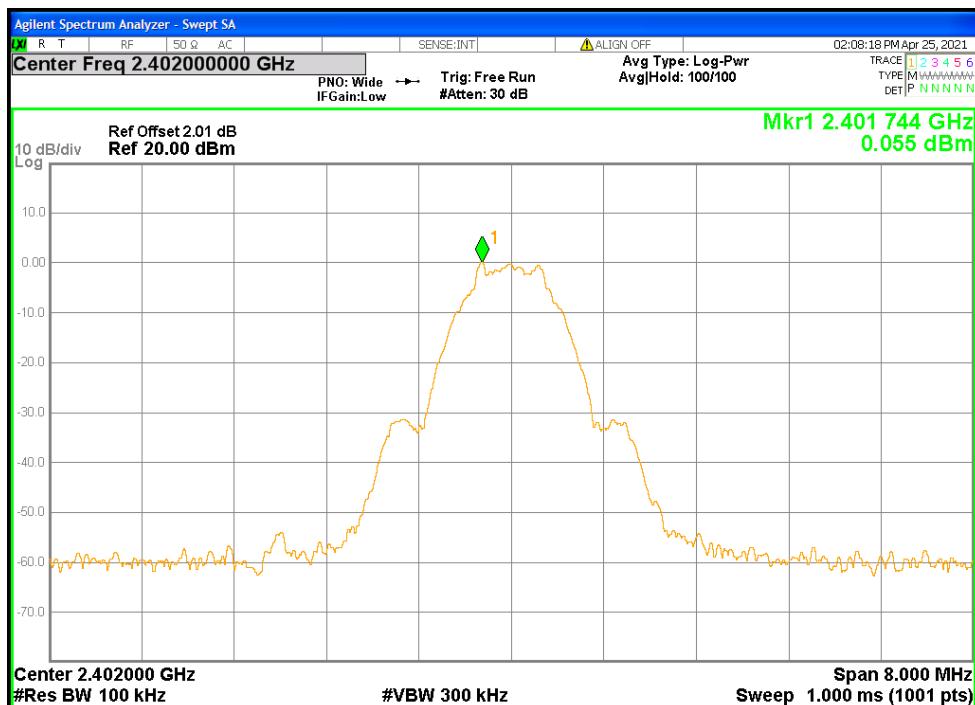


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

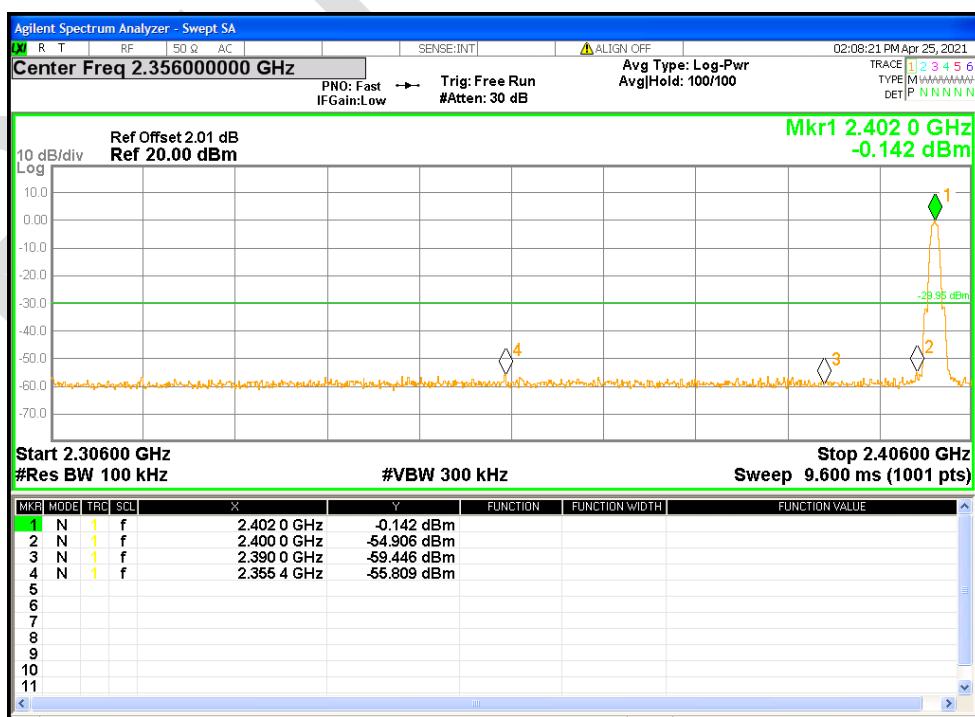

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

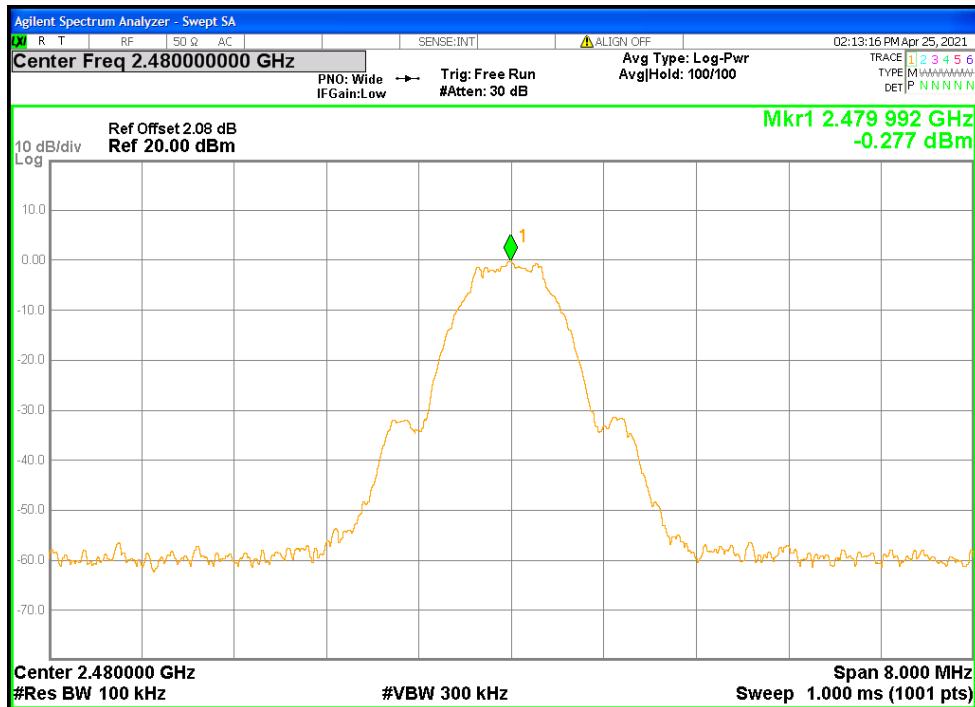



Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

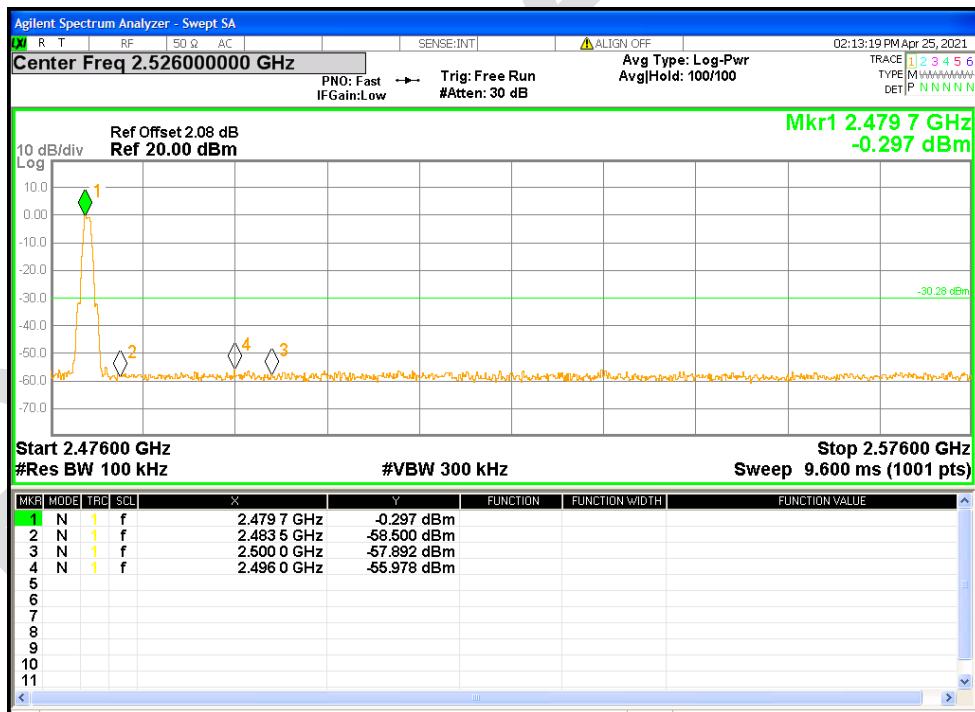


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-43.96	-30	Pass
NVNT	BLE 1M	2442	Ant1	-42.29	-30	Pass
NVNT	BLE 1M	2480	Ant1	-40.49	-30	Pass

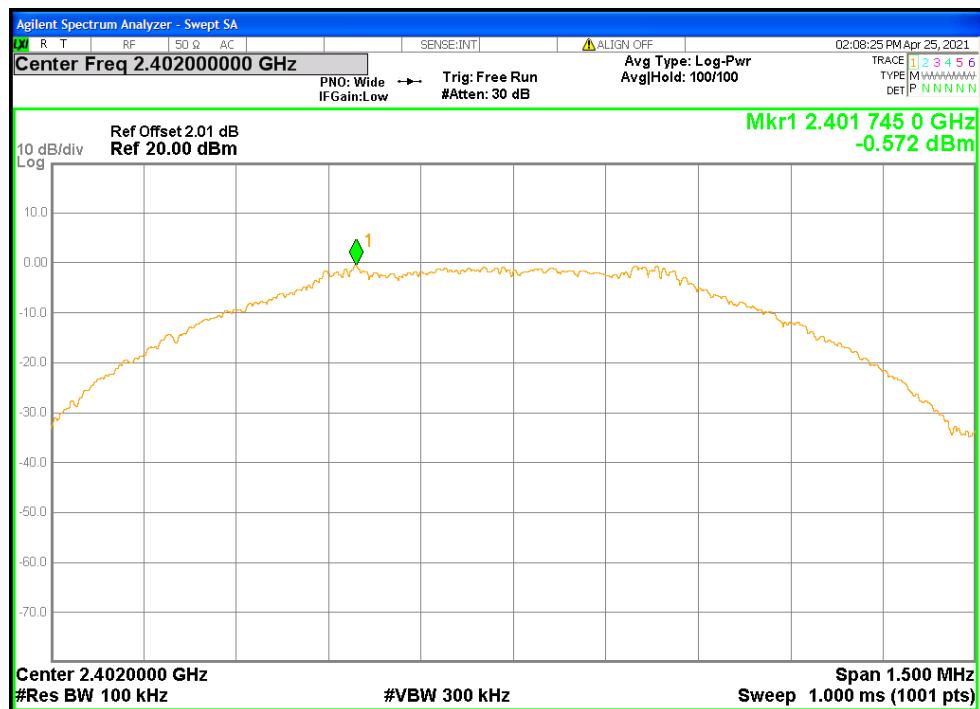
Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

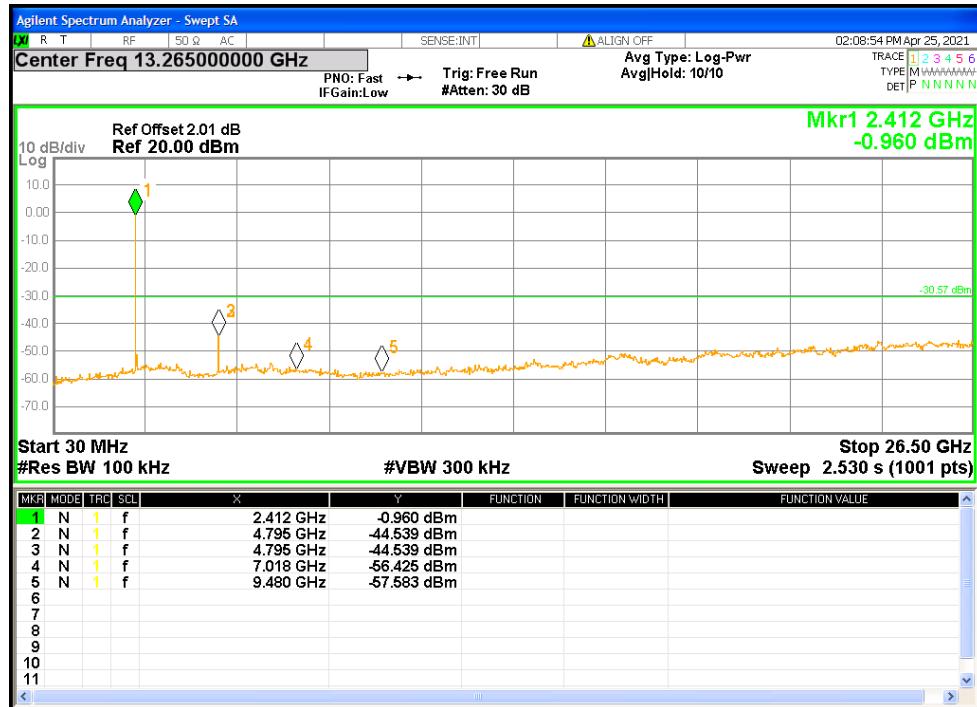Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

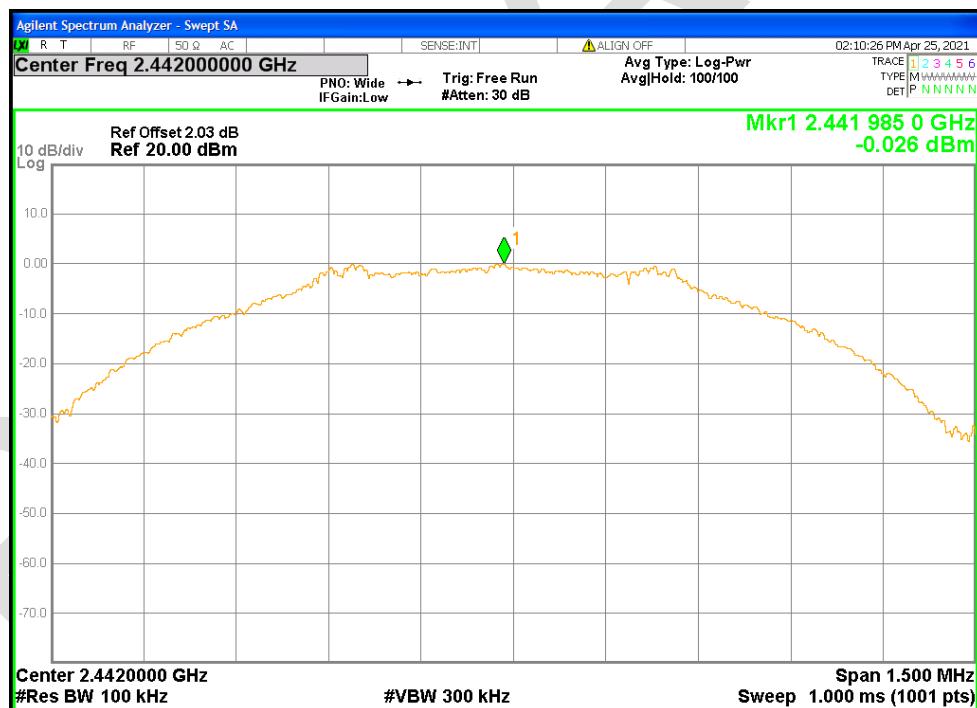


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

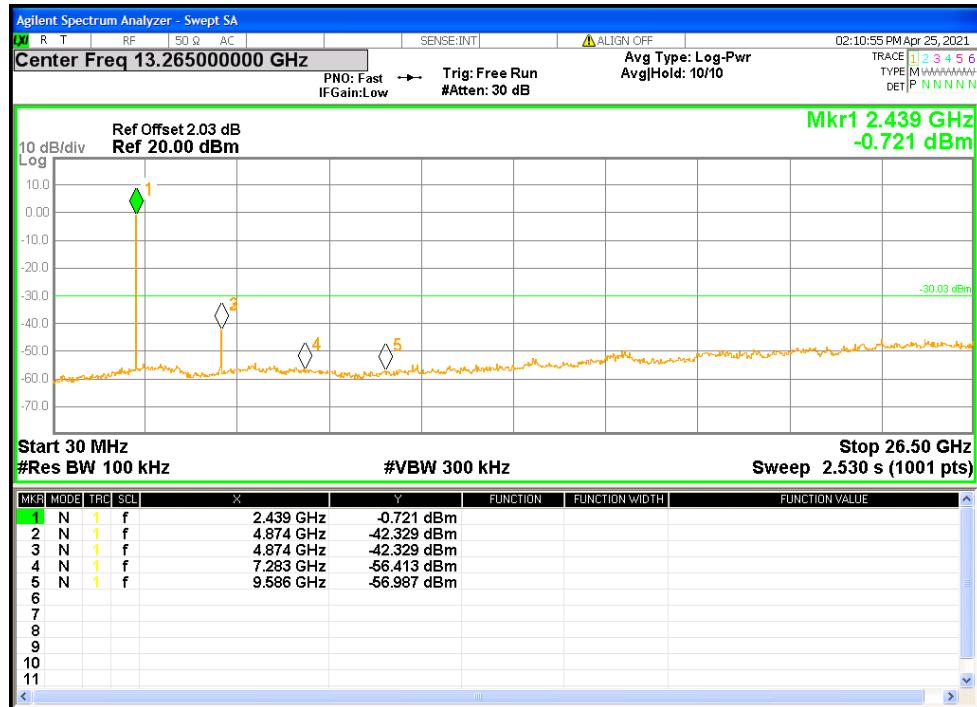


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission



Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

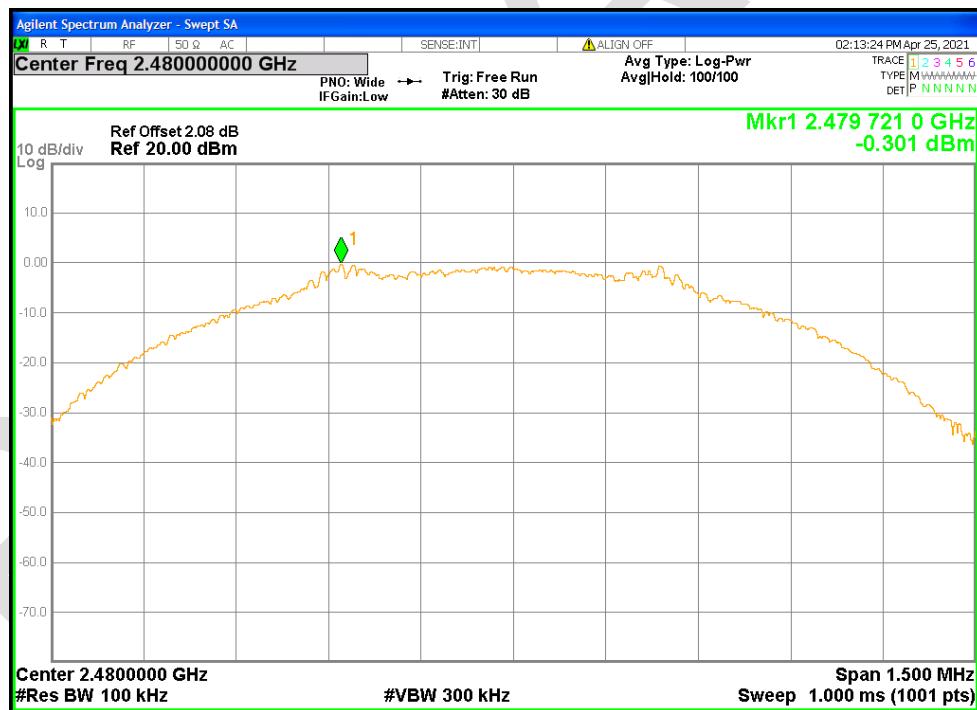


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

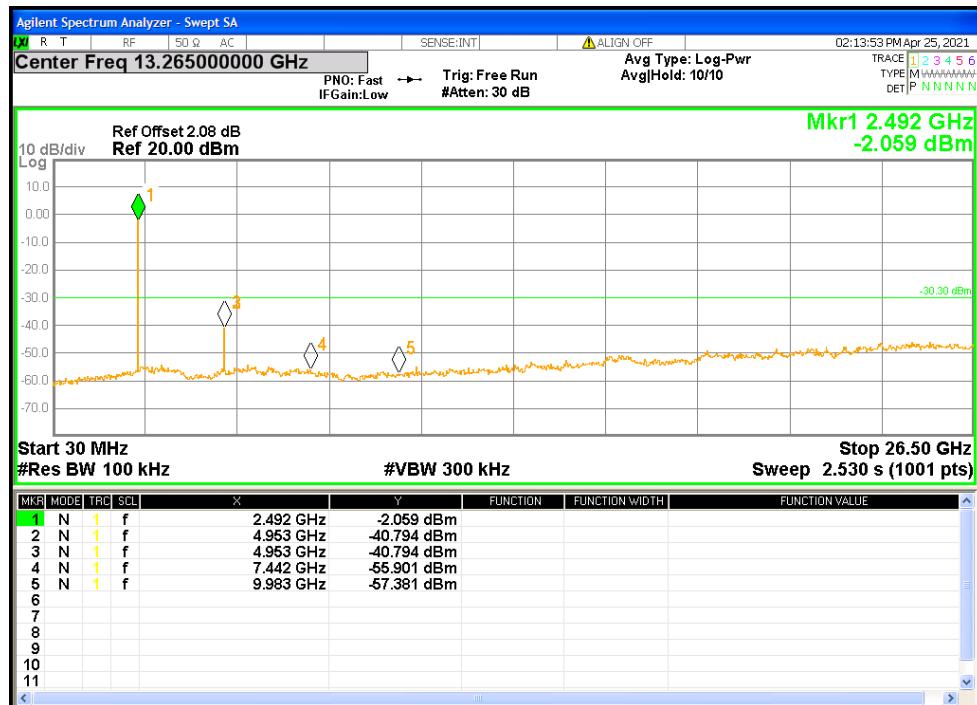

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Spurious Emissions

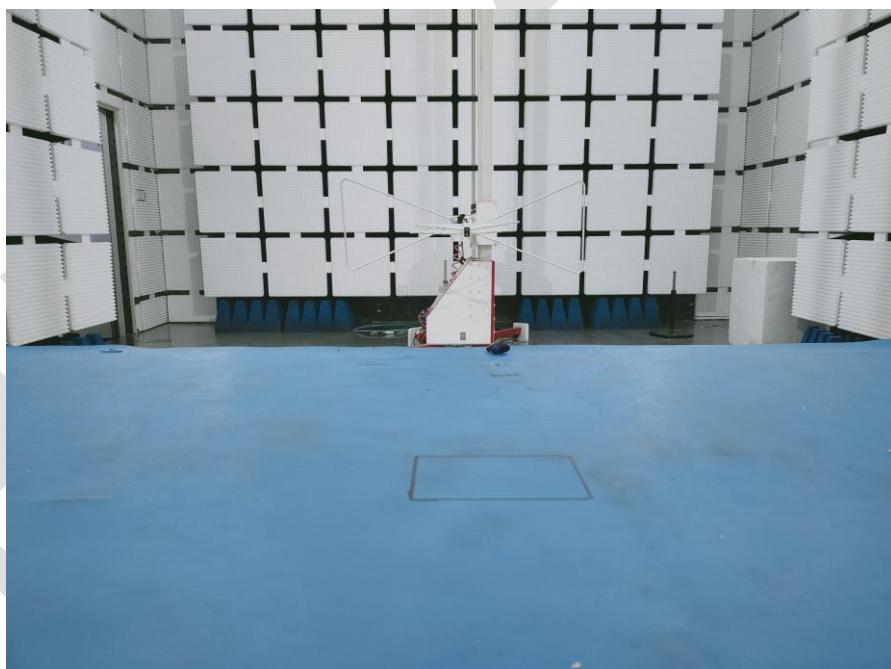

Conducted Emissions at AC Power Line (150kHz-30MHz)



APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202103-A6201

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia