

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

NOTES: (UNLESS OTHERWISE SPECIFIED)

1 MATERIAL: WHITE PET, ADHESIVE BACKED. MANUFACTURERS P/N#FASSON 72825 OR EQUIVALENT.


△2 SEE BOM FOR CORRECT COUNTRY OF MANUFACTURING

△3 REGULATORY ID LOCATION.

4 ADHESIVE TO BE PROTECTED UNTIL TIME OF USE.

5 PART TO BE ROHS COMPLIANT.

REV		DESCRIPTION	DATE	APPROVED
X1		INITIAL PROTOTYPE RELEASE -CA	30JUN20	
X2		UPDATE FCC ID- CA	04FEB21	

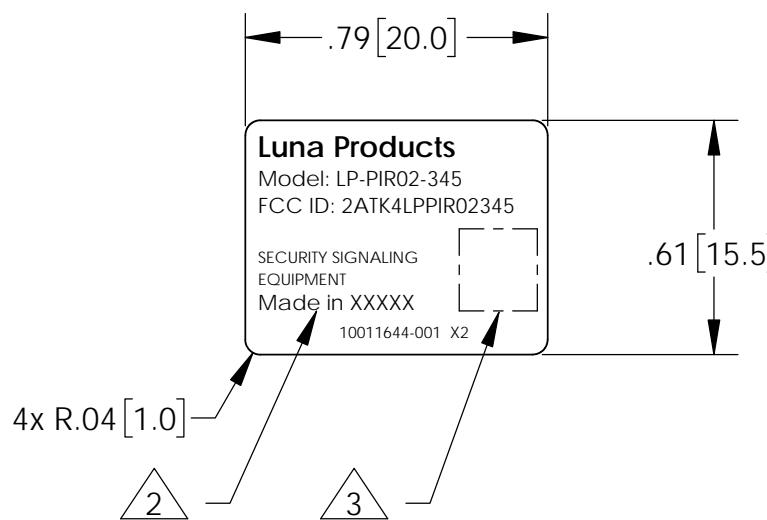

UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE INCHES [MM]:	PROJECT:	lunaProducts		
TOLERANCES: DECIMALS: XX±.02 [5] XXX±.010 [25] ANGLES: ±0.5° ROUNDNESS: ±.005 [13] FLATNESS: ±.005 [13] CONCENTRICITY: ±.005 [13]	CAD OPERATOR:	DATE	TITLE:	
MATERIAL: NOTED	C.ACERA	30JUN20	LABEL,FCC/PROD ID,PIR02	
FINISH: NOTED	CHECKED:	DATE	SIZE:	DRAWING NO.:
	APPROVED:	DATE	B	10011644-001
	APPROVED:	DATE	SCALE:	REV.:
			2/1	X2
			DO NOT SCALE DRAWING	
			SHEET: 1 OF 1	

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1



DURABLE PORTFOLIO

Fasson® 2 Mil White Polyester TC/S333/50#SCK ABC

Product Data Sheet Spec#: 72825

Facestock		Facestock physical properties				
2 Mil White Polyester TC is a homogeneously pigmented white facestock featuring excellent tear strength, heat resistance, dimensional stability, opacity, and chemical resistance.		Caliper:	0.0020	Imperial Value	Units	Metric Value
		ASTM D1000		inches		50.80
		Tensile:	MD	21,300	PSI	kg/cm ²
		ASTM D882	CD	28,400	PSI	kg/cm ²

Adhesive		Adhesive physical properties				
S333 An excellent general purpose industrial grade clear permanent acrylic adhesive. Features high initial tack to most high and medium surface energy substrates.		Type:	Emulsion Acrylic	Imperial Value	Units	Metric Value
		Caliper:	0.0008	inches		20.32
		ASTM D1000				micron
		Standard Coat Wt:				26
		Minimum Appl Temp:	25	F		-4
		Service Temp	Min	F		-40
		Range:	Max	300	F	149
		Loop Tack Stainless Steel: PSTC11		36.0	oz/inch	39.6
						N/100 mm

Liner		Liner physical properties				
50#SCK is a bleached, super-calendered paper stock with very good diecutting and matrix stripping properties. Supplied with an Anti Block Coating ("ABC") on the backside of the liner to control adhesive and label transfer to the backside of the liner in finished, wound rolls. This liner should not be used in fanfolded label applications and is not recommended for back printability.		Caliper:	0.0032	Imperial Value	Units	Metric Value
		ASTM D1000		inches		81.2800
		Basis Wt: TAPPI T410 *(24" x 36" 500 sheets)	54.5	lbs/ream		88.8
		Tensile:	MD	48.0	lbs/inch	211.2
		ASTM D882	CD	26.0	lbs/inch	114.4
		Tear:	MD	1.8	ounces	49.9
		TAPPI T414	CD	2.1	ounces	58.2
						grams

Liner Release:		Total Construction Caliper (approximate):			
TMLI 90° removal of Liner from Facestock.					
Rate of Removal	Grams/2" Width				
400 inches/min.	40	0.006 inches (6 mils; 152 micron)			

Features and Benefits

- Opaque white facestock with very good hiding power and physical strength.
- Glossy clear top coat that accepts most flexographic, letterpress, and rotary screen inks.
- Excellent thermal transfer printability with most wax/resin and resin based ribbons.
- Excellent chemical resistance and good outdoor durability

Applications and Uses

This product is suitable for a variety of durable labeling applications such as:

- Product identification labels
- Barcode labels
- Rating plates
- Work in process (WIP) labels
- Property identification or asset tags
- Durable goods labeling
- Recognized for UL969 component labels. This product is UL Recognized and CSA Accepted for indoor and outdoor applications. For specific recognition or acceptance details, consult UL file MH17205 and CSA file 97198

Printing and Converting

The topcoat is designed for printing by most solvent, UV cured, and water-based flexographic inks, UV cured letterpress, and rotary screen inks. Specially formulated inks are normally not necessary; however, testing is recommended prior to final ink selection. Also suitable for thermal transfer printing with select ribbons and printers. Consult product recognition files or Fasson Thermal Transfer Ribbon Guide for specific recommendations. This product can be diecut and stripped at high speeds on most web-fed presses. Sample labels in a variety of shapes have been successfully dispensed and applied with standard labeling systems.

RoHS/Regulation 2002/95/EU

The substances listed in article 4 lid 1 of 2002/95/EU (RoHS) are not intentionally used in this product. The concentration limits of these substances will not exceed the set maximum concentration limits as provided in the proposed amendment for 2002/95/EU.

Shelf Life

Unless specified otherwise in this document, one year when stored at 72°F at 50% RH

Note:

The technical data presented is from tests we believe to be reliable but should be considered representative or typical only and should not be used for specifications purposes. This product should be tested thoroughly under end-use conditions to ensure it meets the requirements of the specific application.

Appendix**Performance Data:**

The following technical data should be considered representative or typical only and should not be used for specification purposes.

Surface	Initial (15 minute dwell)		72 Hours at Room Temperature		72 Hours at 120° F		96 Hours at 150° F (65° C) & 80% Relative Humidity	
	oz/in	N/100mm	oz/in	N/100mm	oz/in	N/100mm	oz/in	N/100mm
1. Aluminum	55	61	60	66	63	70	89	98
2. Stainless Steel	36.5	40.2	59.6	65.6	68.4	75.2	70.4	77.4
3. ABS Plastic	51.5	56.7	62.9	69.2	60.2	66.2	37.1	40.8
4. Polypropylene	19	21	5.4	5.9	28	31	19	21
5. HDPE	11.2	12.3	12.9	14.2	17.2	18.9	33.4	36.7
6. LDPE	13	14.3	28	31	12	13	15	16

Environmental Performance: Chemical Resistance test results

The performance results are based on 4 hour immersions at room temperature unless otherwise noted (gasoline is 1 hour). Samples were applied to stainless steel panels and conditioned for 24 hours before immersion and evaluated immediately upon removal. Adhesion measured at 180° peel.

Chemical	Adhesion to Stainless Steel		Visual	Edge
	oz/in	N/100mm		
1. 70% IPA	57.3	63	No Chnage	3.8
2. Tide® Detergent	40.5	44.6	No Change	0
3. Engine Oil (10W30)	46	50.6	No Change	0
4. Water	26.5	29.2	No Change	0
5. Ammonia - pH 11	0	0	No Change	0
6. 409® Cleaner	0.2	0.2	No Change	0
7. Toluene	12.4	13.6	No Change	3.3
8. Brake Fluid	48.96	53.9	No Change	0
9. Reference Fuel C	21.12	23.2	No Change	10.2
10. Kerosene K1	41.3	45.4	No Chnage	0
11. Heptane	47.5	52.3	No Change	0

Compliance Recognition: UL, CSA



Underwriters Laboratories, Inc.

Substrates	Minimum Temperature		Maximum Temperature		(I=Indoor Only I/O=Indoor & Outdoor)
	°F	°C	°F	°C	
1. Aluminum	-40	-40	302	150	I/O
2. Galvanized Steel	-40	-40	302	150	I/O
3. Stainless Steel	-40	-40	302	150	I/O
4. Acrylic Paint	-40	-40	302	150	I/O
5. Epoxy Paint	-40	-40	302	150	I/O
6. Porcelain	-40	-40	302	150	I/O
7. Alkyd Enamel	-40	-40	302	150	I/O
8. Polyester Paint	-40	-40	302	150	I/O
9. Nylon	-40	-40	212	100	I/O
10. Polycarbonate	-40	-40	212	100	I/O
11. Melamine	-40	-40	212	100	I/O
12. Polystyrene	-40	-40	176	80	I/O
13. ABS Plastic	-40	-40	176	80	I/O
14. Unsat Thermoset Polyester	-40	-40	212	100	I
15. Phenolic	-40	-40	212	100	I
16. Polyphenylene Oxide	-40	-40	176	80	I
17. Polyethylene			140	60	I
18. and others					

Recognized Ribbons: Armor "AXR7+", Armor "AXR600", Astro Med Inc "R-5", Astro Med "RF", Dai Nippon "R-300", Dai Nippon "R-510", Ilimak "SP-410", Ilimak "SP-330", Ilimak "Primemark", Intermec "TMX 1500", Intermec "TMX 3200", ITW "R-91", ITW "B324", Japan Pulp & Paper "Resin 1", Japan Pulp & Paper "Sigma P", Kurz "K300", Kurz "K500", Kurz "K501", NCR "Promark 3", NCR "Resin Max", NCR "Perma Max", NCR "K3", Ricoh "B110C", Ricoh "B110CX", Ricoh "120EC", Sato Corp. "Premier 1", Sony "TR4070", Sony "TR4075", Sony "TR5070", Sony "TR6070", Sony "TR6075", Sony "Signature Series Resin", Union Chemicar "US300", Zebra "5095", Zebra "5100", Zebra "5463", Zebra "Z-4100", and others.



Canadian Standards Association

Substrates	Minimum Temperature		Maximum Temperature		(I=Indoor Only I/O=Indoor & Outdoor)
	°F	°C	°F	°C	

					Outdoor
1. Metals	-40	-40	302	150	I/O
2. Plastics Group I	-40	-40	212	100	I/O
3. Plastics Group II	-40	-40	176	80	I/O
4. Plastics Group III	-40	-40	176	80	I/O
5. Plastics Group V	-40	-40	176	80	I/O
6. Plastics Group VI	-40	-40	176	80	I/O
7. Plastics Group VII	-40	-40	176	80	I/O
8. Plastics Group VIII	-40	-40	176	80	I/O

Acceptable Ribbons: Dai Nippon "R-300", Dai Nippon "R-510", Iimak "SP-330", ITW "R-91", Japan Pulp & Paper "Resin 1", NCR "Promark 3", Ricoh "B110C", Sato Corp. "Premier 1", Sony "TR4070", Sony "TR5070", Sony "Signature Series Resin", Zebra "5095", Zebra "Z-4100"

409® is a registered trademark of the Clorox Company

Tide® is a registered trademark of the Procter & Gamble Company

The information on compliance conditions, substrates, and printing products contained in the tables above represent a summary of recognized or acceptable conditions and printing products. Other conditions, substrates, and printing products may be recognized with this material. Please consult the specific compliance organization records or specific files for a complete listing.

Warranty

All sales and contracts for sale are expressly conditioned on the buyer's assent to Avery Dennison's terms and conditions found on its website at www.na.fasson.com. Avery Dennison hereby objects to any term, different from or additional to Avery Dennison's terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Avery Dennison.

www.na.fasson.com



Label and Packaging Materials-North

America

8080 Norton Parkway
Mentor, OH 44060
800-944-8511

