

FCC 47 CFR MPE REPORT

Dongguan Fuqiang Electronics Co. Ltd

OtterSpot Wireless Charging Battery

Model Number: OBFTC-0025-A

Additional Model: OBFTC-0022-A

FCC ID: 2ATKP-OBFTC-0022-A

| | |
|---|--|
| Prepared for: | Dongguan Fuqiang Electronics Co. Ltd |
| | Cheng Uei Industry District, Dong-Keng, Dongguan, Guangdong, China |
| | |
| Prepared By: | EST Technology Co., Ltd. |
| Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China | |
| Tel: 86-769-83081888-808 | |

| | |
|-----------------|--------------------|
| Report Number: | ESTE-R1906067 |
| Date of Test: | Jun. 15 ~ 17, 2019 |
| Date of Report: | Jun. 19, 2019 |



Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310

1. Limits for Maximum Permissible Exposure (MPE)

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Average Time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|------------------------|
| (A) Limits for Occupational / Control Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |


** means Plane-wave equivalent power density

2. Test equipment


| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------------------------|--------------|-----------|------------|------------|-----------|
| E-Magnetic field probe | Narda | 2304/03 | M-0018 | June,29,18 | 1 Year |
| Broadband field meter | Narda | ELT-400 | N-0045 | June,29,18 | 1 Year |

3. Test setup

A:

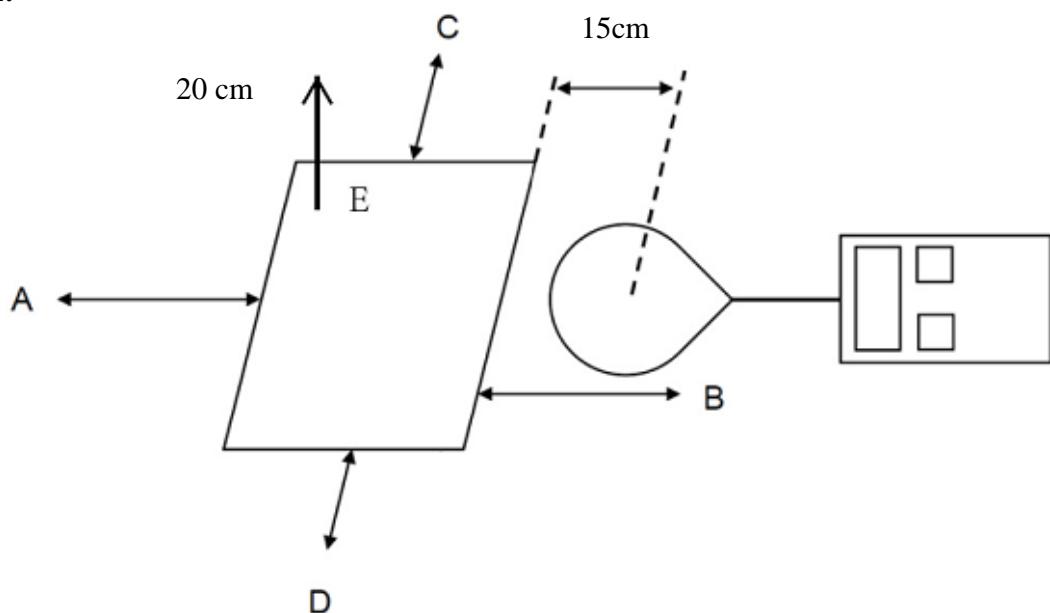

B:

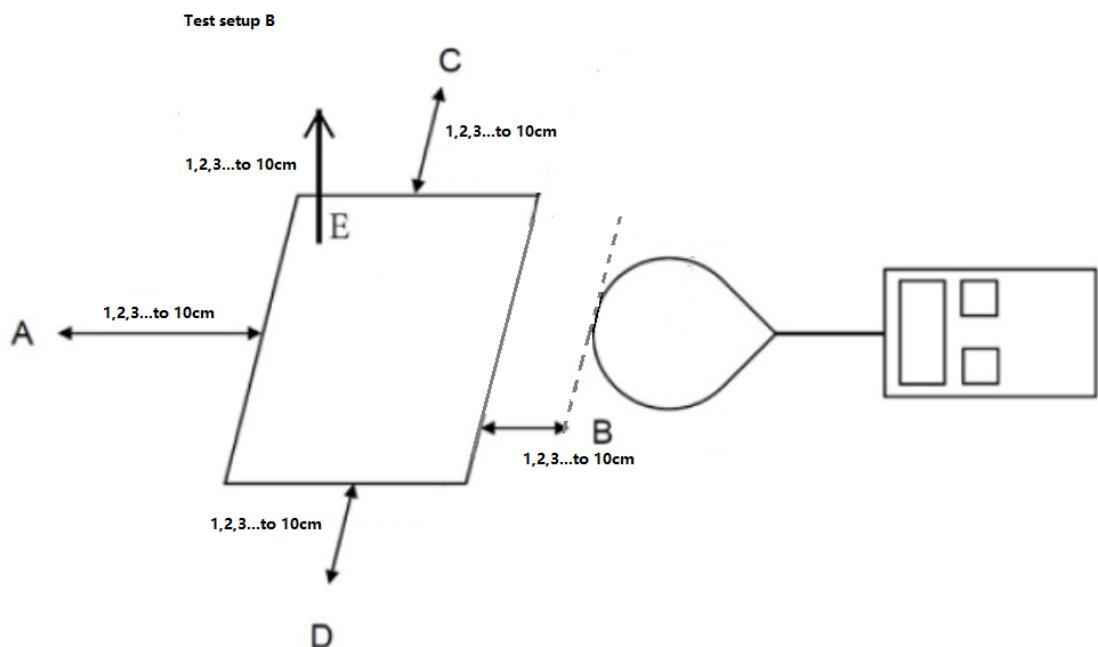

- a. The test was performed on 360 degree turn table in anechoic chamber.
- b. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe, for test setup A.
- c. Measure magnetic and electrical field strength at a distance 10cm to 1cm at 1cm iteration, Which is between the edge of the charger and the edge of of probe, for test setup B.
- d. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.
- e. The EUT was measured according to the dictates of KDB680106D01v03; And KDB Tracking Number 671578; TCB Workshop, October 2018, 5.2 RF Exposure Procedures.

4. Equipment Approval Considerations

According to the item 5(b) of KDB 680106 D01 RF Exposure Wireless Charging App v03.

| | |
|---|--|
| 1 | Power transfer frequency is less than 1 MHz |
| | YES; the device operated in the frequency range from 110.5-148KHz. |
| 2 | Output power from each primary coil is less than or equal to 15 watts. |
| | YES; the maximum output power of the primary coil is 10W. |
| 3 | The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils. |
| | YES; the transfer system includes only single primary and secondary coils. |
| 4 | Client device is placed directly in contact with the transmitter. |
| | YES; Client device is placed directly in contact with the transmitter. |
| 5 | Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion). |
| | No. |
| 6 | The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit. |
| | YES; The EUT field strength levels are 50% x MPE limits. |

5. Test Mode

| Mode | Description |
|--|-------------|
| Charging mode with dummy load | Full Load |
| | Half Load |
| | Empty Load |
| All power supplies working mode have been tested, The worst is the internal battery working mode, and only the worst results have been reported. | |

6. Test Result

Test Result for Test setup A:

E-Filed Strength at (15 cm from edges A,B,C,D, 20 cm from top E) surrounding the EUT (V/m)

| Test Mode | Full Load | Half Load | Empty Load |
|-----------------------|------------------|-----------|------------|
| Frequency range (kHz) | 110.5 to 148 kHz | | |
| Position A(V/m) | 1.352 | 1.201 | 1.178 |
| Position B(V/m) | 1.324 | 1.223 | 1.174 |
| Position C(V/m) | 1.350 | 1.234 | 1.195 |
| Position D(V/m) | 1.288 | 1.206 | 1.162 |
| Position E(V/m) | 1.576 | 1.416 | 1.303 |
| Limits (V/m) | 614 | | |
| 50% Limits(V/m) | 307 | | |

H-Filed Strength at (15 cm from edges A,B,C,D, 20 cm from top E) surrounding the EUT (A/m)

| Test Mode | Full Load | Half Load | Empty Load |
|-----------------------|------------------|-----------|------------|
| Frequency range (kHz) | 110.5 to 148 kHz | | |
| Position A(A/m) | 0.136 | 0.120 | 0.100 |
| Position B(A/m) | 0.132 | 0.123 | 0.098 |
| Position C(A/m) | 0.137 | 0.124 | 0.101 |
| Position D(A/m) | 0.130 | 0.122 | 0.092 |
| Position E(A/m) | 0.225 | 0.198 | 0.154 |
| Limits (A/m) | 1.63 | | |
| 50% Limits (A/m) | 0.815 | | |

Test Result for Test setup B:

Empty , Half , Full load all have been tested ,only worse case Max load (Full) is reported.

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

| Test distance (cm) | Position A (V/m) | Position B (V/m) | Position C (V/m) | Position D (V/m) | Position E (V/m) | Limits (V/m) |
|--------------------|------------------|------------------|------------------|------------------|------------------|--------------|
| 1 | 1.758 | 1.747 | 1.752 | 1.762 | 2.218 | 614 |
| 2 | 1.726 | 1.716 | 1.724 | 1.728 | 2.166 | 614 |
| 3 | 1.689 | 1.695 | 1.703 | 1.711 | 2.087 | 614 |
| 4 | 1.653 | 1.648 | 1.661 | 1.672 | 2.042 | 614 |
| 5 | 1.615 | 1.627 | 1.634 | 1.641 | 1.987 | 614 |
| 6 | 1.592 | 1.602 | 1.612 | 1.602 | 1.954 | 614 |
| 7 | 1.567 | 1.572 | 1.569 | 1.568 | 1.923 | 614 |
| 8 | 1.536 | 1.538 | 1.541 | 1.531 | 1.898 | 614 |
| 9 | 1.506 | 1.512 | 1.518 | 1.502 | 1.865 | 614 |
| 10 | 1.466 | 1.503 | 1.489 | 1.475 | 1.783 | 614 |





H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

| Test distance (cm) | Position A (A/m) | Position B (A/m) | Position C (A/m) | Position D (A/m) | Position E (A/m) | Limits (A/m) |
|--------------------|------------------|------------------|------------------|------------------|------------------|--------------|
| 1 | 0.326 | 0.315 | 0.331 | 0.325 | 0.415 | 1.63 |
| 2 | 0.301 | 0.297 | 0.305 | 0.313 | 0.394 | 1.63 |
| 3 | 0.289 | 0.283 | 0.291 | 0.285 | 0.382 | 1.63 |
| 4 | 0.267 | 0.262 | 0.269 | 0.271 | 0.368 | 1.63 |
| 5 | 0.245 | 0.238 | 0.241 | 0.247 | 0.350 | 1.63 |
| 6 | 0.223 | 0.226 | 0.232 | 0.228 | 0.332 | 1.63 |
| 7 | 0.201 | 0.200 | 0.208 | 0.211 | 0.316 | 1.63 |
| 8 | 0.185 | 0.185 | 0.180 | 0.183 | 0.295 | 1.63 |
| 9 | 0.167 | 0.158 | 0.162 | 0.160 | 0.274 | 1.63 |
| 10 | 0.145 | 0.147 | 0.149 | 0.140 | 0.253 | 1.63 |



FCC ID: 2ATKP-OBFTC-0022-A

8. Test Setup Photo


Position A

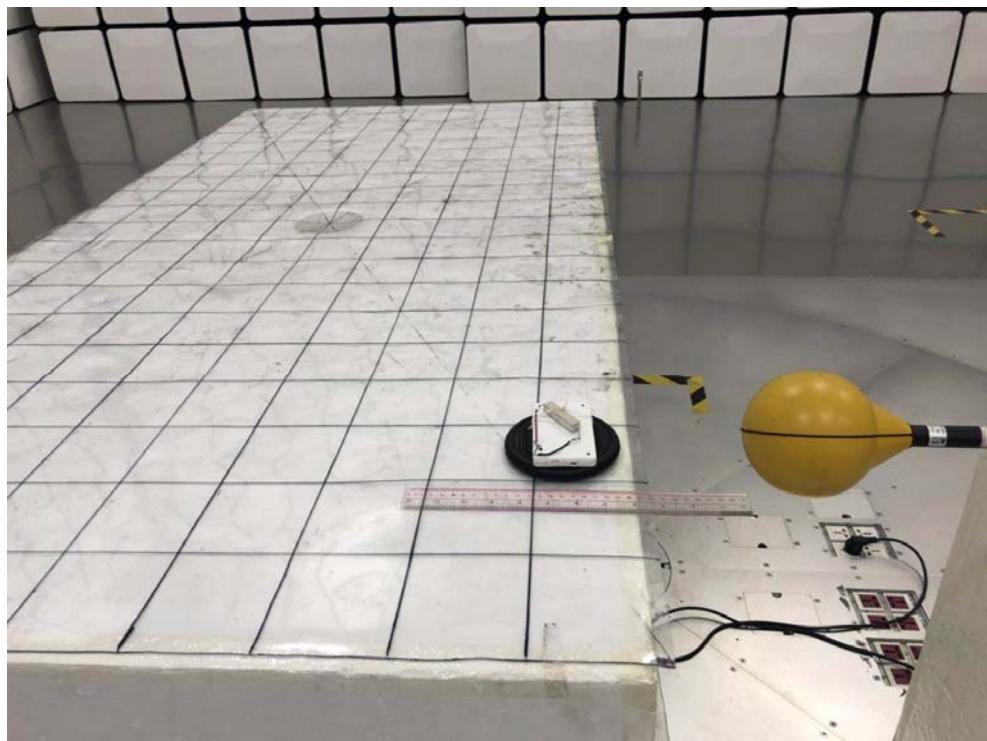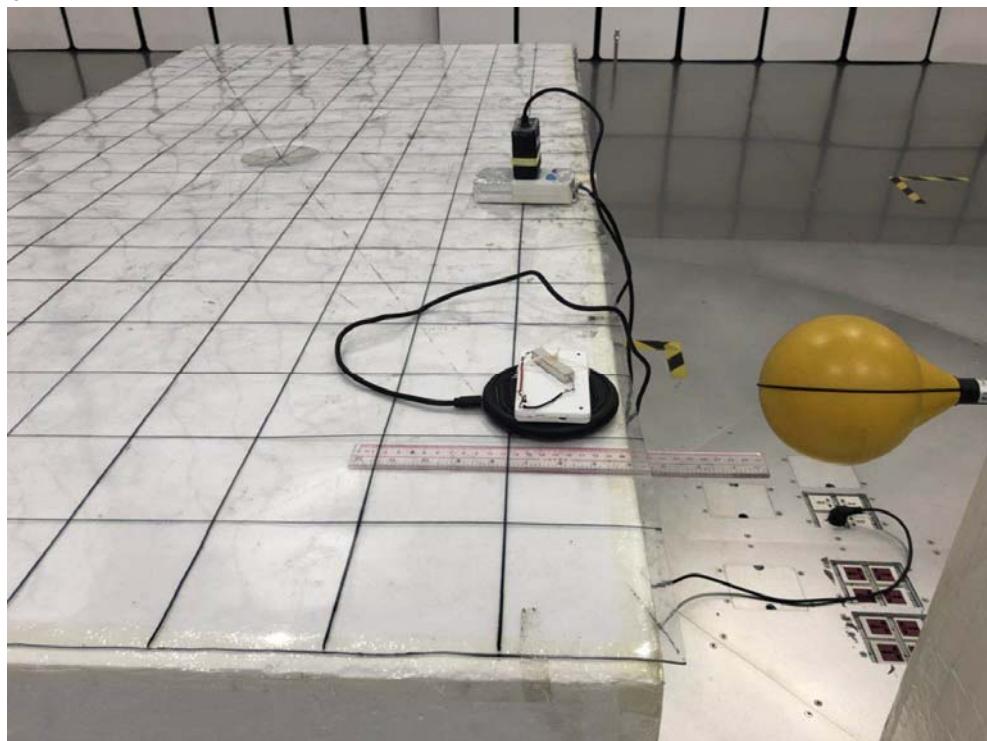



FCC ID: 2ATKP-OBFTC-0022-A
Position B

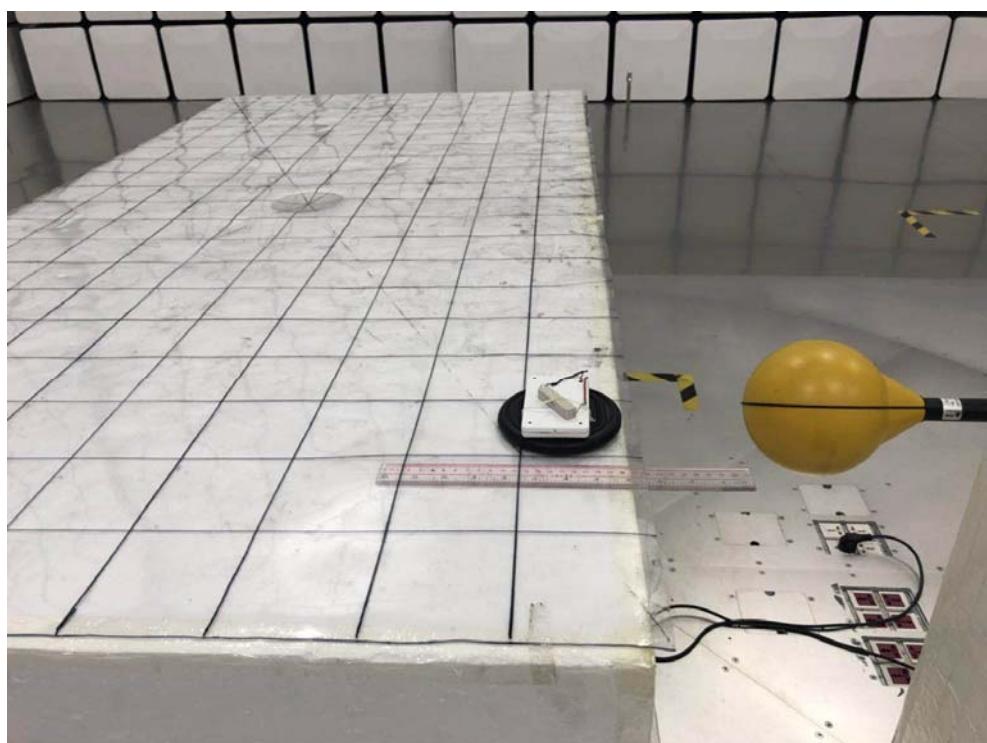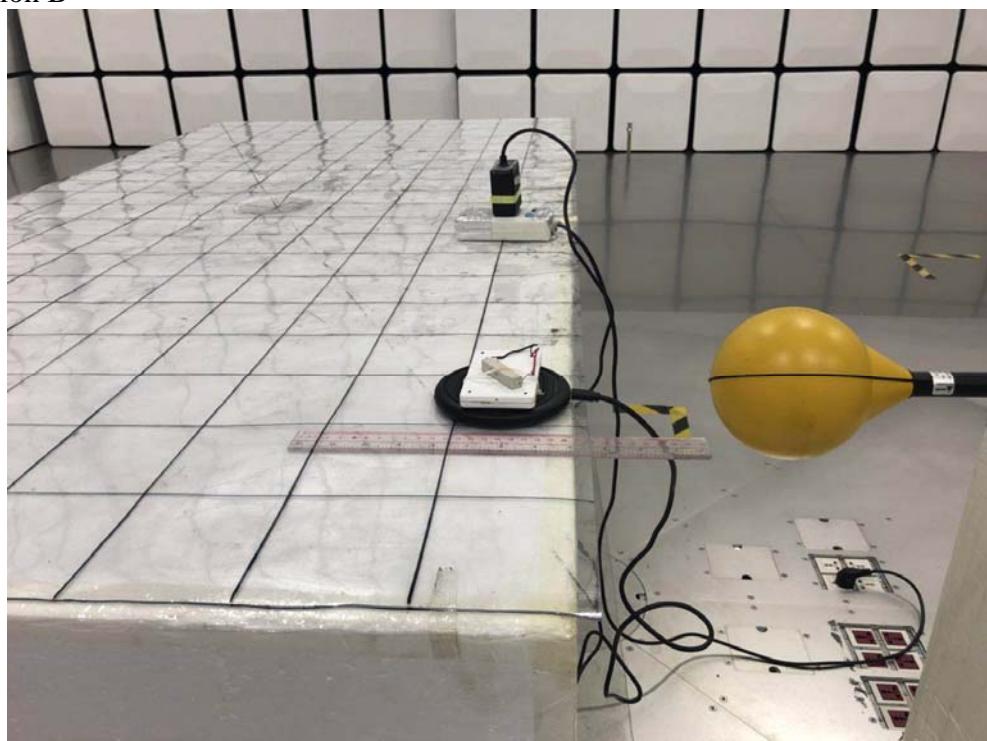



FCC ID: 2ATKP-OBFTC-0022-A
Position C

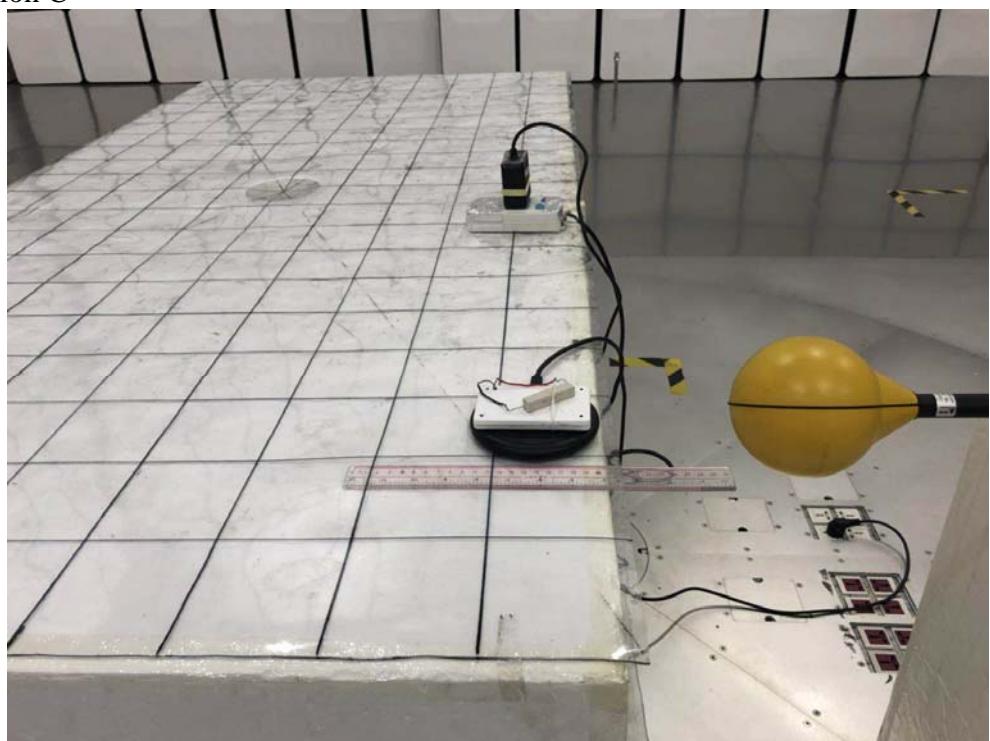

FCC ID: 2ATKP-OBFTC-0022-A
Position D

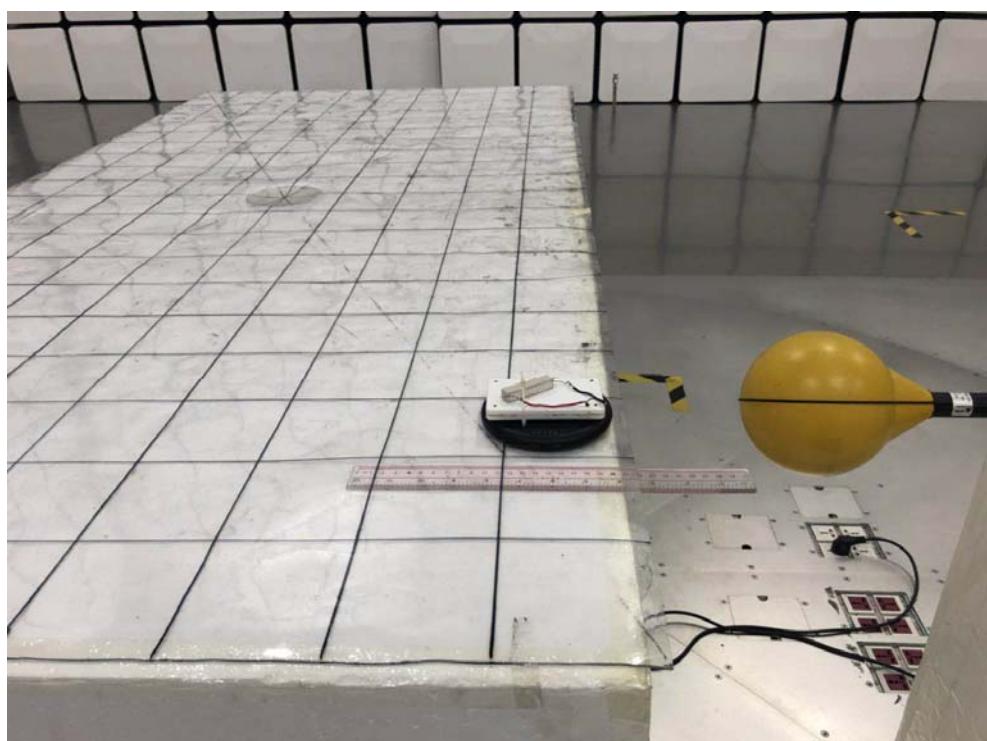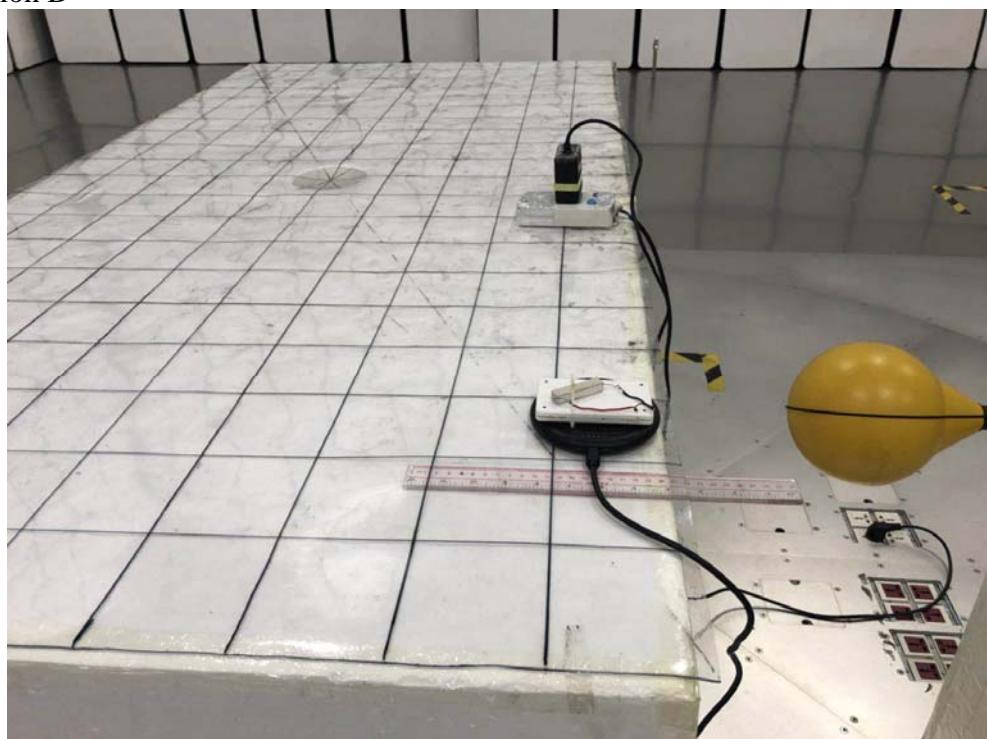

FCC ID: 2ATKP-OBFTC-0022-A
Position E

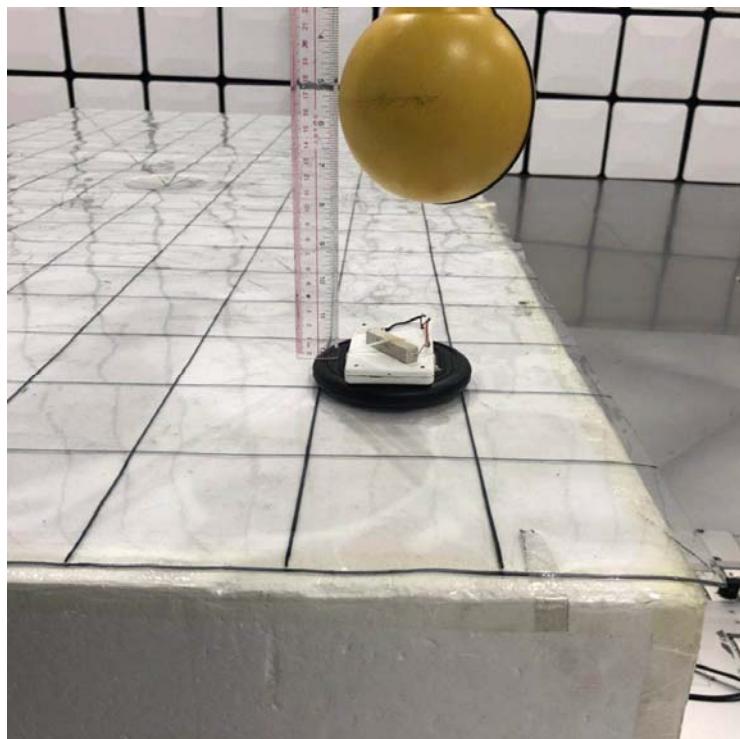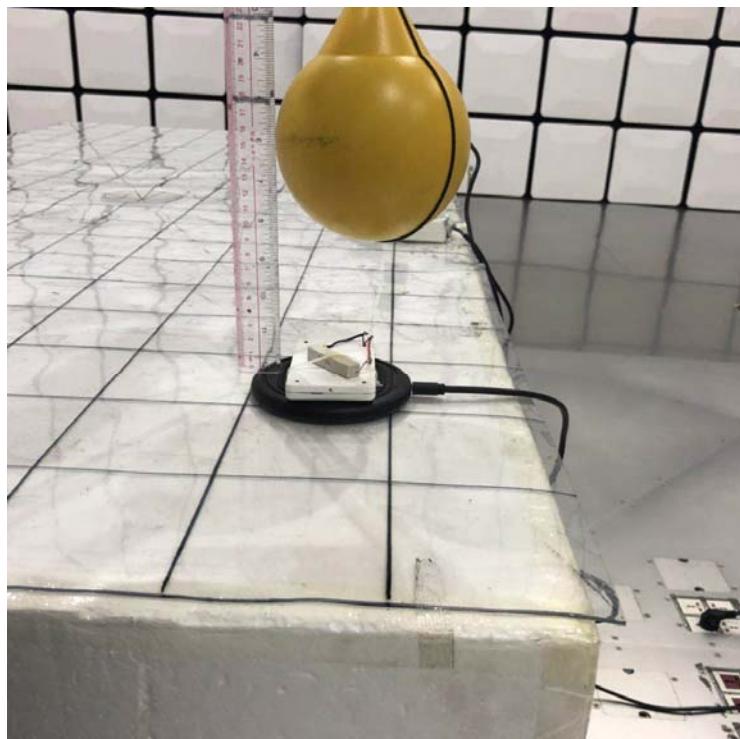

Note: The dummy load must be placed horizontal of the EUT at the top.(Parallel to the coil)
=====END=====