



## FCC PART 15B, CLASS B

### TEST REPORT

For

### Shenzhen NED Optics Co . , LTD.

Rm W101, 1/F, West Block, PKU-HKUST SZ-HK Institution No15, Gaoxinnan 7th Rd, Nanshan District, Shenzhen, China

**FCC ID: 2ATNDGOOVISD3**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Portable Media Player
<b>Report Number:</b> <u>RSZ190415003-00A</u>	
<b>Report Date:</b> <u>2019-10-12</u>	
Reviewed By: <u>Jacob Kong</u> <i>Jacob Kong</i>	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk \*\*. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>8</b>
<b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
EUT SETUP .....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	9
CORRECTED FACTOR & MARGIN CALCULATION .....	10
TEST RESULTS SUMMARY .....	10
TEST DATA .....	10
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY .....	15
TEST DATA .....	15

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Portable Media Player
Tested Model	D3
Voltage Range	DC 3.8V
Highest operating frequency	5825 MHz
Date of Test	2019-09-20 to 2019-10-12
Sample serial number	190415003(Assigned by BACL, Shenzhen)
Received date	2019-04-15
Sample/EUT Status	Good condition

### Objective

This test report is prepared on behalf of *Shenzhen NED Optics Co . , LTD.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS&DTS and Part 15.407 NII submissions with FCC ID: 2ATNDGOOVISD3.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will be taken into consideration for the test data recorded in the report

Parameter	uncertainty	
Conducted Emissions	$\pm 1.95\text{dB}$	
Emissions, radiated	Below 1GHz	$\pm 4.75\text{dB}$
	Above 1GHz	$\pm 4.88\text{dB}$

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT operation mode: PLAYING

### EUT Exercise Software

No exercise software was used.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Monitor	ST2420Lb	CN-0X0K27-74261-2af-090U
NED	Adapter	unknow	unknow
DELL	Mouse	MOC5UO	G1900NKD

### External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-Shielding Detachable USB Cable With Ferrite Core	1.0	EUT	Mouse
Un-shielding Detachable USB Cable	1.2	EUT	Adapter
Shielding Detachable HDMI Cable	1.2	EUT	Monitor
Un-shielding Detachable Earphone Cable	1.2	EUT	Earphone

## Block Diagram of Test Setup

For conducted emission:

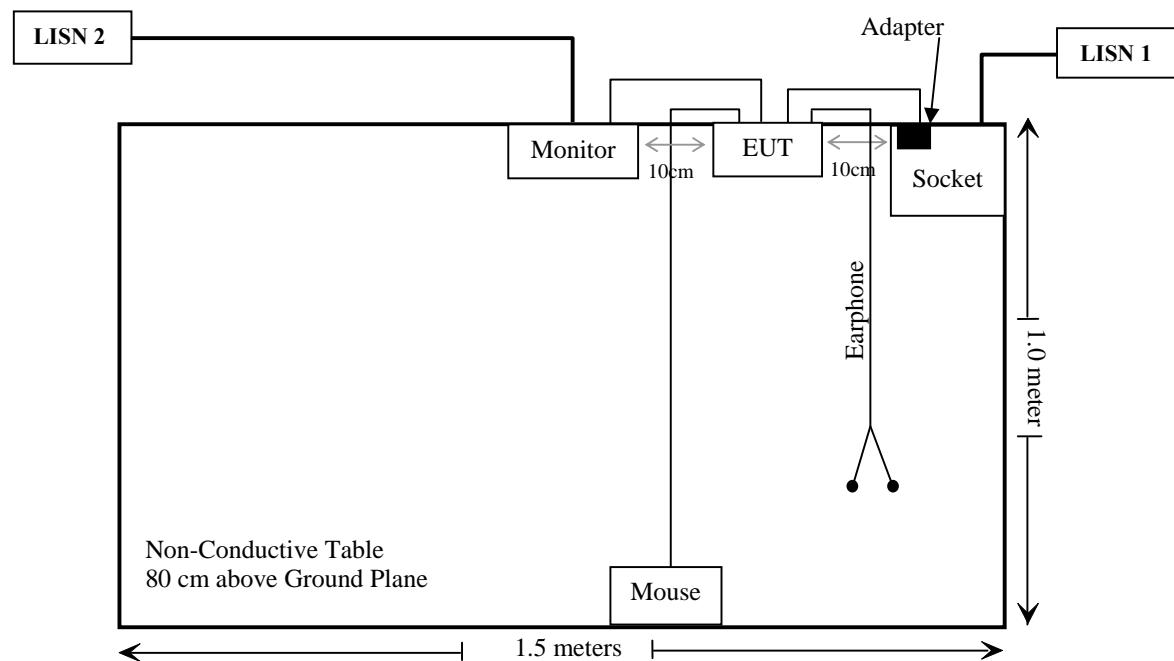

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>AC Line Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2019-07-11	2020-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
<b>Radiated Emission Test</b>					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	RG-214	1	2018-11-19	2019-05-21
Ducommun Technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Agilent	Spectrum Analyzer	8564E	3943A01781	2019-03-02	2020-03-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28


**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

According to FCC §15.107

### EUT Setup

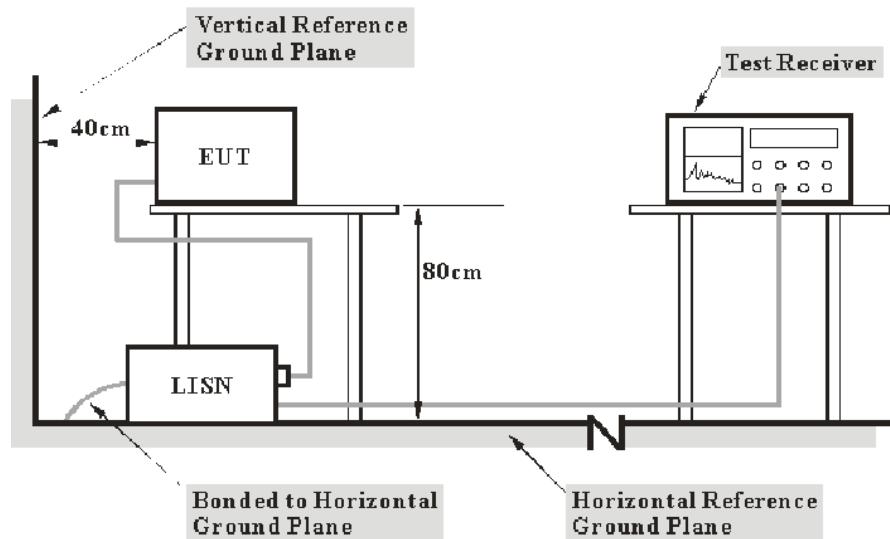

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the host PC was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the EUT complied with the FCC Part 15.107,

## Test Data


### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

*The testing was performed by Kiki Geng on 2019-09-20.*


EUT Operation Mode: PLAYING

AC 120V/60 Hz, Line

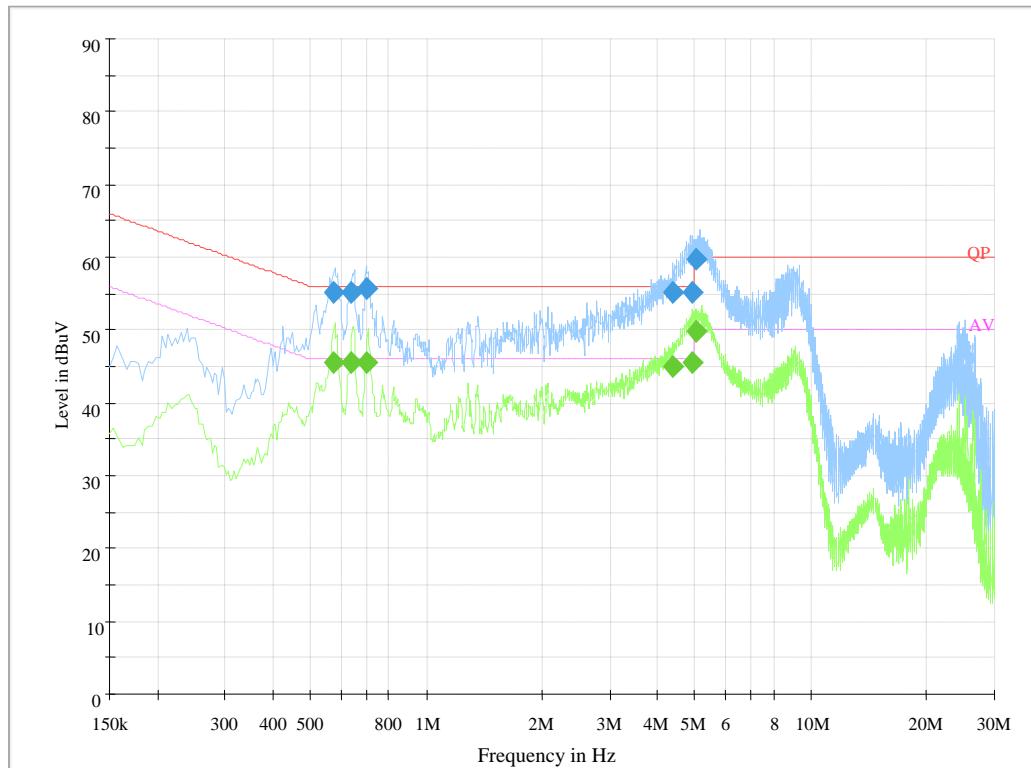

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK/Ave./QP)
0.573330	55.2	19.8	56.0	0.8	QP
0.640250	55.3	19.8	56.0	0.7	QP
0.699530	55.7	19.8	56.0	0.3	QP
4.356330	55.1	19.9	56.0	0.9	QP
4.892830	55.3	19.9	56.0	0.7	QP
5.039390	59.7	19.9	60.0	0.3	QP
0.573330	45.4	19.8	46.0	0.6	Ave.
0.640250	45.6	19.8	46.0	0.4	Ave.
0.699530	45.6	19.8	46.0	0.4	Ave.
4.356330	45.1	19.9	46.0	0.9	Ave.
4.892830	45.6	19.9	46.0	0.4	Ave.
5.039390	49.8	19.9	50.0	0.2	Ave.

## AC 120V/60 Hz, Neutral

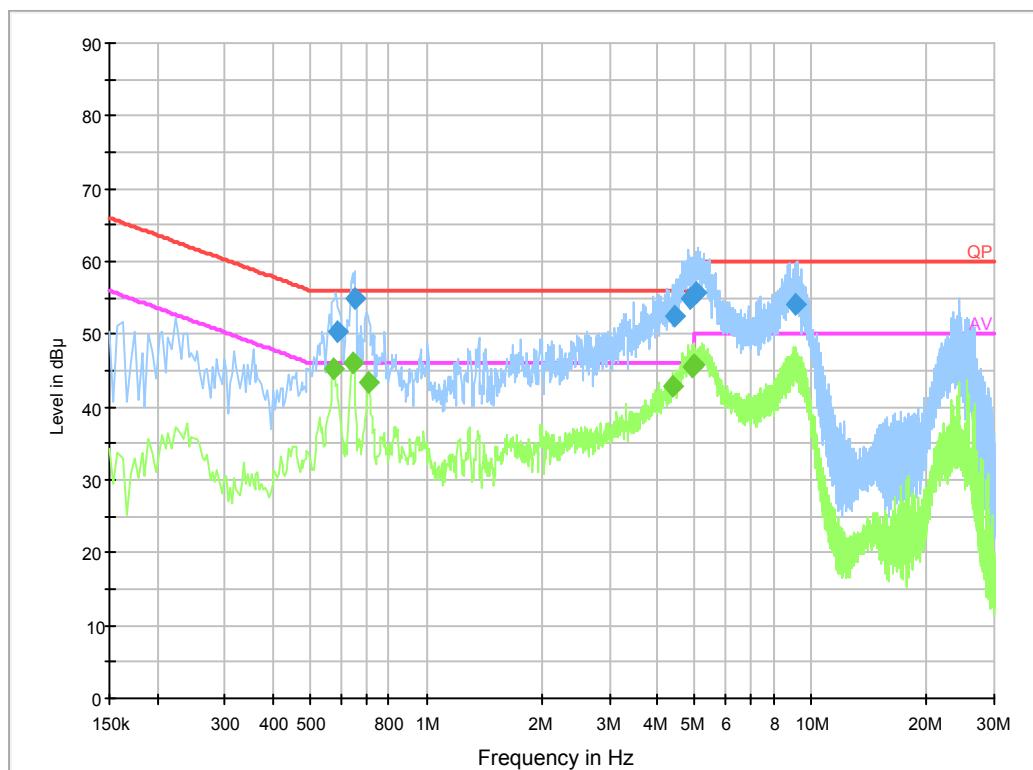

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK/Ave./QP)
0.589270	50.5	19.8	56.0	5.5	QP
0.652250	54.9	19.8	56.0	1.1	QP
4.423190	52.4	19.9	56.0	3.6	QP
4.853730	55.0	19.9	56.0	1.0	QP
5.047390	55.8	19.9	60.0	4.2	QP
9.172030	54.2	19.9	60.0	5.8	QP
0.574000	45.3	19.8	46.0	0.7	Ave.
0.642000	45.9	19.8	46.0	0.1	Ave.
0.706000	43.4	19.8	46.0	2.6	Ave.
4.398000	43.0	19.9	46.0	3.0	Ave.
4.938000	45.4	19.9	46.0	0.6	Ave.
4.966000	45.7	19.9	46.0	0.3	Ave.

## Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.109

### EUT Setup

Below 1GHz:

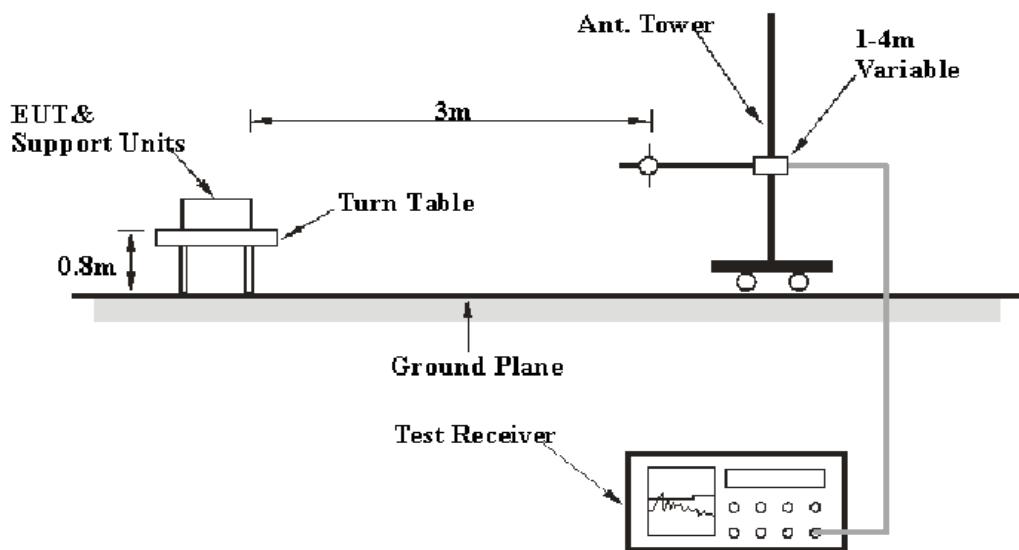

Above 1GHz:

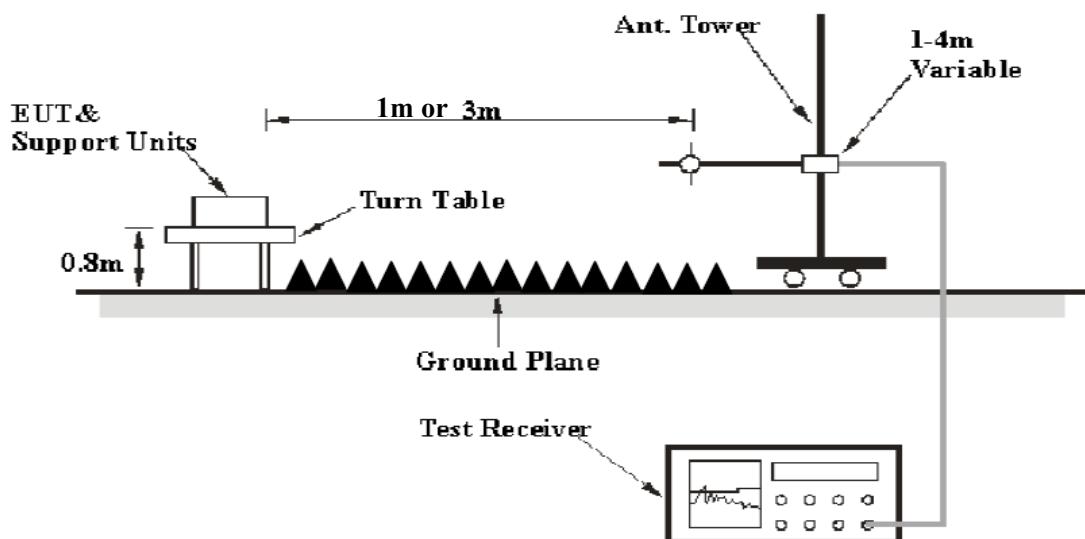

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 30 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For above 18GHz testing:

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left( \frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

- $E_{\text{SpecLimit}}$  is the field strength of the emission at the distance specified by the limit, in  $\text{dB}\mu\text{V/m}$
- $E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in  $\text{dB}\mu\text{V/m}$
- $d_{\text{Meas}}$  is the measurement distance, in m
- $d_{\text{SpecLimit}}$  is the distance specified by the limit, in m

So the extrapolation factor of 1m is  $20 \times \log(1/3) = -9.5$  dB

## Test Results Summary

According to the EUT complied with the FCC §15.109 Class B.


## Test Data

### Environmental Conditions

<b>Temperature:</b>	24~25 °C
<b>Relative Humidity:</b>	50~52 %
<b>ATM Pressure:</b>	100.9~101.0 kPa

*The testing was performed by Andy Yu on 2019-09-21 for below 1G and Alen He on 2019-10-12 for above 1G.*

*EUT Operation Mode: PLAYING*

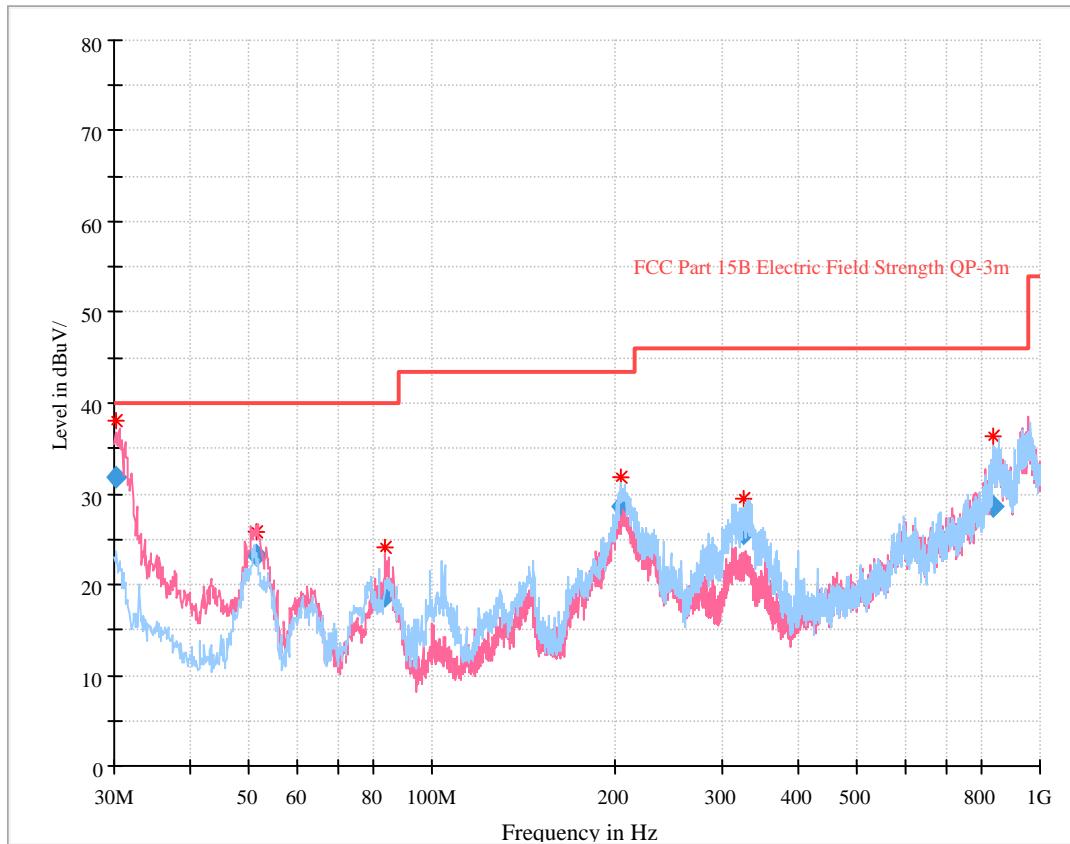**30 MHz~1 GHz:**


Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
30.111750	31.83	109.0	V	173.0	-7.7	40.00	8.17
51.408625	23.24	114.0	V	27.0	-19.7	40.00	16.76
83.989750	18.78	146.0	V	250.0	-19.6	40.00	21.22
204.632000	28.51	184.0	H	66.0	-13.9	43.50	14.99
324.914875	25.63	108.0	H	234.0	-10.7	46.00	20.37
838.154750	28.70	284.0	H	341.0	5.8	46.00	17.30

**1 GHz – 30 GHz:**


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBuV/m)	FCC Part 15B	
	Reading (dB $\mu$ V)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dBuV/m)	Margin (dB)
1230.51	44.98	PK	162	2.0	H	-4.68	40.30	74	33.70
1230.51	29.5	Ave.	162	2.0	H	-4.68	24.82	54	29.18
1230.51	43.9	PK	134	2.2	H	-4.68	39.22	74	34.78
1230.51	28.68	Ave.	134	2.2	H	-4.68	24.00	54	30.00
2120.82	44.31	PK	172	1.9	H	-0.81	43.50	74	30.50
2120.82	29.27	Ave.	172	1.9	H	-0.81	28.46	54	25.54
2120.82	44.65	PK	352	1.3	H	-0.81	43.84	74	30.16
2120.82	29.42	Ave.	352	1.3	H	-0.81	28.61	54	25.39

**Note:**


- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

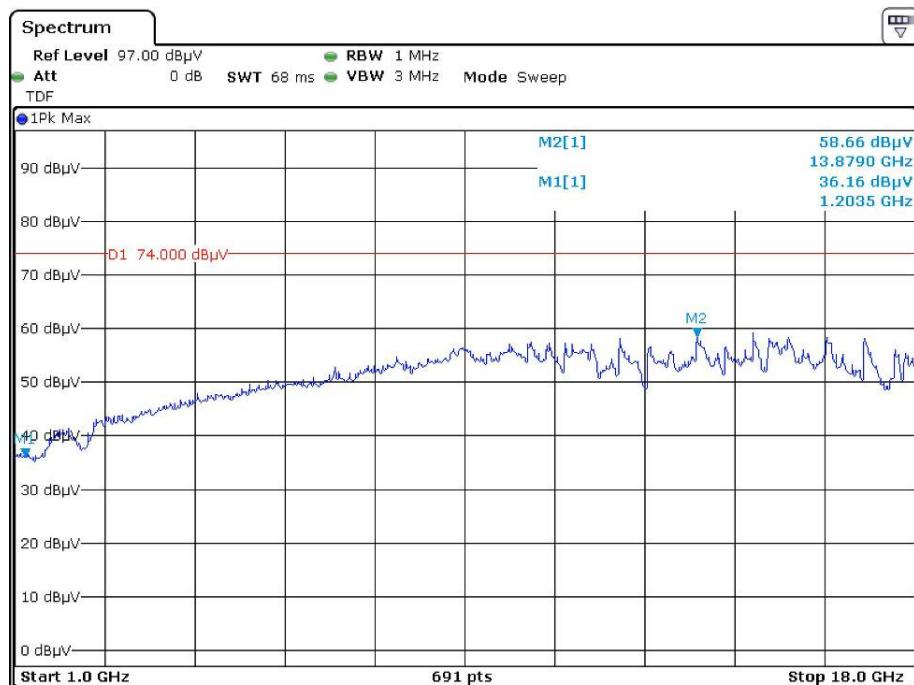**Pre-scan for peak  
Horizontal – Peak**

Date: 12.OCT.2019 16:36:48

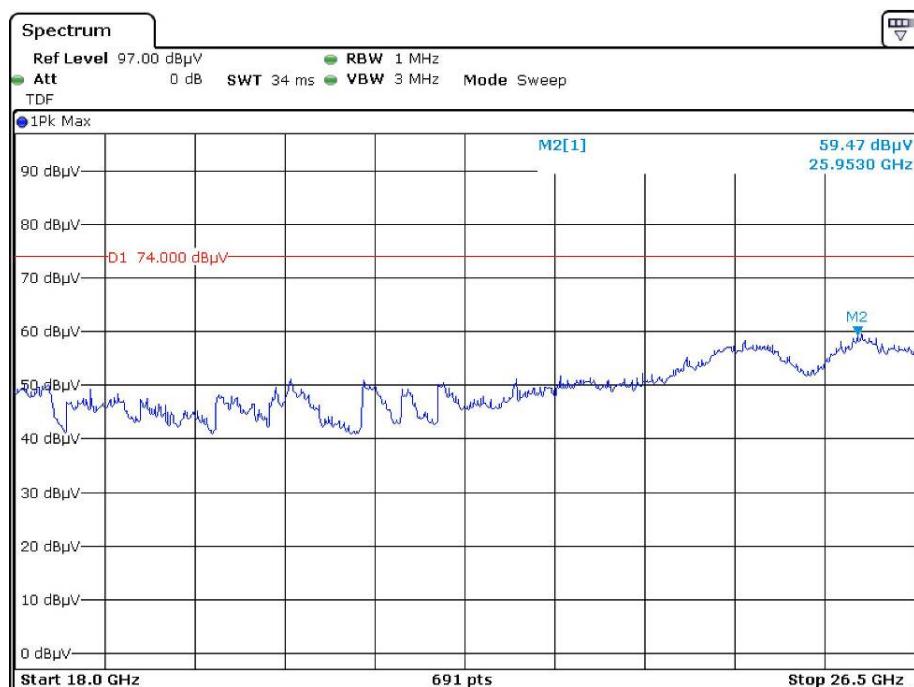


Date: 12.OCT.2019 17:25:42

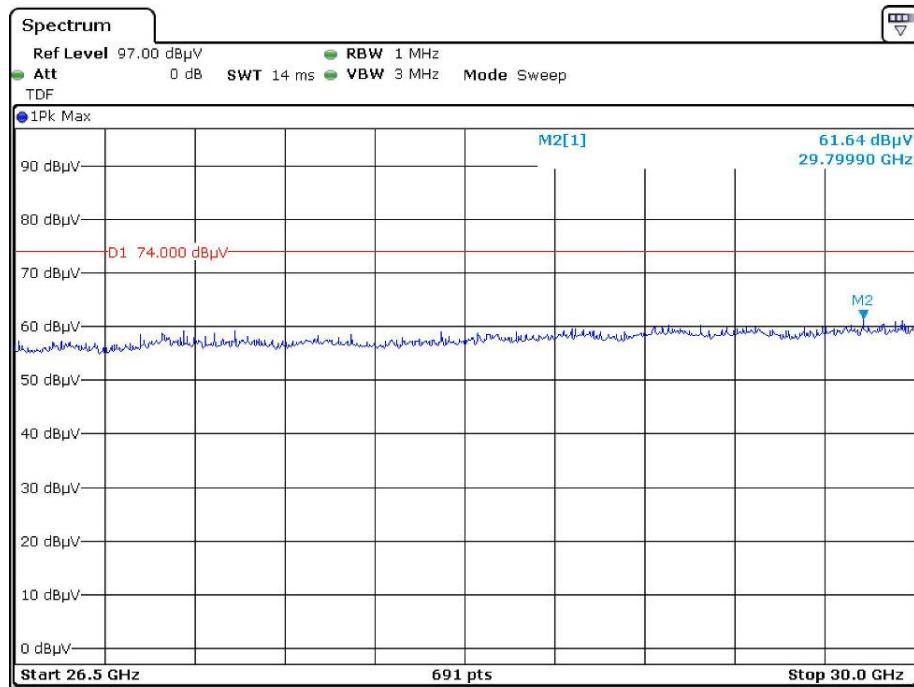


Date: 12.OCT.2019 17:41:38


### Vertical - Peak

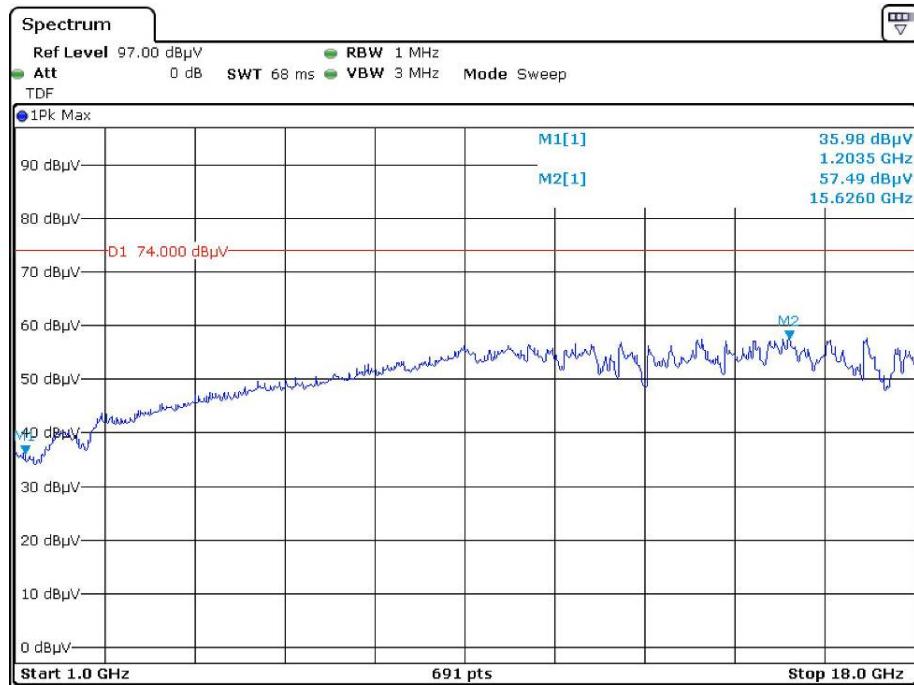

Date: 12.OCT.2019 16:43:38


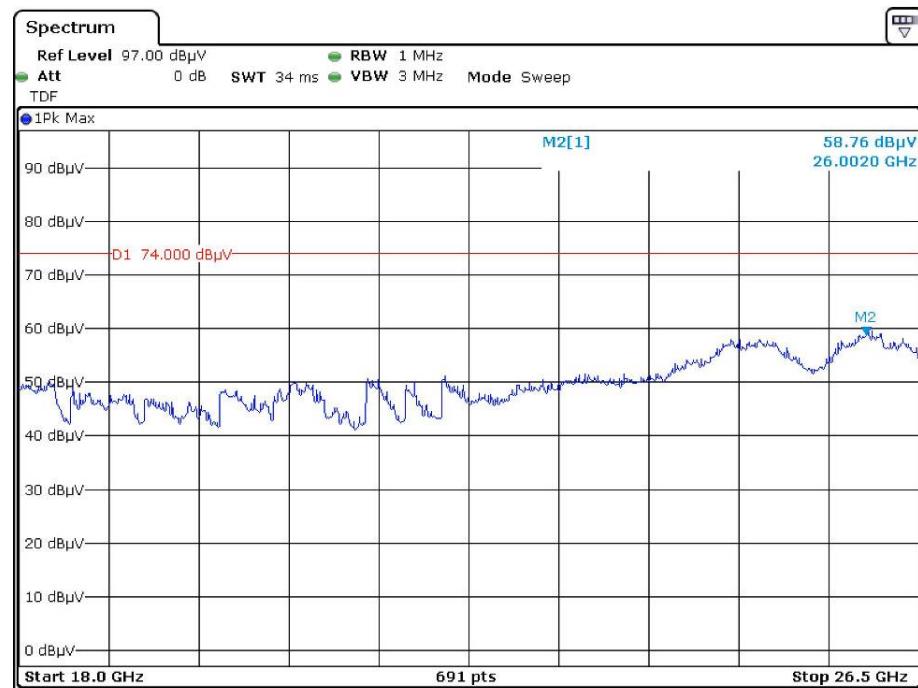



Date: 12.OCT.2019 17:34:12

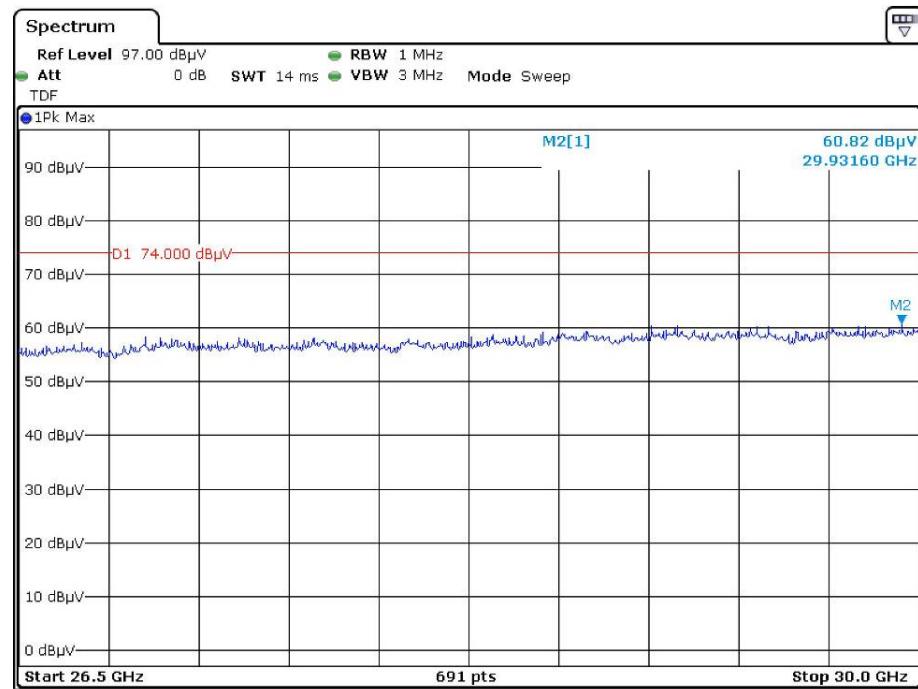

Date: 12.OCT.2019 17:50:12


## Horizontal – Average

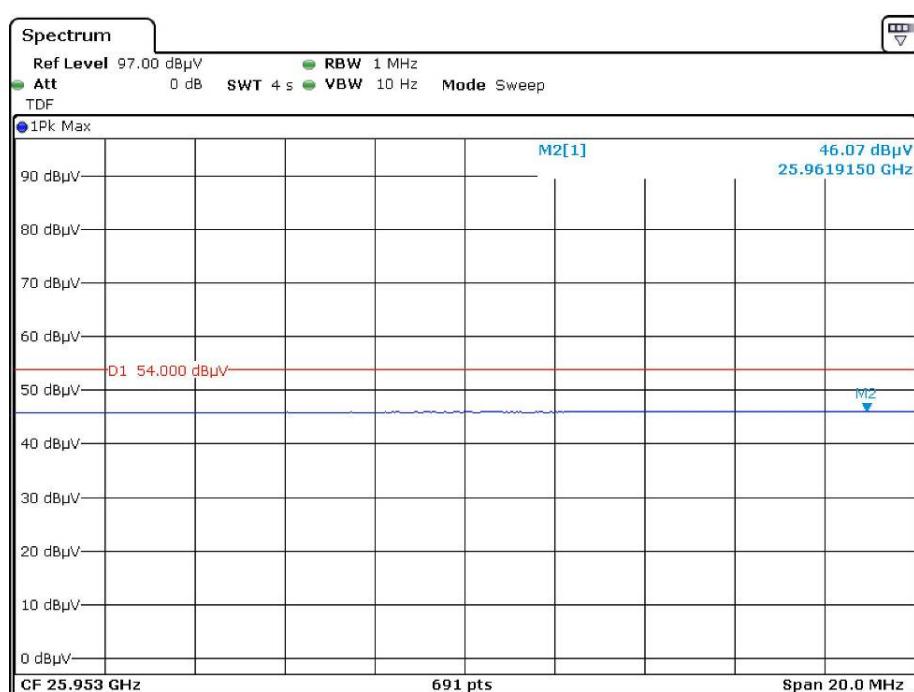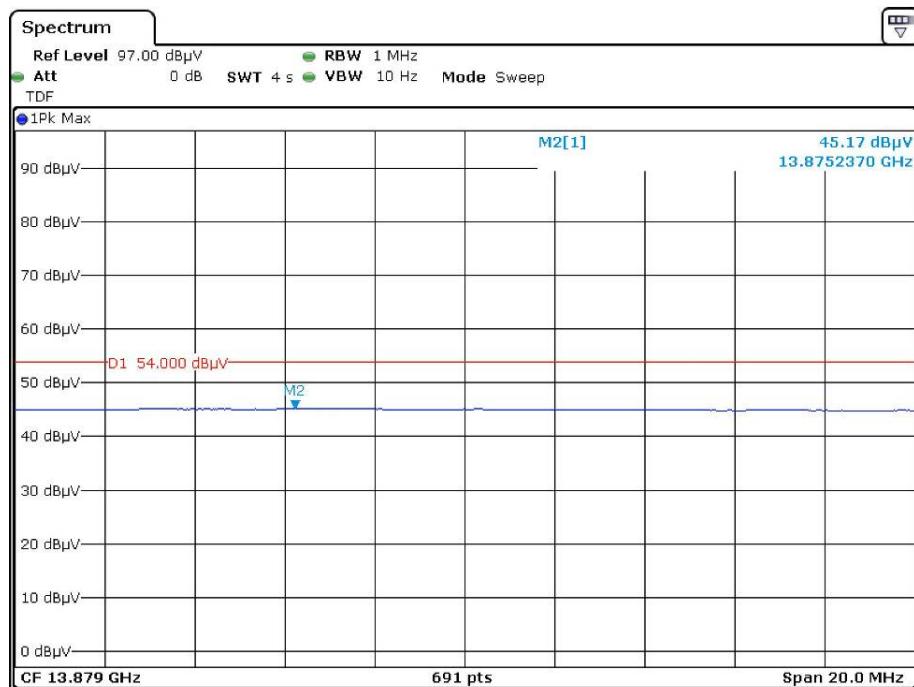


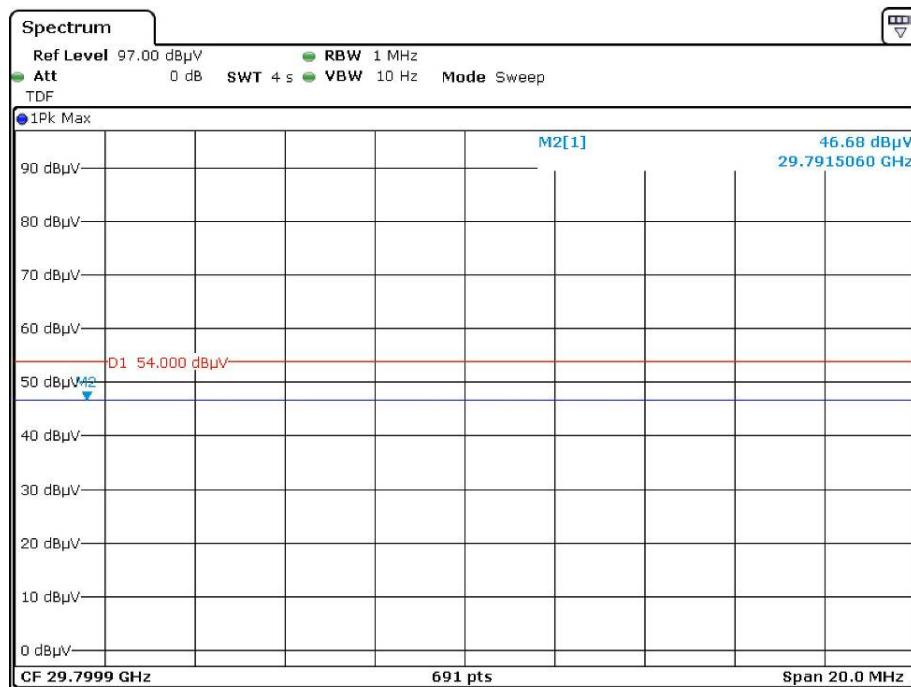


Date: 12.OCT.2019 17:46:26

### Vertical - Average

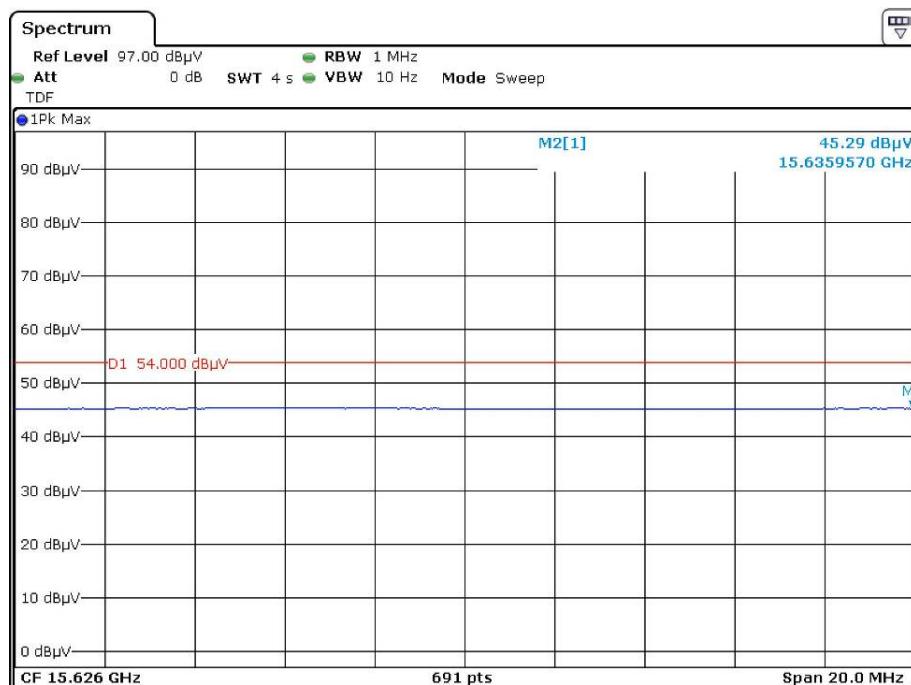

Date: 12.OCT.2019 16:48:25

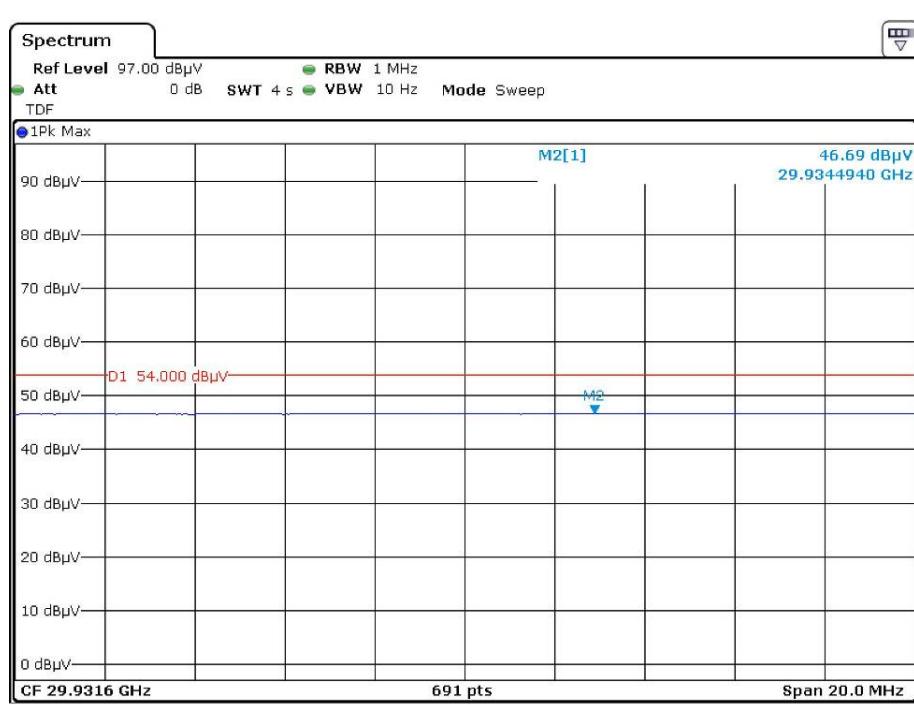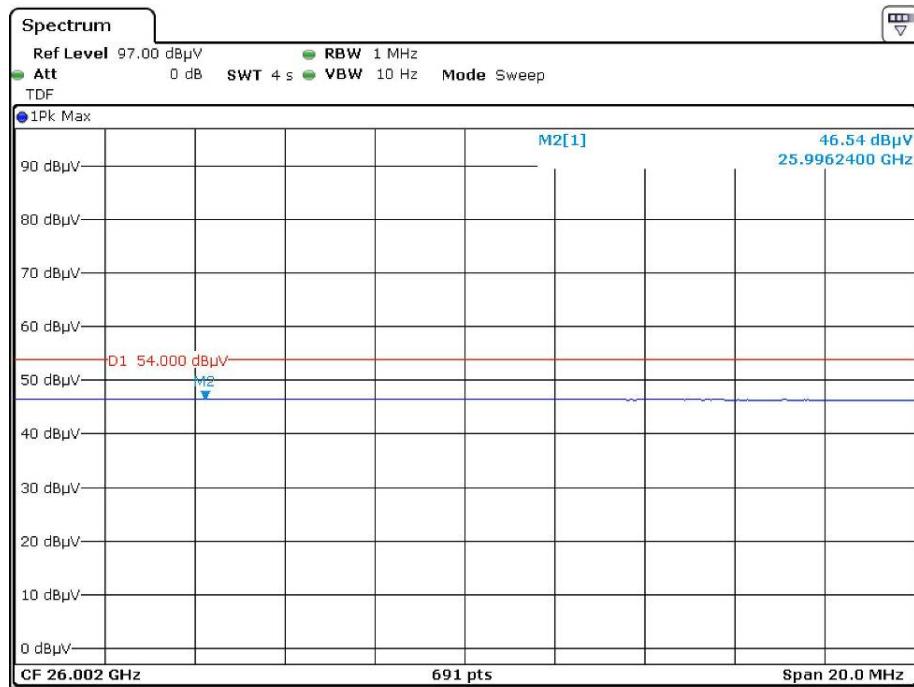

\*\*\*\*\* END OF REPORT \*\*\*\*\*