

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Shenzhen NED Optics Co., Ltd.
Address	:	4105, Building 1, CFC Building, South side of Shihua Road, Fubao Community, Fubao Street, Futian District, Shenzhen City, Guangdong Province, P.R. China.
Equipment under Test	:	Portable Stream Media Player
Model No.	:	D4-H2
Trade Mark	:	HAKO
FCC ID	:	2ATNDGOOVISD4-H2
Manufacturer	:	Shenzhen SDMC Technology Co., Ltd.
Address	:	19/F, Changhong Science & Technology Mansion, No.18, Keji South 12th Road, High-tech Industrial Park, Nanshan District, Shenzhen, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	6dB Bandwidth	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Test graphs	13
5.	Conducted Output Power.....	22
5.1.	Block diagram of test setup.....	22
5.2.	Limits	22
5.3.	Test procedure	22
5.4.	Test result average	23
6.	Power Spectral Density.....	24
6.1.	Block diagram of test setup.....	24
6.2.	Limits	24
6.3.	Test procedure	24
6.4.	Test result.....	25
6.5.	Test graphs	25
7.	Band Edge Compliance (Conducted Method)	34
7.1.	Block diagram of test setup.....	34
7.2.	Limits	34
7.3.	Test procedure	34
7.4.	Test result.....	35
7.5.	Test graphs	35
8.	RF Conducted Spurious Emissions	41

8.1.	Block diagram of test setup.....	41
8.2.	Limits	41
8.3.	Test procedure	41
8.4.	Test result.....	42
8.5.	Test graphs	42
9.	Duty Cycle	67
9.1.	Block diagram of test setup.....	67
9.2.	Limit	67
9.3.	Test procedure	67
9.4.	Test result.....	68
9.5.	Test graphs	69
10.	Radiated Spurious Emissions	78
10.1.	Block diagram of test setup.....	78
10.2.	Limit	79
10.3.	Test procedure	80
10.4.	Test result.....	82
11.	Radiated Band Edge Compliance	91
11.1.	Block diagram of test setup.....	91
11.2.	Limit	91
11.3.	Test procedure	91
11.4.	Test result.....	91
12.	Power Line Conducted Emission	116
12.1.	Block diagram of test setup.....	116
12.2.	Power Line Conducted Emission Limits	116
12.3.	Test procedure	116
12.4.	Test result.....	117
13.	Antenna Requirements	120
13.1.	Limit	120
13.2.	Result	120
14.	Test Setup Photograph	121
15.	Photos of the EUT	123

Test Report Declare

Applicant	:	Shenzhen NED Optics Co., Ltd.
Address	:	4105, Building 1, CFC Building, South side of Shihua Road, Fubao Community, Fubao Street, Futian District, Shenzhen City, Guangdong Province, P.R. China.
Equipment under Test	:	Portable Stream Media Player
Model No	:	D4-H2
Trade Mark	:	HAKO
Manufacturer	:	Shenzhen SDMC Technology Co., Ltd.
Address	:	19/F, Changhong Science & Technology Mansion, No.18, Keji South 12th Road, High-tech Industrial Park, Nanshan District, Shenzhen, China

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C

Test procedure used: ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-RE23011110-2E03		
Date of Receipt:	Apr. 19, 2023	Date of Test:	Apr. 19, 2023 ~ May 15, 2023

Prepared By:

Tiger Mo

Tiger Mo/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	May 15, 2023	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Conducted Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15:15.247(e)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC Part 15: 15.247(d)	PASS
Radiated Spurious Emissions	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Radiated Band Edge Compliance	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Power Line Conducted Emission	FCC Part 15: 15.207(a)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. General Test Information

2.1. Description of EUT

EUT* Name	: Portable Stream Media Player
Model Number	: D4-H2
EUT function description	: Please reference user manual of this device
Power supply	: DC 5.0V/2A From USB Type-C : DC 5.0V/2A from external Powerbank Base
Radio Technology	: IEEE 802.11b/g/n
Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz : IEEE 802.11g: 2412MHz-2462MHz : IEEE 802.11n HT20: 2412MHz-2462MHz : IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) : IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) : IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11b: up to 11 Mbps : IEEE 802.11g: up to 54 Mbps : IEEE 802.11n HT20: up to 144.4 Mbps : IEEE 802.11n HT40: up to 300 Mbps
Antenna Type	: Antenna 1: FPC antenna, Maximum gain: 2.51 dBi : Antenna 2: FPC antenna, Maximum gain: 2.98 dBi
Sample Number	: S23011110-04 for conductive, : S23011110-05 for radiation

Note 1: EUT is the ab. of equipment under test.

Antenna information		
	Ant1 gain(G1)	Ant2 gain(G2)
IEEE 802.11b	2.51	2.98
IEEE 802.11g	2.51	2.98
IEEE 802.11n HT20	2.51	2.98
IEEE 802.11n HT40	2.51	2.98
Note: This EUT MIMO 2X2, any transmit signals are correlated with each other. So the Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10})/2] = 5.76\text{dBi}$		

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
Type-C cable	VARIOUS	VARIOUS	N/A	N/A
Remote control	Ohsung	C008	N/A	N/A
Powerbank Base	Shenzhen NED Optics Co., Ltd.	PS20	Battery: 8000mAh, DC 3.8V, 30.4Wh Input: DC 5V/3.0A, 9V/2.0A, 12V/1.5A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: SecureCRT.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information					
Mode	Setting Tx Power		data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	Default	Default	1	LCH: CH1	2412
	Default	Default	1	MCH: CH6	2437
	Default	Default	1	HCH: CH11	2462
IEEE 802.11g	60	48	6	LCH: CH1	2412
	60	48	6	MCH: CH6	2437
	60	48	6	HCH: CH11	2462
IEEE 802.11n HT20	55	43	MCS 8	LCH: CH1	2412
	55	43	MCS 8	MCH: CH6	2437
	55	43	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	50	38	MCS 8	LCH: CH3	2422
	50	38	MCS 8	MCH: CH6	2437
	50	38	MCS 8	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 3#)					
Signal & Spectrum analyzer	R&S	FSV40	101407	Jul. 21, 2022	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	May 18, 2022	1 Year
RF Control Unit	Tonscend	JS0806-2	20C8060230	May 18, 2022	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU26	100472	May 19, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 17, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2022	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 22, 2022	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120 D	02468	Sep. 29, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May. 06, 2022 Apr. 26, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Aug. 17, 2022	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M+1.5M	Aug. 17, 2022	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M	21123964	May 19, 2022	1 Year
RF Cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	21073466	Aug. 17, 2022	1 Year
Micro-Tronics filters	REBES	BRM50702	G555	N/A	N/A
Micro-Tronics filters	REBES	BRM50716	G392	N/A	N/A
High Pass filter	XB	XBLBQ-GTA67	210820-2-3	N/A	N/A
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year
LISN 1	R&S	ENV216	101109	Aug. 26, 2022	1 Year
LISN 2	R&S	ESH2-Z5	100309	Aug. 26, 2022	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Aug. 26, 2022	1 Year

CE Cable 1	HUBSER	N/A	W10.01	Aug. 26, 2022	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year

4. 6dB Bandwidth

4.1. Block diagram of test setup

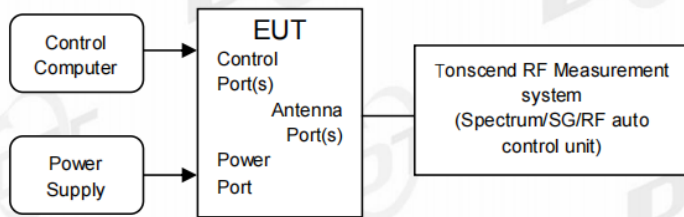

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:


RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report

4.4. Test result


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	10.08	2406.96	2417.04	0.5	PASS
	Ant2	2412	10.08	2406.96	2417.04	0.5	PASS
	Ant1	2437	10.08	2431.96	2442.04	0.5	PASS
	Ant2	2437	10.08	2431.96	2442.04	0.5	PASS
	Ant1	2462	10.08	2456.96	2467.04	0.5	PASS
	Ant2	2462	10.08	2456.96	2467.04	0.5	PASS
11G	Ant1	2412	16.04	2404.08	2420.12	0.5	PASS
	Ant2	2412	16.28	2403.88	2420.16	0.5	PASS
	Ant1	2437	15.84	2429.08	2444.92	0.5	PASS
	Ant2	2437	15.80	2429.08	2444.88	0.5	PASS
	Ant1	2462	15.36	2454.24	2469.60	0.5	PASS
	Ant2	2462	15.80	2454.12	2469.92	0.5	PASS
11N20MIMO	Ant1	2412	16.68	2403.88	2420.56	0.5	PASS
	Ant2	2412	16.64	2403.88	2420.52	0.5	PASS
	Ant1	2437	16.64	2428.88	2445.52	0.5	PASS
	Ant2	2437	16.88	2428.64	2445.52	0.5	PASS
	Ant1	2462	16.32	2453.84	2470.16	0.5	PASS
	Ant2	2462	16.04	2454.12	2470.16	0.5	PASS
11N40MIMO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS

4.5. Test graphs

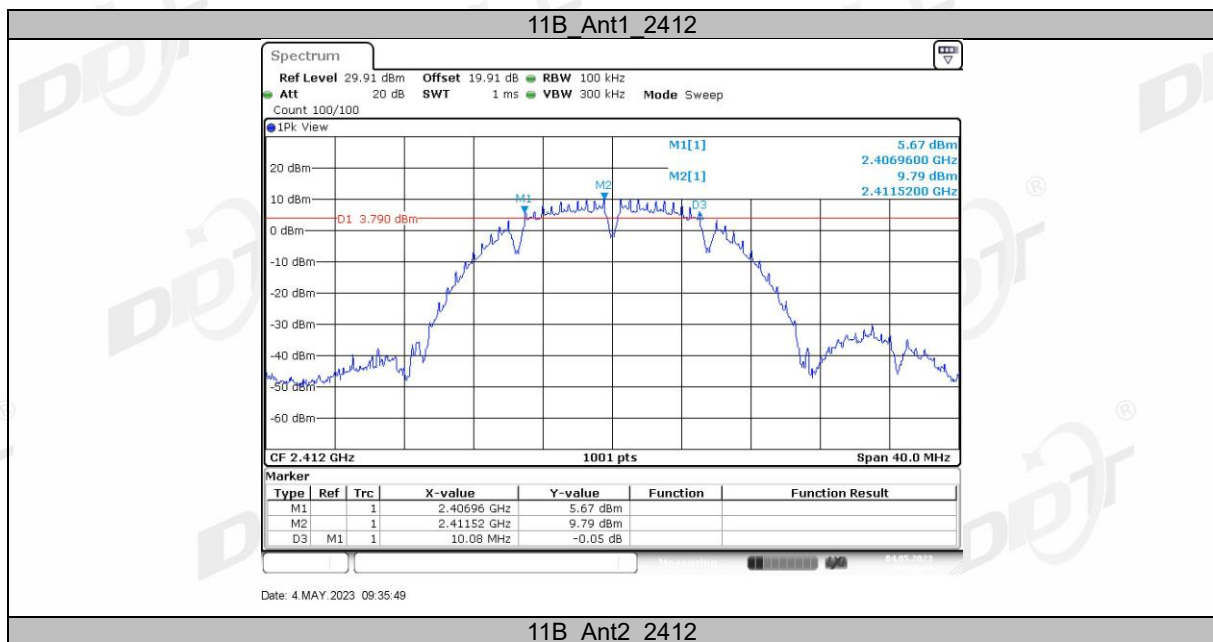


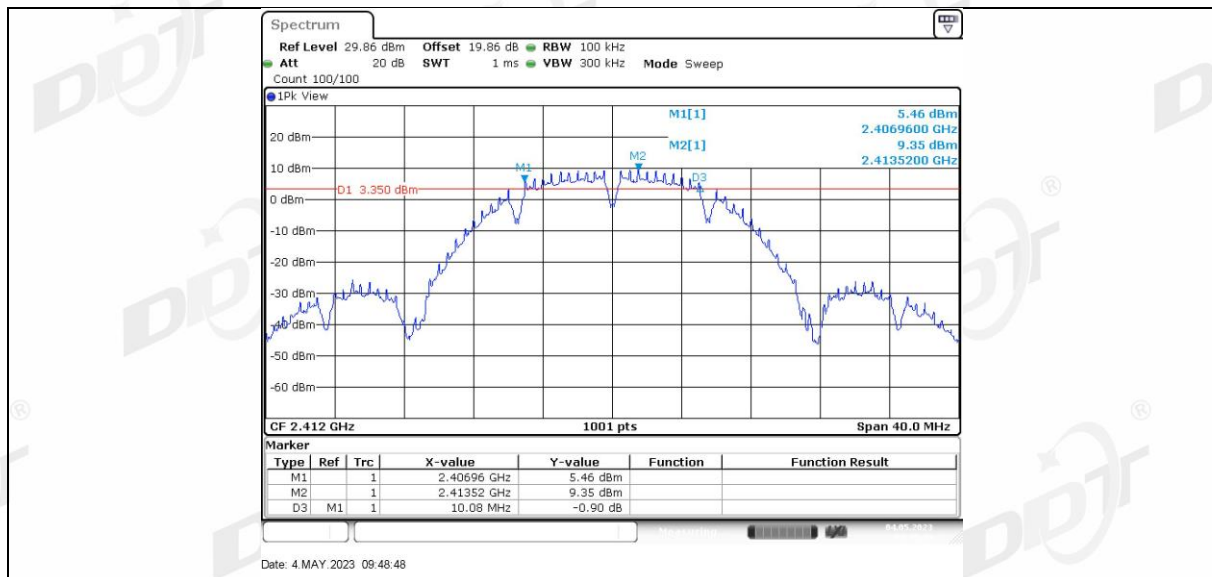


11B Ant1 2437

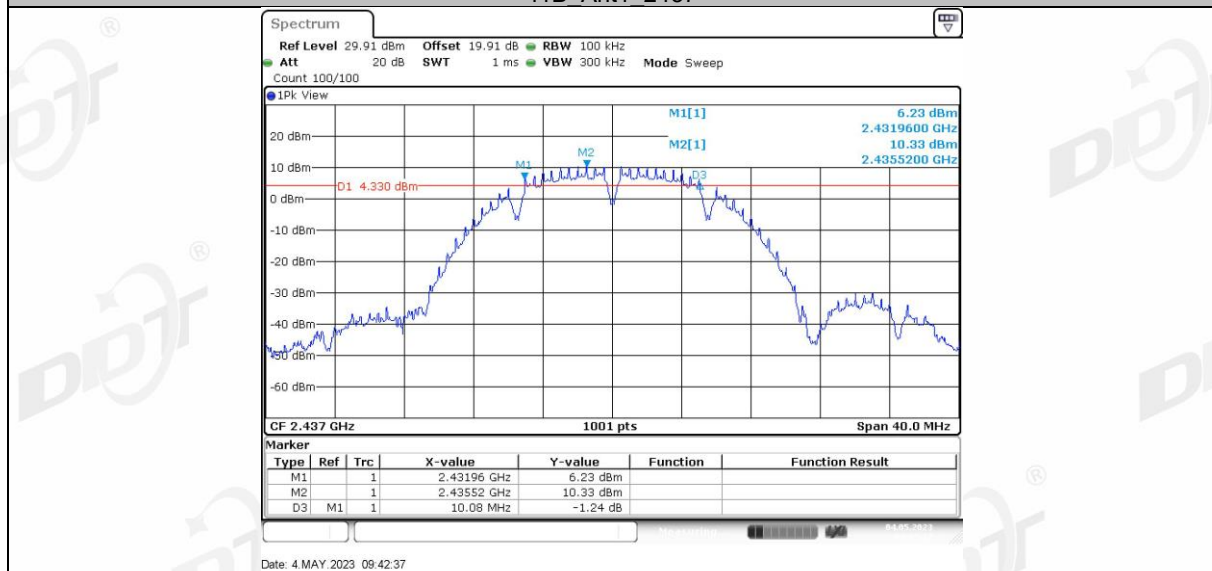


11B Ant2 2437

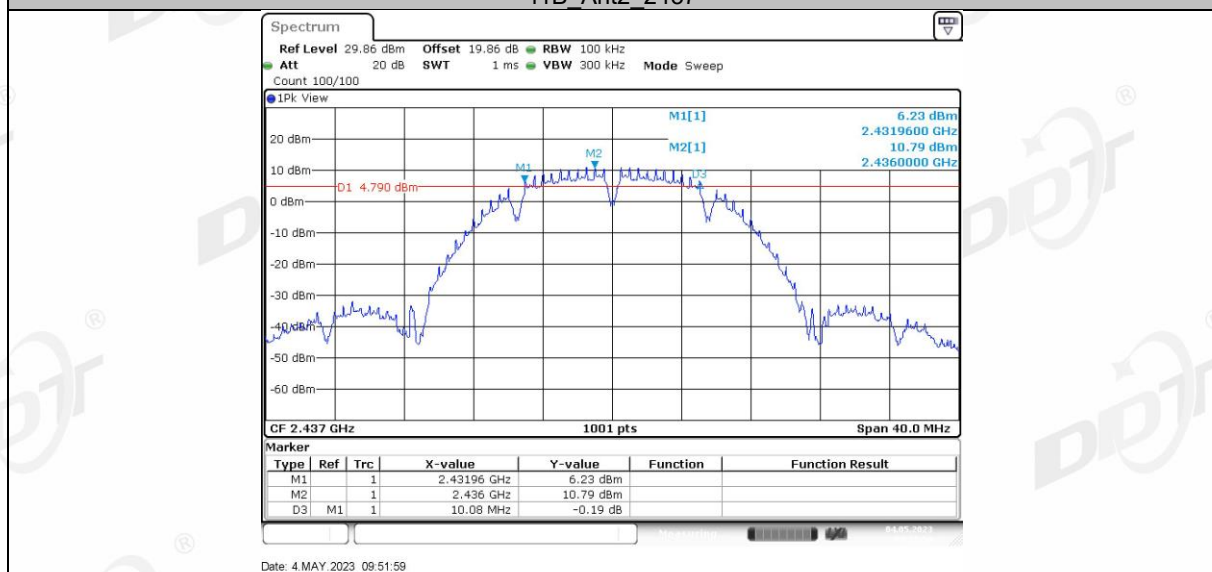


11B Ant1 2462

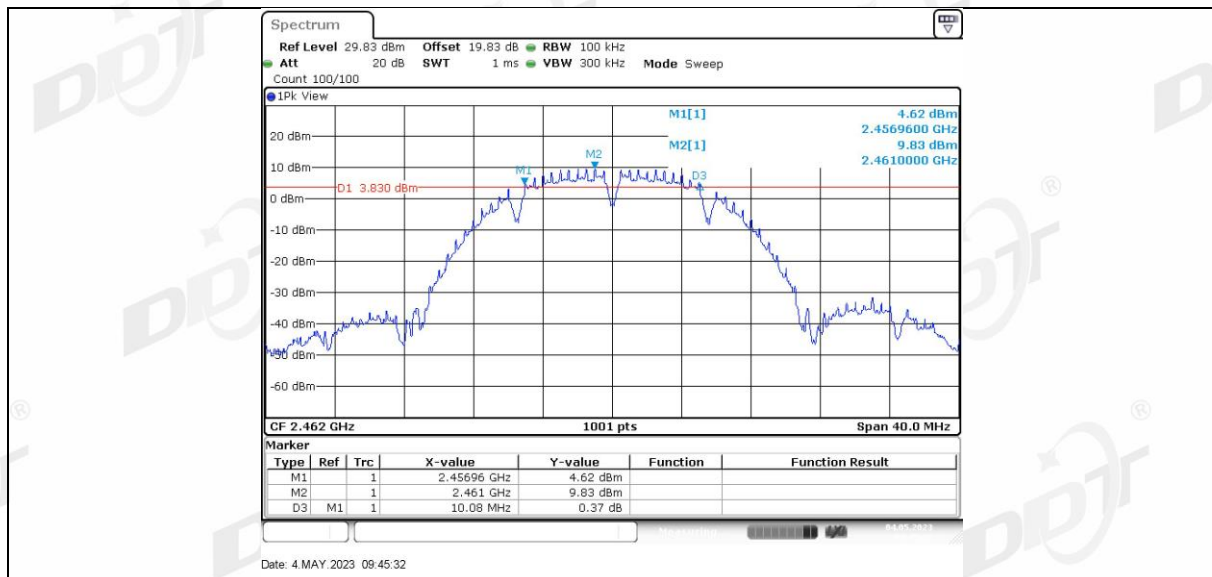


11B Ant2 2462

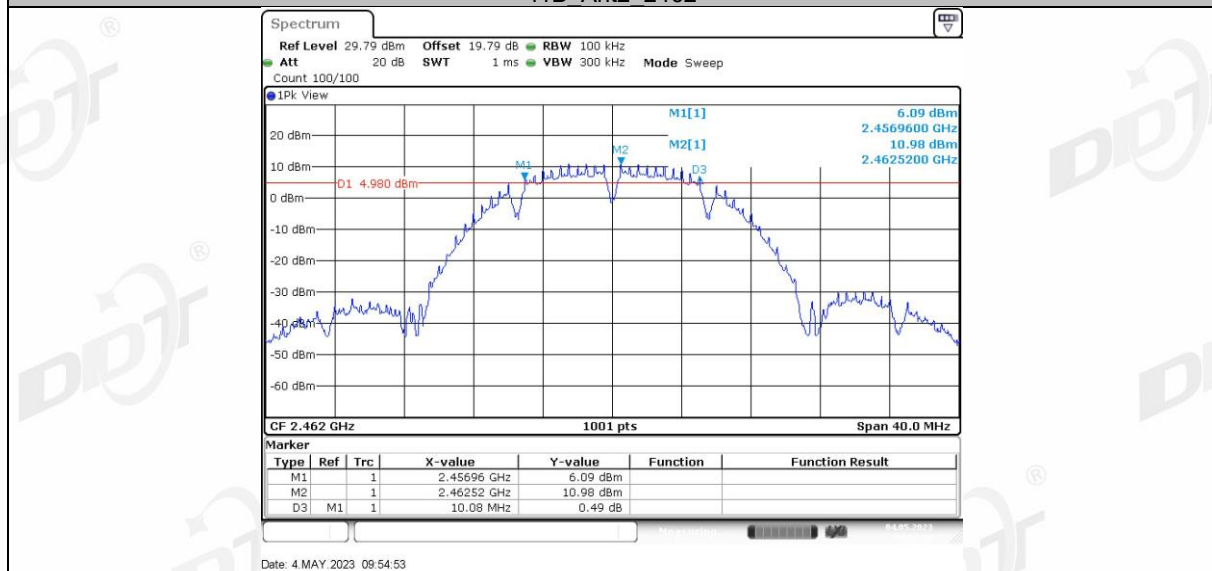


11G Ant1 2412

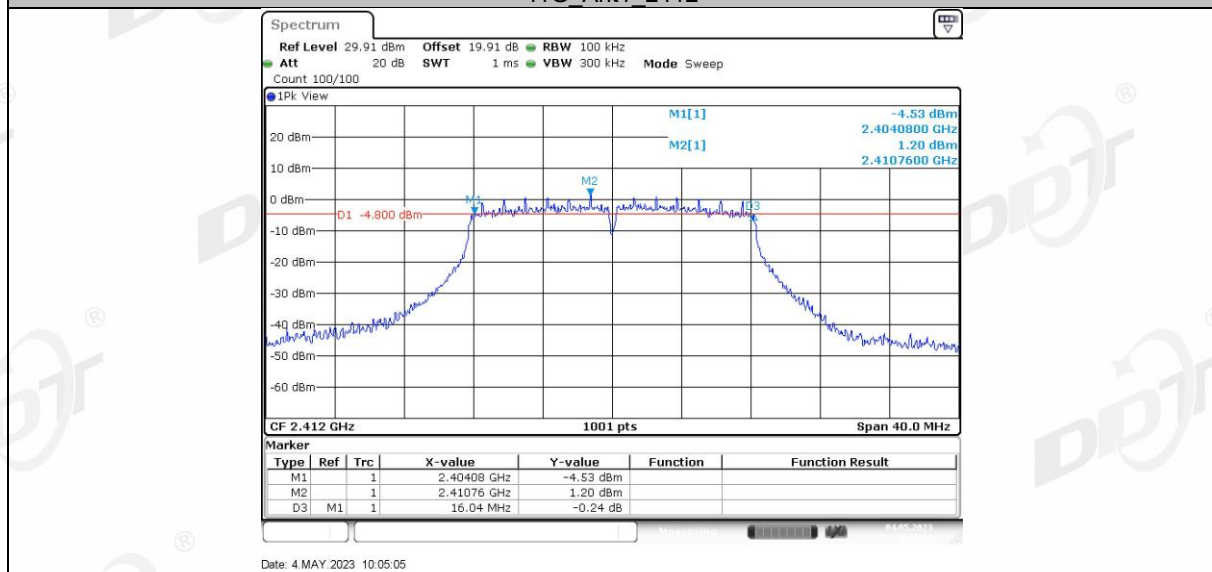


11G Ant2 2412

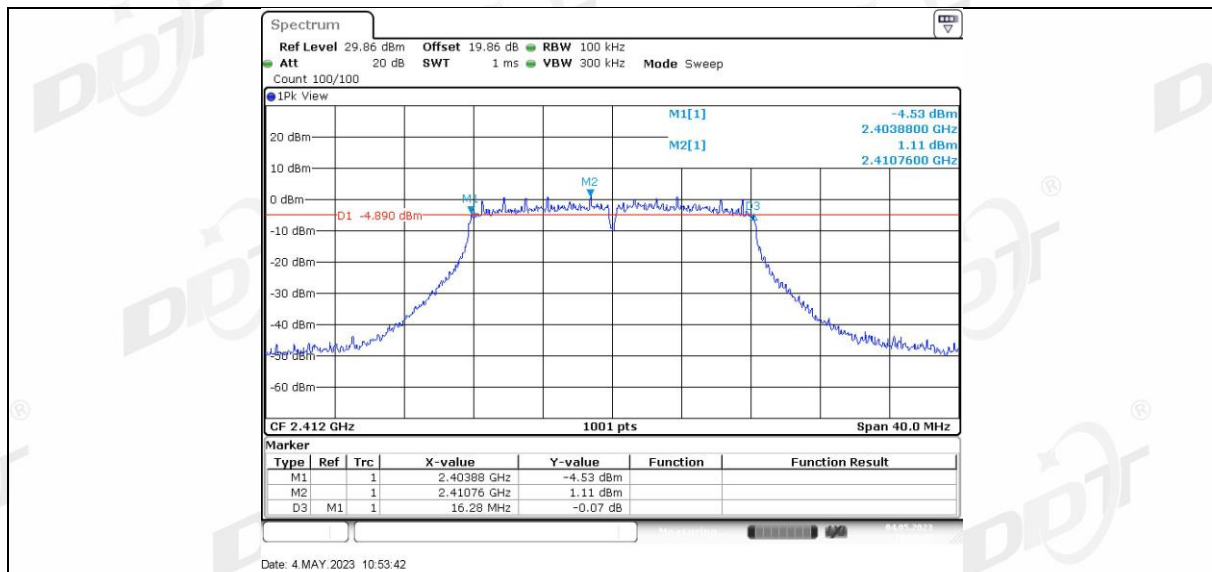


11G Ant1 2437

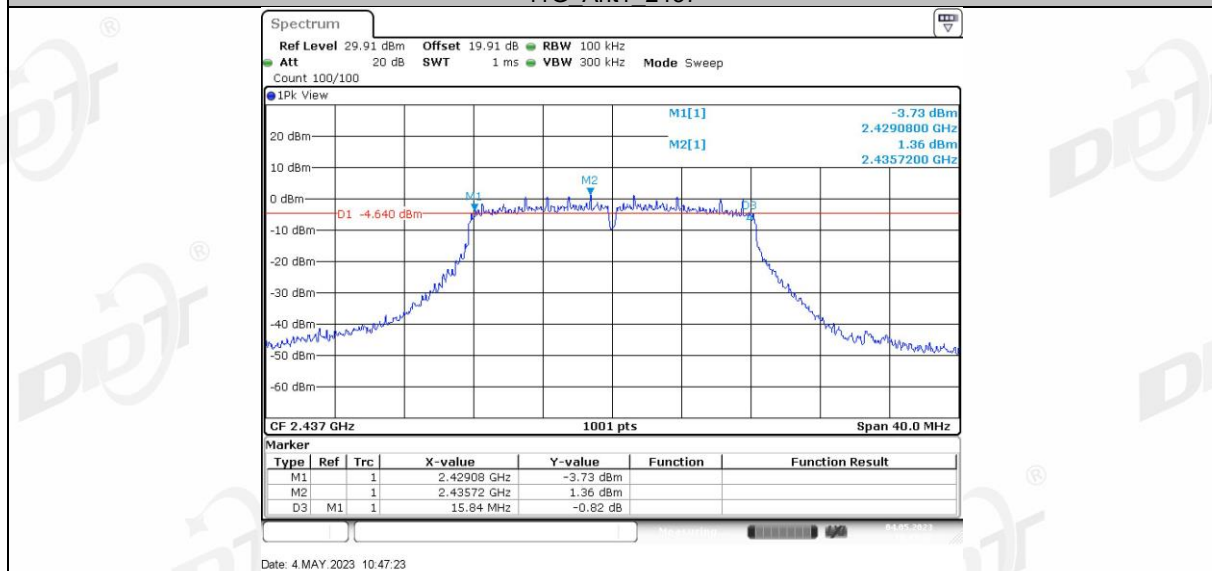


11G Ant2 2437

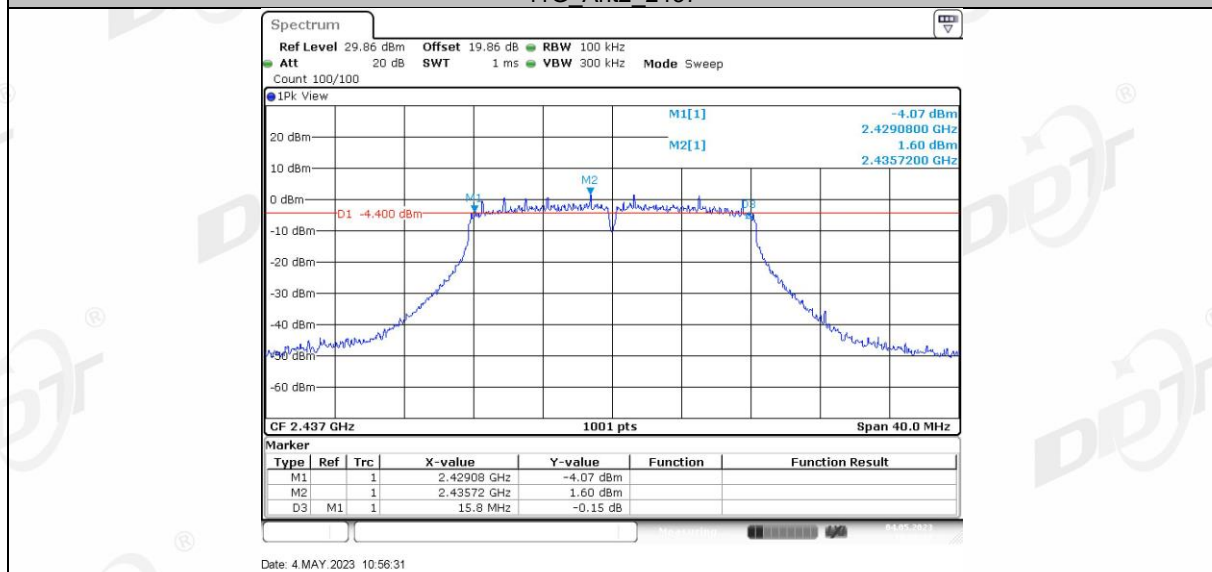


11G Ant1 2462

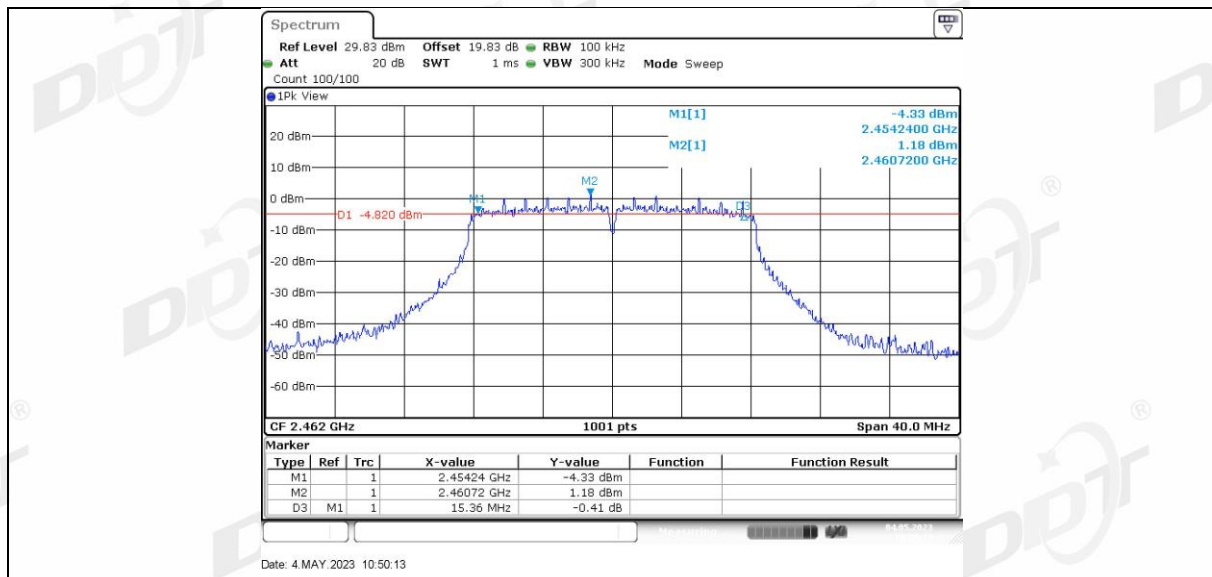


11G Ant2 2462

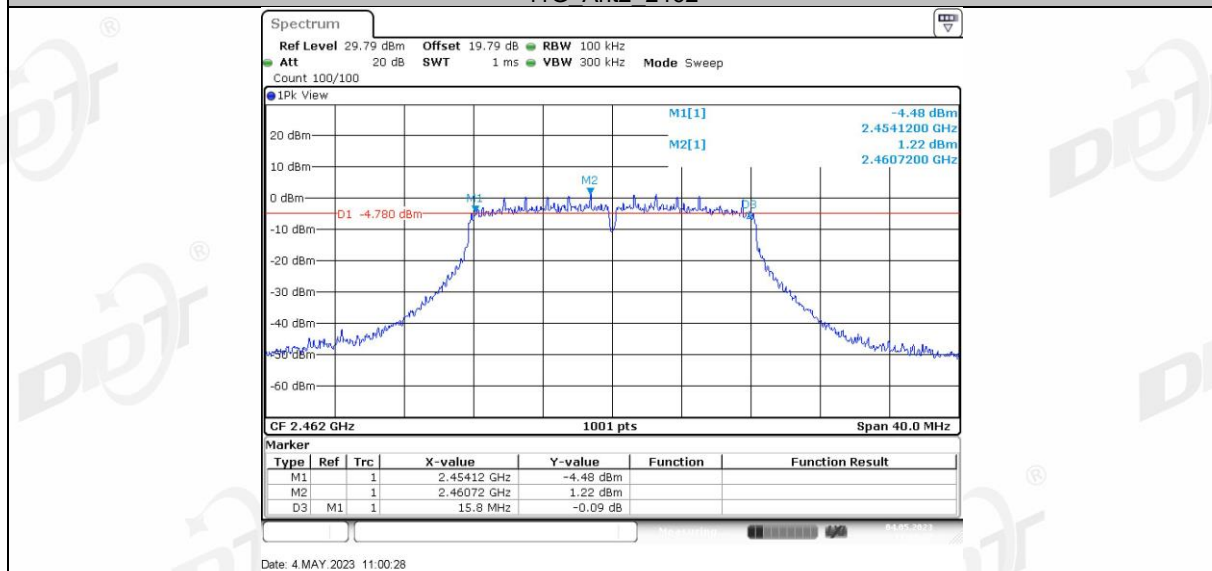


11N20MIMO Ant1 2412

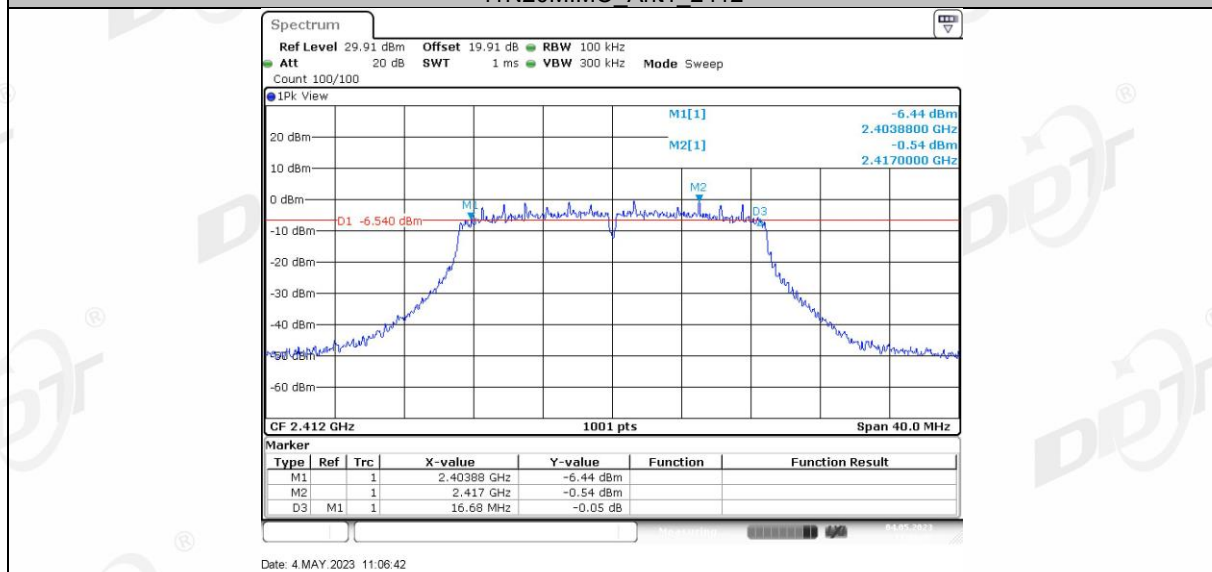


11N20MIMO Ant2 2412

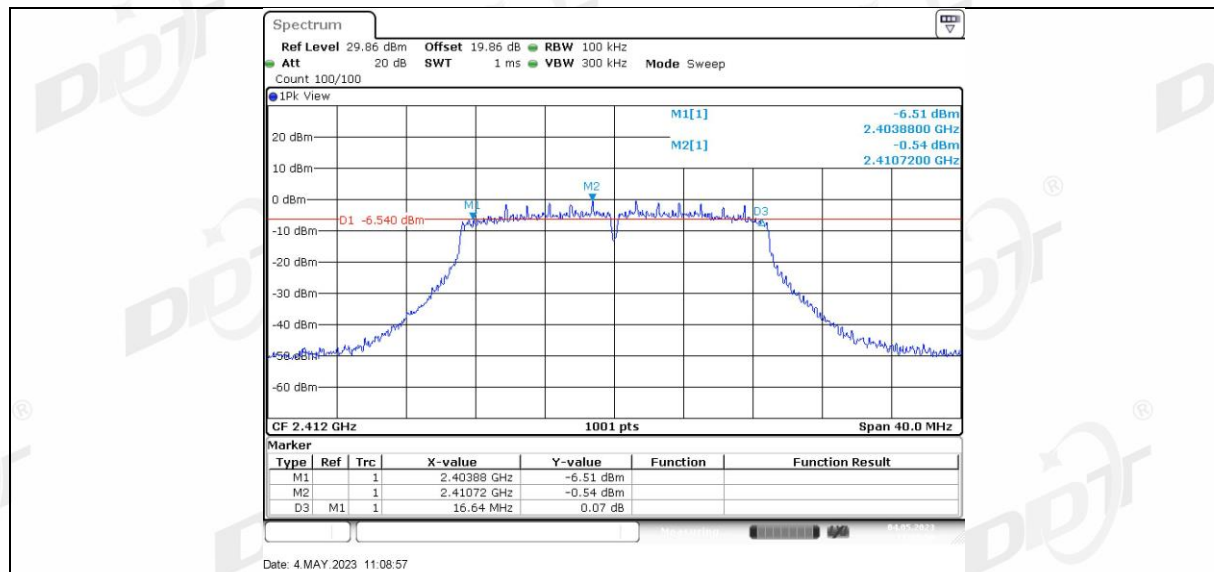


11N20MIMO Ant1 2437

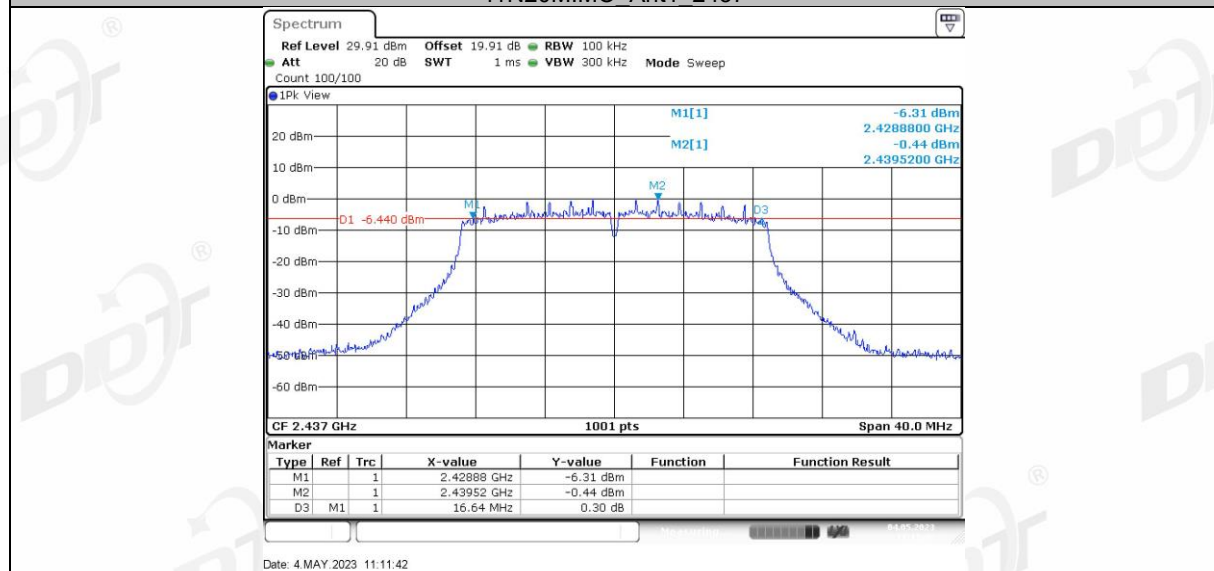


11N20MIMO Ant2 2437

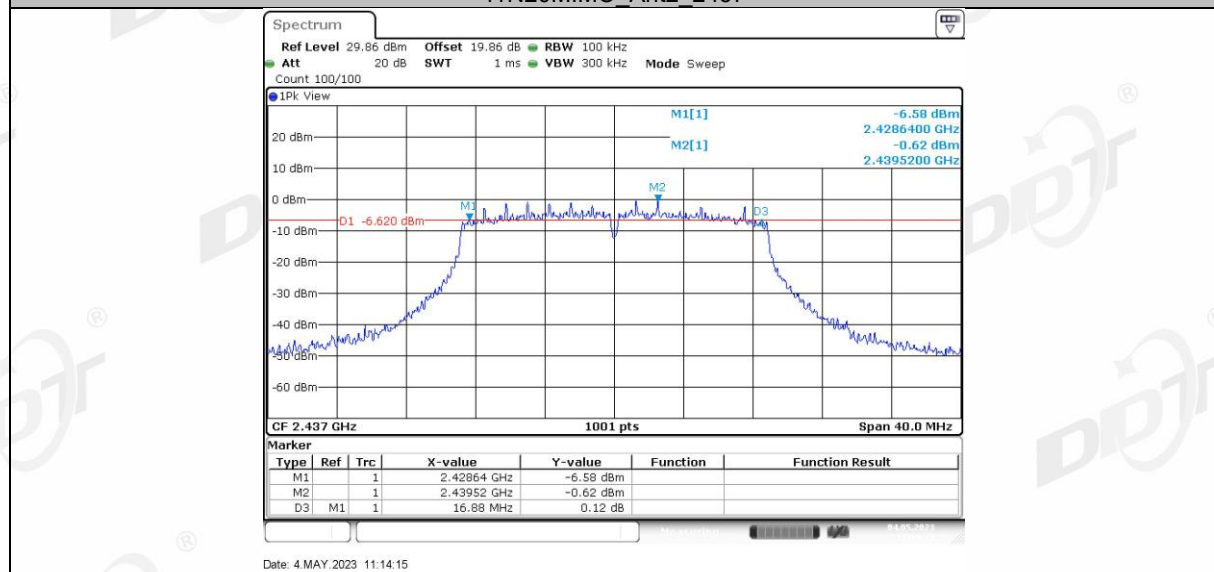


11N20MIMO Ant1 2462

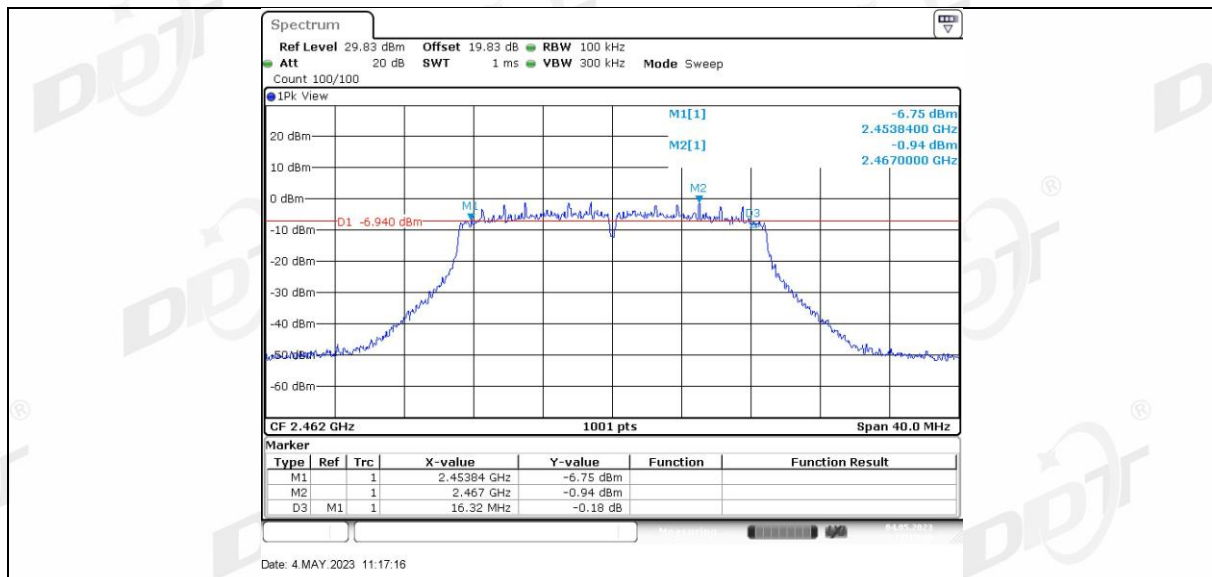


11N20MIMO Ant2 2462

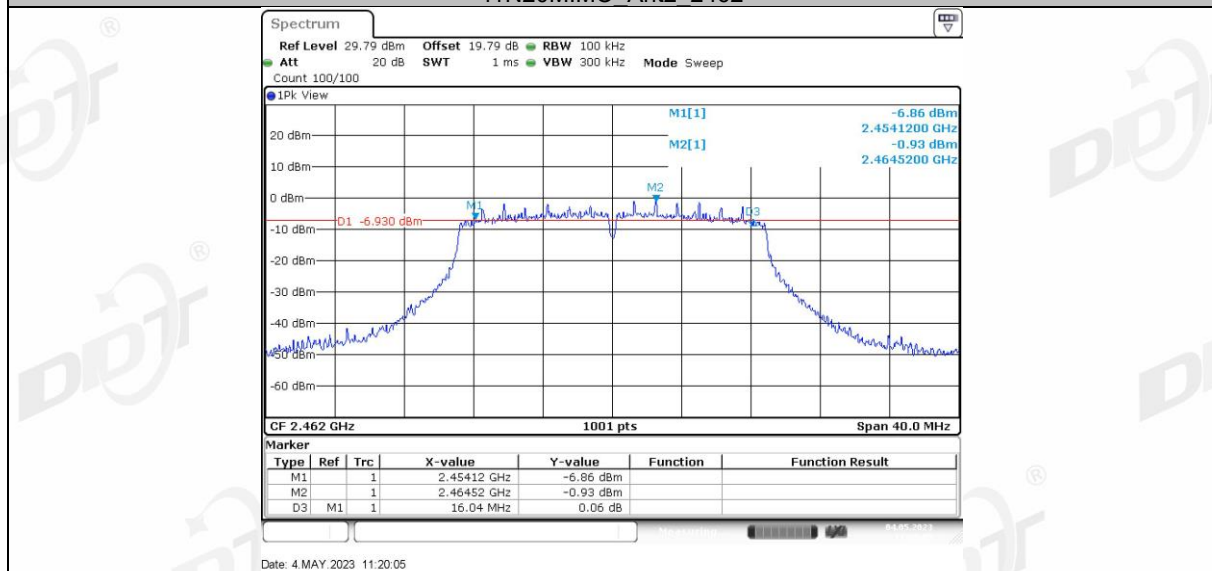


11N40MIMO Ant1 2422

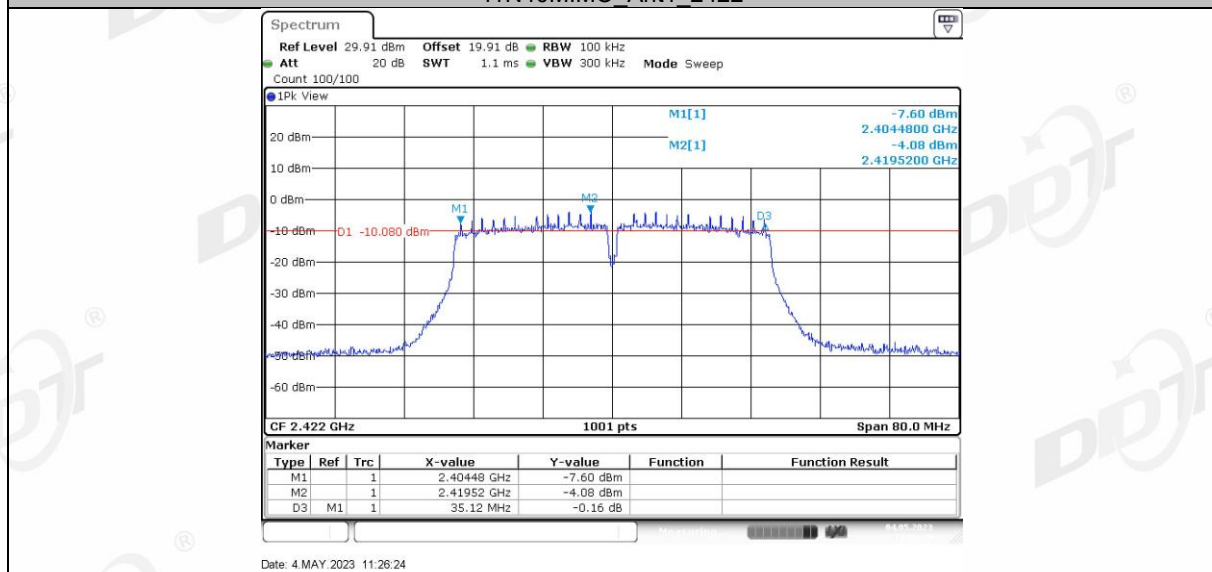


11N40MIMO Ant2 2422

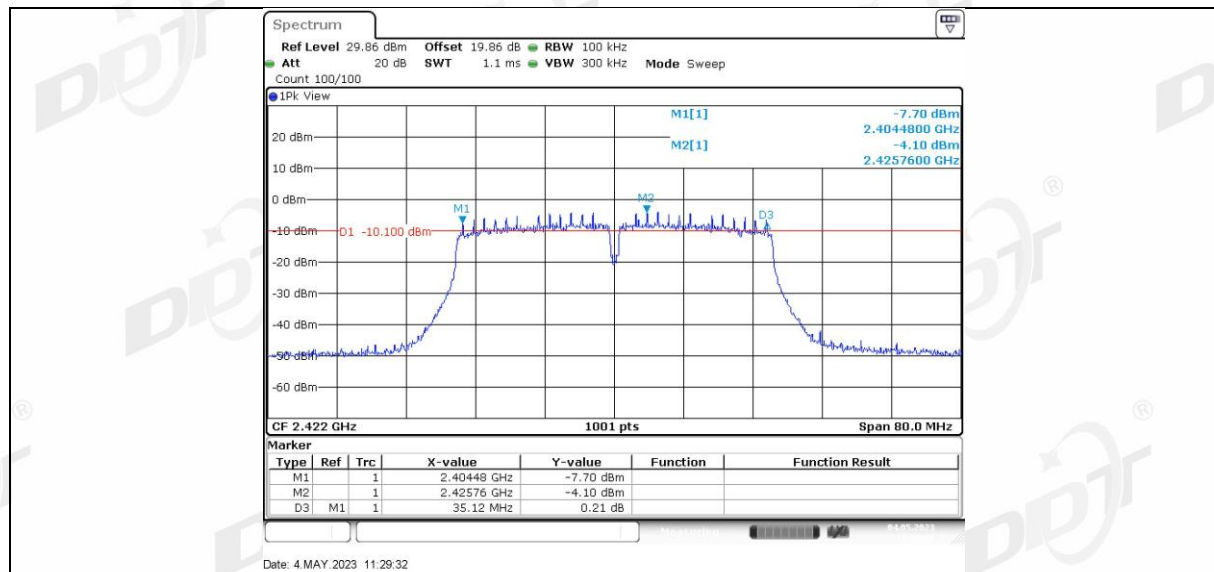

11N40MIMO Ant1 2437

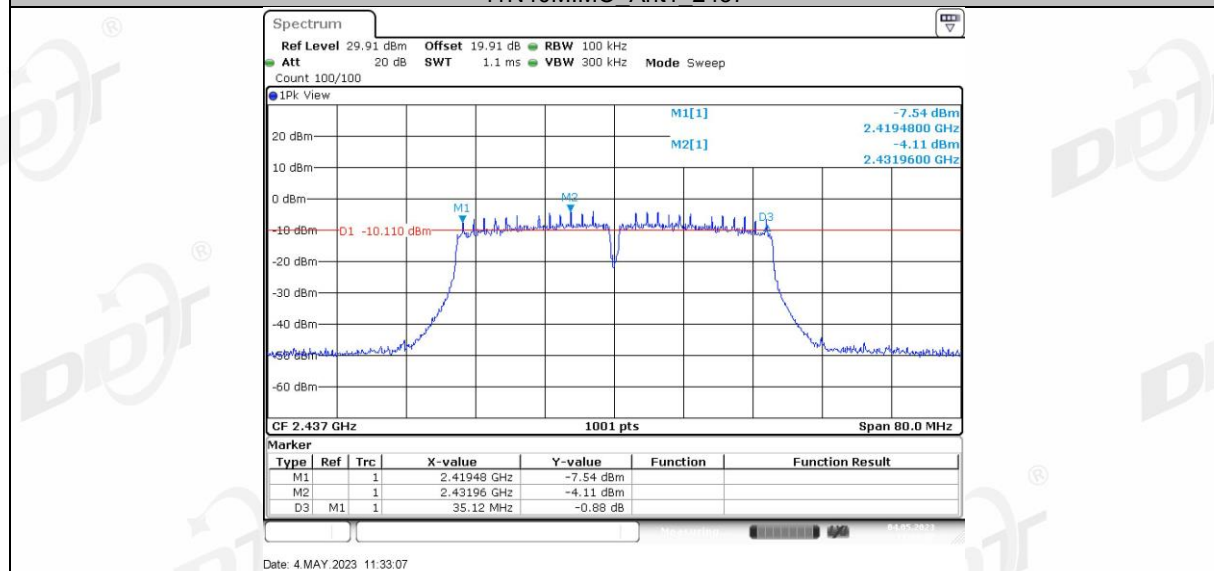

11N40MIMO Ant2 2437

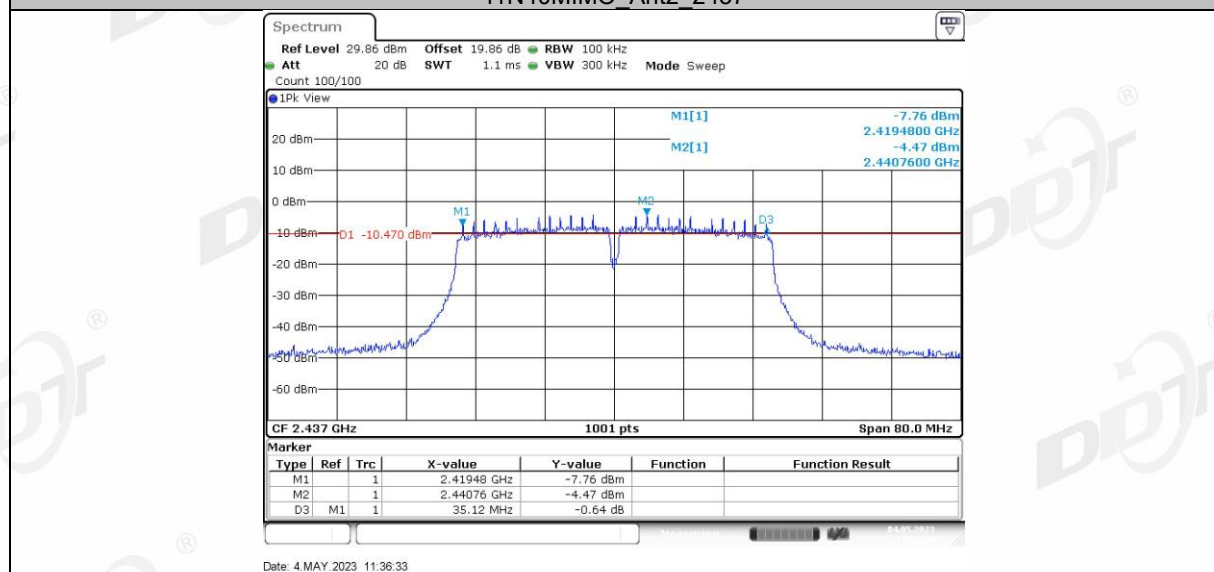


11N40MIMO Ant1 2452



5. Conducted Output Power

5.1. Block diagram of test setup

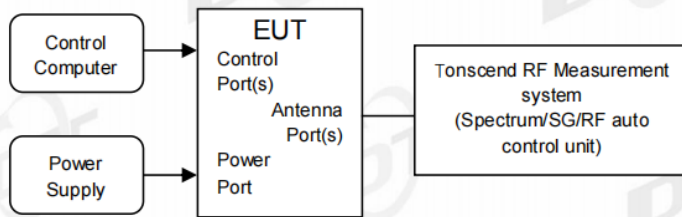

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.


5.4. Test result average

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	20.03	96.74	0.14	20.17	≤30.00	22.68	≤36.00	PASS
	Ant2	2412	19.35	96.28	0.16	19.51	≤30.00	22.49	≤36.00	PASS
	Ant1	2437	20.18	97.04	0.13	20.31	≤30.00	22.82	≤36.00	PASS
	Ant2	2437	20.26	96.73	0.14	20.40	≤30.00	23.38	≤36.00	PASS
	Ant1	2462	19.91	94.96	0.22	20.13	≤30.00	22.64	≤36.00	PASS
	Ant2	2462	20.63	97.19	0.12	20.75	≤30.00	23.73	≤36.00	PASS
11G	Ant1	2412	12.42	95.39	0.20	12.62	≤30.00	15.13	≤36.00	PASS
	Ant2	2412	12.19	90.00	0.46	12.65	≤30.00	15.63	≤36.00	PASS
	Ant1	2437	12.26	93.24	0.30	12.56	≤30.00	15.07	≤36.00	PASS
	Ant2	2437	12.09	92.00	0.36	12.45	≤30.00	15.43	≤36.00	PASS
	Ant1	2462	12.19	90.39	0.44	12.63	≤30.00	15.14	≤36.00	PASS
	Ant2	2462	11.98	92.83	0.32	12.30	≤30.00	15.28	≤36.00	PASS
11N20MIMO	Ant1	2412	10.93	90.61	0.43	11.36	≤30.00	13.87	≤36.00	PASS
	Ant2	2412	10.55	94.61	0.24	10.79	≤30.00	13.77	≤36.00	PASS
	total	2412	---	---	---	14.09	≤30.00	16.83	≤36.00	PASS
	Ant1	2437	10.45	90.57	0.43	10.88	≤30.00	13.39	≤36.00	PASS
	Ant2	2437	10.00	94.58	0.24	10.24	≤30.00	13.22	≤36.00	PASS
	total	2437	---	---	---	13.58	≤30.00	16.32	≤36.00	PASS
	Ant1	2462	10.32	90.57	0.43	10.75	≤30.00	13.26	≤36.00	PASS
	Ant2	2462	9.80	91.87	0.37	10.17	≤30.00	13.15	≤36.00	PASS
11N40MIMO	total	2462	---	---	---	13.48	≤30.00	16.22	≤36.00	PASS
	Ant1	2422	9.15	81.03	0.91	10.06	≤30.00	12.57	≤36.00	PASS
	Ant2	2422	8.91	80.34	0.95	9.86	≤30.00	12.84	≤36.00	PASS
	total	2422	---	---	---	12.97	≤30.00	15.72	≤36.00	PASS
	Ant1	2437	8.91	83.19	0.80	9.71	≤30.00	12.22	≤36.00	PASS
	Ant2	2437	8.50	83.93	0.76	9.26	≤30.00	12.24	≤36.00	PASS
	total	2437	---	---	---	12.50	≤30.00	15.24	≤36.00	PASS
	Ant1	2452	8.28	84.07	0.75	9.03	≤30.00	11.54	≤36.00	PASS
	Ant2	2452	8.46	82.46	0.84	9.30	≤30.00	12.28	≤36.00	PASS
	total	2452	---	---	---	12.18	≤30.00	14.94	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

6. Power Spectral Density

6.1. Block diagram of test setup

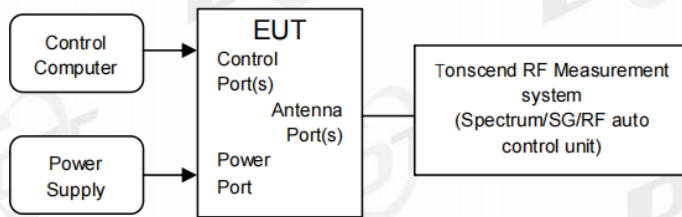

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
 - (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
 - (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
 - (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.
 - (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test result

Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.69	≤8.00	PASS
	Ant2	2412	-13.88	≤8.00	PASS
	Ant1	2437	-13.27	≤8.00	PASS
	Ant2	2437	-12.95	≤8.00	PASS
	Ant1	2462	-13.70	≤8.00	PASS
11G	Ant2	2462	-12.74	≤8.00	PASS
	Ant1	2412	-21.02	≤8.00	PASS
	Ant2	2412	-20.93	≤8.00	PASS
	Ant1	2437	-21.43	≤8.00	PASS
	Ant2	2437	-21.13	≤8.00	PASS
11N20MIMO	Ant1	2462	-21.87	≤8.00	PASS
	Ant2	2462	-21.68	≤8.00	PASS
	Ant1	2412	-23.50	≤8.00	PASS
	Ant2	2412	-23.80	≤8.00	PASS
	total	2412	-20.64	≤8.00	PASS
	Ant1	2437	-23.58	≤8.00	PASS
	Ant2	2437	-24.07	≤8.00	PASS
	total	2437	-20.81	≤8.00	PASS
11N40MIMO	Ant1	2462	-23.96	≤8.00	PASS
	Ant2	2462	-24.26	≤8.00	PASS
	total	2462	-21.10	≤8.00	PASS
	Ant1	2422	-27.53	≤8.00	PASS
	Ant2	2422	-27.62	≤8.00	PASS
	total	2422	-24.56	≤8.00	PASS
	Ant1	2437	-28.05	≤8.00	PASS
	Ant2	2437	-27.98	≤8.00	PASS
	total	2437	-25.00	≤8.00	PASS
	Ant1	2452	-28.12	≤8.00	PASS
	Ant2	2452	-28.16	≤8.00	PASS
	total	2452	-25.13	≤8.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

6.5. Test graphs

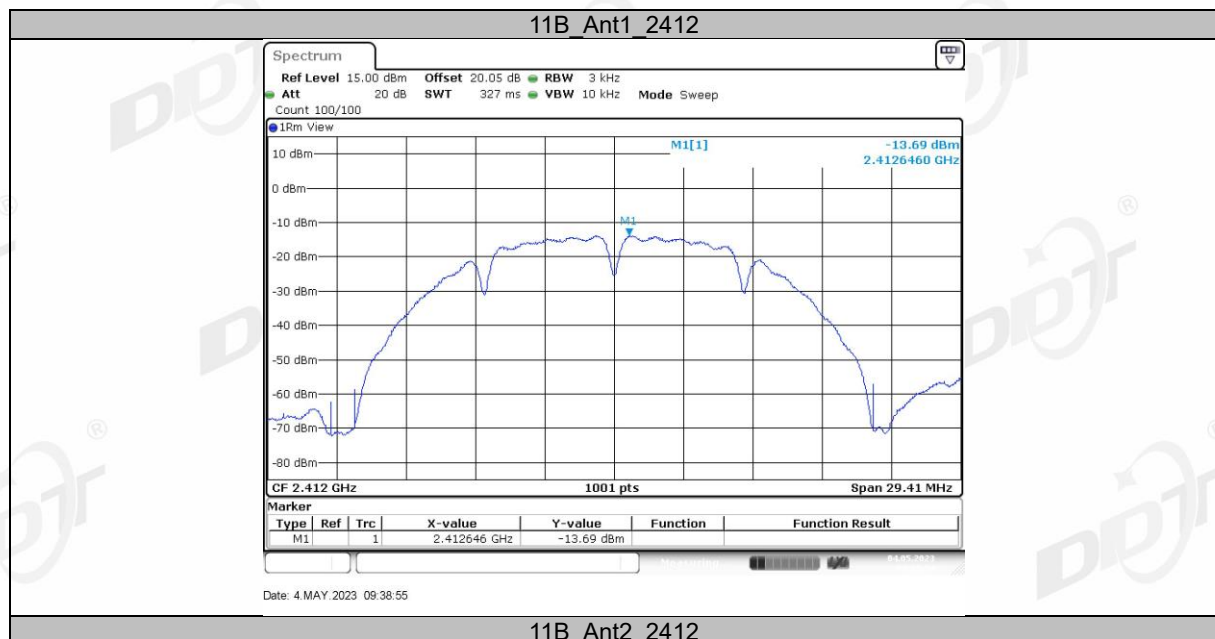


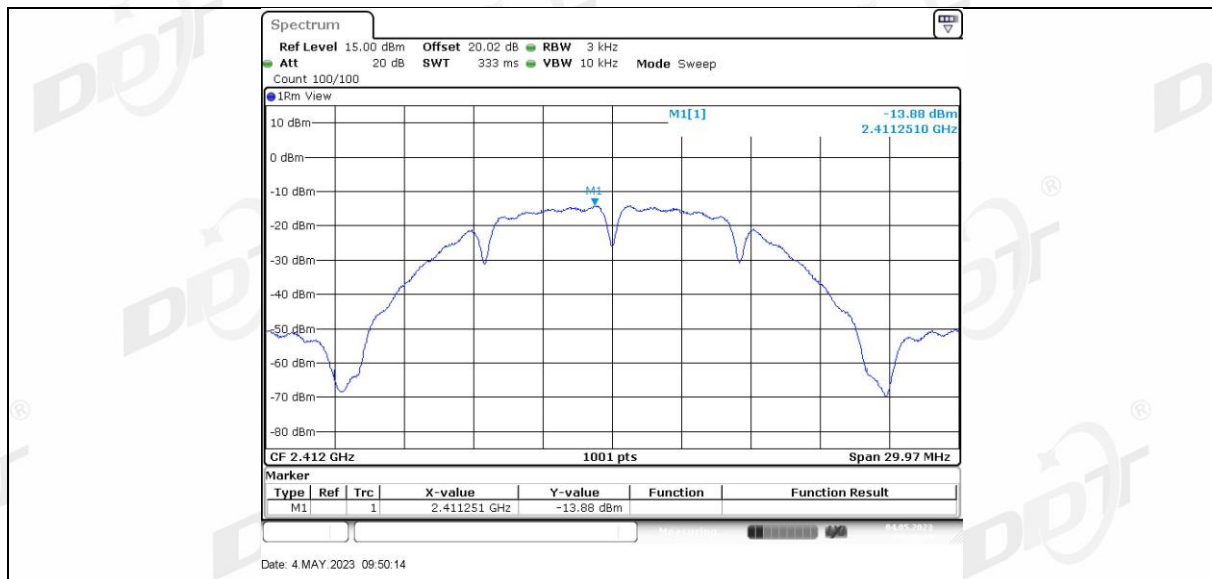


11B Ant1 2437



11B Ant2 2437

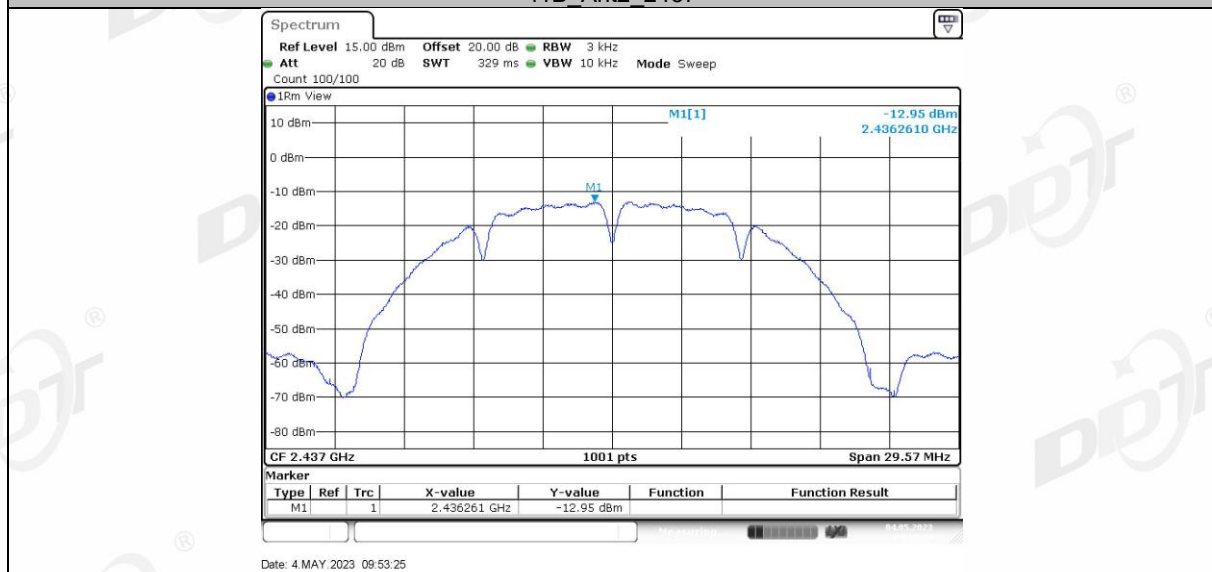


11B Ant1 2462

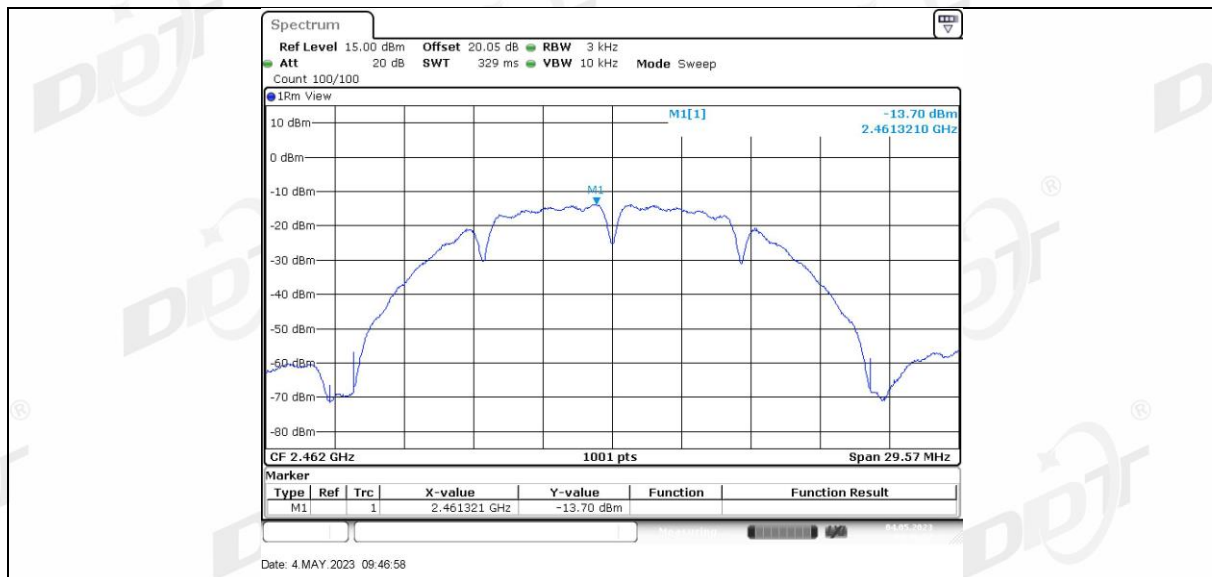


11B Ant2 2462




11G Ant1 2412

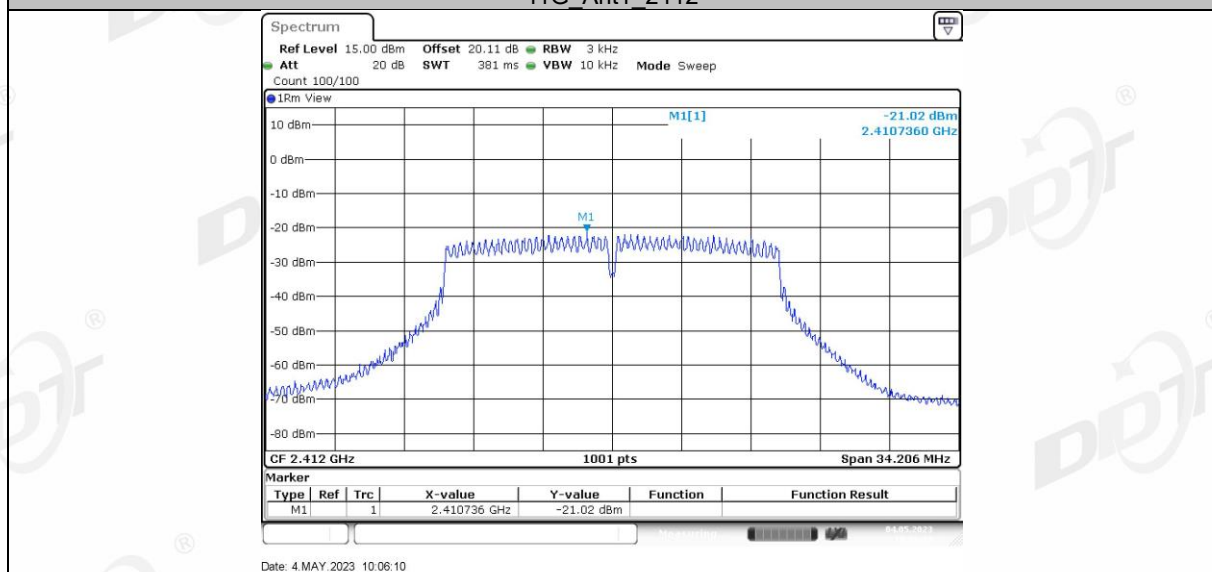


11G Ant2 2412

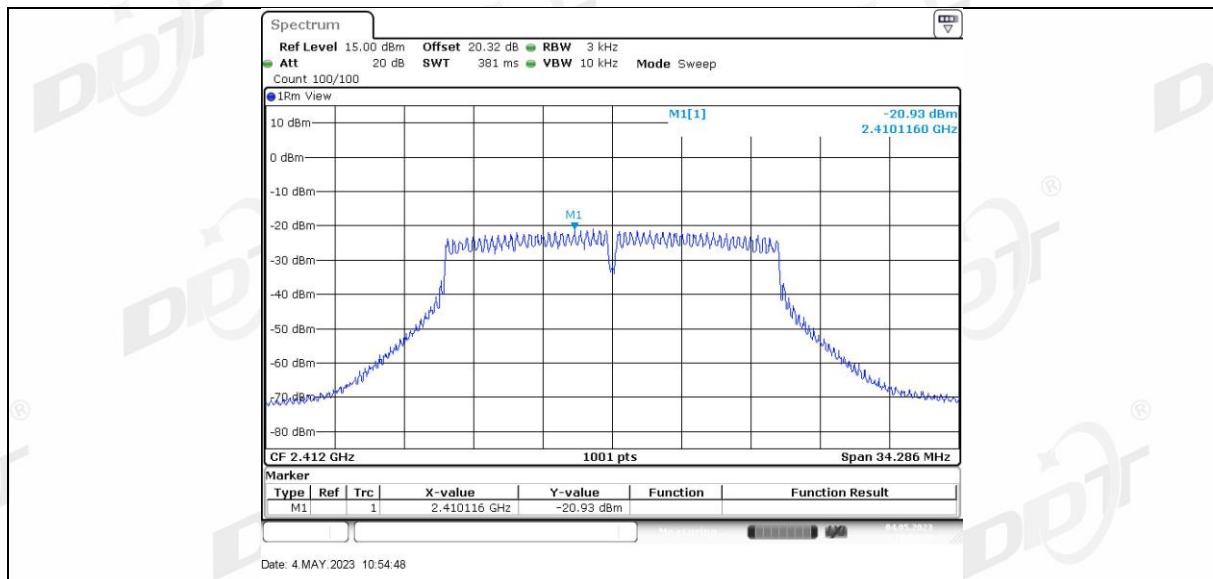


11G Ant1 2437

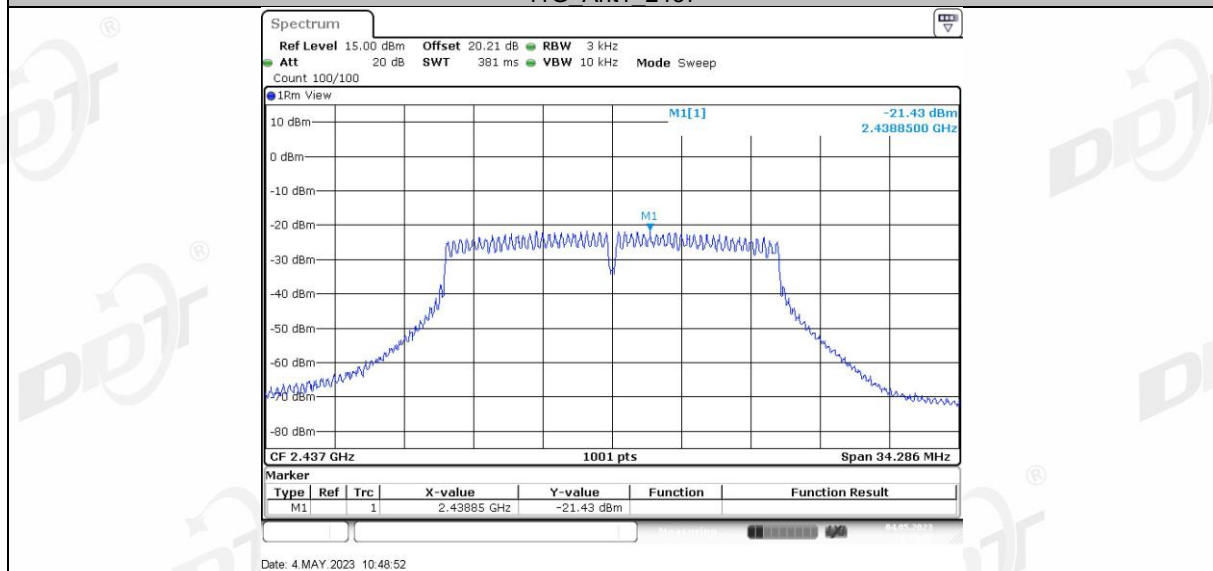


11G Ant2 2437

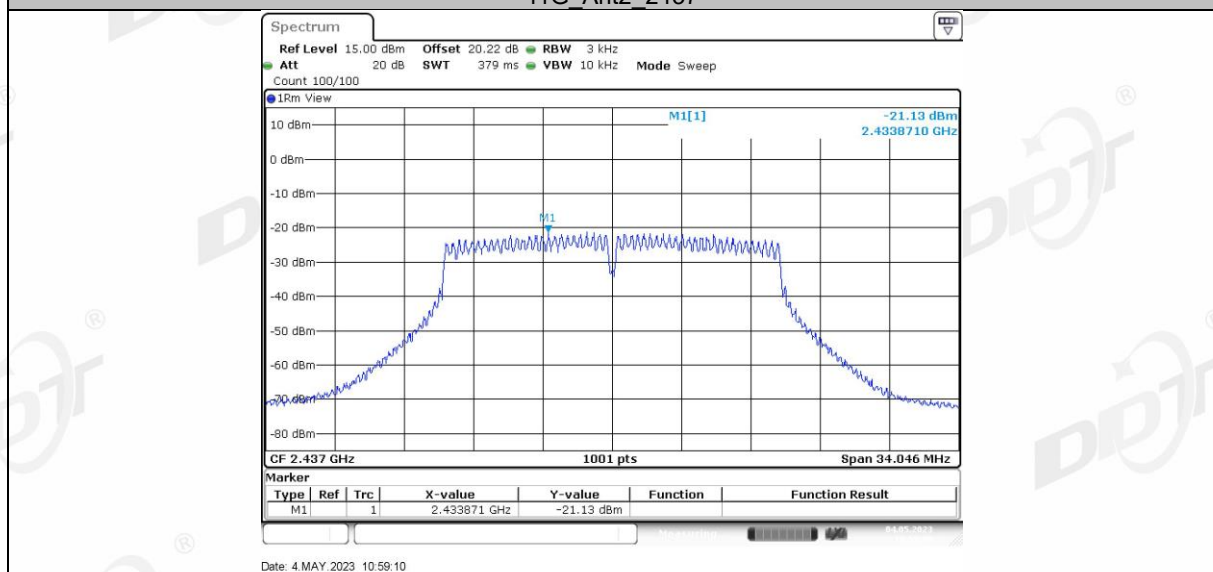


11G Ant1 2462

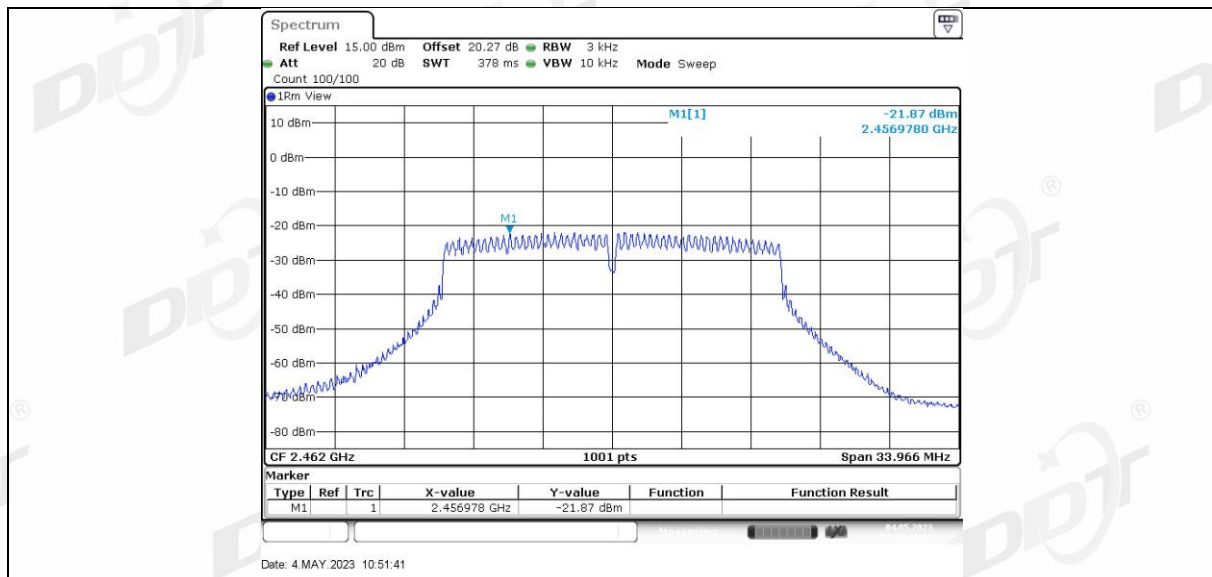


11G Ant2 2462

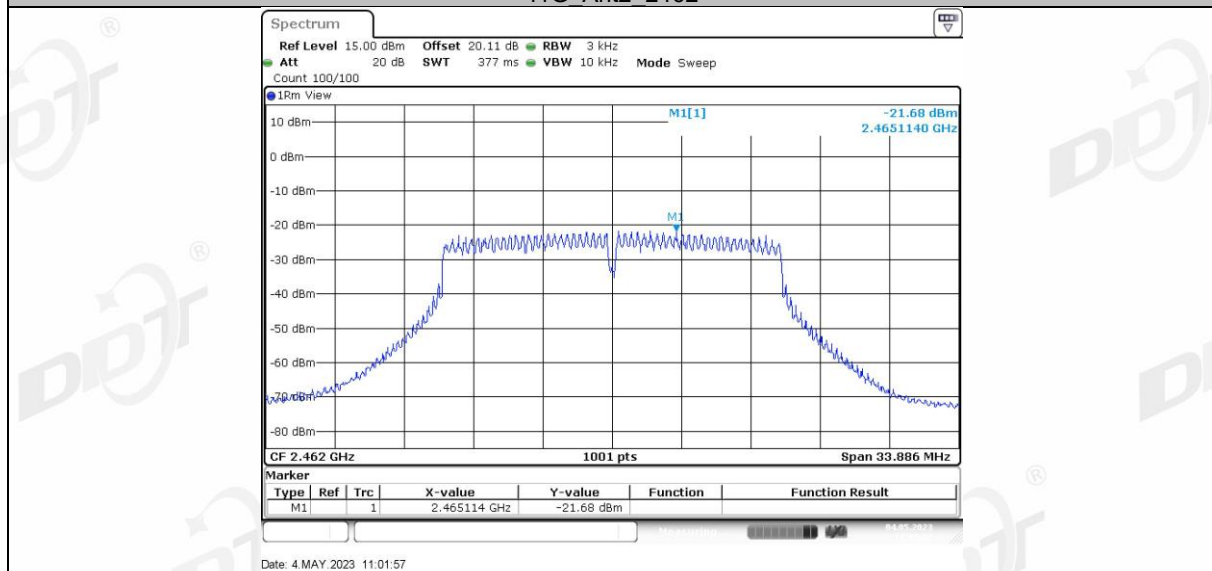


11N20MIMO Ant1 2412

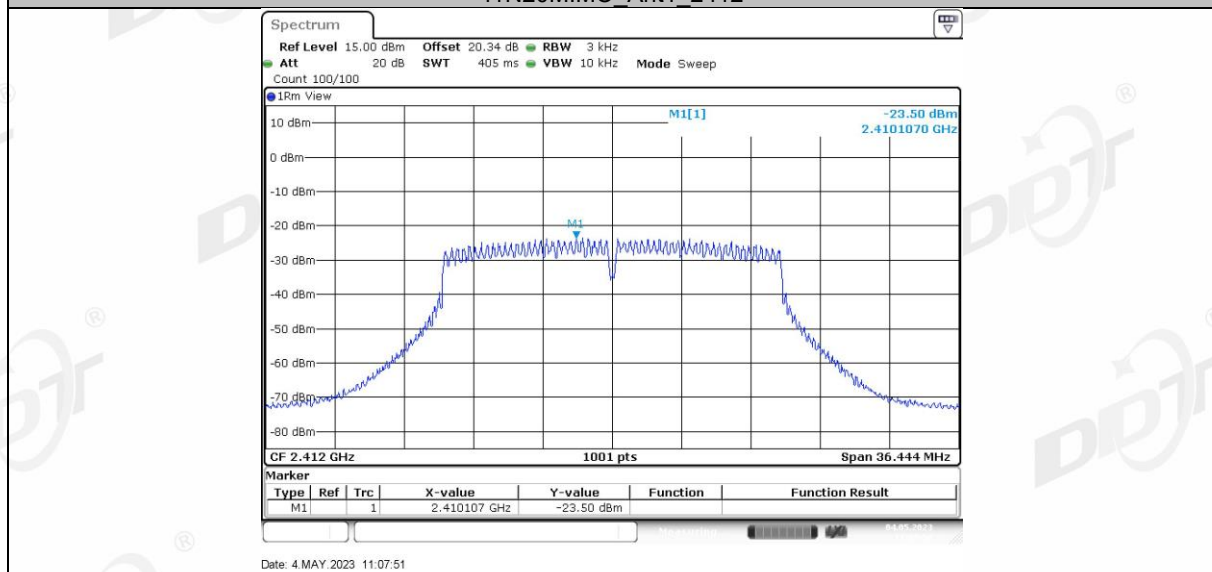


11N20MIMO Ant2 2412

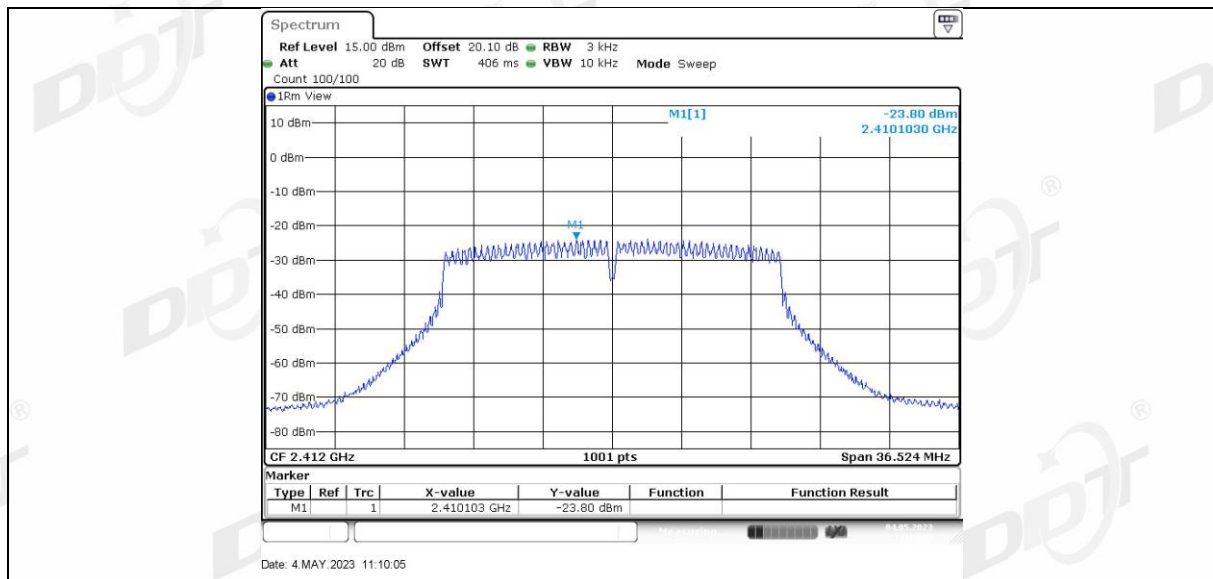


11N20MIMO Ant1 2437

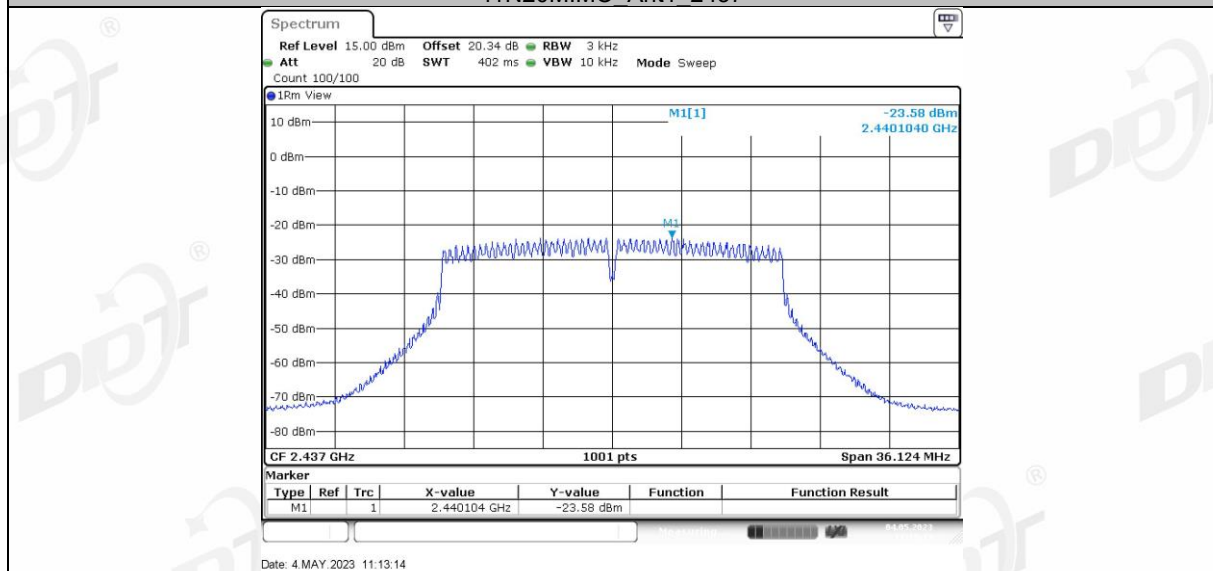


11N20MIMO Ant2 2437

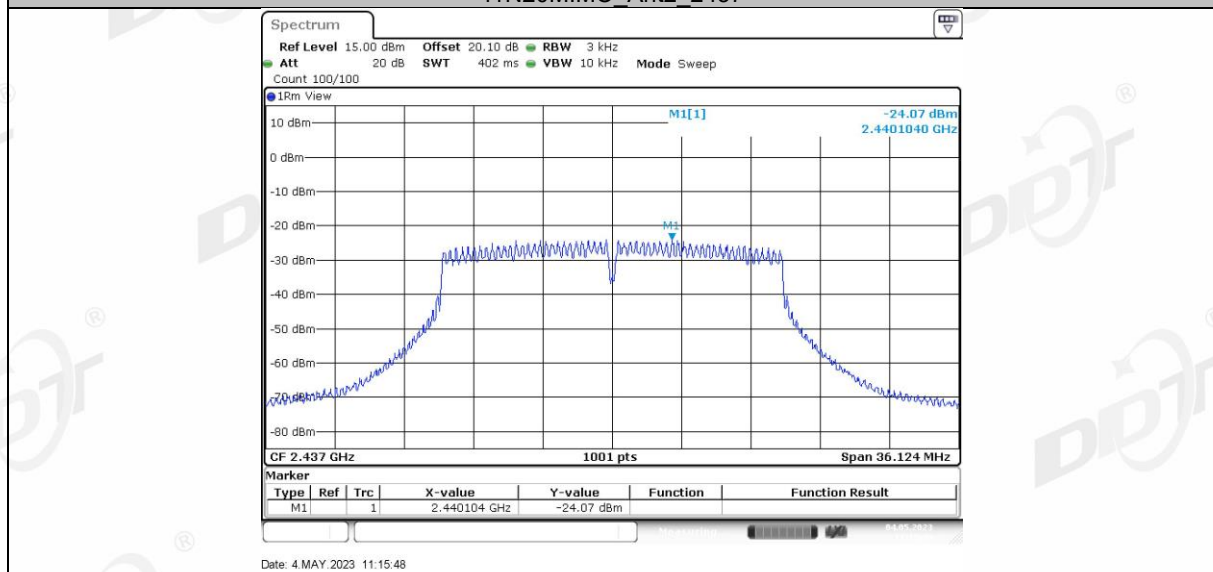


11N20MIMO Ant1 2462

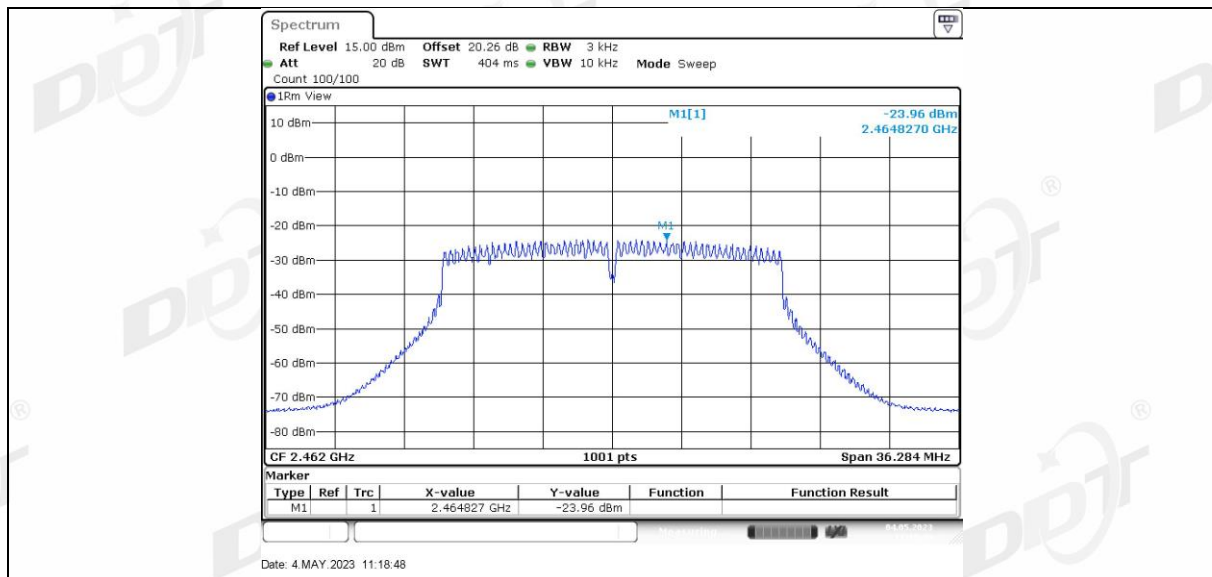


11N20MIMO Ant2 2462

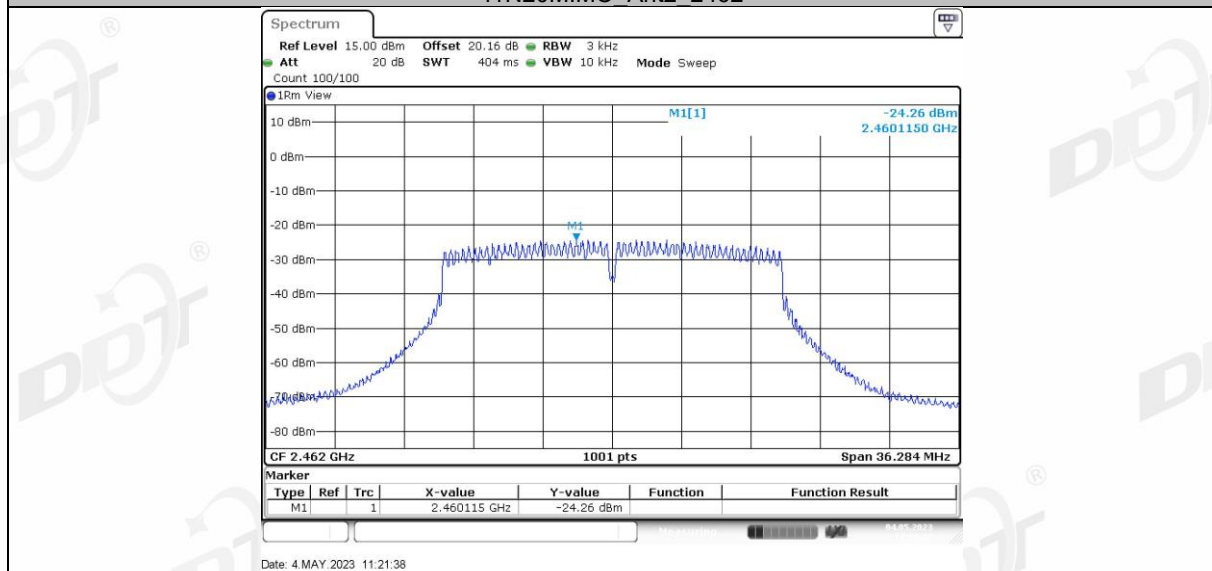


11N40MIMO Ant1 2422

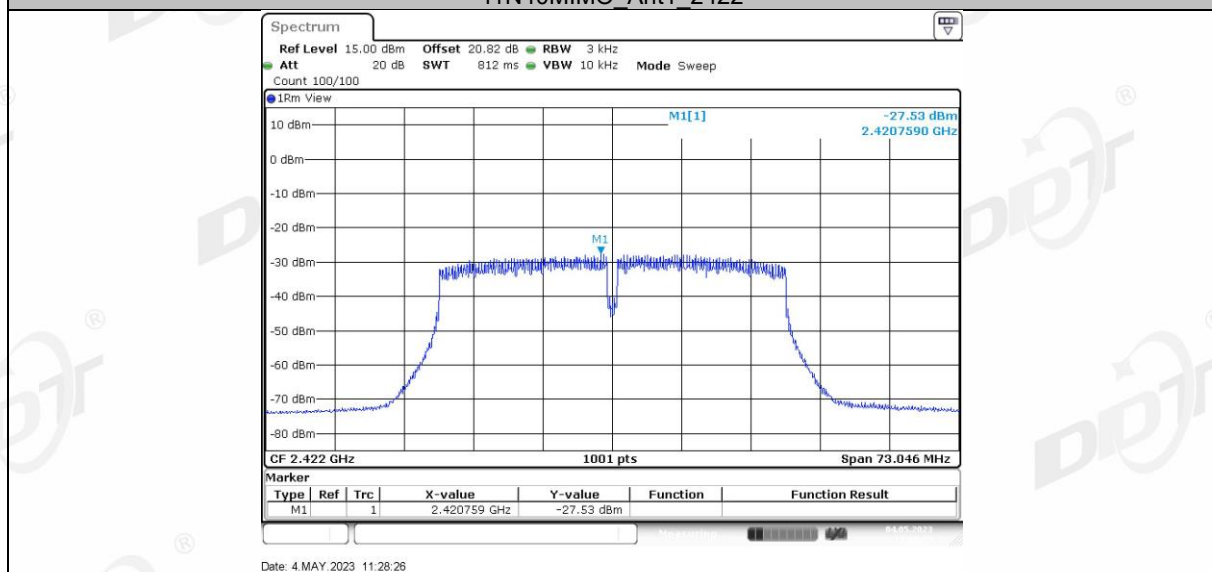


11N40MIMO Ant2 2422

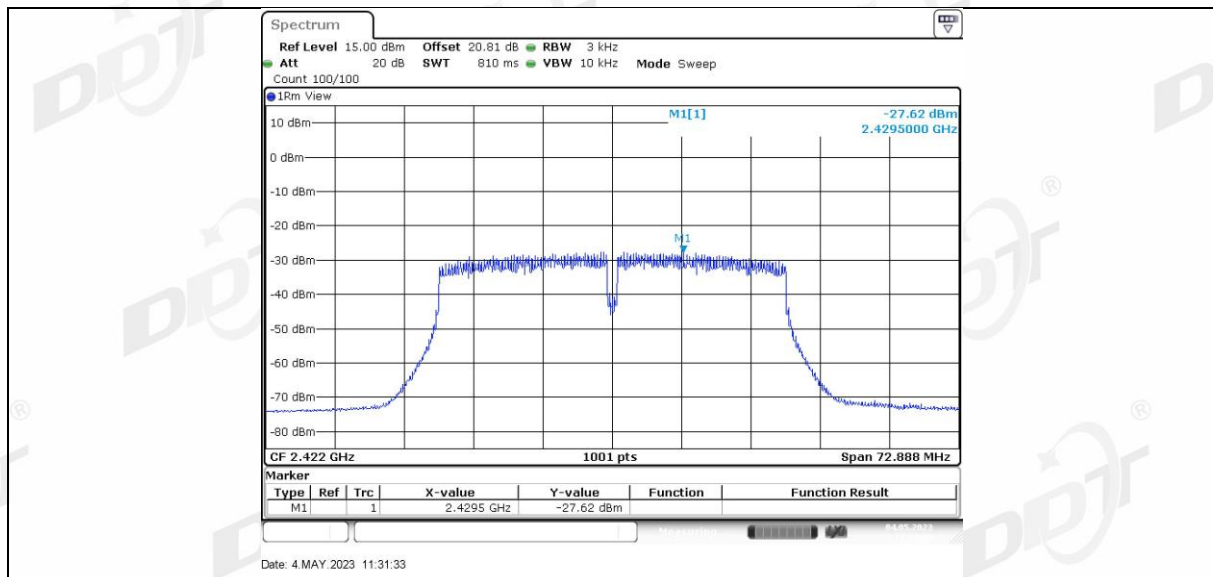

11N40MIMO Ant1 2437

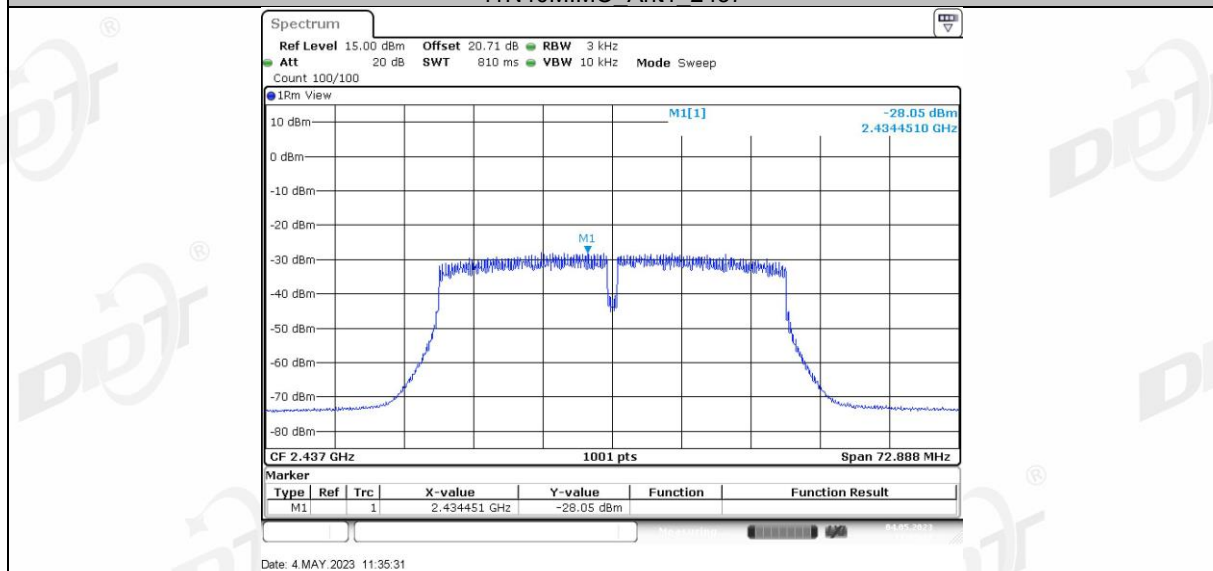

11N40MIMO Ant2 2437

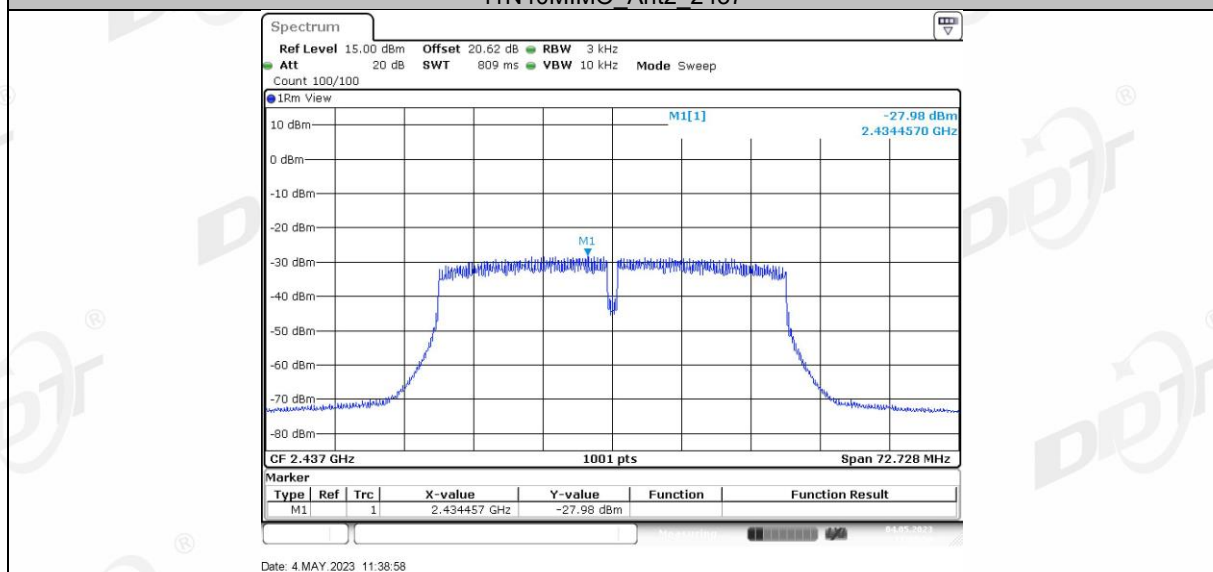


11N40MIMO Ant1 2452



7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

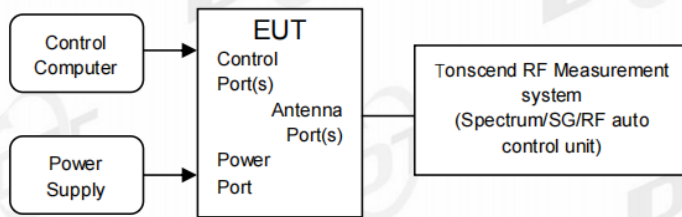

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

7.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass

7.5. Test graphs

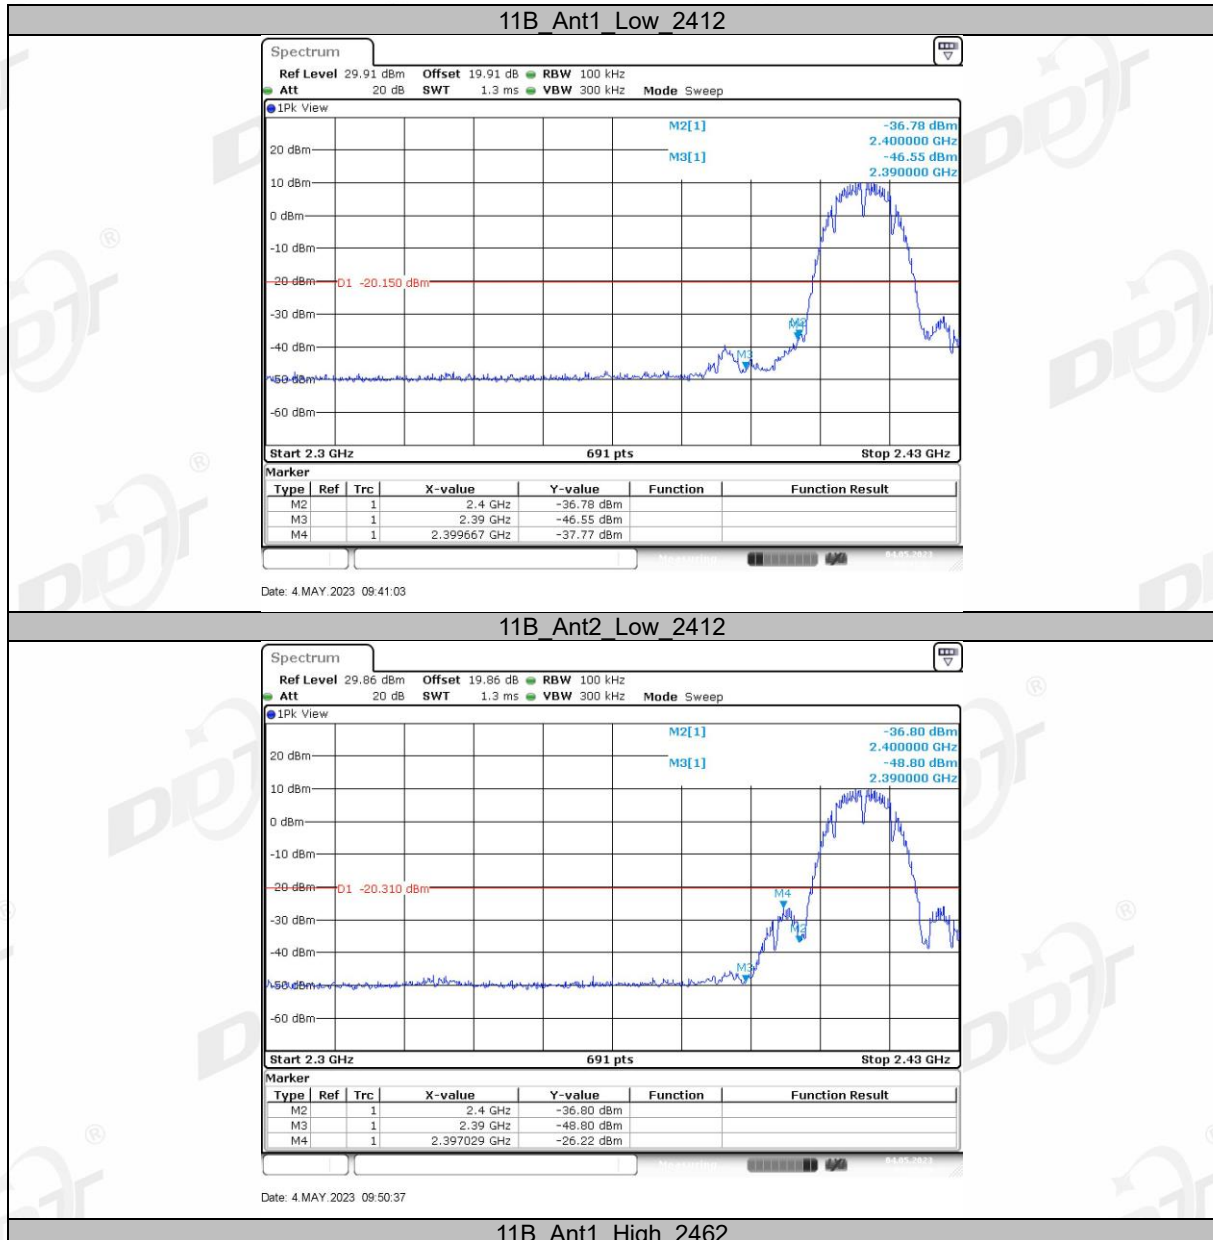


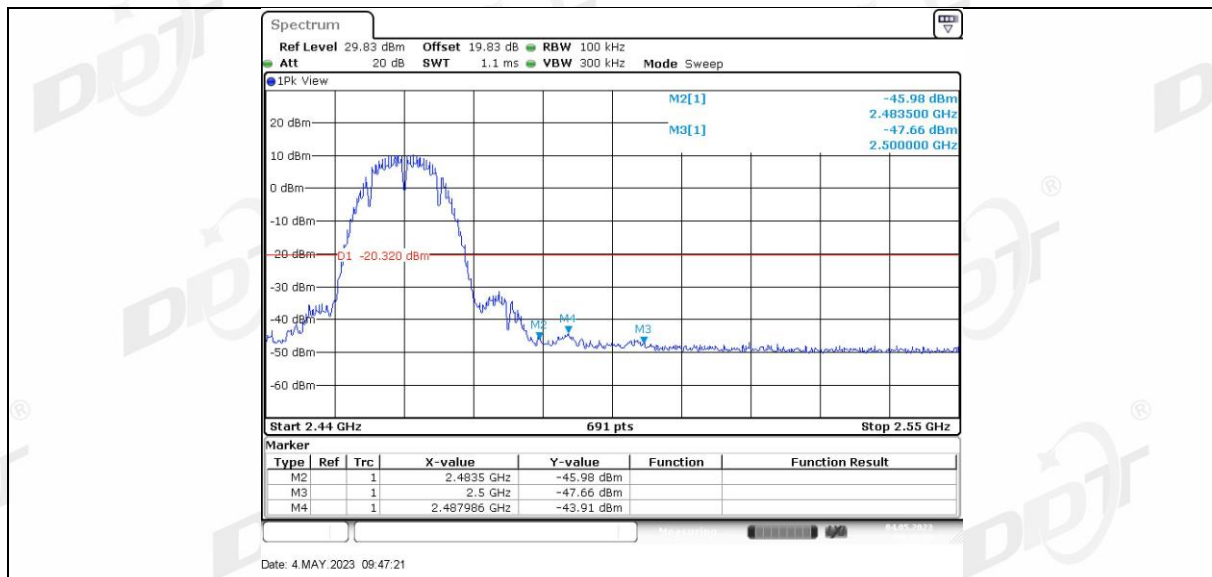


11B Ant2 High 2462

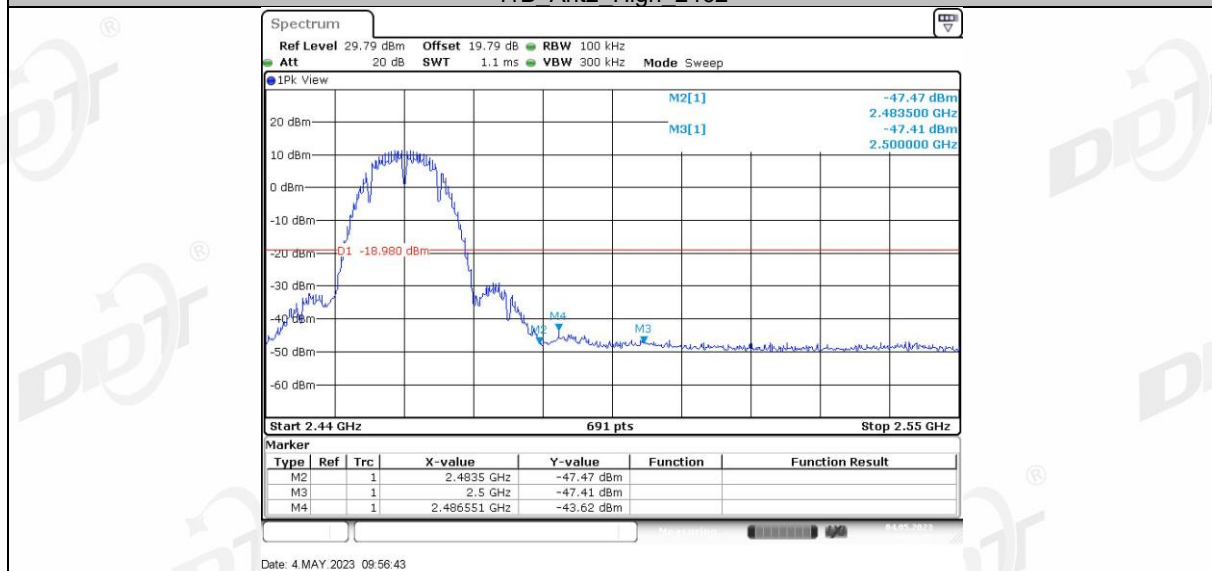


11G Ant1 Low 2412

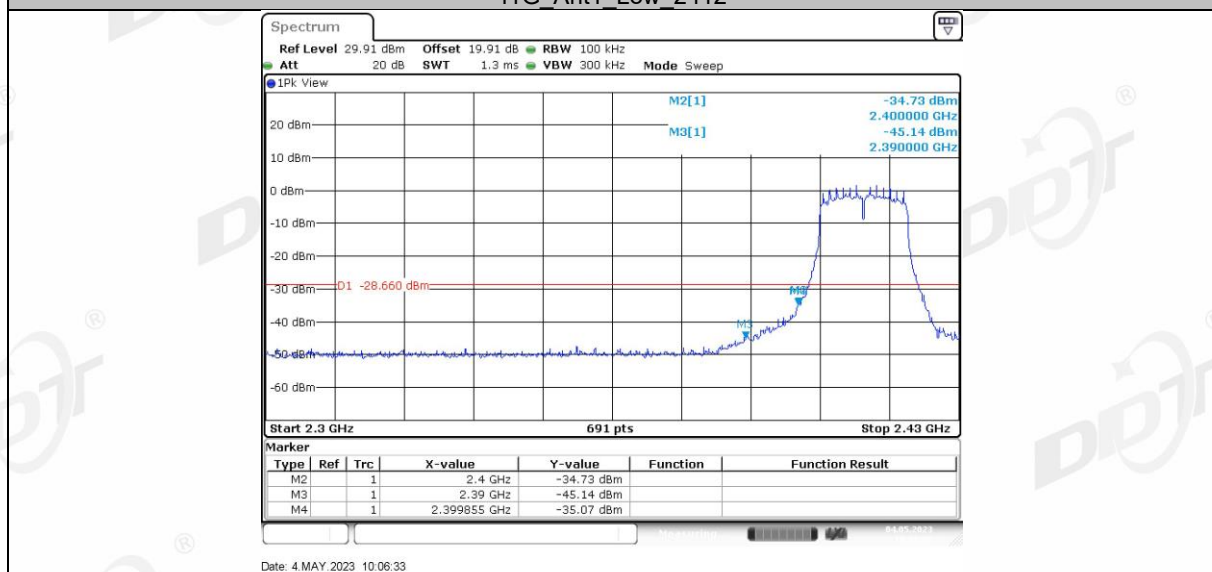


11G Ant2 Low 2412

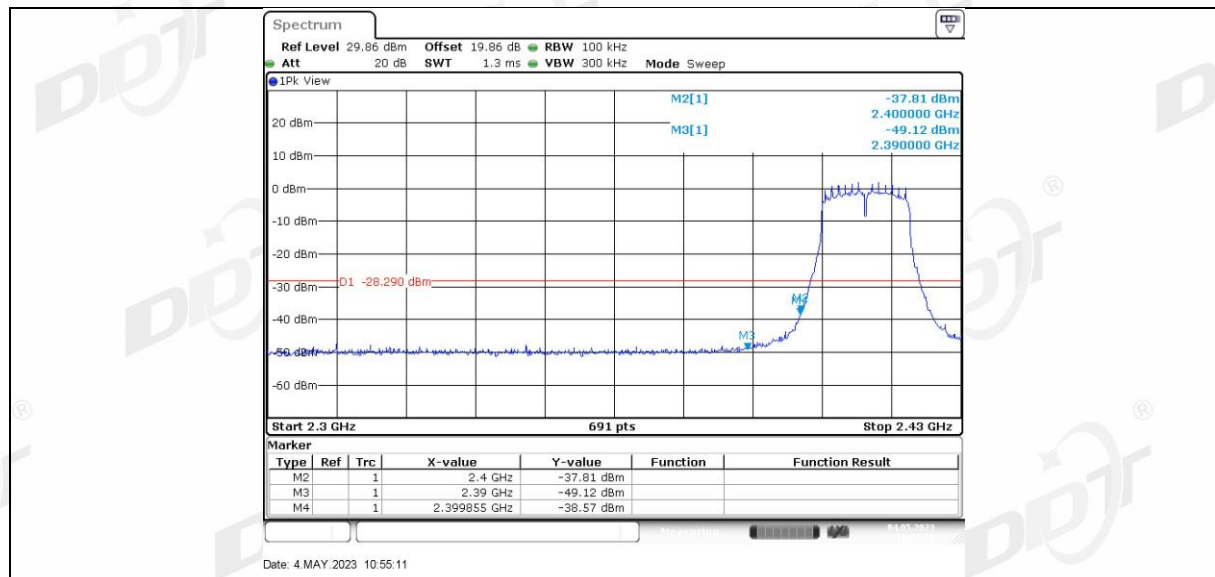

11G Ant1 High 2462

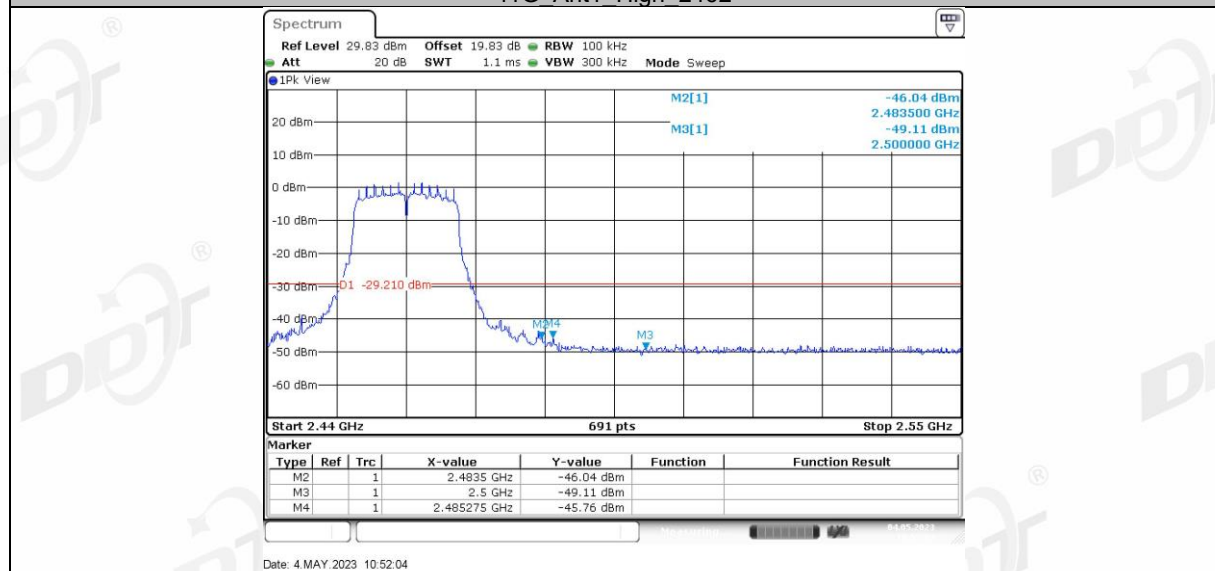

11G Ant2 High 2462

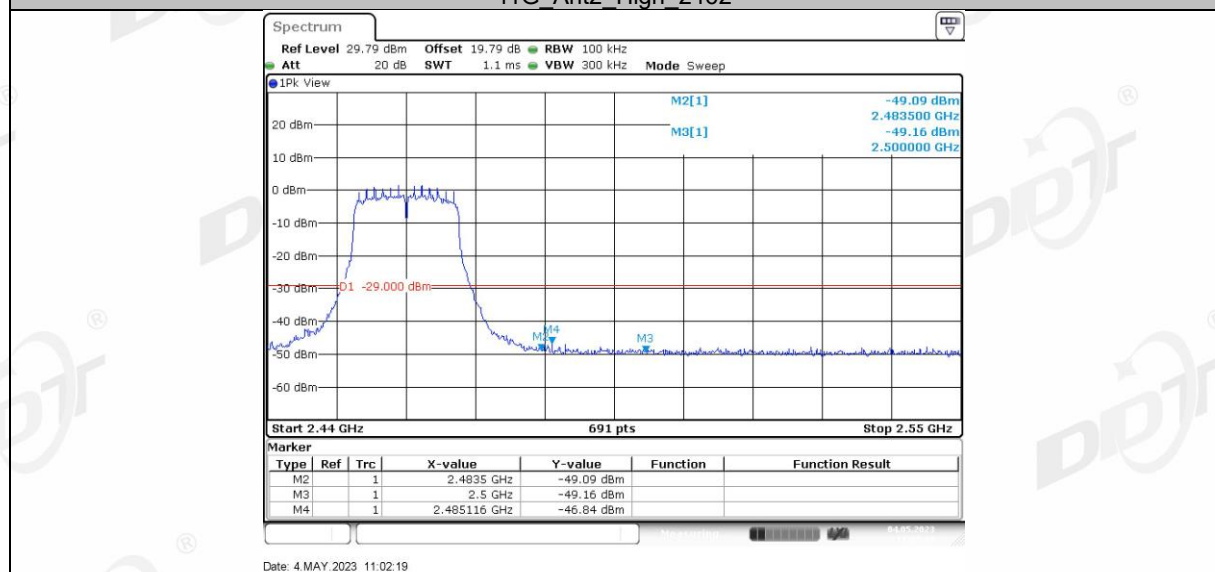

11N20MIMO Ant1 Low 2412