






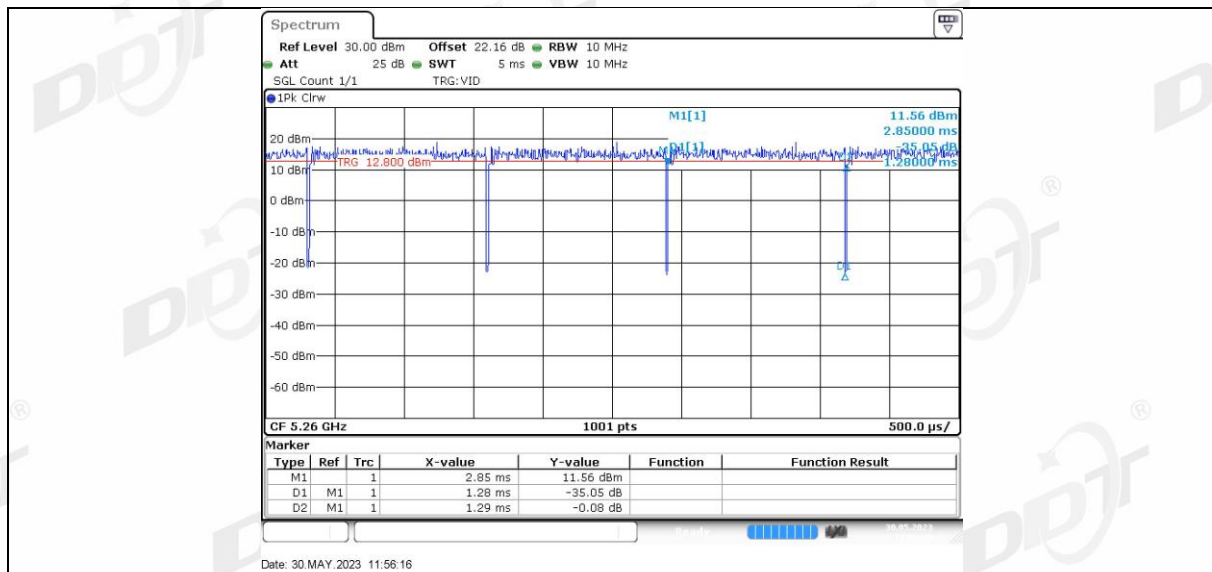


11AC20MIMO Ant1_5280

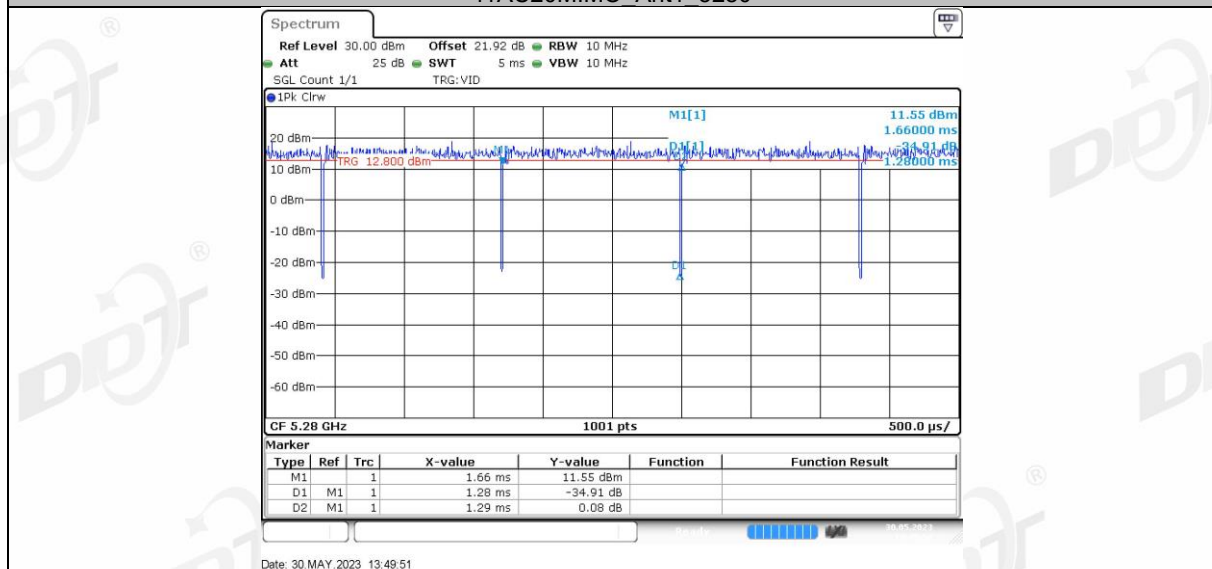


11AC20MIMO Ant2_5280

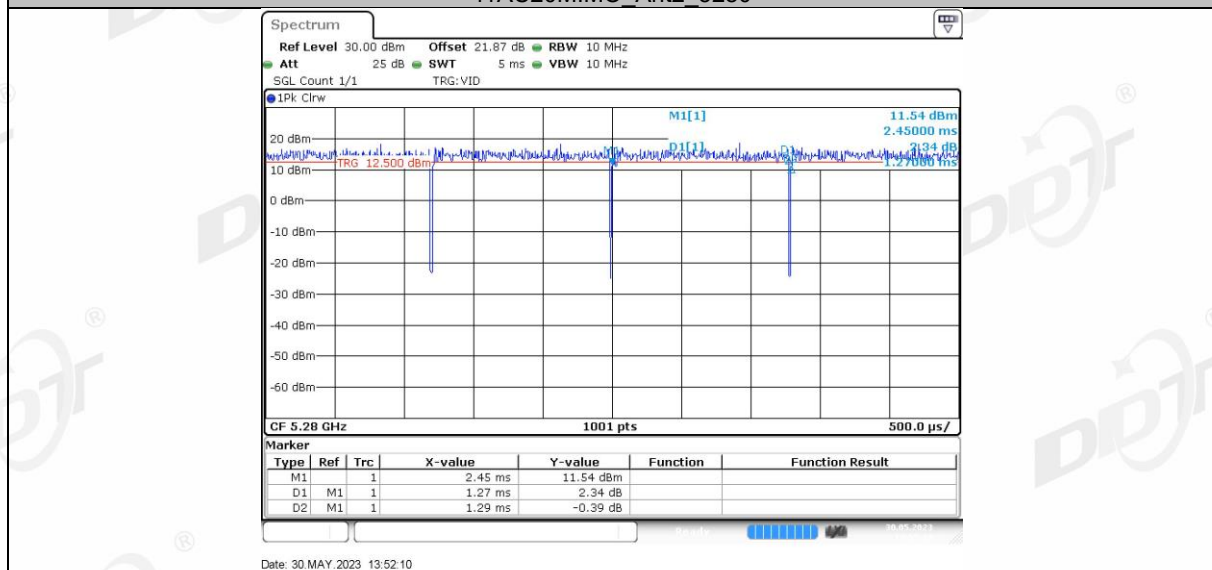


11AC20MIMO Ant1_5320

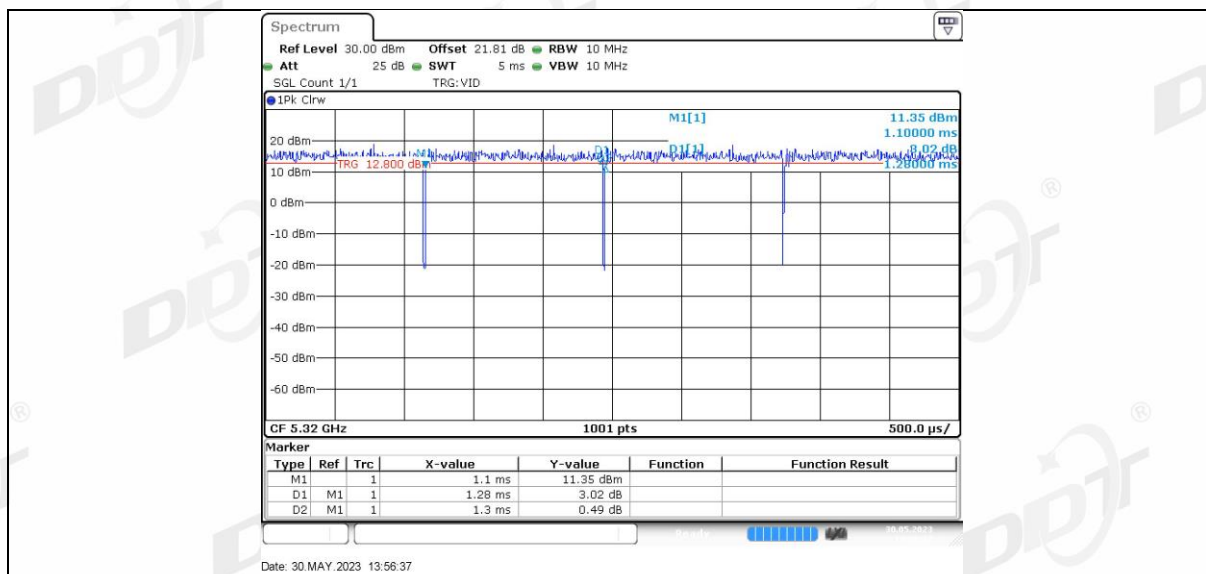

11AC20MIMO_Ant2_5320

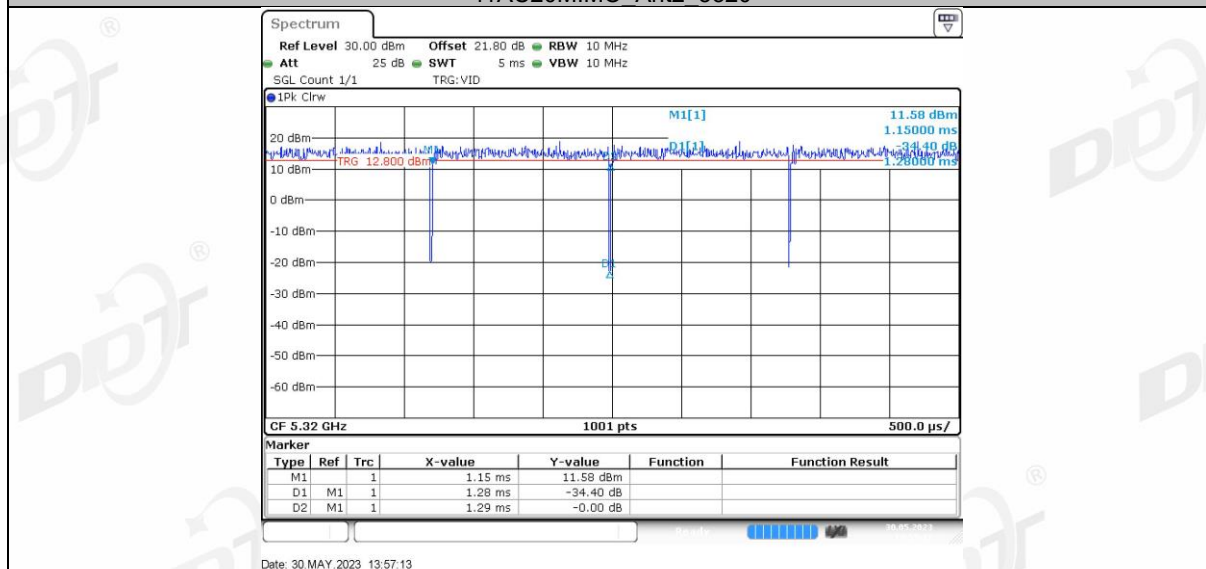

11AC20MIMO_Ant1_5500

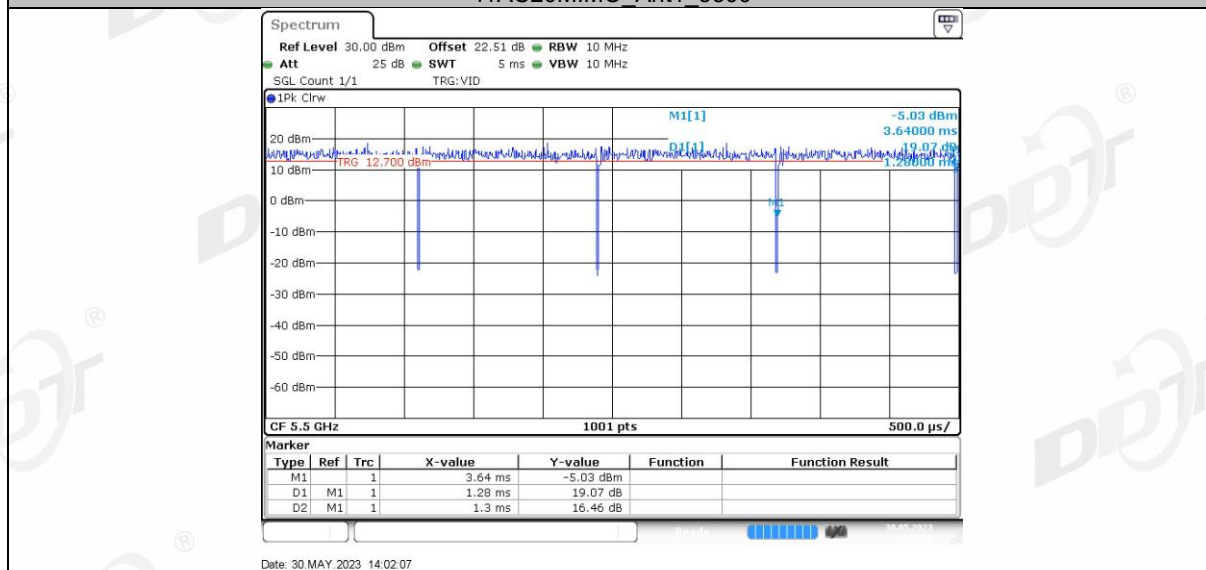


11AC20MIMO_Ant2_5500











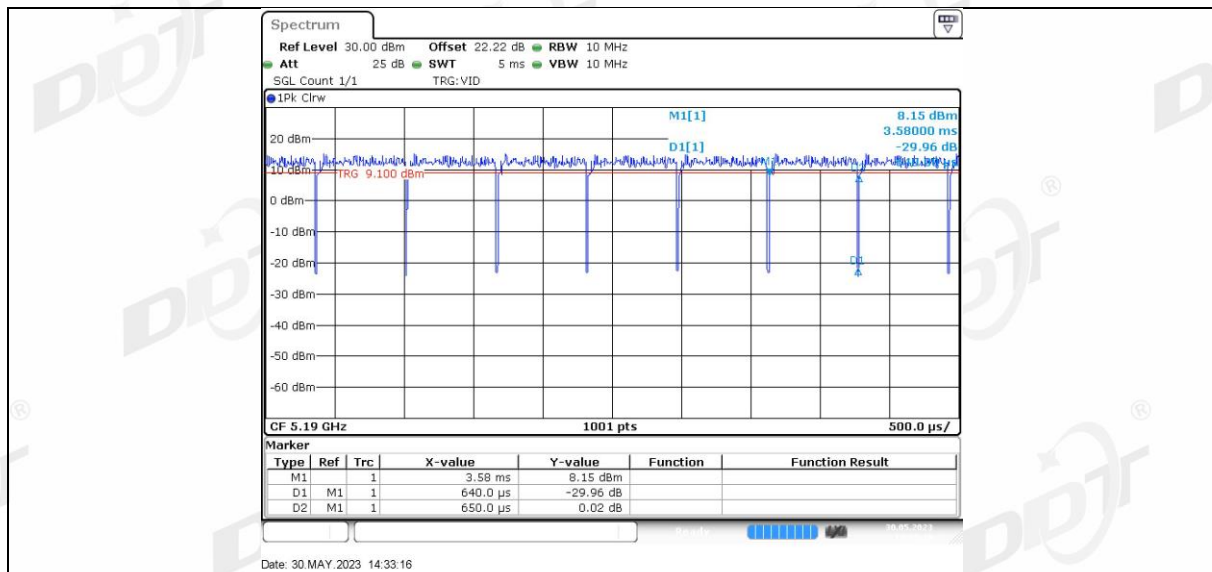


11AC40MIMO Ant1_5230

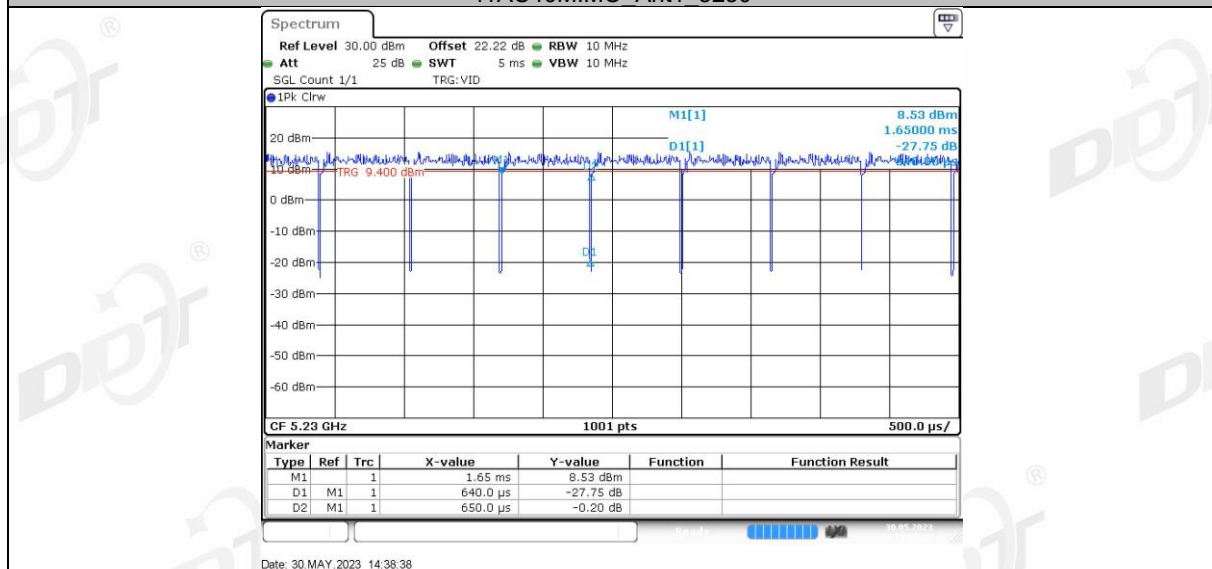


11AC40MIMO Ant2_5230

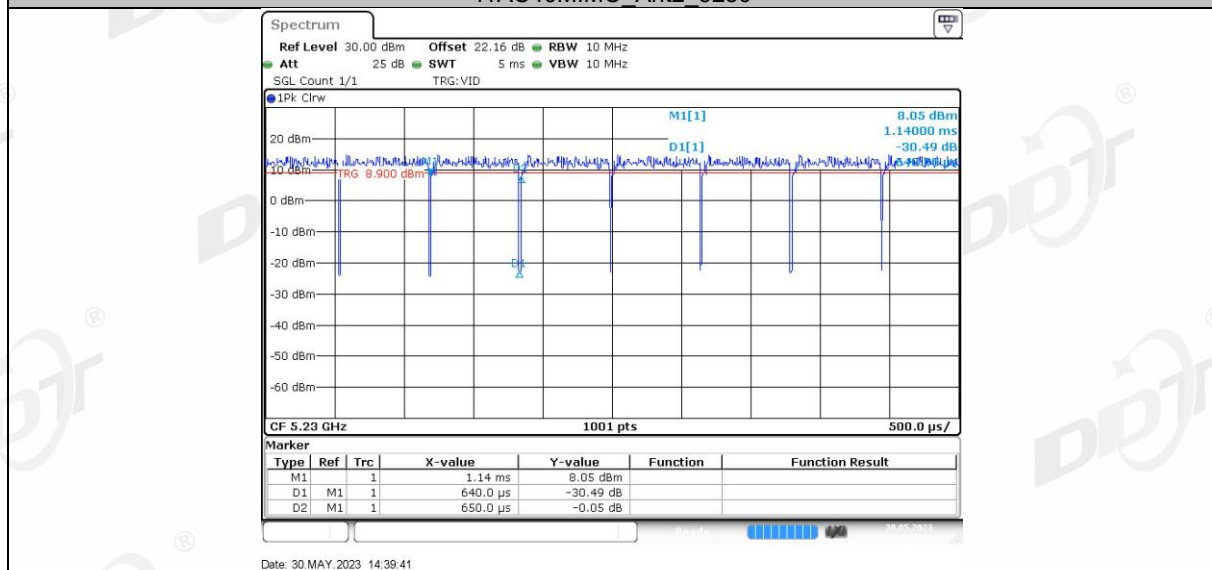


11AC40MIMO Ant1_5270

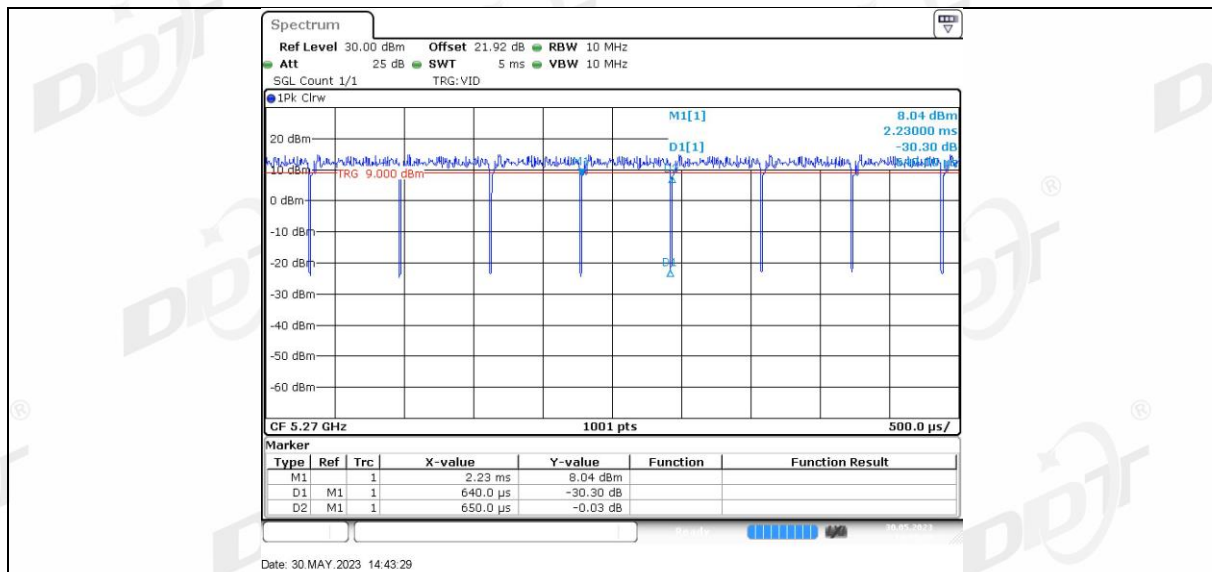


11AC40MIMO_Ant2_5270

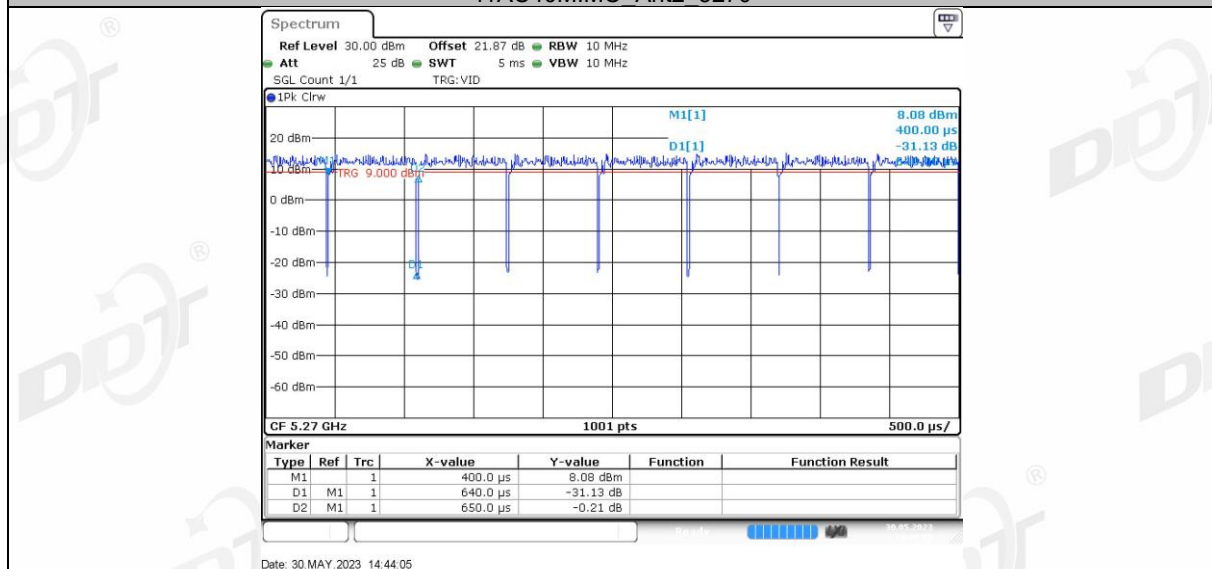


11AC40MIMO_Ant1_5310

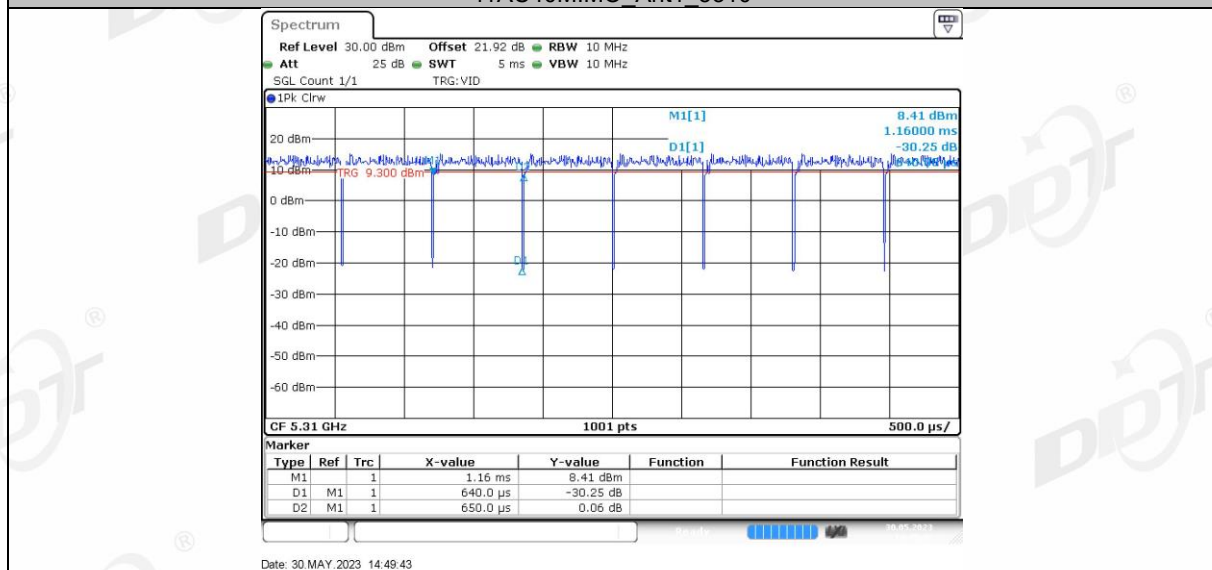


11AC40MIMO_Ant2_5310

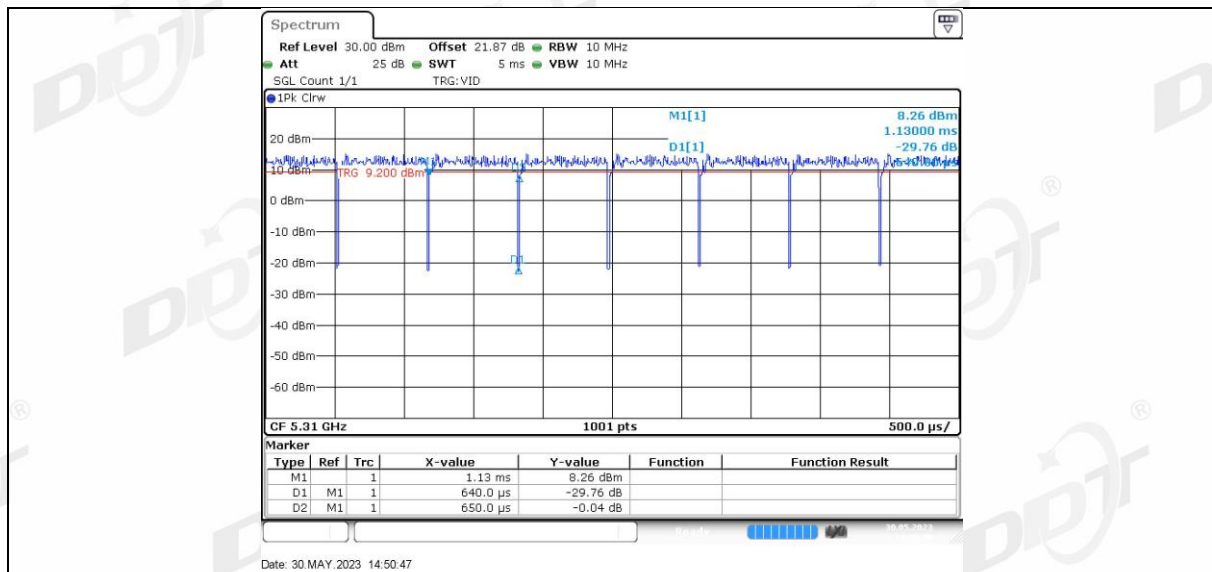

11AC40MIMO_Ant1_5510

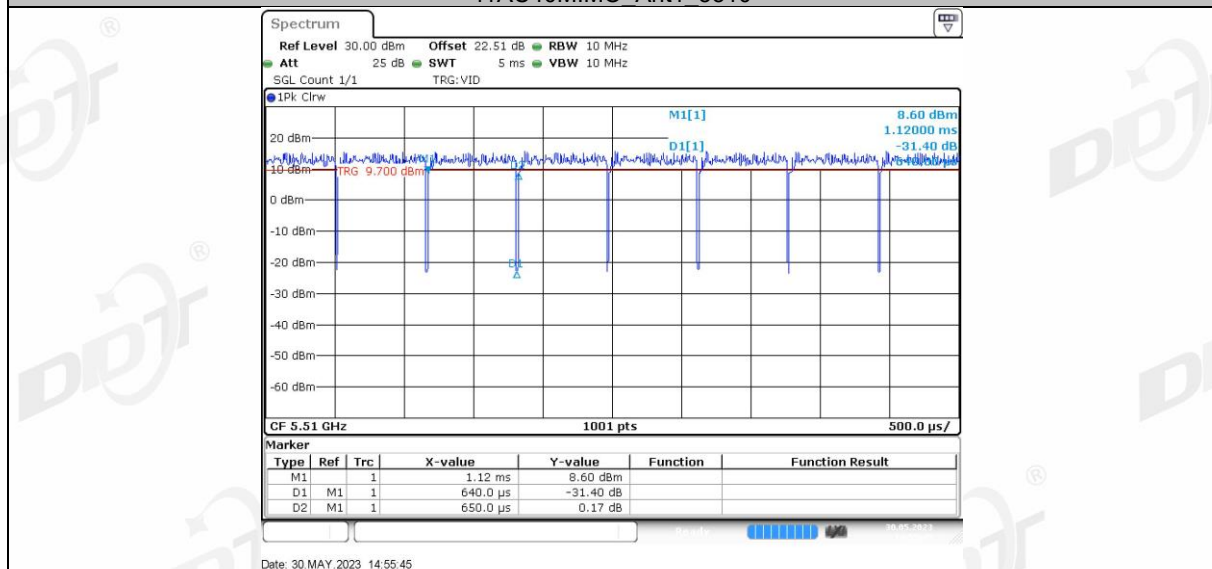

11AC40MIMO_Ant2_5510

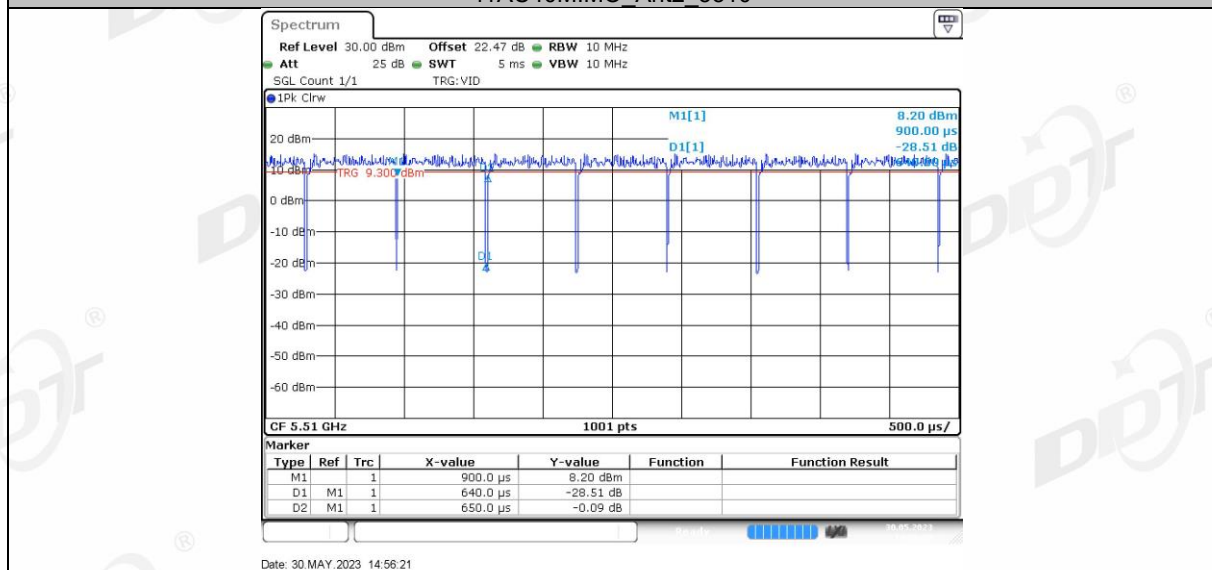

11AC40MIMO_Ant1_5550

















10. Emissions in Restricted Frequency Bands

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

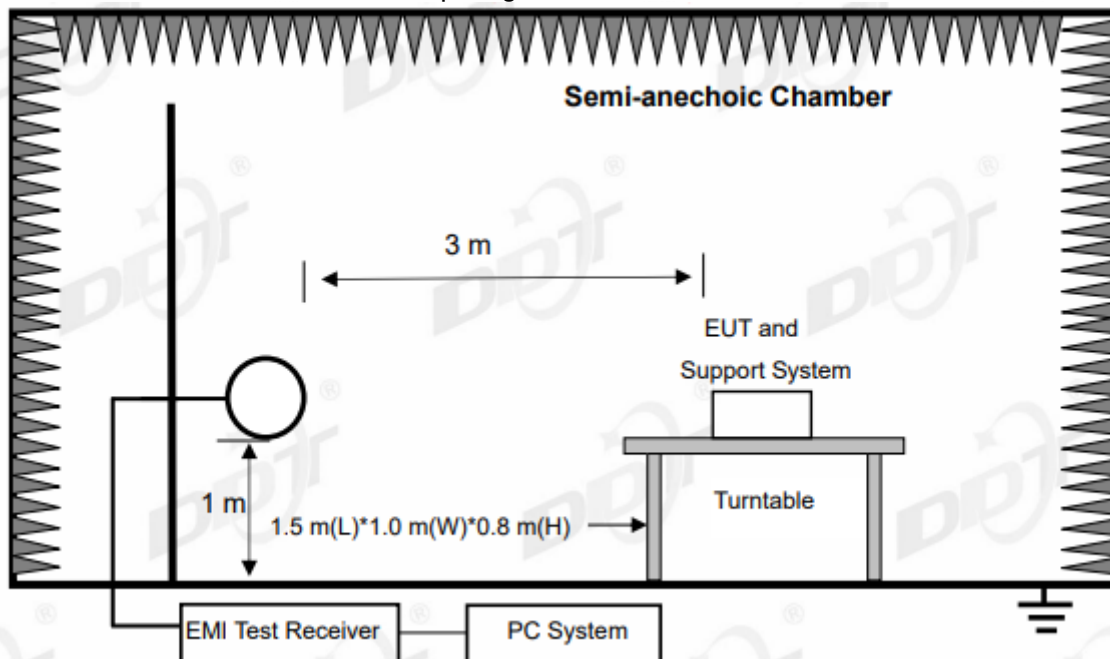

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

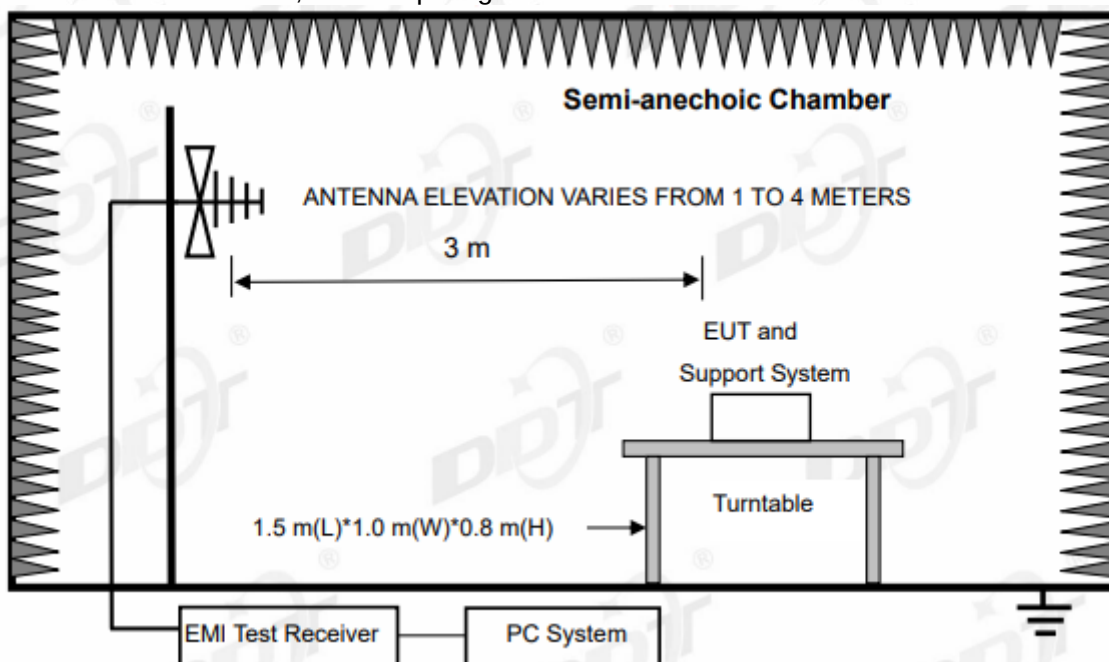

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

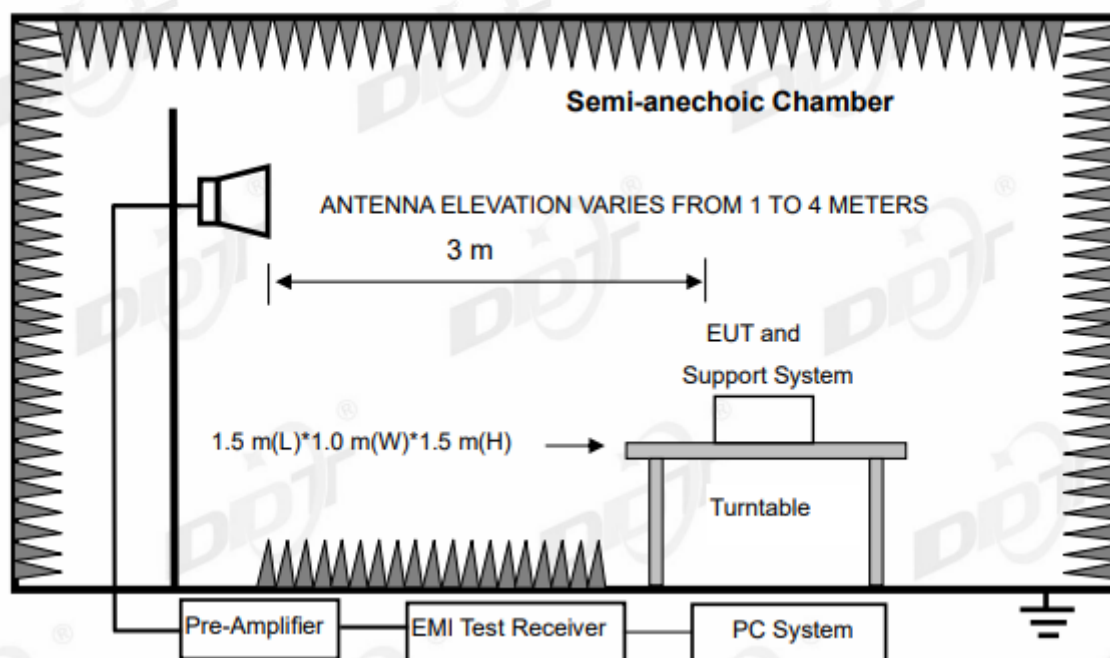

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F)$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F)$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

10.3. Test Procedure

(1) EUT height should be 0 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 0 m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers

(2) Setup EUT and assistant system according clause 2.3 and 8.2

(3) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the

loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 40 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 40 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(5) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(6) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90kHz,110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(7) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(8) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum

Analyzer, and the RBW is set at 1 MHz, VBW is set at 3MHz for Peak measure, the RBW is set at 1 MHz, VBW is set at 10 Hz for AV value.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11a mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-24

Tested By: Junchang Du

EUT: Portable Stream Media Player

Model Number: D4-H2

Test Mode: TX Mode


Power Supply: DC 5V

Condition: Temp:23.4°C;Humi:50.5%

Test Site: DDT 3# Chamber

File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC BELOW 1G\20230424-101715_H

Memo: 5G WiFi

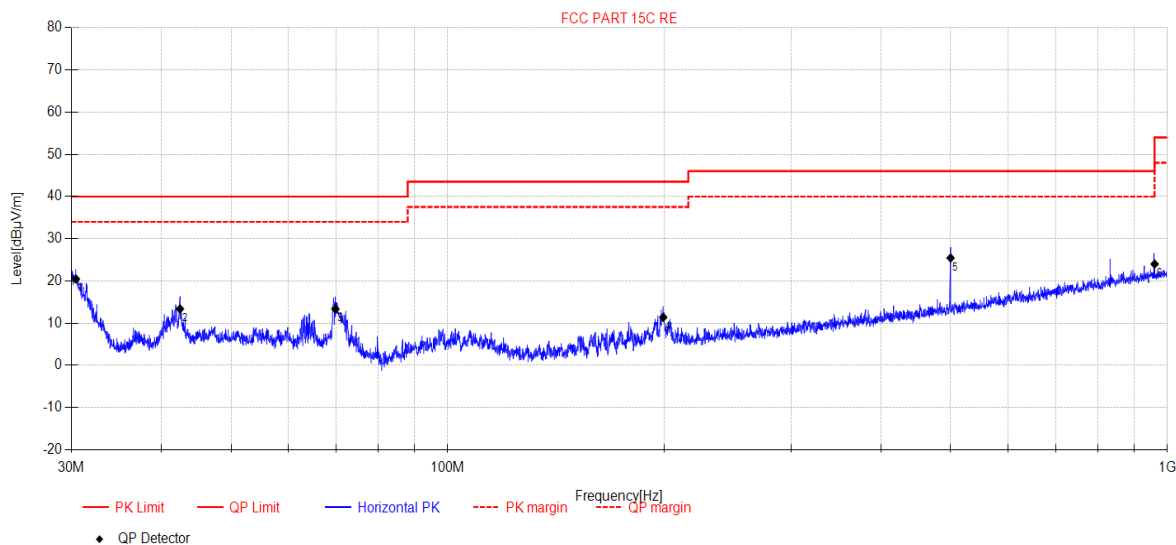


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.45	41.81	10.24	0.72	-32.29	20.48	40.00	19.52	QP	Horizontal
2	42.48	32.19	12.60	0.87	-32.28	13.38	40.00	26.62	QP	Horizontal
3	69.83	35.83	8.57	1.23	-32.27	13.36	40.00	26.64	QP	Horizontal
4	199.35	30.62	10.70	2.35	-32.28	11.39	43.50	32.11	QP	Horizontal
5	499.84	37.29	17.00	3.68	-32.53	25.44	46.00	20.56	QP	Horizontal
6	960.15	27.44	22.70	5.38	-31.53	23.99	54.00	30.01	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

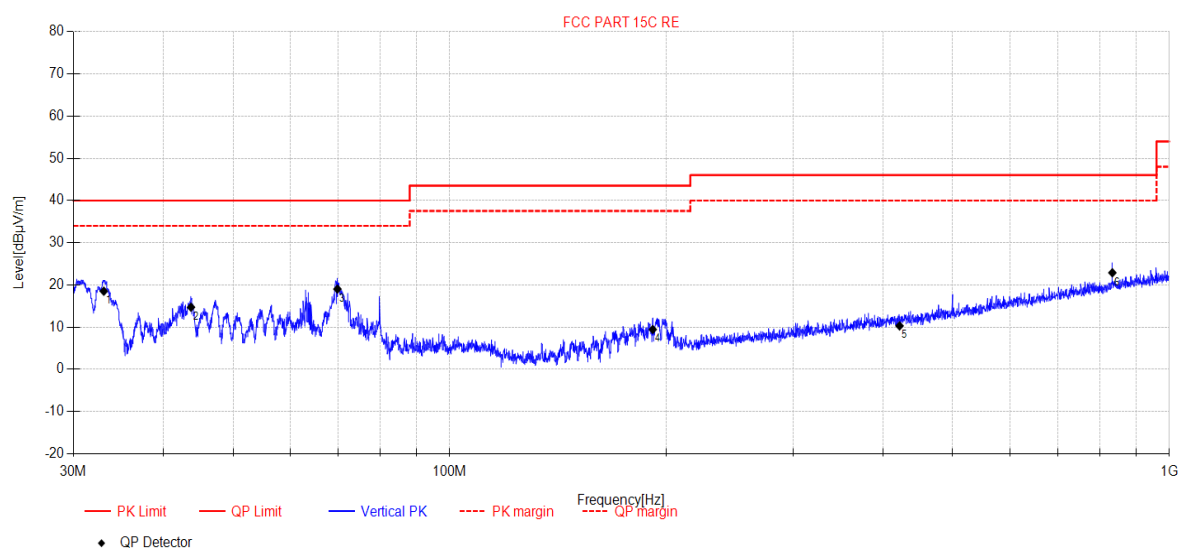Test Date: 2023-04-24**Tested By:** Junchang Du**EUT:** Portable Stream Media Player**Model Number:** D4-H2**Test Mode:** TX Mode**Power Supply:** DC 5V**Condition:** Temp:23.4°C;Humi:50.5%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2023 report data\Q23011110-2E D4-H2\FCC BELOW 1G\20230424-101800_V**Memo:** 5G WiFi

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.07	39.65	10.41	0.75	-32.29	18.52	40.00	21.48	QP	Vertical
2	43.72	33.28	12.84	0.88	-32.28	14.72	40.00	25.28	QP	Vertical
3	69.83	41.49	8.57	1.23	-32.27	19.02	40.00	20.98	QP	Vertical
4	191.54	29.06	10.35	2.29	-32.26	9.44	43.50	34.06	QP	Vertical
5	421.83	23.51	15.74	3.45	-32.40	10.30	46.00	35.70	QP	Vertical
6	833.35	28.83	21.67	4.99	-32.60	22.89	46.00	23.11	QP	Vertical

Note:


- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\89
Memo: 11A ANT:1 5180

Test Graph

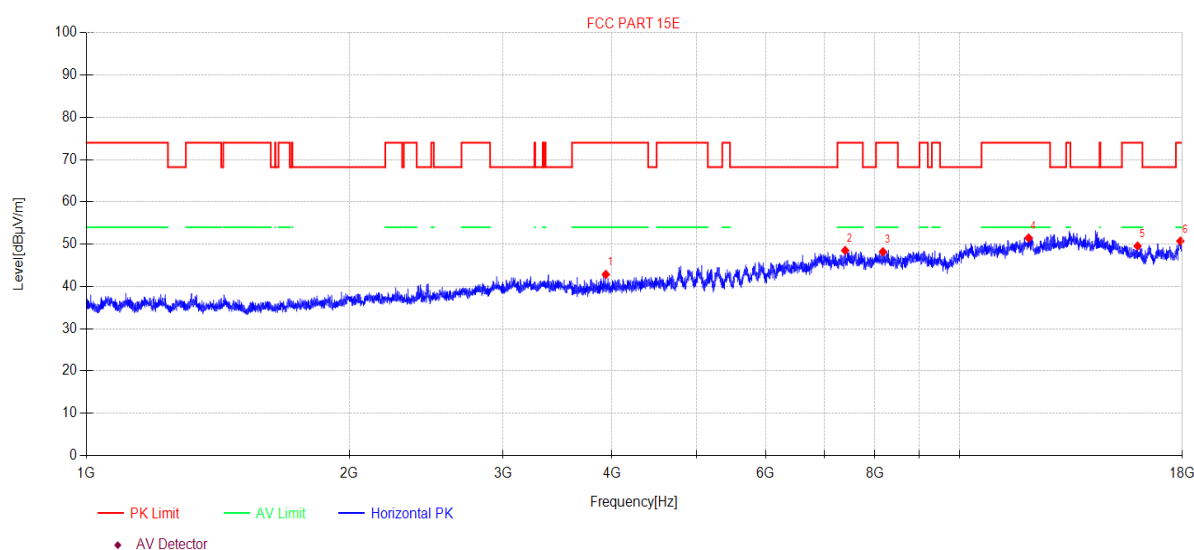

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3934.95	47.89	5.75	30.57	-41.36	42.85	74.00	31.15	PK	Horizontal
2	7397.14	45.14	7.87	36.50	-41.00	48.51	74.00	25.49	PK	Horizontal
3	8172.71	44.12	7.75	37.05	-40.72	48.20	74.00	25.80	PK	Horizontal
4	11999.84	43.20	8.27	38.90	-38.90	51.47	74.00	22.53	PK	Horizontal
5	15997.88	41.68	10.37	37.90	-40.40	49.55	74.00	24.45	PK	Horizontal
6	17906.60	38.85	11.29	41.24	-40.66	50.72	74.00	23.28	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\90
Memo: 11A ANT:1 5180

Test Graph

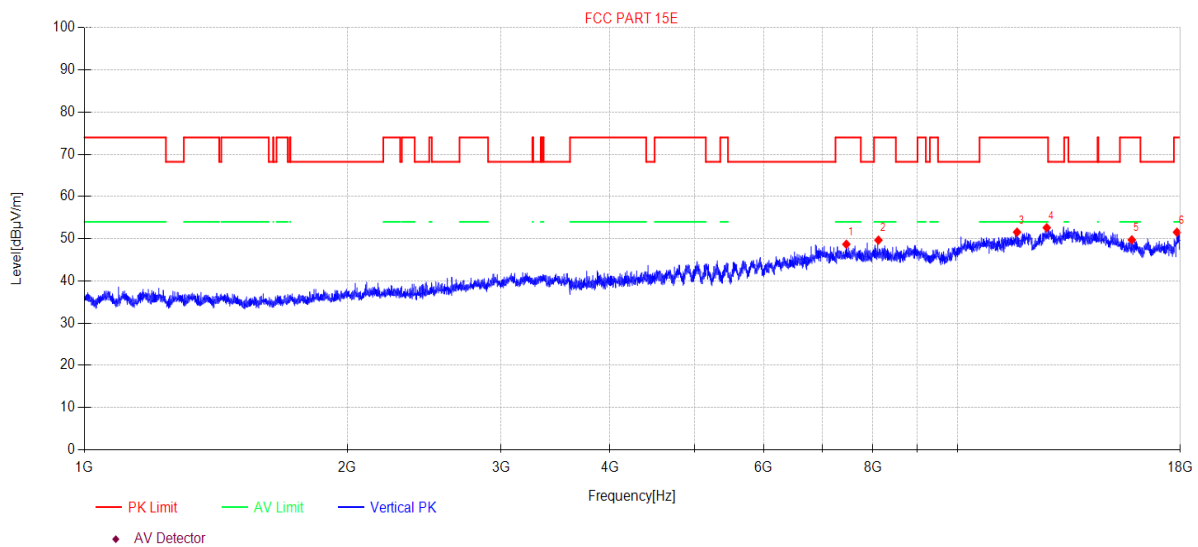

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7459.40	45.35	7.86	36.48	-41.00	48.69	74.00	25.31	PK	Vertical
2	8118.57	45.72	7.76	37.00	-40.81	49.67	74.00	24.33	PK	Vertical
3	11701.88	43.89	8.25	38.80	-39.38	51.56	74.00	22.44	PK	Vertical
4	12655.23	43.75	9.11	39.31	-39.56	52.61	74.00	21.39	PK	Vertical
5	15836.88	41.58	10.28	38.16	-40.29	49.73	74.00	24.27	PK	Vertical
6	17839.45	40.16	11.24	40.78	-40.64	51.54	74.00	22.46	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\91
Memo: 11A ANT:1 5200

Test Graph

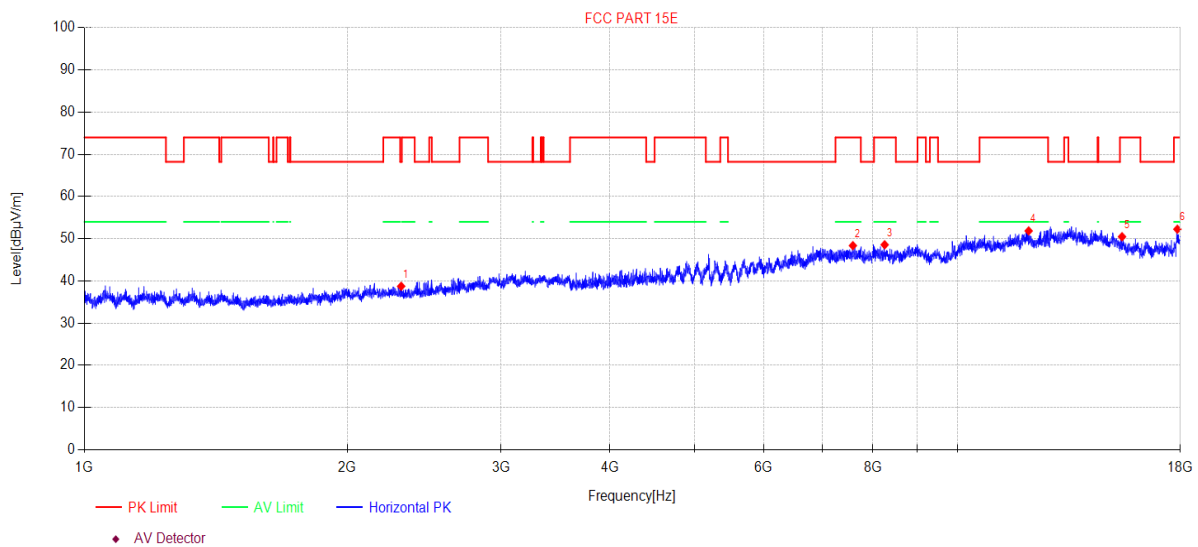

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2306.02	47.31	4.16	27.31	-40.04	38.74	68.20	29.46	PK	Horizontal
2	7589.87	45.13	7.84	36.40	-41.00	48.37	74.00	25.63	PK	Horizontal
3	8253.42	44.32	7.73	37.11	-40.59	48.57	74.00	25.43	PK	Horizontal
4	12065.91	43.45	8.35	39.03	-38.97	51.86	74.00	22.14	PK	Horizontal
5	15434.72	41.75	10.06	38.67	-40.00	50.48	74.00	23.52	PK	Horizontal
6	17860.09	40.73	11.25	40.92	-40.64	52.26	74.00	21.74	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\92
Memo: 11A ANT:1 5200

Test Graph

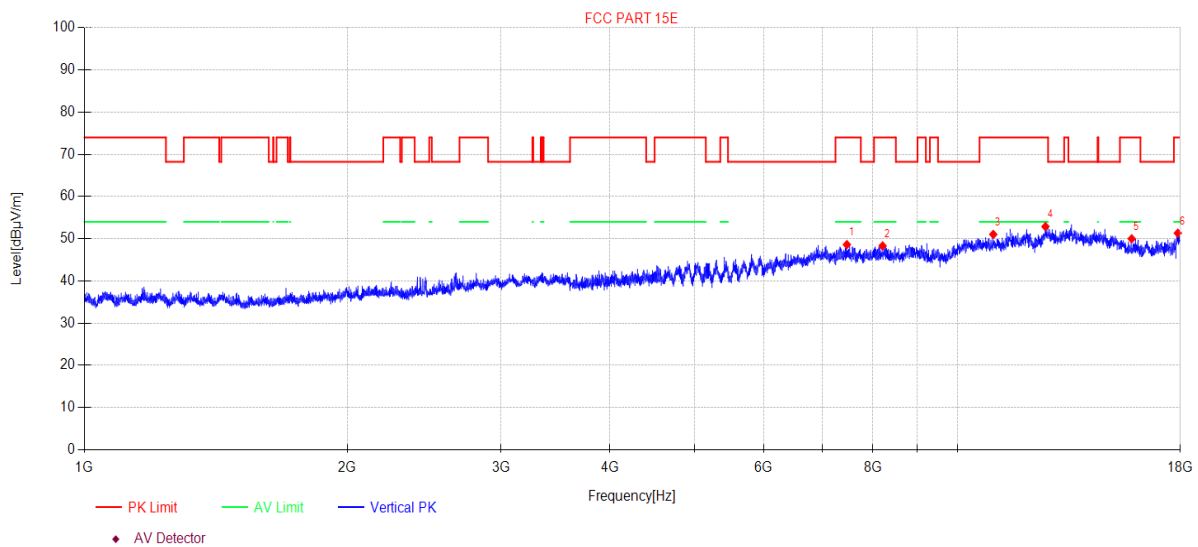

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7470.18	45.28	7.86	36.46	-41.00	48.60	74.00	25.40	PK	Vertical
2	8208.22	44.14	7.74	37.10	-40.67	48.31	74.00	25.69	PK	Vertical
3	10990.54	44.22	8.21	39.10	-40.50	51.03	74.00	22.97	PK	Vertical
4	12611.42	44.13	9.05	39.22	-39.51	52.89	74.00	21.11	PK	Vertical
5	15832.30	41.82	10.28	38.17	-40.28	49.99	74.00	24.01	PK	Vertical
6	17880.75	39.64	11.27	41.07	-40.65	51.33	74.00	22.67	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\93
Memo: 11A ANT:1 5240

Test Graph

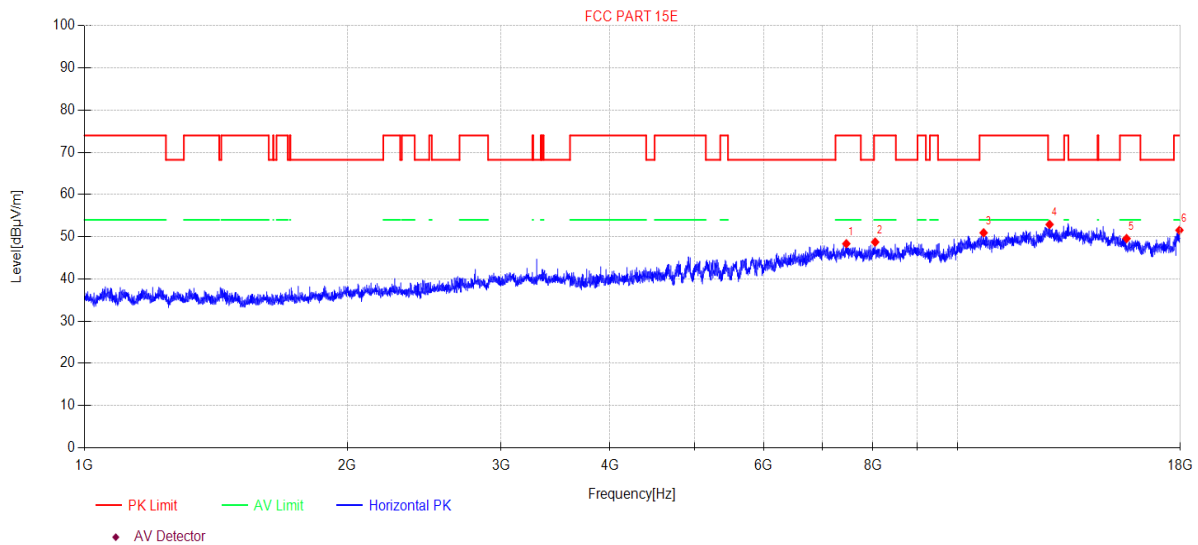

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7459.40	45.01	7.86	36.48	-41.00	48.35	74.00	25.65	PK	Horizontal
2	8048.48	44.87	7.78	37.00	-40.92	48.73	74.00	25.27	PK	Horizontal
3	10714.54	44.19	8.17	39.10	-40.53	50.93	74.00	23.07	PK	Horizontal
4	12750.68	43.87	9.23	39.45	-39.65	52.90	68.20	15.30	PK	Horizontal
5	15618.70	41.16	10.16	38.38	-40.13	49.57	74.00	24.43	PK	Horizontal
6	17958.43	39.35	11.32	41.55	-40.68	51.54	74.00	22.46	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\94
Memo: 11A ANT:1 5240

Test Graph

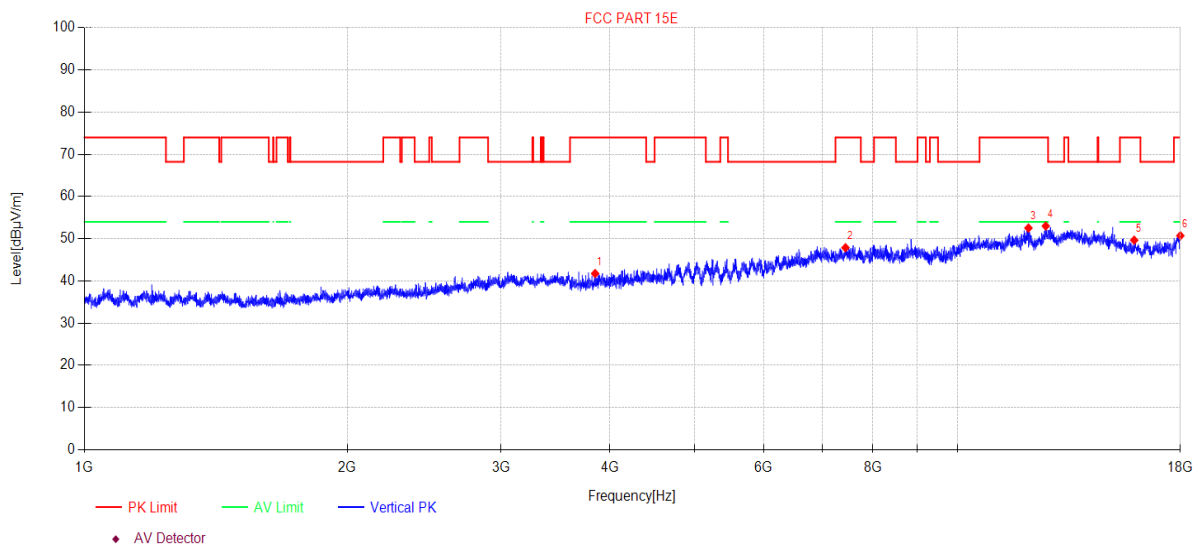

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3846.13	46.99	5.68	30.39	-41.31	41.75	74.00	32.25	PK	Vertical
2	7442.17	44.52	7.86	36.50	-41.00	47.88	74.00	26.12	PK	Vertical
3	12058.94	44.12	8.35	39.02	-38.96	52.53	74.00	21.47	PK	Vertical
4	12622.36	44.21	9.07	39.24	-39.52	53.00	74.00	21.00	PK	Vertical
5	15937.89	41.66	10.34	38.02	-40.36	49.66	74.00	24.34	PK	Vertical
6	18000.00	38.27	11.35	41.80	-40.70	50.72	74.00	23.28	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\95
Memo: 11A ANT:1 5260

Test Graph

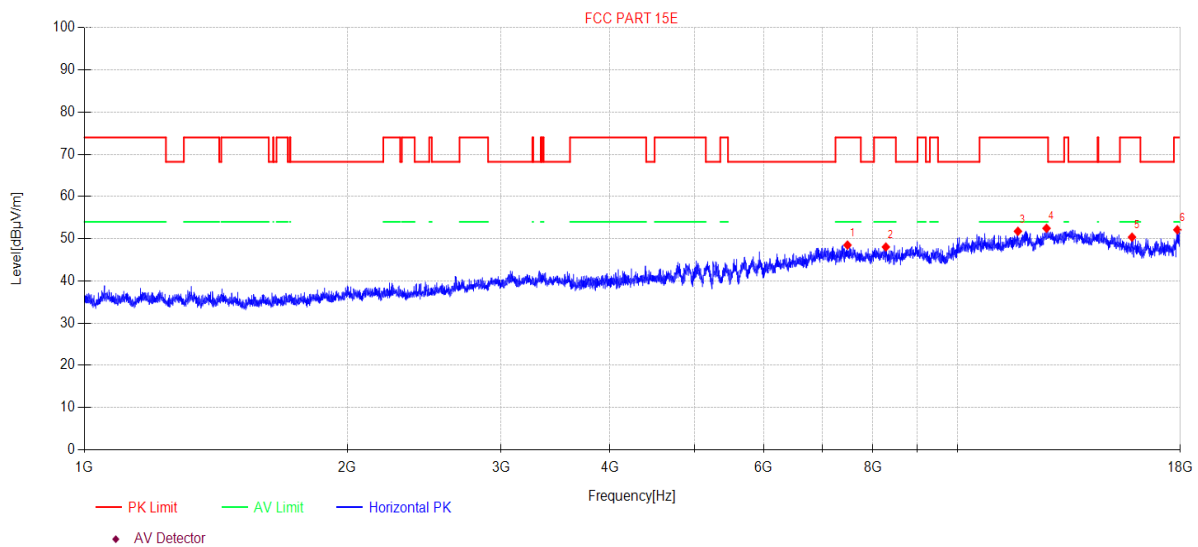

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7483.15	45.21	7.86	36.43	-41.00	48.50	74.00	25.50	PK	Horizontal
2	8279.70	43.71	7.73	37.16	-40.55	48.05	74.00	25.95	PK	Horizontal
3	11728.97	44.04	8.25	38.80	-39.33	51.76	74.00	22.24	PK	Horizontal
4	12647.92	43.62	9.10	39.30	-39.55	52.47	74.00	21.53	PK	Horizontal
5	15846.03	42.22	10.29	38.15	-40.29	50.37	74.00	23.63	PK	Horizontal
6	17860.09	40.58	11.25	40.92	-40.64	52.11	74.00	21.89	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\96
Memo: 11A ANT:1 5260

Test Graph

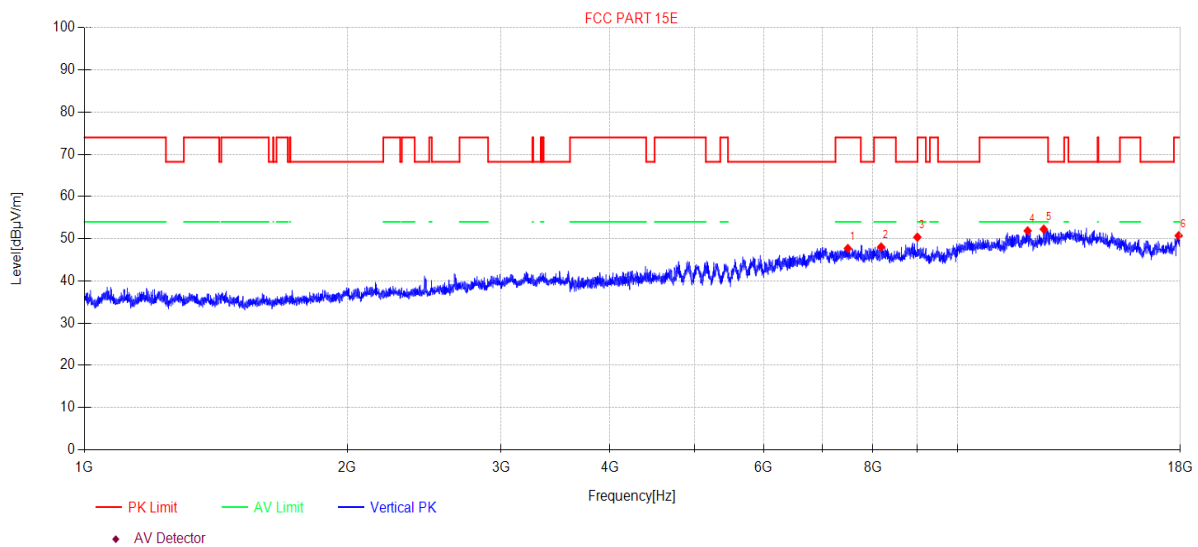

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7489.64	44.42	7.86	36.42	-41.00	47.70	74.00	26.30	PK	Vertical
2	8177.44	43.96	7.75	37.05	-40.72	48.04	74.00	25.96	PK	Vertical
3	8995.75	44.02	7.56	38.20	-39.41	50.37	68.20	17.83	PK	Vertical
4	12034.57	43.52	8.31	38.97	-38.93	51.87	74.00	22.13	PK	Vertical
5	12556.86	43.58	8.98	39.16	-39.46	52.26	74.00	21.74	PK	Vertical
6	17922.14	38.75	11.30	41.33	-40.67	50.71	74.00	23.29	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\97
Memo: 11A ANT:1 5280

Test Graph

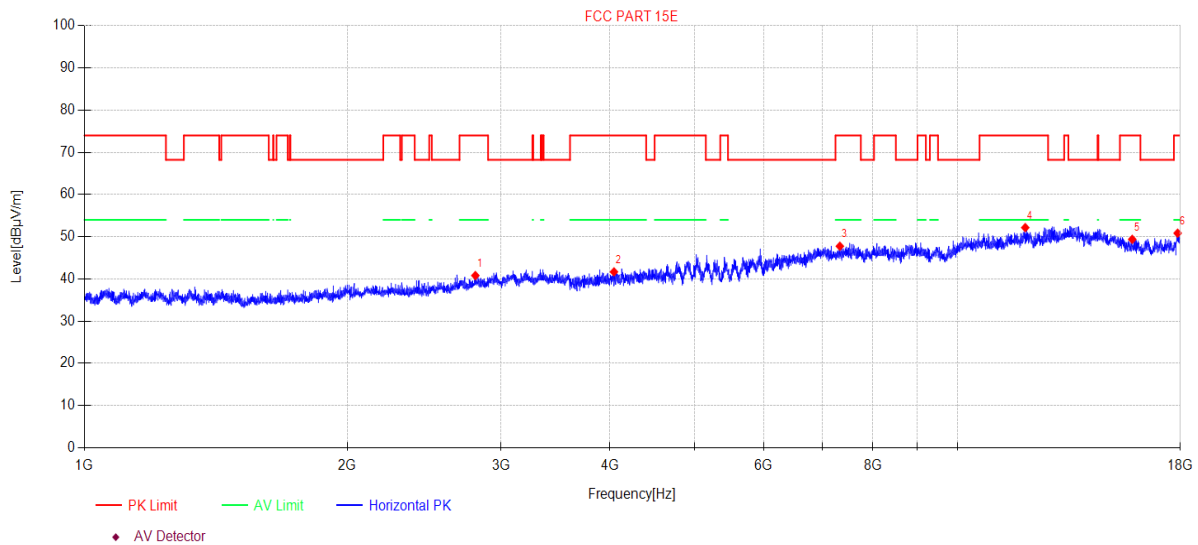

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2804.38	48.10	4.76	28.52	-40.58	40.80	74.00	33.20	PK	Horizontal
2	4042.15	46.47	5.82	30.78	-41.39	41.68	74.00	32.32	PK	Horizontal
3	7333.28	44.37	7.88	36.50	-41.00	47.75	74.00	26.25	PK	Horizontal
4	11958.29	44.00	8.27	38.86	-38.97	52.16	74.00	21.84	PK	Horizontal
5	15855.19	41.25	10.29	38.14	-40.30	49.38	74.00	24.62	PK	Horizontal
6	17870.42	39.24	11.26	40.99	-40.65	50.84	74.00	23.16	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\98
Memo: 11A ANT:1 5280

Test Graph

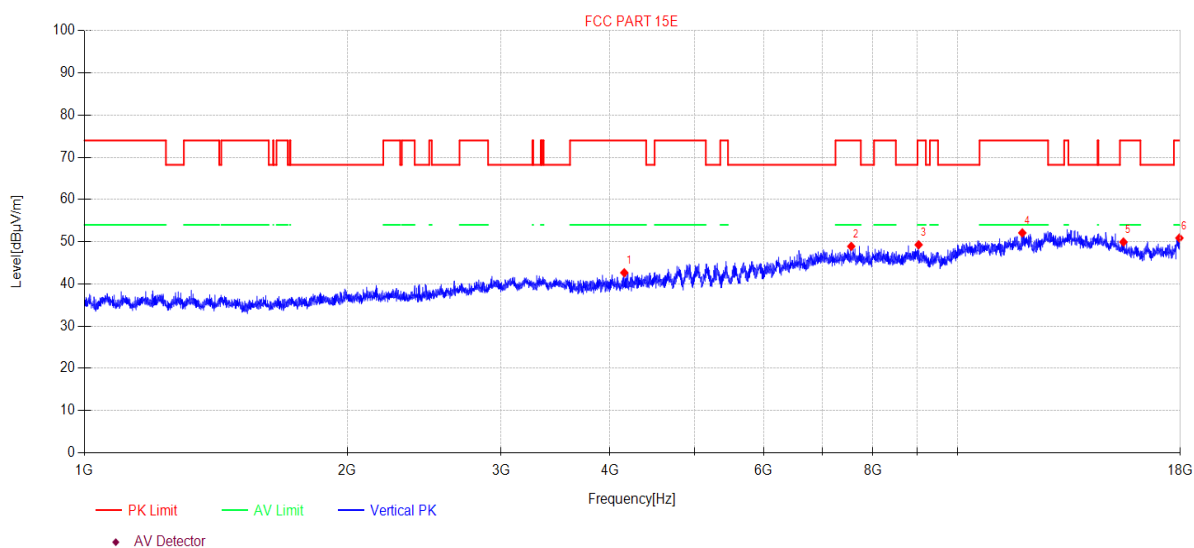

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4153.47	47.12	5.87	31.01	-41.35	42.65	74.00	31.35	PK	Vertical
2	7557.04	45.65	7.85	36.40	-41.00	48.90	74.00	25.10	PK	Vertical
3	9027.00	42.93	7.57	38.20	-39.43	49.27	74.00	24.73	PK	Vertical
4	11865.34	44.16	8.26	38.80	-39.12	52.10	74.00	21.90	PK	Vertical
5	15492.82	41.26	10.10	38.61	-40.04	49.93	74.00	24.07	PK	Vertical
6	17958.43	38.69	11.32	41.55	-40.68	50.88	74.00	23.12	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\99
Memo: 11A ANT:1 5320

Test Graph

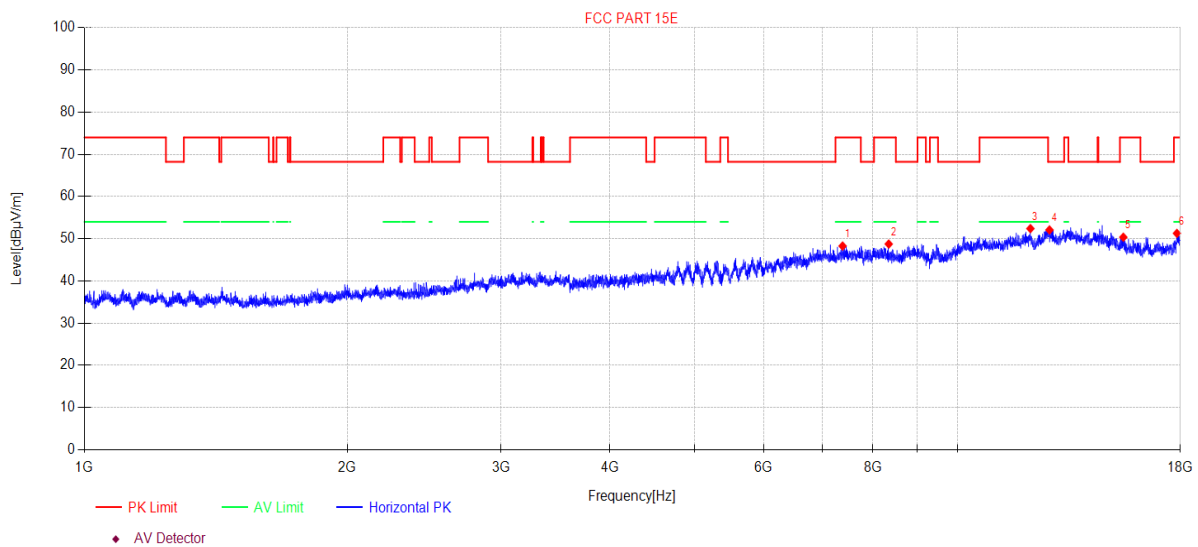

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7386.46	44.90	7.87	36.50	-41.00	48.27	74.00	25.73	PK	Horizontal
2	8342.15	44.29	7.71	37.20	-40.45	48.75	74.00	25.25	PK	Horizontal
3	12121.84	43.89	8.43	39.10	-39.02	52.40	74.00	21.60	PK	Horizontal
4	12747.00	43.06	9.23	39.45	-39.65	52.09	68.20	16.11	PK	Horizontal
5	15488.34	41.70	10.09	38.61	-40.04	50.36	74.00	23.64	PK	Horizontal
6	17839.45	39.89	11.24	40.78	-40.64	51.27	74.00	22.73	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\100
Memo: 11A ANT:1 5320

Test Graph

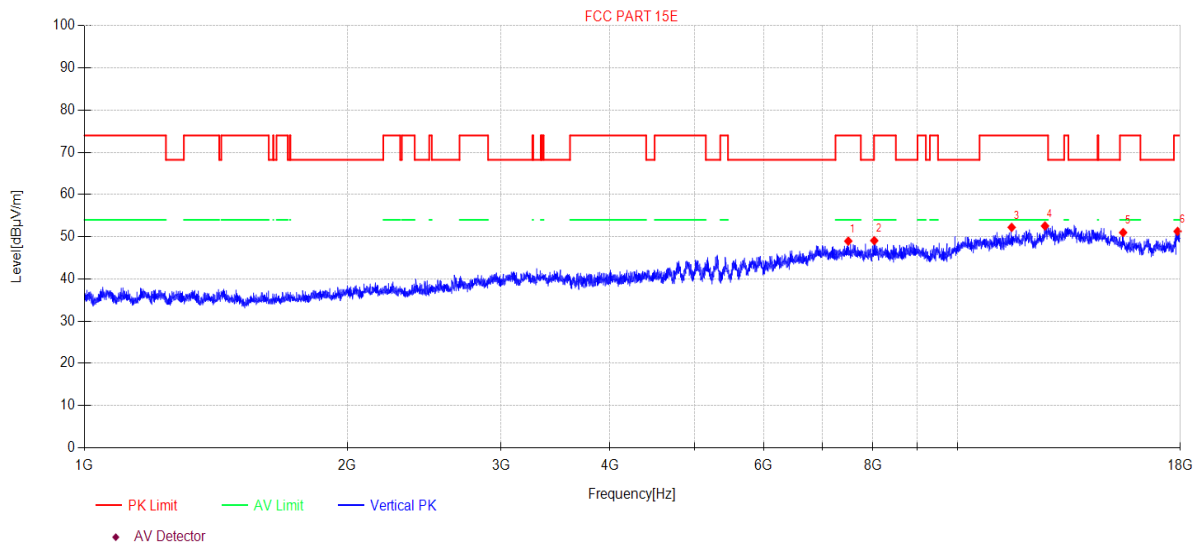

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7498.30	45.70	7.86	36.40	-41.00	48.96	74.00	25.04	PK	Vertical
2	8029.90	45.25	7.78	37.00	-40.95	49.08	74.00	24.92	PK	Vertical
3	11537.33	44.66	8.24	38.96	-39.64	52.22	74.00	21.78	PK	Vertical
4	12596.85	43.82	9.03	39.20	-39.50	52.55	74.00	21.45	PK	Vertical
5	15479.39	42.32	10.09	38.62	-40.04	50.99	74.00	23.01	PK	Vertical
6	17870.42	39.67	11.26	40.99	-40.65	51.27	74.00	22.73	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-04-26 **Tested By:** Bairong
EUT: Portable Stream Media Player **Model Number:** D4-H2
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:50.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23011110-2E D4-H2\FCC ABOVE 1G 5GWIFI\101
Memo: 11A ANT:1 5500

Test Graph

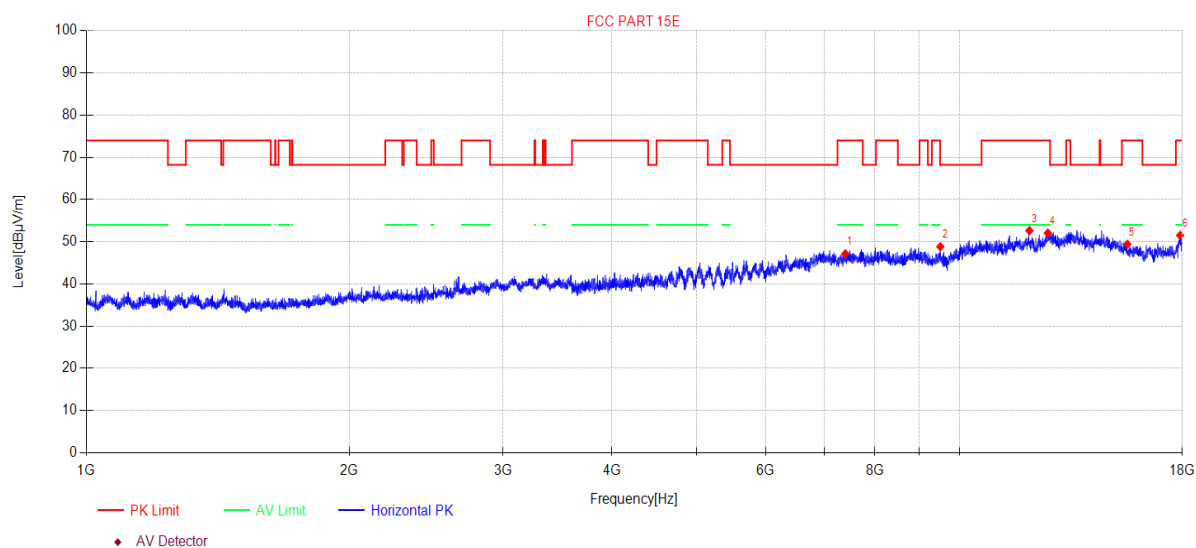

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7401.42	43.77	7.87	36.50	-41.00	47.14	74.00	26.86	PK	Horizontal
2	9509.03	42.62	7.82	38.40	-40.01	48.83	68.20	19.37	PK	Horizontal
3	12027.61	44.30	8.31	38.96	-38.93	52.64	74.00	21.36	PK	Horizontal
4	12626.01	43.27	9.07	39.25	-39.53	52.06	74.00	21.94	PK	Horizontal
5	15569.12	40.90	10.14	38.46	-40.10	49.40	74.00	24.60	PK	Horizontal
6	17896.26	39.71	11.28	41.17	-40.66	51.50	74.00	22.50	PK	Horizontal

Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.