



FCC PART 15.231 TEST REPORT

On Behalf of

Huizhou Kunli Electronic Co Ltd

Xin wu zai villagers group Dongsheng Village Chenjiang Street HUIZHOU Guangdong
516229, China

FCC ID: 2ATNI-KLJSQ4001

Model: KLJSQ-4001

July 1, 2024

This Report Concerns:

☒ Original Report

Equipment Type:

Control

Test Engineer: LBi Li /

Report Number: QCT24ER-1609E-01

Test Date: May 16, 2024 ~ June 30, 2024

Reviewed By: Gordon Tan/ *Gordon Tan*

Approved By: Kendy Wang / *Kendy Wang*

Prepared By: Shenzhen QC Testing Laboratory Co., Ltd.
East of 1/F., Building E, Xinghong Science Park, No.111,
Shuiku Road, Fenghuanggang, Xixiang Street, Bao'an
District, Shenzhen, Guangdong, China
Tel: 0755-23008269
Fax: 0755-23726780





Table of Contents

1. GENERAL INFORMATION.....	4
1.1 Product Description for Equipment under Test (EUT)	4
1.2 System Test Configuration.....	4
1.3 Test Facility.....	5
1.4 Measurement Uncertainty.....	5
2. SUMMARY OF TEST RESULTS	6
3. LIST OF TEST AND MEASUREMENT INSTRUMENTS	7
3.1 Radiated Emission Test	7
3.2 RF Conducted test.....	7
4. ANTENNA REQUIREMENT.....	8
5. RADIATED EMISSION METHOD.....	9
5.1 Applicable Standard.....	9
5.2 Limit.....	9
5.3 Receiver setup.....	10
5.4 Test setup.....	10
5.5 Test Procedure.....	11
5.6 Test Data.....	11
6. 20DB OCCUPY BANDWIDTH.....	15
6.1 Applicable Standard.....	15
6.2 Limit.....	15
6.3 Test setup.....	15
6.4 Test Data.....	15
7. DWELL TIME.....	17
7.1 Applicable Standard.....	17
7.2 Limit.....	17
7.3 Test setup.....	17
7.4 Test Data.....	17
8. CALCULATION OF AVERAGE FACTOR.....	18
8.1 Applicable Standard.....	18
8.2 Limit.....	18
8.3 Test setup.....	18
8.4 Test Procedure.....	18
8.5 Test Results.....	18



Revision History of This Test Report

[illegible]



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Description	Control
Model No.	KLJSQ-4001
Tested Model	KLJSQ-4001
Sample(s) Status	Engineer sample
Operation Frequency:	315 MHz
Channel numbers:	1
Modulation type:	ASK
Antenna Type:	PCB Antenna
Antenna gain* ¹ :	0dBi
power Index:	default
Power supply:	DC 12V
Trade Mark:	N/A
Applicant	Huizhou Kunli Electronic Co Ltd
Address	Xin wu zai villagers group Dongsheng Village Chenjiang Street HUIZHOU Guangdong 516229, China
Manufacturer	Huizhou Kunli Electronic Co Ltd
Address	Xin wu zai villagers group Dongsheng Village Chenjiang Street HUIZHOU Guangdong 516229, China
Sample No.	Y24E1609E01WC

Note: *¹This information provided by Manufacturer, SZ QC Lab is not responsible for the accuracy of this information.

1.2 System Test Configuration

1.2.1 Support Equipment

N/A

1.2.2 Test mode and voltage

Transmitting mode: Keep the EUT in continuously transmitting.

Test voltage: DC 12V



1.3 Test Facility

Test Firm: Shenzhen QC Testing Laboratory Co., Ltd.

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS – Registration No.: L8464

The EMC Laboratory has been accredited by CNAS, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

A2LA Certificate Number: 6759.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 561109

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 29628

CAB identifier: CN0141

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.4 Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
AC Power Line Conducted Emission	$\pm 1.80\text{dB}$
Radiated Spurious Emission test (9kHz-30MHz)	$\pm 2.66\text{dB}$
Radiated Spurious Emission test (30MHz-1000MHz)	$\pm 4.04\text{dB}$
Radiated Spurious Emission test (1000MHz-18000MHz)	$\pm 4.70\text{ dB}$
Radiated Spurious Emission test (18GHz-40GHz)	$\pm 4.80\text{dB}$
Temperature	$\pm 0.8^{\circ}\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



2. Summary of Test Results

Test Item	Section	Result
Antenna Requirement	15.203	Pass
Conduction Emission	15.207	N/A
Field strength of the Fundamental Signal	15.231 (b)	Pass
Spurious Emissions	15.231 (b)/15.209	Pass
20dB Bandwidth	15.231 (c)	Pass
Dwell Time	15.231 (a)(1)	Pass

Note:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013
- 3.. All indications of Pass/Fail in this report are opinions expressed by Shenzhen QC Testing Laboratory Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



3. List of Test and Measurement Instruments

3.1 Radiated Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Spectrum Analyzer	ROHDE&SCHWARZ	FSV 40	101458	2024.03.14	2025.03.13
2.	Loop Antenna	EMCO	6502	2133	2022.07.23	2024.07.22
3.	Logarithmic compound broadband Antenna	SCKWARZBECK	VULB9168	VULB9168-1-588	2023.04.01	2025.03.31
4.	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	2277573376	2024.03.14	2025.03.13
5.	EMI Test Receiver	R&S	ESPI	101131	2024.03.14	2025.03.13
6.	Horn Antenna	SCHWARZBECK	BBHA9120D	02069	2023.04.01	2025.03.31
7.	Horn Antenna	COM-MW	ZLB7-18-40 G -950	12221225	2023.01.12	2025.01.09
8.	Amplifier	R&S	BBV9721	9721-031	2024.03.14	2025.03.13
9.	Amplifier	MITEQ	TTA1800-30-H G	2063644	2024.03.30	2025.03.29
10.	Pre-amplifier	COM-MW	DLAN-18000 -40000-02	10229104	2024.03.14	2025.03.13
11.	966 Chamber	ZhongYu Electron	9*6*6	/	2022.07.25	2025.07.24
Radiated Emission Measurement Software: EZ EMC						

3.2 RF Conducted test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Wideband Radio Communication Tester	Rohde & Schwarz	CW500	151583	2024.03.14	2025.03.13
2.	Spectrum Analyzer	ROHDE&SCHWARZ	FSV 40	101458	2024.03.14	2025.03.13
3.	Signal Generator	Agilent	N5182A	MY50141563	2024.03.14	2025.03.13
4.	RF Automatic Test System	MW	MW100-RFC/ MW100-PSB	MW2007004	2024.03.14	2025.03.13
RF Conducted Measurement Software: MTS 8310						



4. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna: The antenna is PCB Antenna, reference to the Internal Photos for details.

5. Radiated Emission Method

5.1 Applicable Standard

FCC Part15 C Section 15.231 (b)& Section 15.209

5.2 Limit

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolt/meter) at 3m	Field Strength of Spurious Emissions (microvolt/meter) at 3m
40.66~40.70	2250	225
70~130	1250	125
130~174	1250 to 3750(**)	125 to 375(**)
174~260	3750	375
260~470	3750 to 12500(**)	375 to 1250(**)
Above 470	12500	1250

** Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- (1) for the band 130~174 MHz, $\mu\text{V/m}$ at 3 meters= $56.81818(F)-6136.3636$;
- (2) for the band 260~470 MHz, $\mu\text{V/m}$ at 3 meter= $41.6667(F)-7083.3333$.
- (3) The maximum permitted unwanted emissions level is 20 dB below the maximum permitted fundamental level. In addition field strength of any emissions which appear inside of the restriction band shall not exceed the general radiated emissions limits in FCC Part15.209.

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	$2400/F(\text{KHz})$	300
0.490~1.705	$24000/F(\text{KHz})$	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) For above 30MHz:
Emission Level(dBuV/m)=20log Emission Level($\mu\text{V/m}$)
For 0.009~0.490MHz:

Emission Level(dBuV/m)=20log Emission Level(uV/m) +40log(300/3)

For 0.049~30MHz:

Emission Level(dBuV/m)=20log Emission Level(uV/m) +40log(30/3)

So the field strength of emission limits have been calculated in below table.


Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolt/meter) at 3m
315 MHz	75.62 (Average)
315 MHz	95.62 (Peak)

5.3 Receiver setup


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

5.4 Test setup


For radiated emissions from 9kHz to 30MHz

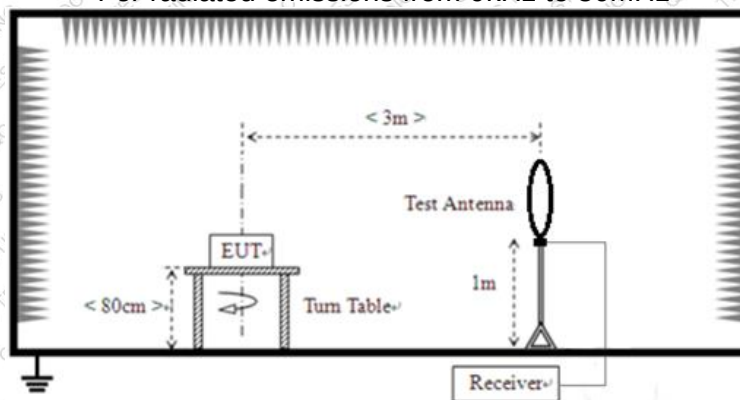

For radiated emissions from 30MHz to 1GHz

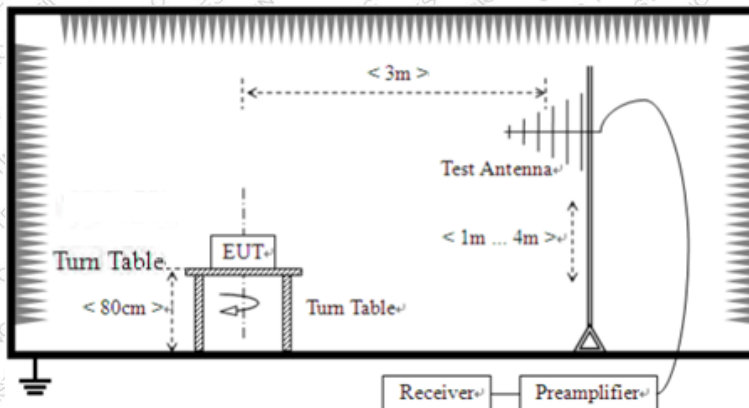

For radiated emissions above 1GHz

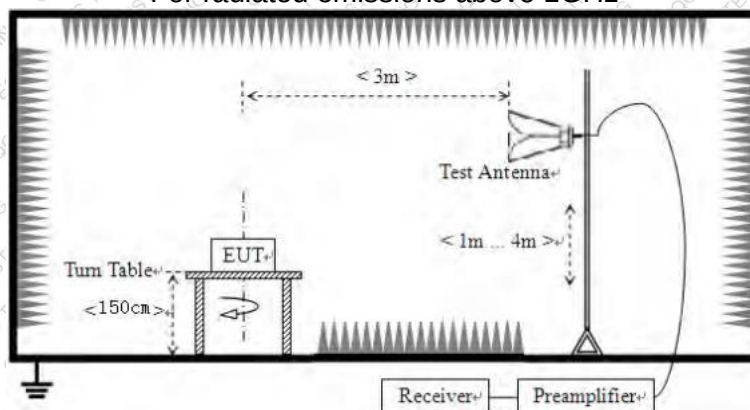

5.5 Test Procedure

1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

5.6 Test Data

Temperature	25 °C	Humidity	49%
ATM Pressure	101.1kPa	Antenna Gain	0dBi
Test by	LBi Li	Test result	PASS

Measurement data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.




Below 1GHz:

Horizontal

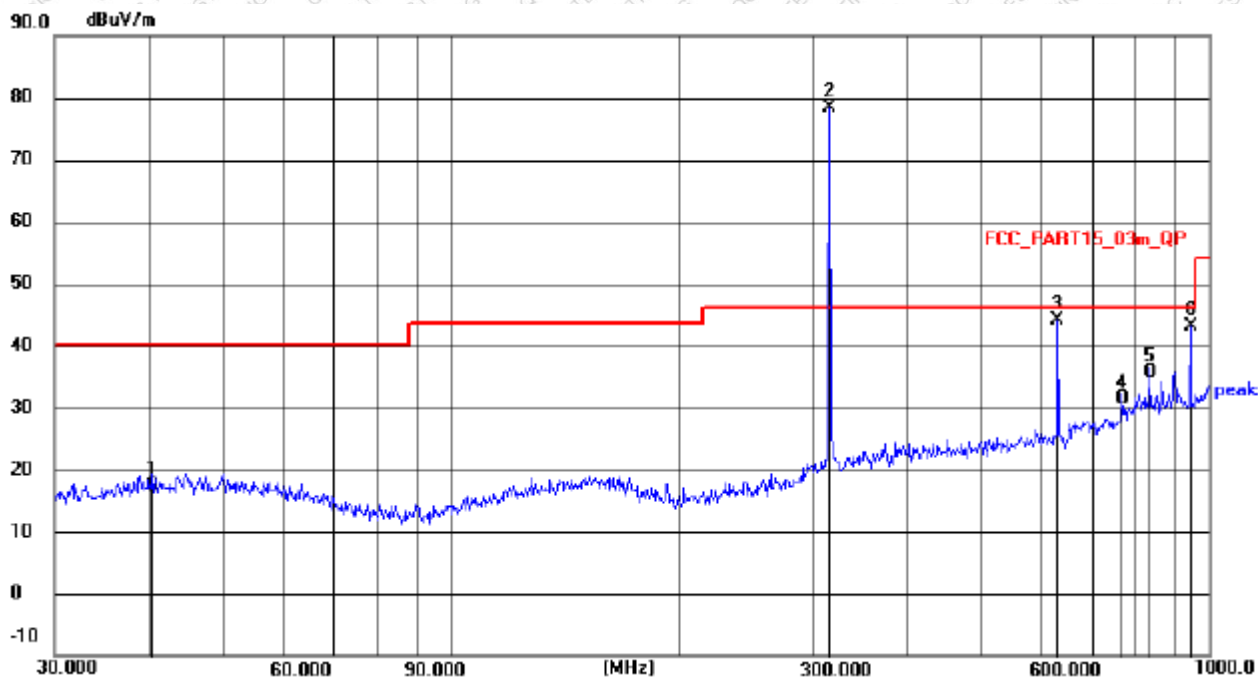

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.4170	2.58	14.79	17.37	40.00	22.63	QP
2 *	315.0000	63.21	15.07	78.28	95.62	17.34	peak
3	630.0000	22.28	21.75	44.03	75.62	31.59	peak
4	768.7481	7.40	24.00	31.40	46.00	14.60	QP
5	833.3170	10.44	25.15	35.59	46.00	10.41	QP
6	945.0000	16.29	26.75	43.04	75.62	32.58	peak

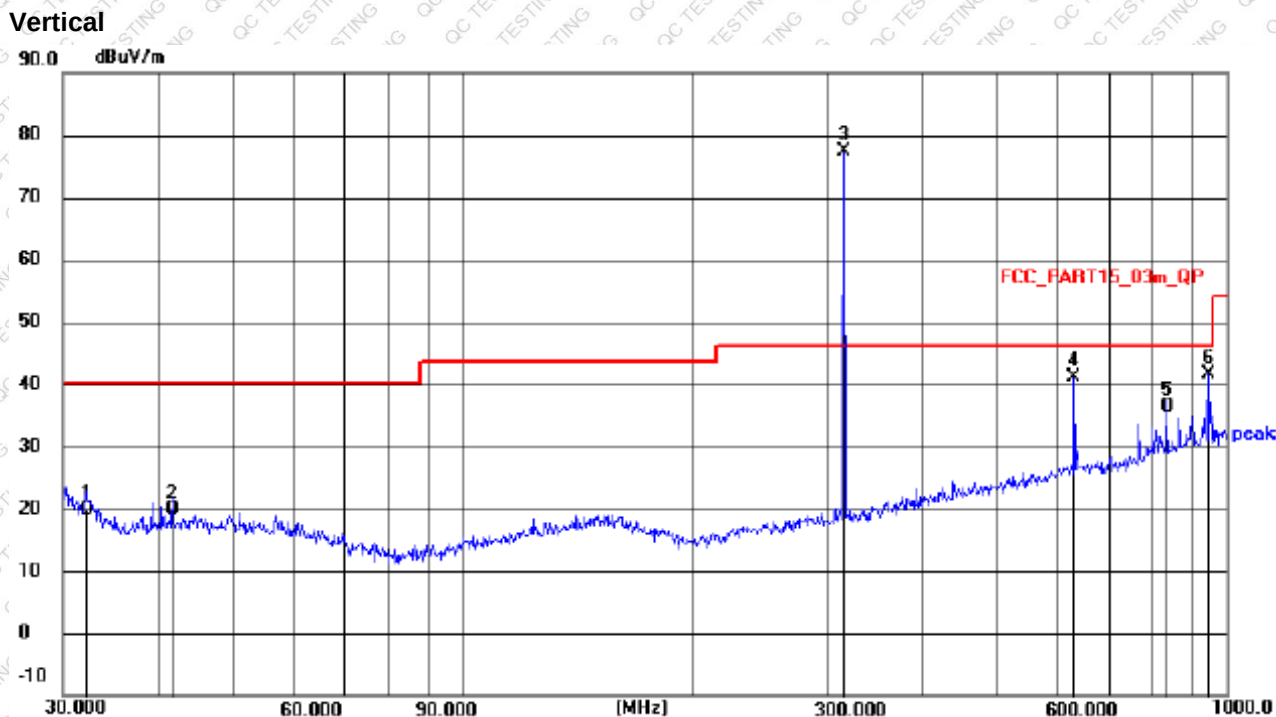

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.1794	6.98	12.86	19.84	40.00	20.16	QP
2	41.7129	5.35	14.57	19.92	40.00	20.08	QP
3 *	315.0000	62.52	14.78	77.30	95.62	18.32	peak
4	630.0000	19.46	21.76	41.22	75.62	34.40	peak
5	833.3170	11.19	25.22	36.41	46.00	9.59	QP
6	945.0000	15.01	26.53	41.54	75.62	34.08	peak

Frequency (MHz)	Reading (dBmV/m)	Factor Corr. (dB/m)	Average Factor (dB)	Result (dBmV/m)		Limit (dBmV/m)		Margin (dB)		Polarization
				AV	PEAK	AV	PEAK	AV	PEAK	
630	22.28	21.75	-4.683	39.35	44.03	55.62	75.62	16.27	31.59	Horizontal
945	16.29	26.75	-4.683	38.36	43.04	55.62	75.62	17.26	32.58	Horizontal
630	19.46	21.76	-4.683	36.54	41.22	55.62	75.62	19.08	34.40	Vertical
945	15.01	26.53	-4.683	36.86	41.54	55.62	75.62	18.76	34.08	Vertical

**Field Strength of The Fundamental Signal**

Frequency (MHz)	Reading (dBmV/m)	Factor Corr. (dB/m)	Average Factor (dB)	Result (dBmV/m)		Limit (dBmV/m)		Margin (dB)		Polarization
				AV	PEAK	AV	PEAK	AV	PEAK	
315	63.21	15.07	-4.683	73.60	78.28	75.62	95.62	2.02	14.84	Horizontal
315	62.52	14.78	-4.683	72.62	77.30	75.62	95.62	3.00	15.82	Vertical

Above 1G:

Frequency (MHz)	Reading (dBmV/m)	Factor Corr. (dB/m)	Average Factor (dB)	Result (dBmV/m)		Limit (dBmV/m)		Margin (dB)		Polarization
				AV	PEAK	AV	PEAK	AV	PEAK	
1260.000	67.03	-14.83	-4.683	47.52	52.20	55.62	75.62	8.10	23.42	Horizontal
1575.000	65.55	-14.48	-4.683	46.39	51.07	54	74	7.61	22.93	
1890.000	63.61	-13.44	-4.683	45.49	50.17	55.62	75.62	10.13	25.45	
1260.000	67.69	-14.97	-4.683	48.07	52.72	55.62	75.62	7.55	22.90	Vertical
1575.000	64.10	-14.22	-4.683	45.20	49.88	54	74	8.80	24.12	
1890.000	62.50	-13.29	-4.683	44.53	49.21	55.62	75.62	11.09	26.41	

Remarks:

- 1.Level = Reading + Factor, Average emission level=Level + Average factor
- 2.Duty cycle level please see clause 8.
3. Pulse Desensitization Correction Factor
Pulse Width (PW) =0.507ms
 $2/PW=2/0.507ms > 3.9448kHz$
RBW(100kHz)> 2/PW
Therefore PDCF is not needed
- 4.Other harmonics emissions are lower than 20dB below the allowable limit.

6. 20dB Occupy Bandwidth


6.1 Applicable Standard

FCC Part15 C Section 15.231 (c)

6.2 Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

6.3 Test setup

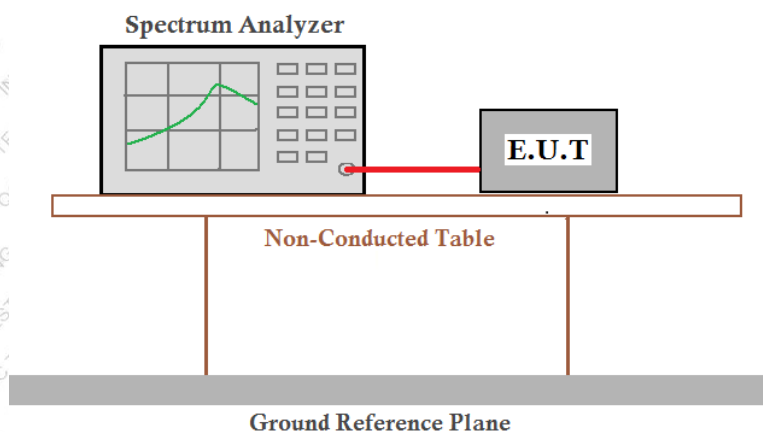

6.4 Test Data

Temperature	22 °C	Humidity	52%
ATM Pressure	101.1kPa	Antenna Gain	0dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.




Test Frequency (MHz)	20dB bandwidth (MHz)	Limit (MHz)	Result
315	0.00709	0.7875	Pass

Note: Limit= Fundamental frequency×0.25%

$$315 \times 0.25\% = 0.7875 \text{ MHz}$$

Test plot as follows:

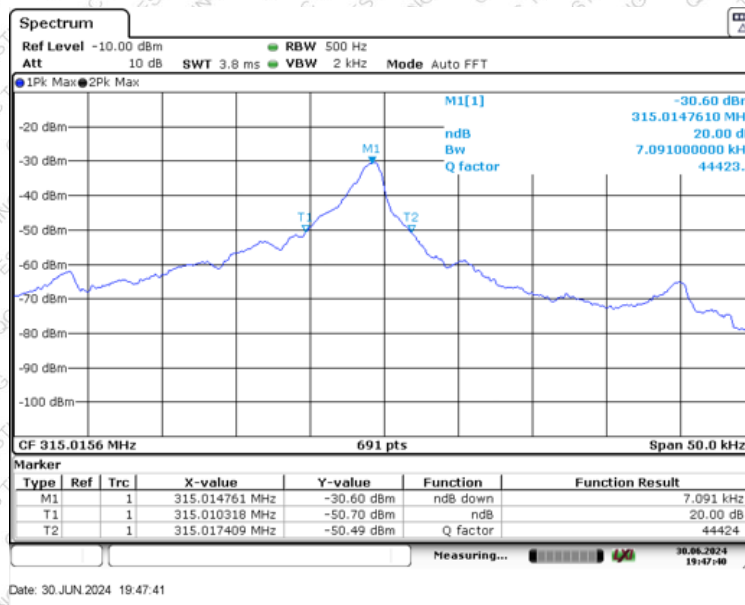

7. Dwell Time


7.1 Applicable Standard

FCC Part15 C Section 15.231 (a)(1)

7.2 Limit

Not more than 5 seconds.

7.3 Test setup

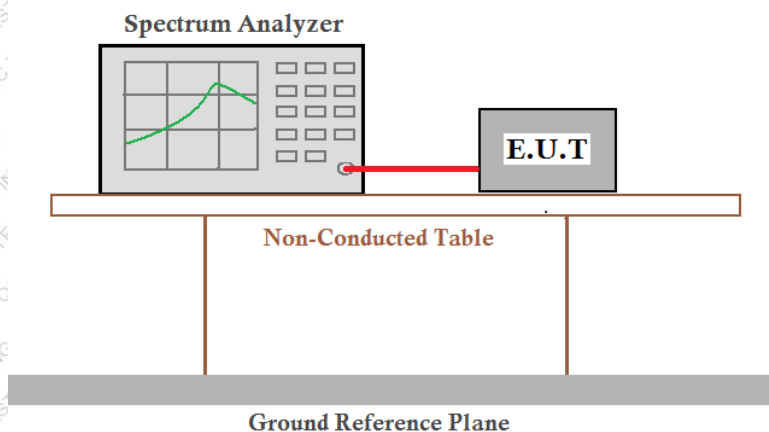


7.4 Test Data

Temperature	22 ℃	Humidity	52%
ATM Pressure	101.1kPa	Antenna Gain	0dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.

Frequency (MHz)	Duration of each TX (second)	Limit (second)	Result
315	0.1304	<5.0	Pass

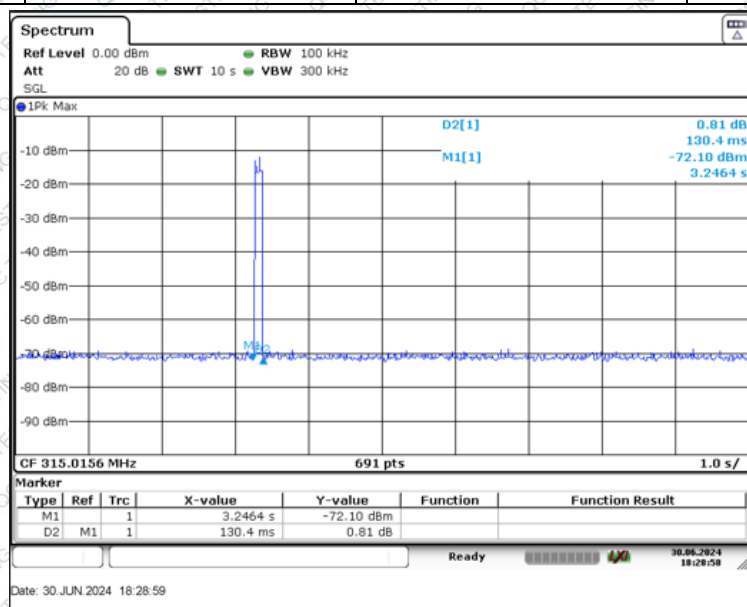

8. Calculation of Average Factor

8.1 Applicable Standard

FCC Part15 C Section 15.231


8.2 Limit

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB = $20\log(\text{duty cycle})$

8.3 Test setup

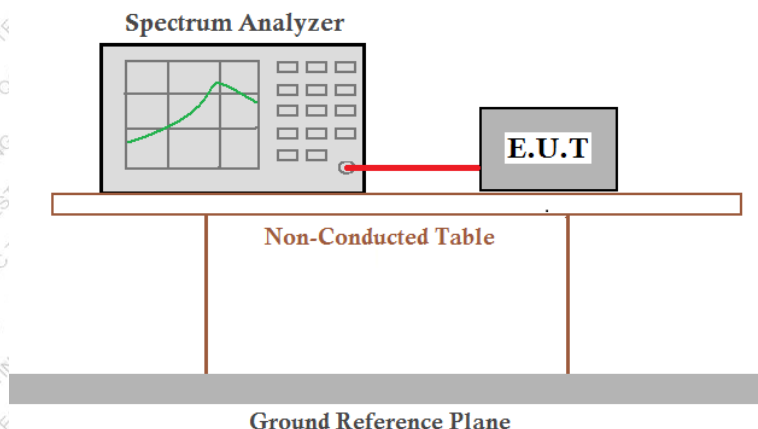

8.4 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set centre frequency of spectrum analyzer=operating frequency.
4. Set the spectrum analyzer as RBW=100kHz, VBW=100KHz, Span=0Hz, Adjust Sweep=100ms to obtain the "worst-case" pulse on time
5. Repeat above procedures until all frequency measured was complete.

8.5 Test Results



The duty cycle is simply the on time divided by the period:



Effective period of the cycle = $(1 \times 3.33)\text{ms} + (6 \times 0.797)\text{ms} + (26 \times 0.507)\text{ms} = 21.3\text{ms}$


DC = $21.3\text{ms} / 36.522\text{ms} = 0.583$

Therefore, the average factor is found by $20\log 0.583 = -4.683\text{dB}$

The spectral following.

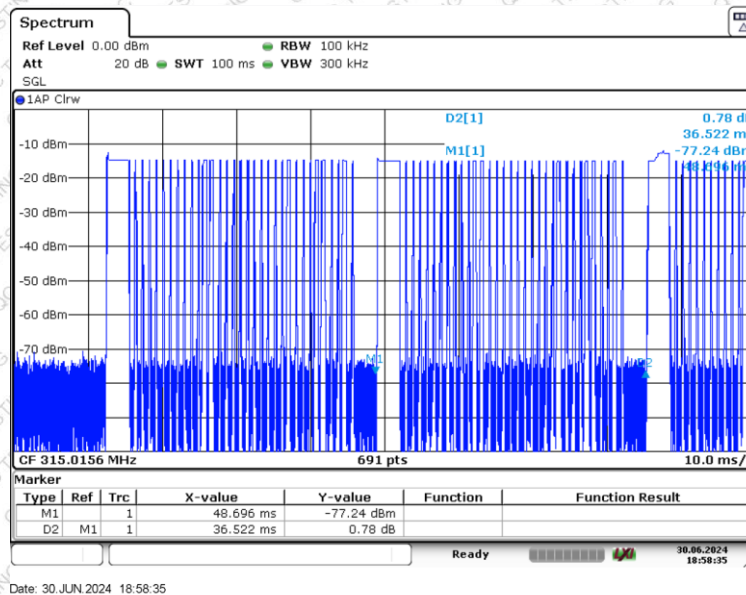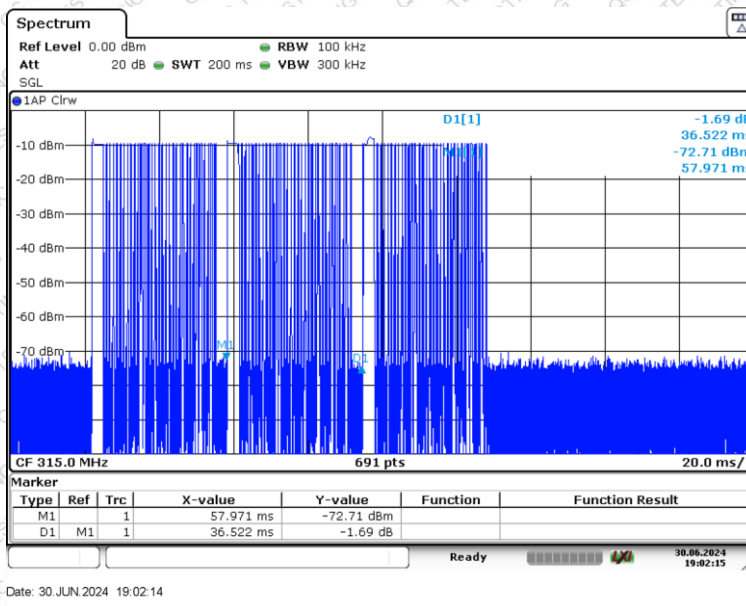

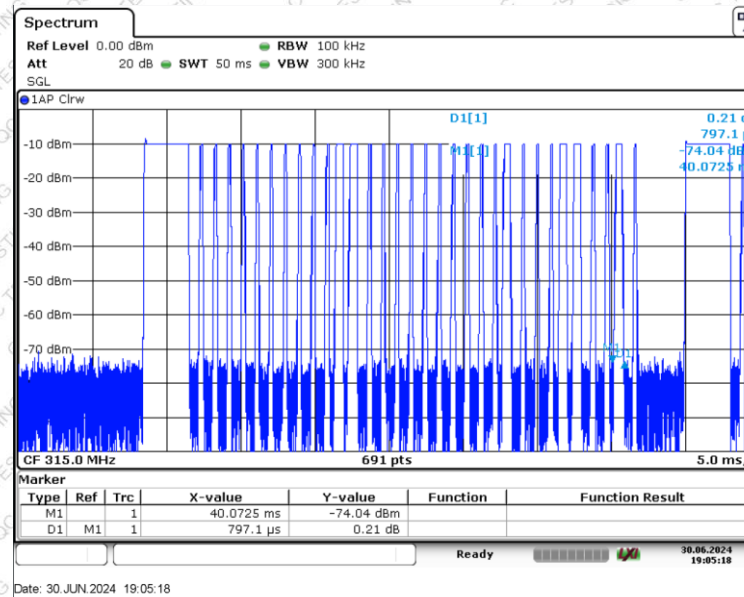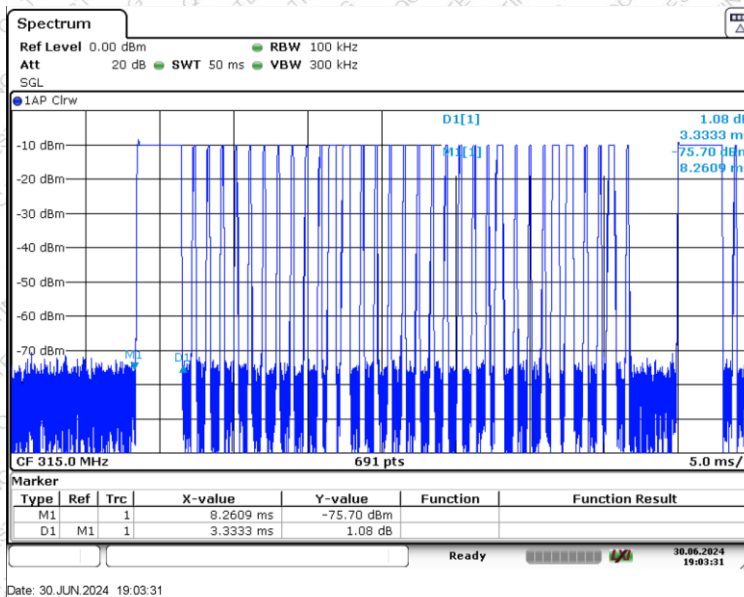

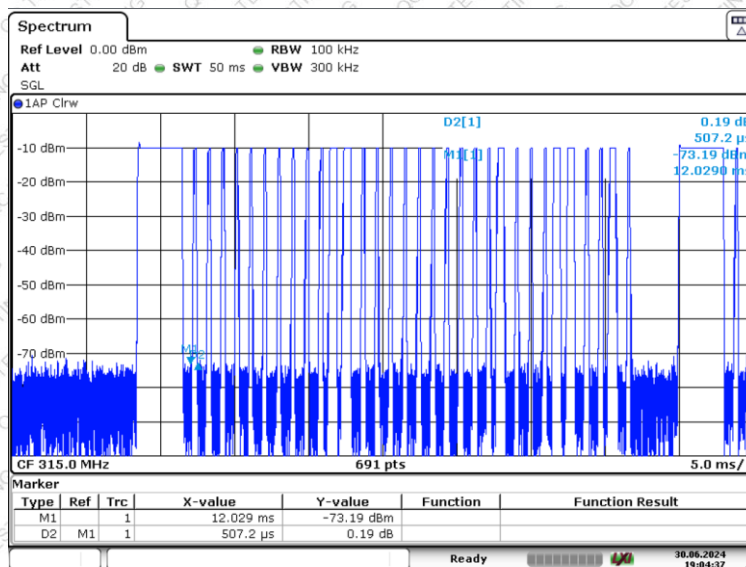

Date: 30 JUN 2024 19:04:37

----- THE END OF TEST REPORT -----