

TEST REPORT

Product Name: Wireless Charger
FCC ID: 2ATO9-19100
Trademark: Arconas
Model Number: 19100
Prepared For: Arconas Corporation
Address: 5700 Keaton Crescent Mississauga ON L5R 3H5 Canada
Manufacturer: Arconas Corporation
Address: 5700 Keaton Crescent Mississauga ON L5R 3H5 Canada
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 13, 2023
Sample tested Date: Jan. 13, 2023 to Feb. 09, 2023
Issue Date: Feb. 09, 2023
Report No.: CTB230209033RF
Test Standards: FCC Part 15 C(2021-10-01)
Test Results: PASS
Remark: This is wireless charger radio test report.

Compiled by:

Arron Liu

Arron Liu

Reviewed by:

Bin Mei

Bin Mei

Approved by:

Rita Xiao / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1. Report information.....	3
1.2. Measurement Uncertainty.....	3
1.3. Test Facility.....	3
1.4. Test Uncertainty.....	4
2. PRODUCT DESCRIPTION.....	5
2.1. EUT Description.....	5
2.2. Block Diagram of EUT Configuration.....	5
2.3. Test Conditions.....	5
2.4. Description Of Support Units (Conducted Mode).....	6
3. TEST RESULTS SUMMARY.....	6
4. TEST EQUIPMENT USED.....	7
4.1. MEASUREMENT INSTRUMENTS LIST.....	7
5. CONDUCTED EMISSION TEST.....	9
5.1. Block Diagram of Test Setup.....	9
5.2. Test Standard.....	9
5.3. Conducted Emission Limit.....	9
5.4. EUT Configuration on Test.....	9
5.5. Operating Condition of EUT.....	10
5.6. Test Procedure.....	10
5.7. Test Result.....	11
6. RADIATED EMISSION MEASUREMENT.....	13
6.1. Block Diagram of Test Setup.....	13
6.2. Test Standard.....	14
6.3. EMI Test Receiver Setup.....	14
6.4. Test Procedure.....	14
6.5. Test Result.....	15
7. OCCUPIED BANDWIDTH.....	24
7.1. Block Diagram of Test Setup.....	24
7.2. Rules and specifications.....	24
7.3. Test Procedure.....	24
7.4. Test Result.....	24
8. ANTENNA REQUIREMENT.....	26
9. EUT TEST PHOTOS.....	27
10. EUT PHOTOS.....	28

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that CTB approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that CTB in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, CTB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through CTB, unless the applicant has authorized CTB in writing to do so.

1.2. Measurement Uncertainty

Available upon request.

1.3. Test Facility

Site Description

Name of Firm : Shenzhen CTB Testing Technology Co., Ltd.

Site Location

: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

1.4. Test Uncertainty


Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	3m camber Radiated spurious emission(9KHz-30MHz)
3m camber Radiated spurious emission(30MHz-1GHz)	3m camber Radiated spurious emission(30MHz-1GHz)
3m chamber Radiated spurious emission(1GHz-18GHz)	3m chamber Radiated spurious emission(1GHz-18GHz)
3m chamber Radiated spurious emission(18GHz-40GHz)	3m chamber Radiated spurious emission(18GHz-40GHz)
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

2. PRODUCT DESCRIPTION

2.1. EUT Description

Description	: Wireless Charger
Model Number	: 19100
Serial Model	: N/A
Model Difference	: N/A
Power Supply	Input: DC 12.0V, 1.5A Output: 5W, 7.5W, 10W
MAX wireless charger power	10W
Work Frequency	: 115-175KHz

2.2. Block Diagram of EUT Configuration

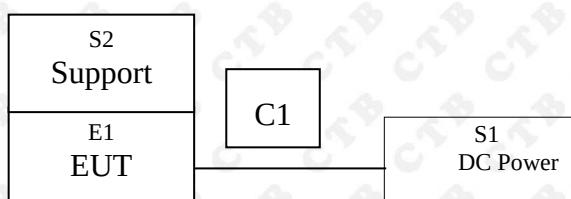

2.3. Test Conditions

Temperature: 23~25℃
Relative Humidity: 55~63 %

2.4. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
S1	DC Power Supply	LW	TPR-12002D	/	/
S2	I-Phone	Apple	13	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Section	Test Items	Test Results
15.207	Conducted disturbance	Pass
15.209(a)(f)	Radiated disturbance	Pass
15.215	20 d B Bandwidth	Pass
15.203	Antenna requirement	Pass

Remark: “N/A” means “Not applicable.”

4. TEST EQUIPMENT USED

4.1. MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/


25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100- NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100- NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100- SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023/7/23

5. CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

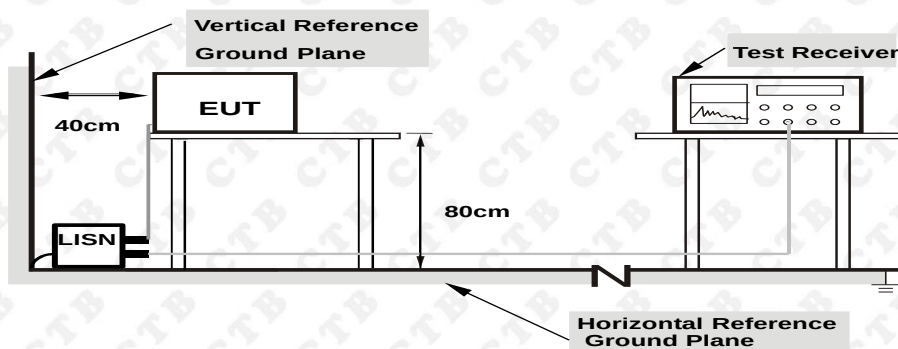

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.
The specification used was with the FCC Part 15.207 limits.

5.2. Test Standard

FCC§15.207

5.3. Conducted Emission Limit

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulators as shown in Section 5.1.

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in test modes (EUT Working) and test it.


5.6. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.

5.7. Test Result

L:

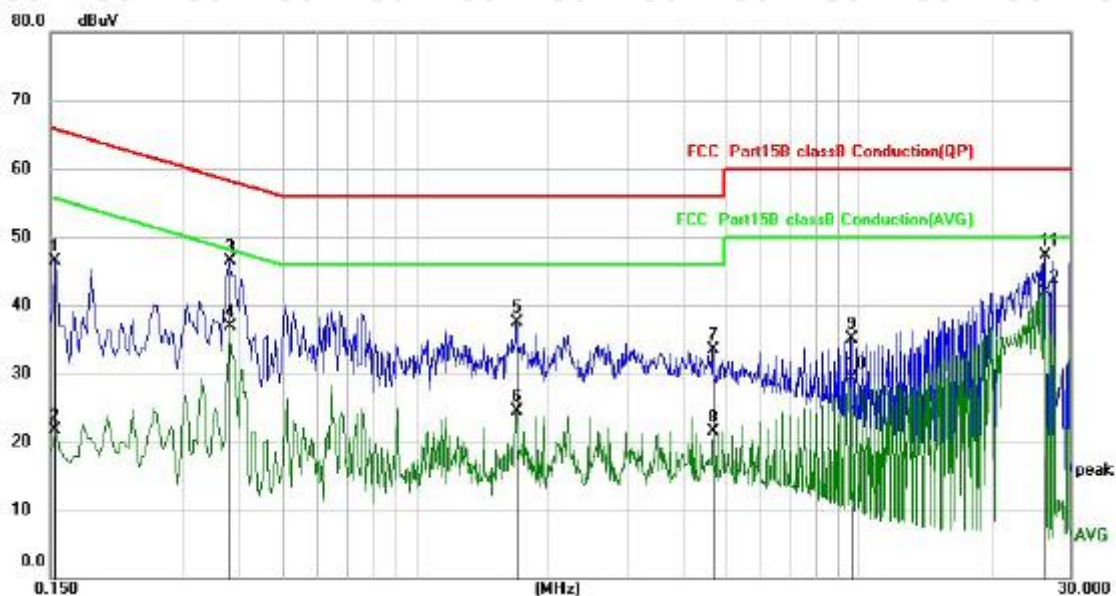


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	36.47	10.01	46.48	65.79	-19.31	QP
2		0.1539	11.74	10.01	21.75	55.79	-34.04	AVG
3		0.3820	36.55	9.98	46.53	58.24	-11.71	QP
4		0.3820	26.95	9.98	36.93	48.24	-11.31	AVG
5		1.6900	27.40	10.01	37.41	56.00	-18.59	QP
6		1.6900	14.49	10.01	24.50	46.00	-21.50	AVG
7		4.6740	23.32	10.15	33.47	56.00	-22.53	QP
8		4.6740	11.33	10.15	21.48	46.00	-24.52	AVG
9		9.6100	24.67	10.34	35.01	60.00	-24.99	QP
10		9.6100	18.89	10.34	29.23	50.00	-20.77	AVG
11		26.2340	36.74	10.62	47.36	60.00	-12.64	QP
12	*	26.2340	31.22	10.62	41.84	50.00	-8.16	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Note: The wireless charging power, such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

N:

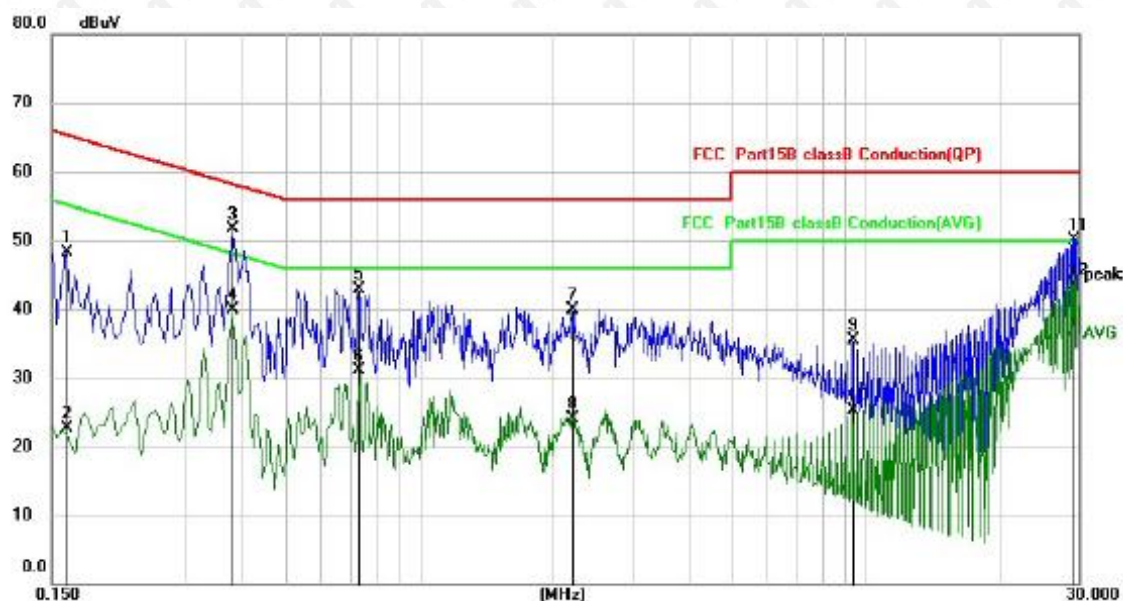

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1620	38.39	10.01	48.40	65.36	-16.96	QP
2		0.1620	12.67	10.01	22.68	55.36	-32.68	AVG
3		0.3820	41.66	9.98	51.64	58.24	-6.60	QP
4		0.3820	29.93	9.98	39.91	48.24	-8.33	AVG
5		0.7300	32.89	9.97	42.86	56.00	-13.14	QP
6		0.7300	21.07	9.97	31.04	46.00	-14.96	AVG
7		2.1900	29.84	10.04	39.88	56.00	-16.12	QP
8		2.1900	14.02	10.04	24.06	46.00	-21.94	AVG
9		9.3500	25.11	10.33	35.44	60.00	-24.56	QP
10		9.3500	14.97	10.33	25.30	50.00	-24.70	AVG
11		29.0900	39.49	10.64	50.13	60.00	-9.87	QP
12	*	29.0900	32.81	10.64	43.45	50.00	-6.55	AVG

Remark:


Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Note: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

6. RADIATED EMISSION MEASUREMENT


6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of connection between the EUT and the simulators




6.1.2. Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

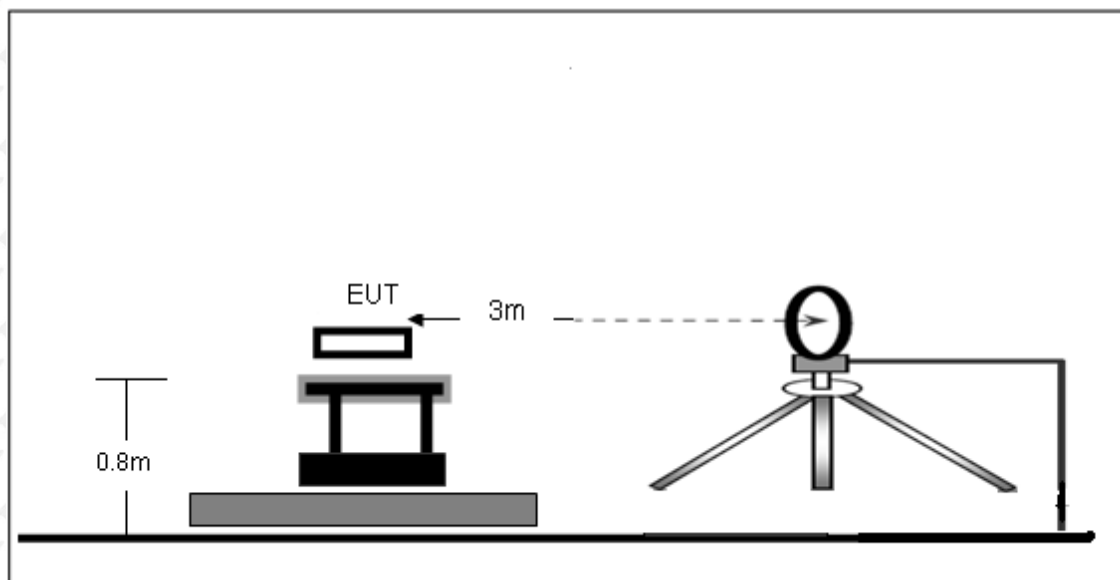

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

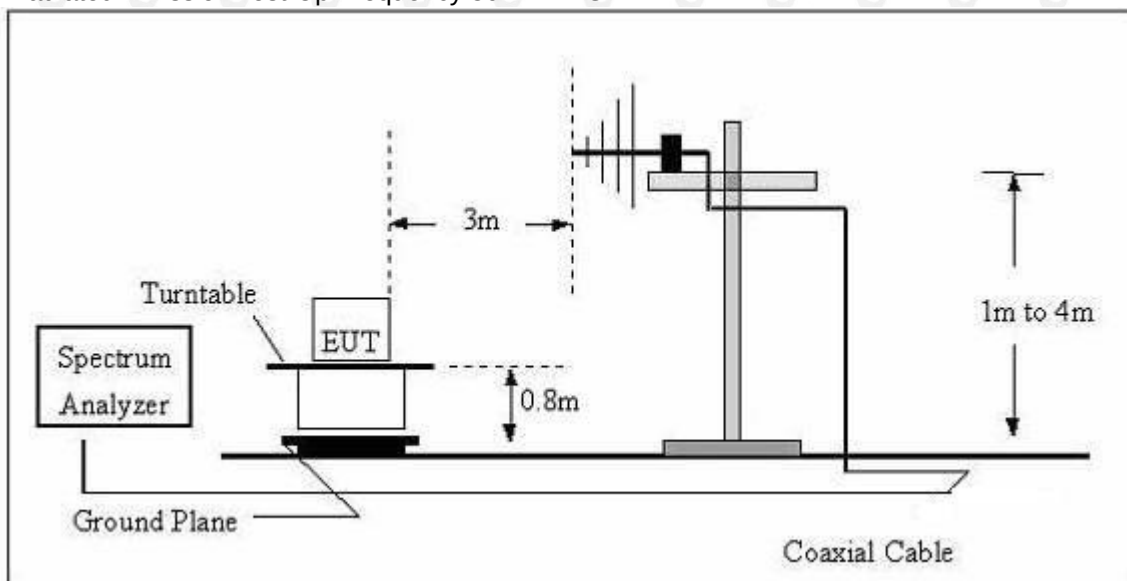

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.2. Test Standard

FCC §15.209; §15.205

6.3. EMI Test Receiver Setup

The system was investigated from 9kHz to 1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 kHz	1 kHz	QP
150 kHz – 30MHz	9kHz	30kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

6.4. Test Procedure

Below 30M

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. Loop antenna are used as a receiving antenna.

The radiation measurements are tested under 3-axes (X, Y, Z) position (X denotes lying on the table, Y denotes side stand and Z denotes vertical stand).

Above 30M

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.


6.5. Test Result

PASS

Please refer to the following pages.

9kHz-150KHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Position :	X
Test Voltage:	DC12V	Test Mode :	10W

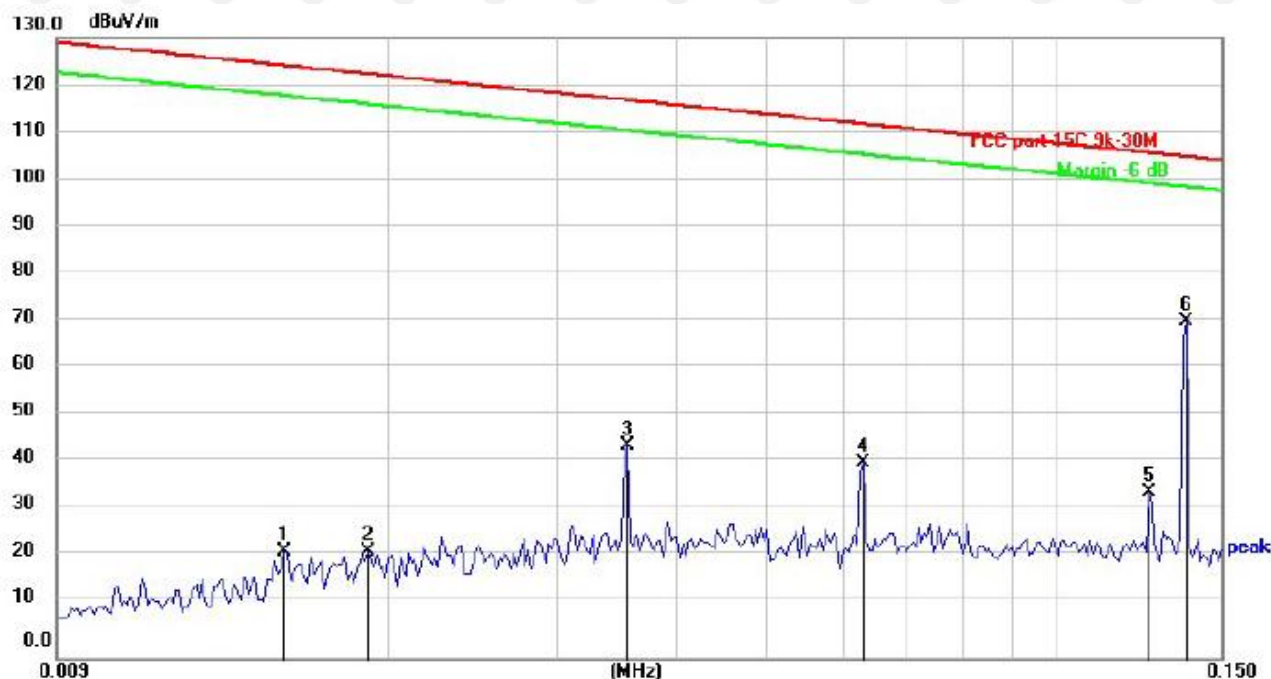

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.0155	30.55	-7.84	22.71	123.83	-101.12	peak
2		0.0191	30.53	-7.85	22.68	122.00	-99.32	peak
3		0.0357	52.74	-7.90	44.84	116.58	-71.74	peak
4		0.0631	49.00	-7.86	41.14	111.59	-70.45	peak
5		0.1258	42.50	-7.58	34.92	105.61	-70.69	peak
6	*	0.1378	78.16	-7.58	70.58	104.82	-34.24	peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Limit - Emission Level.

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Position :	Y
Test Voltage:	DC12V	Test Mode :	10W

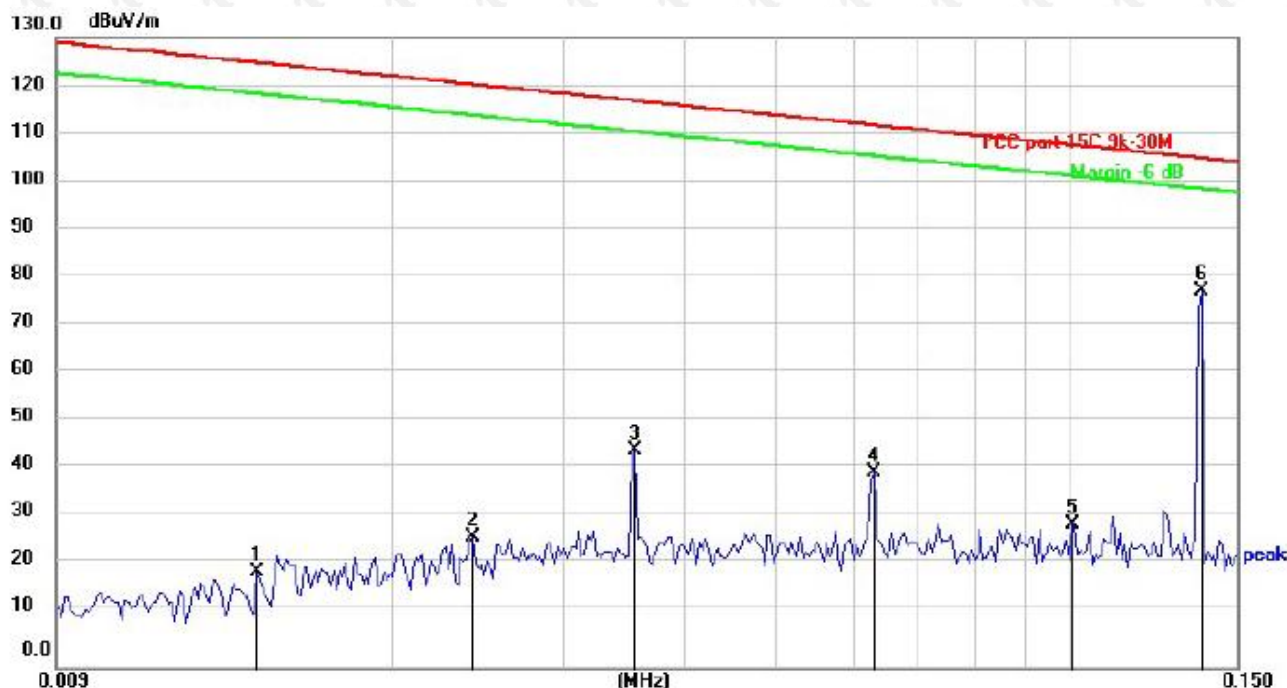

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.0145	27.96	-7.83	20.13	124.42	-104.29	peak
2		0.0241	34.96	-7.87	27.09	119.99	-92.90	peak
3		0.0357	53.02	-7.90	45.12	116.58	-71.46	peak
4		0.0631	48.35	-7.86	40.49	111.59	-71.10	peak
5		0.1010	37.46	-7.59	29.87	107.50	-77.63	peak
6	*	0.1378	85.41	-7.58	77.83	104.82	-26.99	peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Limit - Emission Level.

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Position :	Z
Test Voltage:	DC12V	Test Mode :	10W

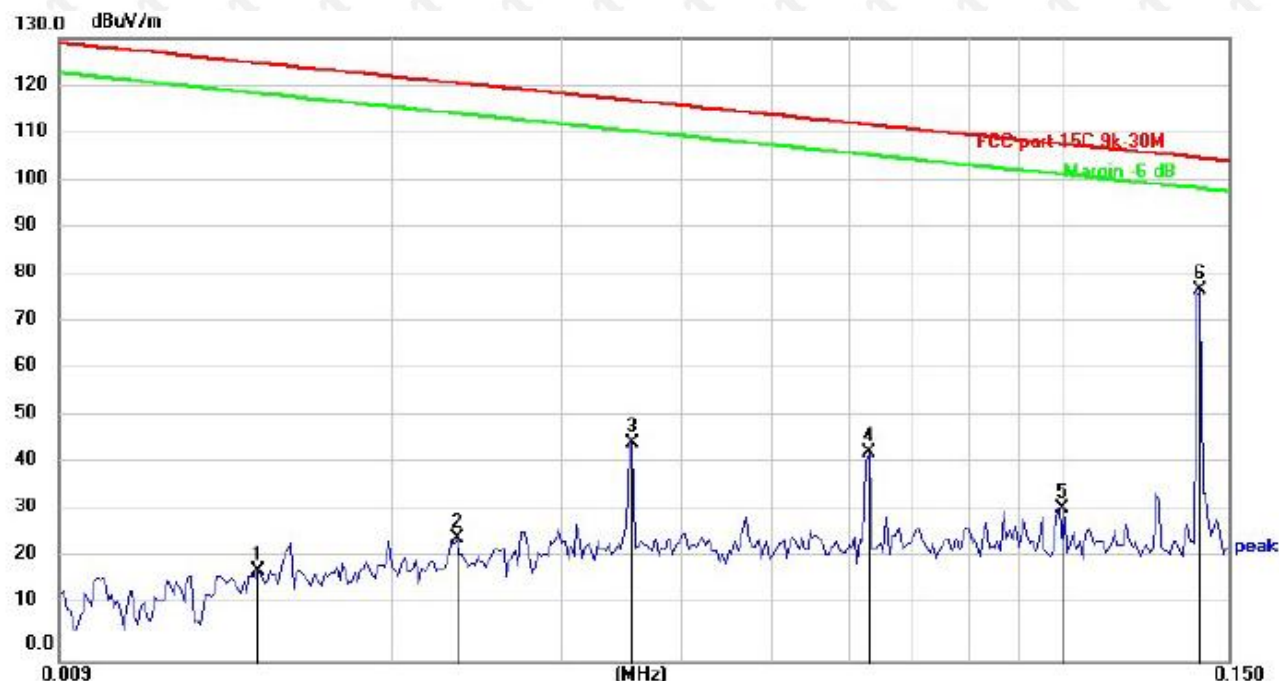

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.0145	26.90	-7.83	19.07	124.42	-105.35	peak
2		0.0234	33.67	-7.86	25.81	120.24	-94.43	peak
3		0.0357	53.44	-7.90	45.54	116.58	-71.04	peak
4		0.0631	51.52	-7.86	43.66	111.59	-67.93	peak
5		0.0998	39.50	-7.59	31.91	107.60	-75.69	peak
6	*	0.1398	85.00	-7.58	77.42	104.69	-27.27	peak

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Limit - Emission Level.

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

150kHz-30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Position :	X
Test Voltage:	DC12V	Test Mode :	10W

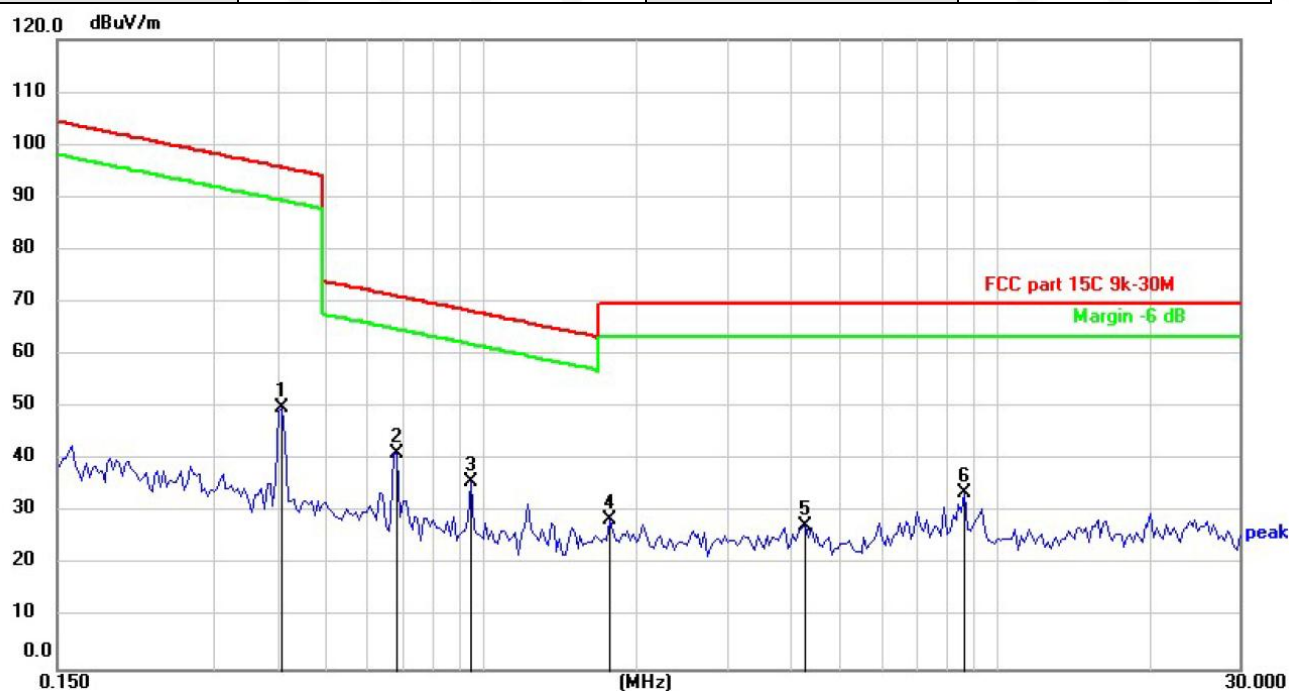

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.4104	57.42	-7.48	49.94	95.34	-45.40	peak
2	*	0.6880	47.79	-6.64	41.15	70.85	-29.70	peak
3		0.9581	42.23	-6.26	35.97	67.98	-32.01	peak
4		1.7857	34.25	-5.63	28.62	69.54	-40.92	peak
5		4.2804	32.65	-5.23	27.42	69.54	-42.12	peak
6		8.7524	38.33	-4.67	33.66	69.54	-35.88	peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Limit - Emission Level.

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Position :	Y
Test Voltage:	DC12V	Test Mode :	10W

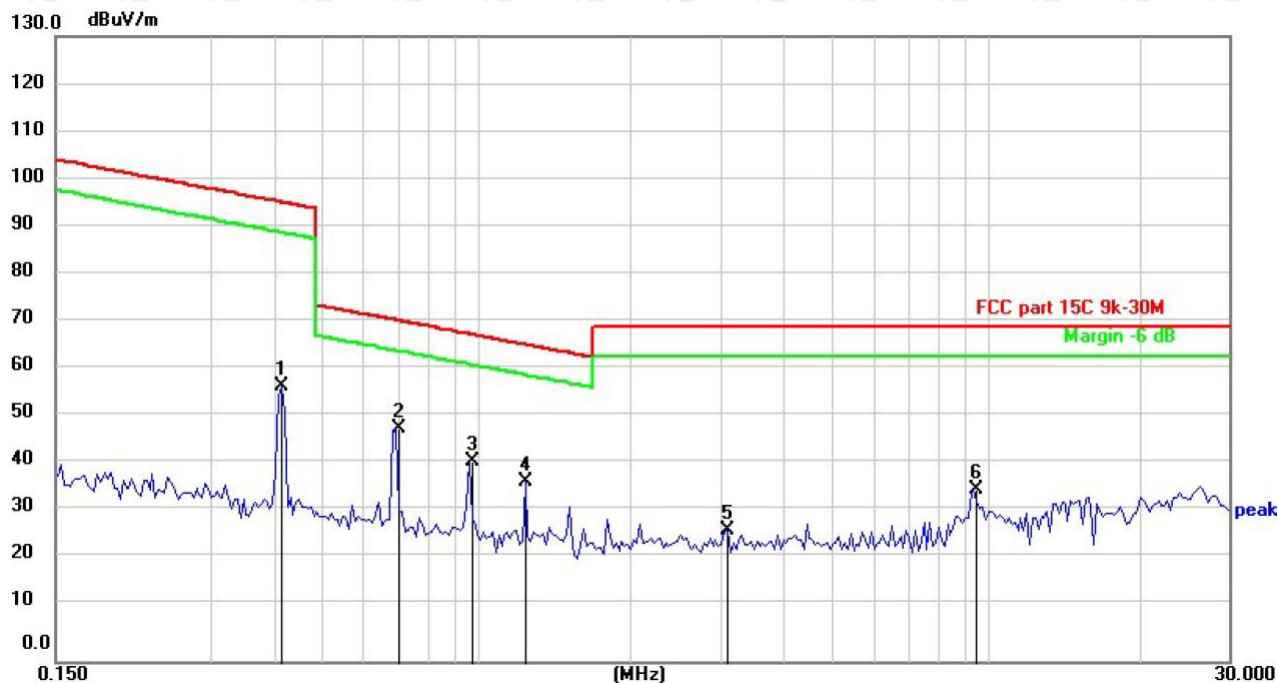

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.4159	64.75	-7.48	57.27	95.22	-37.95	peak
2	*	0.6973	55.15	-6.60	48.55	70.74	-22.19	peak
3		0.9710	47.89	-6.25	41.64	67.86	-26.22	peak
4		1.2488	43.54	-6.03	37.51	65.67	-28.16	peak
5		3.1148	32.37	-4.85	27.52	69.54	-42.02	peak
6		9.4765	40.58	-4.60	35.98	69.54	-33.56	peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Limit - Emission Level.

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Position :	Z
Test Voltage:	DC12V	Test Mode :	10W

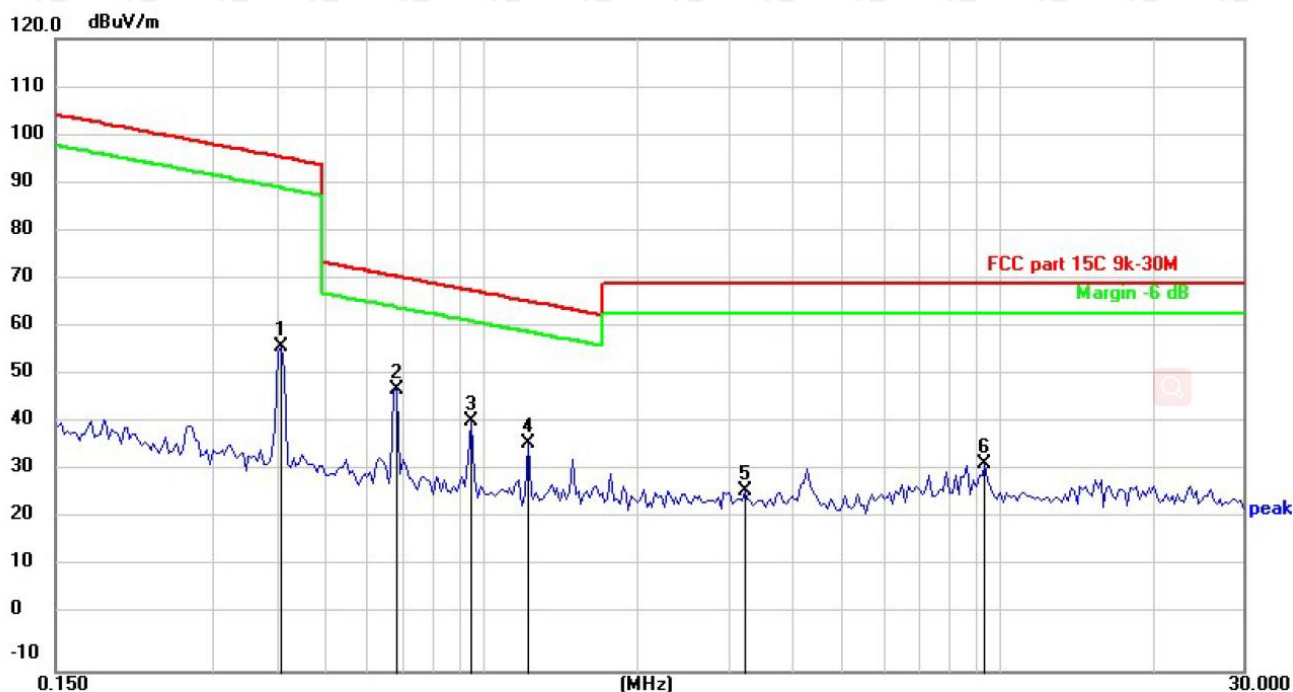

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		0.4104	64.34	-7.48	56.86	95.34	-38.48 peak
2	*	0.6880	54.70	-6.64	48.06	70.85	-22.79 peak
3		0.9581	47.83	-6.26	41.57	67.98	-26.41 peak
4		1.2323	43.11	-6.04	37.07	65.79	-28.72 peak
5		3.2410	32.00	-4.89	27.11	69.54	-42.43 peak
6		9.4764	37.20	-4.60	32.60	69.54	-36.94 peak

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Limit - Emission Level.

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

30MHz-1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage:	DC 12V	Test Mode :	5W

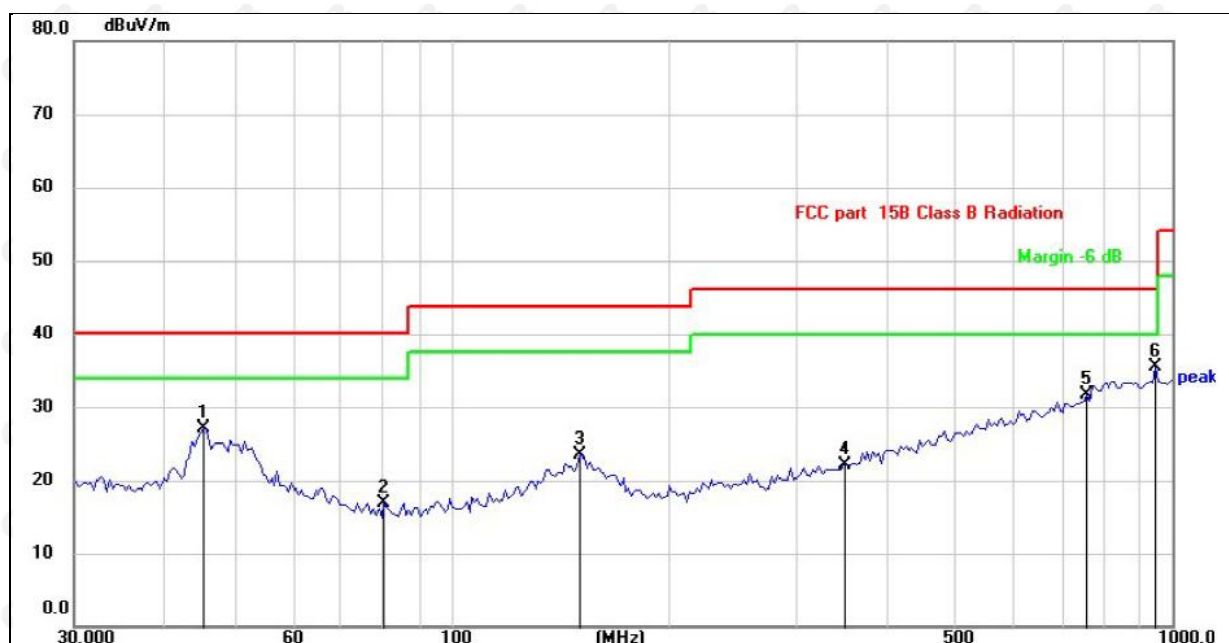

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier, Margin = Measurement– Limit.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.2959	33.69	-6.55	27.14	40.00	-12.86	peak
2		80.7857	27.48	-10.48	17.00	40.00	-23.00	peak
3		150.5377	29.01	-5.46	23.55	43.50	-19.95	peak
4		352.3249	26.09	-3.99	22.10	46.00	-23.90	peak
5		762.0384	26.59	5.05	31.64	46.00	-14.36	peak
6	*	948.7608	27.92	7.63	35.55	46.00	-10.45	peak

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage:	DC 12V	Test Mode :	5W



Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier, Margin = Measurement– Limit.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	45.2959	41.14	-6.55	34.59	40.00	-5.41	peak
2	*	52.5752	41.61	-6.86	34.75	40.00	-5.25	peak
3		153.2000	33.07	-5.46	27.61	43.50	-15.89	peak
4		295.6648	27.19	-5.67	21.52	46.00	-24.48	peak
5		531.9633	26.61	0.80	27.41	46.00	-18.59	peak
6		948.7608	28.63	7.63	36.26	46.00	-9.74	peak

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

7. OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

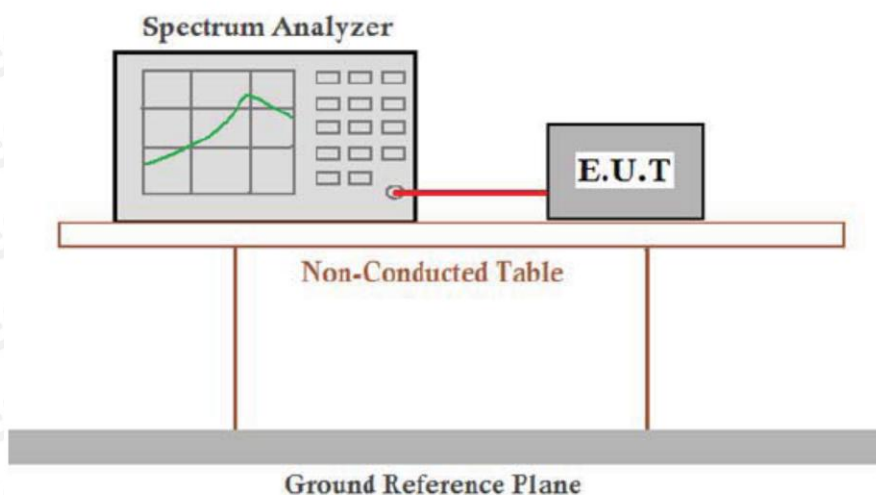

7.2. Rules and specifications

CFR 47 Part 15.215(c)
ANSI C63.10-2013


7.3. Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

7.4. Test Result

PASS

Mode	Freq (KHz)	20dB Bandwidth (Hz)	Limit (Hz)	Conclusion
Tx Mode	124.2	254	/	PASS

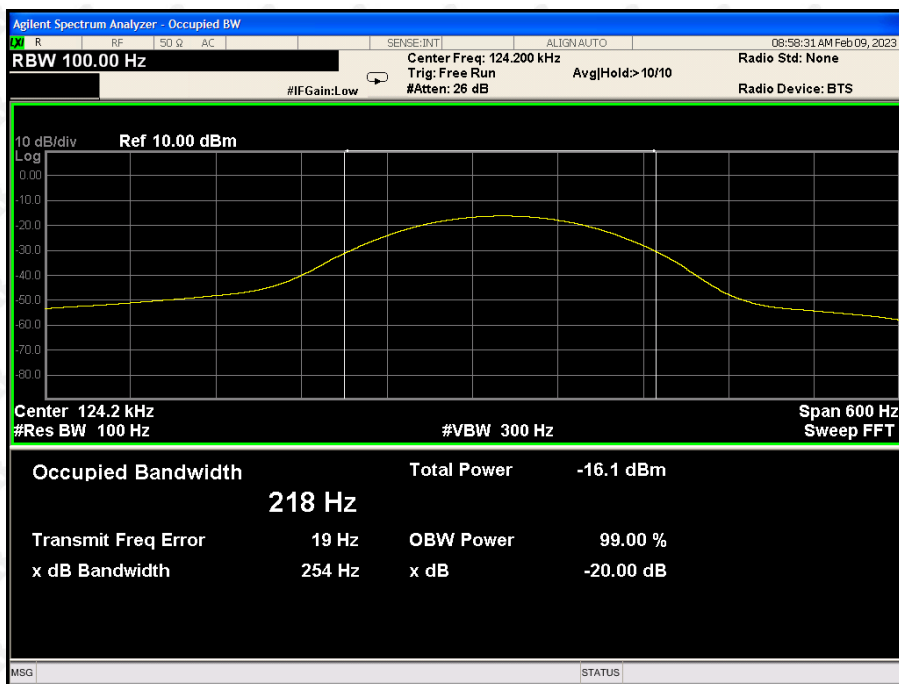

Remark: The wireless charging power,such as 5W, 7.5W, 10W have been tested and passed, only show the worst mode in this report.

8. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is coil antenna and use a permanently attached antenna.

Please refer to Attachment 1

9. EUT TEST PHOTOS

Please refer to Attachment 1

10. EUT PHOTOS

Please refer to Attachment 1

※※※※※ END OF REPORT ※※※※※