

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Head-Direct (Kunshan) Co., LTD

Realtek Bluetooth MP Kit
Model No.: TWS600

FCC ID: 2ATP3-TWS600

Prepared for : Head-Direct (Kunshan) Co., LTD
Address : No.88, Xueyuan Road, Bacheng Town, Kunshan City, Jiangsu
Province, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20190768
Date of Test : June 10-18, 2019
Date of Report : June 19, 2019

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	5
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	6
1.5. Measurement Uncertainty	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode.....	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. POWER LINE CONDUCTED MEASUREMENT	10
5.1. Block Diagram of Test Setup.....	10
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	11
5.6. Data Sample	12
5.7. Power Line Conducted Emission Measurement Results	12
6. 6DB BANDWIDTH MEASUREMENT	15
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(2).....	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	15
6.6. Test Result	16
7. MAXIMUM PEAK OUTPUT POWER	18
7.1. Block Diagram of Test Setup.....	18
7.2. The Requirement For Section 15.247(b)(3).....	18
7.3. EUT Configuration on Measurement	18
7.4. Operating Condition of EUT	18
7.5. Test Procedure	18
7.6. Test Result	19
8. POWER SPECTRAL DENSITY MEASUREMENT	21
8.1. Block Diagram of Test Setup.....	21
8.2. The Requirement For Section 15.247(e).....	21
8.3. EUT Configuration on Measurement	21
8.4. Operating Condition of EUT	21
8.5. Test Procedure	22
8.6. Test Result	22
9. BAND EDGE COMPLIANCE TEST	25
9.1. Block Diagram of Test Setup.....	25
9.2. The Requirement For Section 15.247(d)	25
9.3. EUT Configuration on Measurement	25

9.4.	Operating Condition of EUT	25
9.5.	Test Procedure	26
9.6.	Test Result	26
10.	RADIATED SPURIOUS EMISSION TEST	32
10.1.	Block Diagram of Test Setup.....	32
10.2.	The Limit For Section 15.247(d)	33
10.3.	Restricted bands of operation	34
10.4.	Configuration of EUT on Measurement	34
10.5.	Operating Condition of EUT	35
10.6.	Test Procedure	35
10.7.	Data Sample	36
10.8.	The Field Strength of Radiation Emission Measurement Results	36
11.	ANTENNA REQUIREMENT.....	49
11.1.	The Requirement	49
11.2.	Antenna Construction	49

Test Report Certification

Applicant : Head-Direct (Kunshan) Co., LTD
Manufacturer : Head-Direct (Kunshan) Co., LTD
EUT Description : Realtek Bluetooth MP Kit
Model No. : TWS600
Trade Name : HIFIMAN

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013**

The EUT was tested according to DTS test procedure of August 24, 2018 KDB558074 D01 DTS Meas Guidance v05r02 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test :

June 10-18, 2019

Date of Report :

June 19, 2019

Prepared by :

(Bob Wang, Engineer)



Approved & Authorized Signer :

(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Realtek Bluetooth MP Kit
Model Number : TWS600
Bluetooth version : V5.0
Frequency Range : 2402MHz-2480MHz
Number of Channels : 40
Antenna Gain : 2.0 dBi
Antenna type : Ceramic antenna
Modulation mode : GFSK
Power Supply : DC 3.7V (Powered by Lithium battery) or
DC 5.0V (Powered by USB port)
Applicant : Head-Direct (Kunshan) Co., LTD
Address : No.88, Xueyuan Road, Bacheng Town, Kunshan City, Jiangsu Province, China
Manufacturer : Head-Direct (Kunshan) Co., LTD
Address : No.88, Xueyuan Road, Bacheng Town, Kunshan City, Jiangsu Province, China

1.2. Carrier Frequency of Channels

Channel	Frequenceny (MHz)	Channel	Frequenceny (MHz)	Channel	Frequenceny (MHz)	Channe 1	Frequenceny (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

Adapter: Model:BEK-QC-001
INPUT: 120V~60Hz
OUTPUT:5V/1A

1.4.Description of Test Facility

EMC Lab : Recognition of accreditation by Federal Communications Commission (FCC)
The Designation Number is CN1189
The Registration Number is 708358

Listed by Innovation, Science and Economic Development Canada (ISED)
The Registration Number is 5077A-2

Accredited by China National Accreditation Service for Conformity Assessment (CNAS)
The Registration Number is CNAS L3193

Accredited by American Association for Laboratory Accreditation (A2LA)
The Certificate Number is 4297.01

Name of Firm : Shenzhen Accurate Technology Co., Ltd.

Site Location : 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.5.Measurement Uncertainty

Radiated emission expanded uncertainty (9kHz-30MHz)	: $U=2.66\text{dB}$, $k=2$
Radiated emission expanded uncertainty (30MHz-1000MHz)	: $U=4.28\text{dB}$, $k=2$
Radiated emission expanded uncertainty (1G-18GHz)	: $U=4.98\text{dB}$, $k=2$
Radiated emission expanded uncertainty (18G-26.5GHz)	: $U=5.06\text{dB}$, $k=2$
Conduction Emission Expanded Uncertainty (Mains ports, 9kHz-30MHz)	: $U=2.72\text{dB}$, $k=2$
Conduction Emission Expanded Uncertainty (Telecommunication ports, 150kHz-30MHz)	: $U=2.94\text{dB}$, $k=2$
Power disturbance Expanded Uncertainty	: $U=2.92\text{dB}$, $k=2$
Harmonic current expanded uncertainty	: $U=0.512\%$, $k=2$

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 5, 2019	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 5, 2019	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 5, 2019	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU1183540-01	3791	Jan. 5, 2019	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 5, 2019	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 5, 2019	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 5, 2019	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 5, 2019	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 5, 2019	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 5, 2019	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18G-10S	N/A	Jan. 5, 2019	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2485-2 375/2510-60/11SS	N/A	Jan. 5, 2019	1 Year
RF COAXIAL CABLE	SUHNER	N-5m(Frequency range:9KHz-26.5GHz)	NO.3	Jan. 5, 2019	1 Year
RF COAXIAL CABLE	SUHNER	N-5m(Frequency range:9KHz-26.5GHz)	NO.4	Jan. 5, 2019	1 Year
RF COAXIAL CABLE	SUHNER	N-1m(Frequency range:9KHz-26.5GHz)	NO.5	Jan. 5, 2019	1 Year
RF COAXIAL CABLE	SUHNER	N-1m(Frequency range:9KHz-26.5GHz)	NO.6	Jan. 5, 2019	1 Year
Temporary antenna connector	NTGS	14AE	N/A	March 20, 2019	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

Note: The equipment under test (EUT) was tested under fully-charged battery.

The Bluetooth has been tested under continuous transmission mode.

Its duty cycle setting is greater than 98%.

EUT is connected to a computer through the usb-serial controller tool and Use test software to set the test mode.

3.2.Configuration and peripherals

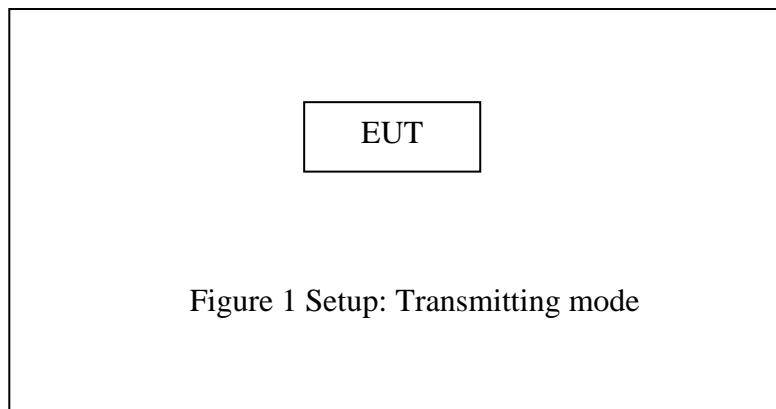


Figure 1 Setup: Transmitting mode


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators

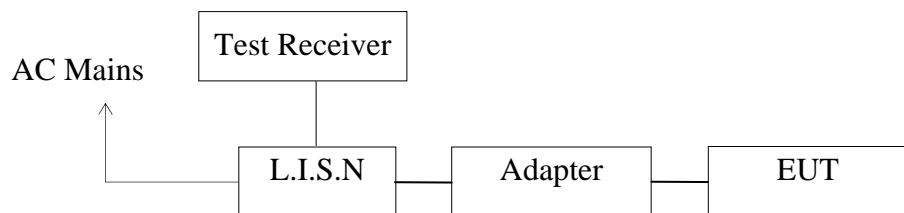

(EUT: REALTEK BLUETOOTH MP KIT)

5.1.2. Test System Setup

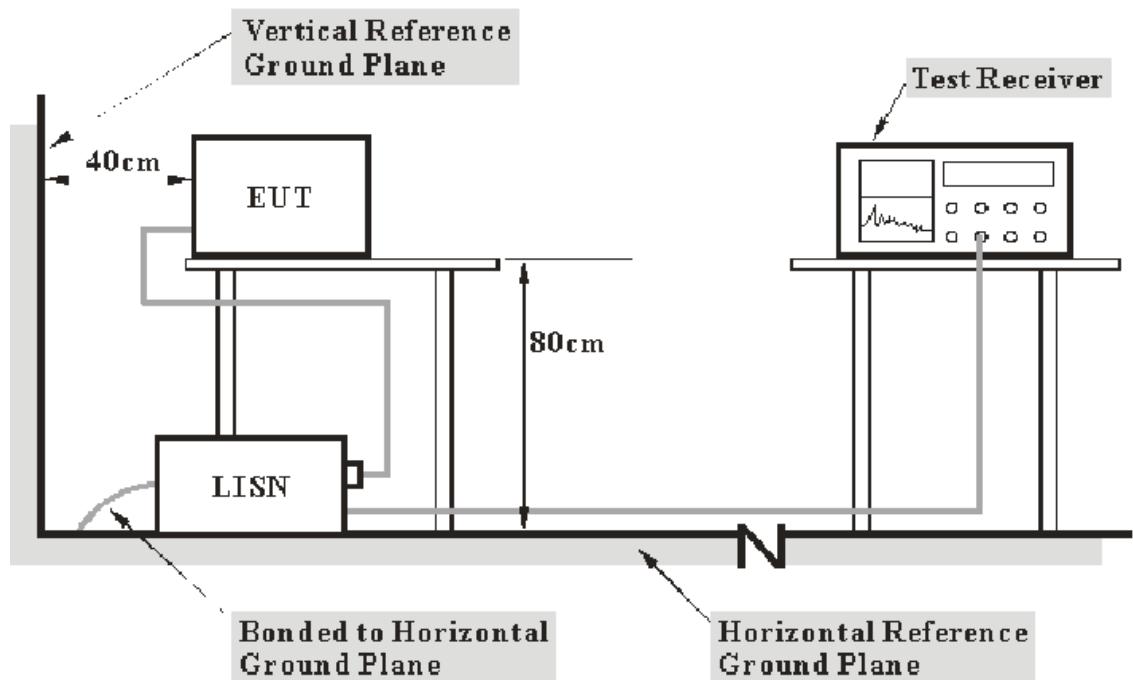

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dB μ V)	Average Level (dB μ V)	QuasiPeak Limit (dB μ V)	Average Limit (dB μ V)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	11.1	41.8	32.0	56.0	46.0	14.2	14.0	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dB μ V) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dB μ V) = Limit stated in standard

Margin = Limit (dB μ V) - Level (dB μ V)

Calculation Formula:

Margin = Limit (dB μ V) - Level (dB μ V)

5.7.Power Line Conducted Emission Measurement Results

Pass.

Test Lab: Shielding room

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT. Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Realtek Bluetooth MP Kit M/N:TWS600
 Manufacturer: Head-Direct
 Operating Condition: BT Communication
 Test Site: 1#Shielding Room
 Operator: Ben
 Test Specification: N 120V 60Hz
 Comment: Report NO.:ATE20190768
 Start of Test: 2019-6-10 / 14:29:43

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

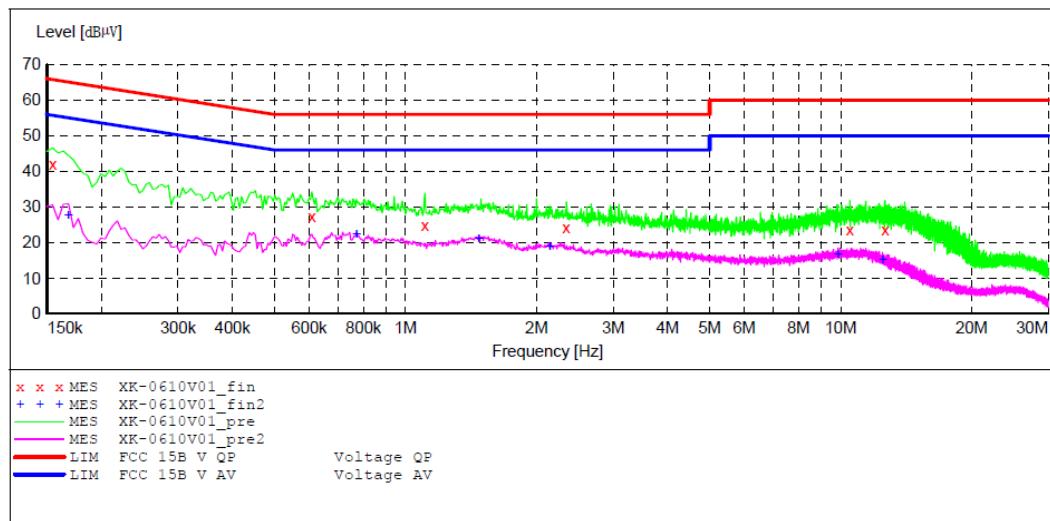

MEASUREMENT RESULT: "XK-0610V01_fin"

2019-6-10 14:36

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.154500	42.00	10.8	66	23.8	QP	N	GND
0.609000	27.50	11.0	56	28.5	QP	N	GND
1.108500	24.70	11.2	56	31.3	QP	N	GND
2.341500	24.10	11.3	56	31.9	QP	N	GND
10.491000	23.70	11.6	60	36.3	QP	N	GND
12.655500	23.70	11.6	60	36.3	QP	N	GND

MEASUREMENT RESULT: "XK-0610V01_fin2"

2019-6-10 14:36

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.168000	27.70	10.8	55	27.4	AV	N	GND
0.771000	22.40	11.1	46	23.6	AV	N	GND
1.473000	21.10	11.2	46	24.9	AV	N	GND
2.143500	19.00	11.3	46	27.0	AV	N	GND
9.865500	16.70	11.6	50	33.3	AV	N	GND
12.480000	15.20	11.6	50	34.8	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Realtek Bluetooth MP Kit M/N:TWS600
 Manufacturer: Head-Direct
 Operating Condition: BT Communication
 Test Site: 1#Shielding Room
 Operator: Ben
 Test Specification: L 120V 60Hz
 Comment: Report NO.:ATE20190768
 Start of Test: 2019-6-10 / 14:37:33

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

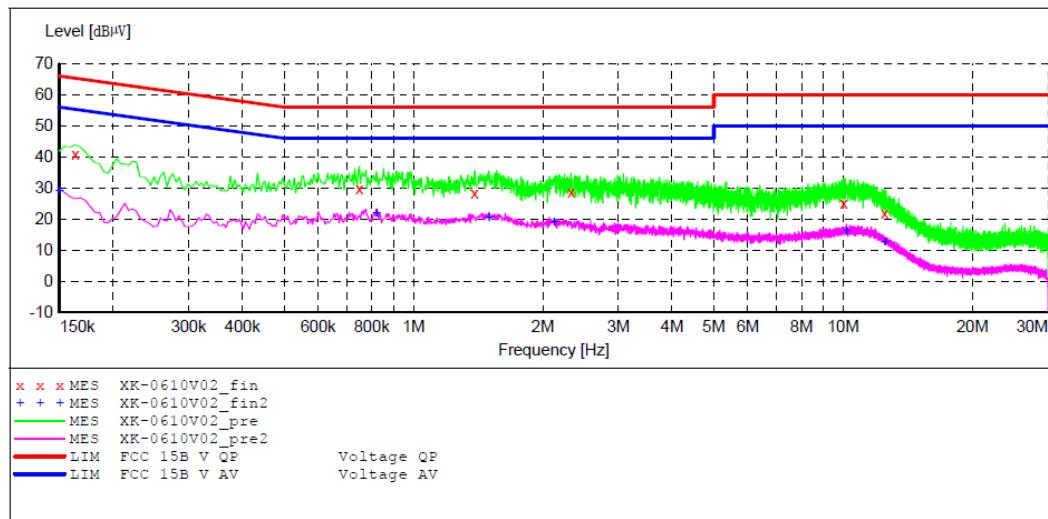

MEASUREMENT RESULT: "XK-0610V02_fin"

2019-6-10 14:39

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.163500	40.80	10.8	65	24.5	QP	L1	GND
0.748500	29.80	11.1	56	26.2	QP	L1	GND
1.387500	28.50	11.2	56	27.5	QP	L1	GND
2.328000	28.60	11.3	56	27.4	QP	L1	GND
10.041000	25.10	11.6	60	34.9	QP	L1	GND
12.498000	22.00	11.6	60	38.0	QP	L1	GND


MEASUREMENT RESULT: "XK-0610V02_fin2"

2019-6-10 14:39

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	29.00	10.8	56	27.0	AV	L1	GND
0.820500	22.10	11.1	46	23.9	AV	L1	GND
1.500000	20.50	11.2	46	25.5	AV	L1	GND
2.125500	18.90	11.3	46	27.1	AV	L1	GND
10.180500	16.10	11.6	50	33.9	AV	L1	GND
12.525000	12.80	11.6	50	37.2	AV	L1	GND

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


6.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.6. Test Result


Test Lab: Shielding room

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	Pass/Fail
0	2402	0.699	0.5	Pass
19	2440	0.708	0.5	Pass
39	2480	0.699	0.5	Pass


The spectrum analyzer plots are attached as below.

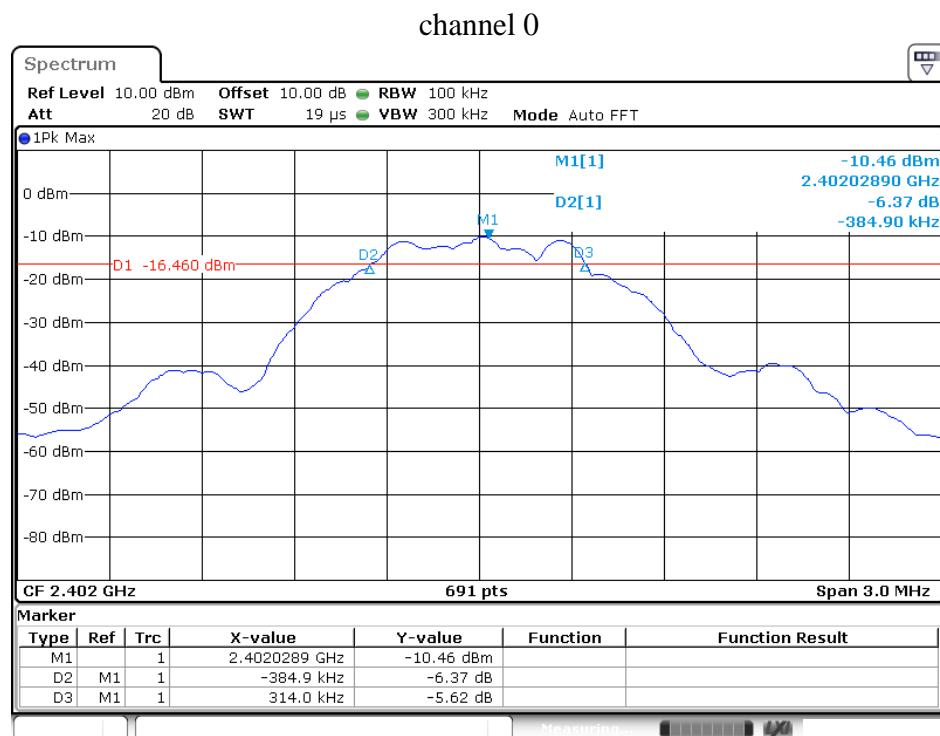

channel 19

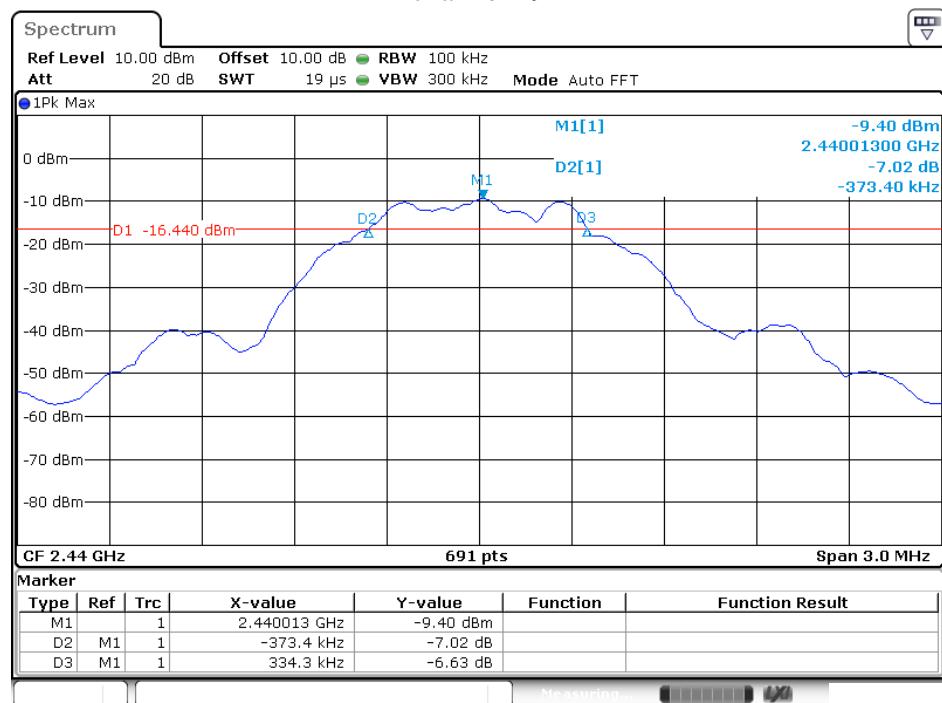


channel 39

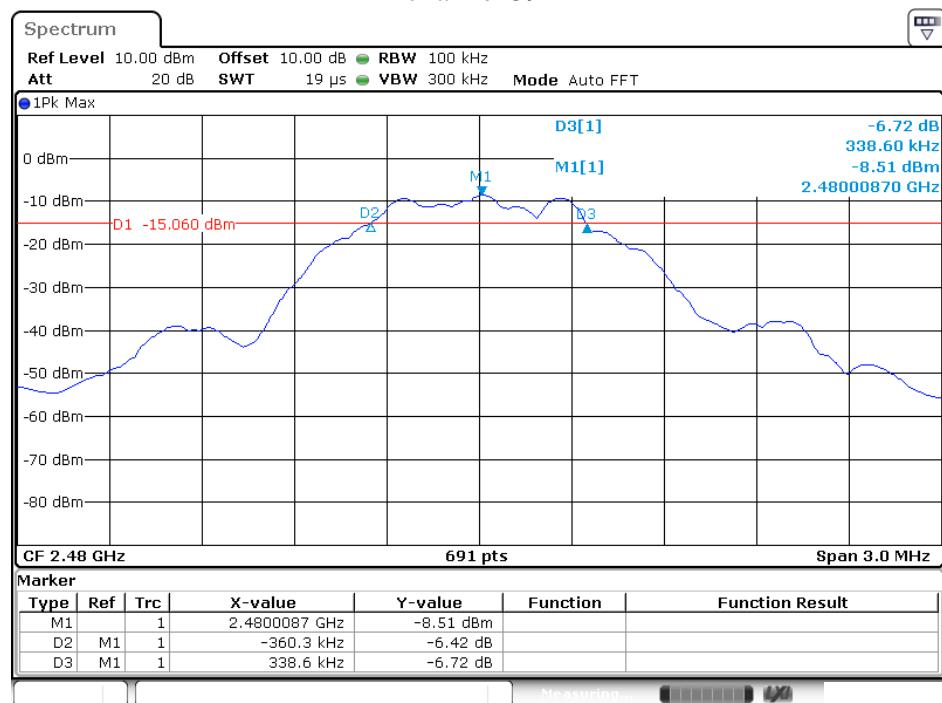

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3MHz.


7.5.3. Measurement the maximum peak output power.

7.6. Test Result


Test Lab: Shielding room

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-13.94	30	Pass
19	2440	-13.50	30	Pass
39	2480	-13.51	30	Pass


The spectrum analyzer plots are attached as below.

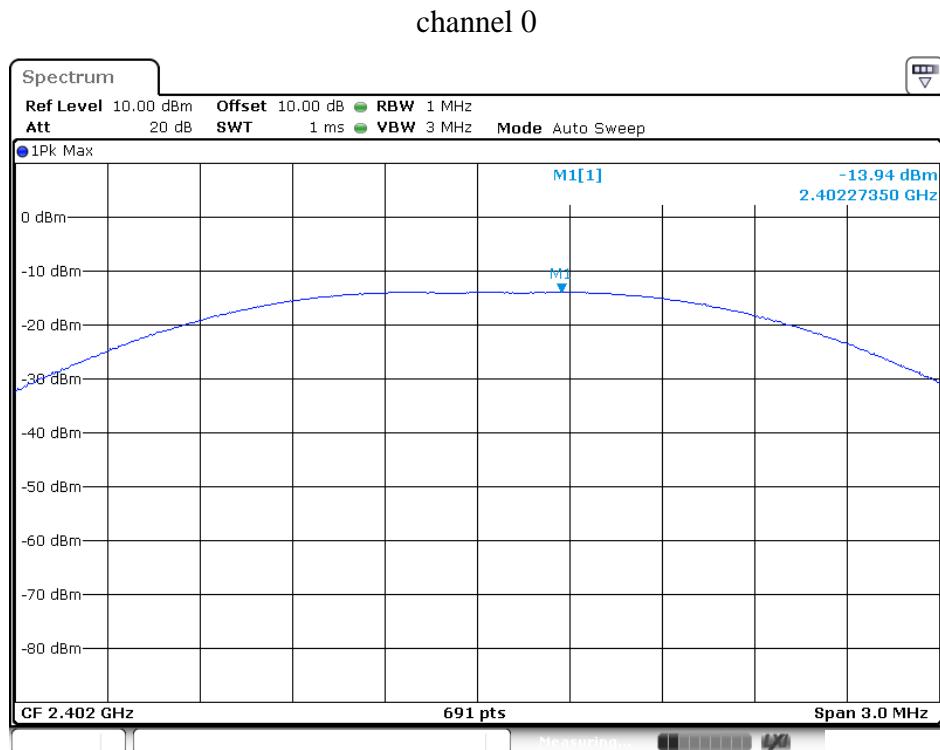

channel 19

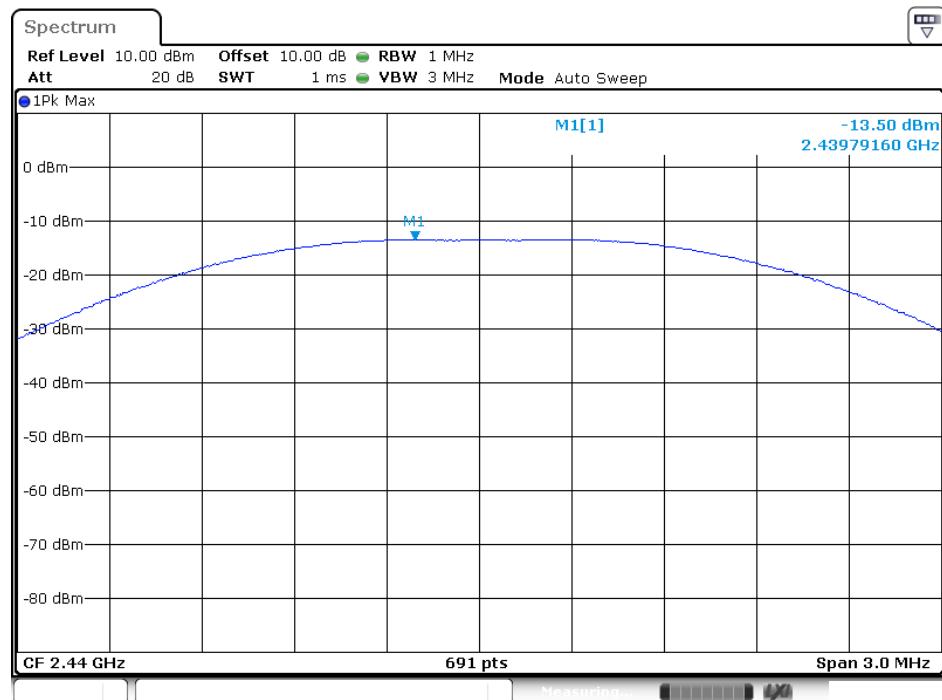


channel 39

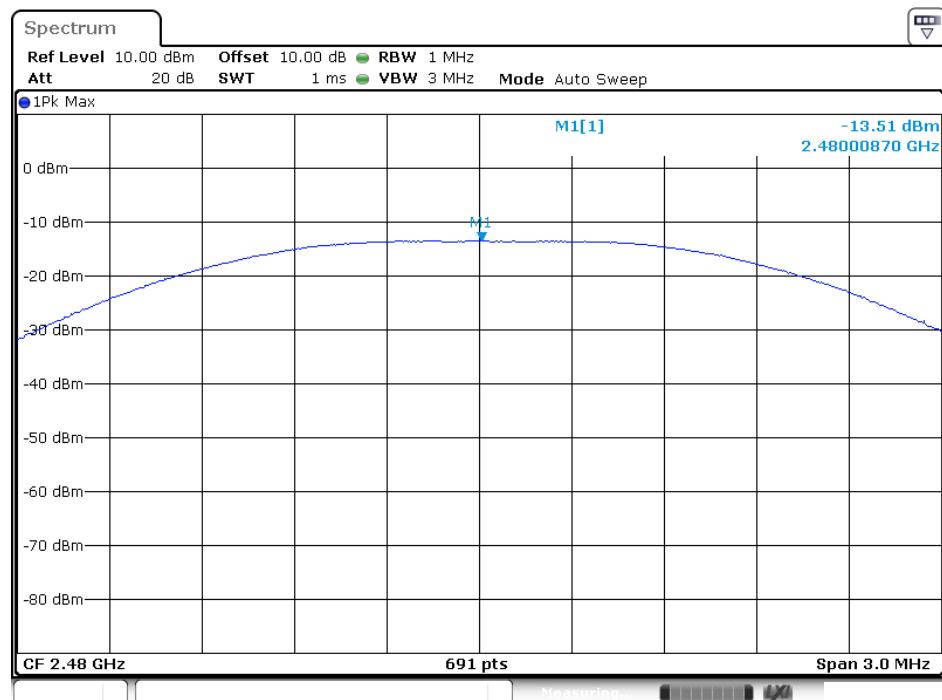

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Measurement Procedure PKPSD:

8.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

8.5.4. Measurement the maximum power spectral density.


8.6. Test Result

Test Lab: Shielding room


Channel	Frequency (MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
0	2402	-35.03	8	Pass
19	2440	-36.29	8	Pass
39	2480	-34.27	8	Pass

The spectrum analyzer plots are attached as below.


channel 0

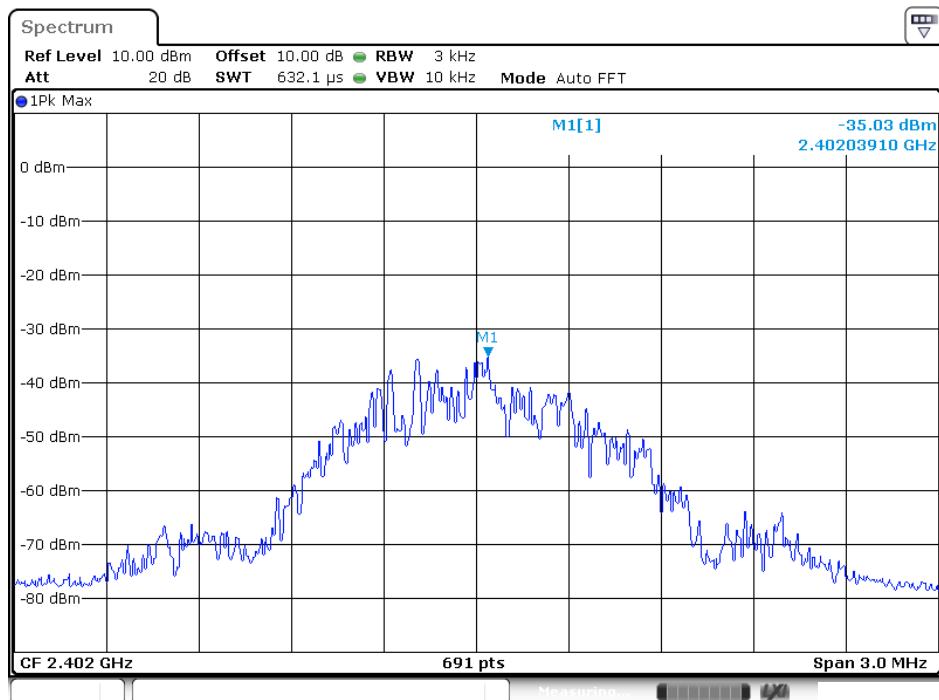

channel 19

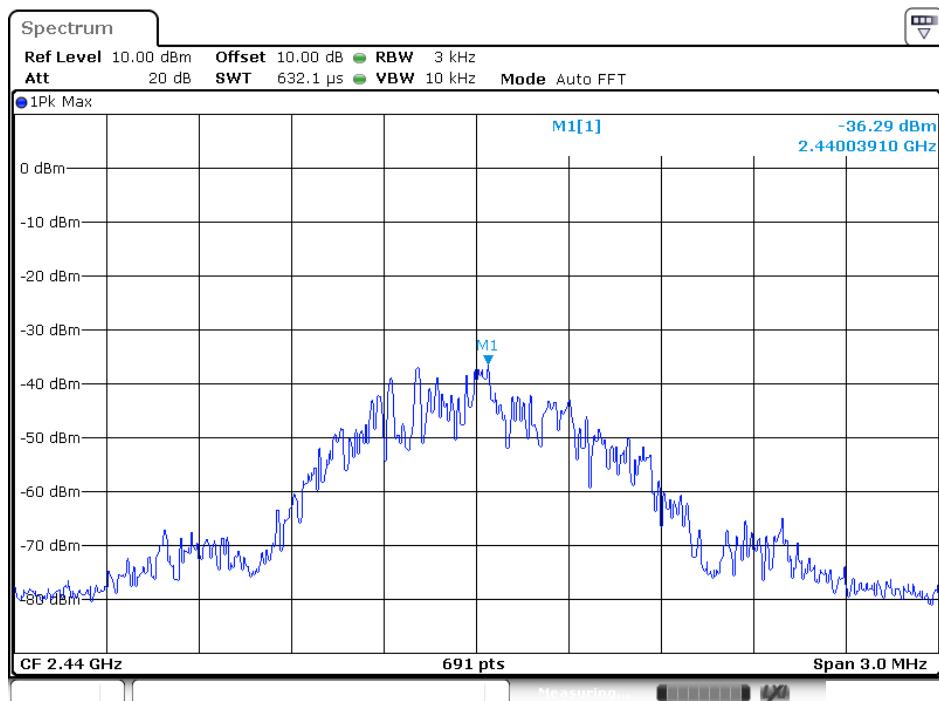


channel 39

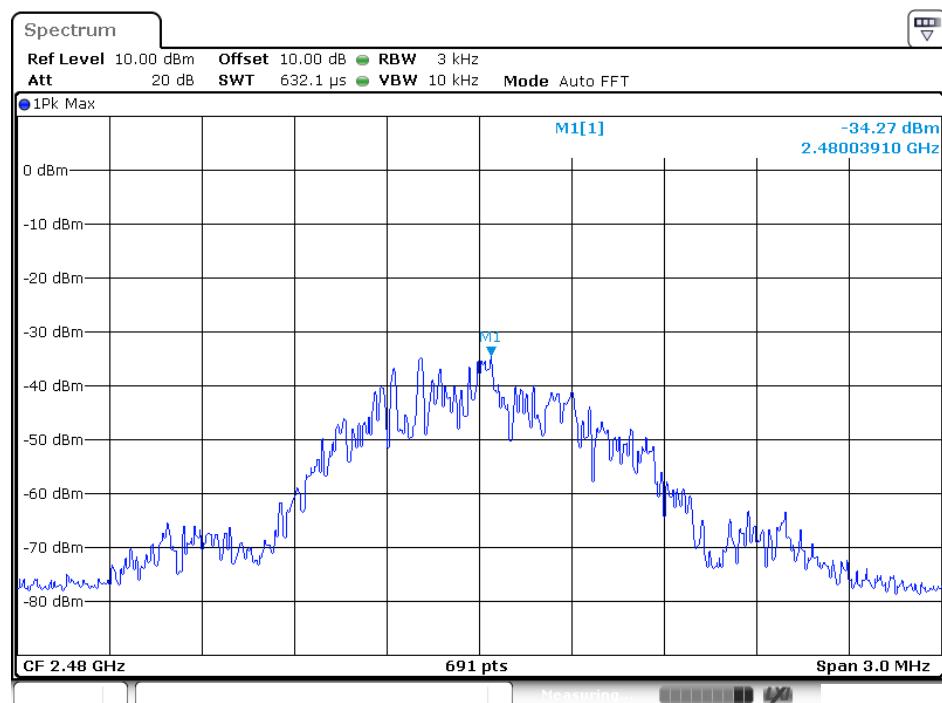

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

Radiate Band Edge:

9.5.3. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

9.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.7. RBW=1MHz, VBW=1MHz

9.5.8. The band edges was measured and recorded.

9.6. Test Result

Pass.


Test Lab: Shielding room

Conducted Band Edge Result


Channel	Frequency (MHz)	Delta peak to band emission	Limit(dBc)
0	2400.0	50.01	20
39	2483.5	51.17	20

The spectrum analyzer plots are attached as below.

channel 0

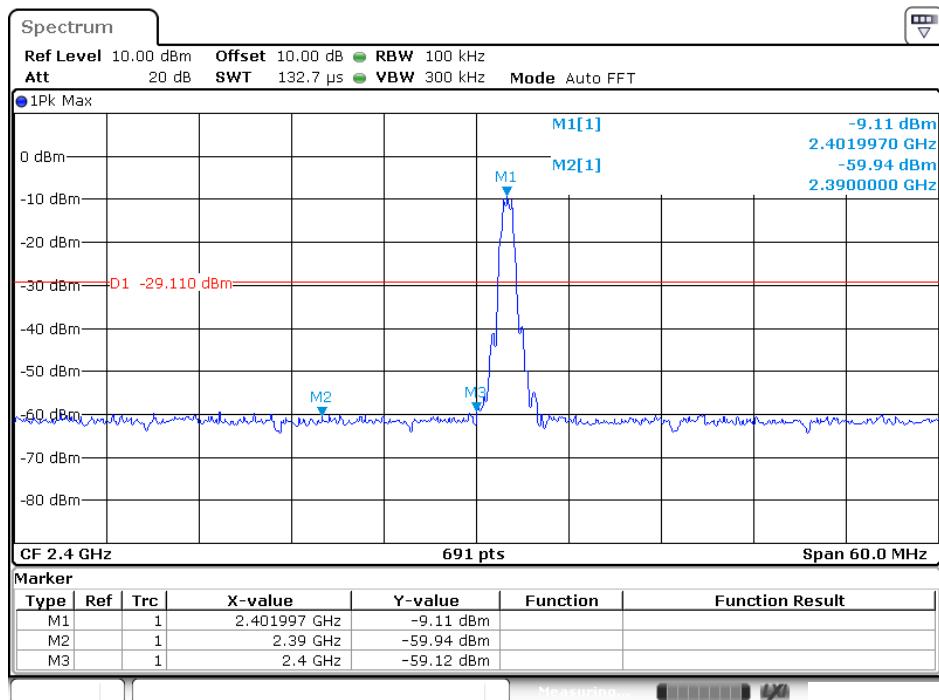

channel 39

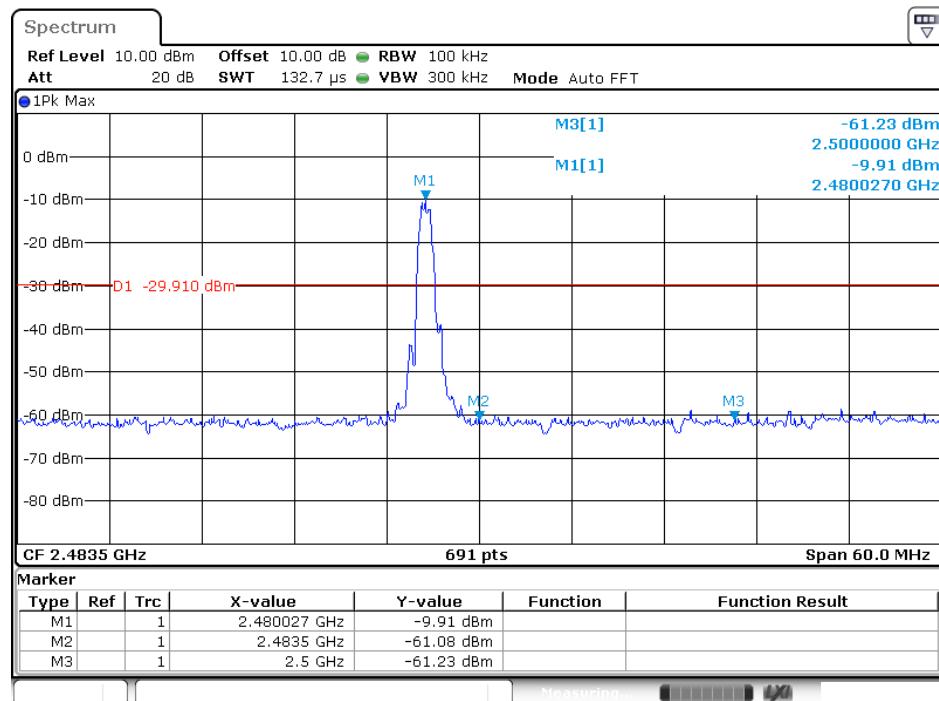

Radiated Band Edge Result



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	JP2019 #54	Polarization:	Horizontal
Standard:	FCC PK	Power Source:	DC 3.7V
Test item:	Radiation Test	Date:	2019/06/18
Temp. (C)/Hum.(%)	25 C / 55 %	Time:	18:14:06
EUT:	Realtek Bluetooth MP Kit	Engineer Signature:	Ben
Mode:	TX 2402MHz	Distance:	3m
Model:	TWS600		
Manufacturer:	Head-Direct		
Note:	Report NO.:ATE20190768		

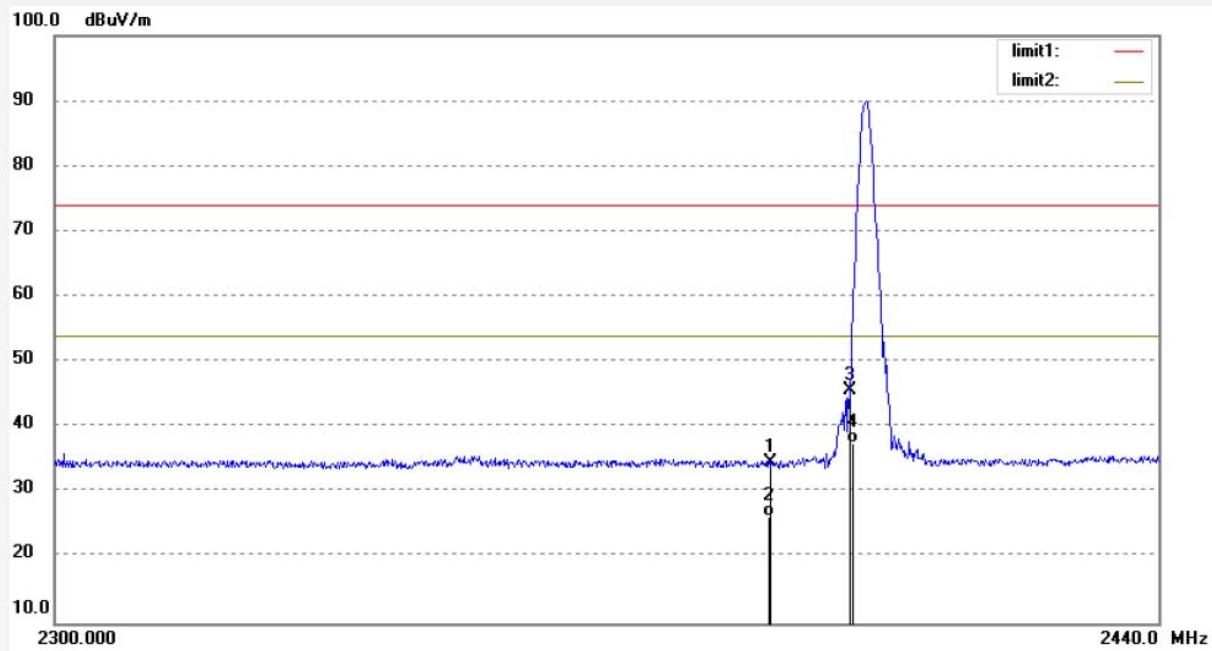

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	40.89	-6.32	34.57	74.00	-39.43	peak	100	165	
2	2390.000	32.72	-6.32	26.40	54.00	-27.60	AVG	100	165	
3	2400.000	52.01	-6.27	45.74	74.00	-28.26	peak	100	236	
4	2400.000	43.87	-6.27	37.60	54.00	-16.40	AVG	100	236	

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: JP2019 #55

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/18

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 18:15:13

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben

Mode: TX 2402MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

100.0 dBuV/m

90

80

70

60

50

40

30

20

10.0

2300.000

2440.0 MHz

limit1:
limit2:

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	41.54	-6.32	35.22	74.00	-38.78	peak	100	136	
2	2390.000	33.92	-6.32	27.60	54.00	-26.40	AVG	100	136	
3	2400.000	52.18	-6.27	45.91	74.00	-28.09	peak	100	189	
4	2400.000	43.87	-6.27	37.60	54.00	-16.40	AVG	100	189	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: JP2019 #56

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/18

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 18:17:32

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2480MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct


Note: Report NO.:ATE20190768

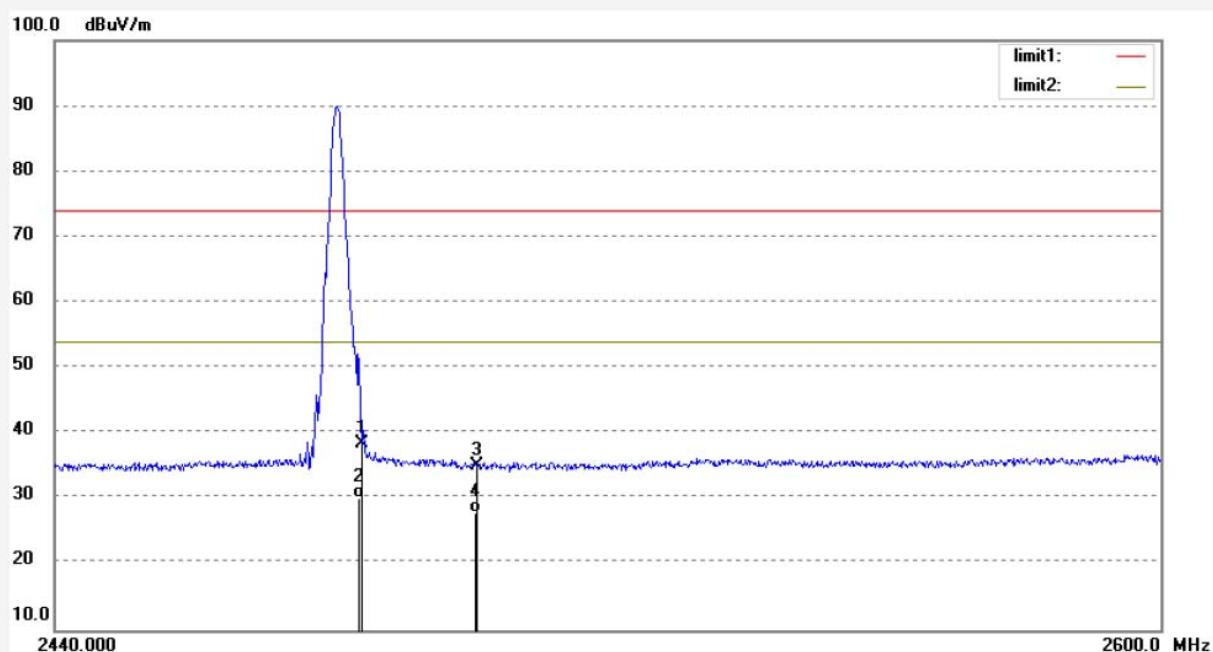

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.30	-5.89	38.41	74.00	-35.59	peak	100	285	
2	2483.500	35.99	-5.89	30.10	54.00	-23.90	AVG	100	285	
3	2500.000	40.95	-5.81	35.14	74.00	-38.86	peak	100	165	
4	2500.000	33.81	-5.81	28.00	54.00	-26.00	AVG	100	165	

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: JP2019 #57	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2019/06/18
Temp. (C)/Hum.(%) 25 C / 55 %	Time: 18:18:44
EUT: Realtek Bluetooth MP Kit	Engineer Signature: Ben
Mode: TX 2480MHz	Distance: 3m
Model: TWS600	
Manufacturer: Head-Direct	
Note: Report NO.:ATE20190768	

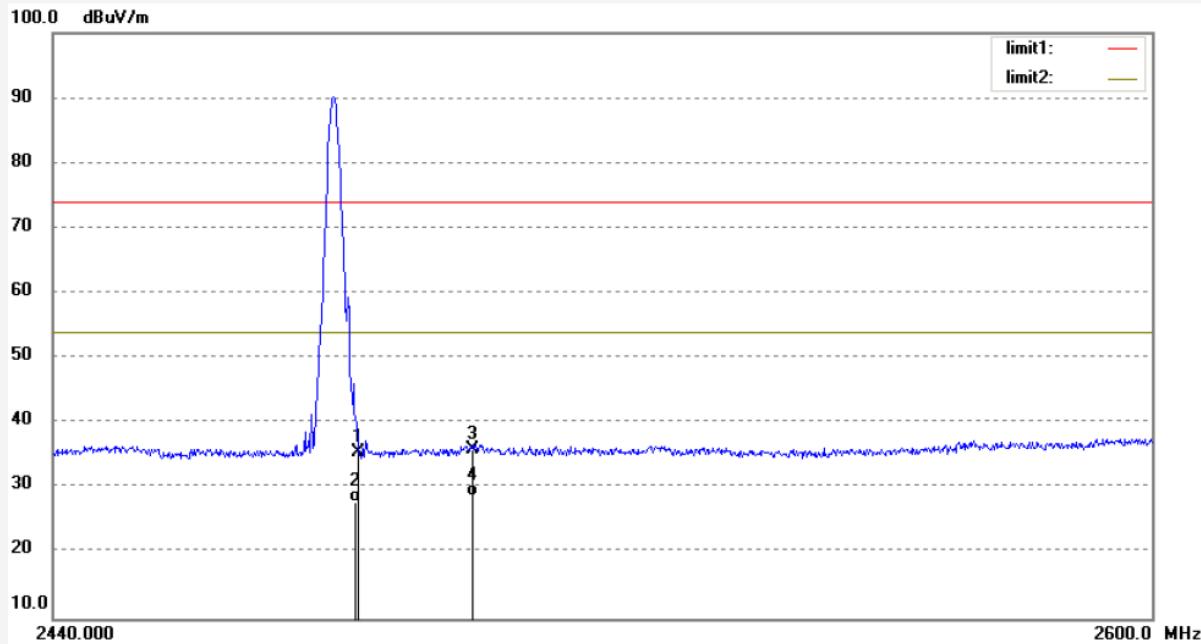

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	41.45	-5.89	35.56	74.00	-38.44	peak	100	185	
2	2483.500	33.79	-5.89	27.90	54.00	-26.10	AVG	100	185	
3	2500.000	41.89	-5.81	36.08	74.00	-37.92	peak	100	213	
4	2500.000	34.61	-5.81	28.80	54.00	-25.20	AVG	100	213	

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

10. RADIATED SPURIOUS EMISSION TEST

10.1. Block Diagram of Test Setup


10.1.1. Block diagram of connection between the EUT and peripherals

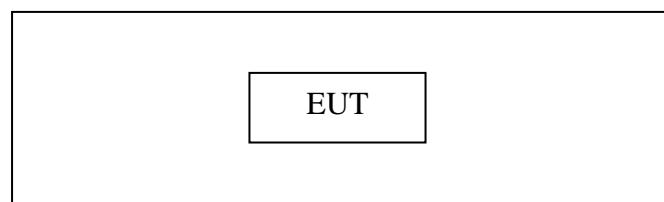


Setup: Transmitting mode

10.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

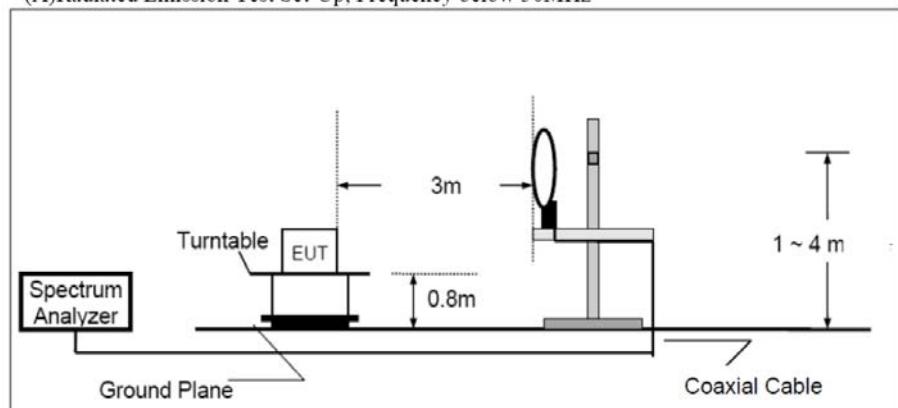

(B) Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

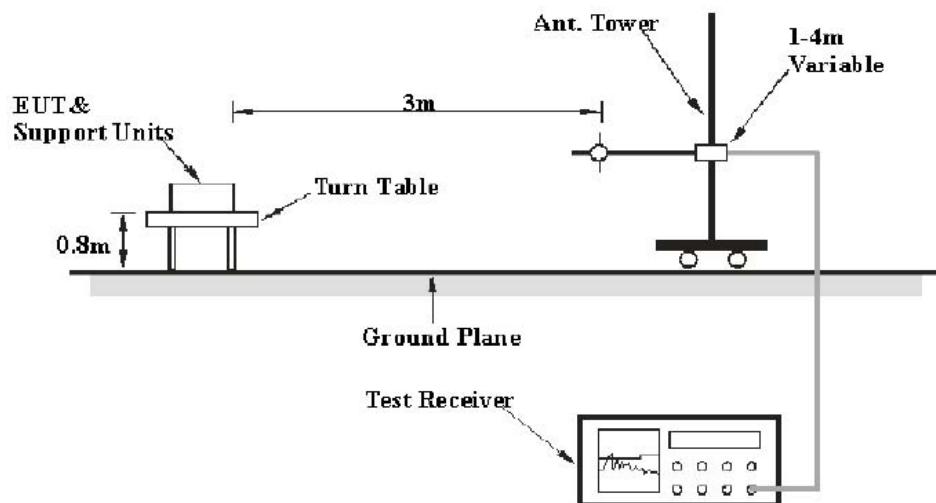

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

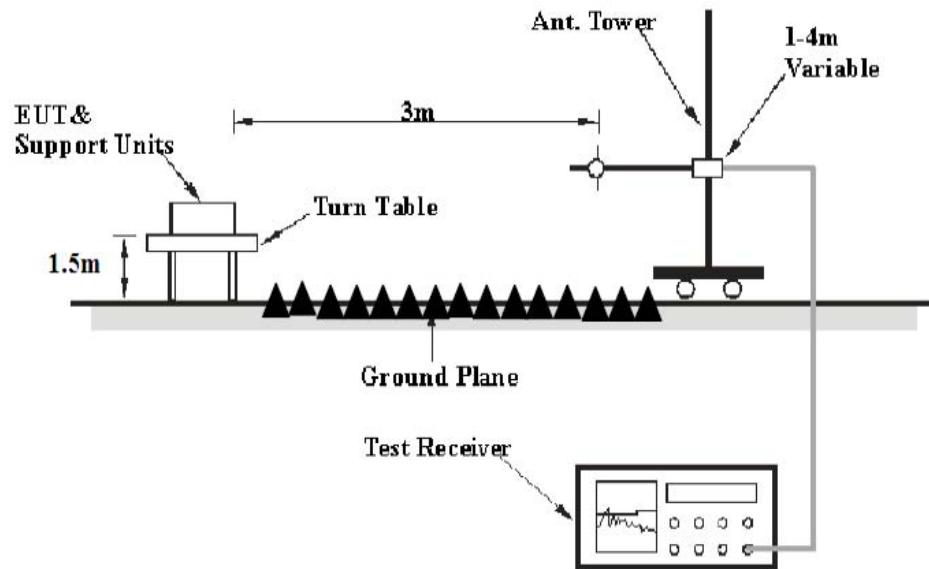

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 26.5GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading.

10.7.Data Sample

Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
X.XX	43.85	-22.22	21.63	43.5	-21.87	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB μ V) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB μ V/m) = Reading(dB μ V) + Factor(dB/m)

Limit (dB μ V/m) = Limit stated in standard

Margin (dB) = Result(dB μ V/m) - Limit (dB μ V/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB μ V/m)–Limit(dB μ V/m)

Result(dB μ V/m)= Reading(dB μ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

10.8.The Field Strength of Radiation Emission Measurement Results

Pass.

Test Lab: 3m Anechoic chamber

The frequency range from 9kHz to 26.5GHz is checked.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The radiation emissions from 9kHz-30MHz and 18-26.5GHz are not reported, because the test values lower than the limits of 20dB.

The spectrum analyzer plots are attached as below.

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: JP2019 #26

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/17

Temp. (C)/Hum.(%) 23 C / 48 %

Time: 19:13:22

EUT: Realteek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2402MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

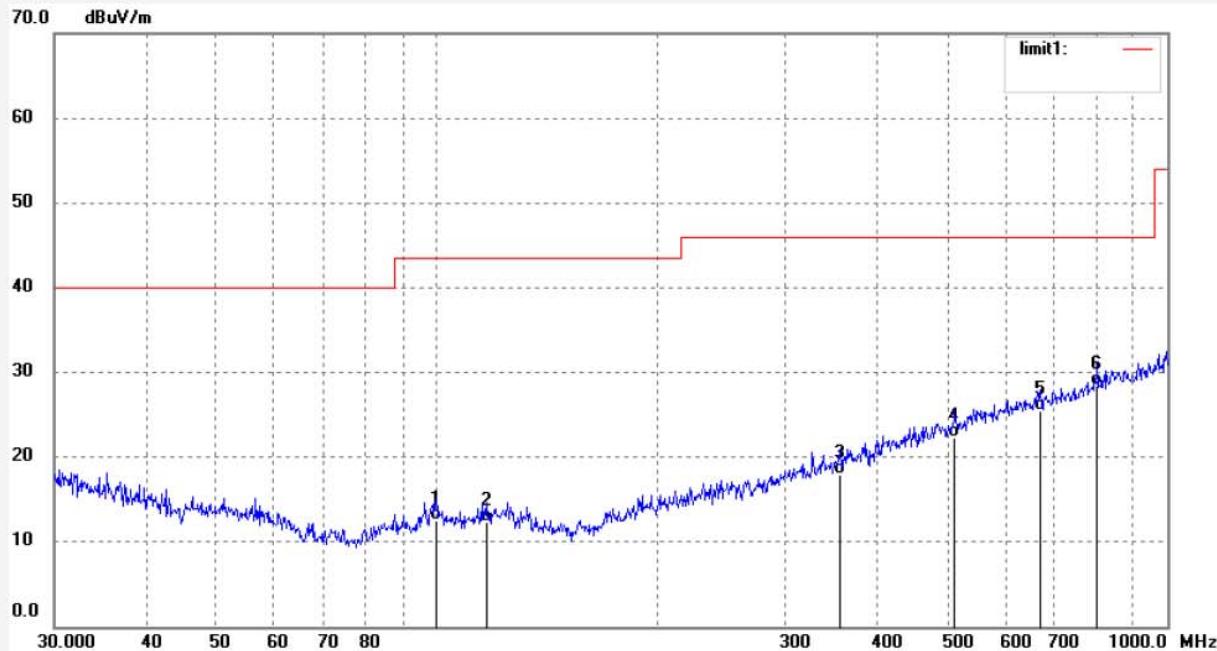

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	99.8777	25.59	-13.09	12.50	43.50	-31.00	QP	100	163	
2	116.9495	25.36	-13.06	12.30	43.50	-31.20	QP	100	156	
3	356.6758	25.33	-7.33	18.00	46.00	-28.00	QP	100	185	
4	511.8352	26.43	-4.03	22.40	46.00	-23.60	QP	100	196	
5	670.4893	26.87	-1.47	25.40	46.00	-20.60	QP	100	236	
6	801.7863	27.53	0.87	28.40	46.00	-17.60	QP	100	245	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: JP2019 #27

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/17

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:15:01

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2402MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

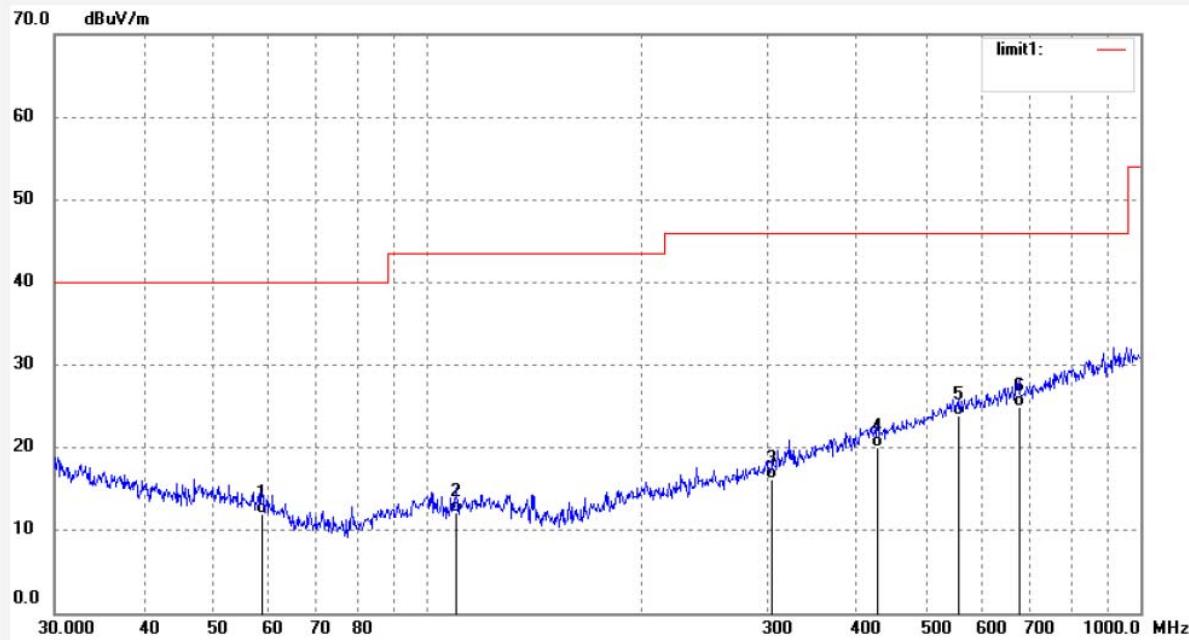

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	58.6126	25.64	-13.64	12.00	40.00	-28.00	QP	100	175	
2	109.7960	25.92	-13.82	12.10	43.50	-31.40	QP	100	215	
3	304.6099	25.03	-8.93	16.10	46.00	-29.90	QP	100	245	
4	428.0193	25.68	-5.68	20.00	46.00	-26.00	QP	100	196	
5	556.7744	26.84	-2.94	23.90	46.00	-22.10	QP	100	185	
6	675.2080	26.40	-1.40	25.00	46.00	-21.00	QP	100	162	

Job No.: JP2019 #28

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/17

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:17:29

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2440MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

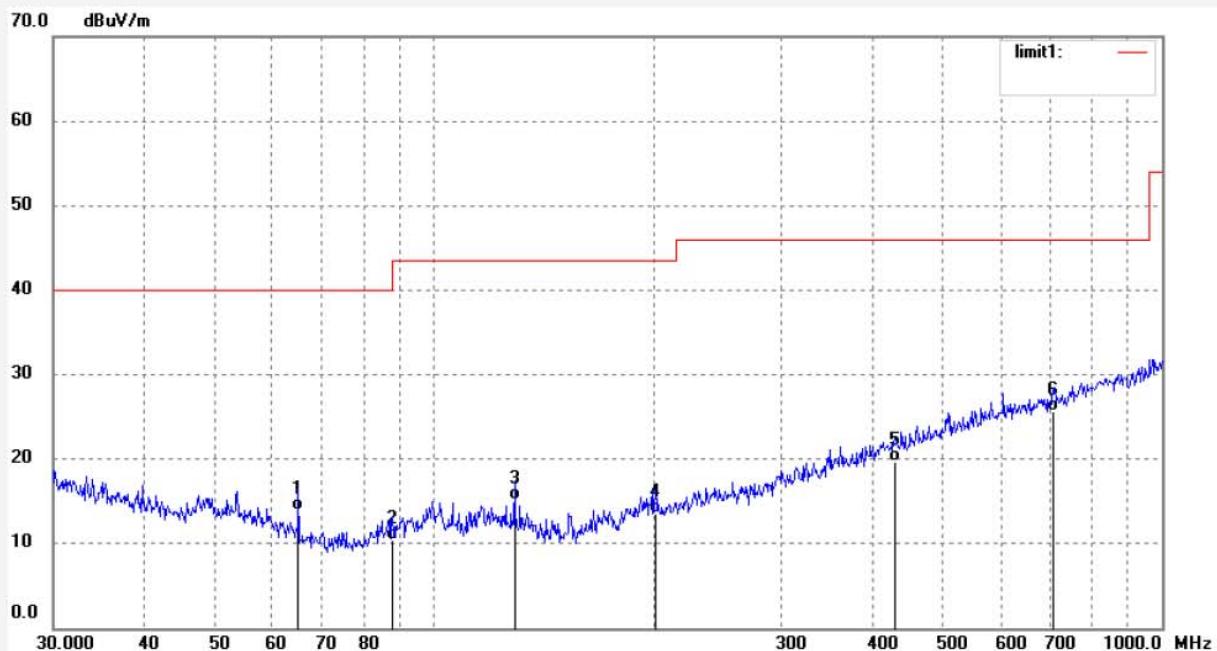

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	65.1145	29.60	-15.70	13.90	40.00	-26.10	QP	100	136	
2	87.7248	25.66	-15.16	10.50	40.00	-29.50	QP	100	185	
3	129.0146	28.94	-13.74	15.20	43.50	-28.30	QP	100	165	
4	201.3930	25.72	-12.22	13.50	43.50	-30.00	QP	100	256	
5	429.5228	25.34	-5.64	19.70	46.00	-26.30	QP	100	236	
6	709.1823	26.52	-0.92	25.60	46.00	-20.40	QP	100	296	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: JP2019 #29

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/17

Temp. (C)/Hum.(%) 23 C / 48 %

Time: 19:19:06

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2440MHz

Distance: 3m

Model: TWS600


Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

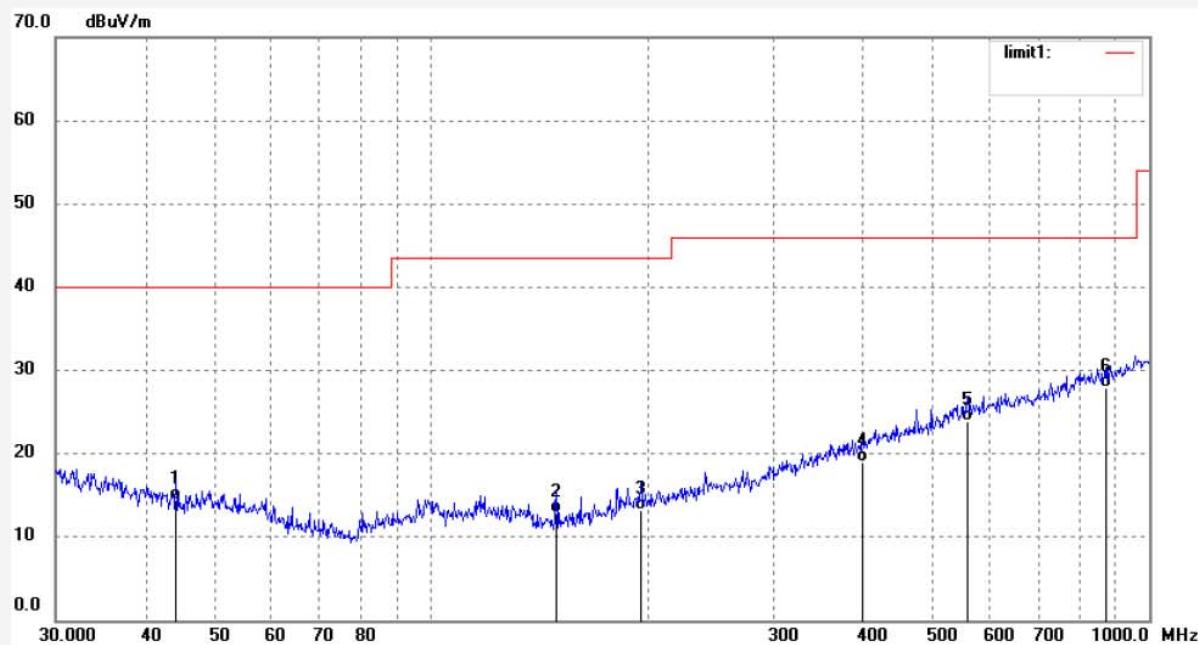

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	44.1202	26.93	-12.43	14.50	40.00	-25.50	QP	100	145	
2	149.4857	27.95	-15.05	12.90	43.50	-30.60	QP	100	285	
3	195.8220	25.60	-12.30	13.30	43.50	-30.20	QP	100	196	
4	399.0302	25.48	-6.48	19.00	46.00	-27.00	QP	100	185	
5	558.7302	26.82	-2.92	23.90	46.00	-22.10	QP	100	153	
6	872.1832	25.96	1.94	27.90	46.00	-18.10	QP	100	236	

Job No.: JP2019 #30	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2019/06/17
Temp. (C)/Hum.(%) 23 C / 48 %	Time: 19:21:03
EUT: Realtek Bluetooth MP Kit	Engineer Signature: Ben
Mode: TX 2480MHz	Distance: 3m
Model: TWS600	
Manufacturer: Head-Direct	
Note: Report NO.:ATE20190768	

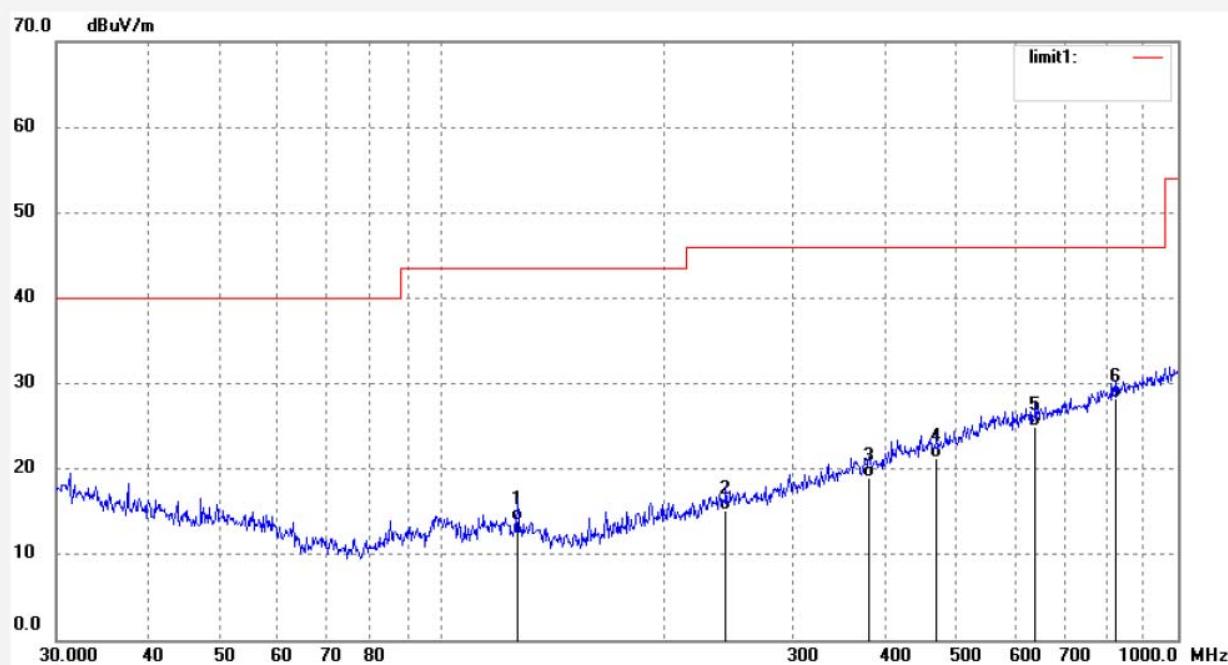

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	126.7723	27.68	-13.68	14.00	43.50	-29.50	QP	100	126	
2	243.3772	25.70	-10.60	15.10	46.00	-30.90	QP	100	165	
3	379.9141	25.98	-6.98	19.00	46.00	-27.00	QP	100	263	
4	470.5232	26.35	-5.05	21.30	46.00	-24.70	QP	100	195	
5	640.6110	26.80	-1.90	24.90	46.00	-21.10	QP	100	215	
6	824.5968	26.96	1.24	28.20	46.00	-17.80	QP	100	246	

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: JP2019 #31

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/17

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 19:23:53

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2480MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

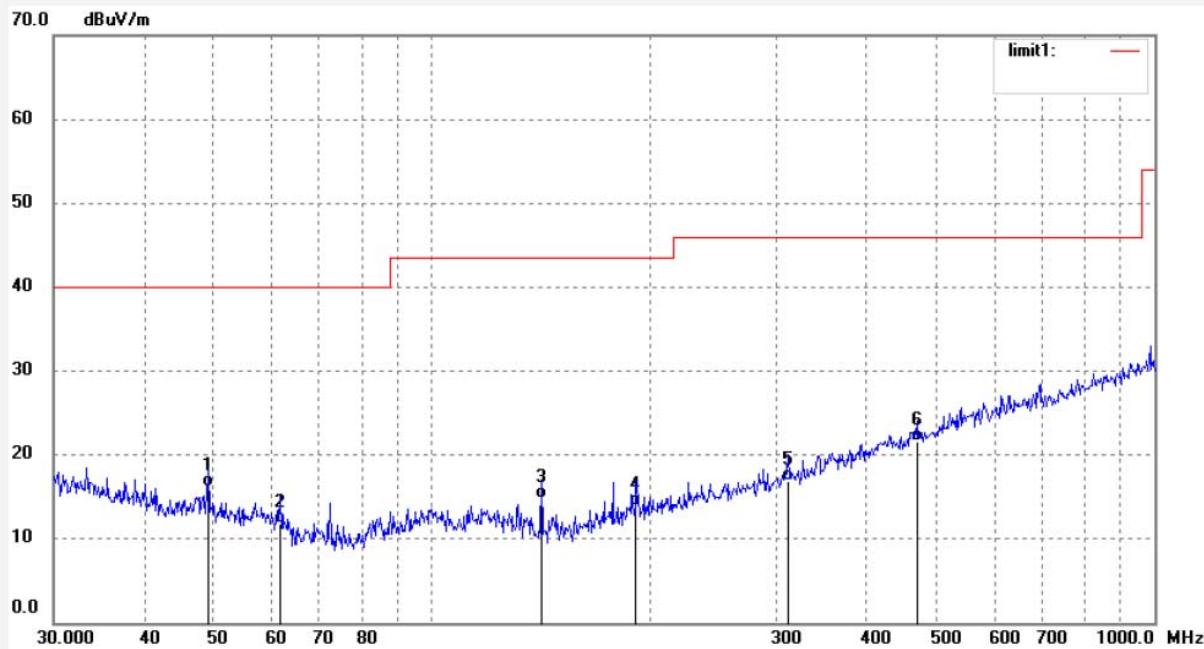

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.1865	28.68	-12.58	16.10	40.00	-23.90	QP	100	263	
2	61.7781	26.35	-14.55	11.80	40.00	-28.20	QP	100	285	
3	141.8262	29.91	-15.11	14.80	43.50	-28.70	QP	100	236	
4	191.7450	26.32	-12.42	13.90	43.50	-29.60	QP	100	175	
5	311.0867	25.60	-8.70	16.90	46.00	-29.10	QP	100	196	
6	468.8762	26.78	-5.08	21.70	46.00	-24.30	QP	100	136	

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: JP2019 #42	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2019/06/18
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 17:51:39
EUT: Realtek Bluetooth MP Kit	Engineer Signature: Ben
Mode: TX 2402MHz	Distance: 3m
Model: TWS600	
Manufacturer: Head-Direct	
Note: Report NO.:ATE20190768	

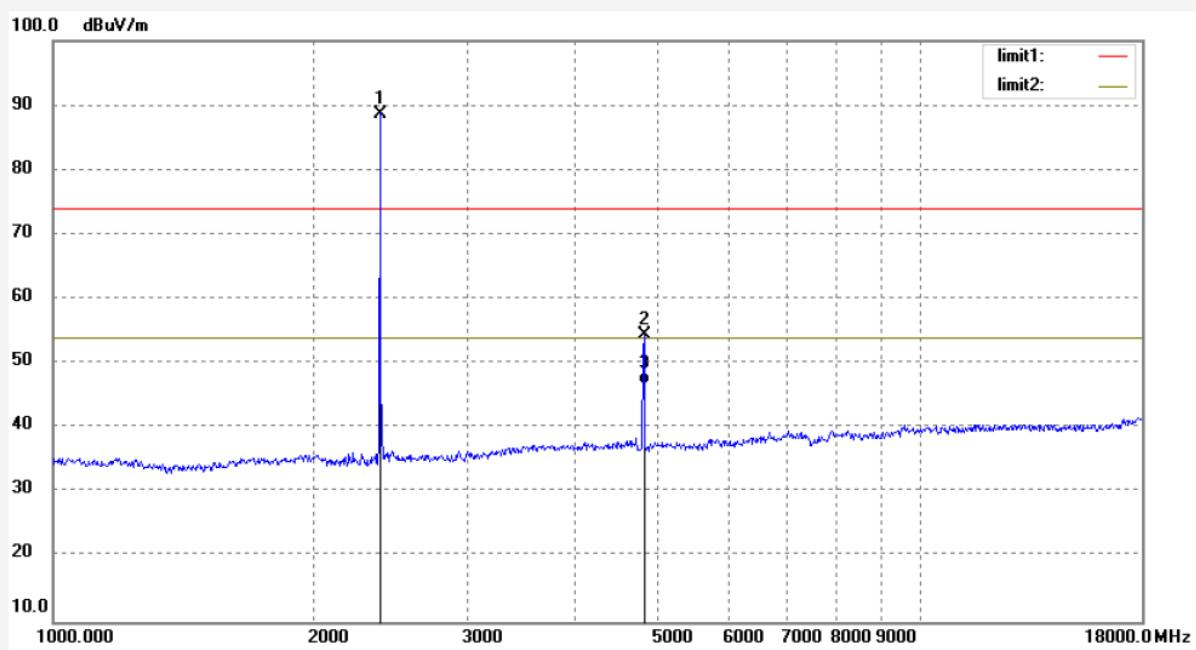

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	95.12	-6.37	88.75			peak	100	147	
2	4804.000	53.54	1.00	54.54	74.00	-19.46	peak	100	165	
3	4804.000	45.80	1.00	46.80	54.00	-7.20	AVG	100	165	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396


Job No.: JP2019 #43	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2019/06/18
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 17:53:41
EUT: Realtek Bluetooth MP Kit	Engineer Signature: Ben
Mode: TX 2402MHz	Distance: 3m
Model: TWS600	
Manufacturer: Head-Direct	
Note: Report NO.:ATE20190768	

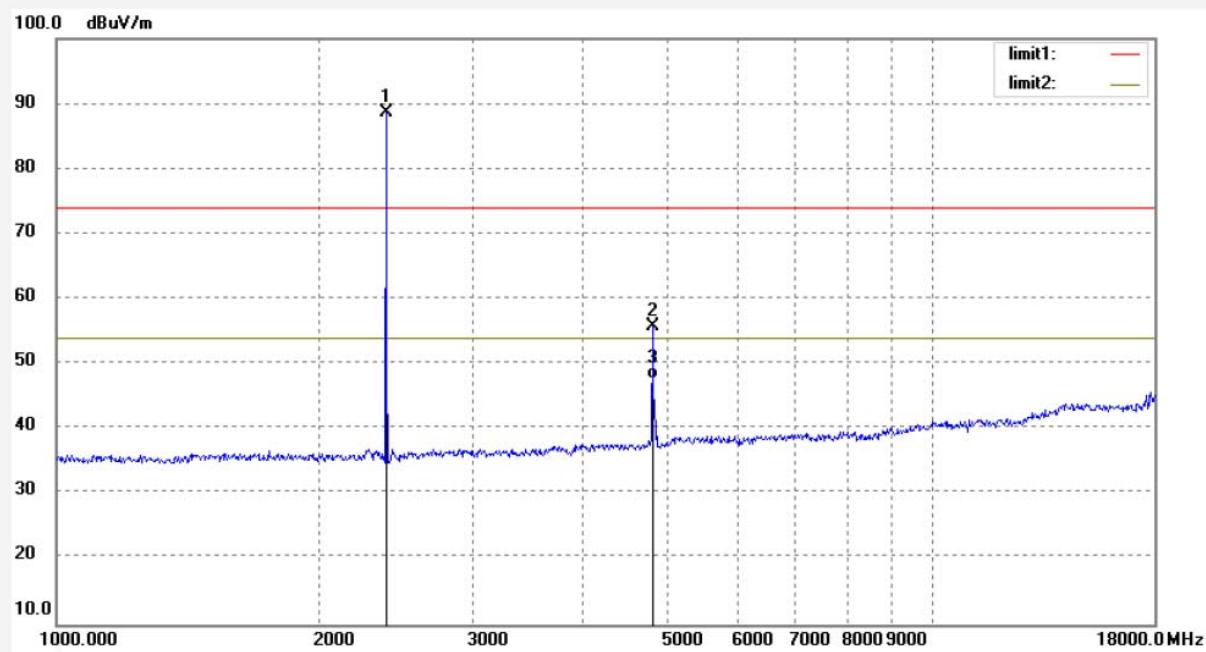

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	95.00	-6.37	88.63			peak	100	125	
2	4804.000	54.77	1.00	55.77	74.00	-18.23	peak	100	185	
3	4804.000	46.80	1.00	47.80	54.00	-6.20	AVG	100	185	

Job No.: JP2019 #44 Polarization: Vertical
 Standard: FCC PK Power Source: DC 3.7V
 Test item: Radiation Test Date: 2019/06/18
 Temp.(C)/Hum.(%) 25 C / 55 % Time: 17:55:04
 EUT: Realtek Bluetooth MP Kit Engineer Signature: Ben
 Mode: TX 2440MHz Distance: 3m
 Model: TWS600
 Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

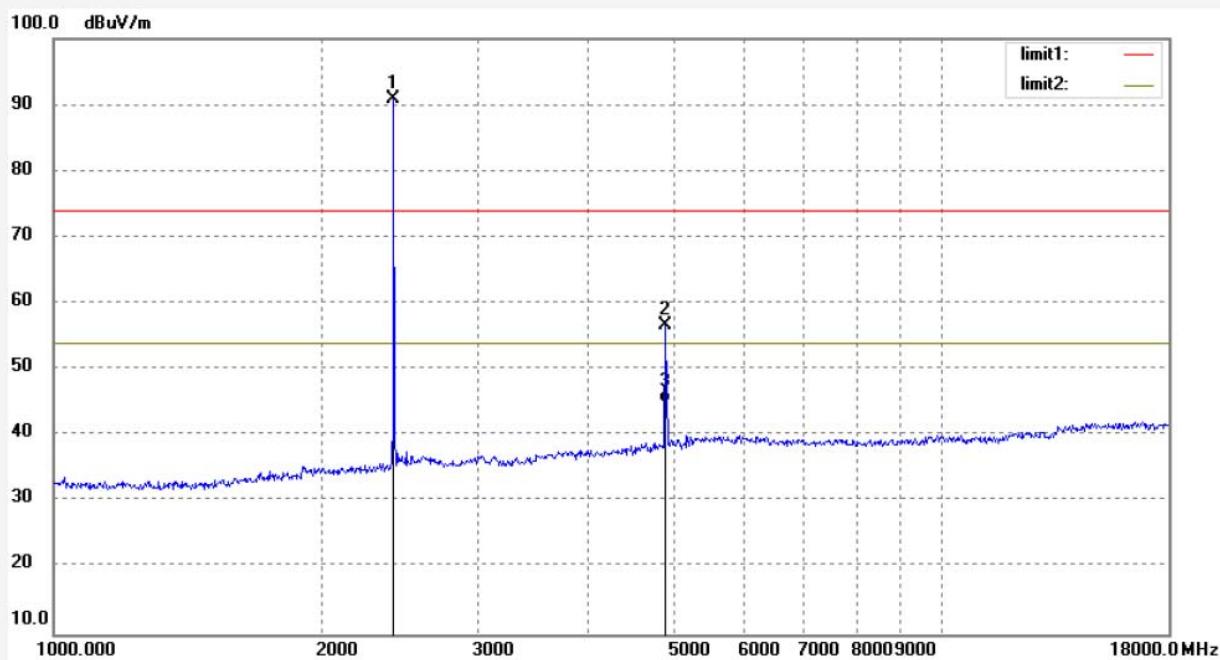

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	97.04	-6.20	90.84			peak	100	310	
2	4880.000	55.32	1.36	56.68	74.00	-17.32	peak	100	110	
3	4880.000	43.63	1.36	44.99	54.00	-9.01	AVG	100	110	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: JP2019 #45	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2019/06/18
Temp. (C)/Hum.(%) 25 C / 55 %	Time: 17:57:06
EUT: Realtek Bluetooth MP Kit	Engineer Signature: Ben
Mode: TX 2440MHz	Distance: 3m
Model: TWS600	
Manufacturer: Head-Direct	
Note: Report NO.:ATE20190768	

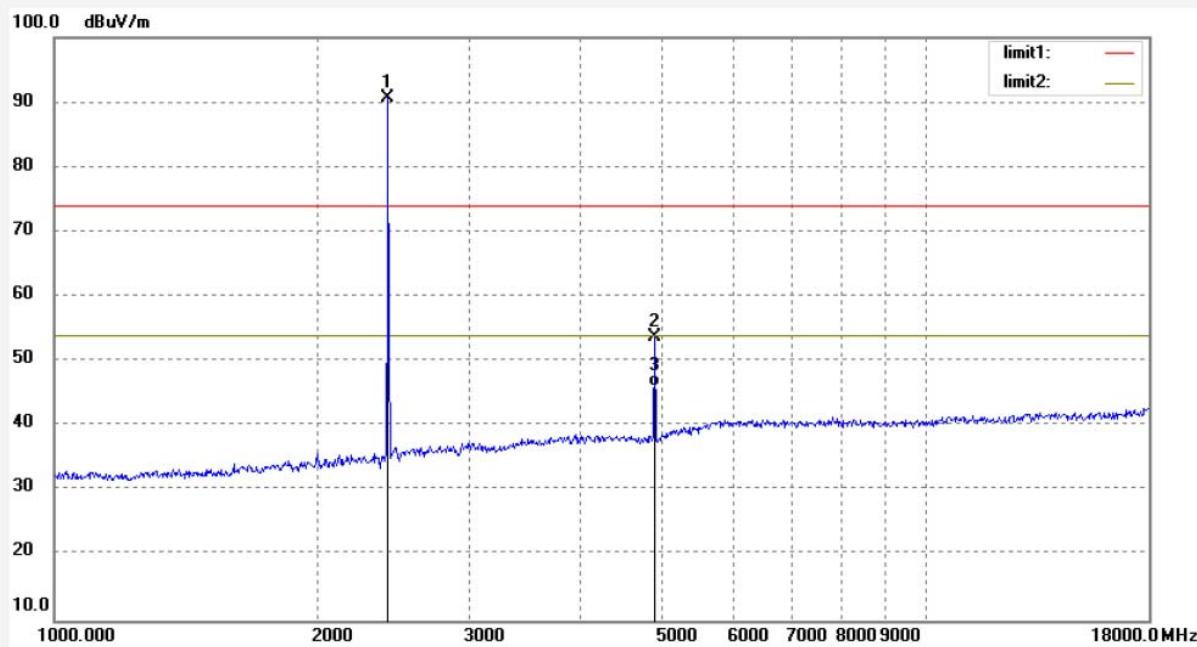

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	96.96	-6.20	90.76			peak	100	222	
2	4880.000	52.36	1.36	53.72	74.00	-20.28	peak	100	184	
3	4880.000	44.84	1.36	46.20	54.00	-7.80	AVG	100	184	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: JP2019 #46

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/18

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17:59:46

EUT: Realteek Bluetooth MP Kit

Engineer Signature: Ben

Mode: TX 2480MHz


Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

100.0 dBuV/m

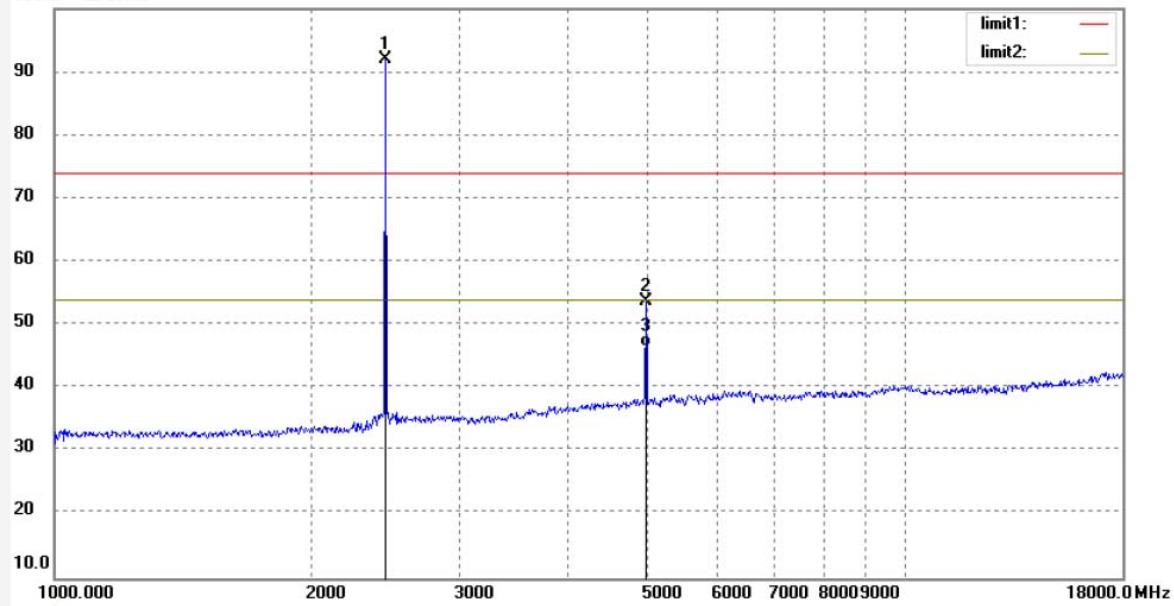

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	98.05	-6.04	92.01			peak	100	125	
2	4960.000	52.16	1.68	53.84	74.00	-20.16	peak	100	265	
3	4960.000	44.82	1.68	46.50	54.00	-7.50	AVG	100	265	

Job No.: JP2019 #47

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2019/06/18

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 18:02:56

EUT: Realtek Bluetooth MP Kit

Engineer Signature: Ben


Mode: TX 2480MHz

Distance: 3m

Model: TWS600

Manufacturer: Head-Direct

Note: Report NO.:ATE20190768

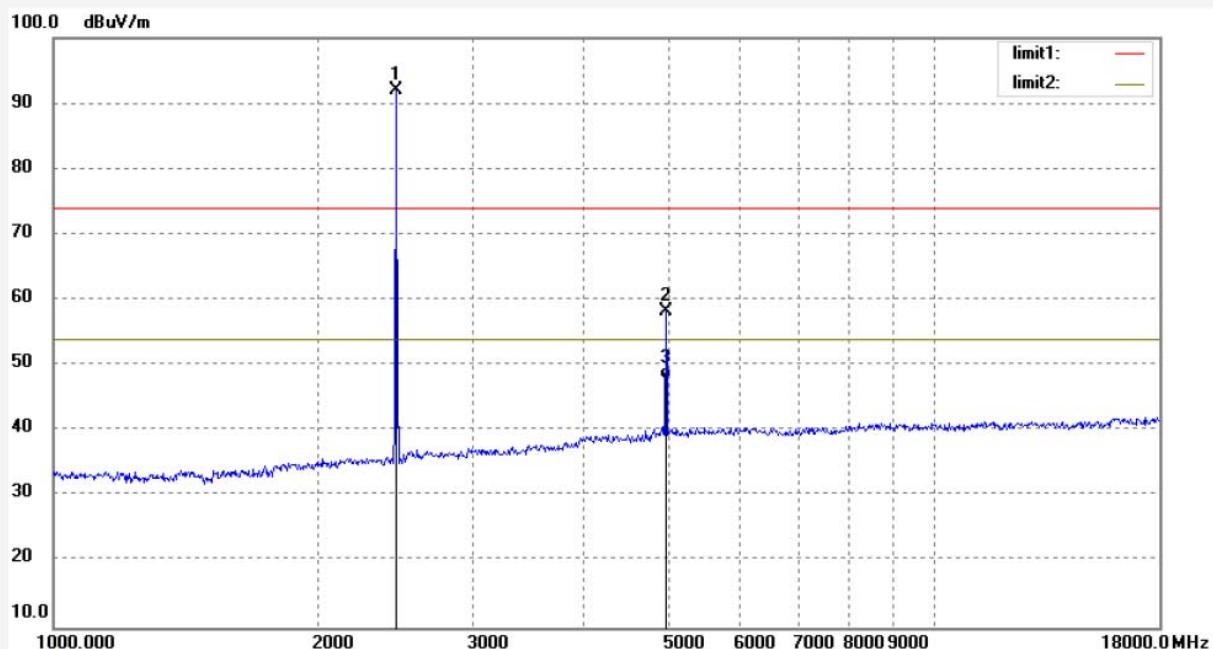

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	98.03	-6.04	91.99			peak	100	47	
2	4960.000	56.54	1.68	58.22	74.00	-15.78	peak	100	125	
3	4960.000	46.32	1.68	48.00	54.00	-6.00	AVG	100	125	


11. ANTENNA REQUIREMENT

11.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2.0 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

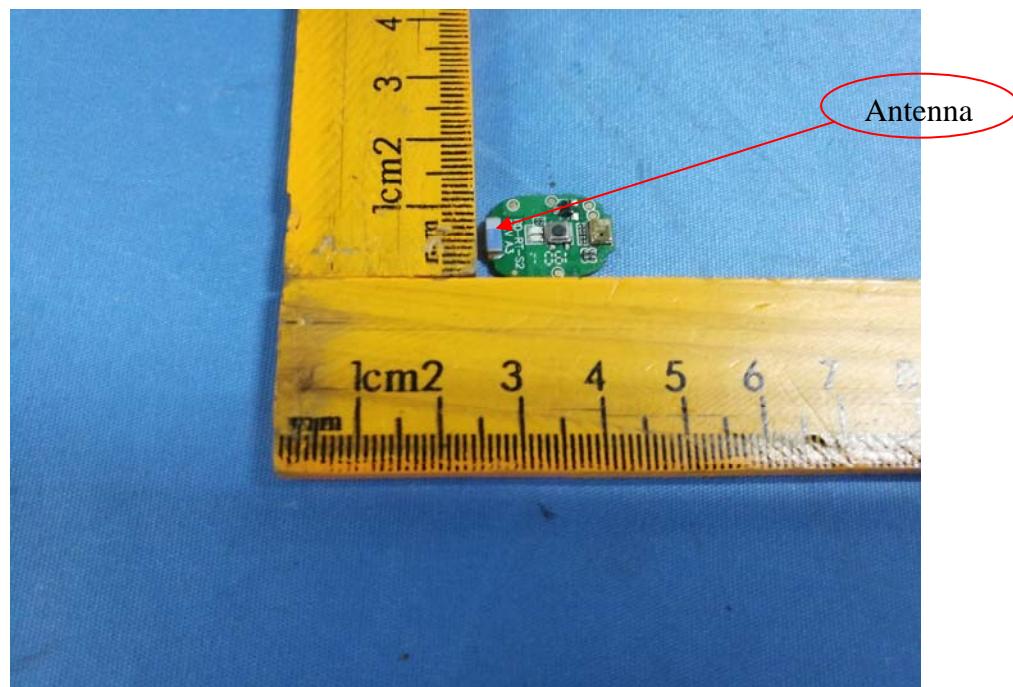

***** End of Test Report *****