

FCC REPORT

Applicant: Unitone Communication System Inc.

Address of Applicant: 220 East 23rd Street, Suite 411, New York, NY 10010

Equipment Under Test (EUT)

Product Name: 280 Villa Panel

Model No.: 280SD-C5

FCC ID: 2ATPM-UNI-OACP

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 26 Jul., 2021

Date of Test: 27 Jul., to 11 Aug., 2021

Date of report issued: 17 Aug., 2021

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	17 Aug., 2021	Original

Tested by:

Tanet Wei
Test Engineer

Date:

17 Aug., 2021

Reviewed by:

Winner Zhang
Project Engineer

Date:

17 Aug., 2021

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE.....	5
5.4 MEASUREMENT UNCERTAINTY	5
5.5 DESCRIPTION OF SUPPORT UNITS	6
5.6 RELATED SUBMITTAL(S) / GRANT (S).....	6
5.7 DESCRIPTION OF CABLE USED	6
5.8 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	6
5.9 LABORATORY FACILITY	6
5.10 LABORATORY LOCATION.....	6
5.11 TEST INSTRUMENTS LIST	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 CONDUCTED EMISSION.....	8
6.2 RADIATED EMISSION	13
7 TEST SETUP PHOTO	21
8 EUT CONSTRUCTIONAL DETAILS	24

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	Pass
Radiated Emission	Part 15.109	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: The EUT not applicable of the test item.		
Test Method:	ANSI C63.4:2014	

5 General Information

5.1 Client Information

Applicant:	Unitone Communication System Inc.
Address:	220 East 23rd Street, Suite 411, New York, NY 10010
Manufacturer/ Factory:	Dsnake (Xiamen) Intelligent Technology Co., Ltd
Address:	NorthGate, No.1, HaijingRoad, HaicangDistrict, Xiamen, 361026, Fujian, China

5.2 General Description of E.U.T.

Product Name:	280 Villa Panel
Model No.:	280SD-C5
Power supply:	DC 48V/POE 48V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test Mode

Operating mode	Detail description
Working mode	Keep the EUT in Working mode
POE mode	Keep the EUT in POE mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
MERCURY	Adapter	M535122-2X1	N/A	DoC
MERCURY	Switch	MS08CP	120C0N1000156	DoC

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

Cable Type	Description	Length	From	To
N/A				

5.8 Additions to, deviations, or exclusions from the method

No

5.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.10 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://www.ccis-cb.com>


5.11 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	966	01-19-2021	01-18-2024
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-03-2021	03-02-2022
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-03-2021	03-02-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-03-2021	03-02-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-18-2021	06-17-2022
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2020	11-17-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-03-2021	03-02-2022
Pre-amplifier	CD	PAP-1G18	11804	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2020	11-17-2021
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021	03-02-2022
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-03-2021	03-02-2022
Cable	MICRO-COAX	MFR64639	K10742-5	03-03-2021	03-02-2022
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-03-2021	03-02-2022
10m SAC	ETS	RFSD-100-F/A	Q2005	03-31-2021	04-01-2024
BiConiLog Antenna	SCHWARZBECK	VULB 9168	1249	03-31-2021	04-01-2022
BiConiLog Antenna	SCHWARZBECK	VULB 9168	1250	03-31-2021	04-01-2022
EMI Test Receiver	R&S	ESR 3	102800	04-06-2021	04-07-2022
EMI Test Receiver	R&S	ESR 3	102802	04-06-2021	04-07-2022
Pre-amplifier	Bost	LNA 0920N	2016	04-06-2021	04-07-2022
Pre-amplifier	Bost	LNA 0920N	2019	04-06-2021	04-07-2022
Test Software	R&S	EMC32	Version: 10.50.40		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-03-2021	03-02-2022
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-03-2021	03-02-2022
LISN	CHASE	MN2050D	1447	03-03-2021	03-02-2022
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	06-18-2021	06-17-2022
Cable	HP	10503A	N/A	03-03-2021	03-02-2022
EMI Test Software	AUDIX	E3	Version: 6.110919b		


6 Test results and Measurement Data

6.1 Conducted Emission

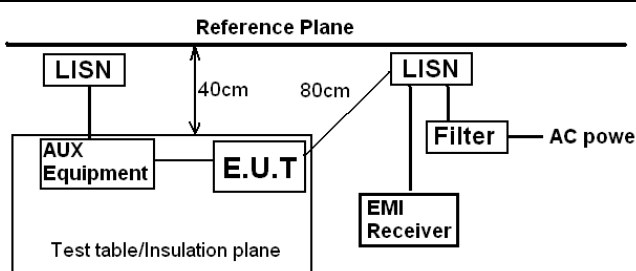Test Requirement:	FCC Part 15 B Section 15.107		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	0.5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4(latest version) on conducted measurement.		
Test Instruments:	Refer to section 5.11 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement data:

Product name:	280 Villa Panel	Product model:	280SD-C5
Test by:	Mike	Test mode:	POE mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

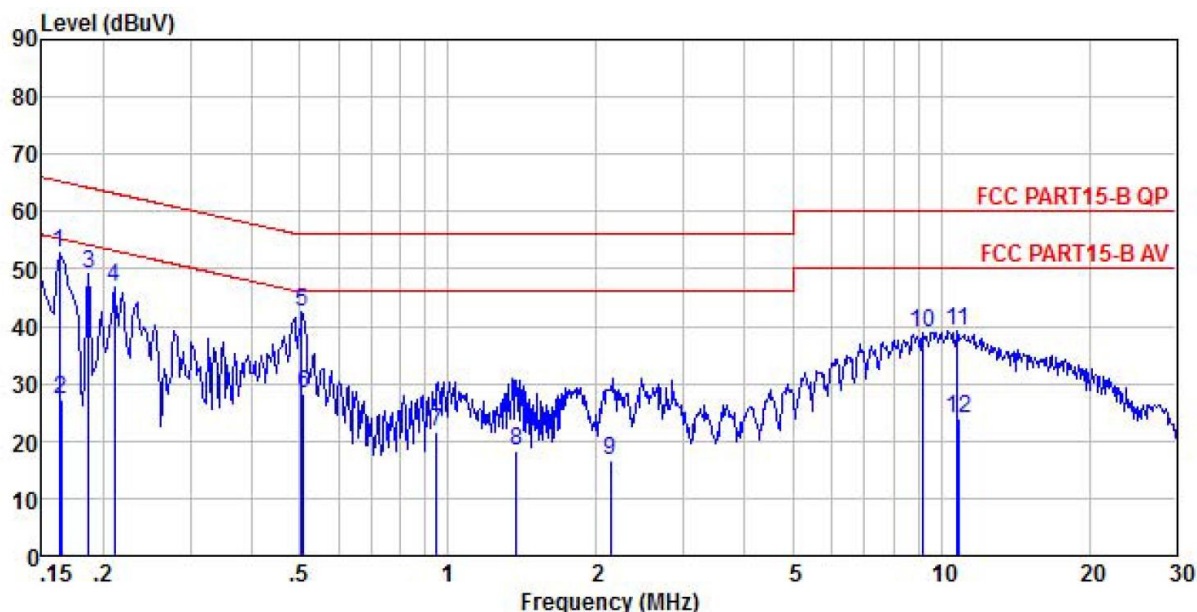


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	42.66	10.13	-0.08	0.01	52.72	65.34	-12.62	QP
2	0.164	17.01	10.13	-0.08	0.01	27.07	55.25	-28.18	Average
3	0.186	39.16	10.14	-0.13	0.02	49.19	64.20	-15.01	QP
4	0.211	36.95	10.15	-0.17	0.03	46.96	63.18	-16.22	QP
5	0.505	32.47	10.34	-0.35	0.03	42.49	56.00	-13.51	QP
6	0.510	18.23	10.35	-0.35	0.03	28.26	46.00	-17.74	Average
7	0.948	10.59	10.47	0.32	0.05	21.43	46.00	-24.57	Average
8	1.374	7.40	10.51	0.10	0.12	18.13	46.00	-27.87	Average
9	2.133	6.12	10.55	-0.30	0.19	16.56	46.00	-29.44	Average
10	9.204	26.26	10.81	1.80	0.11	38.98	60.00	-21.02	QP
11	10.790	25.84	10.87	2.25	0.12	39.08	60.00	-20.92	QP
12	10.847	10.49	10.87	2.28	0.12	23.76	50.00	-26.24	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	280 Villa Panel	Product model:	280SD-C5
Test by:	Mike	Test mode:	POE mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

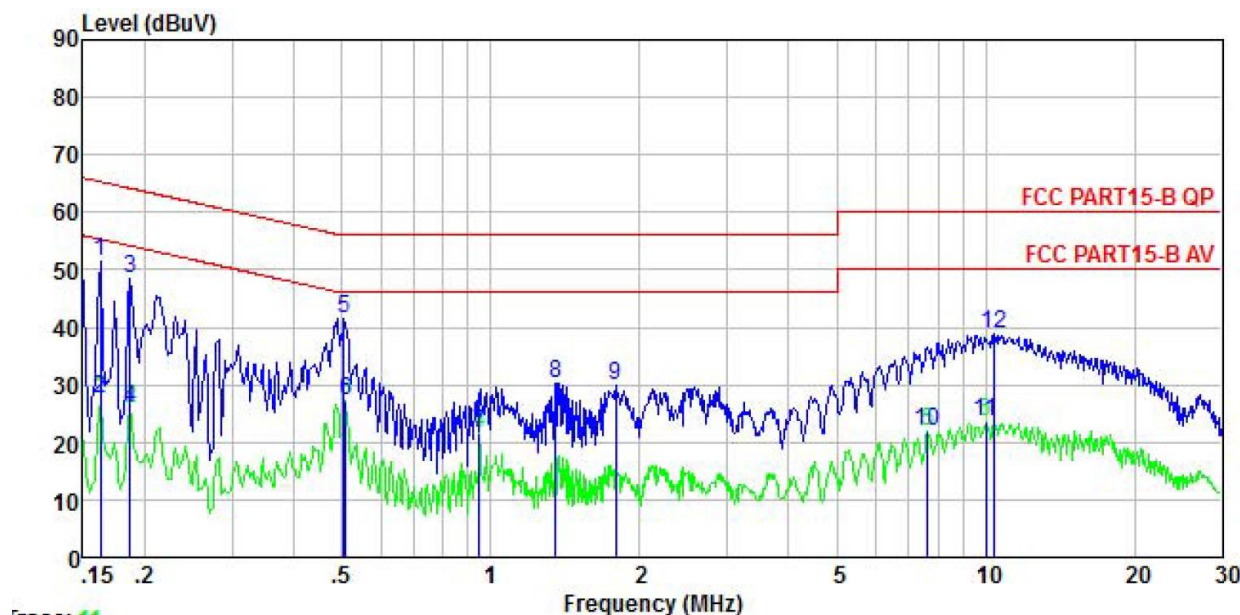


	Trace 11								
		Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	Freq	dBuV	dB	dB	dB	dBuV	dBuV	dB	
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	41.65	9.90	0.01	0.01	51.57	65.34	-13.77	QP
2	0.162	17.80	9.90	0.01	0.01	27.72	55.34	-27.62	Average
3	0.186	38.50	9.91	0.00	0.02	48.43	64.20	-15.77	QP
4	0.186	16.07	9.91	0.00	0.02	26.00	54.20	-28.20	Average
5	0.505	31.33	10.20	0.03	0.03	41.59	56.00	-14.41	QP
6	0.510	17.08	10.21	0.03	0.03	27.35	46.00	-18.65	Average
7	0.948	11.09	10.53	0.07	0.05	21.74	46.00	-24.26	Average
8	1.352	19.43	10.66	0.12	0.12	30.33	56.00	-25.67	QP
9	1.790	18.70	10.76	0.16	0.19	29.81	56.00	-26.19	QP
10	7.646	9.56	11.13	0.97	0.10	21.76	50.00	-28.24	Average
11	10.019	10.85	11.23	1.40	0.13	23.61	50.00	-26.39	Average
12	10.397	26.10	11.24	1.54	0.12	39.00	60.00	-21.00	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	280 Villa Panel	Product model:	280SD-C5
Test by:	Mike	Test mode:	Working mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

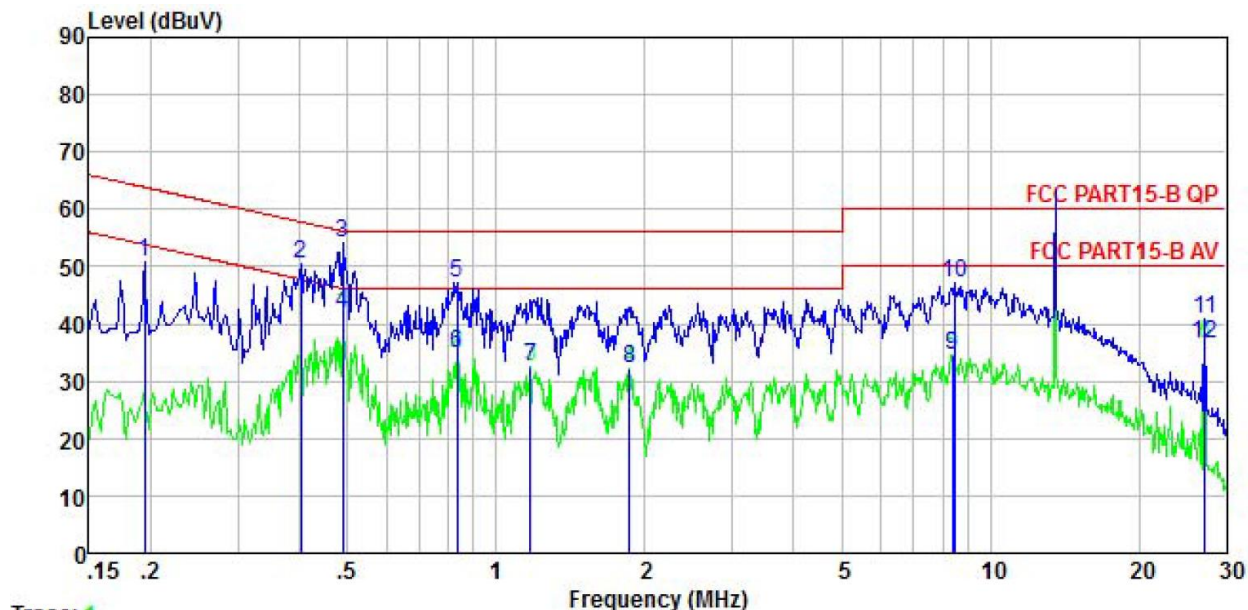


Trace	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.194	40.81	10.14	-0.15	0.03	50.83	63.84	-13.01	QP
2	0.402	39.71	10.28	0.42	0.04	50.45	57.81	-7.36	QP
3	0.489	44.16	10.33	-0.26	0.03	54.26	56.19	-1.93	QP
4	0.489	31.78	10.33	-0.26	0.03	41.88	46.19	-4.31	Average
5	0.835	36.67	10.44	0.01	0.03	47.15	56.00	-8.85	QP
6	0.835	24.41	10.44	0.01	0.03	34.89	46.00	-11.11	Average
7	1.172	21.77	10.49	0.29	0.09	32.64	46.00	-13.36	Average
8	1.858	21.89	10.53	-0.24	0.19	32.37	46.00	-13.63	Average
9	8.367	21.91	10.78	1.64	0.10	34.43	50.00	-15.57	Average
10	8.456	34.77	10.78	1.65	0.10	47.30	60.00	-12.70	QP
11	27.127	28.27	11.28	1.01	0.20	40.76	60.00	-19.24	QP
12	27.127	24.01	11.28	1.01	0.20	36.50	50.00	-13.50	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	280 Villa Panel	Product model:	280SD-C5
Test by:	Mike	Test mode:	Working mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

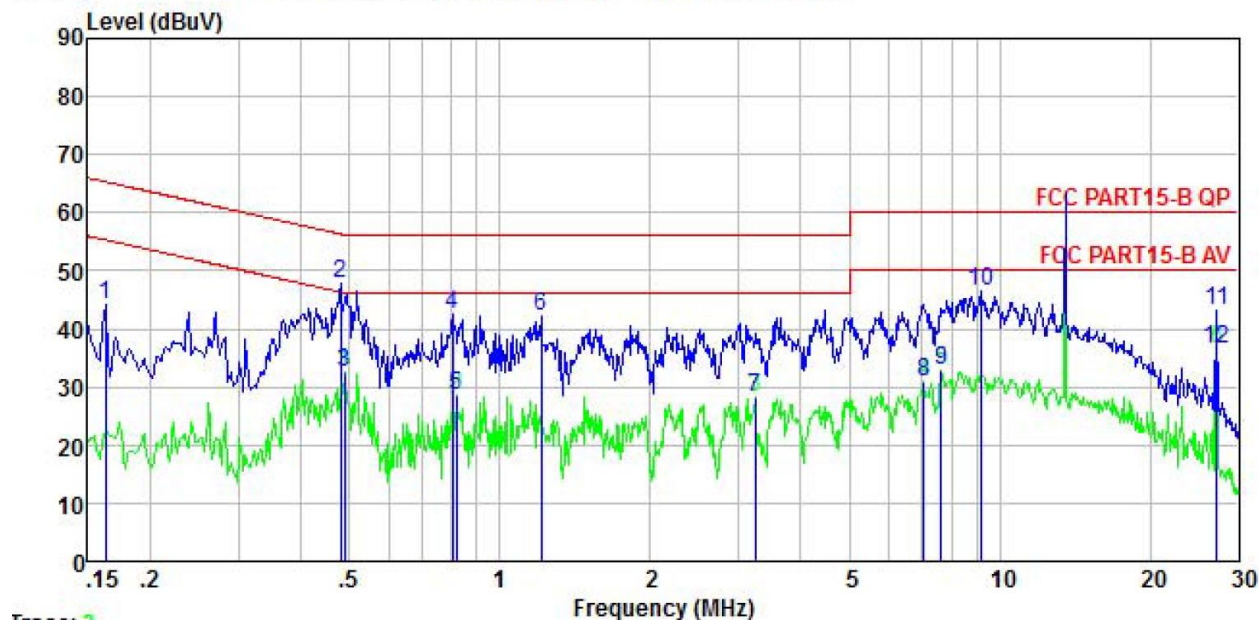



Trace 1

	Freq	Read	LISN	Aux	Cable	Level	Limit	Over	
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	Limit	Remark
			dB	dB	dB			dB	
1	0.162	34.34	9.90	-0.08	0.01	44.17	65.34	-21.17	QP
2	0.481	37.72	10.19	-0.24	0.03	47.70	56.32	-8.62	QP
3	0.489	22.66	10.19	-0.26	0.03	32.62	46.19	-13.57	Average
4	0.804	32.19	10.44	-0.07	0.03	42.59	56.00	-13.41	QP
5	0.817	17.95	10.45	-0.03	0.03	28.40	46.00	-17.60	Average
6	1.210	31.17	10.62	0.25	0.09	42.13	56.00	-13.87	QP
7	3.241	17.46	10.92	-0.16	0.07	28.29	46.00	-17.71	Average
8	7.062	18.38	11.10	1.34	0.10	30.92	50.00	-19.08	Average
9	7.646	20.05	11.13	1.47	0.10	32.75	50.00	-17.25	Average
10	9.156	33.24	11.20	1.80	0.11	46.35	60.00	-13.65	QP
11	27.127	30.32	11.75	1.01	0.20	43.28	60.00	-16.72	QP
12	27.127	23.42	11.75	1.01	0.20	36.38	50.00	-13.62	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.2 Radiated Emission

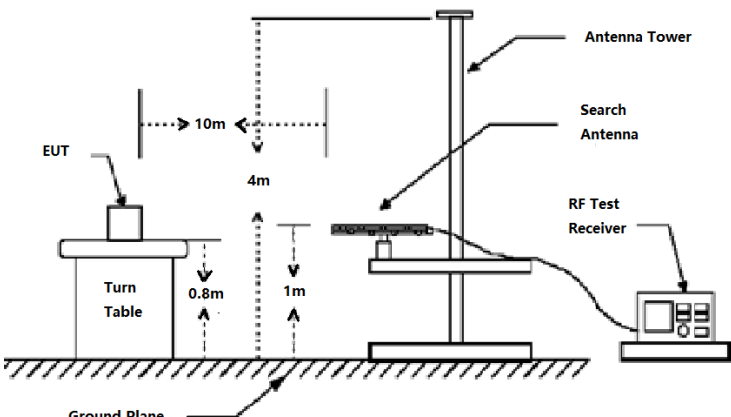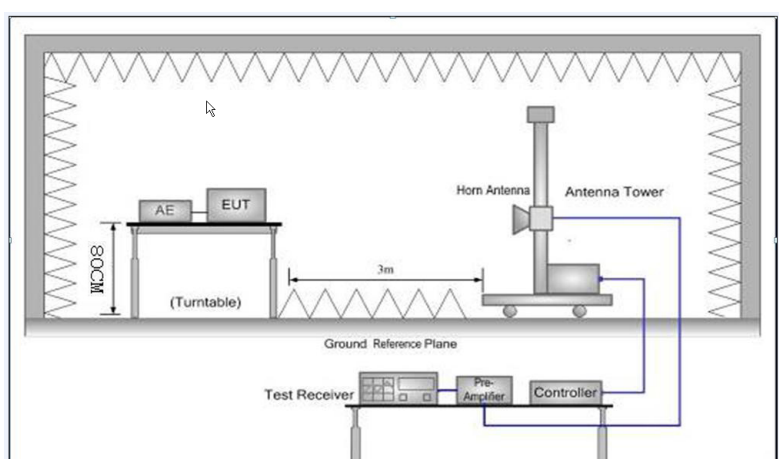
Test Requirement:	FCC Part 15 B Section 15.109				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency		Limit (dBuV/m @10m)		Remark
	30MHz-88MHz		30.0		Quasi-peak Value
	88MHz-216MHz		33.5		Quasi-peak Value
	216MHz-960MHz		36.0		Quasi-peak Value
	960MHz-1GHz		44.0		Quasi-peak Value
	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.0		Average Value
Test setup:			74.0		Peak Value
	Below 1GHz				
					
Test setup:	Above 1GHz				
					
	Test Procedure:				
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter chamber (below 1GHz) or 3 meter chamber (above 1GHz). The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 10 meters (below 1GHz) or 3 meters (above 1GHz) away from the interference-receiving antenna, which was mounted on				

	the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.11 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All of the observed value above 6GHz were the noise floor , which were no recorded

Measurement Data:
Below 1GHz:

Product Name:	280 Villa Panel	Product Model:	280SD-C5
Test By:	Mike	Test mode:	POE mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical & Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

Full Spectrum

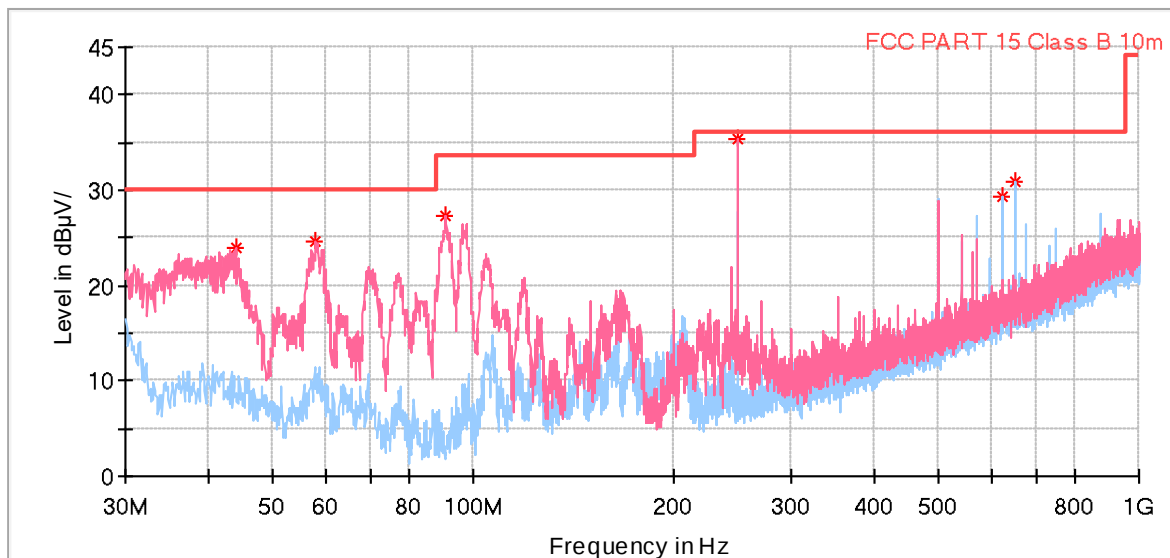
Critical_Freqs


Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.968000	23.91	30.00	6.09	100.0	V	32.0	-15.7
57.936000	24.62	30.00	5.38	100.0	V	168.0	-16.2
90.722000	27.23	33.50	6.27	100.0	V	241.0	-20.0
249.996000	35.45	36.00	0.55	100.0	V	241.0	-15.8
623.834000	29.31	36.00	6.69	100.0	H	32.0	-6.2
650.994000	30.80	36.00	5.20	100.0	H	160.0	-5.8

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Product Name:	280 Villa Panel	Product Model:	280SD-C5
Test By:	Mike	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical & Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Huni: 57%

Full Spectrum

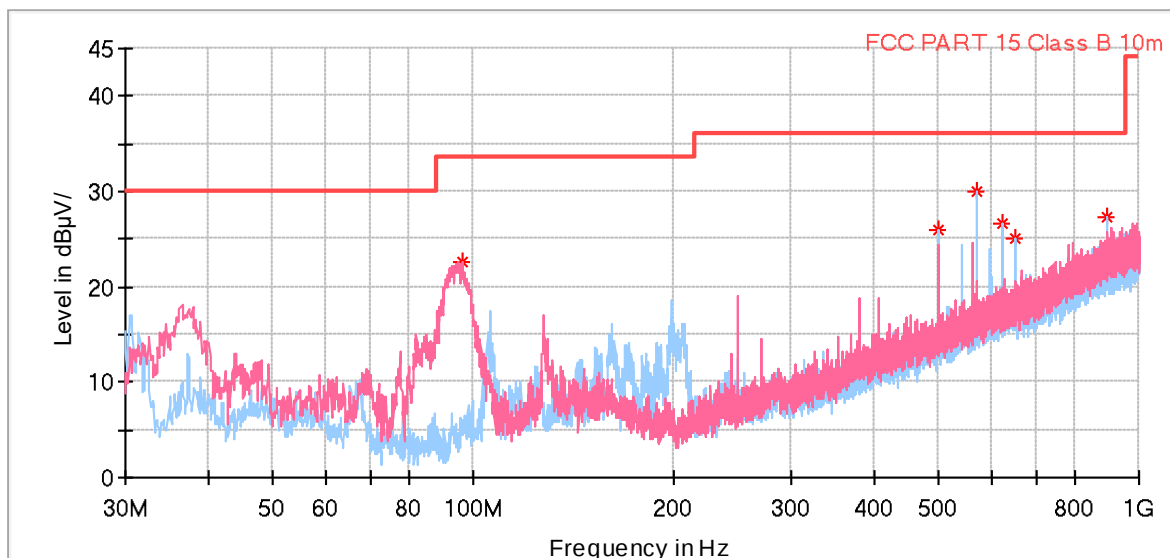

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
96.057000	22.57	33.50	10.93	100.0	V	249.0	-19.3
499.965000	25.87	36.00	10.13	100.0	H	18.0	-9.2
569.611000	29.90	36.00	6.10	100.0	H	201.0	-7.3
623.834000	26.53	36.00	9.47	100.0	H	240.0	-6.2
650.994000	25.18	36.00	10.82	100.0	H	272.0	-5.8
895.046000	27.30	36.00	8.70	100.0	H	267.0	-1.3

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz:

Product Name:	280 Villa Panel	Product Model:	280SD-C5
Test By:	Mike	Test mode:	POE mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Huni: 57%

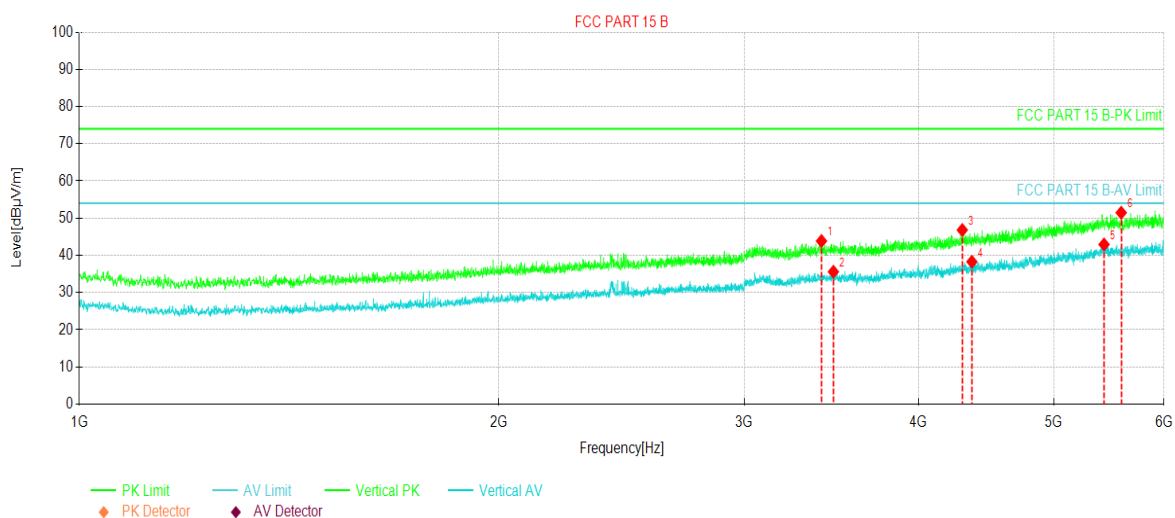


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	3407.50	59.12	43.85	-15.27	74.00	30.15	PK	Vertical
2	3475.62	50.53	35.58	-14.95	54.00	18.42	AV	Vertical
3	4300.00	58.45	46.81	-11.64	74.00	27.19	PK	Vertical
4	4368.75	49.59	38.27	-11.32	54.00	15.73	AV	Vertical
5	5434.37	48.90	42.92	-5.98	54.00	11.08	AV	Vertical
6	5590.62	57.54	51.47	-6.07	74.00	22.53	PK	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	280 Villa Panel	Product Model:	280SD-C5
Test By:	Mike	Test mode:	POE mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

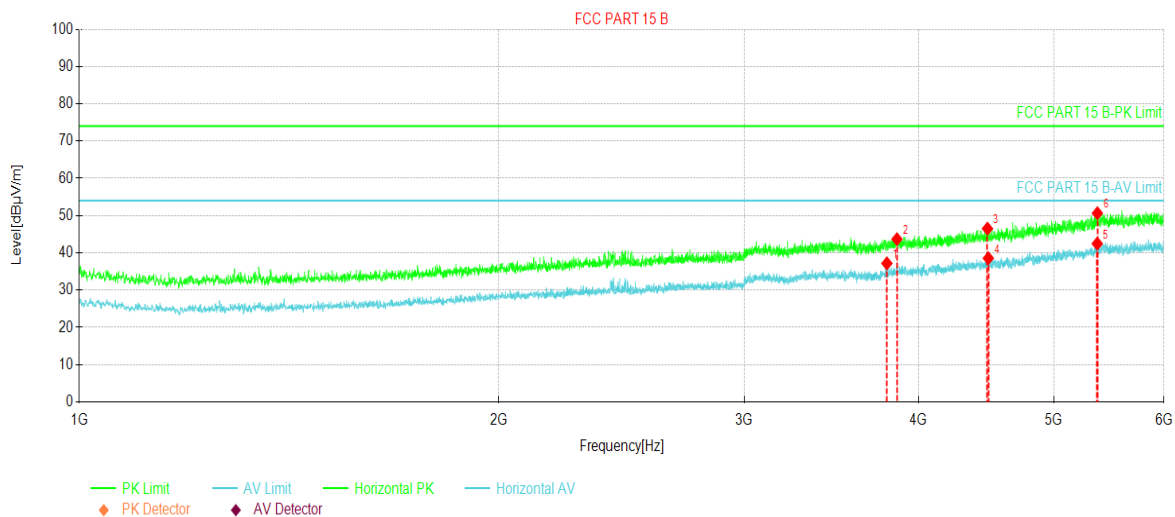


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	3796.25	51.07	37.17	-13.90	54.00	16.83	AV	Horizontal
2	3860.00	57.33	43.67	-13.66	74.00	30.33	PK	Horizontal
3	4482.50	57.36	46.49	-10.87	74.00	27.51	PK	Horizontal
4	4488.75	49.40	38.55	-10.85	54.00	15.45	AV	Horizontal
5	5373.75	48.59	42.47	-6.12	54.00	11.53	AV	Horizontal
6	5375.00	56.74	50.63	-6.11	74.00	23.37	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

Product Name:	280 Villa Panel	Product Model:	280SD-C5
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

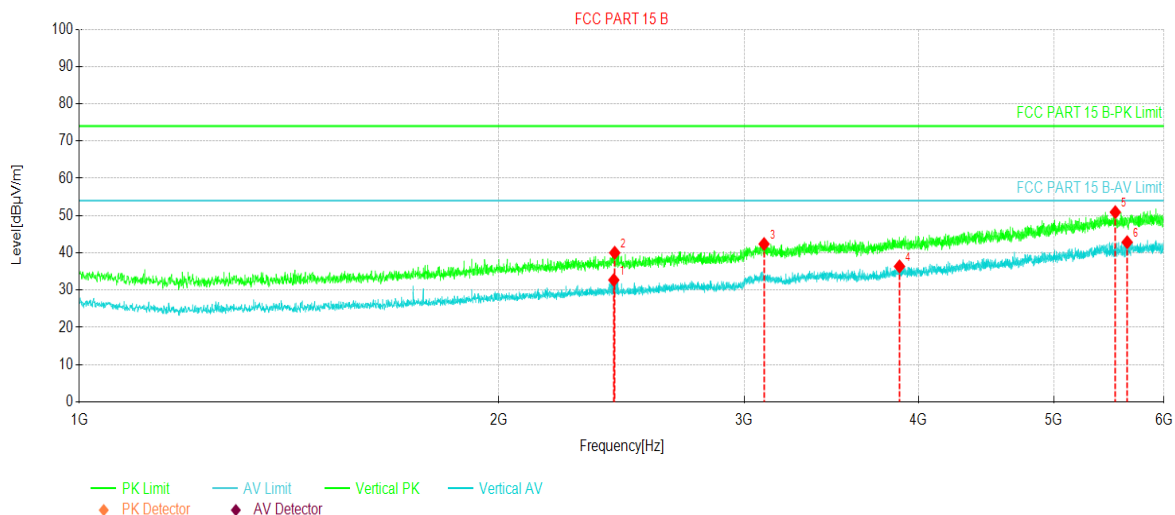


Suspected Data List

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2418.12	51.46	32.70	-18.76	54.00	21.30	AV	Vertical
2	2421.87	58.76	40.01	-18.75	74.00	33.99	PK	Vertical
3	3099.37	58.33	42.37	-15.96	74.00	31.63	PK	Vertical
4	3876.25	49.95	36.35	-13.60	54.00	17.65	AV	Vertical
5	5536.25	56.98	50.90	-6.08	74.00	23.10	PK	Vertical
6	5646.25	48.53	42.84	-5.69	54.00	11.16	AV	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	280 Villa Panel	Product Model:	280SD-C5
Test By:	Mike	Test mode:	Woking mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

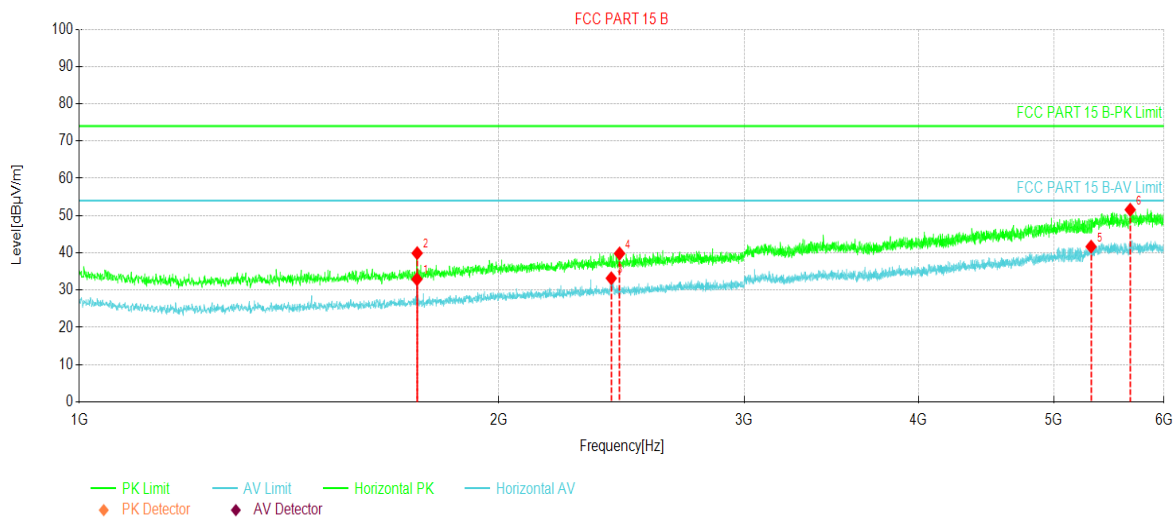

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1746.87	54.53	32.91	-21.62	54.00	21.09	AV	Horizontal
2	1747.50	61.52	39.90	-21.62	74.00	34.10	PK	Horizontal
3	2408.12	51.95	33.17	-18.78	54.00	20.83	AV	Horizontal
4	2441.25	58.54	39.82	-18.72	74.00	34.18	PK	Horizontal
5	5319.37	48.18	41.67	-6.51	54.00	12.33	AV	Horizontal
6	5674.37	57.01	51.56	-5.45	74.00	22.44	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

8 EUT Constructional Details

Reference to the test report No.: JYTSZB-R12-2101418

-----End of report-----