


Site: AC1	Time: 2019/08/21 - 05:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

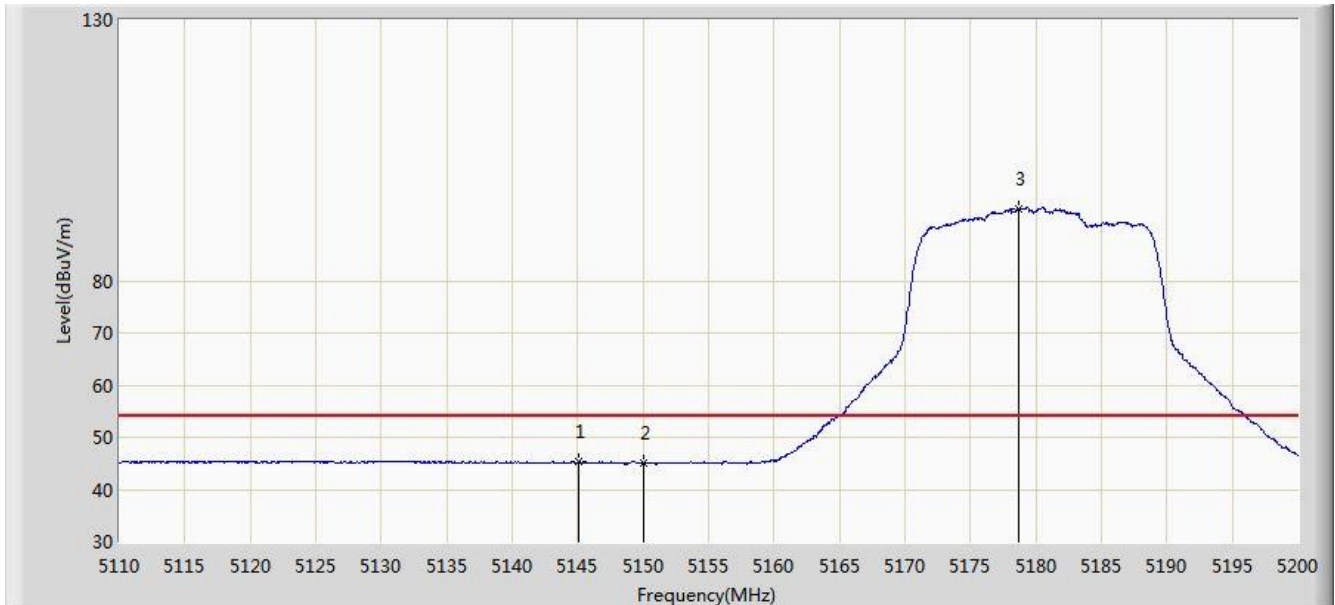


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.100	45.401	38.967	-8.599	54.000	6.435	AV
2			5150.000	45.076	38.679	-8.924	54.000	6.398	AV
3		*	5178.670	93.851	87.294	N/A	N/A	6.557	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

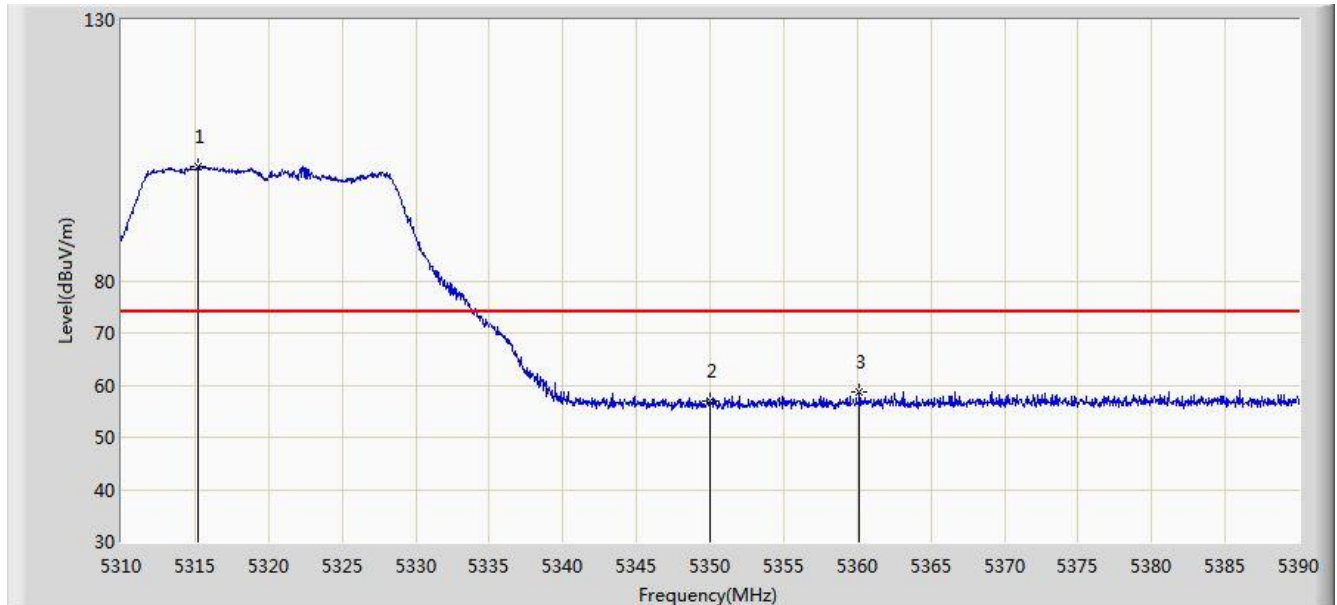


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.200	101.984	95.646	N/A	N/A	6.337	PK
2			5350.000	56.869	50.542	-17.131	74.000	6.327	PK
3			5360.120	58.759	52.373	-15.241	74.000	6.386	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

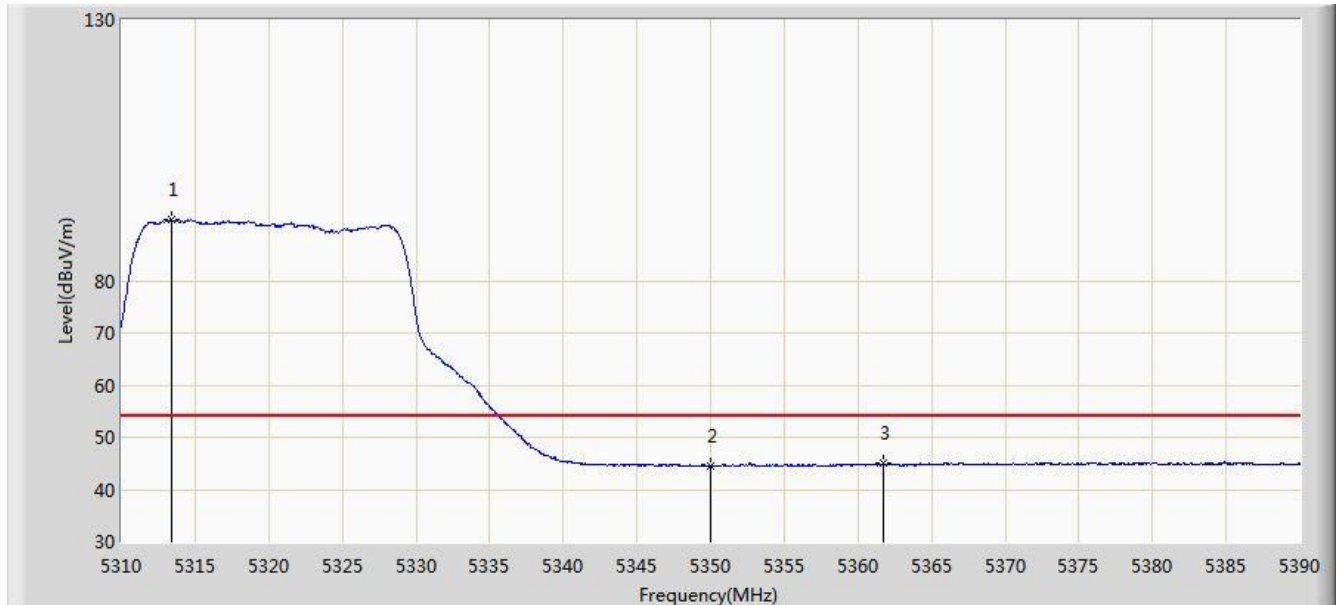


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.360	91.723	85.393	N/A	N/A	6.331	AV
2			5350.000	44.603	38.276	-9.397	54.000	6.327	AV
3			5361.720	45.063	38.665	-8.937	54.000	6.398	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

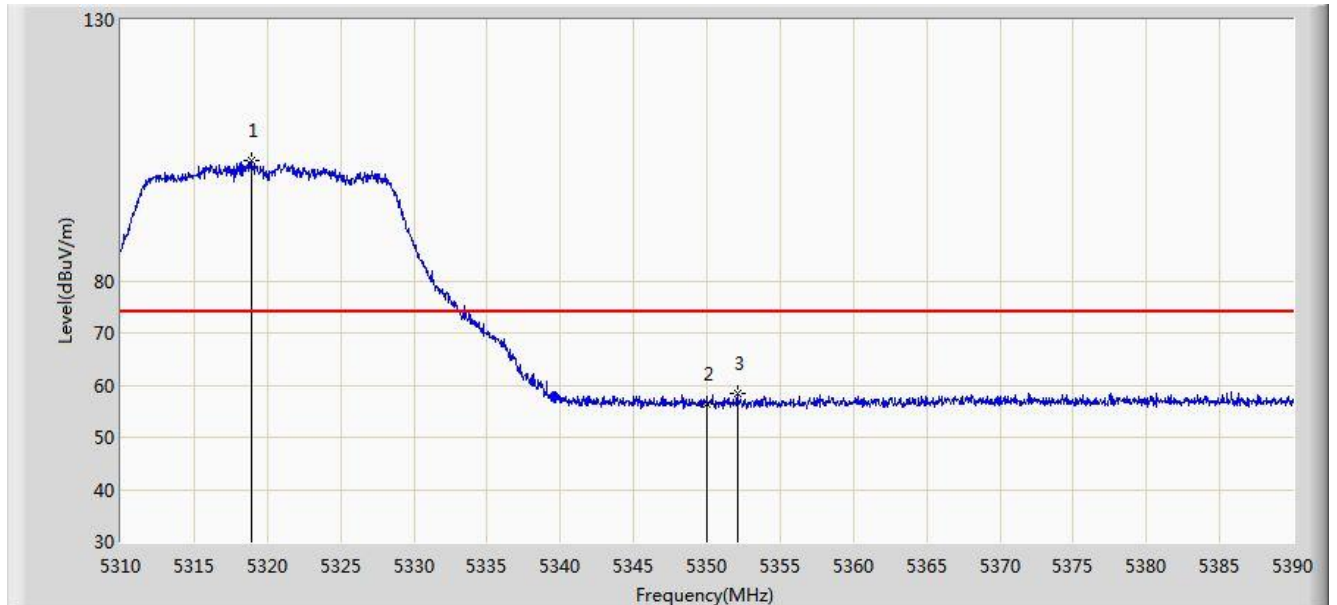


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.880	102.928	96.580	N/A	N/A	6.348	PK
2			5350.000	56.253	49.926	-17.747	74.000	6.327	PK
3			5352.080	58.394	52.067	-15.606	74.000	6.328	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

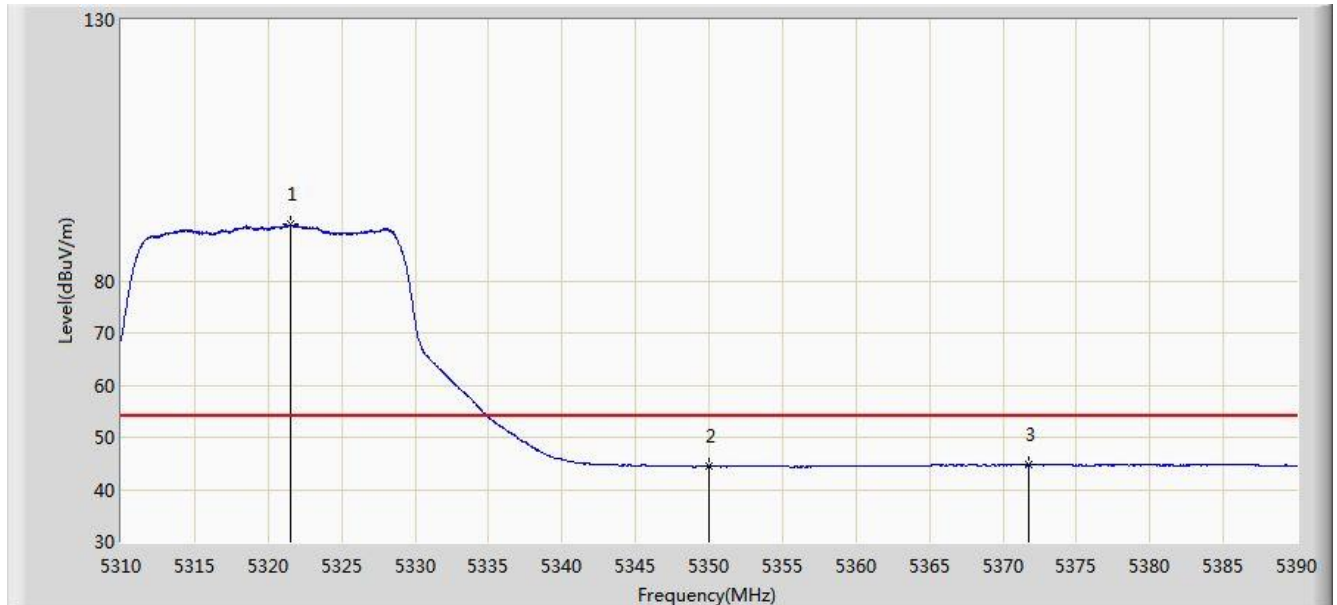


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.520	90.779	84.434	N/A	N/A	6.345	AV
2			5350.000	44.408	38.081	-9.592	54.000	6.327	AV
3			5371.760	44.756	38.298	-9.244	54.000	6.457	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

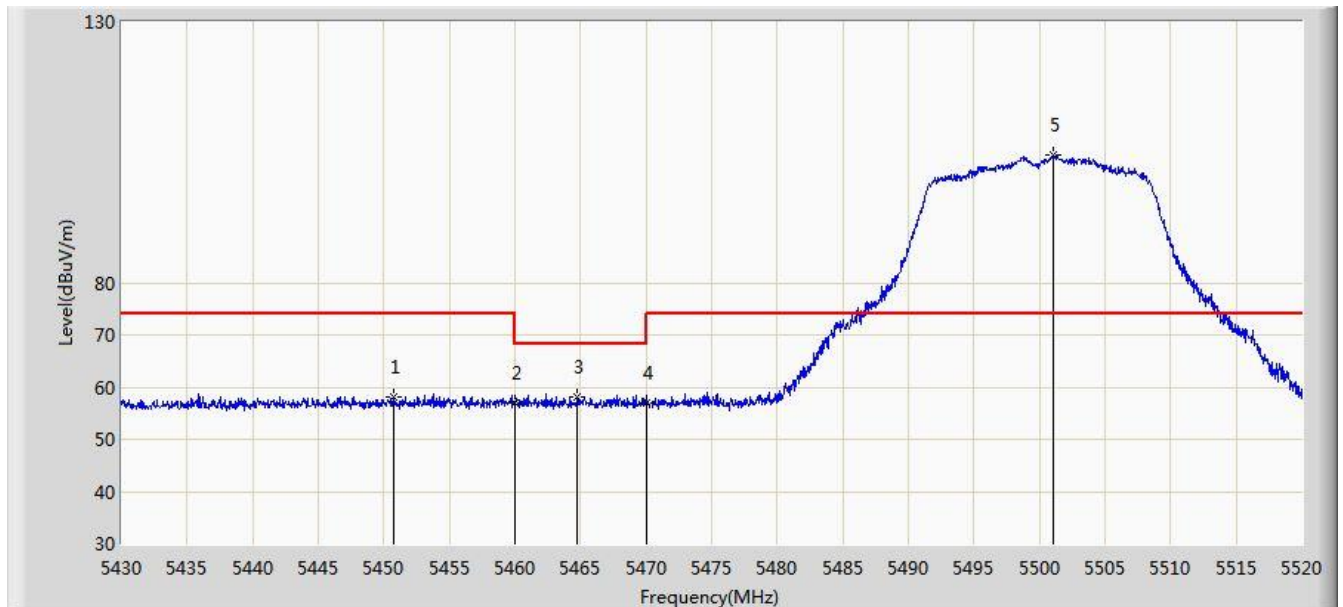


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.745	58.196	51.570	-15.804	74.000	6.625	PK
2			5460.000	57.033	50.421	-16.967	74.000	6.612	PK
3			5464.740	58.145	51.554	-10.055	68.200	6.591	PK
4			5470.000	57.096	50.529	-11.104	68.200	6.567	PK
5		*	5501.010	104.412	97.697	N/A	N/A	6.716	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

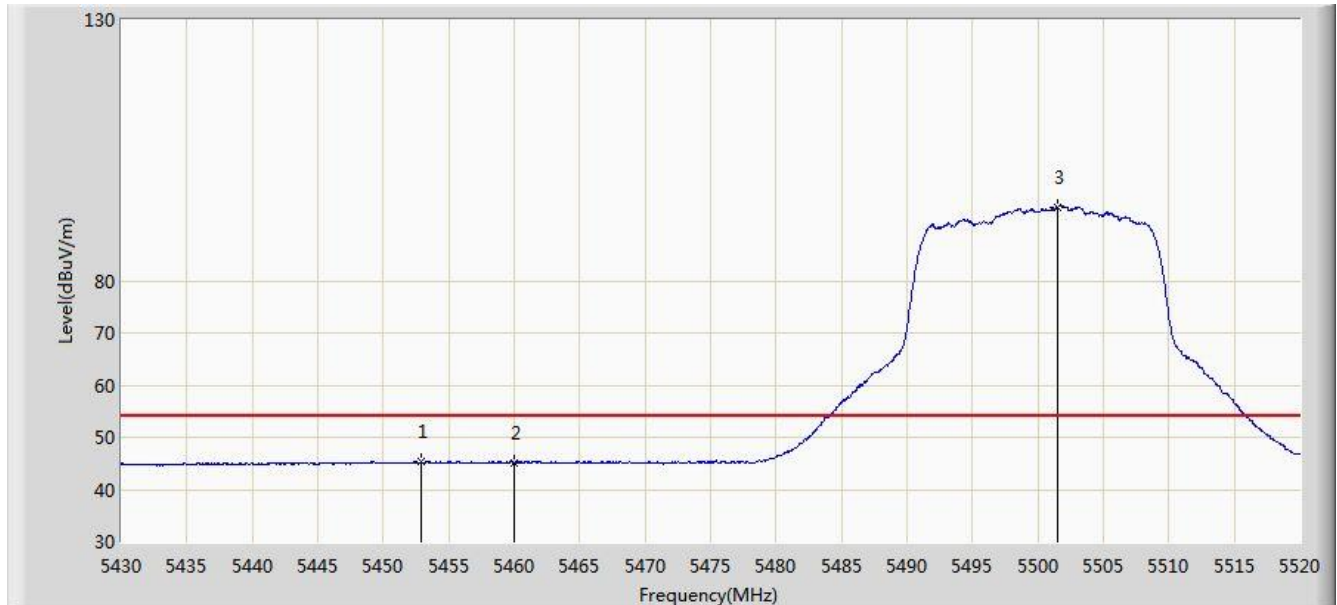


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.905	45.313	38.679	-8.687	54.000	6.635	AV
2			5460.000	45.178	38.566	-8.822	54.000	6.612	AV
3		*	5501.550	94.194	87.475	N/A	N/A	6.718	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

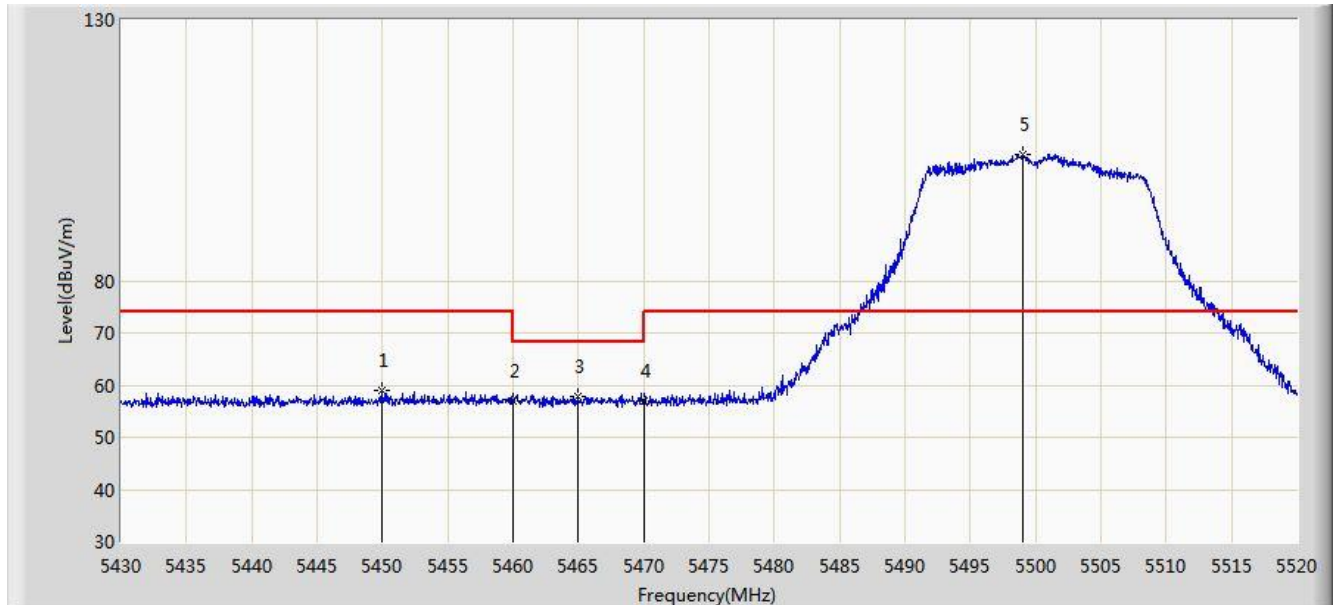


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.935	58.977	52.355	-15.023	74.000	6.623	PK
2			5460.000	56.877	50.265	-17.123	74.000	6.612	PK
3			5465.010	57.845	51.255	-10.355	68.200	6.590	PK
4			5470.000	56.864	50.297	-11.336	68.200	6.567	PK
5		*	5499.075	104.236	97.535	N/A	N/A	6.701	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

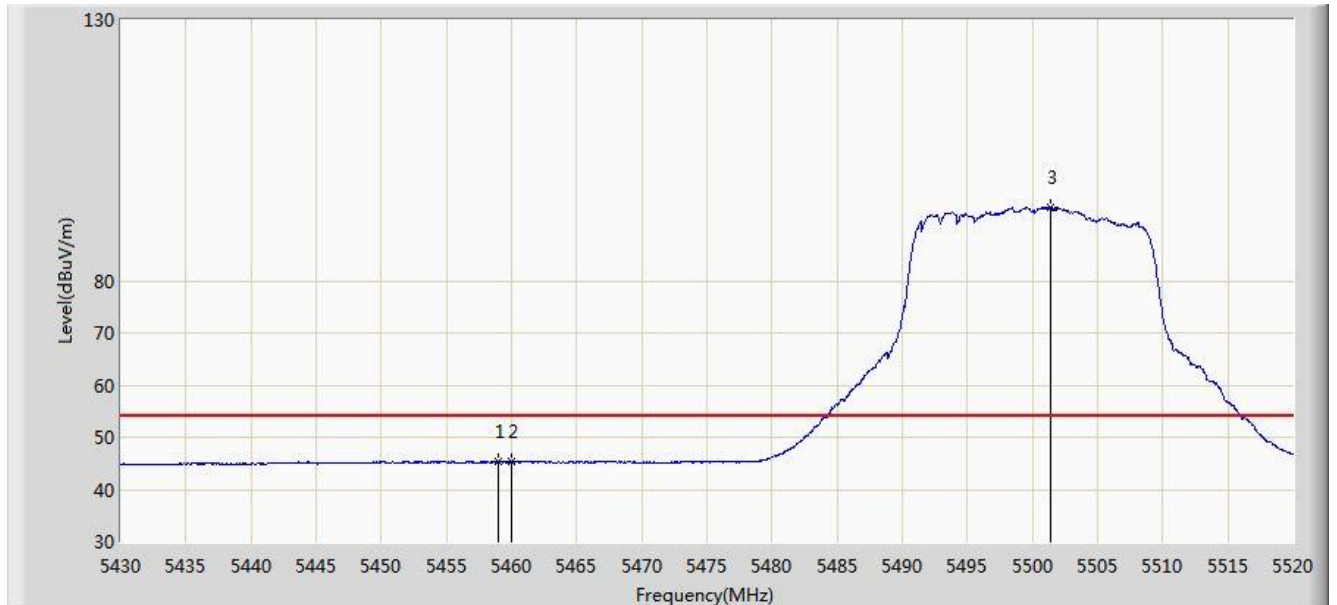


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.935	45.376	38.759	-8.624	54.000	6.617	AV
2			5460.000	45.239	38.627	-8.761	54.000	6.612	AV
3		*	5501.370	94.132	87.415	N/A	N/A	6.717	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

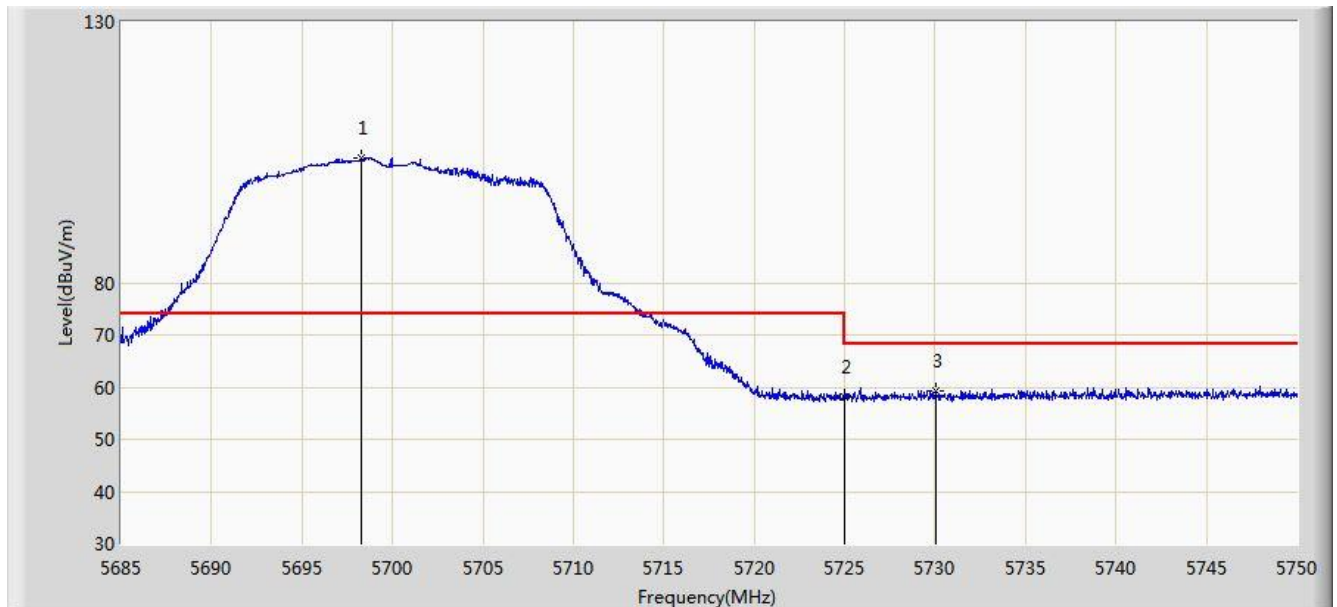


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.292	103.842	96.946	N/A	N/A	6.896	PK
2			5725.000	58.231	51.364	-9.969	68.200	6.867	PK
3			5730.045	59.381	52.493	-8.819	68.200	6.888	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

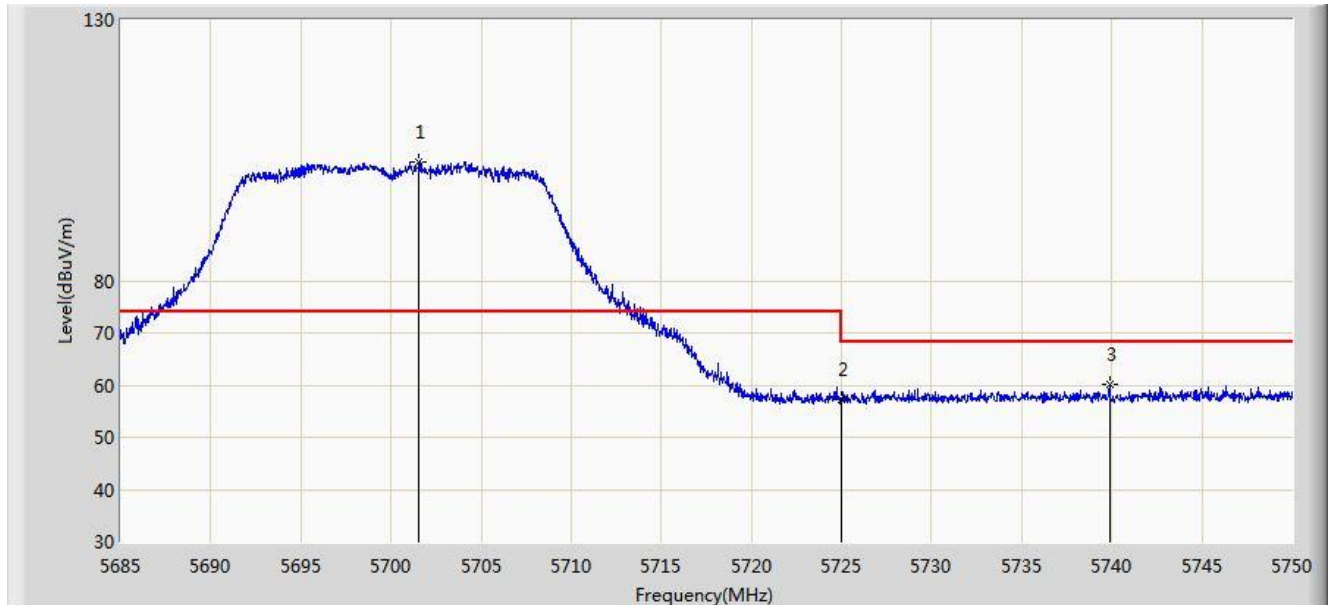


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.542	102.840	95.920	N/A	N/A	6.920	PK
2			5725.000	57.135	50.268	-11.065	68.200	6.867	PK
3			5739.860	60.101	53.146	-8.099	68.200	6.954	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

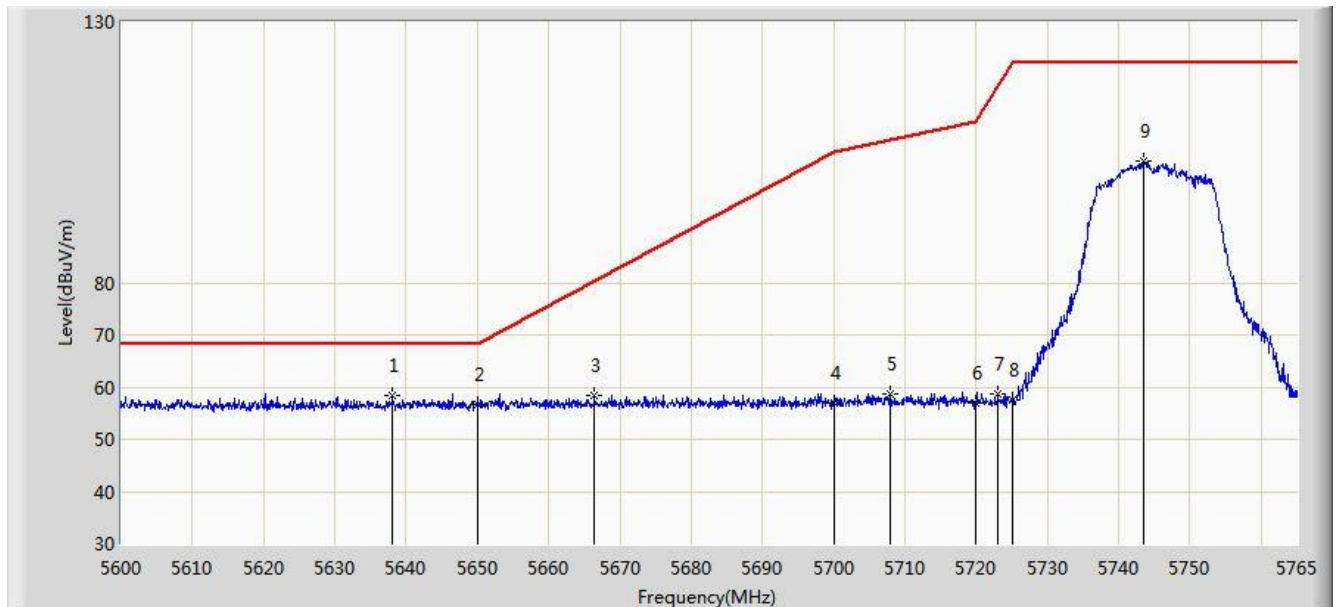


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.033	58.379	51.566	-9.821	68.200	6.813	PK
2			5650.000	56.737	49.944	-11.463	68.200	6.793	PK
3			5666.413	58.539	51.801	-21.842	80.382	6.737	PK
4			5700.000	57.003	50.094	-48.197	105.200	6.909	PK
5			5707.993	58.597	51.619	-48.844	107.440	6.977	PK
6			5720.000	56.941	50.037	-53.859	110.800	6.904	PK
7			5723.007	58.783	51.901	-58.874	117.657	6.882	PK
8			5725.000	57.418	50.551	-64.782	122.200	6.867	PK
9			5743.550	103.314	96.332	N/A	N/A	6.982	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

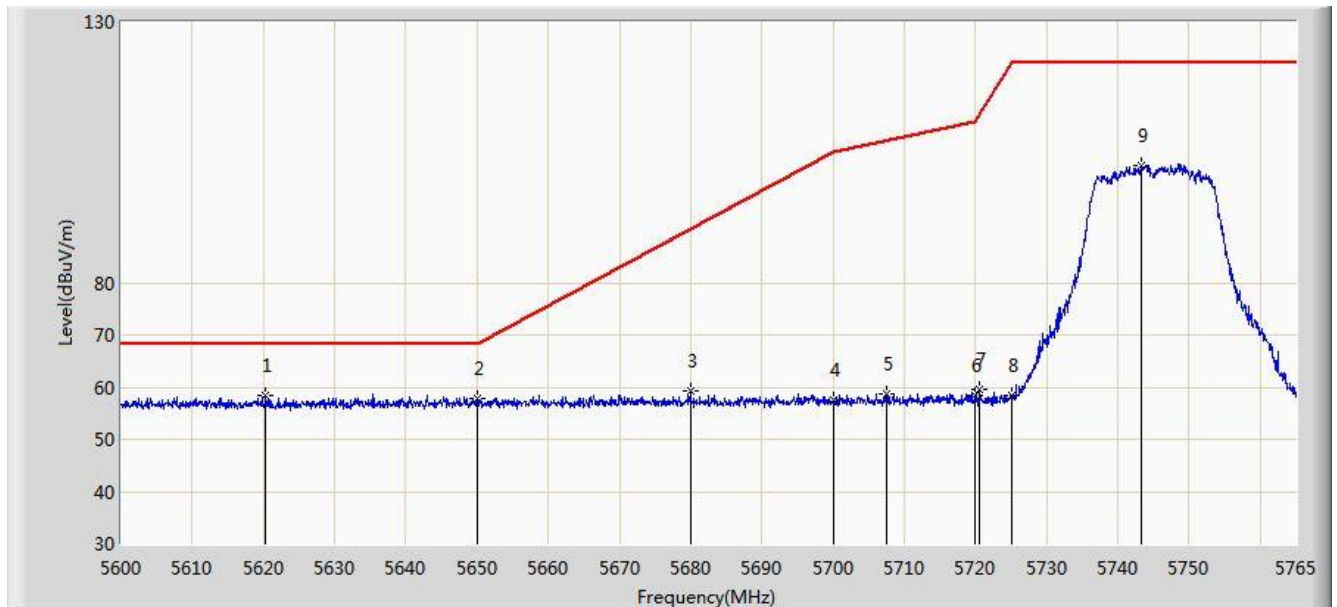


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5620.295	58.456	51.748	-9.744	68.200	6.708	PK
2			5650.000	57.891	51.098	-10.309	68.200	6.793	PK
3			5679.942	59.391	52.640	-31.005	90.396	6.752	PK
4			5700.000	57.405	50.496	-47.795	105.200	6.909	PK
5			5707.498	58.743	51.770	-48.559	107.302	6.973	PK
6			5720.000	58.392	51.488	-52.408	110.800	6.904	PK
7			5720.533	59.674	52.774	-52.341	112.016	6.901	PK
8			5725.000	58.307	51.440	-63.893	122.200	6.867	PK
9			5743.303	102.572	95.593	N/A	N/A	6.979	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

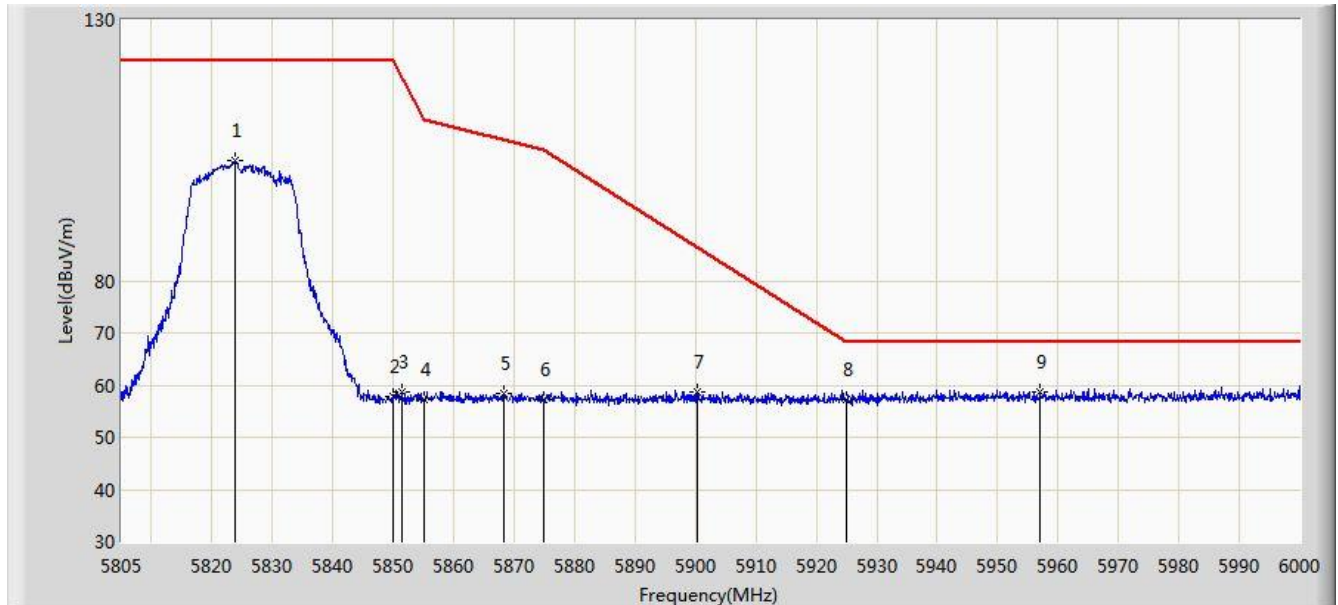


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.817	102.903	95.581	N/A	N/A	7.323	PK
2			5850.000	57.858	50.528	-64.342	122.200	7.331	PK
3			5851.507	58.797	51.467	-59.966	118.763	7.329	PK
4			5855.000	57.191	49.863	-53.609	110.800	7.327	PK
5			5868.277	58.531	51.163	-48.550	107.080	7.368	PK
6			5875.000	57.333	49.919	-47.867	105.200	7.414	PK
7			5900.257	58.787	51.337	-27.684	86.471	7.450	PK
8			5925.000	57.255	49.955	-10.945	68.200	7.299	PK
9		*	5957.100	58.790	51.355	-9.410	68.200	7.435	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

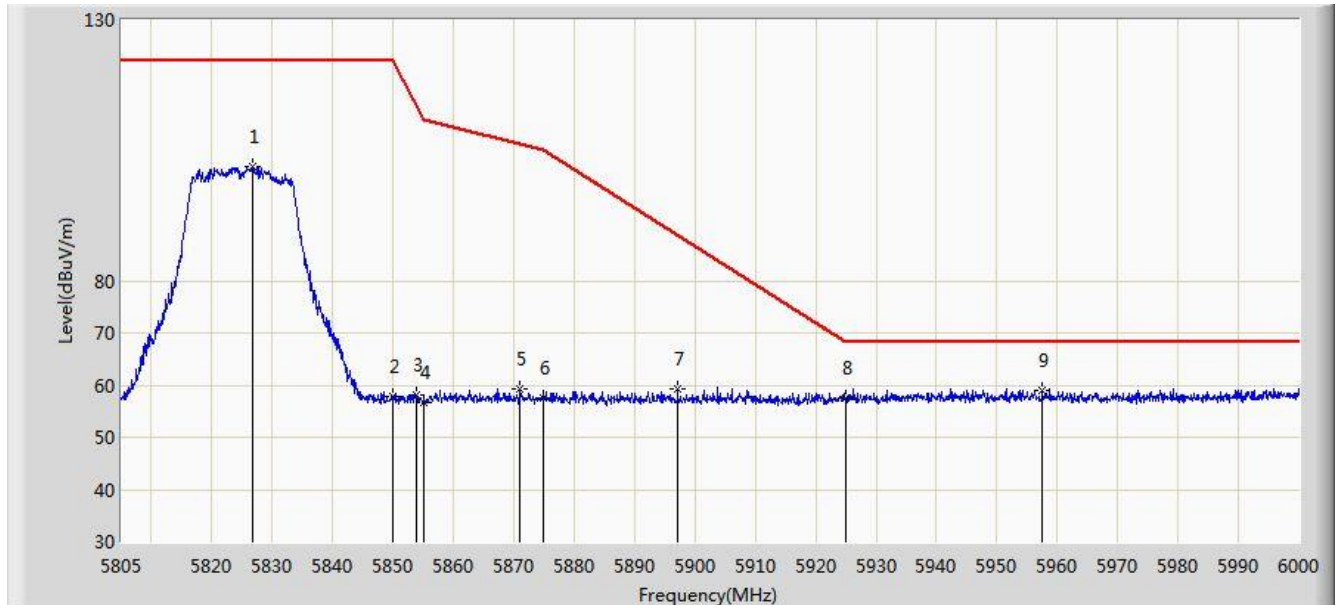


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.645	102.013	94.648	N/A	N/A	7.364	PK
2			5850.000	57.732	50.402	-64.468	122.200	7.331	PK
3			5853.945	58.110	50.781	-55.095	113.205	7.329	PK
4			5855.000	56.774	49.446	-54.026	110.800	7.327	PK
5			5871.007	59.336	51.950	-46.980	106.317	7.387	PK
6			5875.000	57.553	50.139	-47.647	105.200	7.414	PK
7			5897.138	59.353	51.866	-29.426	88.779	7.488	PK
8			5925.000	57.461	50.161	-10.739	68.200	7.299	PK
9		*	5957.490	59.041	51.608	-9.159	68.200	7.433	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

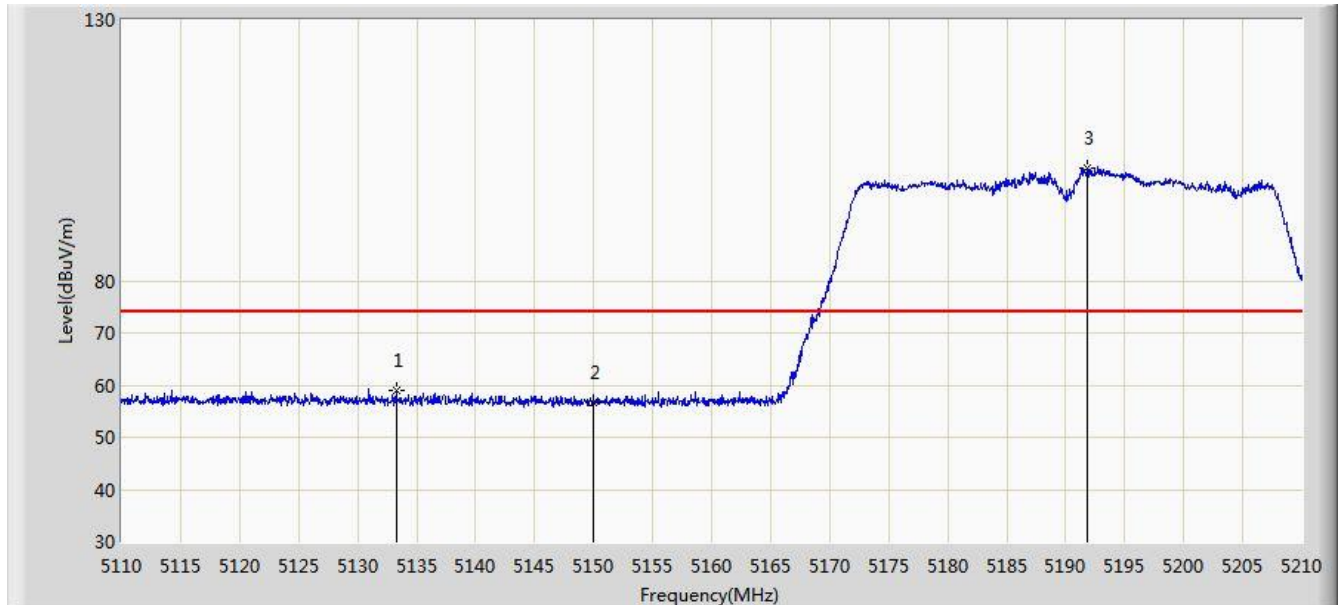


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.250	59.085	52.474	-14.915	74.000	6.611	PK
2			5150.000	56.533	50.136	-17.467	74.000	6.398	PK
3		*	5191.800	101.587	95.094	N/A	N/A	6.492	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

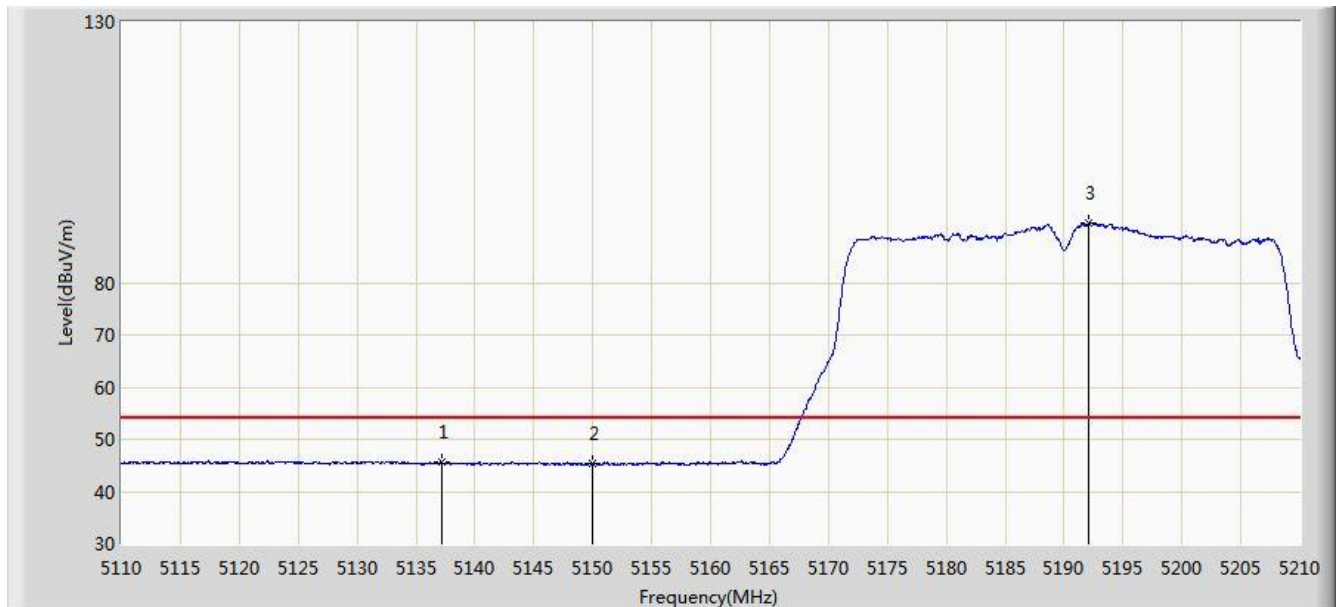


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.200	45.696	39.143	-8.304	54.000	6.553	AV
2			5150.000	45.478	39.081	-8.522	54.000	6.398	AV
3		*	5192.100	91.376	84.886	N/A	N/A	6.489	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

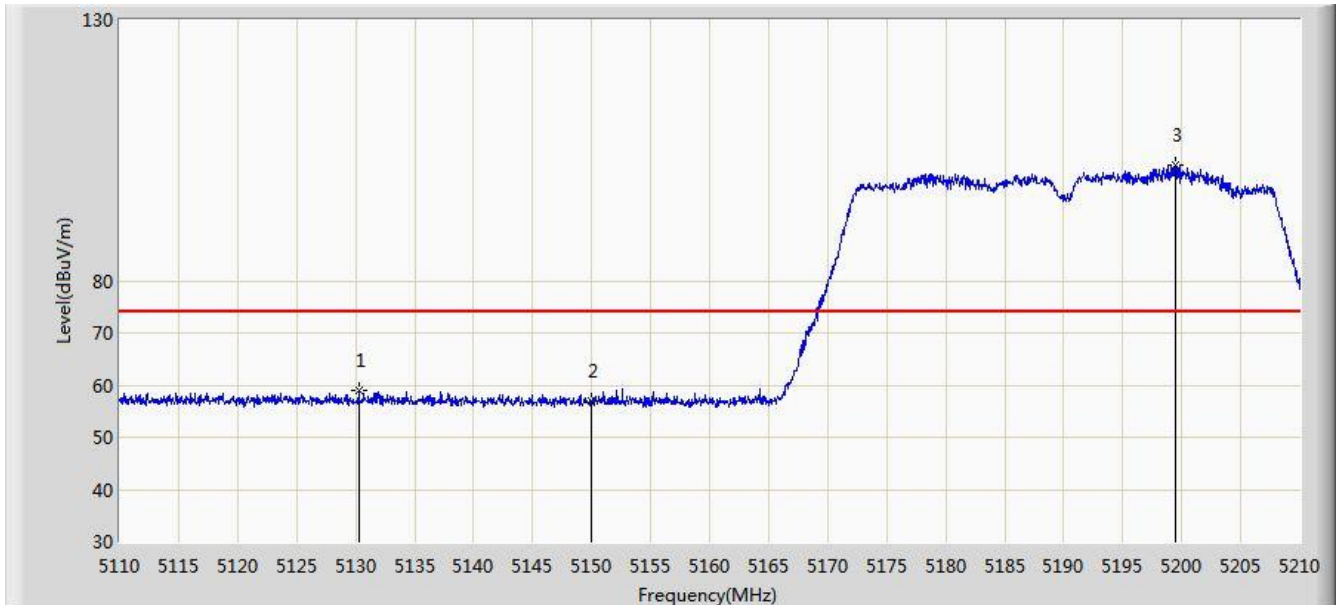


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.250	58.878	52.242	-15.122	74.000	6.636	PK
2			5150.000	57.019	50.622	-16.981	74.000	6.398	PK
3		*	5199.450	102.262	95.846	N/A	N/A	6.416	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

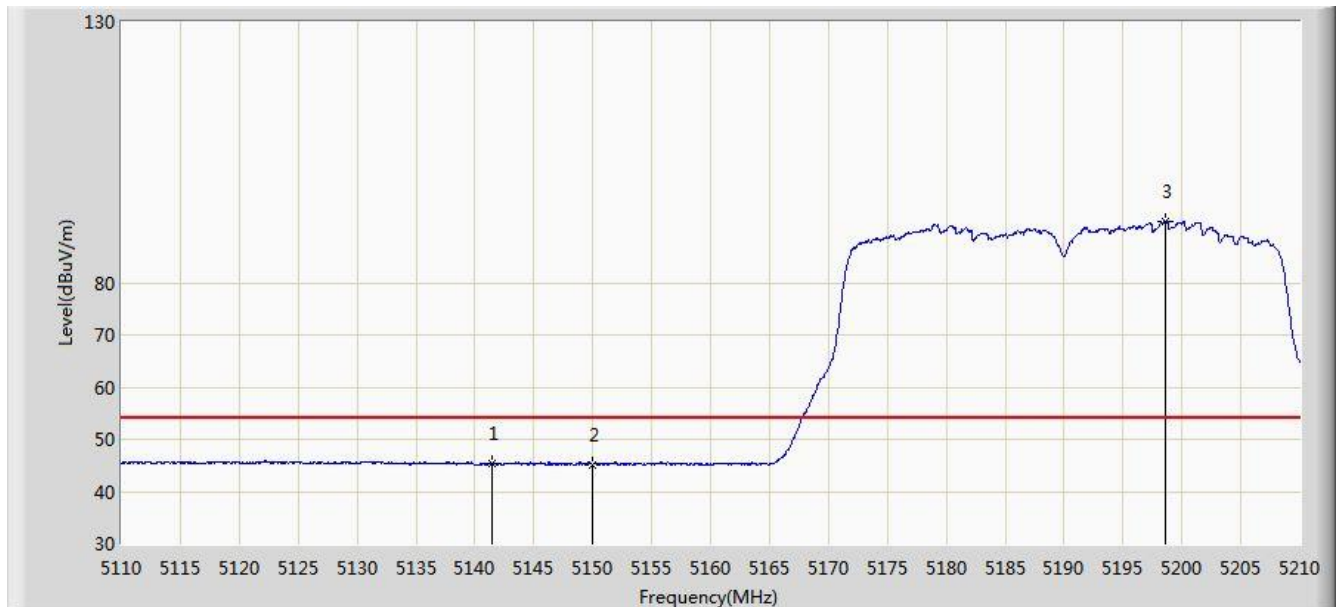


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.500	45.402	38.913	-8.598	54.000	6.489	AV
2			5150.000	45.215	38.818	-8.785	54.000	6.398	AV
3		*	5198.550	91.707	85.280	N/A	N/A	6.427	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

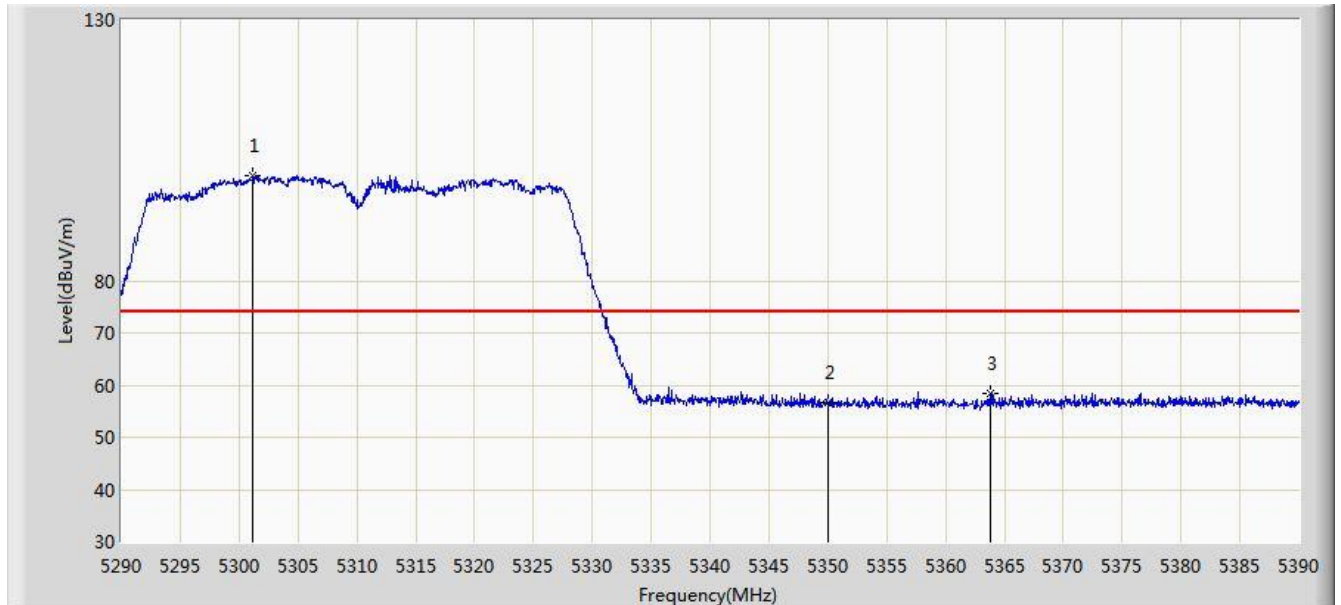


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.200	100.054	93.765	N/A	N/A	6.290	PK
2			5350.000	56.581	50.254	-17.419	74.000	6.327	PK
3			5363.750	58.480	52.067	-15.520	74.000	6.413	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

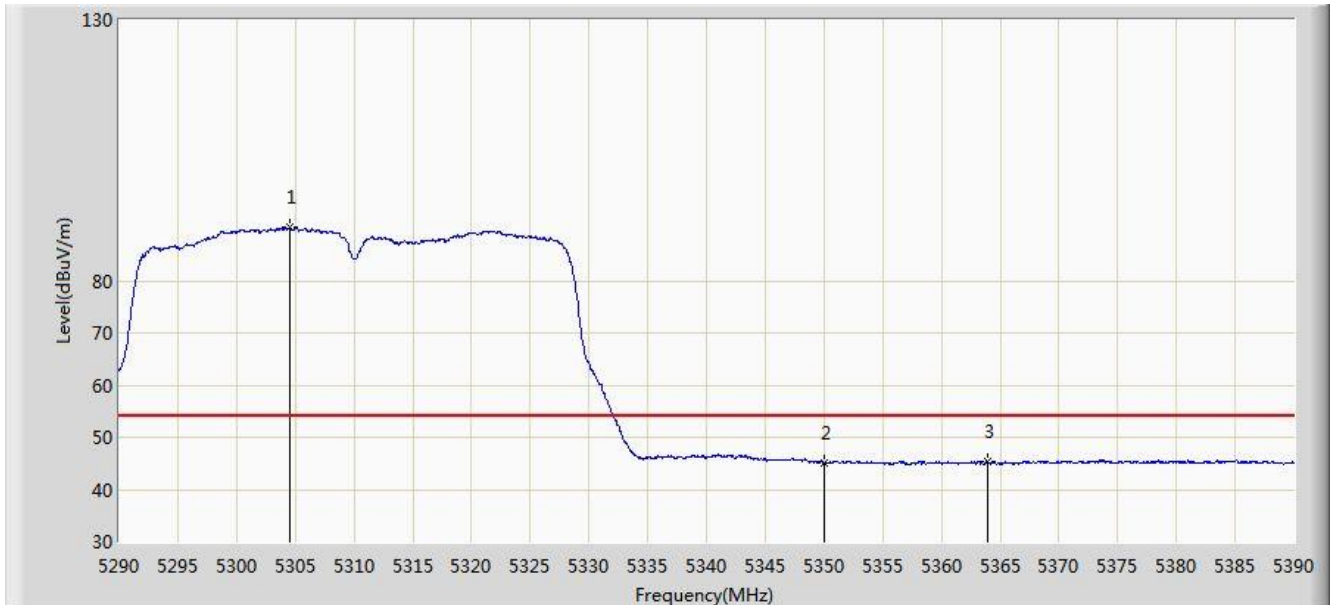


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5304.550	90.146	83.845	N/A	N/A	6.300	AV
2			5350.000	45.217	38.890	-8.783	54.000	6.327	AV
3			5363.900	45.416	39.002	-8.584	54.000	6.414	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

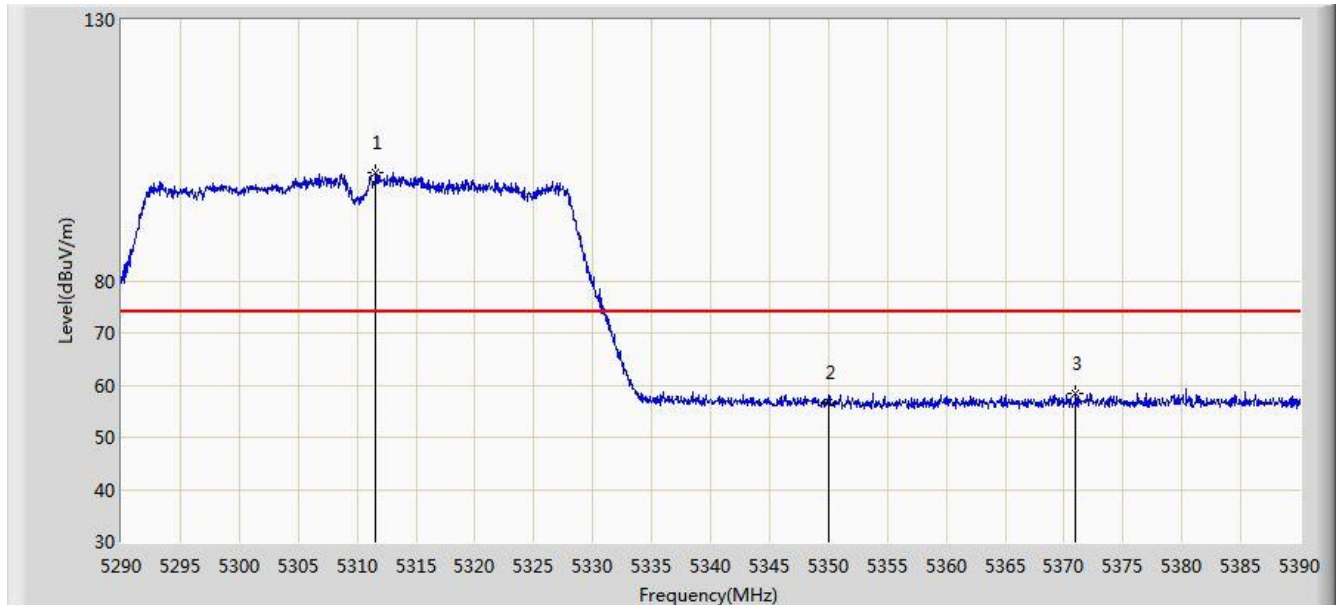


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.600	100.844	94.520	N/A	N/A	6.324	PK
2			5350.000	56.772	50.445	-17.228	74.000	6.327	PK
3			5371.000	58.493	52.037	-15.507	74.000	6.456	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

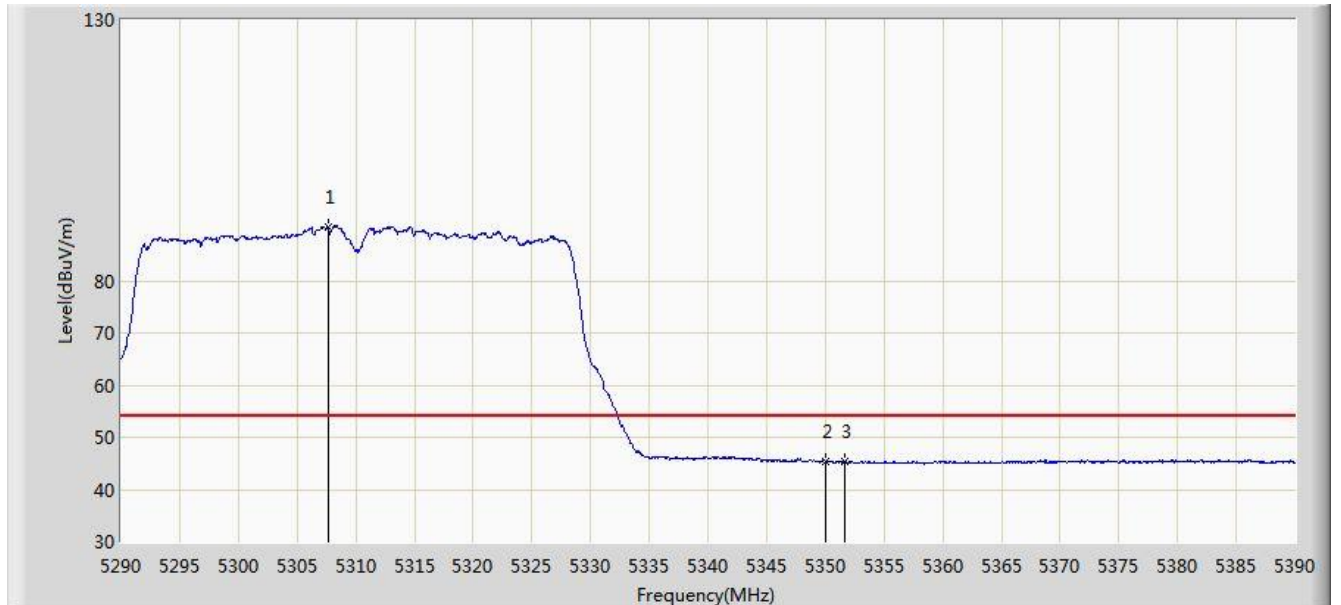


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.700	90.423	84.112	N/A	N/A	6.311	AV
2			5350.000	45.228	38.901	-8.772	54.000	6.327	AV
3			5351.700	45.506	39.179	-8.494	54.000	6.326	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

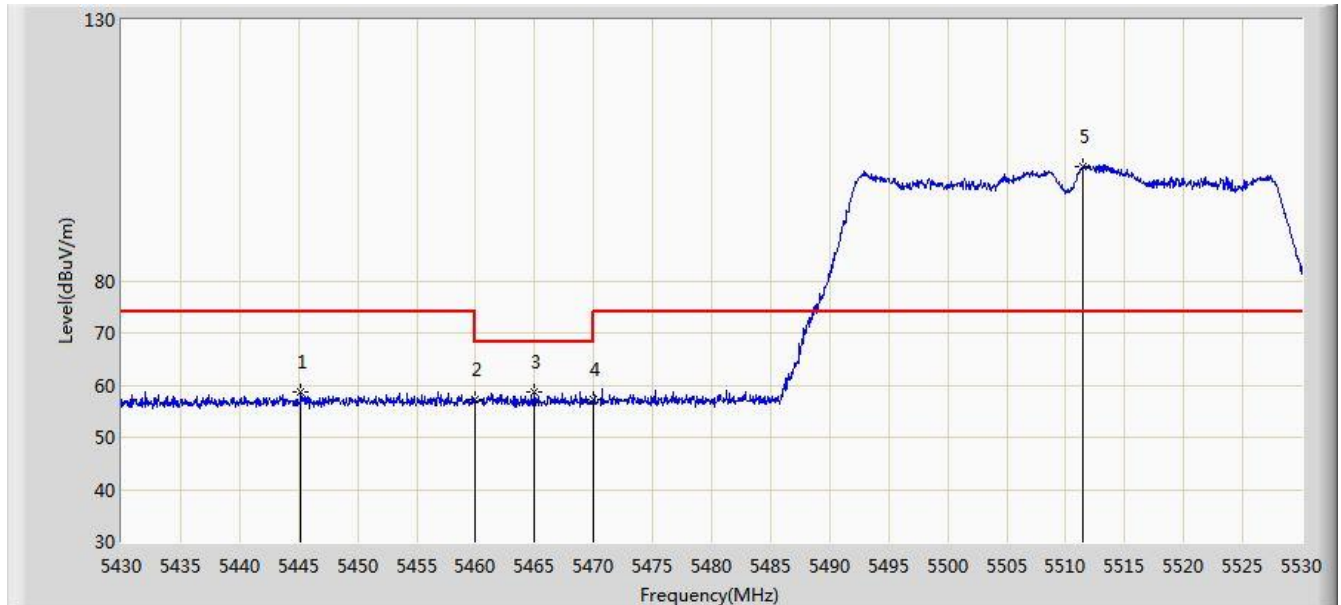


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.200	58.678	52.075	-15.322	74.000	6.603	PK
2			5460.000	57.301	50.689	-16.699	74.000	6.612	PK
3			5464.900	58.684	52.094	-9.516	68.200	6.590	PK
4			5470.000	57.152	50.585	-11.048	68.200	6.567	PK
5		*	5511.400	101.952	95.224	N/A	N/A	6.729	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

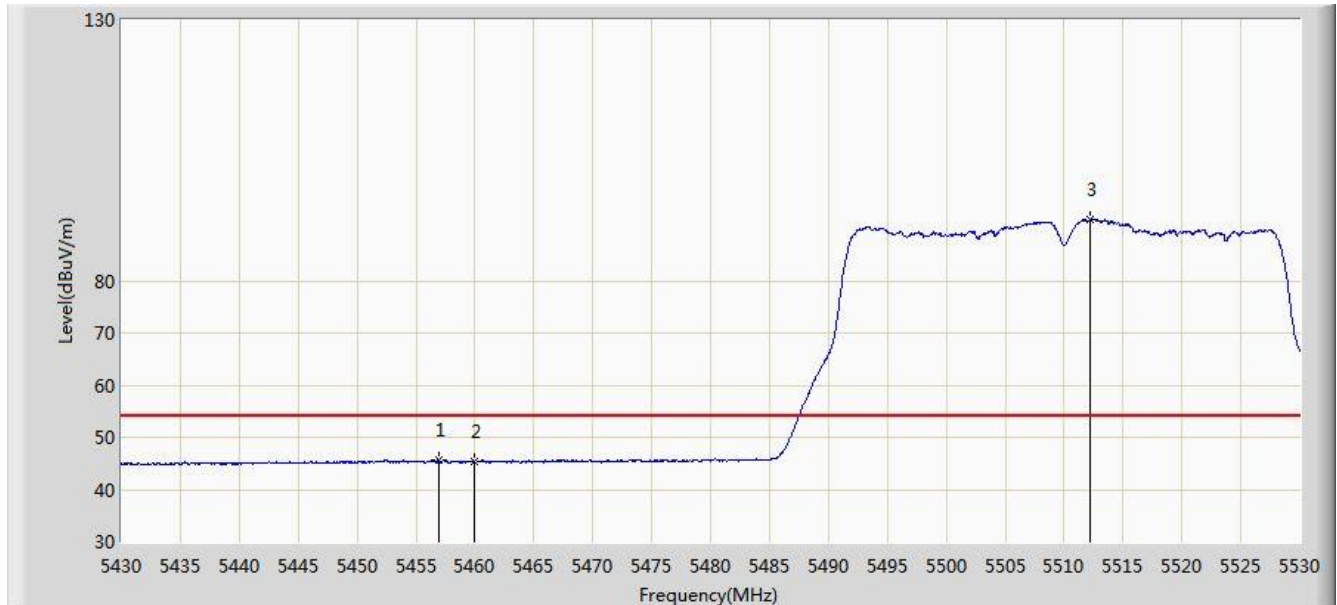


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.900	45.636	39.009	-8.364	54.000	6.626	AV
2			5460.000	45.464	38.852	-8.536	54.000	6.612	AV
3		*	5512.250	91.659	84.933	N/A	N/A	6.727	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

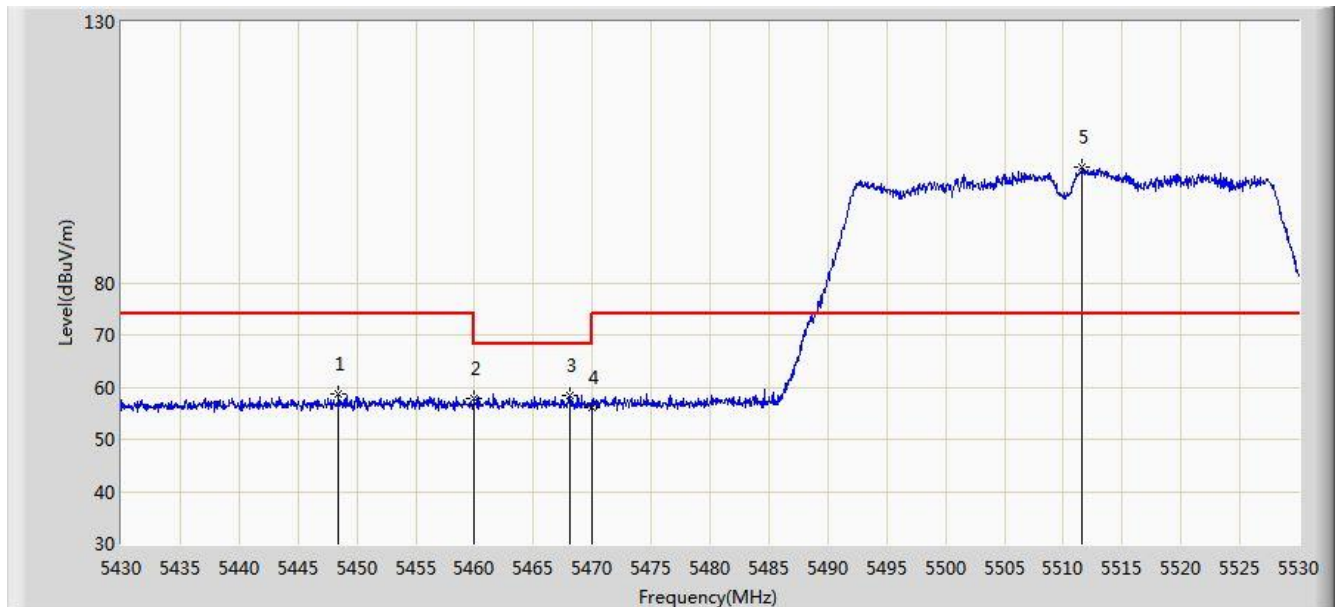


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.450	58.630	52.014	-15.370	74.000	6.617	PK
2			5460.000	57.747	51.135	-16.253	74.000	6.612	PK
3			5468.100	58.338	51.763	-9.862	68.200	6.576	PK
4			5470.000	56.079	49.512	-12.121	68.200	6.567	PK
5		*	5511.600	102.201	95.473	N/A	N/A	6.727	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

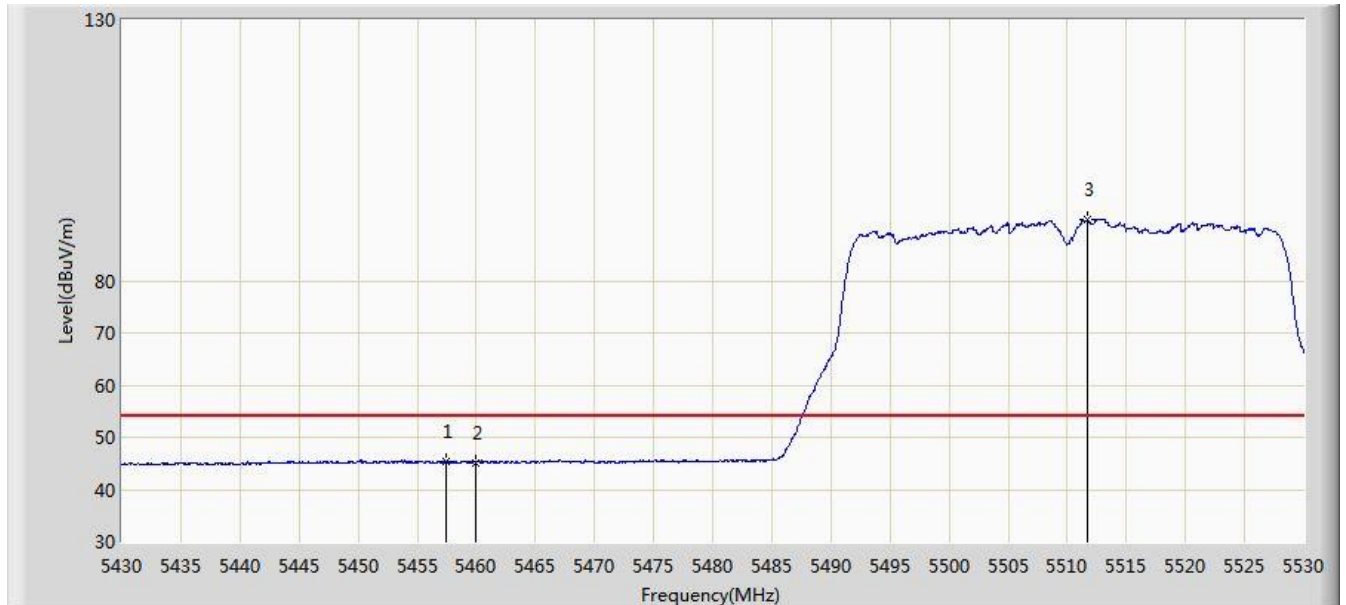


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.450	45.439	38.815	-8.561	54.000	6.624	AV
2			5460.000	45.213	38.601	-8.787	54.000	6.612	AV
3		*	5511.650	91.683	84.955	N/A	N/A	6.728	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

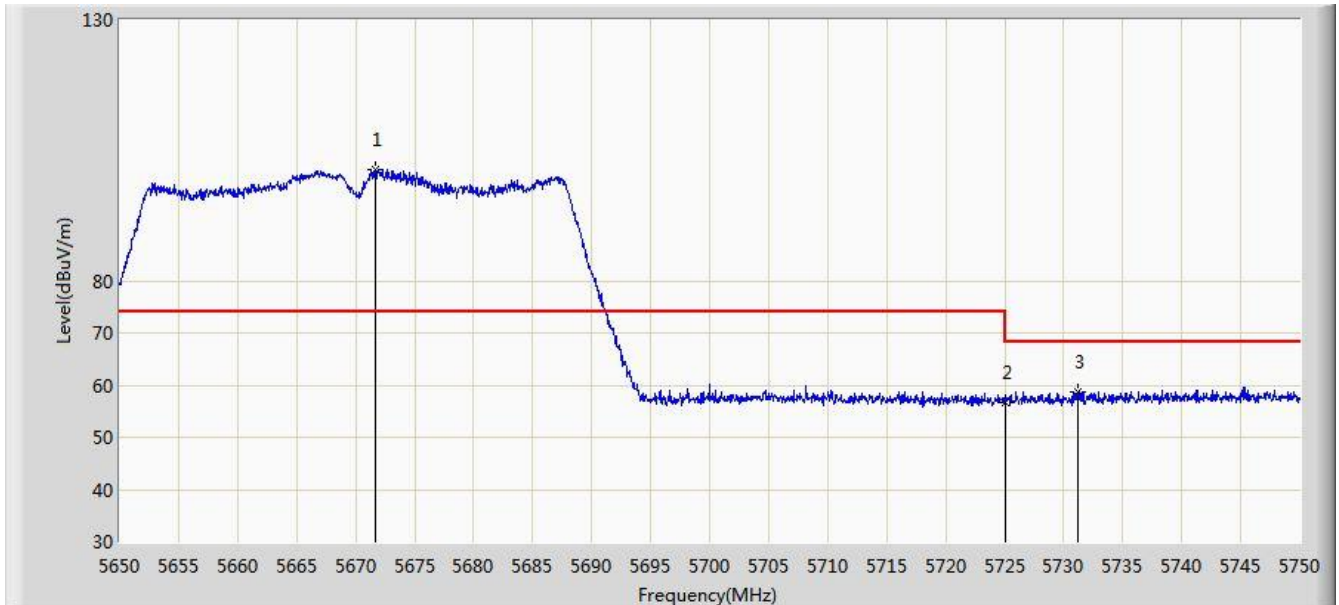


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5671.700	101.282	94.559	N/A	N/A	6.723	PK
2			5725.000	56.592	49.725	-11.608	68.200	6.867	PK
3			5731.150	58.729	51.834	-9.471	68.200	6.895	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

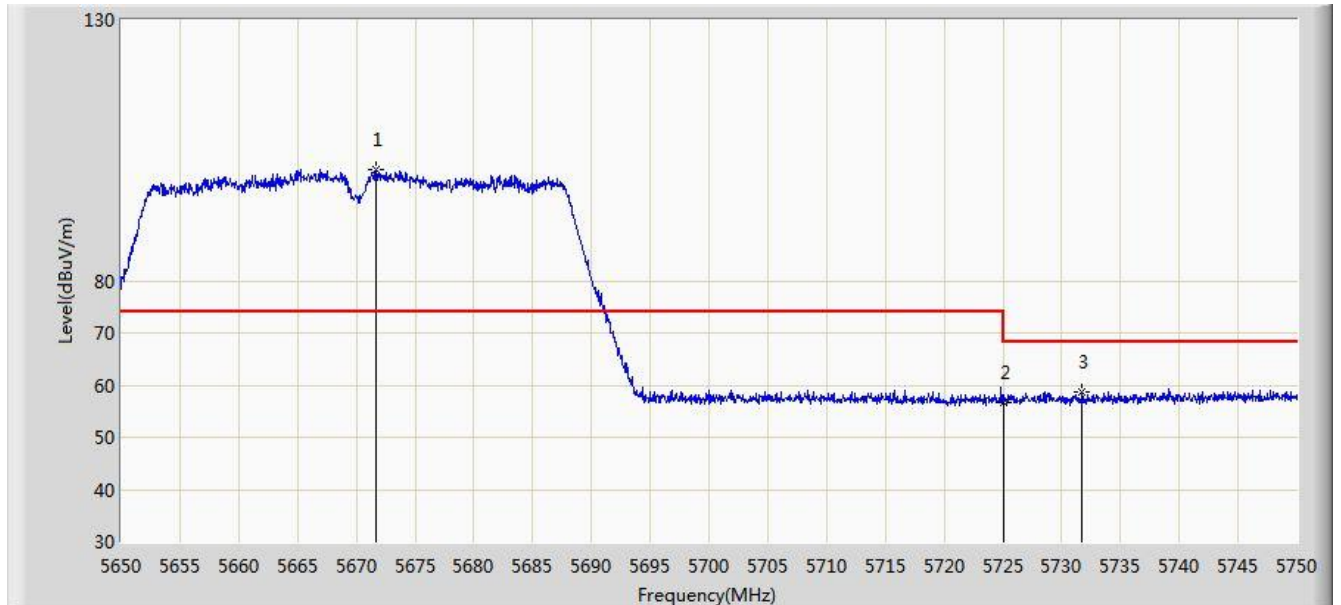


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5671.650	101.272	94.549	N/A	N/A	6.723	PK
2			5725.000	56.804	49.937	-11.396	68.200	6.867	PK
3			5731.700	58.755	51.856	-9.445	68.200	6.899	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

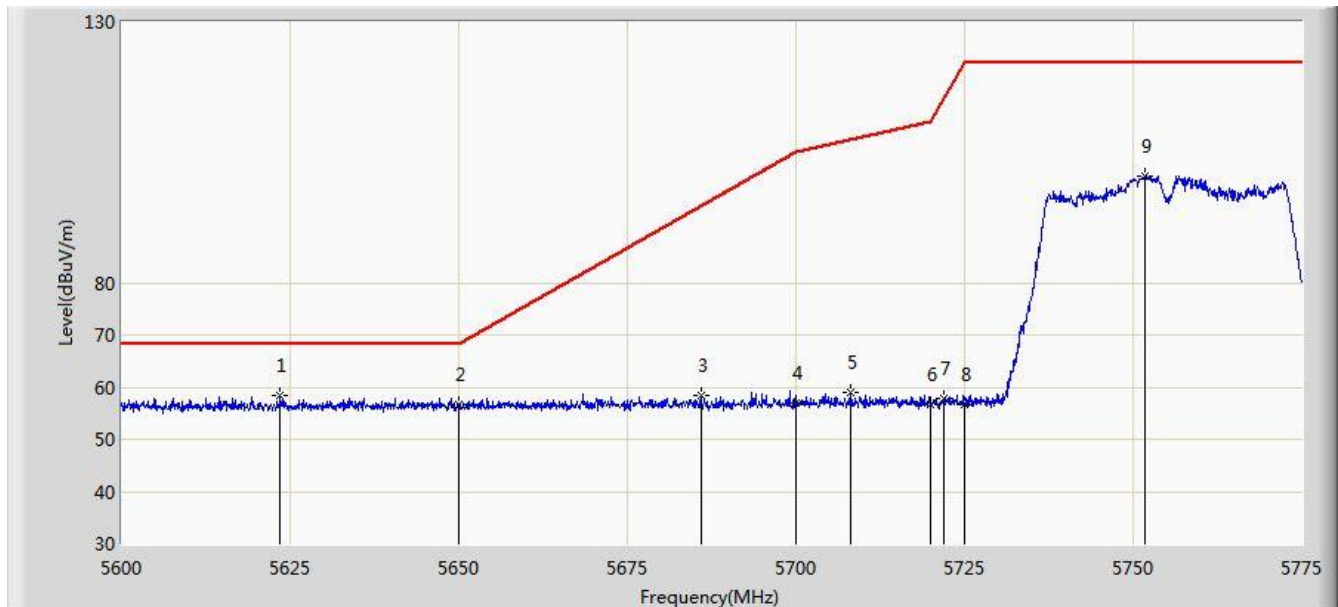


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.538	58.435	51.715	-9.765	68.200	6.720	PK
2			5650.000	56.530	49.737	-11.670	68.200	6.793	PK
3			5685.925	58.535	51.736	-36.283	94.817	6.799	PK
4			5700.000	57.037	50.128	-48.163	105.200	6.909	PK
5			5708.062	58.909	51.931	-48.550	107.460	6.979	PK
6			5720.000	56.760	49.856	-54.040	110.800	6.904	PK
7			5721.888	57.921	51.031	-57.184	115.106	6.890	PK
8			5725.000	56.783	49.916	-65.417	122.200	6.867	PK
9			5751.725	100.448	93.366	N/A	N/A	7.082	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

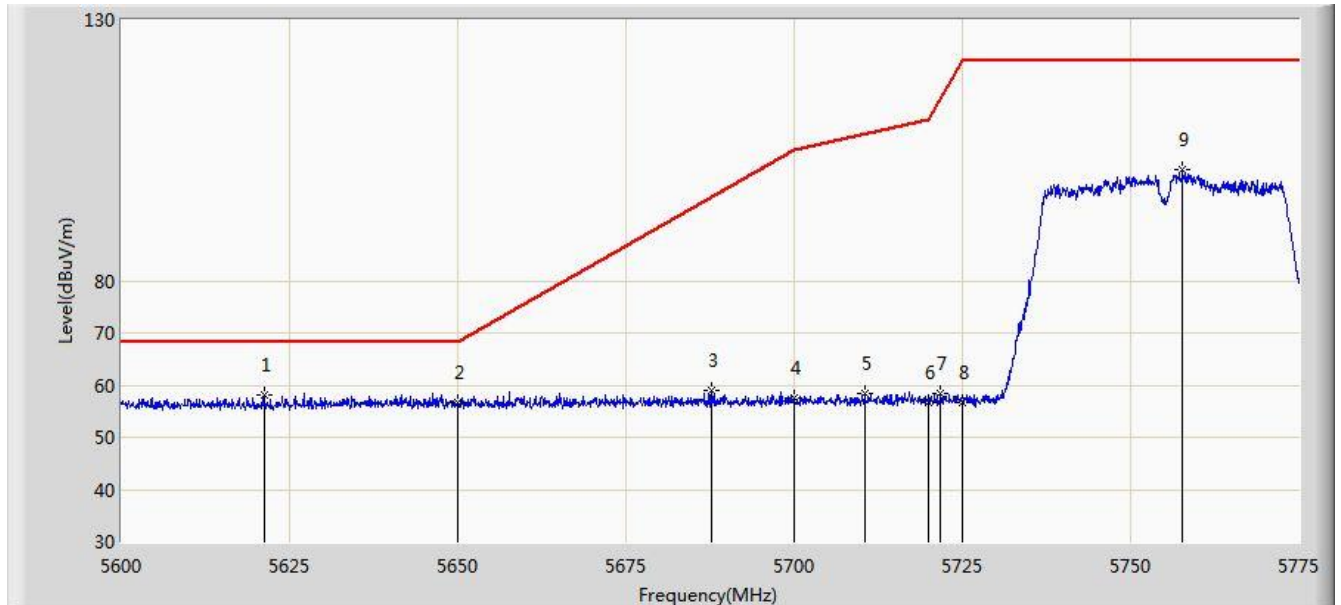


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5621.175	58.219	51.508	-9.981	68.200	6.712	PK
2			5650.000	56.664	49.871	-11.536	68.200	6.793	PK
3			5687.675	58.918	52.105	-37.192	96.110	6.813	PK
4			5700.000	57.424	50.515	-47.776	105.200	6.909	PK
5			5710.513	58.497	51.521	-49.649	108.146	6.976	PK
6			5720.000	56.769	49.865	-54.031	110.800	6.904	PK
7			5721.800	58.521	51.630	-56.384	114.905	6.891	PK
8			5725.000	56.788	49.921	-65.412	122.200	6.867	PK
9			5757.675	101.177	94.023	N/A	N/A	7.155	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 05:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

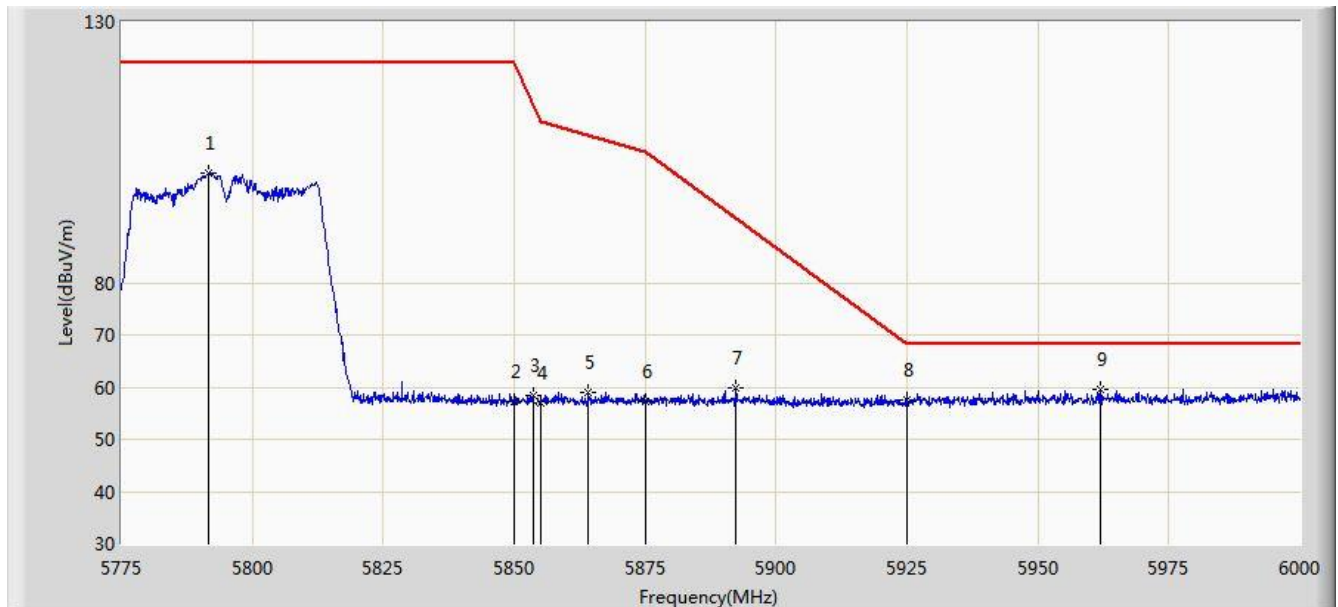


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5791.763	101.045	93.992	N/A	N/A	7.052	PK
2			5850.000	57.287	49.957	-64.913	122.200	7.331	PK
3			5853.638	58.387	51.058	-55.518	113.904	7.329	PK
4			5855.000	57.095	49.767	-53.705	110.800	7.327	PK
5			5864.100	58.886	51.547	-49.363	108.250	7.339	PK
6			5875.000	57.118	49.704	-48.082	105.200	7.414	PK
7			5892.337	59.815	52.328	-32.520	92.335	7.487	PK
8			5925.000	57.405	50.105	-10.795	68.200	7.299	PK
9		*	5961.975	59.444	52.040	-8.756	68.200	7.404	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

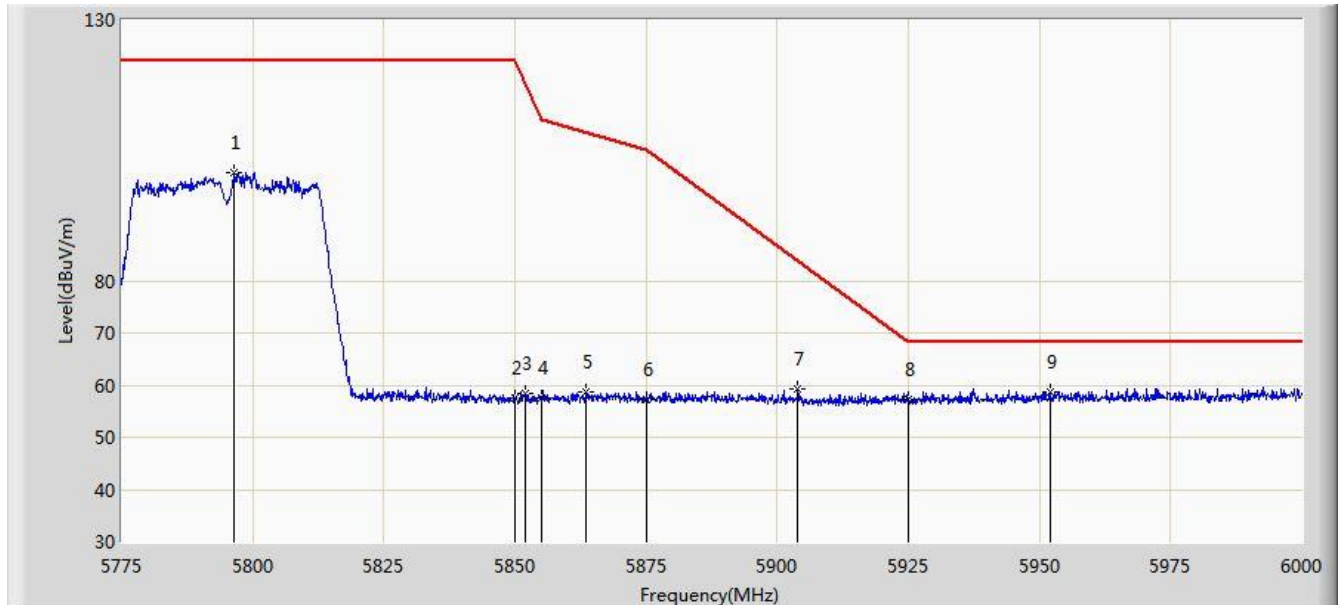


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5796.487	100.673	93.627	N/A	N/A	7.046	PK
2			5850.000	57.570	50.240	-64.630	122.200	7.331	PK
3			5851.837	58.476	51.146	-59.535	118.011	7.330	PK
4			5855.000	57.662	50.334	-53.138	110.800	7.327	PK
5			5863.425	58.625	51.290	-49.814	108.439	7.334	PK
6			5875.000	57.150	49.736	-48.050	105.200	7.414	PK
7			5903.925	59.173	51.769	-24.584	83.757	7.404	PK
8			5925.000	57.138	49.838	-11.062	68.200	7.299	PK
9		*	5951.962	58.760	51.293	-9.440	68.200	7.467	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

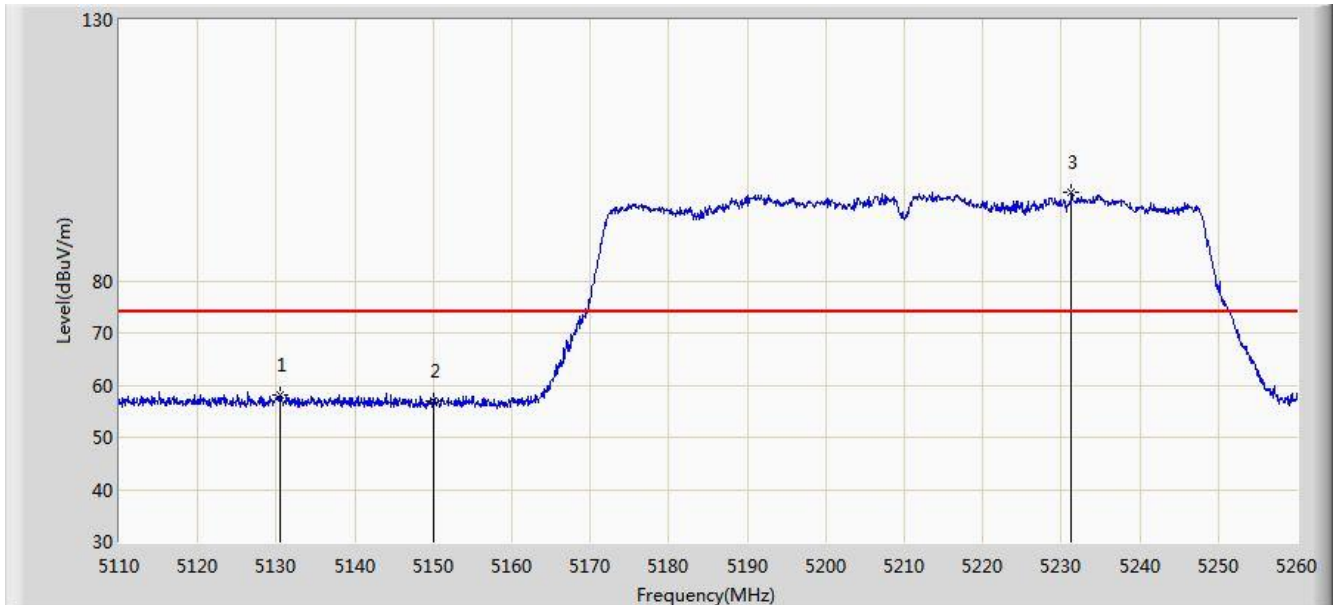


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.400	58.001	51.364	-15.999	74.000	6.637	PK
2			5150.000	57.018	50.621	-16.982	74.000	6.398	PK
3		*	5231.275	97.036	90.702	N/A	N/A	6.335	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

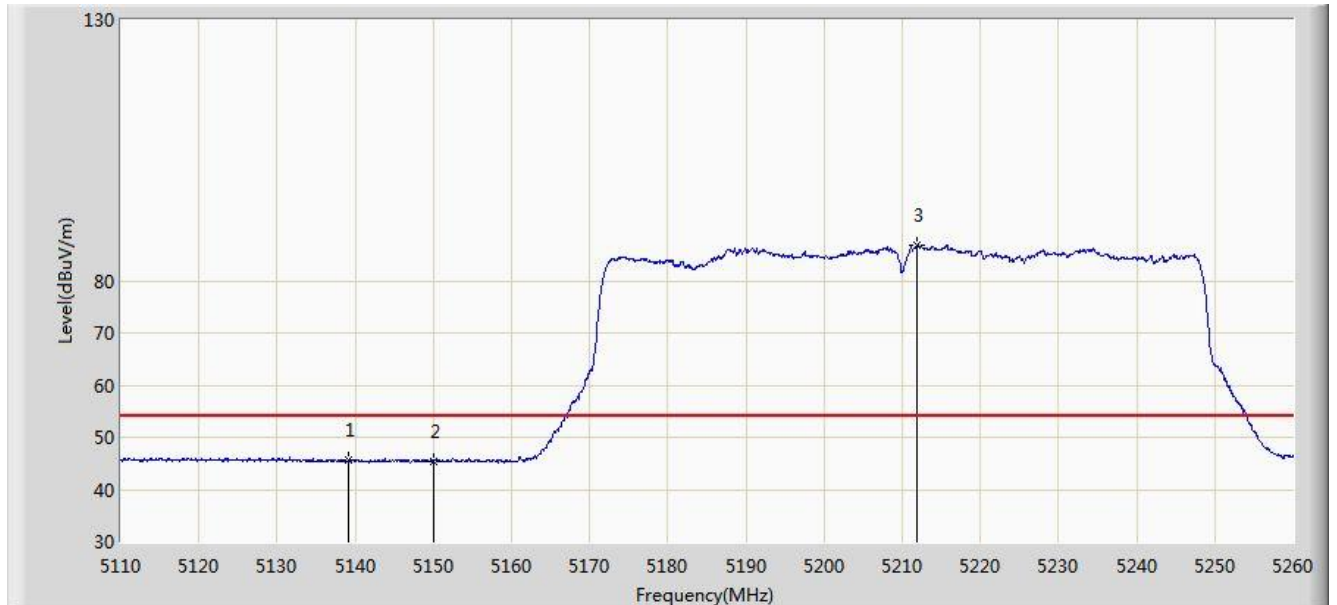


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.175	45.737	39.213	-8.263	54.000	6.523	AV
2			5150.000	45.453	39.056	-8.547	54.000	6.398	AV
3		*	5211.925	86.715	80.478	N/A	N/A	6.236	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

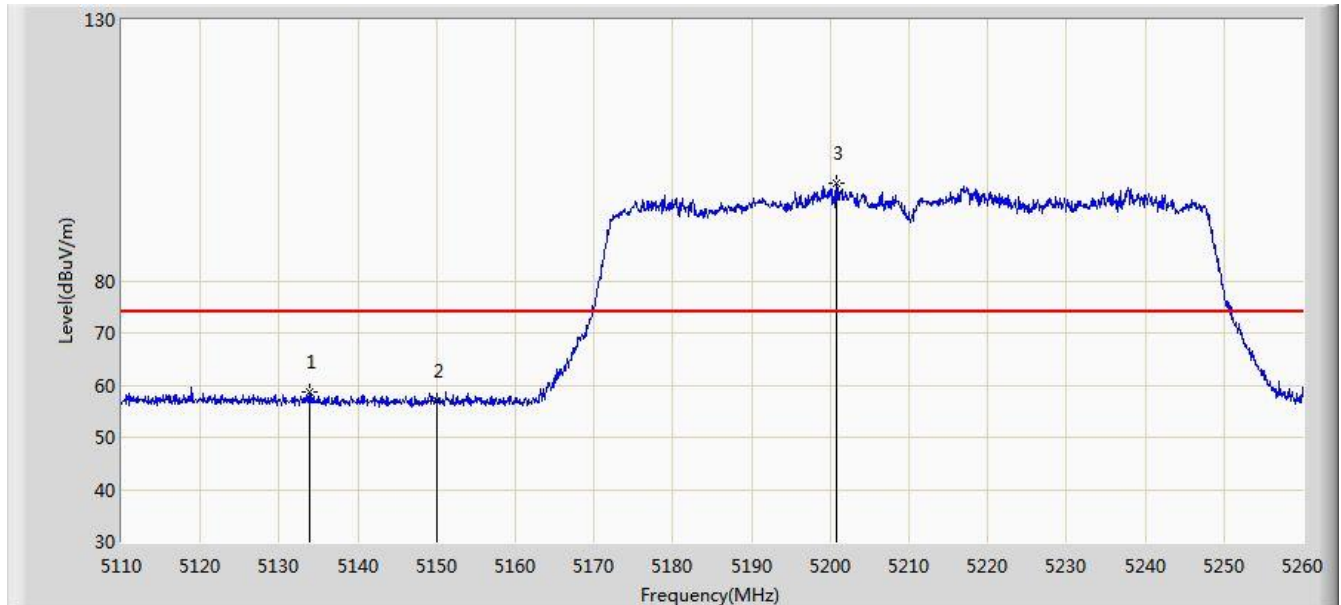


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.850	58.556	51.954	-15.444	74.000	6.602	PK
2			5150.000	56.893	50.496	-17.107	74.000	6.398	PK
3		*	5200.750	98.690	92.293	N/A	N/A	6.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

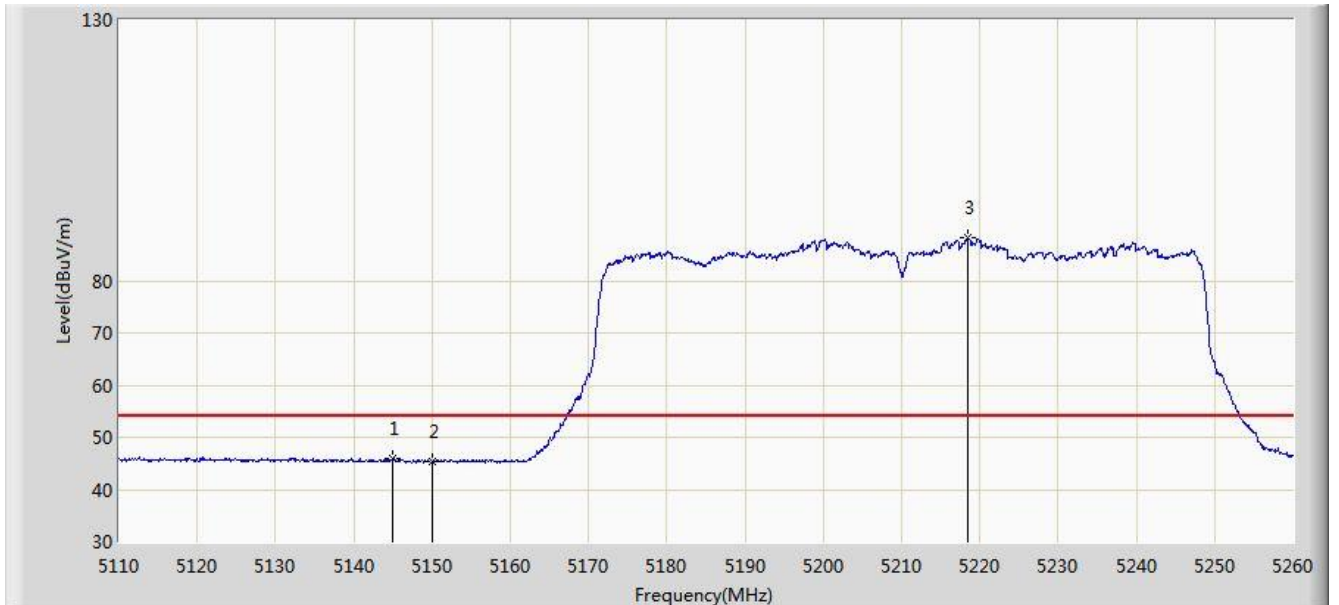


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.025	45.867	39.431	-8.133	54.000	6.435	AV
2			5150.000	45.425	39.028	-8.575	54.000	6.398	AV
3		*	5218.450	88.220	82.016	N/A	N/A	6.205	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

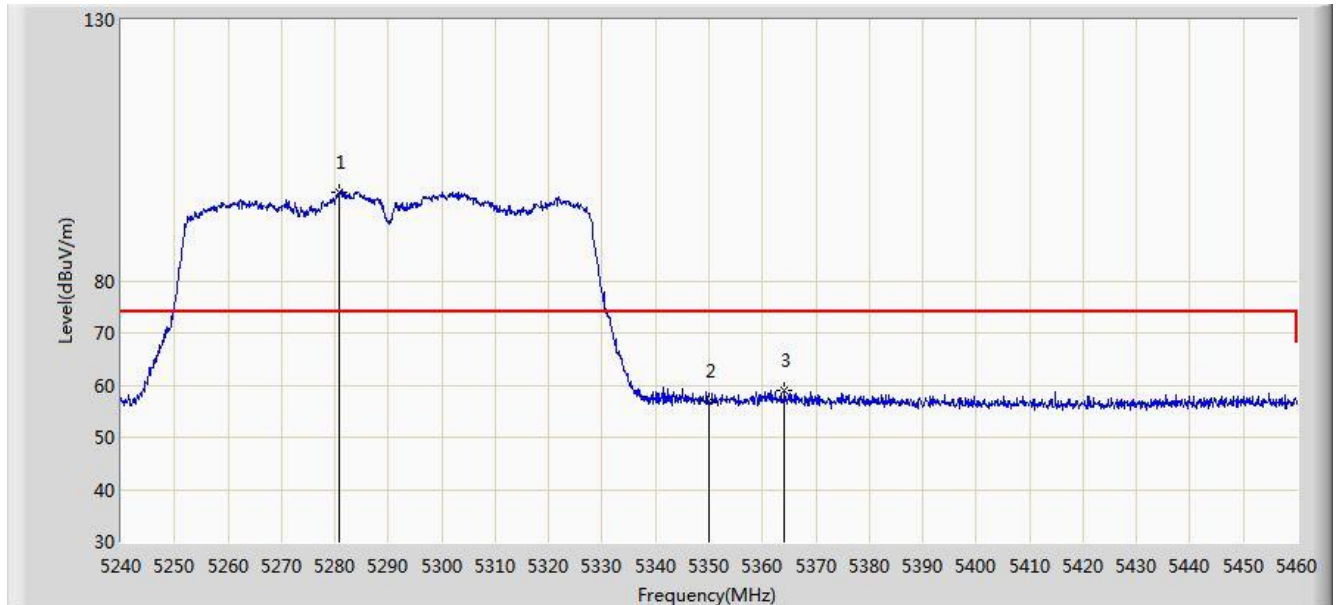


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5280.920	96.929	90.682	N/A	N/A	6.247	PK
2			5350.000	56.975	50.648	-17.025	74.000	6.327	PK
3			5364.190	58.962	52.546	-15.038	74.000	6.416	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

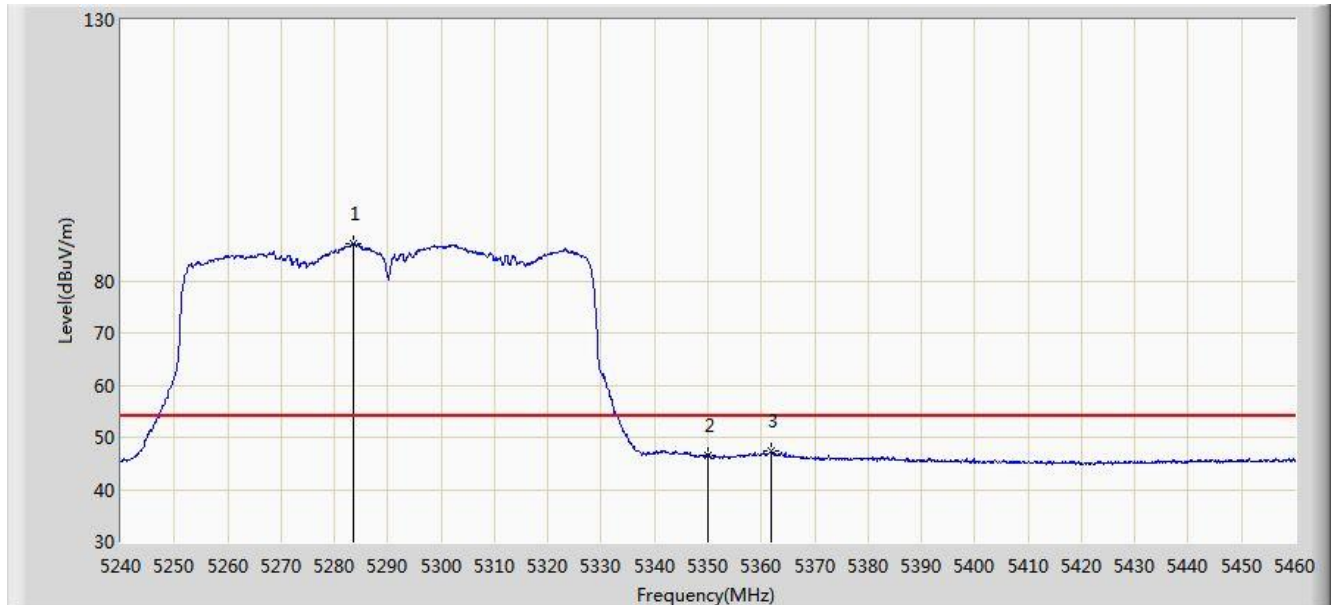


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5283.670	87.006	80.774	N/A	N/A	6.231	AV
2			5350.000	46.531	40.204	-7.469	54.000	6.327	AV
3			5361.770	47.256	40.858	-6.744	54.000	6.399	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

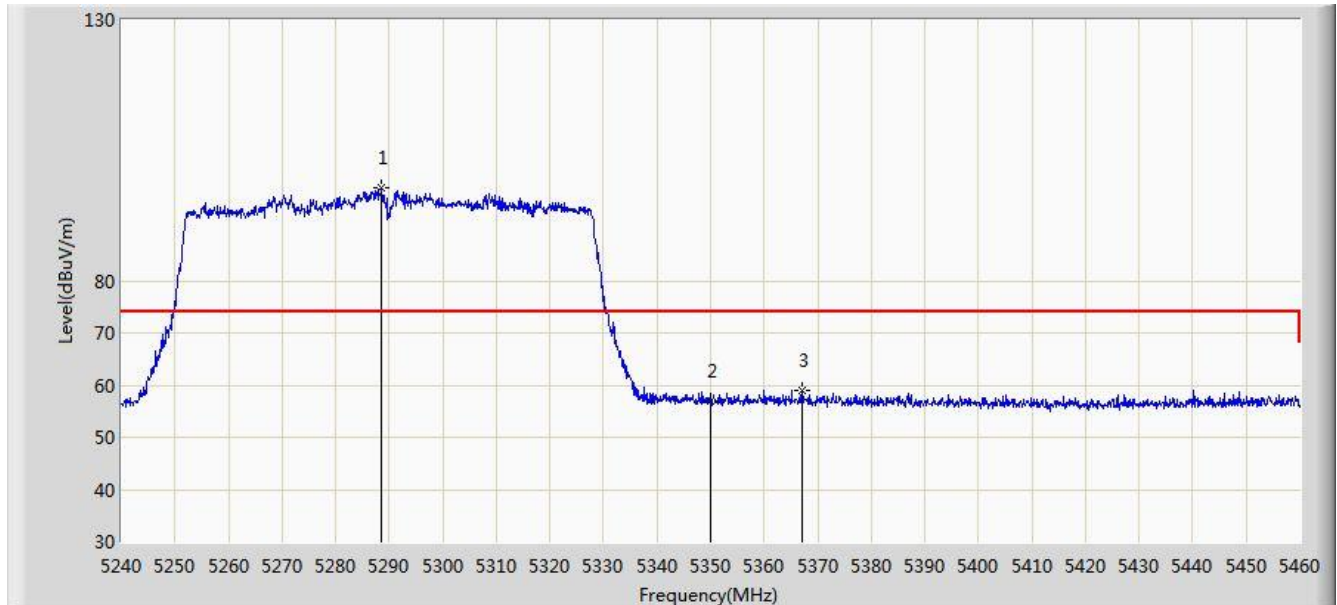


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5288.510	97.836	91.594	N/A	N/A	6.242	PK
2			5350.000	56.926	50.599	-17.074	74.000	6.327	PK
3			5367.050	59.071	52.634	-14.929	74.000	6.437	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

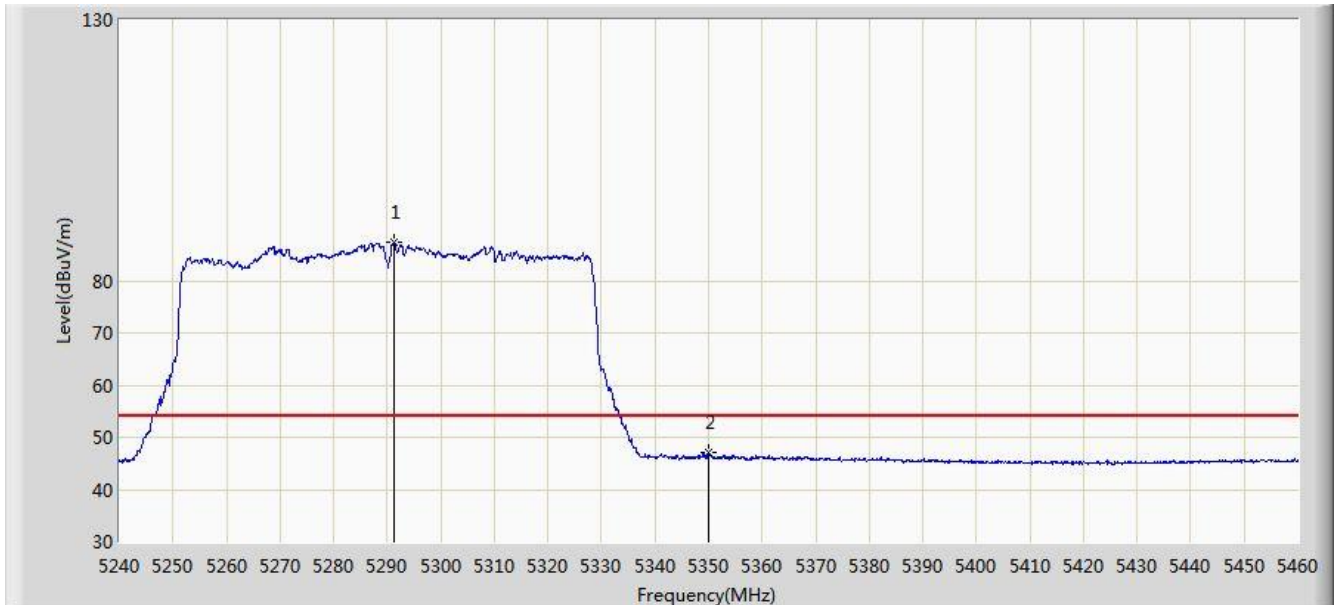


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5291.370	87.305	81.055	N/A	N/A	6.250	AV
2			5350.000	46.996	40.669	-7.004	54.000	6.327	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

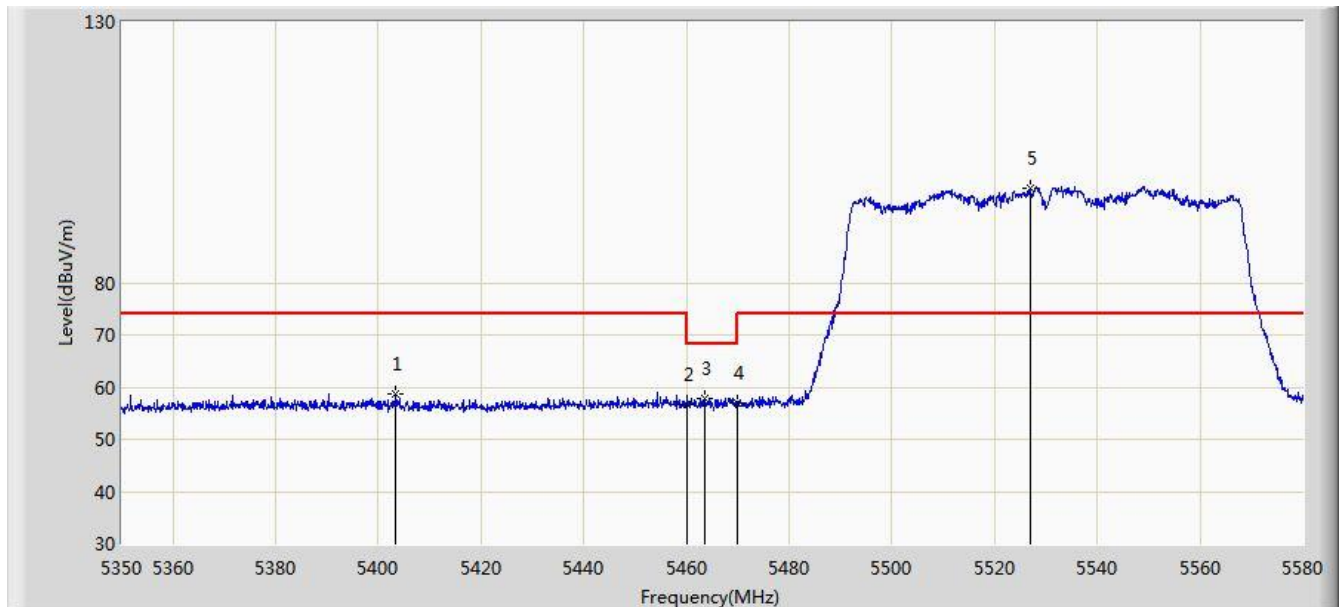


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5403.360	58.805	52.354	-15.195	74.000	6.452	PK
2			5460.000	56.670	50.058	-17.330	74.000	6.612	PK
3			5463.620	57.929	51.333	-10.271	68.200	6.597	PK
4			5470.000	57.087	50.520	-11.113	68.200	6.567	PK
5		*	5527.100	98.217	91.553	N/A	N/A	6.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

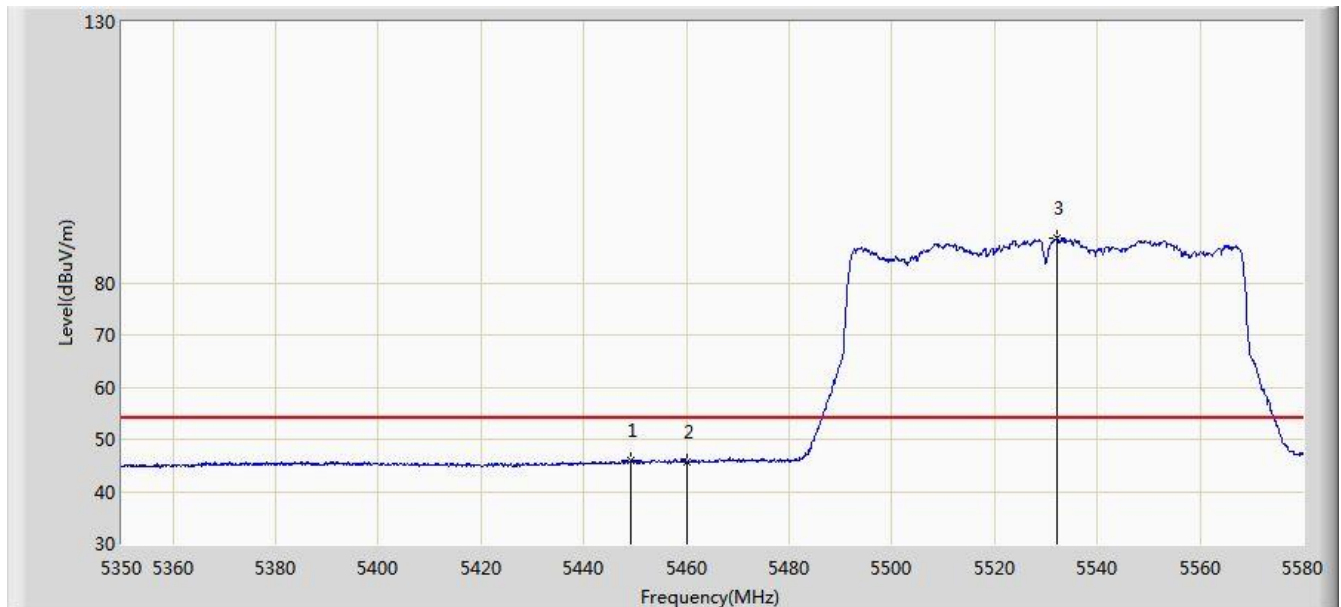


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.130	46.030	39.411	-7.970	54.000	6.619	AV
2			5460.000	45.711	39.099	-8.289	54.000	6.612	AV
3		*	5532.045	88.676	82.050	N/A	N/A	6.625	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

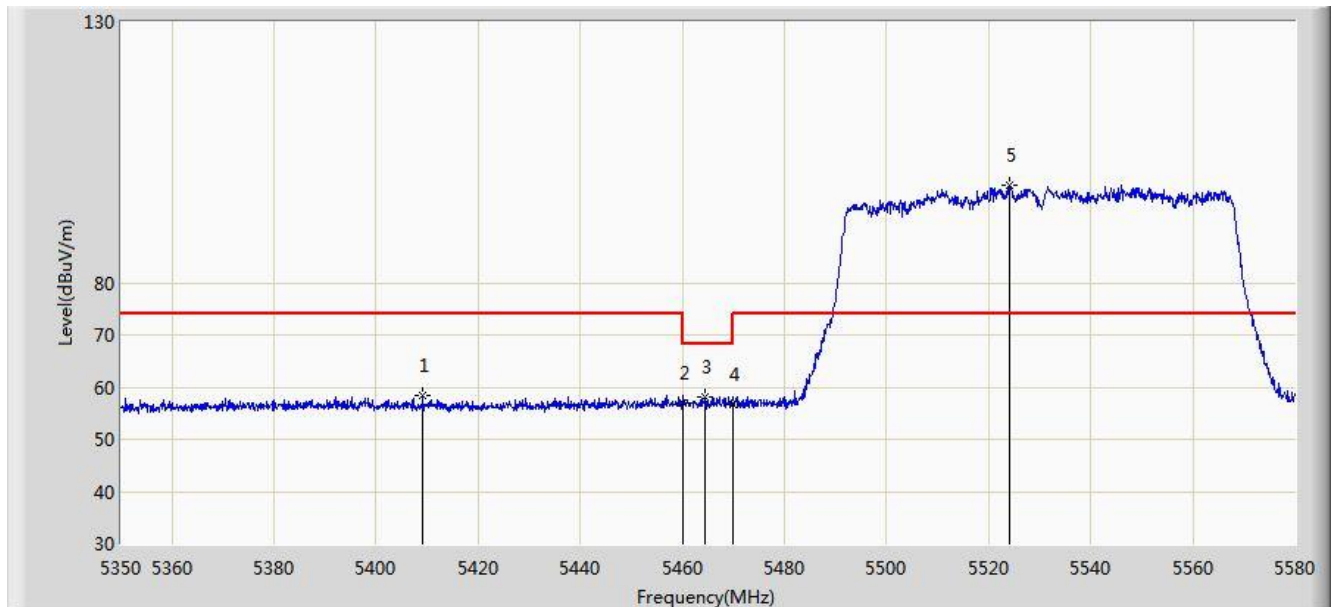


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5409.225	58.511	52.075	-15.489	74.000	6.435	PK
2			5460.000	56.832	50.220	-17.168	74.000	6.612	PK
3			5464.425	58.057	51.465	-10.143	68.200	6.591	PK
4			5470.000	56.706	50.139	-11.494	68.200	6.567	PK
5		*	5524.110	98.743	92.056	N/A	N/A	6.686	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

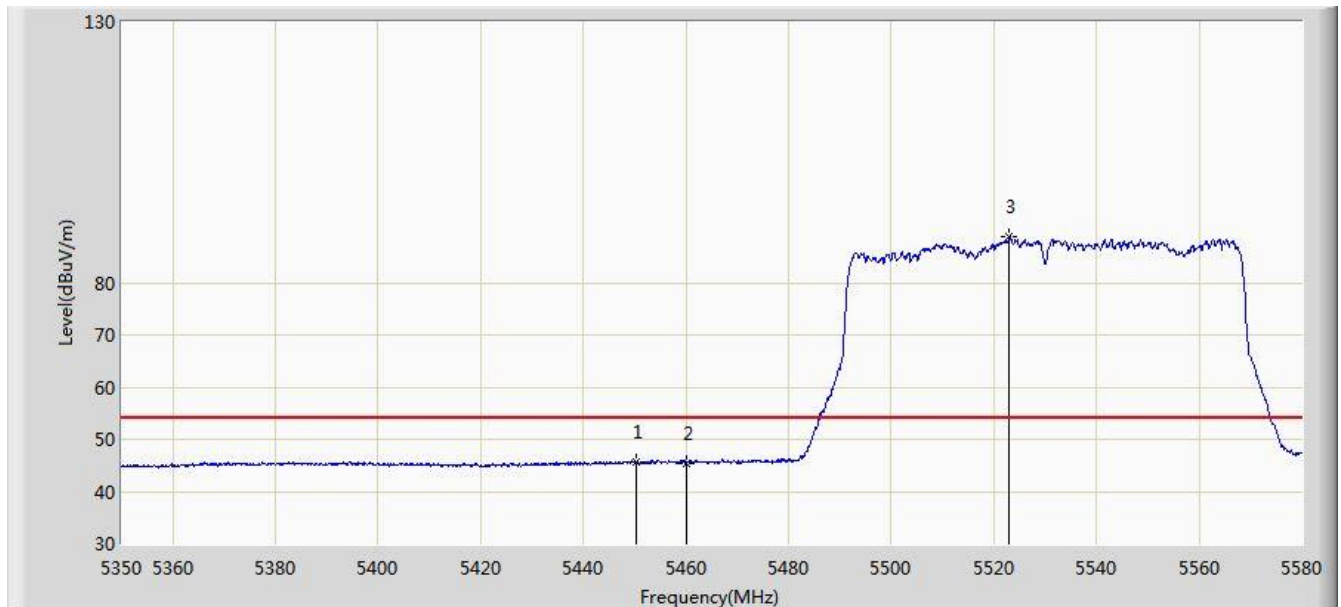


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.165	45.724	39.101	-8.276	54.000	6.623	AV
2			5460.000	45.493	38.881	-8.507	54.000	6.612	AV
3		*	5523.075	88.924	82.229	N/A	N/A	6.695	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

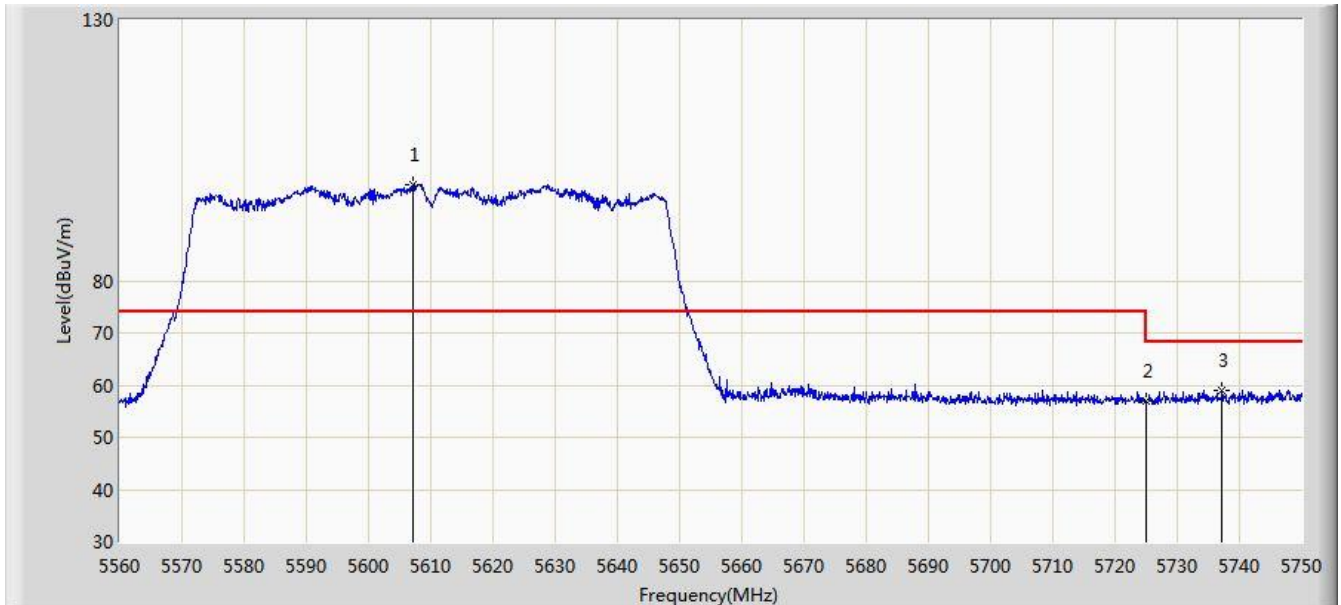


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5607.120	98.423	91.762	N/A	N/A	6.662	PK
2			5725.000	56.876	50.009	-11.324	68.200	6.867	PK
3			5737.175	59.026	52.089	-9.174	68.200	6.937	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

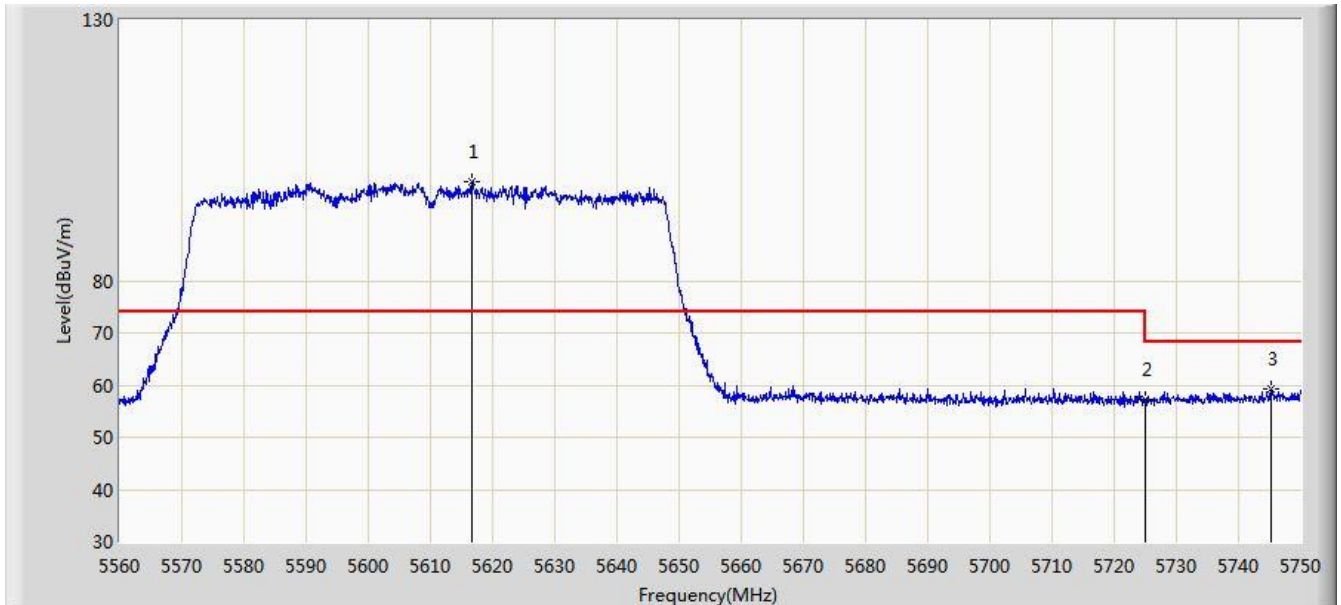


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5616.620	98.925	92.231	N/A	N/A	6.694	PK
2			5725.000	57.253	50.386	-10.947	68.200	6.867	PK
3			5745.155	59.299	52.297	-8.901	68.200	7.002	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

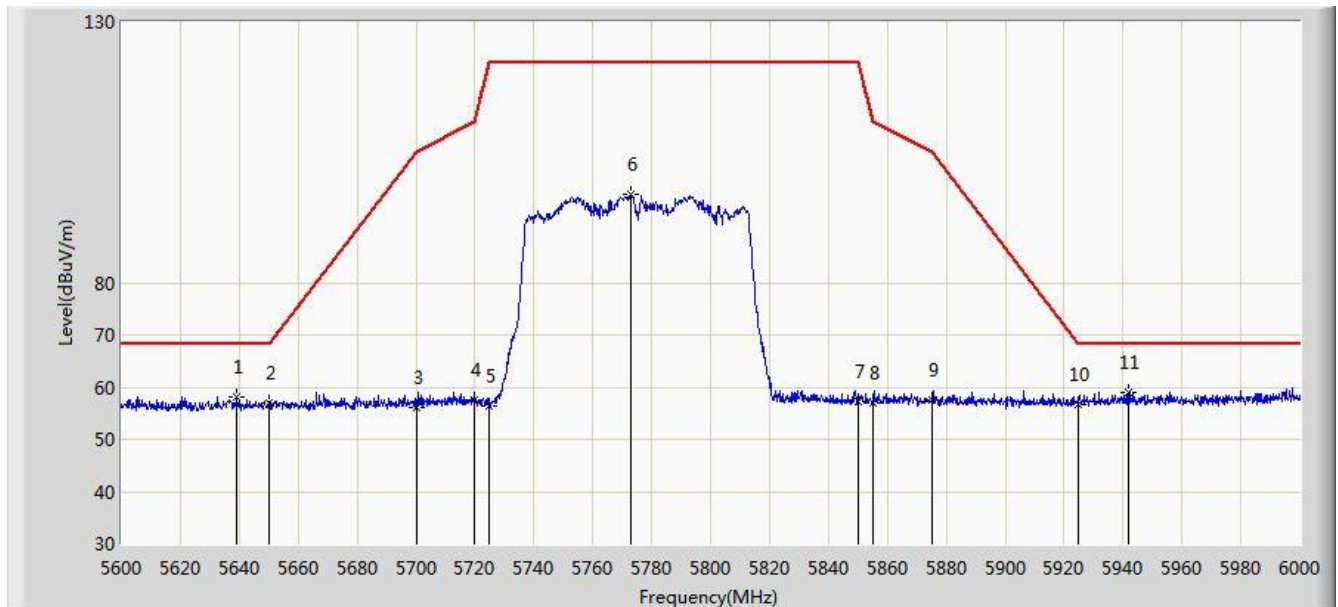


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5639.200	58.194	51.374	-10.006	68.200	6.820	PK
2			5650.000	56.879	50.086	-11.321	68.200	6.793	PK
3			5700.000	56.216	49.307	-48.984	105.200	6.909	PK
4			5720.000	57.481	50.577	-53.319	110.800	6.904	PK
5			5725.000	56.468	49.601	-65.732	122.200	6.867	PK
6			5772.800	96.896	89.700	N/A	N/A	7.196	PK
7			5850.000	57.376	50.046	-64.824	122.200	7.331	PK
8			5855.000	56.850	49.522	-53.950	110.800	7.327	PK
9			5875.000	57.405	49.991	-47.795	105.200	7.414	PK
10			5925.000	56.646	49.346	-11.554	68.200	7.299	PK
11		*	5941.800	59.116	51.672	-9.084	68.200	7.444	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/21 - 06:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Note: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

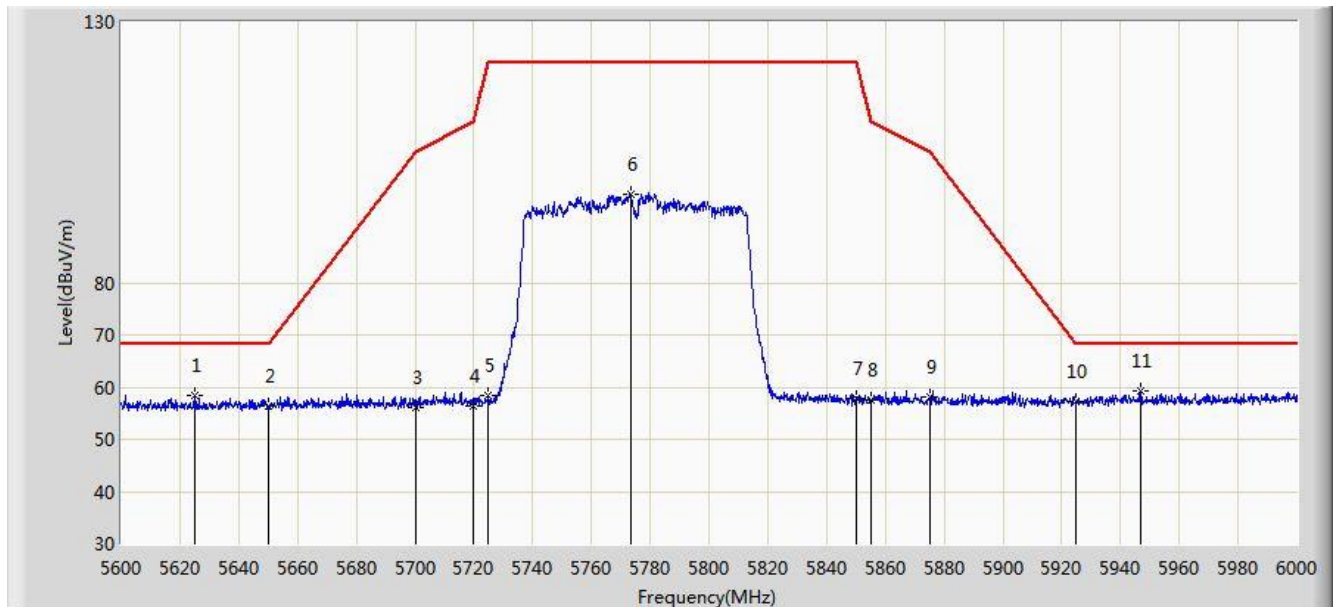

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.200	58.519	51.789	-9.681	68.200	6.730	PK
2			5650.000	56.427	49.634	-11.773	68.200	6.793	PK
3			5700.000	56.044	49.135	-49.156	105.200	6.909	PK
4			5720.000	56.355	49.451	-54.445	110.800	6.904	PK
5			5725.000	58.486	51.619	-63.714	122.200	6.867	PK
6			5773.200	96.984	89.787	N/A	N/A	7.197	PK
7			5850.000	57.806	50.476	-64.394	122.200	7.331	PK
8			5855.000	57.672	50.344	-53.128	110.800	7.327	PK
9			5875.000	58.102	50.688	-47.098	105.200	7.414	PK
10			5925.000	57.273	49.973	-10.927	68.200	7.299	PK
11		*	5947.000	59.259	51.753	-8.941	68.200	7.506	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.9. AC Conducted Emissions Measurement


7.9.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.9.2. Test Setup

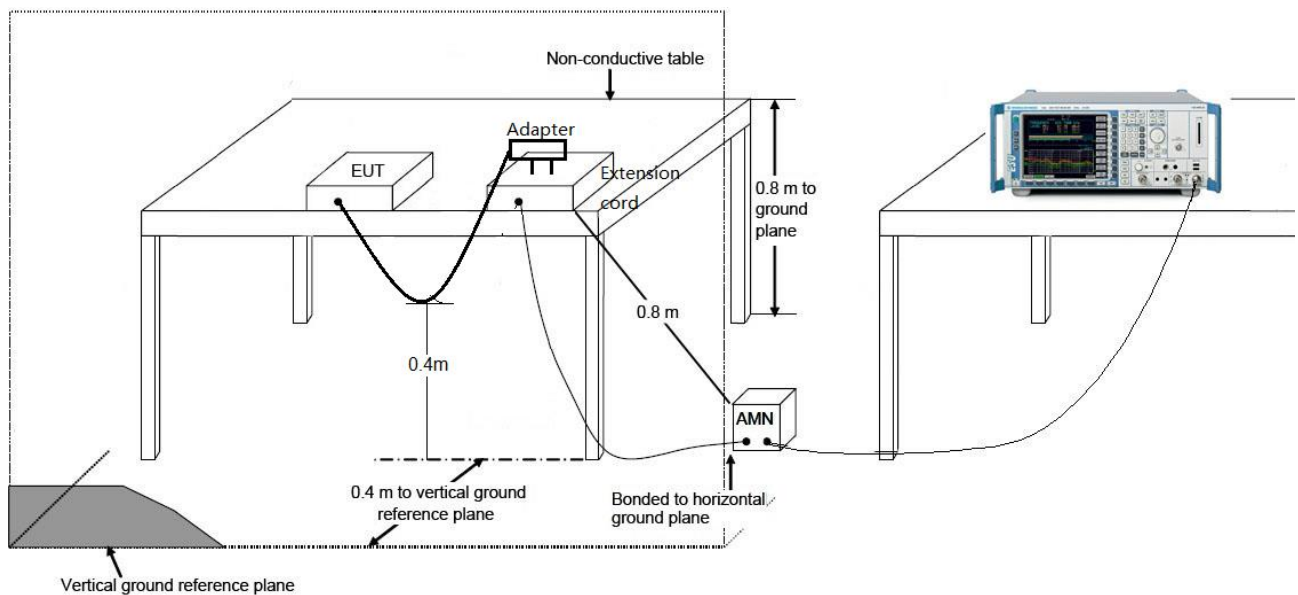

7.9.3.Test Result

Site: SR2	Time: 2019/09/06 - 19:12
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode 1	

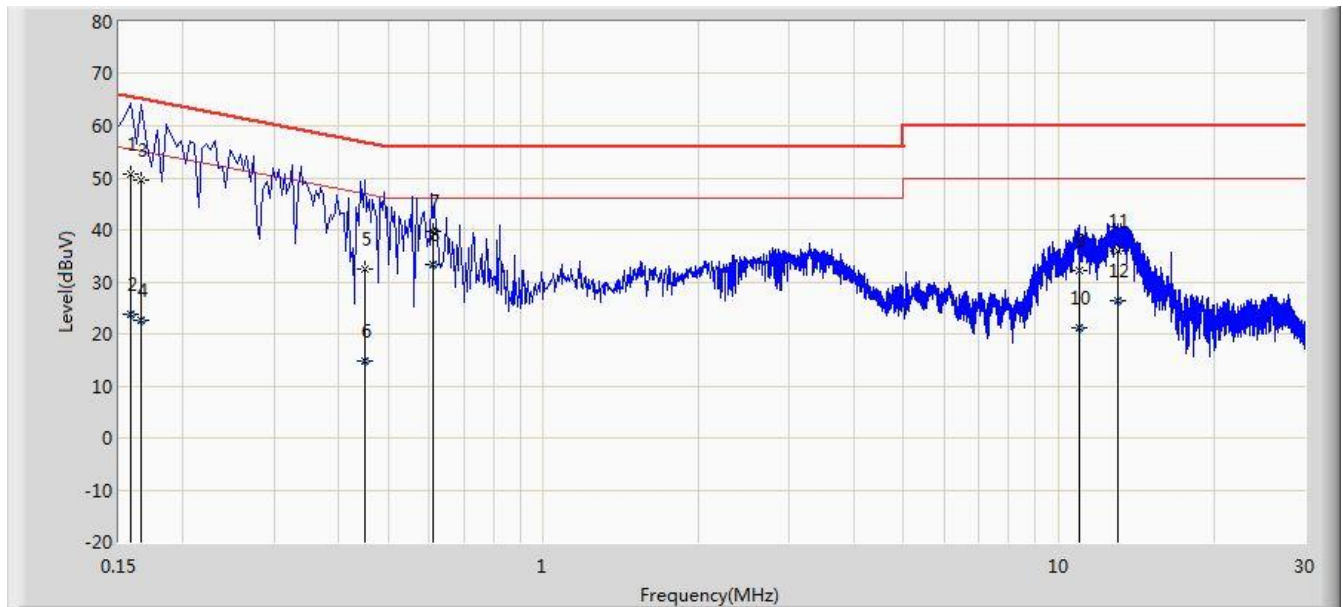


No	Flag	Mark	Frequency (MHz)	Measure Level (DBUV)	Reading Level (DBUV)	Over Limit (dB)	Limit (DBUV)	Factor (dB)	Type
1			0.158	50.781	40.470	-14.787	65.568	10.311	QP
2			0.158	23.677	13.366	-31.891	55.568	10.311	AV
3			0.166	49.432	39.345	-15.726	65.158	10.087	QP
4			0.166	22.582	12.495	-32.576	55.158	10.087	AV
5			0.450	32.361	22.235	-24.514	56.875	10.126	QP
6			0.450	14.726	4.600	-32.149	46.875	10.126	AV
7			0.609	39.610	29.500	-16.390	56.000	10.110	QP
8		*	0.609	33.410	23.300	-12.590	46.000	10.110	AV
9			10.958	32.193	22.084	-27.807	60.000	10.109	QP
10			10.958	21.149	11.040	-28.851	50.000	10.109	AV
11			12.994	36.002	25.934	-23.998	60.000	10.069	QP
12			12.994	26.342	16.273	-23.658	50.000	10.069	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2019/09/06 - 19:17
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode 1	

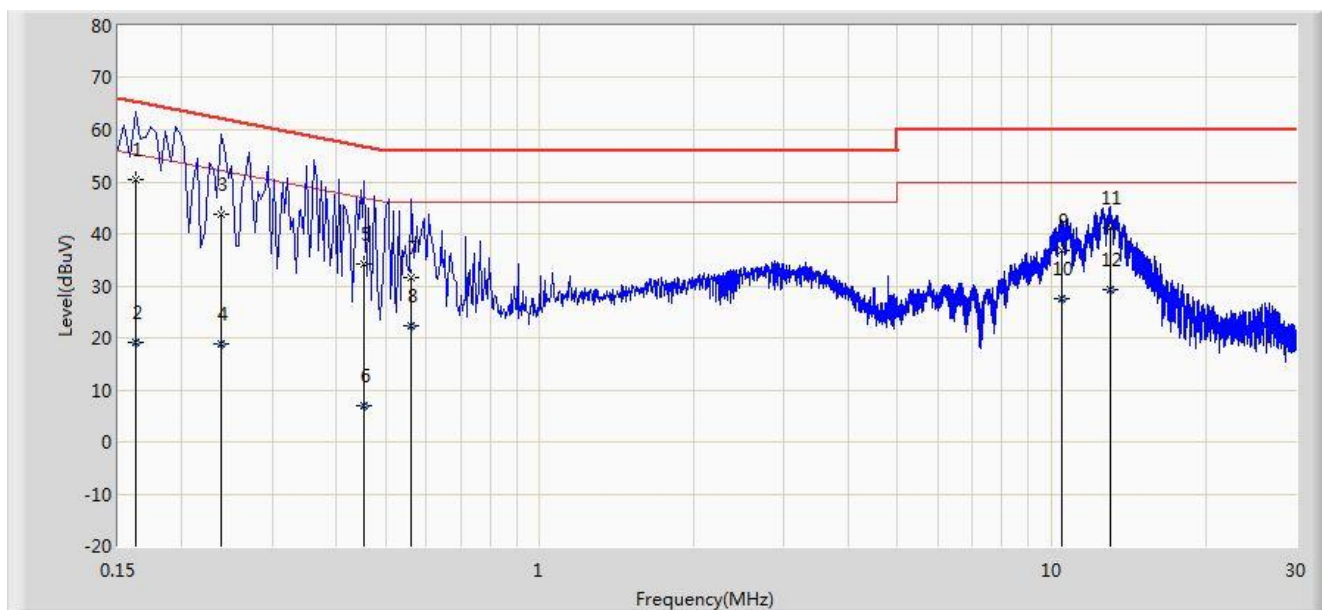

No	Flag	Mark	Frequency (MHz)	Measure Level (DBUV)	Reading Level (DBUV)	Over Limit (dB)	Limit (DBUV)	Factor (dB)	Type
1		*	0.162	50.293	40.215	-15.067	65.361	10.078	QP
2			0.162	19.174	9.096	-36.186	55.361	10.078	AV
3			0.238	43.655	33.663	-18.511	62.166	9.992	QP
4			0.238	18.970	8.978	-33.195	52.166	9.992	AV
5			0.454	34.066	23.914	-22.735	56.802	10.153	QP
6			0.454	6.819	-3.334	-39.983	46.802	10.153	AV
7			0.562	31.460	21.308	-24.540	56.000	10.152	QP
8			0.562	22.190	12.038	-23.810	46.000	10.152	AV
9			10.490	36.704	26.556	-23.296	60.000	10.148	QP
10			10.490	27.499	17.352	-22.501	50.000	10.148	AV
11			13.018	41.266	31.156	-18.734	60.000	10.110	QP
12			13.018	29.279	19.169	-20.721	50.000	10.110	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is in compliance with Part 15E of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “1907RSU061-UT” file.

Appendix B - EUT Photograph

Refer to "1907RSU061-UE" file.