


Test report No:
2150775R-RF-US-P09V01

FCC & ISED TEST REPORT

Product Name	VR All-In-One Headset
Trademark	
Model and /or type reference	HMD Model:A7H10
FCC ID	2ATRW-A7H10
IC	25707-A7H10
Applicant's name / address	Qingdao Pico Technology Co., Ltd. 4 Floor, 3 Building, No. 393 Songling Road, Laoshan District, Qingdao, China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407 ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01 RSS-Gen Issue 5 /RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Tested By (name / position & signature)	Tim Cao/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2021-07-27
Report Version	V1.1
Report template No	Template_FCC Part15E-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations	6
Document History.....	7
Remarks and Comments.....	7
Used Equipment.....	8
Uncertainty.....	10
1 General Information.....	11
1.1 General Description of the Item(s)	11
1.2 Antenna Information	12
1.3 Channel List	13
1.4 802.11ax RU configurations:.....	14
1.5 Power vs Data Rate.....	15
2 Description of Test Setup	21
2.1 Operating mode(s) used for tests.....	21
2.2 Accessories Information	22
2.3 Auxiliary equipment / Test software for the EUT.....	22
2.4 Test Configuration / Block diagram used for tests	23
2.5 Testing process.....	24
3 Verdict summary section	25
3.1 Standards.....	25
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	25
3.3 Overview of results.....	26
3.4 Test Facility.....	28
4 Test Results	29
4.1 AC Power Line Conducted Emission	29
4.1.1 Limit	29
4.1.2 Test Setup.....	29
4.1.3 Test Procedure.....	29
4.1.4 Test Data	30
4.2 Radiated Emissions.....	32
4.2.1 Limit	32
4.2.2 Test Setup.....	34

4.2.3 Test Procedure.....	35
4.2.4 Test Data	36
4.3 Emission bandwidth	370
4.3.1 Limit	370
4.3.2 Test Setup.....	370
4.3.3 Test Procedure.....	370
4.3.4 Test Data	371
4.4 6dB bandwidth	374
4.4.1 Limit	374
4.4.2 Test Setup.....	374
4.4.3 Test Procedure.....	374
4.4.4 Test Data	375
4.5 Duty cycle	377
4.5.1 Limit	377
4.5.2 Test Setup.....	377
4.5.3 Test Procedure.....	377
4.5.4 Test Data	378
4.6 Power Output	380
4.6.1 Limit	380
4.6.2 Test Setup.....	381
4.6.3 Test Procedure.....	381
4.6.4 Test Data	383
4.7 Peak Power Spectral Density	392
4.7.1 Limit:	392
4.7.2 Test Setup.....	392
4.7.3 Test Procedure.....	393
4.7.4 Test Data	394
4.8 Radiated Emission Band Edge	406
4.8.1 Limit	406
4.8.2 Test Setup.....	406
4.8.3 Test Procedure.....	407
4.8.4 Test Data	408
4.9 Frequency Stability.....	864
4.9.1 Limit:	864
4.9.2 Test Setup.....	864
4.9.3 Test Procedure.....	864
4.9.4 Test Data	865

4.10	Antenna Requirement.....	867
4.10.1	Limit:	867
4.10.2	Antenna Connector Construction:	867
4.11	Test setup photo and EUT Photo.....	868

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 24, 2021
Date (start test)	May. 24, 2021
Date (finish test)	July. 27, 2021

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2150775R-RF-US-P09V01	V1.0	Initial issue of report.	2021-07-12
2150775R-RF-US-P09V01	V1.1	1. Page 852~863, added band edge partial RU spot check 2. Page 394~405, added PSD partial test data and worst plots.	2021-07-27

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart E Paragraph 15.407.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 802.11ax RU configurations;
 - Chapter 1.5 Data Rate;

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2021.04.28	2022.04.27
Two-Line V-Network	R&S	ENV216	101044	2021.03.20	2022.03.19
50ohm Termination	SHX	TF2	7081402	2020.09.23	2021.09.22
50ohm Termination	SHX	TF2	7081403	2020.09.23	2021.09.22
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2020.08.23	2021.08.22
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density/Band Edge/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2020.08.15	2021.08.14
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2020.08.15	2021.08.14
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2021.02.11	2022.02.10
Coaxial Cable	Woken	SFL402	F02-150410-044	2021.01.01	2021.12.31
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2020.08.13	2021.08.12

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100176	2020.08.15	2021.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2021.03.04	2022.03.03
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2020.08.19	2021.08.18
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2021.03.31	2022.03.30
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2020.08.13	2021.08.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission(1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
Amplifier	Keleto	LNPA	SK20190225	2020.09.25	2021.09.24
Preamplifier	EMCI	EMC184045SE	980263	2021.05.24	2022.05.23
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2020.08.06	2021.08.05
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2021.04.14	2023.04.13
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2021.03.31	2022.03.30
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G	2021.03.20	2022.03.19
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2020.08.13	2021.08.12
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
AC Power Line Conducted Emission	± 2.92 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.60 dB 200MHz~1GHz: 4.10 dB Vertical: 30MHz~200MHz: 4.80 dB 200MHz~1GHz: 4.10 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~40GHz: 4.70 dB Vertical: 18GHz~40GHz: 4.60 dB
RF Antenna Port Conducted Emission	± 1.13 dB
Radiated Emission Band Edge	± 5.00 dB
Occupied Bandwidth	± 279 Hz
Power Spectral Density	± 1.13 dB
Frequency Stability	± 100 Hz
AC Power Line Conducted Emission	± 2.02 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	VR All-In-One Headset
Model No. :	HMD Model:A7H10
Hardware Version. :	R1
Software Version..... :	B201
Firmware Version..... :	WIFI: WLAN.HST.1.0.1.r1-00912-QCAHSTSWPL_SILICONZ-1
FCC ID	2ATRW-A7H10
IC	25707-A7H10
Manufacturer..... :	Qingdao Pico Technology Co., Ltd.
Manufacturer address	4 Floor, 3 Building, Qingdao Research Institute of Beihang University, No. 393 Songling Road, Laoshan District,Qingdao, China
Test Sample SN..... :	#1

Wireless specification..... :	Wi-Fi								
Type of Modulation..... :	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM								
Frequency Range	<table border="1"> <tr> <td>☐</td><td>Outdoor AP</td></tr> <tr> <td>☐</td><td>Indoor AP</td></tr> <tr> <td>☐</td><td>Fixed point-to-point AP</td></tr> <tr> <td>☒</td><td>Mobile and Portable Client</td></tr> </table>	☐	Outdoor AP	☐	Indoor AP	☐	Fixed point-to-point AP	☒	Mobile and Portable Client
☐	Outdoor AP								
☐	Indoor AP								
☐	Fixed point-to-point AP								
☒	Mobile and Portable Client								
	<table border="1"> <tr> <td>☒</td><td>5150MHz~5250MHz</td></tr> <tr> <td>☒</td><td>5250MHz~5350MHz</td></tr> <tr> <td>☒</td><td>5470MHz~5725MHz</td></tr> <tr> <td>☒</td><td>5725MHz~5850MHz</td></tr> </table>	☒	5150MHz~5250MHz	☒	5250MHz~5350MHz	☒	5470MHz~5725MHz	☒	5725MHz~5850MHz
☒	5150MHz~5250MHz								
☒	5250MHz~5350MHz								
☒	5470MHz~5725MHz								
☒	5725MHz~5850MHz								
	<table border="1"> <tr> <td>☒</td><td>With TDWR Channels</td></tr> <tr> <td>☐</td><td>Without TDWR Channels</td></tr> </table>	☒	With TDWR Channels	☐	Without TDWR Channels				
☒	With TDWR Channels								
☐	Without TDWR Channels								
Date Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps								
	802.11n: up to 600 Mbps								
	802.11ac: up to 1.7 Gbps								
	802.11ax: up to 2.4 Gbps								

Rated power supply	<table border="1"> <tr> <th colspan="2">Voltage and Frequency</th></tr> <tr> <td>☐</td><td>AC: 220 – 240 V, 50/60 Hz</td></tr> <tr> <td>☐</td><td>AC: 100 – 240 V, 50/60 Hz</td></tr> <tr> <td>☐</td><td>DC: 3.85 Vdc</td></tr> <tr> <td>☒</td><td>Battery: ...3.85Vdc...</td></tr> <tr> <td>☒</td><td>Adapter: Input: 100-240V,50/60Hz,0.5A Output:5V.3A/9V,2A/12V,1.5A</td></tr> </table>	Voltage and Frequency		☐	AC: 220 – 240 V, 50/60 Hz	☐	AC: 100 – 240 V, 50/60 Hz	☐	DC: 3.85 Vdc	☒	Battery: ...3.85Vdc...	☒	Adapter: Input: 100-240V,50/60Hz,0.5A Output:5V.3A/9V,2A/12V,1.5A
Voltage and Frequency													
☐	AC: 220 – 240 V, 50/60 Hz												
☐	AC: 100 – 240 V, 50/60 Hz												
☐	DC: 3.85 Vdc												
☒	Battery: ...3.85Vdc...												
☒	Adapter: Input: 100-240V,50/60Hz,0.5A Output:5V.3A/9V,2A/12V,1.5A												
Mounting position..... :	<table border="1"> <tr> <td>☐</td><td>Table top equipment</td></tr> <tr> <td>☐</td><td>Wall/Ceiling mounted equipment</td></tr> <tr> <td>☐</td><td>Floor standing equipment</td></tr> <tr> <td>☒</td><td>Head-mounted equipment</td></tr> <tr> <td>☐</td><td>Other: Watch</td></tr> </table>	☐	Table top equipment	☐	Wall/Ceiling mounted equipment	☐	Floor standing equipment	☒	Head-mounted equipment	☐	Other: Watch		
☐	Table top equipment												
☐	Wall/Ceiling mounted equipment												
☐	Floor standing equipment												
☒	Head-mounted equipment												
☐	Other: Watch												

1.2 Antenna Information

Antenna model / type number	N/A			
Antenna serial number	N/A			
Antenna Delivery	☐	1TX + 1RX		
	☒	2TX + 2RX		
	☐	Others:.....		
Antenna technology	☒	SISO		
	☒	MIMO	☒	CDD
Antenna Type	☐	External	☐	Dipole
			☐	Sectorized
	☒	Internal	☒	FPC
			☐	PCB
			☐	Metal Monopole Antenna
			☐	Ceramic chip
			☐	Others.....
Antenna Gain #1	5150-5350: 3.67dBi 5470-5725: 3.43dBi 5725-5850: 5.94dBi			
Antenna Gain #2	5150-5350: 4.22dBi 5470-5725: 3.89dBi 5725-5850: 3.69dBi			
Directional Gain	For Power: 5150-5350: 4.22dBi 5470-5725: 3.89dBi 5725-5850: 5.94dBi For PSD 5150-5350: 7.22dBi 5470-5725: 6.89dBi 5725-5850: 8.94dBi			

1.3 Channel List

802.11a/n/ac/ax(20MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5550 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	N/A	N/A
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	N/A	N/A	N/A	N/A	N/A	N/A

802.11n/ac/ax(40MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	151	5755 MHz	159	5795 MHz	N/A	N/A

802.11ac/ax(80MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530MHz	122	5610 MHz
138	5690 MHz	155	5775 MHz	N/A	N/A	N/A	N/A

1.4 802.11ax RU configurations:

Bandwidth	RU all configurations
20MHz	Diagram illustrating 20MHz RU configurations: - Option 1: 12 RBs (1 pilot each) + 7 DC + 12 RBs (1 pilot each) - Option 2: 6 RBs (2 pilots each) + 7 DC + 6 RBs (2 pilots each) - Option 3: 2 RBs (52 pilots each) + 7 DC + 2 RBs (52 pilots each) - Total: 242 + 3 DC
40MHz	Diagram illustrating 40MHz RU configurations: - Option 1: 24 RBs (1 pilot each) + 5 DC + 24 RBs (1 pilot each) - Option 2: 12 RBs (2 pilots each) + 5 DC + 12 RBs (2 pilots each) - Option 3: 4 RBs (26 pilots each) + 5 DC + 4 RBs (26 pilots each) - Total: 484 + 3 DC
80MHz	Diagram illustrating 80MHz RU configurations: - Option 1: 48 RBs (1 pilot each) + 5 DC + 48 RBs (1 pilot each) - Option 2: 24 RBs (2 pilots each) + 5 DC + 24 RBs (2 pilots each) - Option 3: 8 RBs (26 pilots each) + 5 DC + 8 RBs (26 pilots each) - Total: 996 usable tones + 5 DC

Note 1: For partial RU, the value of Determine $\delta = \text{PSD}_{\text{par}} - \text{PSD}_{\text{full}} \leq 0$, so band edge only shown worst data in each band.

1.5 Power vs Data Rate

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)						
		802.11b	802.11g	802.11a	20MHz Bandwidth		40MHz Bandwidth	
					800ns GI	400ns GI	800ns GI	400ns GI
0	1	---	---	6	6.5	7.2	13.5	15.0
1	1	---	---	9	13.0	14.4	27.0	30.0
2	1	---	---	12	19.5	21.7	40.5	45.0
3	1	---	---	18	26.0	28.9	54.0	60.0
4	1	---	---	24	39.0	43.3	81.0	90.0
5	1	---	---	36	52.0	57.8	108.0	120.0
6	1	---	---	48	58.5	65.0	121.5	135.0
7	1	---	---	54	65.0	72.2	135.0	150.0
8	2	---	---	---	13.0	14.4	27.0	30.0
9	2	---	---	---	26.0	28.9	54.0	60.0
10	2	---	---	---	39.0	43.3	81.0	90.0
11	2	---	---	---	52.0	57.8	108.0	120.0
12	2	---	---	---	78.0	86.7	162.0	180.0
13	2	---	---	---	104.0	115.6	216.0	240.0
14	2	---	---	---	117.0	130.0	243.0	270.0
15	2	---	---	---	130.0	144.0	270.0	300.0

Note1: The blue form is the maximum power data rate.

2: The EUT supports 2 spatial streams.

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)					
				20MHz		40MHz		80MHz	
				Guard Interval		Guard Interval		Guard Interval	
				1600ns	800ns	1600ns	800ns	1600ns	800ns
1	0	BPSK	1/2	6.5	7.2	13.5	15	29.3	32.5
	1	QPSK	1/2	13	14.4	27	30	58.5	65
	2	QPSK	3/4	19.5	21.7	40.5	45	87.8	97.5
	3	16-QAM	1/2	26	28.9	54	60	117	130
	4	16-QAM	3/4	39	43.3	81	90	175.5	195
	5	64-QAM	2/3	52	57.8	108	120	234	260
	6	64-QAM	3/4	58.5	65	121.5	135	263.3	292.5
	7	64-QAM	5/6	65	72.2	135	150	292.5	325
	8	256-QAM	3/4	78	86.7	162	180	351	390
	9	256-QAM	5/6	N/A	N/A	180	200	390	433.3
2	10	BPSK	1/2	13	14.4	27	30	58.6	65
	11	QPSK	1/2	26	28.8	54	60	117	130
	12	QPSK	3/4	39	43.4	81	90	175.6	195
	13	16-QAM	1/2	52	57.8	108	120	234	260
	14	16-QAM	3/4	78	86.6	162	180	351	390
	15	64-QAM	2/3	104	115.6	216	240	468	520
	16	64-QAM	3/4	117	130	243	270	526.6	585
	17	64-QAM	5/6	130	144.4	270	300	585	650
	18	256-QAM	3/4	156	173.4	324	360	702	780
	19	256-QAM	5/6	N/A	N/A	360	400	780	866.6
Note 1: The blue form is the maximum power data rate.									
2: The EUT supports 2 spatial streams.									

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)					
				20MHz		40MHz		80MHz	
				Guard Interval		Guard Interval		Guard Interval	
				1600 ns GI	800 ns GI	1600 ns GI	800 ns GI	1600 ns GI	800 ns GI
1	0	BPSK	1/2	4	4	8	9	17	18
	1	QPSK	1/2	16	17	33	34	68	72
	2	QPSK	3/4	24	26	49	52	102	108
	3	16-QAM	1/2	33	34	65	69	136	144
	4	16-QAM	3/4	49	52	98	103	204	216
	5	64-QAM	2/3	65	69	130	138	272	288
	6	64-QAM	3/4	73	77	146	155	306	324
	7	64-QAM	5/6	81	86	163	172	340	360
	8	256-QAM	3/4	98	103	195	207	408	432
	9	256-QAM	5/6	108	115	217	229	453	480
	10	1024-QAM	3/4	122	129	244	258	510	540
2	11	1024-QAM	5/6	135	143	271	287	567	600
	12	BPSK	1/2	8	8	16	18	34	36
	13	QPSK	1/2	32	34	66	68	136	144
	14	QPSK	3/4	48	52	98	104	204	216
	15	16-QAM	1/2	66	68	130	138	272	288
	16	16-QAM	3/4	98	104	196	206	408	432
	17	64-QAM	2/3	130	138	260	276	544	576
	18	64-QAM	3/4	146	154	292	310	612	648
	19	64-QAM	5/6	162	172	326	344	680	720
	20	256-QAM	3/4	196	206	390	414	816	864
	21	256-QAM	5/6	216	230	434	458	906	960
	22	1024-QAM	3/4	244	258	488	516	1020	1080
	23	1024-QAM	5/6	270	286	542	574	1134	1200

Note 1: The blue form is the maximum power data rate.

2: The EUT supports 2 spatial streams.

Note: The General Description of the Item, antenna information, 802.11ax RU configurations , Data Rate and Channel List in clause 1 are provided and confirmed by the client.

1.6 Power vs Data Rate

Test Mode	Frequency	Power Setting	
		SISO	2Tx
802.11a	5180	5	3
	5220	5	3
	5240	5	3
	5260	15	10
	5300	15	10
	5320	15	10
	5500	15	10
	5580	15	10
	5700	15	10
	5745	10	10
	5785	10	10
	5825	10	10
802.11n(20MHz)	5180	5	3
	5220	5	3
	5240	5	3
	5260	15	10
	5300	15	10
	5320	15	10
	5500	15	10
	5580	15	10
	5700	15	10
	5745	10	10
	5785	10	10
	5825	10	10
802.11n(40MHz)	5190	8	6
	5230	8	6
	5270	15	10
	5310	15	10
	5510	15	10
	5550	15	10
	5670	15	10
	5755	6	4
	5795	6	4
802.11ac(20MHz)	5180	5	3
	5220	5	3

	5240	5	3
	5260	15	10
	5300	15	10
	5320	15	10
	5500	15	10
	5580	15	10
	5700	15	10
	5745	10	10
	5785	10	10
	5825	10	10
802.11ac(40MHz)	5190	8	6
	5230	8	6
	5270	15	10
	5310	15	10
	5510	15	10
	5550	15	10
	5670	15	10
	5755	6	4
	5795	6	4
802.11ac(80MHz)	5210	6	4
	5290	15	10
	5530	15	10
	5775	6	4
802.11ax(20MHz)	5180	5	3
	5220	5	3
	5240	5	3
	5260	15	10
	5300	15	10
	5320	15	10
	5500	15	10
	5580	15	10
	5700	15	10
	5745	10	10
	5785	10	10
	5825	10	10
802.11ax(20MHz) Partial	5180	2	2
	5220	2	2
	5240	2	2
	5260	6	4
	5300	6	4
	5320	6	4
	5500	6	4

	5580	6	4
	5700	6	4
	5745	2	2
	5785	2	2
	5825	2	2
802.11ax(40MHz)	5190	8	6
	5230	8	6
	5270	15	10
	5310	15	10
	5510	15	10
	5550	15	10
	5670	15	10
	5755	6	4
	5795	6	4
802.11ax(40MHz) Partial	5190	2	-1
	5230	2	-1
	5270	4	1
	5310	4	1
	5510	4	1
	5550	4	1
	5670	1	-2
	5755	1	-2
	5795	1	-2
802.11ax(80MHz)	5210	6	4
	5290	15	10
	5530	15	10
	5775	6	4
802.11ax(80MHz) Partial	5210	-2	-5
	5290	0	-3
	5530	0	-3
	5775	-2	-5

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.1a
	Mode 2: Transmit by 802.11n (20MHz)
	Mode 3: Transmit by 802.11n (40MHz)
	Mode 4: Transmit by 802.11ac (20MHz)
	Mode 5: Transmit by 802.11ac (40MHz)
	Mode 6: Transmit by 802.11ac (80MHz)
	Mode 7: Transmit by 802.11ax (20MHz)
	Mode 8: Transmit by 802.11ax (40MHz)
	Mode 9: Transmit by 802.11ax (80MHz)

2.2 Accessories Information


Accessories Information	Brand/model name	Cable		
		Length used during test [m]	Attached during test	Shielded
USB control Cable	N/A	10	☒	☒
USB control Cable	N/A	0.5	☒	☒
			☐	☐
			☐	☐
			☐	☐

2.3 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
QDART	qdart_conn.win.1.0_installer_00065.1	Qualcomm	N/A

2.4 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

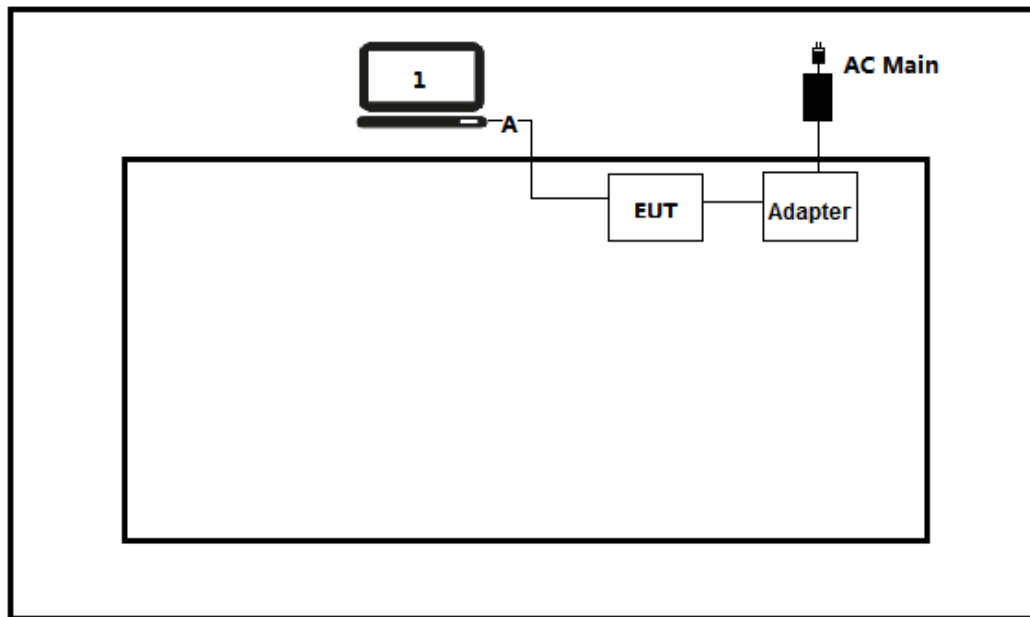

Test setup Diagram- Radiated Emission

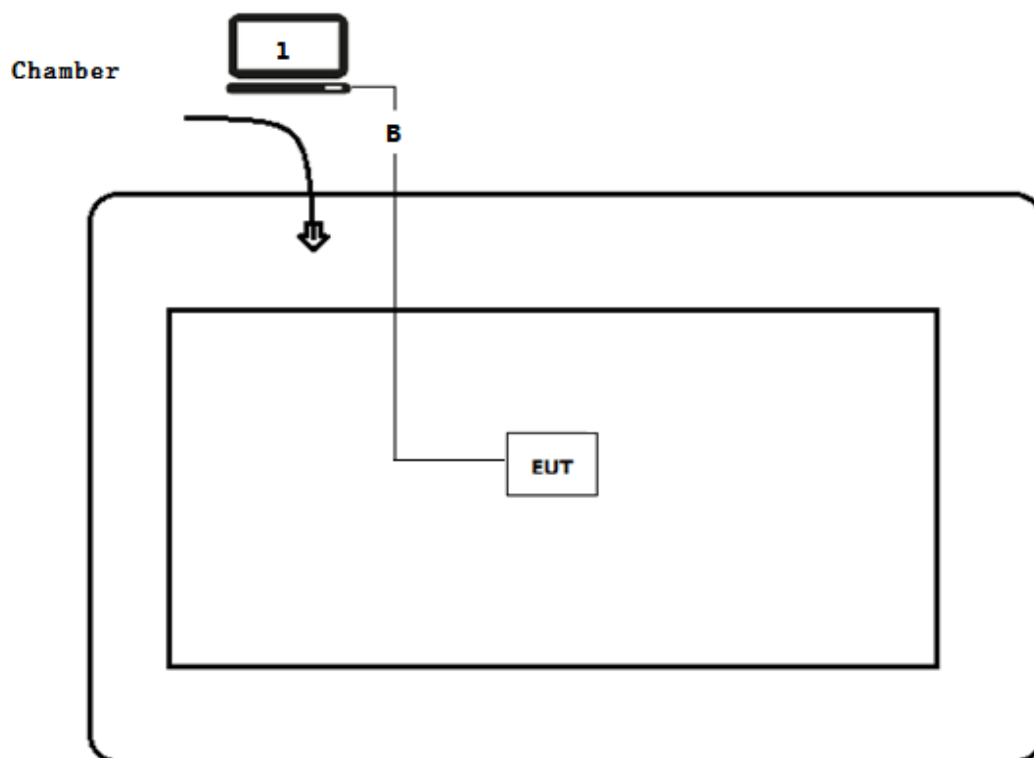

2.5 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Execute the QDART on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart E Section 15.407	2017	General technical requirements for 5.15-5.25 GHz;5.25-5.35 GHz; 5.47-5.725 GHz;5.725-5.85 GHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 789033 D02 General UNII Test Procedures New Rules v02r01	2017	This document provides guidance for determining emissions compliance of U-NII devices under Part 15, Subpart E of the FCC rules.
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS),Frequency Hopping Systems (FHSs)and Licence-Exempt Local Area Network(LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
Conducted Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.207	PASS	---
Radiated Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.209	PASS	---
Emission bandwidth and occupied bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	PASS	---
6dB Emission Bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	PASS	---
Power Output	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	---
Peak Power Spectral Density	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	---
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart E: Section 15.205, 15.407(b)	PASS	---
Frequency Stability	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(g)	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
Conducted Emission	RSS-Gen Issue 5: Section 8.8	PASS	---
Radiated Emission	RSS-Gen Issue 5: Section 8.9 RSS-247 Issue 2: Section 6.2	PASS	---
Emission bandwidth and occupied bandwidth	RSS-Gen Issue 5: Section 6.7 RSS-247 Issue 2: Section 6.2.4	PASS	---
Power Output	RSS-247 Issue 2: Section 6.2	PASS	---
Peak Power Spectral Density	RSS-247 Issue 2: Section 6.2	PASS	---
Band Edge	RSS-Gen Issue 5: Section 8.10	PASS	---
Frequency Stability	RSS-Gen Issue 5: Section 6.11	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

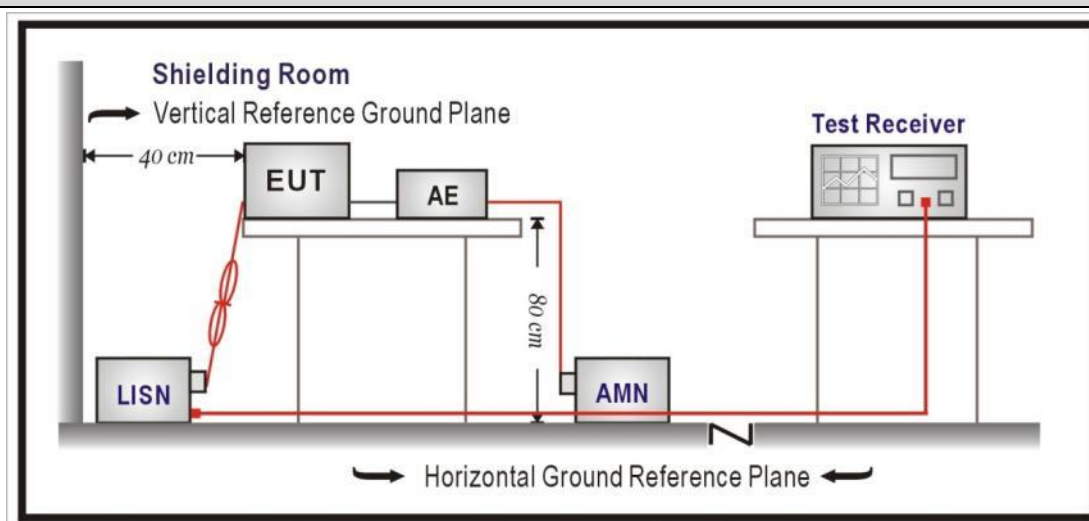


4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

Engineer: Tongben	
Site: TR1	Time: 2021/06/16
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit by BT+WiFi	

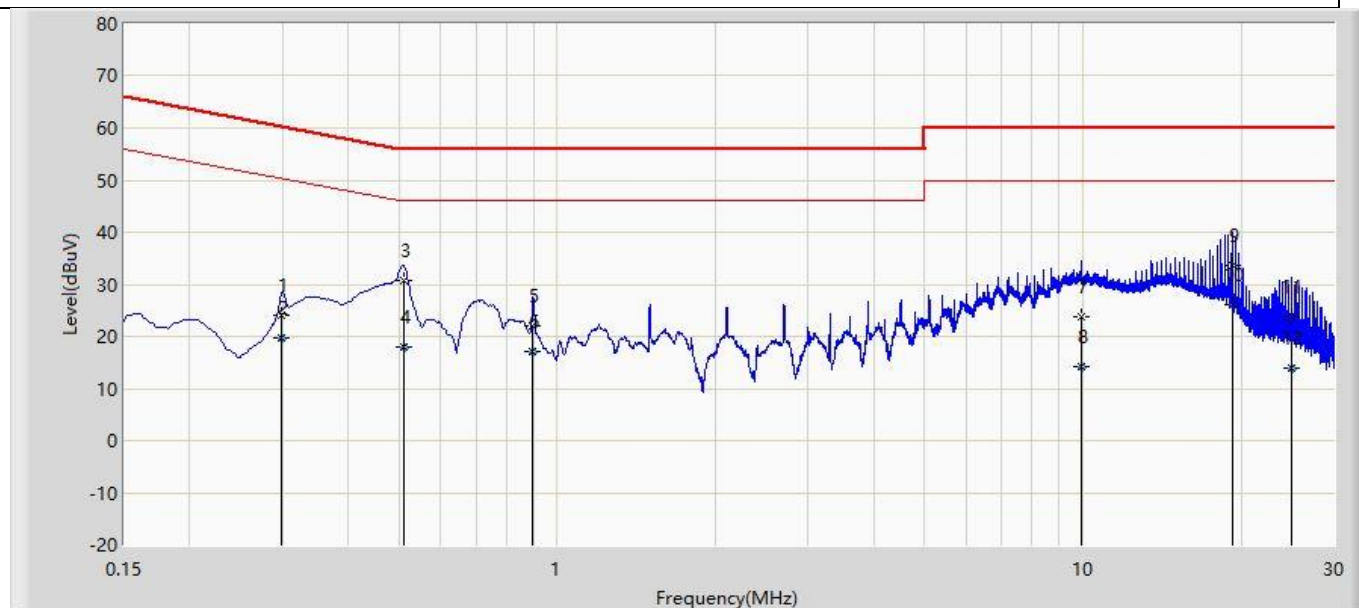


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.298	24.074	14.394	-36.210	60.284	9.646	0.034	0.000	QP
2		0.298	19.709	10.029	-30.575	50.284	9.646	0.034	0.000	AV
3		0.510	30.756	21.074	-25.244	56.000	9.640	0.042	0.000	QP
4		0.510	17.863	8.181	-28.137	46.000	9.640	0.042	0.000	AV
5		0.899	22.005	12.309	-33.995	56.000	9.640	0.055	0.000	QP
6		0.899	17.112	7.417	-28.888	46.000	9.640	0.055	0.000	AV
7		9.902	23.651	13.683	-36.349	60.000	9.768	0.199	0.000	QP
8		9.902	14.334	4.367	-35.666	50.000	9.768	0.199	0.000	AV
9		19.201	33.723	23.478	-26.277	60.000	9.964	0.281	0.000	QP
10	*	19.201	26.065	15.820	-23.935	50.000	9.964	0.281	0.000	AV
11		24.900	23.650	13.182	-36.350	60.000	10.147	0.321	0.000	QP
12		24.900	13.810	3.342	-36.190	50.000	10.147	0.321	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Tongben	
Site: TR1	Time: 2021/06/16
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit by BT+WiFi	

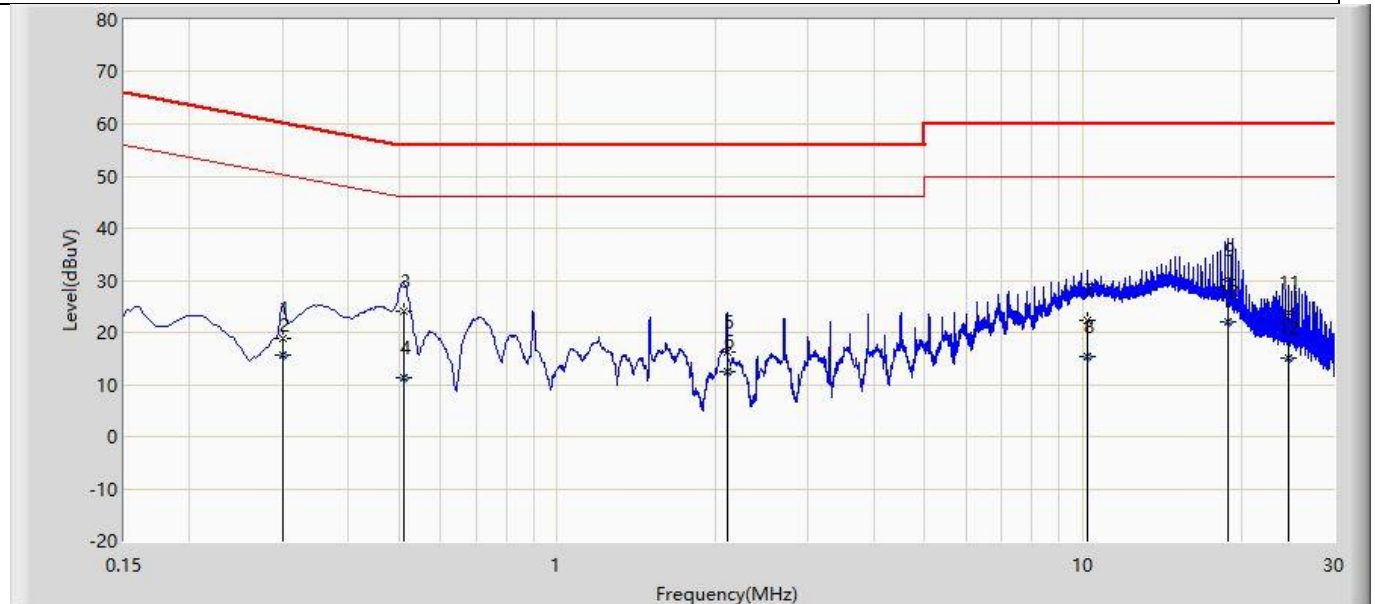

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.301	18.814	9.160	-41.408	60.222	9.620	0.034	0.000	QP
2		0.301	15.540	5.885	-34.683	50.222	9.620	0.034	0.000	AV
3		0.510	23.964	14.303	-32.036	56.000	9.620	0.042	0.000	QP
4		0.510	11.206	1.545	-34.794	46.000	9.620	0.042	0.000	AV
5		2.101	16.256	6.536	-39.744	56.000	9.632	0.088	0.000	QP
6		2.101	12.469	2.749	-33.531	46.000	9.632	0.088	0.000	AV
7		10.198	22.266	12.280	-37.734	60.000	9.784	0.202	0.000	QP
8		10.198	15.235	5.249	-34.765	50.000	9.784	0.202	0.000	AV
9		18.899	30.015	19.828	-29.985	60.000	9.909	0.278	0.000	QP
10	*	18.899	21.892	11.705	-28.108	50.000	9.909	0.278	0.000	AV
11		24.601	23.766	13.297	-36.234	60.000	10.150	0.319	0.000	QP
12		24.601	15.089	4.621	-34.911	50.000	10.150	0.319	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.2 Radiated Emissions**VERDICT: PASS****4.2.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.207	
Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			


Restricted Band Emissions Limit

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)

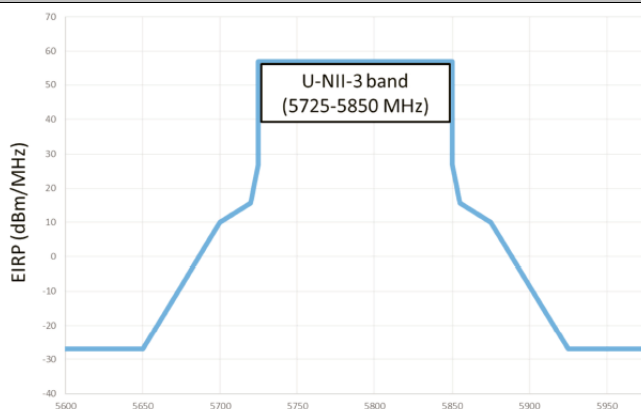
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	
5725 - 5850		

4.2.2 Test Setup


Below 30MHz Test Setup:

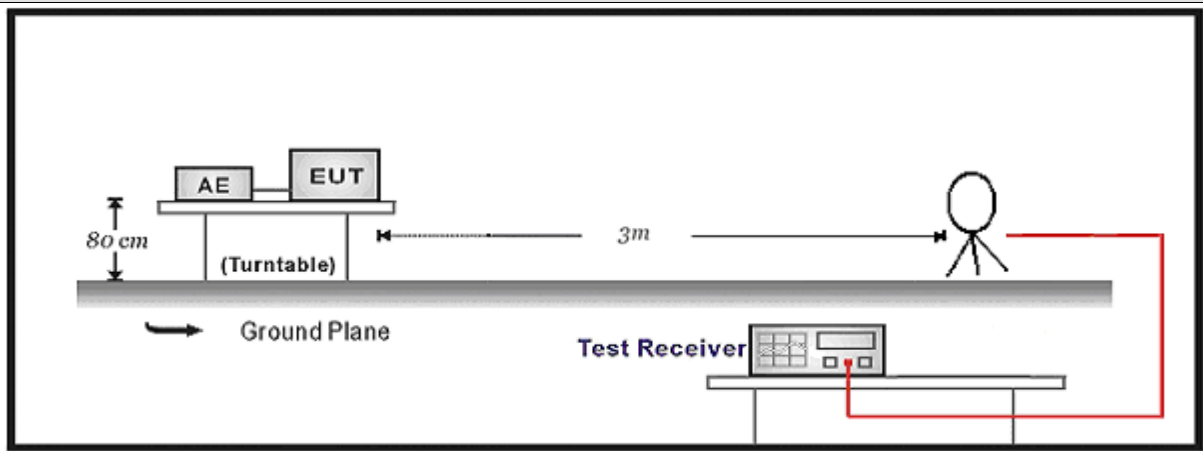

30MHz-1GHz Test Setup:

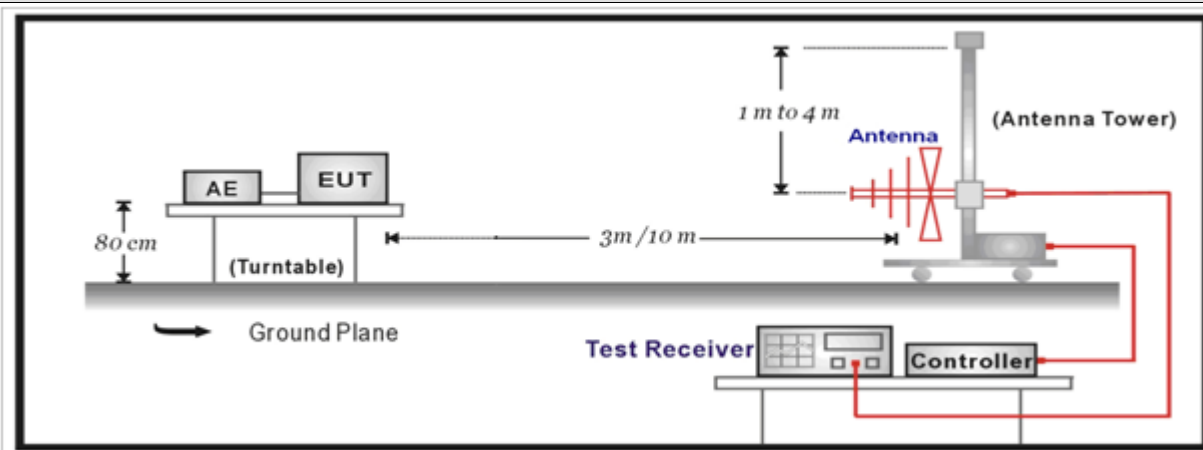

Above 1GHz Test Setup:

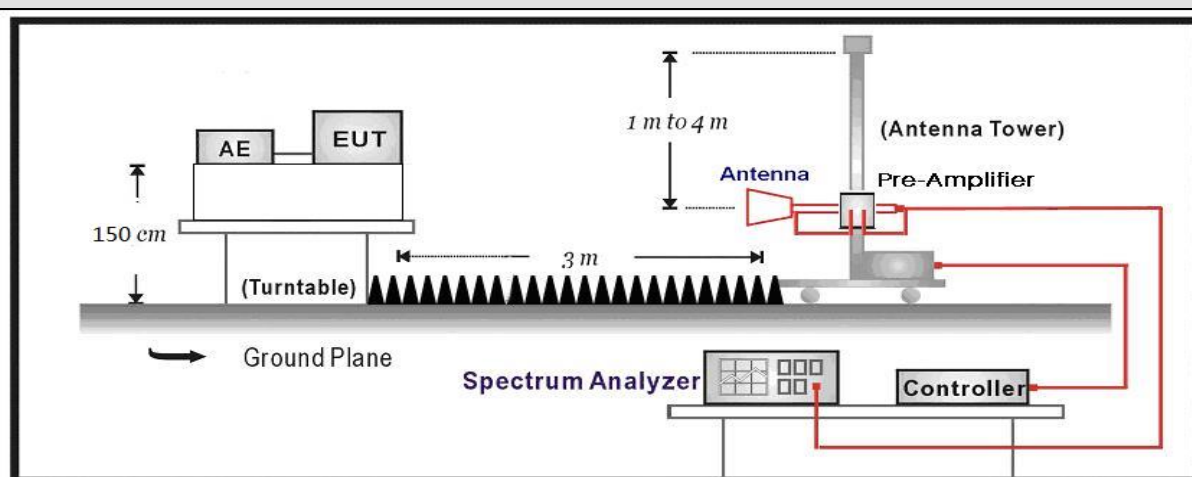


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
		☒ ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		☒ ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		☒ ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2150775R	Page No.: 315
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 802.11a Ant 1	

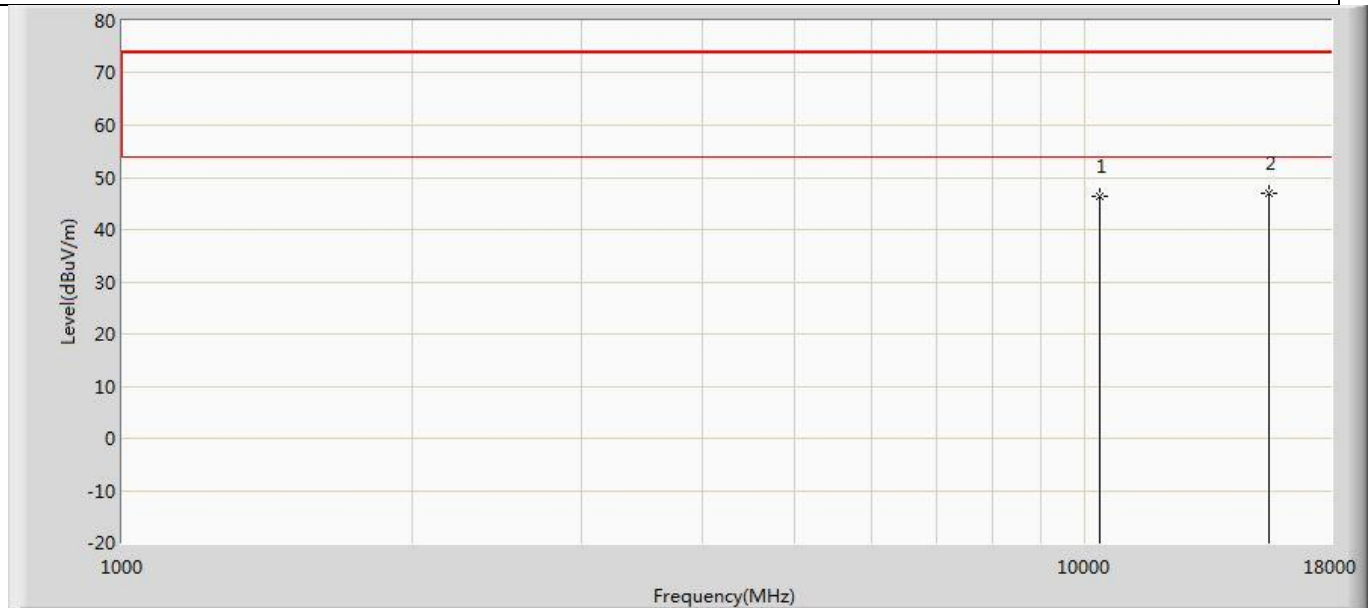


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	46.338	42.617	-27.662	74.000	3.722	PK
2	*	15540.000	46.863	39.510	-27.137	74.000	7.352	PK

Profile: 2150775R	Page No.: 316
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 802.11a Ant 1	

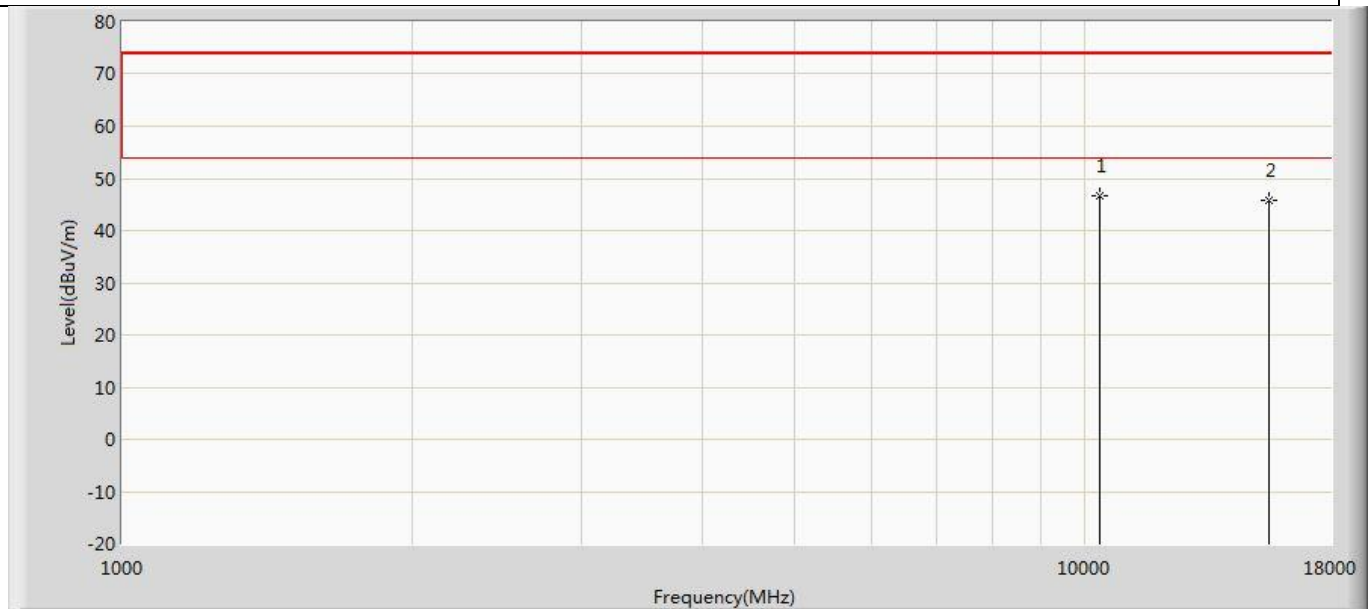


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10360.000	46.542	42.821	-27.458	74.000	3.722	PK
2		15540.000	45.661	38.308	-28.339	74.000	7.352	PK

Profile: 2150775R	Page No.: 317
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5220MHz by 802.11a Ant 1	

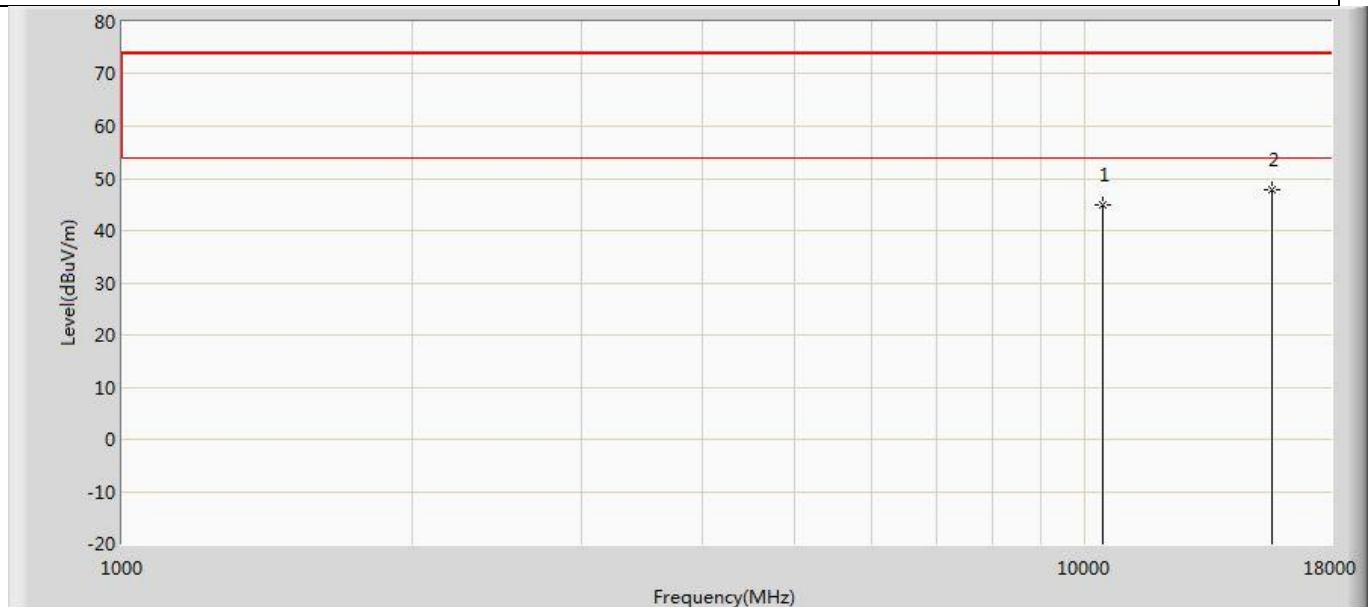


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.818	39.995	-29.182	74.000	4.823	PK
2	*	15660.000	47.732	38.955	-26.268	74.000	8.776	PK

Profile: 2150775R	Page No.: 318
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5220MHz by 802.11a Ant 1	

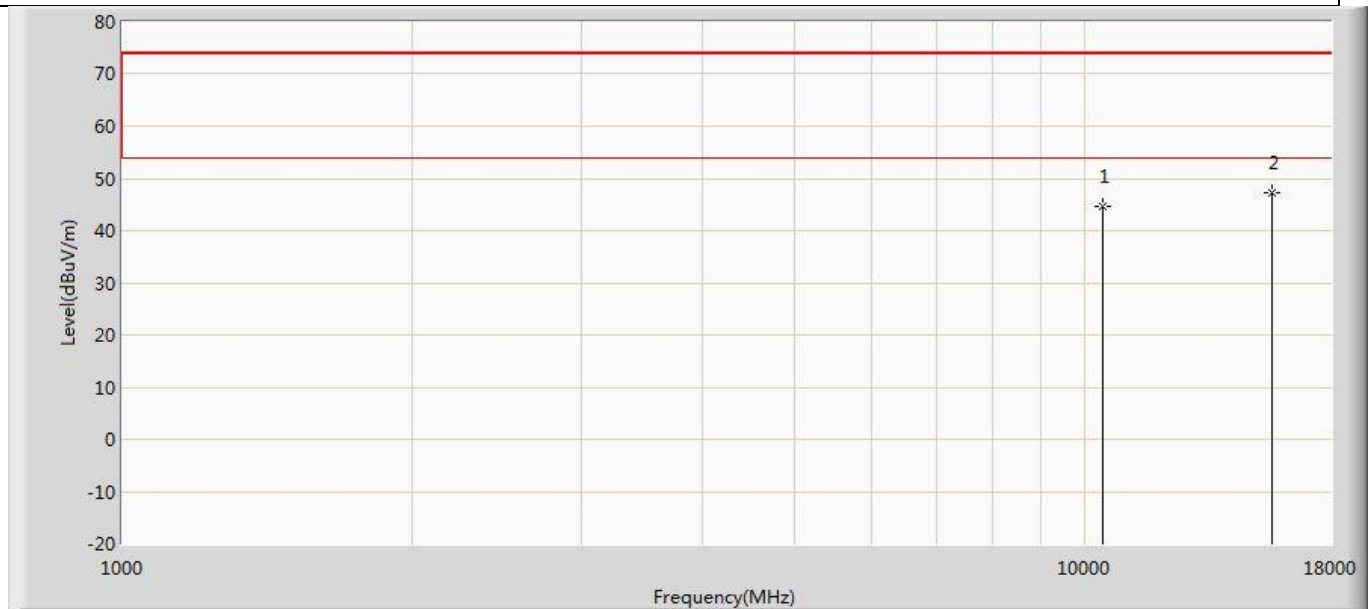


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.572	39.749	-29.428	74.000	4.823	PK
2	*	15660.000	47.150	38.373	-26.850	74.000	8.776	PK

Profile: 2150775R	Page No.: 319
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5240MHz by 802.11a Ant 1	

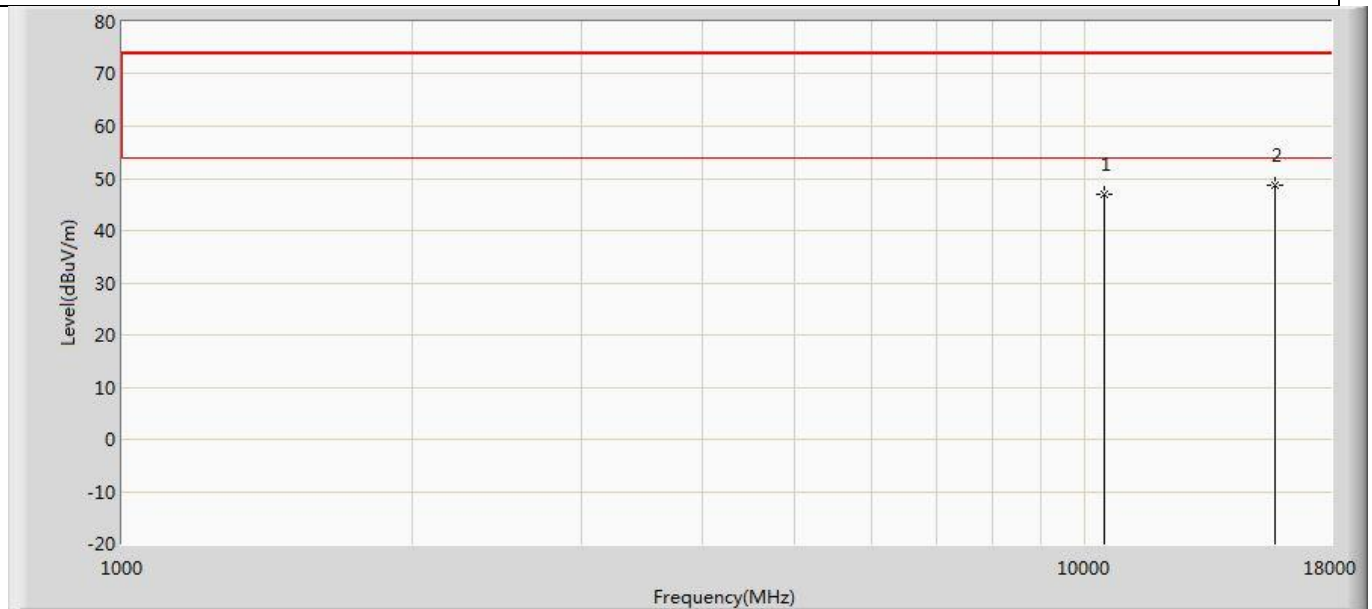


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	46.919	42.199	-27.081	74.000	4.719	PK
2	*	15720.000	48.703	39.138	-25.297	74.000	9.565	PK

Profile: 2150775R	Page No.: 320
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5240MHz by 802.11a Ant 1	

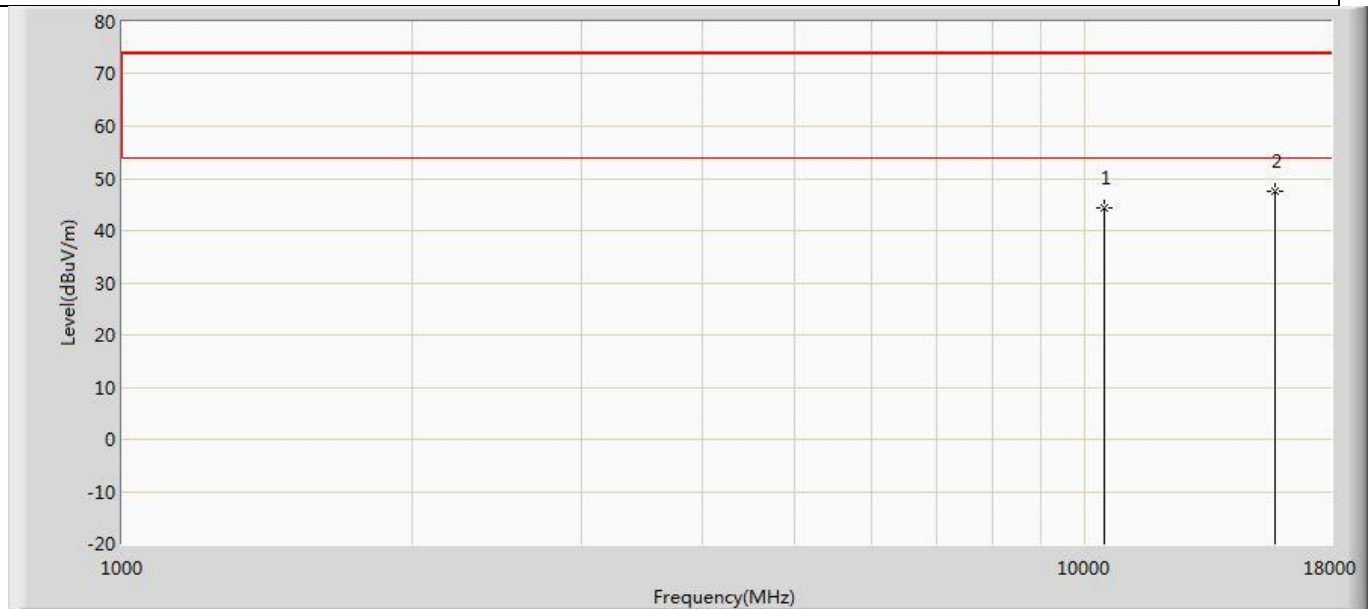


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	44.317	39.597	-29.683	74.000	4.719	PK
2	*	15720.000	47.620	38.055	-26.380	74.000	9.565	PK

Profile: 2150775R	Page No.: 321
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5260MHz by 802.11a Ant 1	

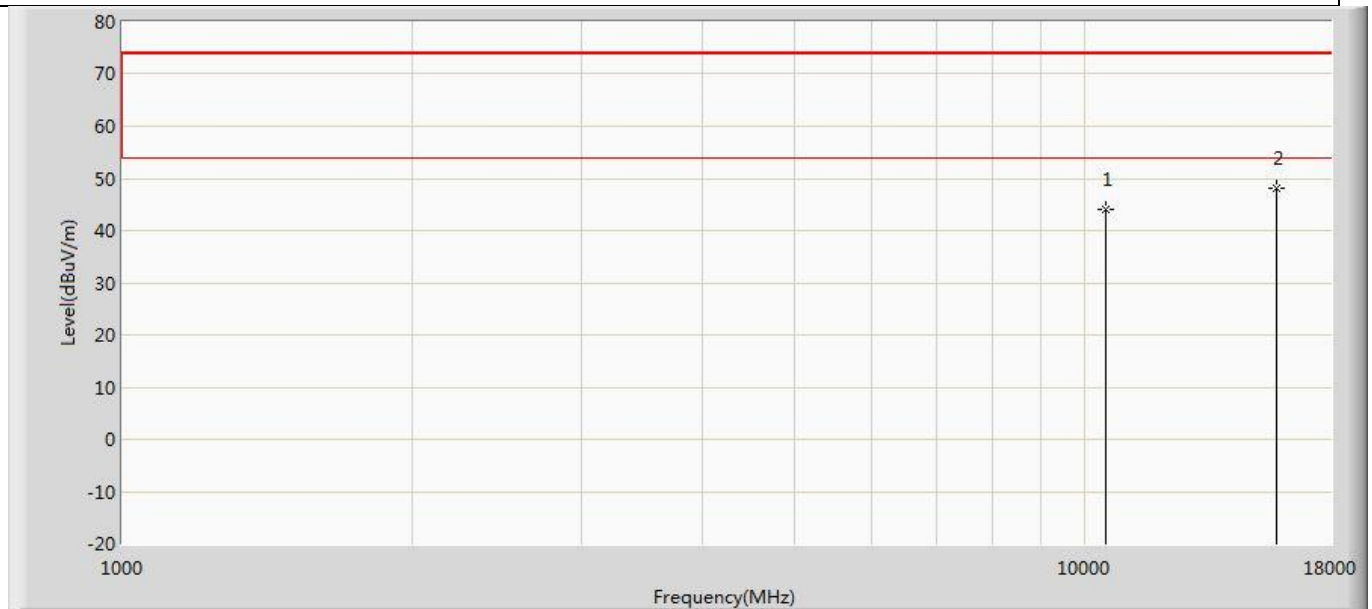


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	43.916	38.488	-30.084	74.000	5.428	PK
2	*	15780.000	48.037	39.362	-25.963	74.000	8.674	PK

Profile: 2150775R	Page No.: 322
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5260MHz by 802.11a Ant 1	

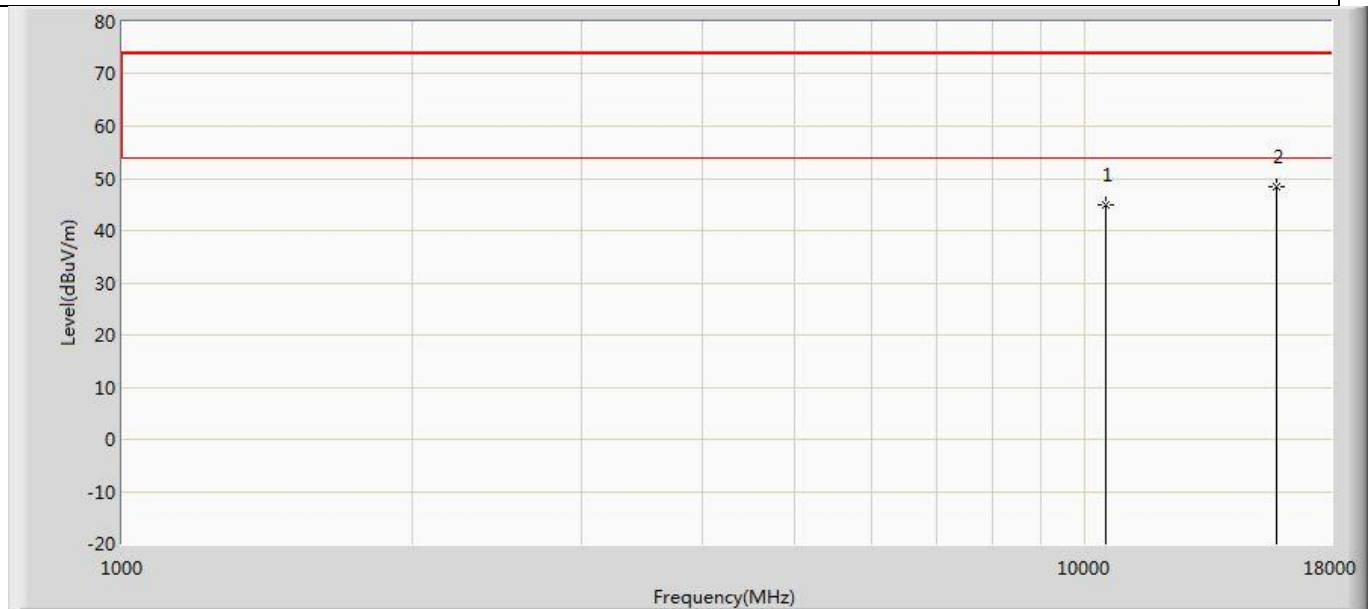


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	44.945	39.517	-29.055	74.000	5.428	PK
2	*	15780.000	48.314	39.639	-25.686	74.000	8.674	PK

Profile: 2150775R	Page No.: 323
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5300MHz by 802.11a Ant 1	

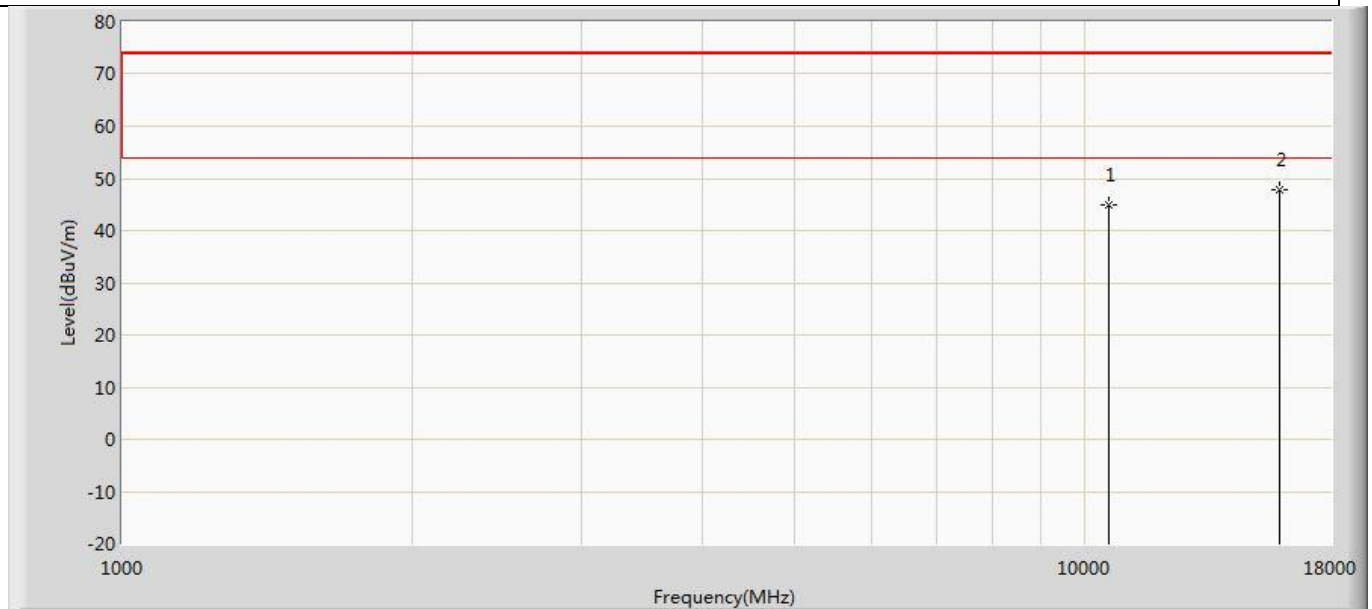


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.787	40.127	-29.213	74.000	4.660	PK
2	*	15900.000	47.794	39.007	-26.206	74.000	8.787	PK

Profile: 2150775R	Page No.: 324
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5300MHz by 802.11a Ant 1	

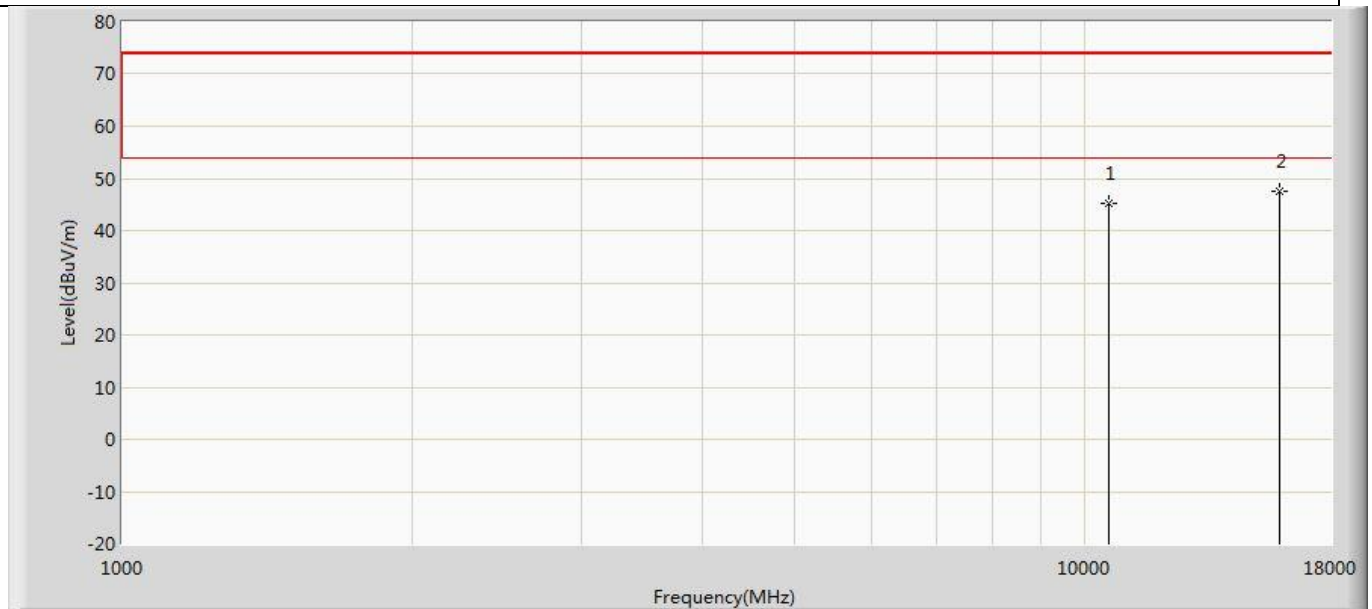


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	45.088	40.428	-28.912	74.000	4.660	PK
2	*	15900.000	47.510	38.723	-26.490	74.000	8.787	PK

Profile: 2150775R	Page No.: 325
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 802.11a Ant 1	

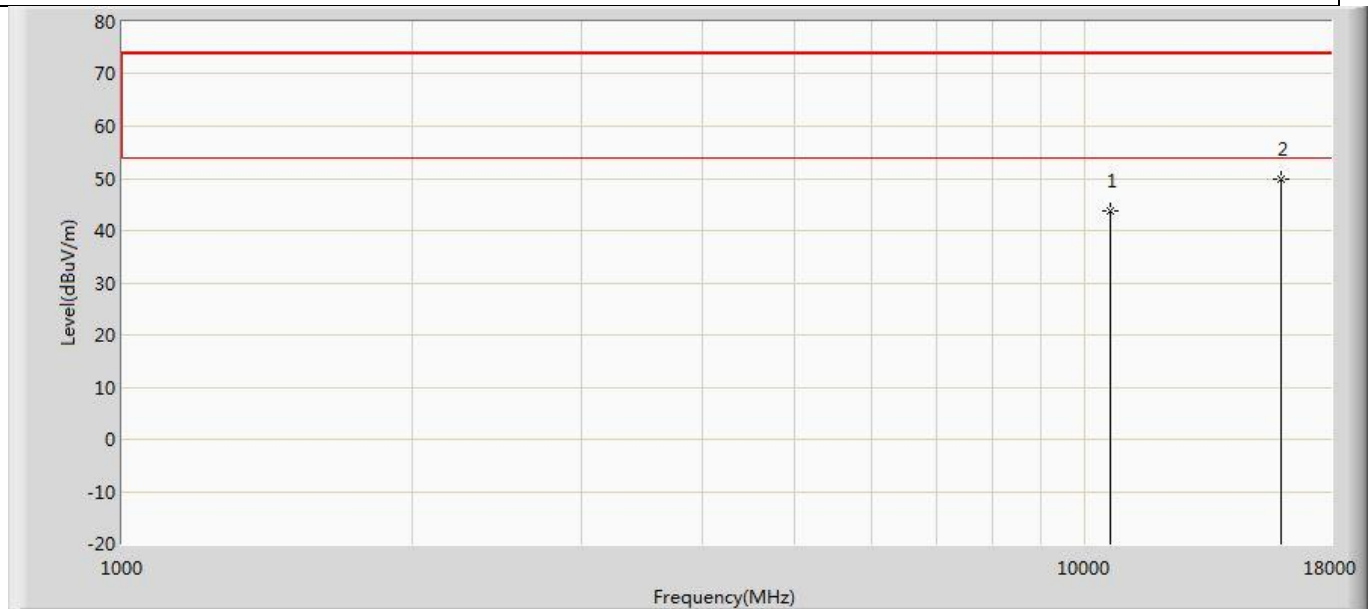


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	43.876	39.557	-30.124	74.000	4.319	PK
2	*	15960.000	49.772	39.522	-24.228	74.000	10.250	PK

Profile: 2150775R	Page No.: 326
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 802.11a Ant 1	

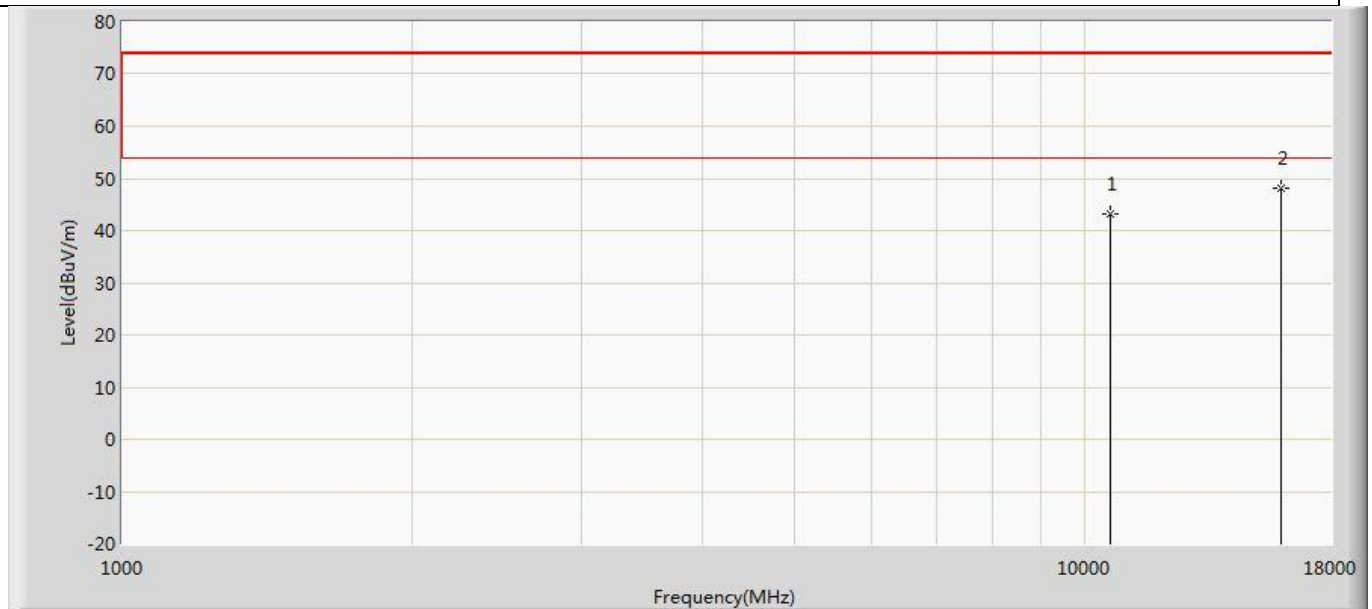


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	43.310	38.991	-30.690	74.000	4.319	PK
2	*	15960.000	48.192	37.942	-25.808	74.000	10.250	PK

Profile: 2150775R	Page No.: 327
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 802.11a Ant 1	

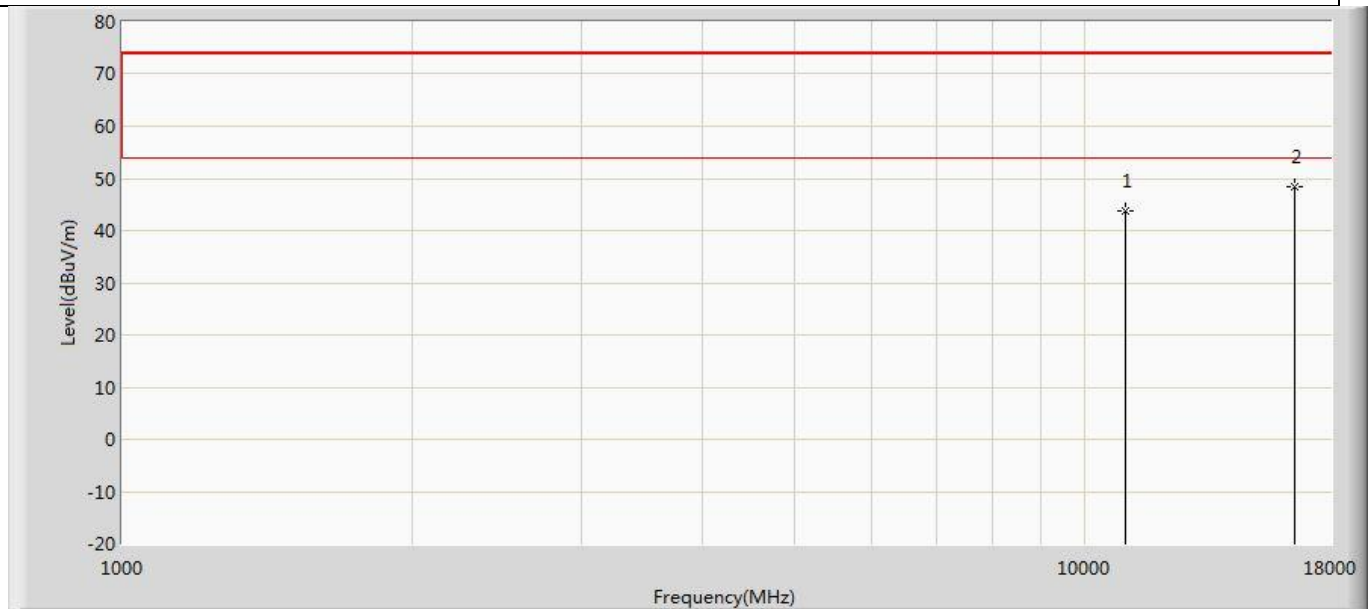


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.773	39.381	-30.227	74.000	4.392	PK
2	*	16500.000	48.319	38.635	-25.681	74.000	9.684	PK

Profile: 2150775R	Page No.: 328
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 802.11a Ant 1	

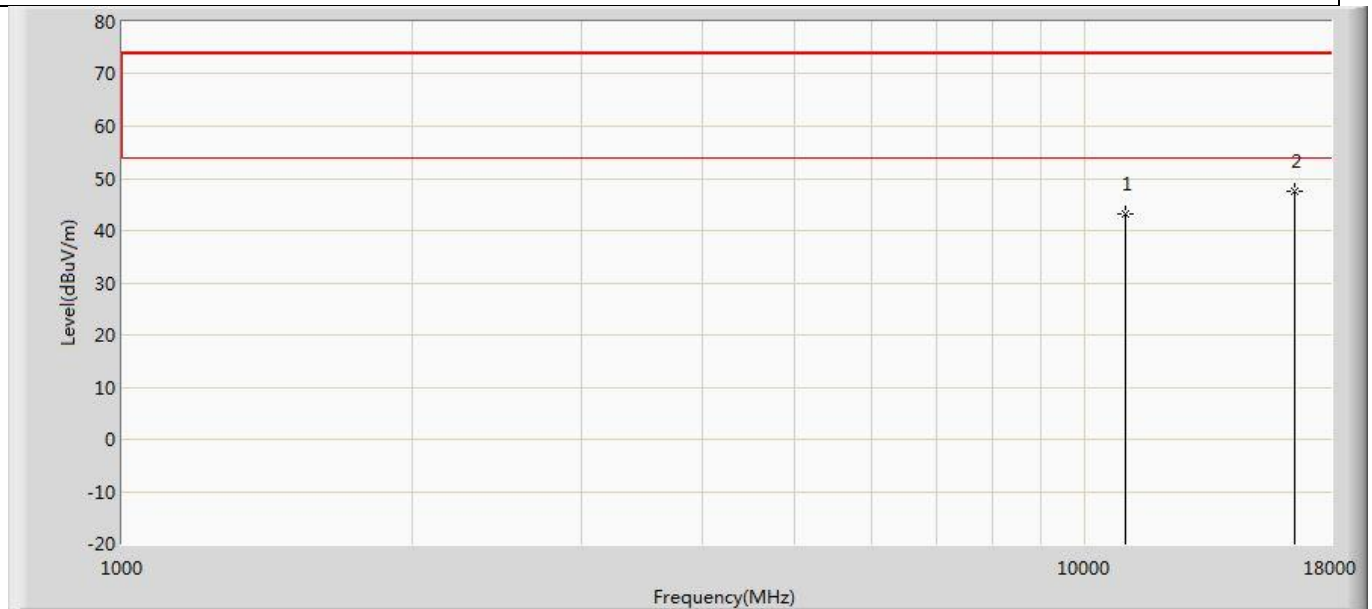


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.180	38.788	-30.820	74.000	4.392	PK
2	*	16500.000	47.399	37.715	-26.601	74.000	9.684	PK

Profile: 2150775R	Page No.: 329
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5580MHz by 802.11a Ant 1	

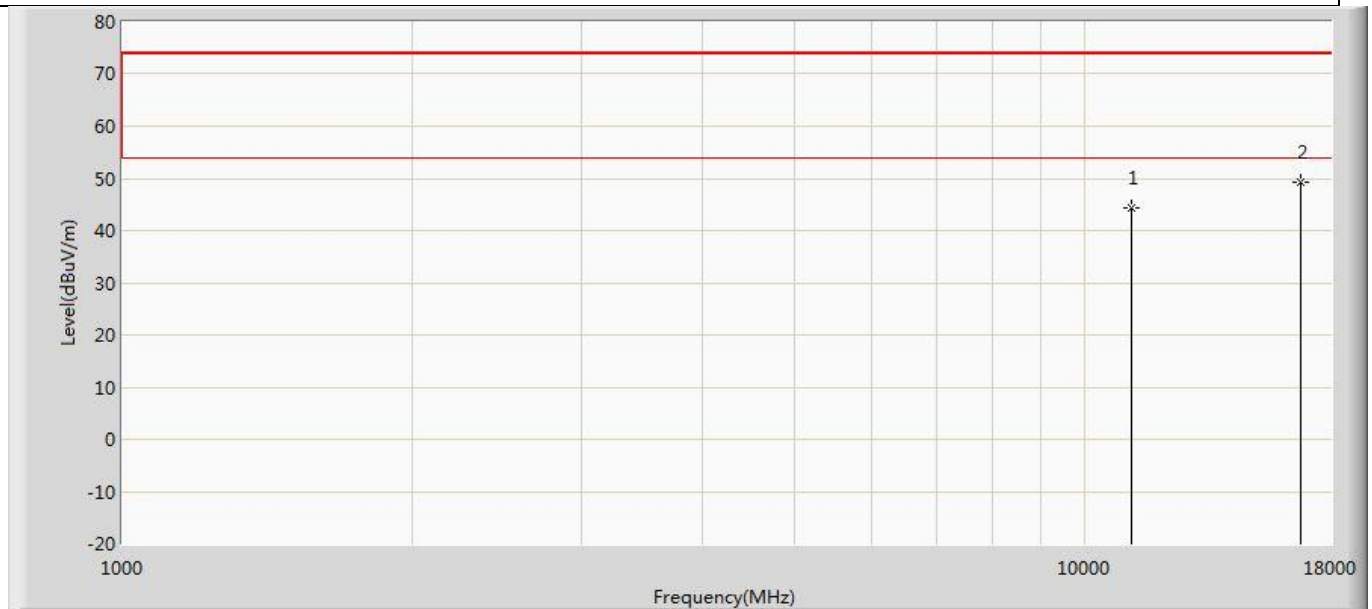


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.418	40.148	-29.582	74.000	4.271	PK
2	*	16740.000	49.379	38.893	-24.621	74.000	10.485	PK

Profile: 2150775R	Page No.: 330
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5580MHz by 802.11a Ant 1	

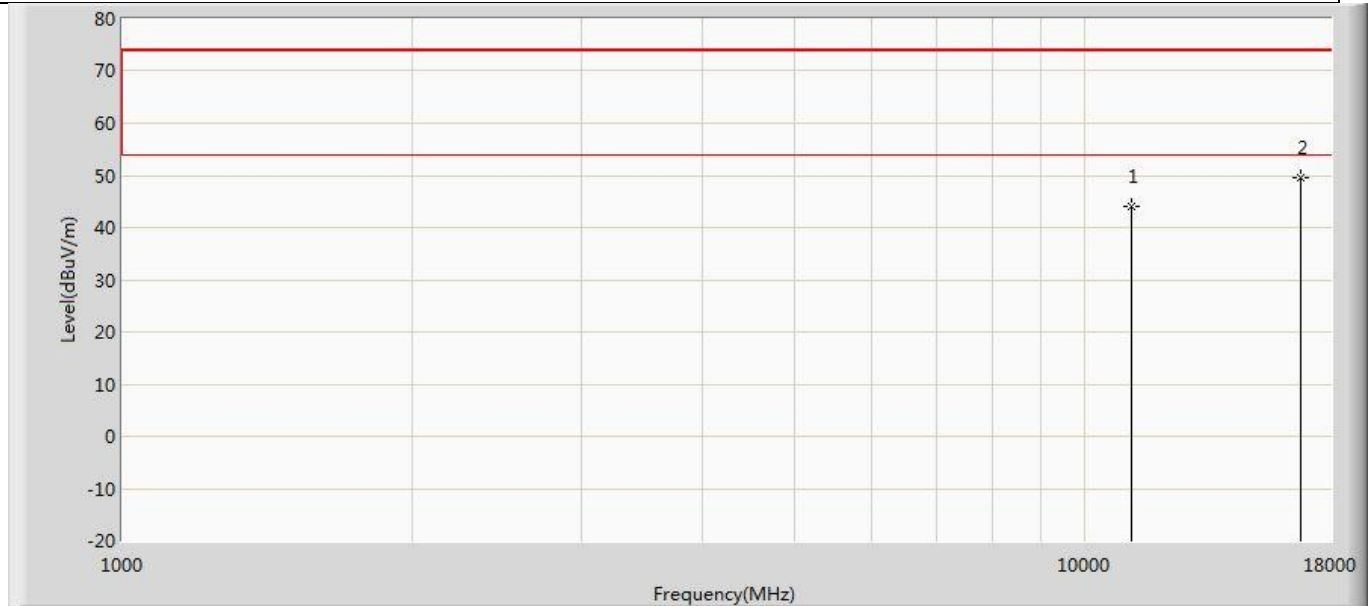


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	43.932	39.662	-30.068	74.000	4.271	PK
2	*	16740.000	49.692	39.206	-24.308	74.000	10.485	PK

Profile: 2150775R	Page No.: 331
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5700MHz by 802.11a Ant 1	

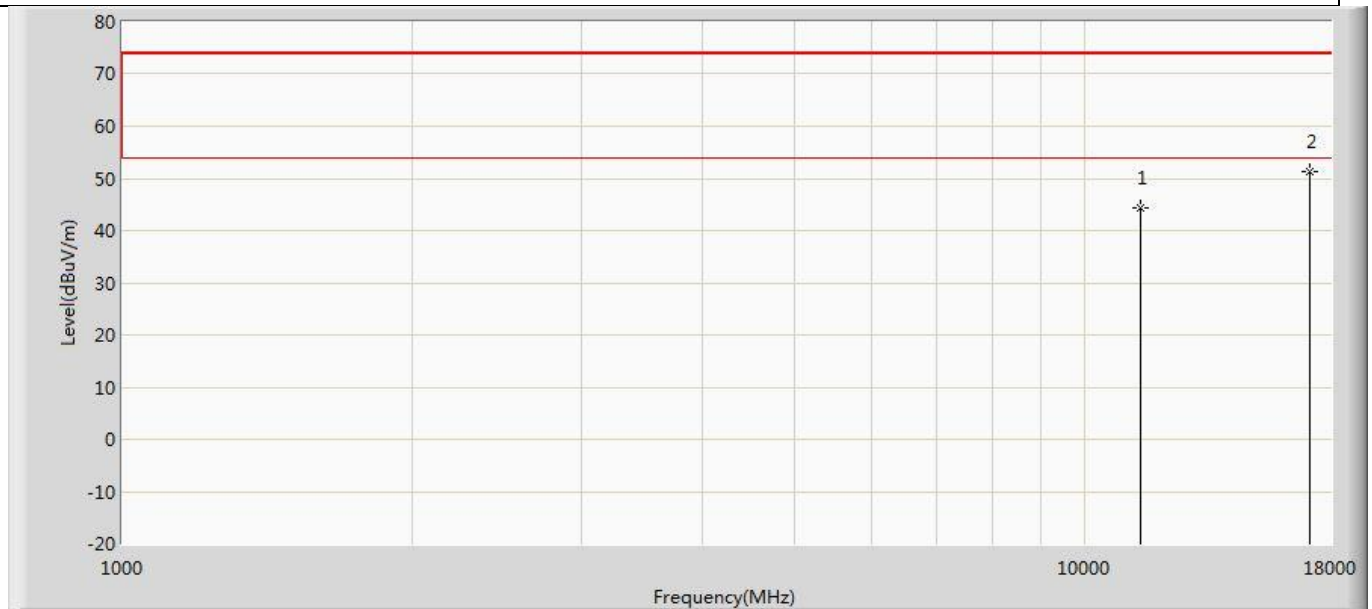


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	44.412	39.684	-29.588	74.000	4.729	PK
2	*	17100.000	51.429	39.901	-22.571	74.000	11.528	PK

Profile: 2150775R	Page No.: 332
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5700MHz by 802.11a Ant 1	

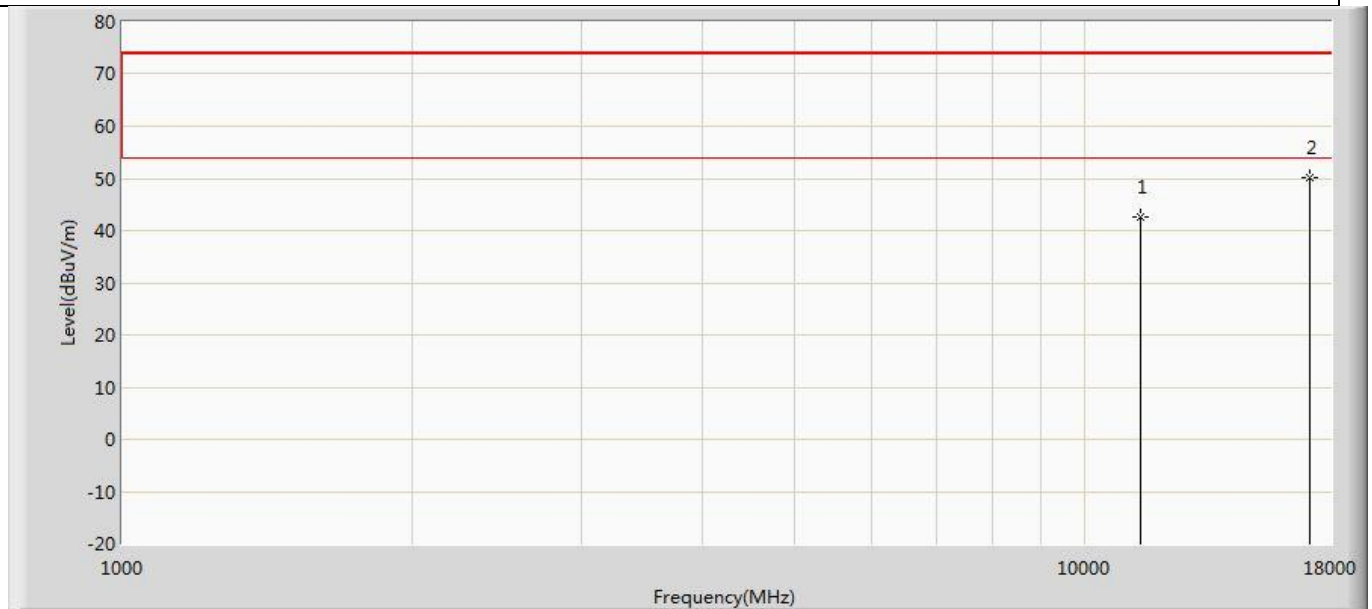


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.637	37.909	-31.363	74.000	4.729	PK
2	*	17100.000	50.058	38.530	-23.942	74.000	11.528	PK

Profile: 2150775R	Page No.: 333
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5745MHz by 802.11a Ant 1	

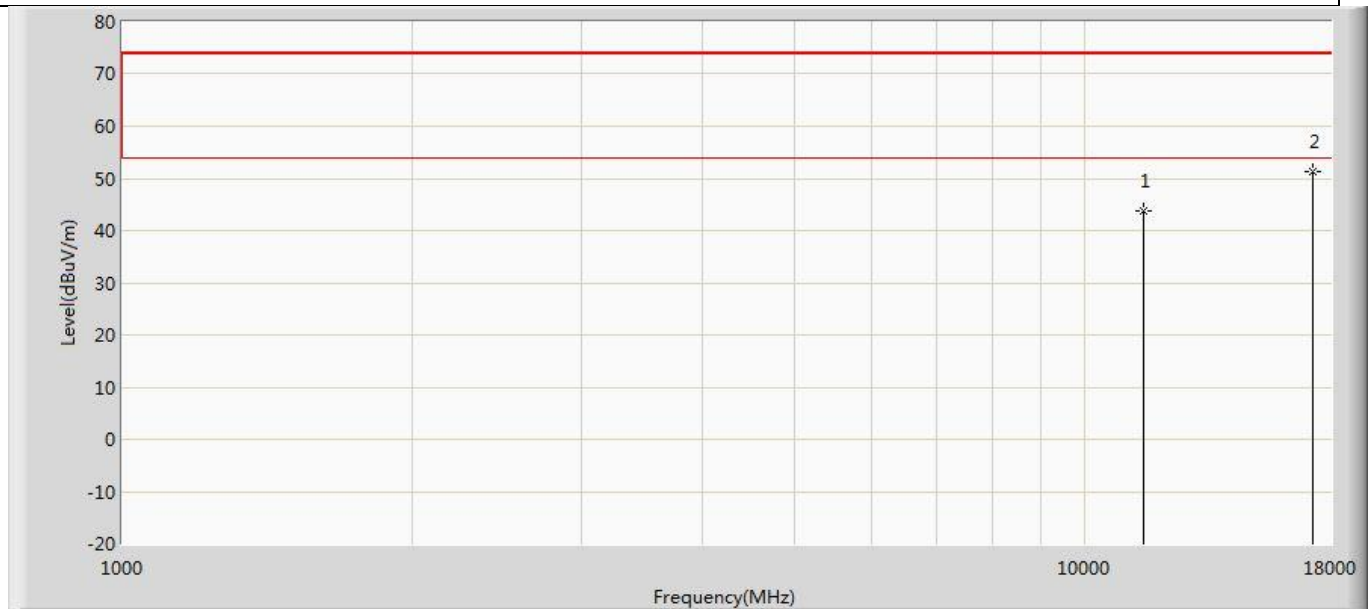


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	43.633	39.004	-30.367	74.000	4.629	PK
2	*	17235.000	51.362	37.914	-22.638	74.000	13.448	PK

Profile: 2150775R	Page No.: 334
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5745MHz by 802.11a Ant 1	

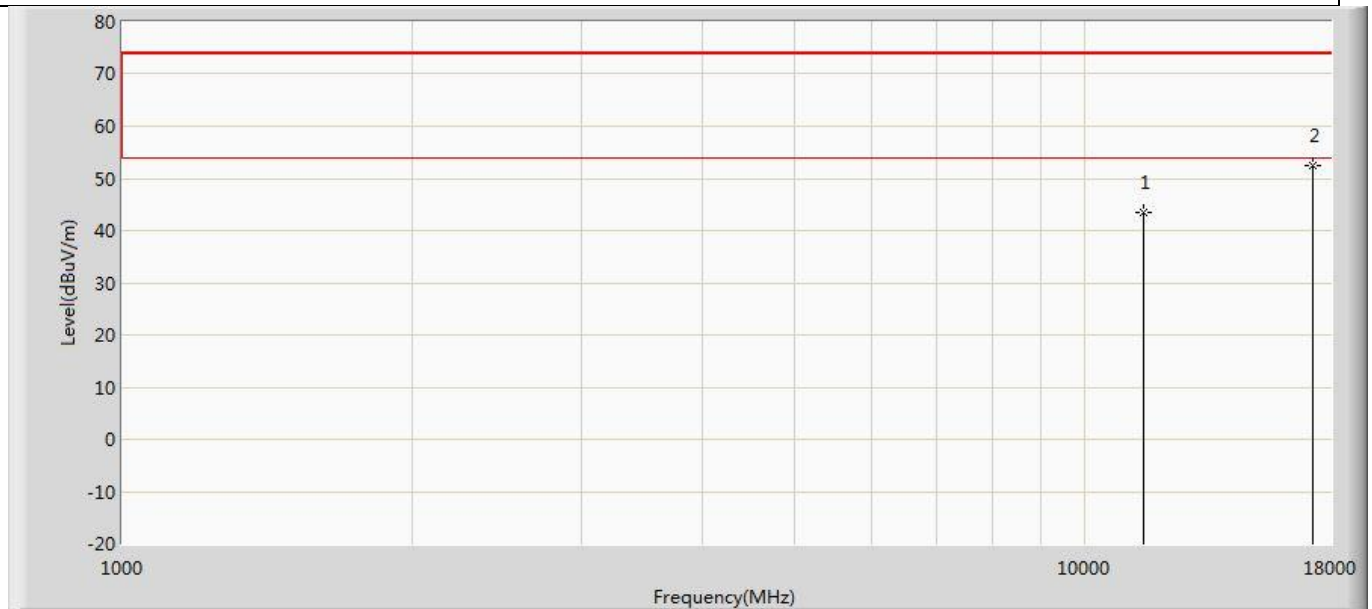


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	43.426	38.797	-30.574	74.000	4.629	PK
2	*	17235.000	52.474	39.026	-21.526	74.000	13.448	PK

Profile: 2150775R	Page No.: 335
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5785MHz by 802.11a Ant 1	

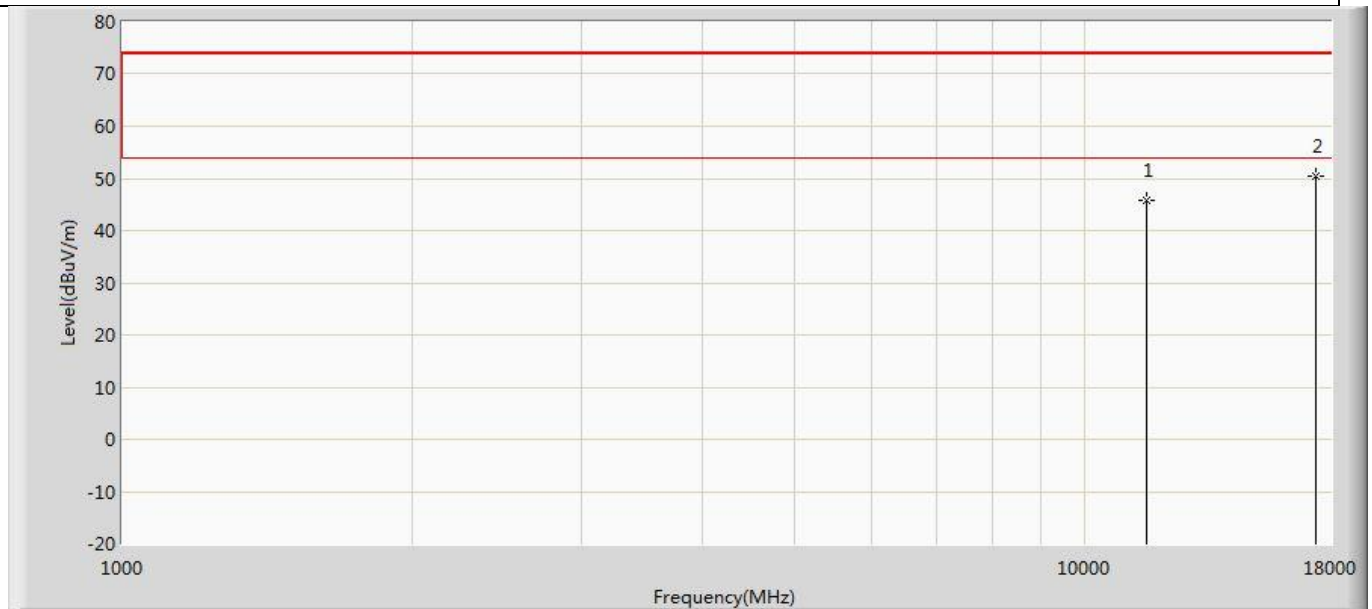


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	45.936	40.023	-28.064	74.000	5.913	PK
2	*	17355.000	50.361	39.141	-23.639	74.000	11.221	PK

Profile: 2150775R	Page No.: 336
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5785MHz by 802.11a Ant 1	

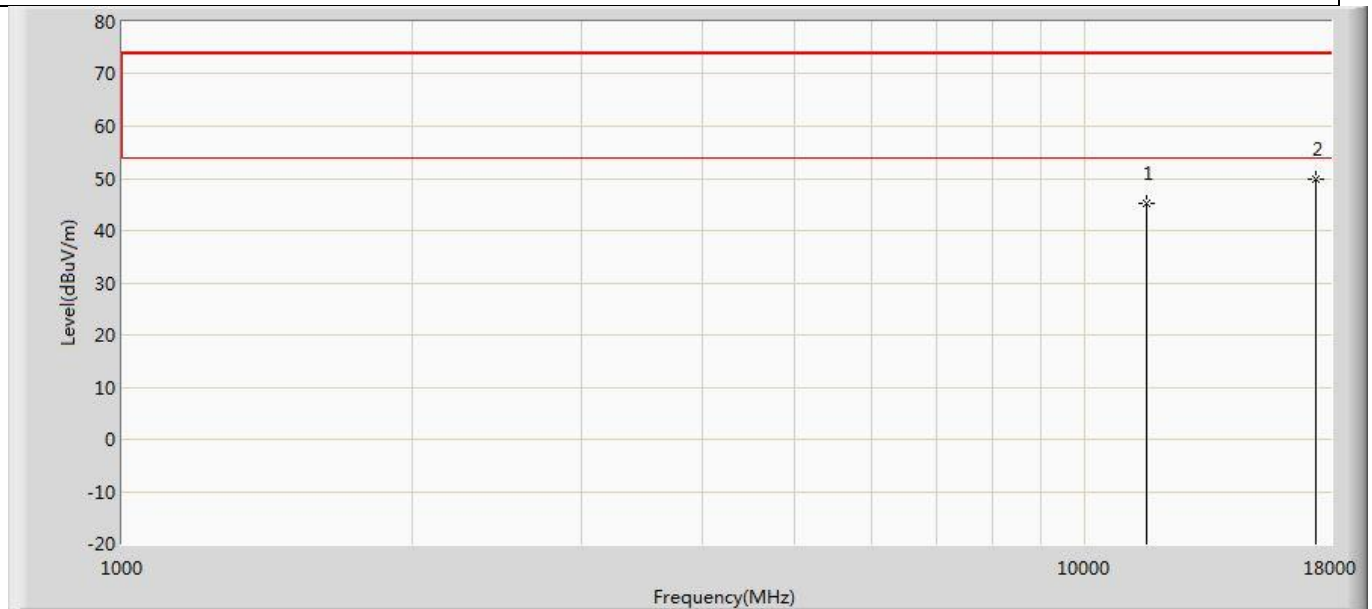


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	45.269	39.356	-28.731	74.000	5.913	PK
2	*	17355.000	49.863	38.643	-24.137	74.000	11.221	PK

Profile: 2150775R	Page No.: 337
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5825MHz by 802.11a Ant 1	

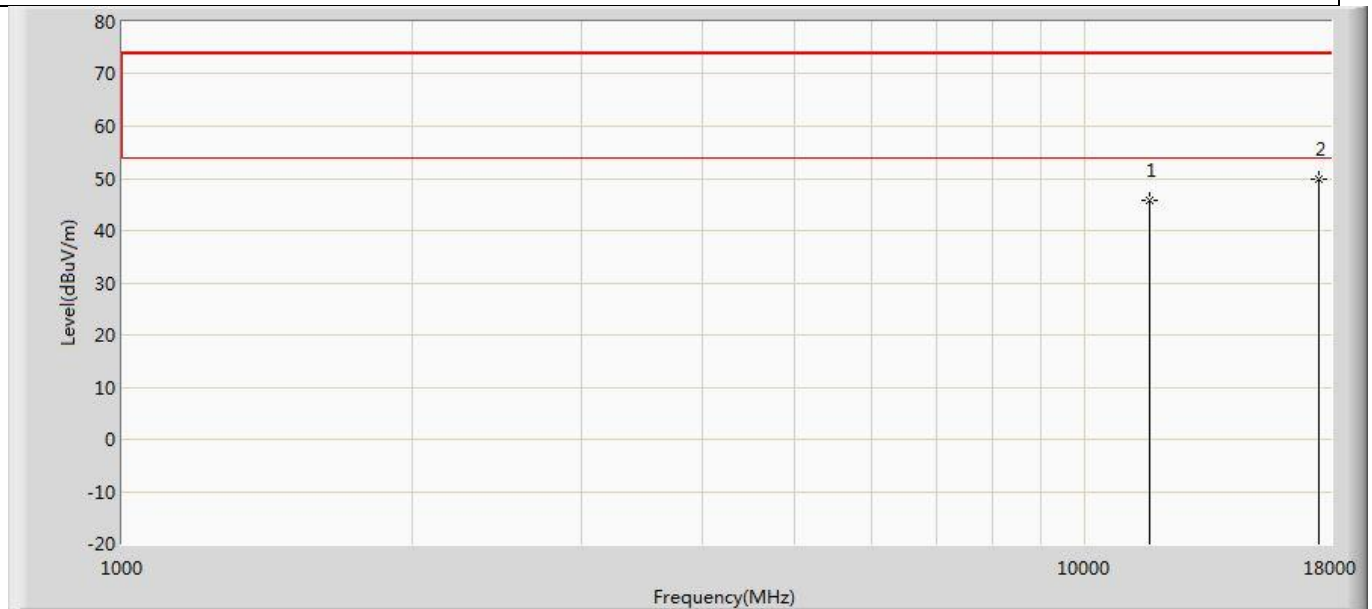


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	45.719	39.219	-28.281	74.000	6.501	PK
2	*	17475.000	49.884	38.579	-24.116	74.000	11.306	PK

Profile: 2150775R	Page No.: 338
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5825MHz by 802.11a Ant 1	

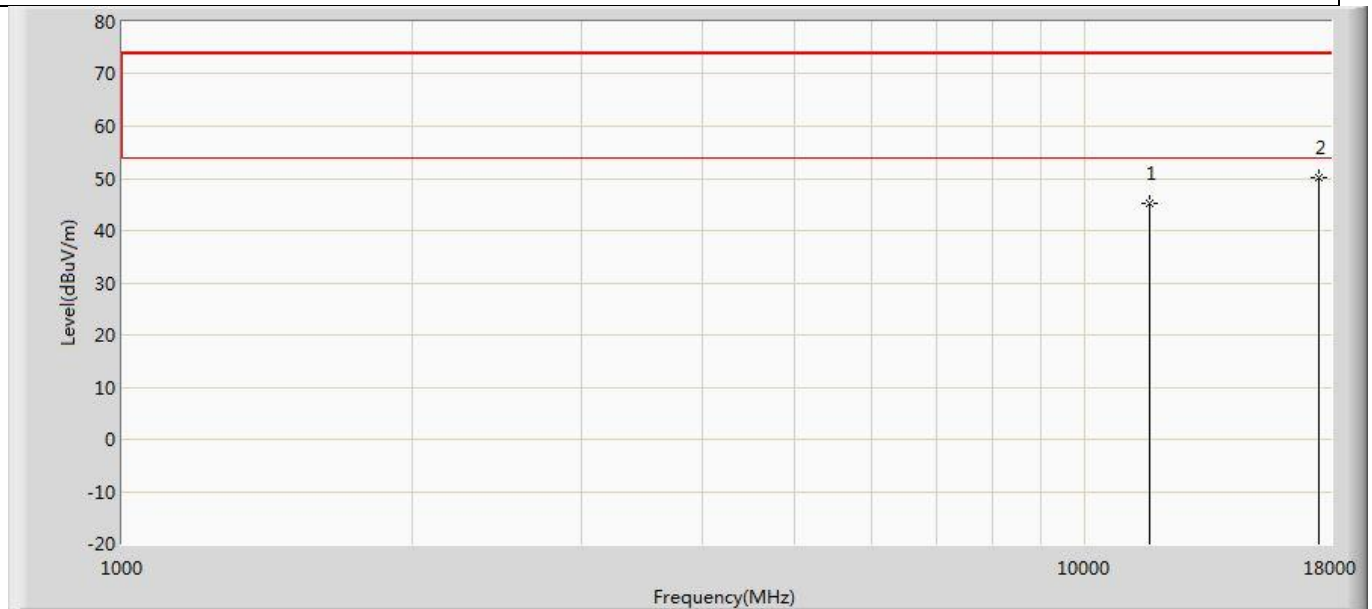


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	45.209	38.709	-28.791	74.000	6.501	PK
2	*	17475.000	50.067	38.762	-23.933	74.000	11.306	PK

Profile: 2150775R	Page No.: 339
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) Ant 1	

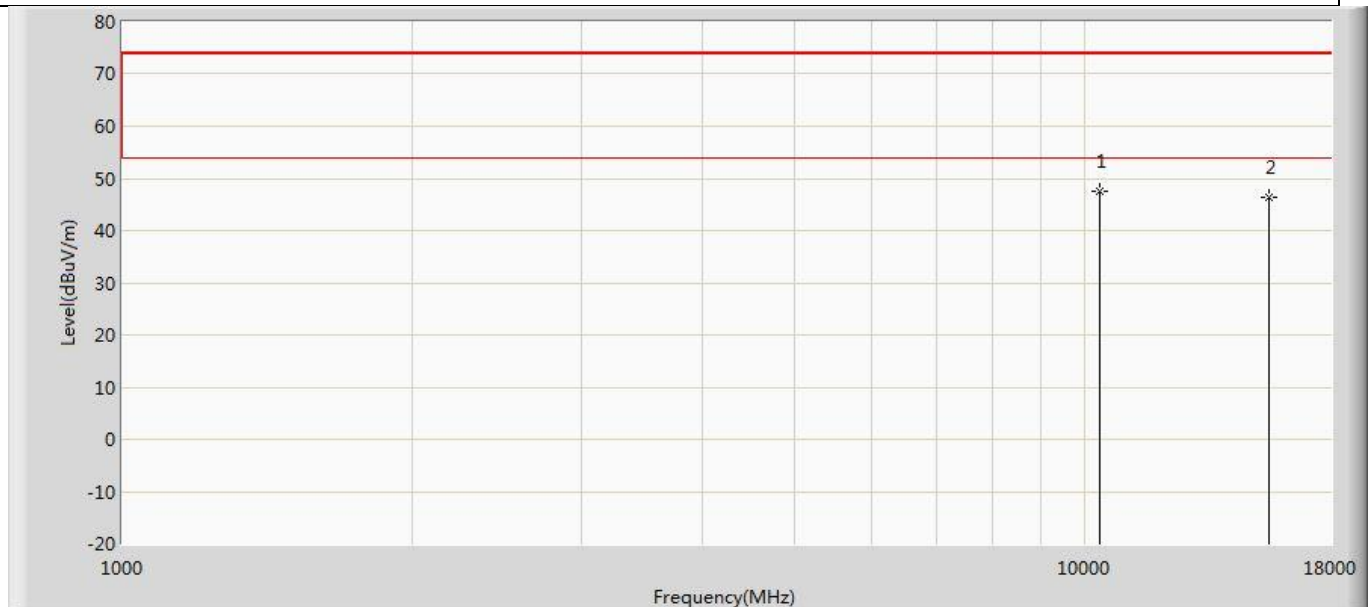


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10360.000	47.438	43.717	-26.562	74.000	3.722	PK
2		15540.000	46.480	39.127	-27.520	74.000	7.352	PK

Profile: 2150775R	Page No.: 340
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) Ant 1	

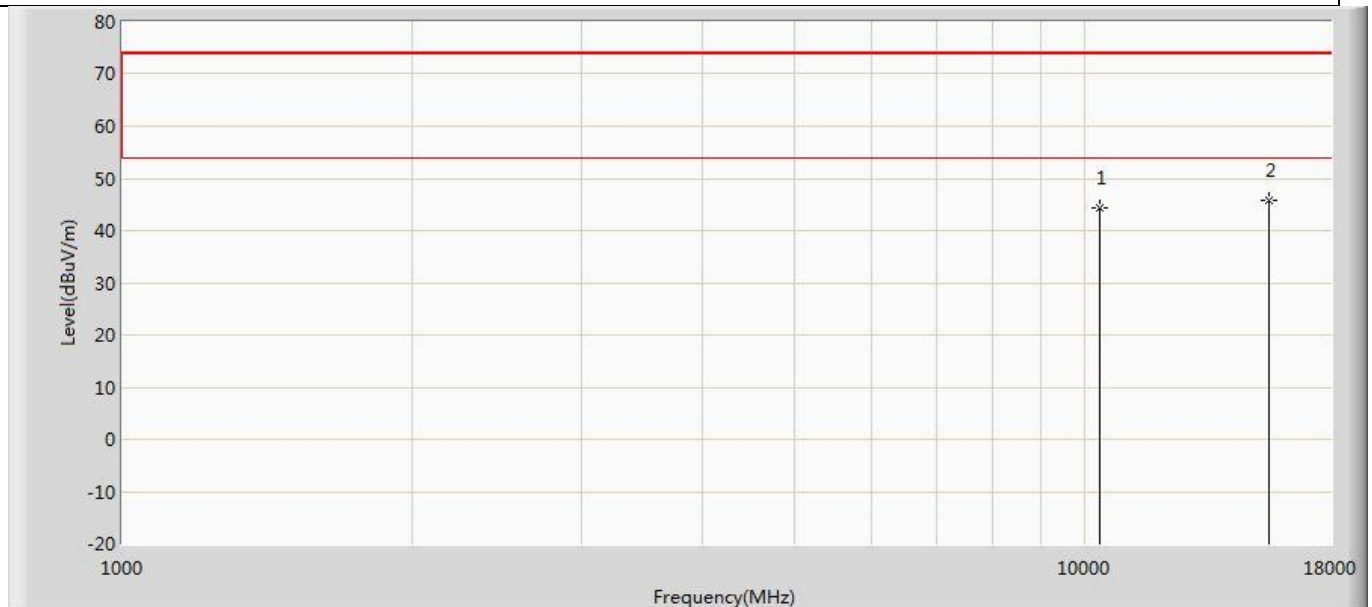


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	44.486	40.765	-29.514	74.000	3.722	PK
2	*	15540.000	45.916	38.563	-28.084	74.000	7.352	PK

Profile: 2150775R	Page No.: 341
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5220MHz by 802.11n(20MHz) Ant 1	

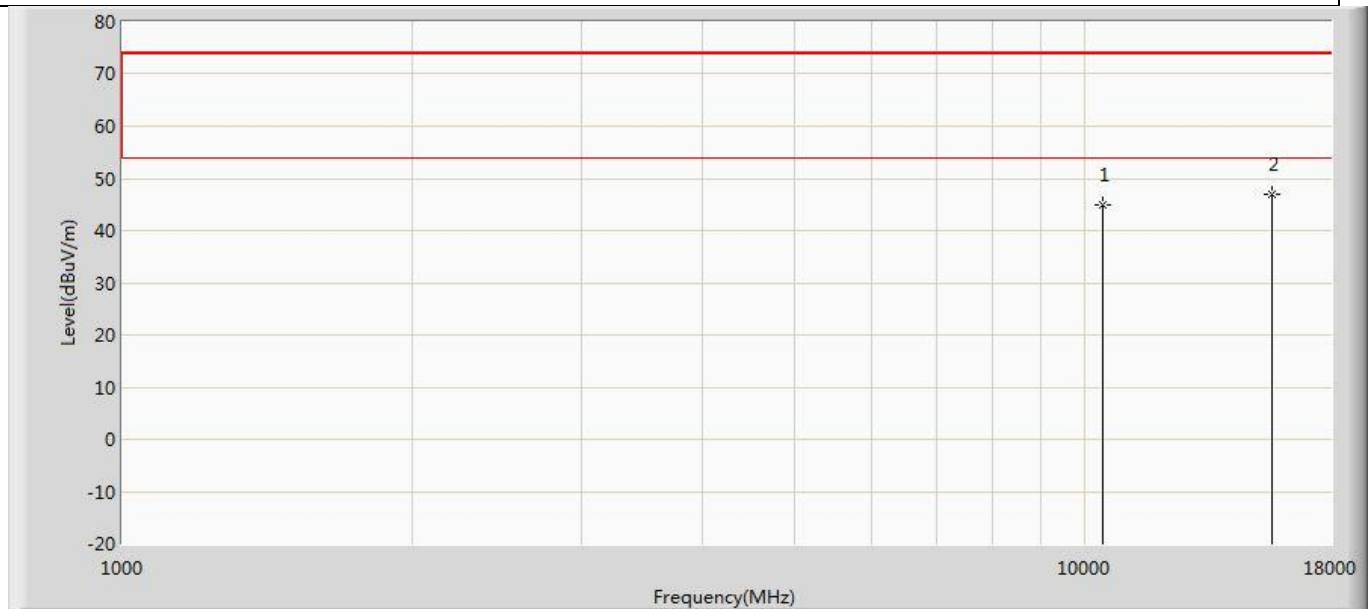


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.801	39.978	-29.199	74.000	4.823	PK
2	*	15660.000	46.941	38.164	-27.059	74.000	8.776	PK

Profile: 2150775R	Page No.: 342
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5220MHz by 802.11n(20MHz) Ant 1	

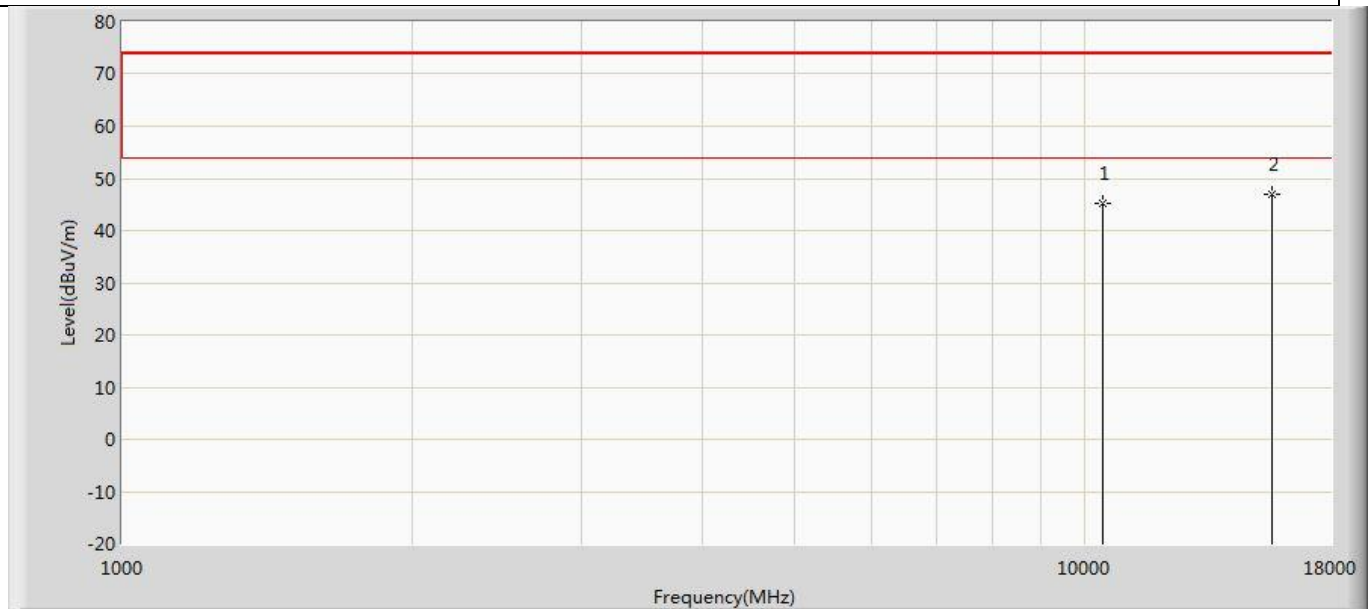


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	45.304	40.481	-28.696	74.000	4.823	PK
2	*	15660.000	46.976	38.199	-27.024	74.000	8.776	PK

Profile: 2150775R	Page No.: 343
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5240MHz by 802.11n(20MHz) Ant 1	

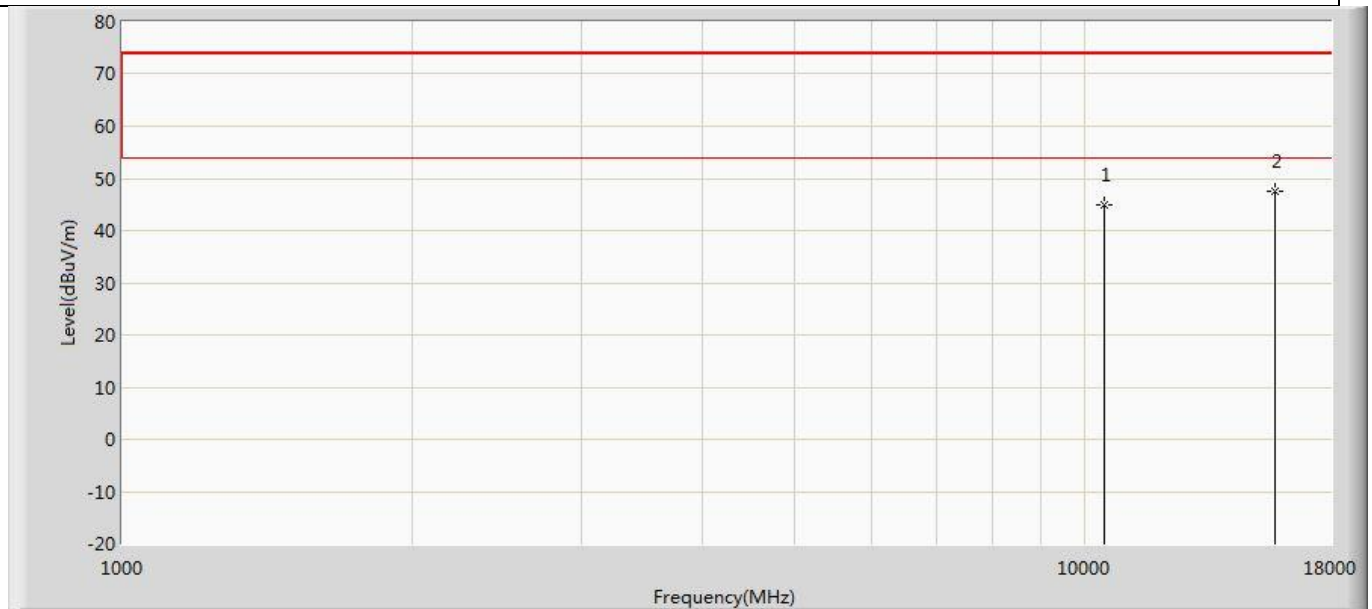


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.011	40.291	-28.989	74.000	4.719	PK
2	*	15720.000	47.567	38.002	-26.433	74.000	9.565	PK

Profile: 2150775R	Page No.: 344
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5240MHz by 802.11n(20MHz) Ant 1	

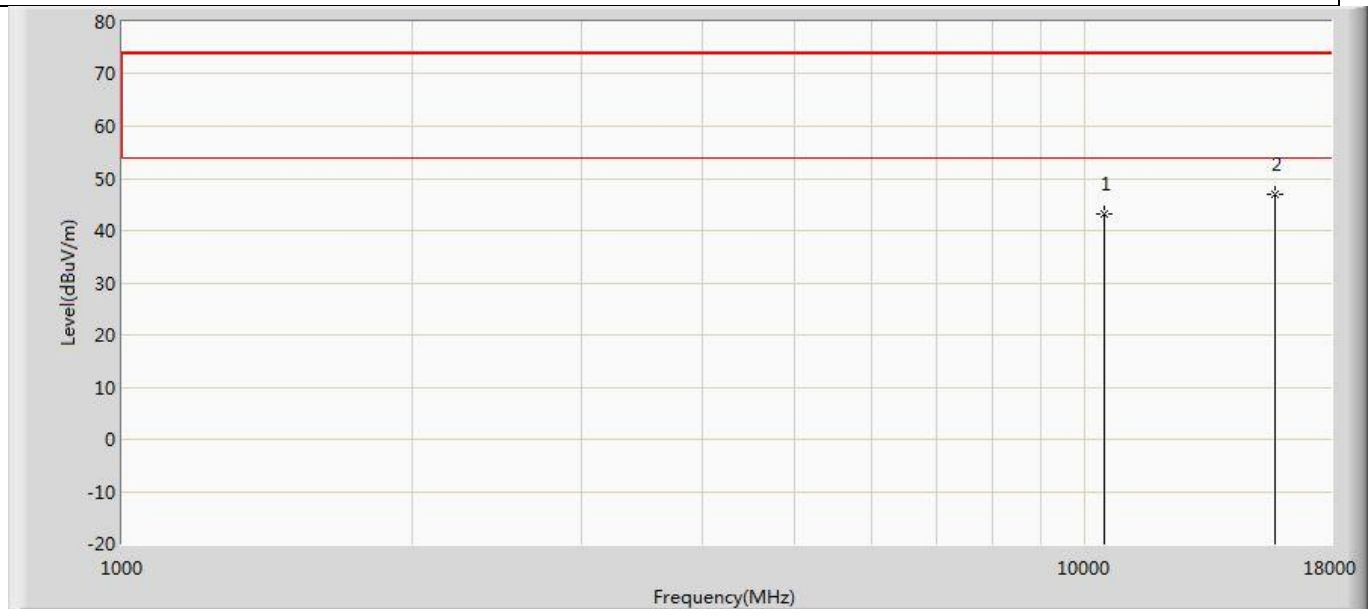


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	43.293	38.573	-30.707	74.000	4.719	PK
2	*	15720.000	46.888	37.323	-27.112	74.000	9.565	PK

Profile: 2150775R	Page No.: 345
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5260MHz by 802.11n(20MHz) Ant 1	

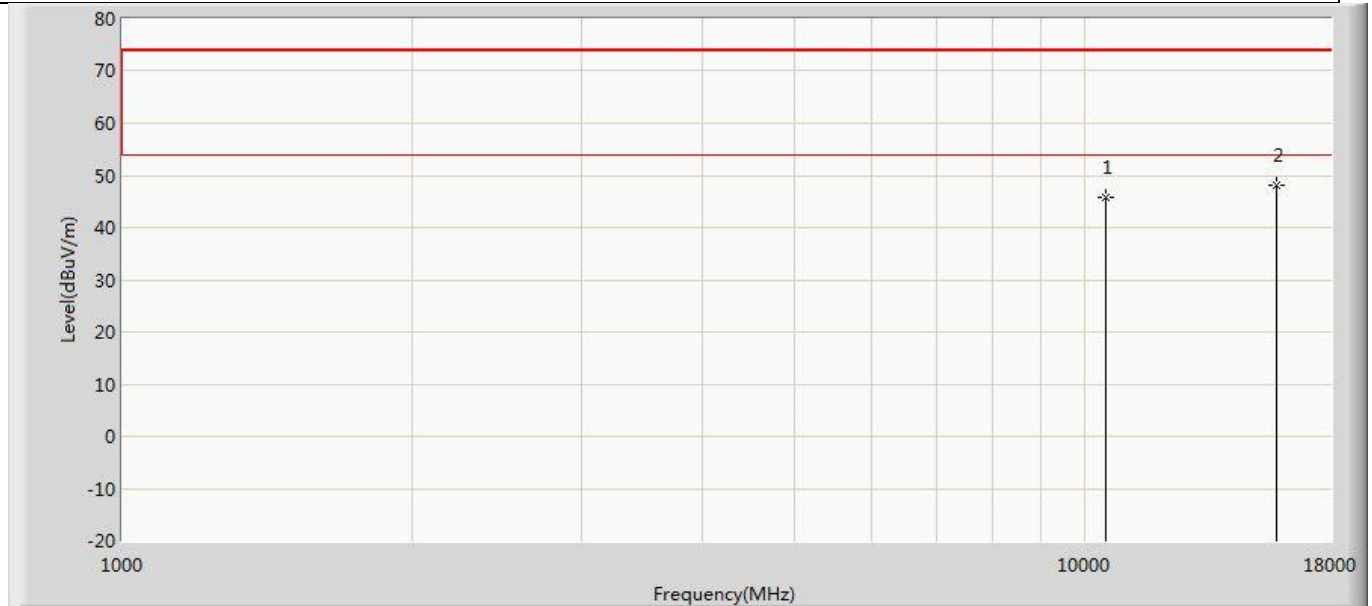


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.791	40.363	-28.209	74.000	5.428	PK
2	*	15780.000	48.088	39.413	-25.912	74.000	8.674	PK

Profile: 2150775R	Page No.: 346
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5260MHz by 802.11n(20MHz) Ant 1	

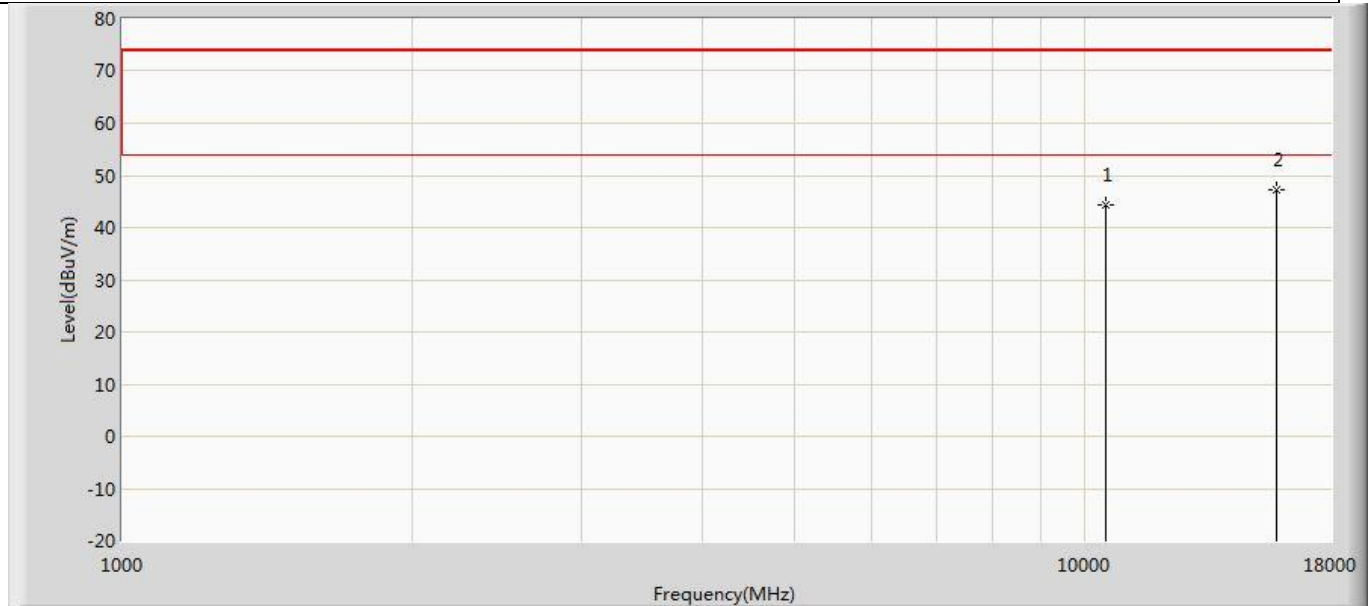


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	44.323	38.895	-29.677	74.000	5.428	PK
2	*	15780.000	47.135	38.460	-26.865	74.000	8.674	PK

Profile: 2150775R	Page No.: 347
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5300MHz by 802.11n(20MHz) Ant 1	

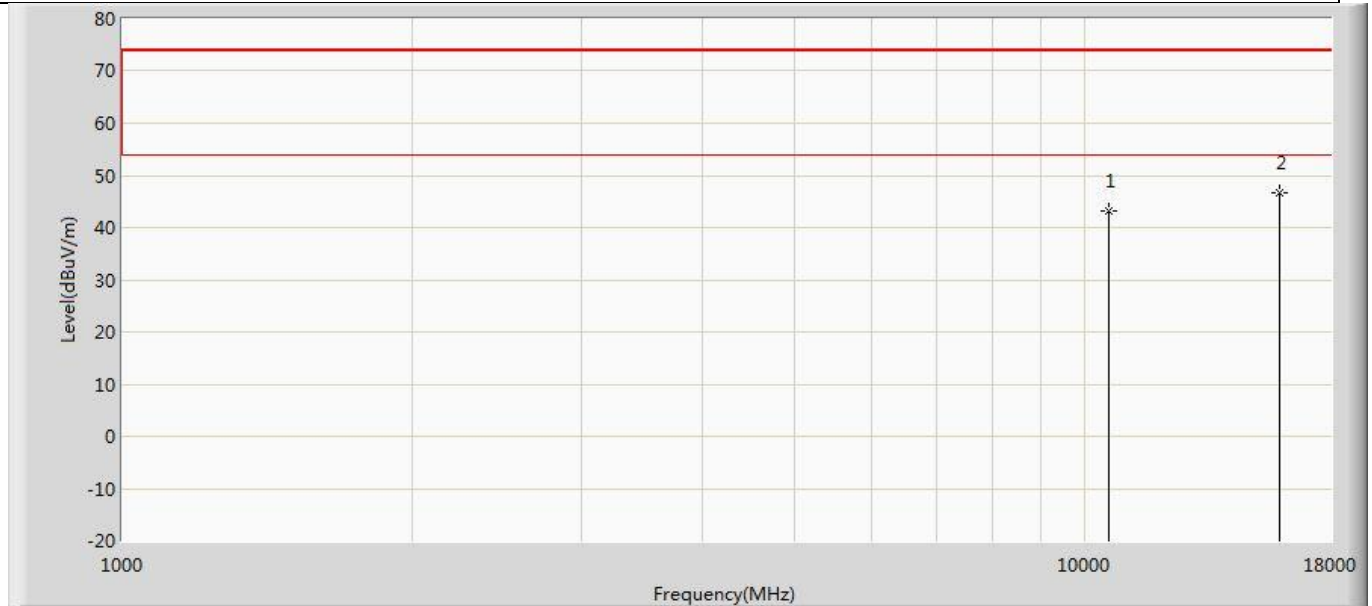


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	43.299	38.639	-30.701	74.000	4.660	PK
2	*	15900.000	46.626	37.839	-27.374	74.000	8.787	PK

Profile: 2150775R	Page No.: 348
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5300MHz by 802.11n(20MHz) Ant 1	

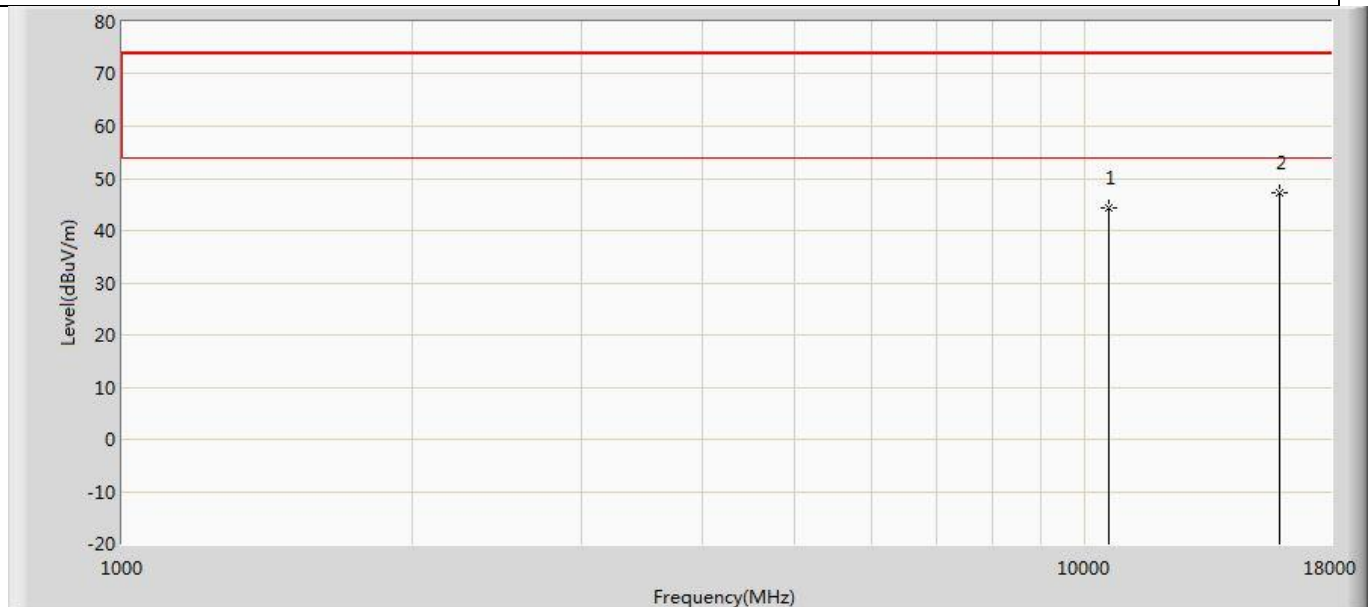


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.460	39.800	-29.540	74.000	4.660	PK
2	*	15900.000	47.284	38.497	-26.716	74.000	8.787	PK

Profile: 2150775R	Page No.: 349
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) Ant 1	

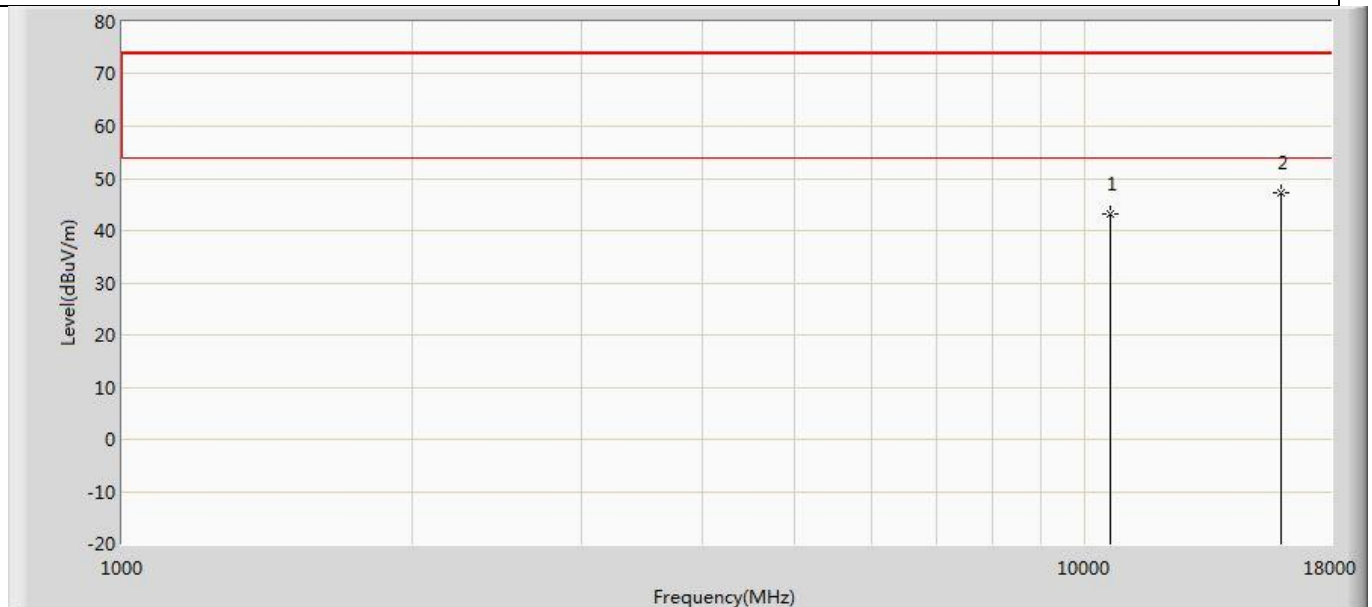


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	43.164	38.845	-30.836	74.000	4.319	PK
2	*	15960.000	47.140	36.890	-26.860	74.000	10.250	PK

Profile: 2150775R	Page No.: 350
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) Ant 1	

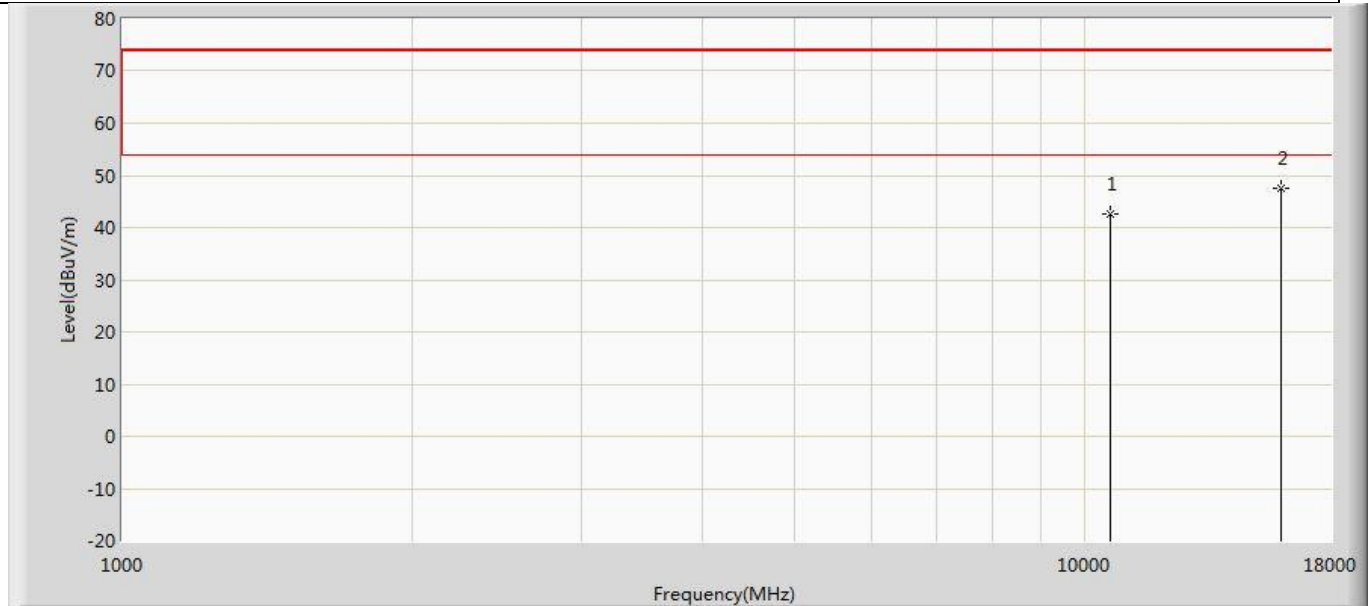


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	42.725	38.406	-31.275	74.000	4.319	PK
2	*	15960.000	47.447	37.197	-26.553	74.000	10.250	PK

Profile: 2150775R	Page No.: 351
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) Ant 1	

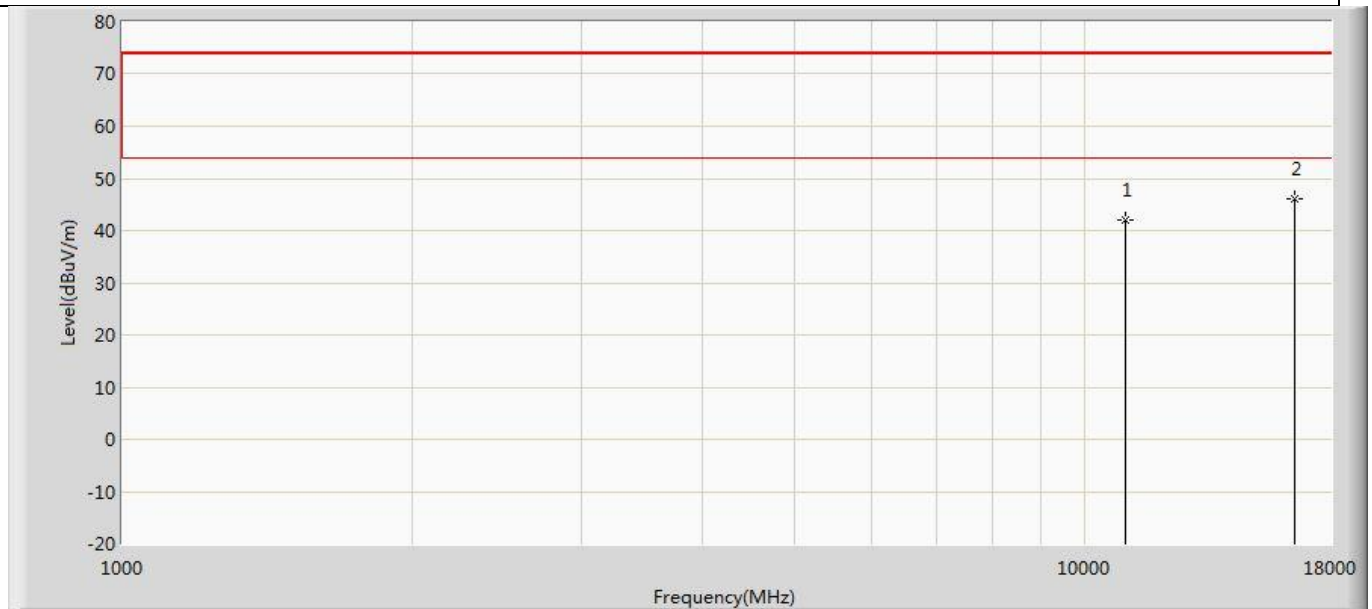


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	42.069	37.677	-31.931	74.000	4.392	PK
2	*	16500.000	46.038	36.354	-27.962	74.000	9.684	PK

Profile: 2150775R	Page No.: 352
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) Ant 1	

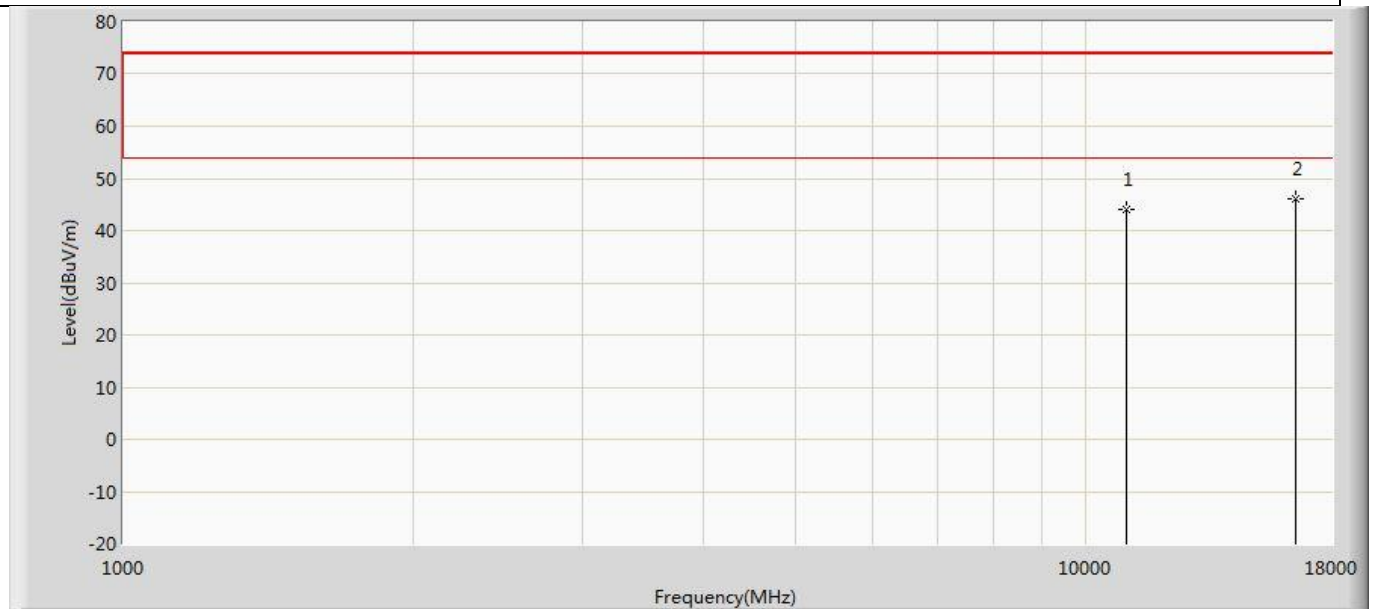


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.969	39.577	-30.031	74.000	4.392	PK
2	*	16500.000	46.168	36.484	-27.832	74.000	9.684	PK

Profile: 2150775R	Page No.: 353
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5580MHz by 802.11n(20MHz) Ant 1	

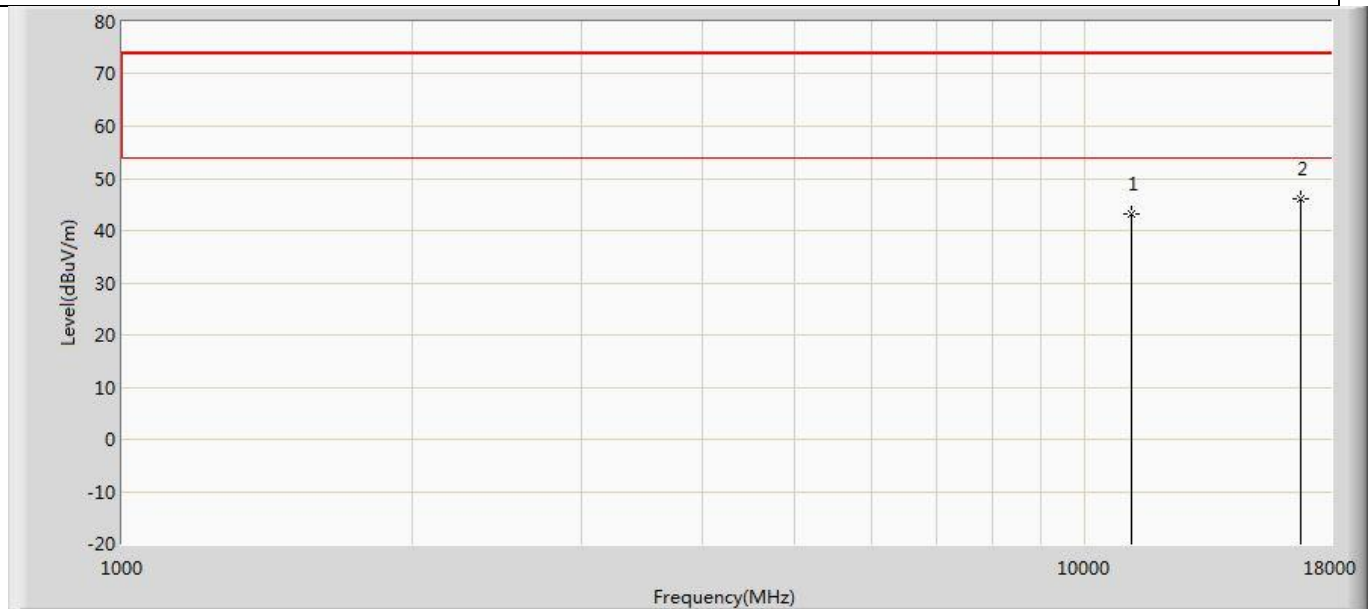


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	43.249	38.979	-30.751	74.000	4.271	PK
2	*	16740.000	46.006	35.520	-27.994	74.000	10.485	PK

Profile: 2150775R	Page No.: 354
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5580MHz by 802.11n(20MHz) Ant 1	

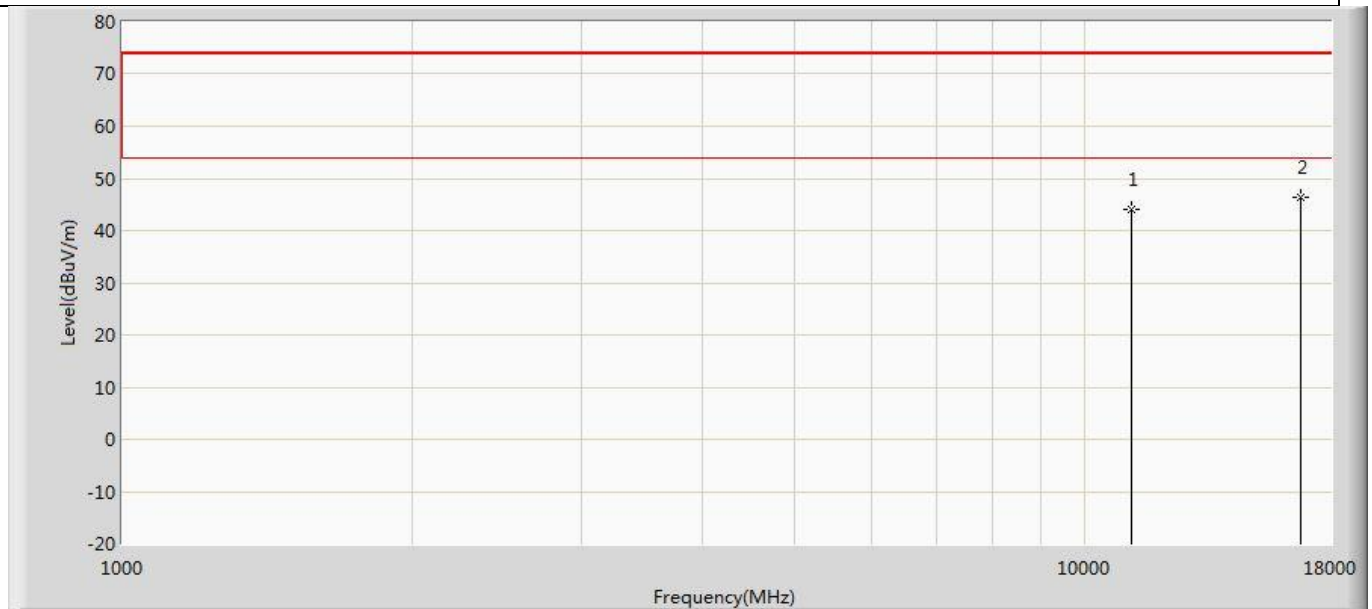


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.101	39.831	-29.899	74.000	4.271	PK
2	*	16740.000	46.498	36.012	-27.502	74.000	10.485	PK

Profile: 2150775R	Page No.: 355
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5700MHz by 802.11n(20MHz) Ant 1	

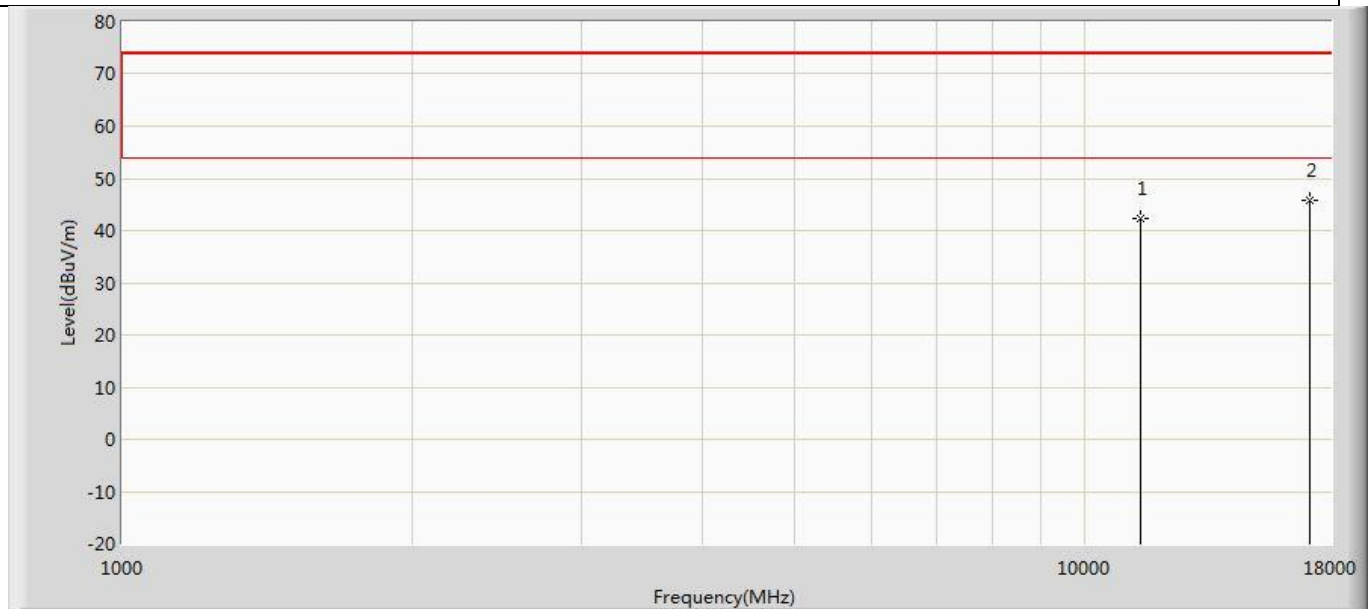


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.251	37.523	-31.749	74.000	4.729	PK
2	*	17100.000	45.850	34.322	-28.150	74.000	11.528	PK

Profile: 2150775R	Page No.: 356
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5700MHz by 802.11n(20MHz) Ant 1	

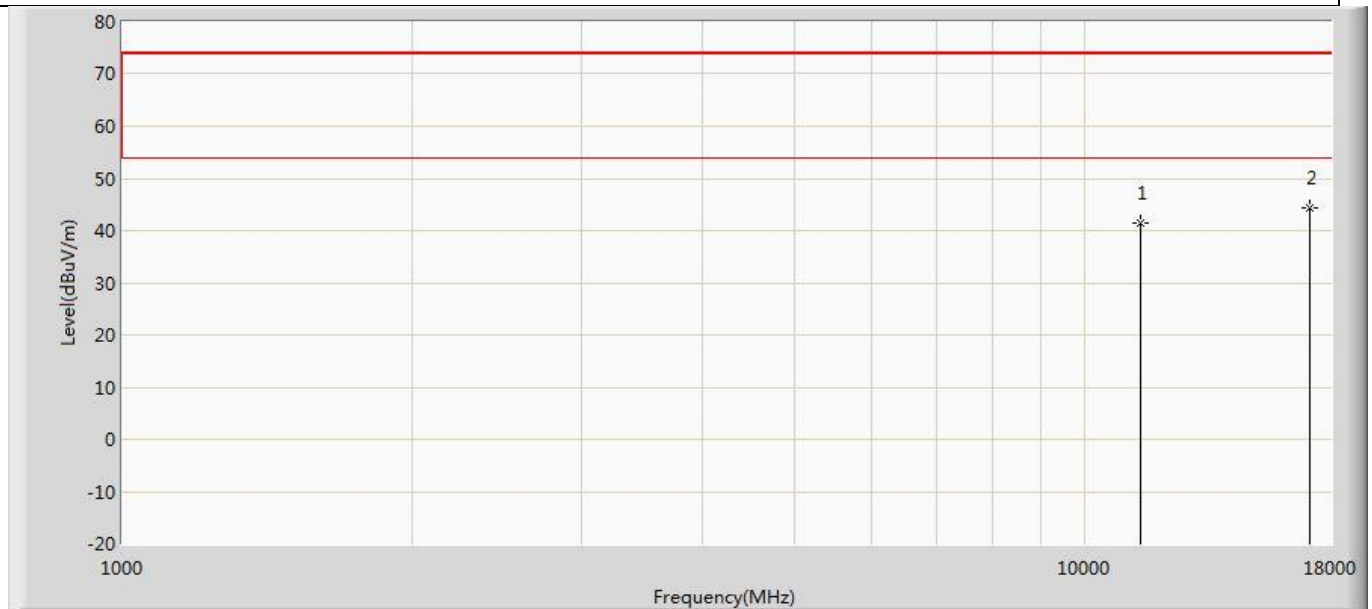


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	41.381	36.653	-32.619	74.000	4.729	PK
2	*	17100.000	44.341	32.813	-29.659	74.000	11.528	PK

Profile: 2150775R	Page No.: 357
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5745MHz by 802.11n(20MHz) Ant 1	

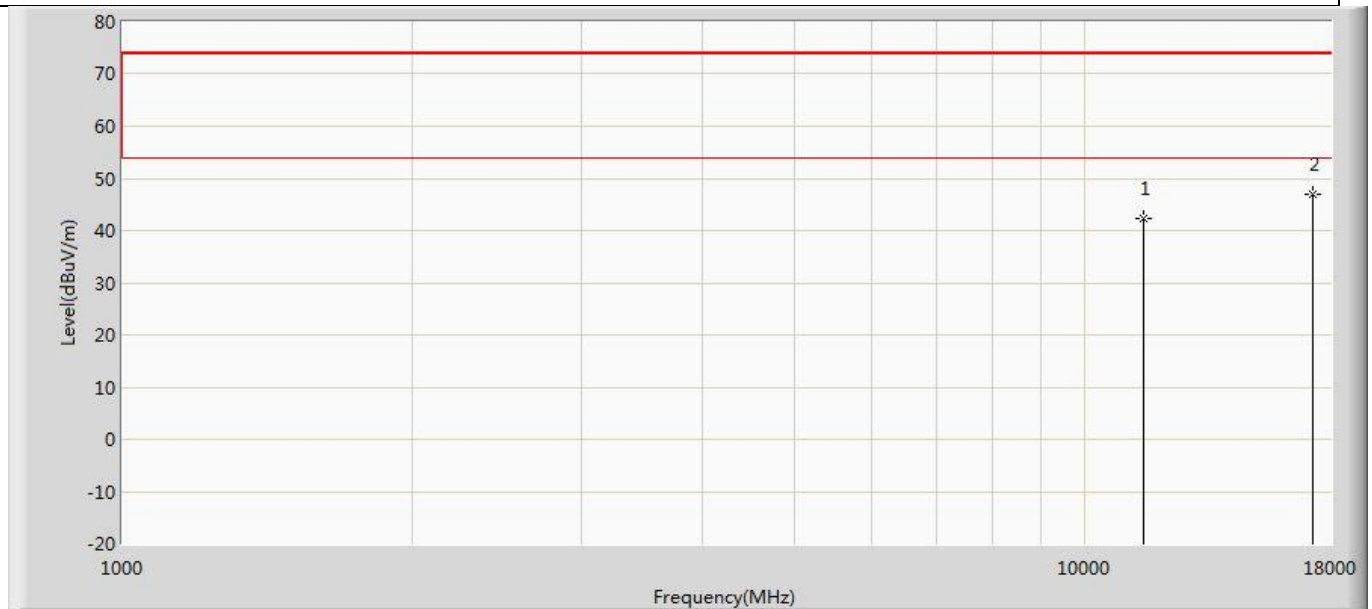


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	42.316	37.687	-31.684	74.000	4.629	PK
2	*	17235.000	46.869	33.421	-27.131	74.000	13.448	PK

Profile: 2150775R	Page No.: 358
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5745MHz by 802.11n(20MHz) Ant 1	

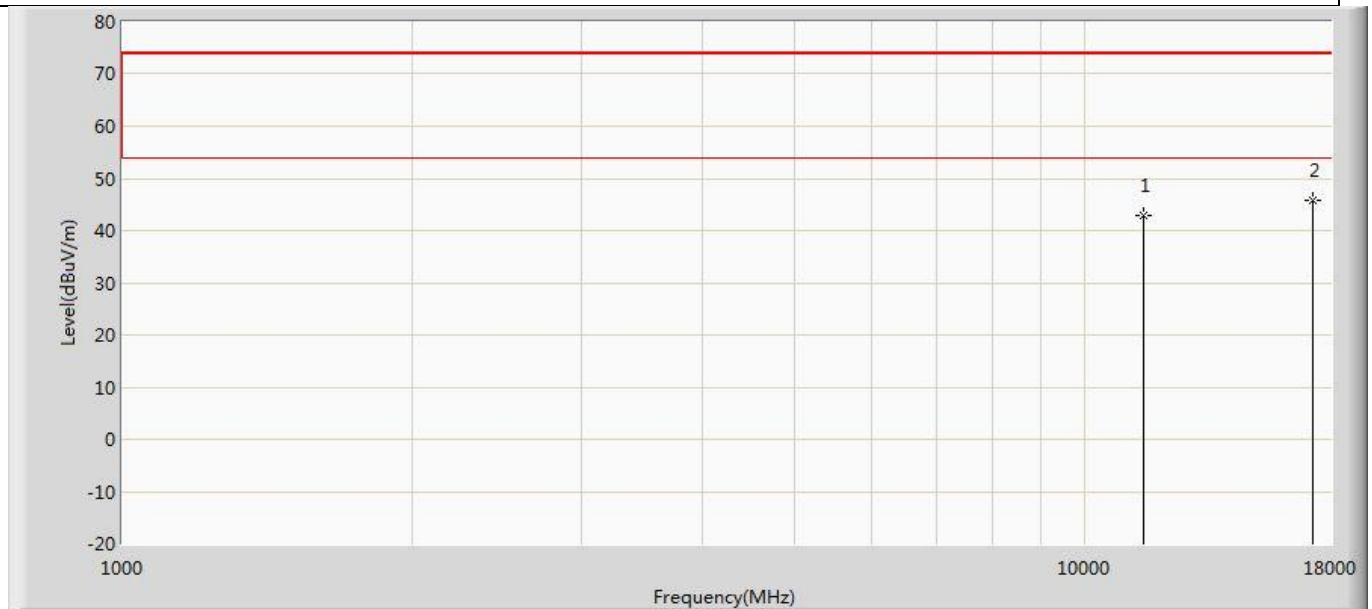


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	42.884	38.255	-31.116	74.000	4.629	PK
2	*	17235.000	45.827	32.379	-28.173	74.000	13.448	PK

Profile: 2150775R	Page No.: 359
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5785MHz by 802.11n(20MHz) Ant 1	

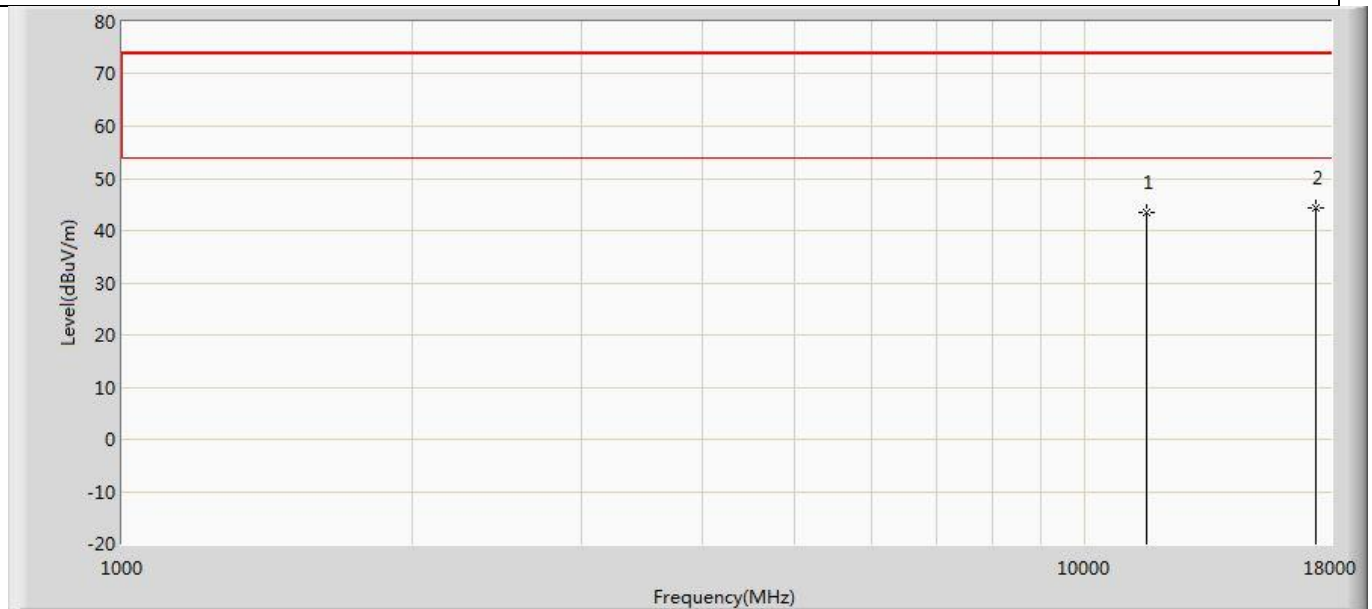


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	43.372	37.459	-30.628	74.000	5.913	PK
2	*	17355.000	44.468	33.248	-29.532	74.000	11.221	PK

Profile: 2150775R	Page No.: 360
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5785MHz by 802.11n(20MHz) Ant 1	

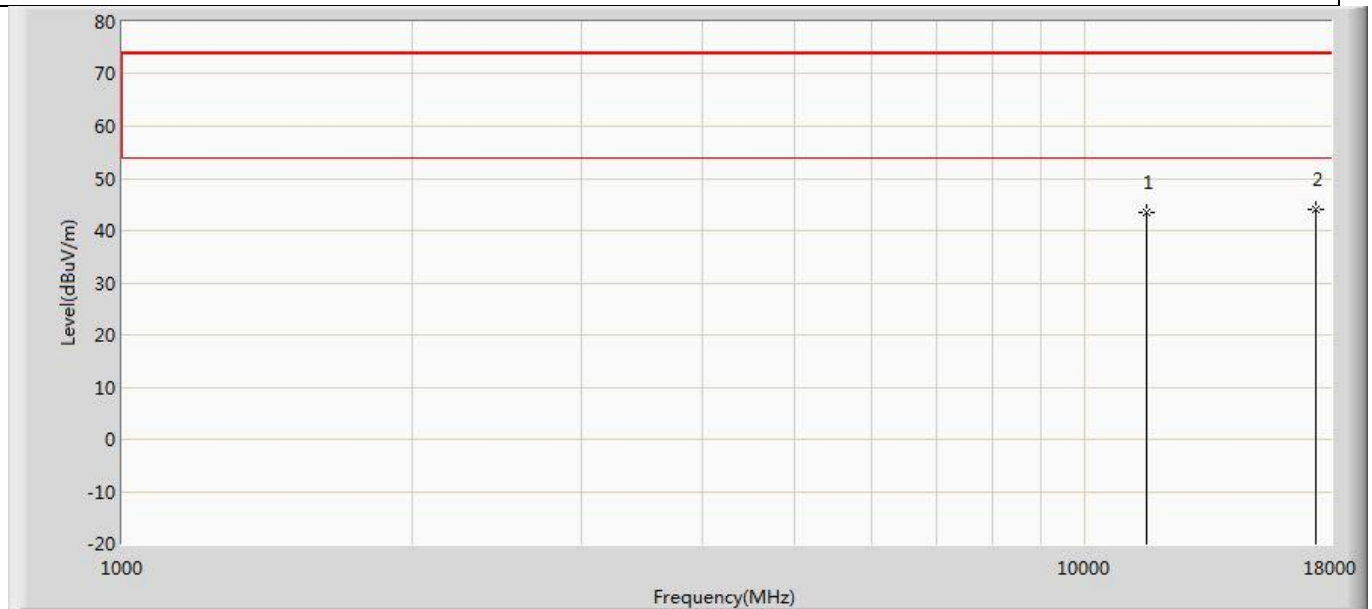


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	43.609	37.696	-30.391	74.000	5.913	PK
2	*	17355.000	43.997	32.777	-30.003	74.000	11.221	PK

Profile: 2150775R	Page No.: 361
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5825MHz by 802.11n(20MHz) Ant 1	

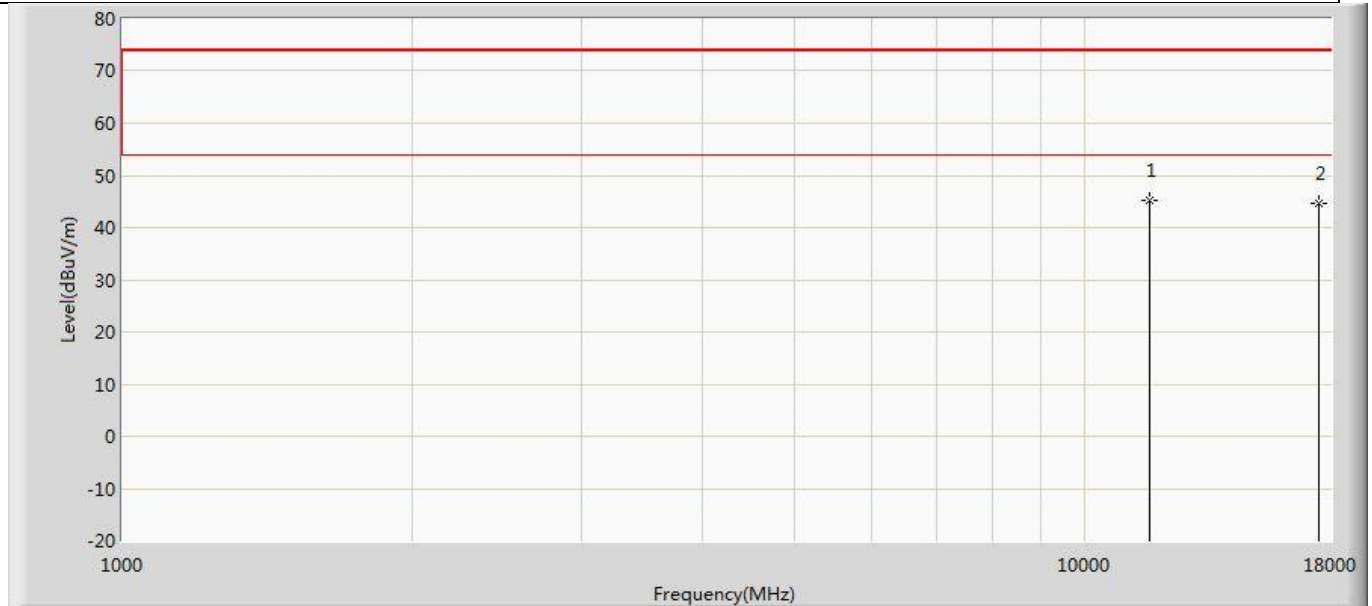


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11650.000	45.345	38.845	-28.655	74.000	6.501	PK
2		17475.000	44.722	33.417	-29.278	74.000	11.306	PK

Profile: 2150775R	Page No.: 362
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5825MHz by 802.11n(20MHz) Ant 1	

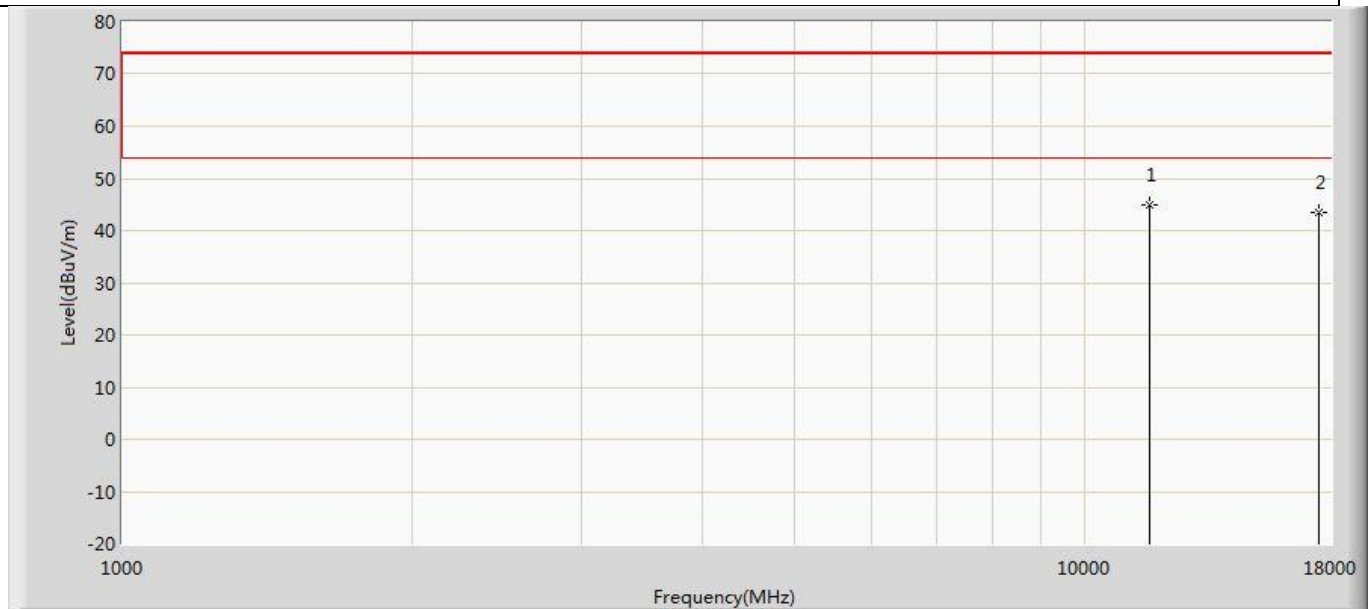


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11650.000	45.003	38.503	-28.997	74.000	6.501	PK
2		17475.000	43.514	32.209	-30.486	74.000	11.306	PK

Profile: 2150775R	Page No.: 363
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) Ant 1	

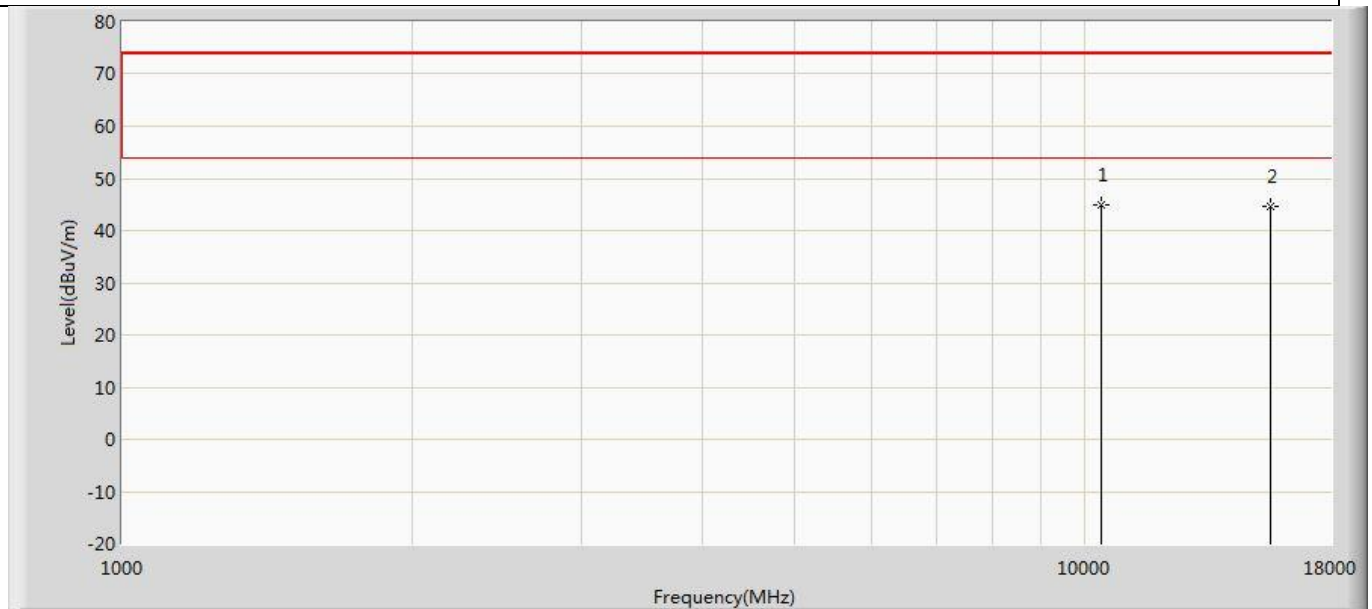


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10380.000	44.962	40.521	-29.038	74.000	4.442	PK
2		15570.000	44.535	36.016	-29.465	74.000	8.520	PK

Profile: 2150775R	Page No.: 364
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) Ant 1	

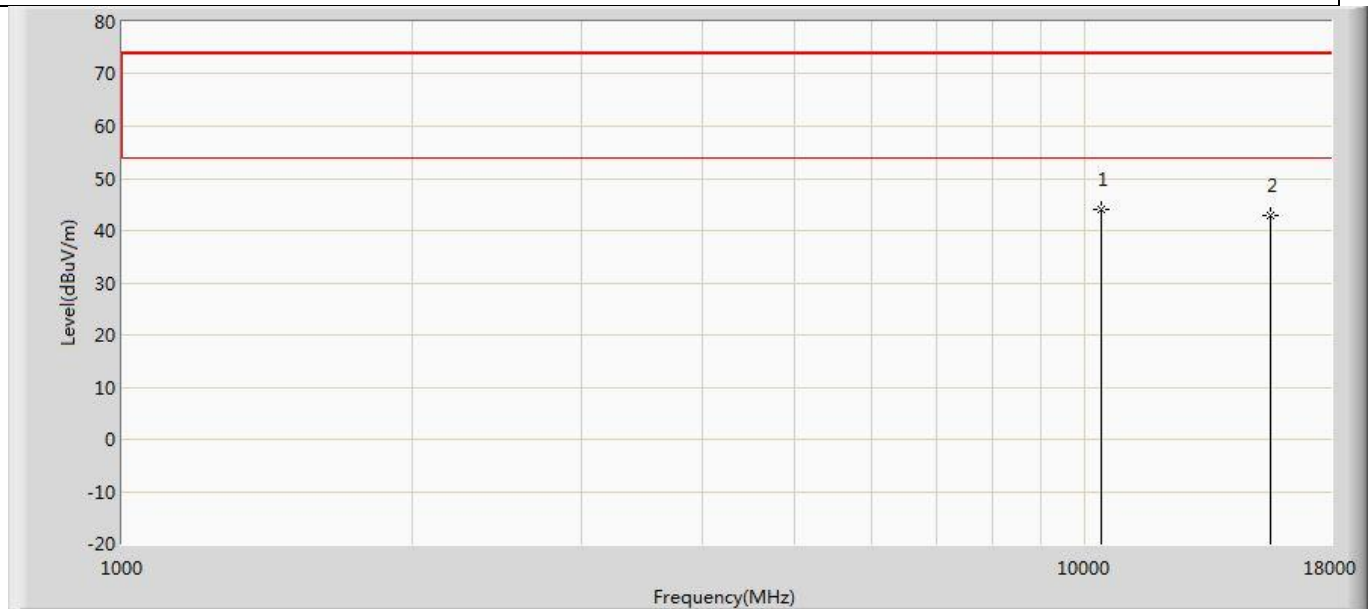


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10380.000	44.149	39.708	-29.851	74.000	4.442	PK
2		15570.000	42.856	34.337	-31.144	74.000	8.520	PK

Profile: 2150775R	Page No.: 365
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5230MHz by 802.11n(40MHz) Ant 1	

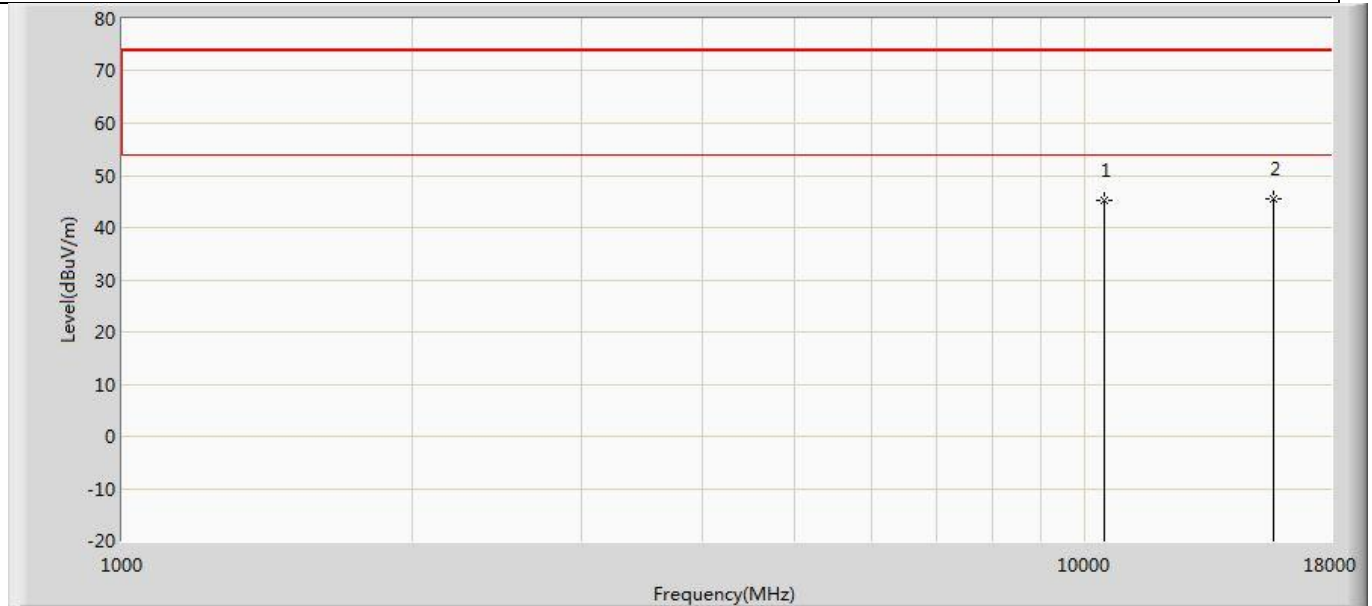


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	45.333	40.593	-28.667	74.000	4.740	PK
2	*	15690.000	45.412	35.988	-28.588	74.000	9.425	PK

Profile: 2150775R	Page No.: 366
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5230MHz by 802.11n(40MHz) Ant 1	

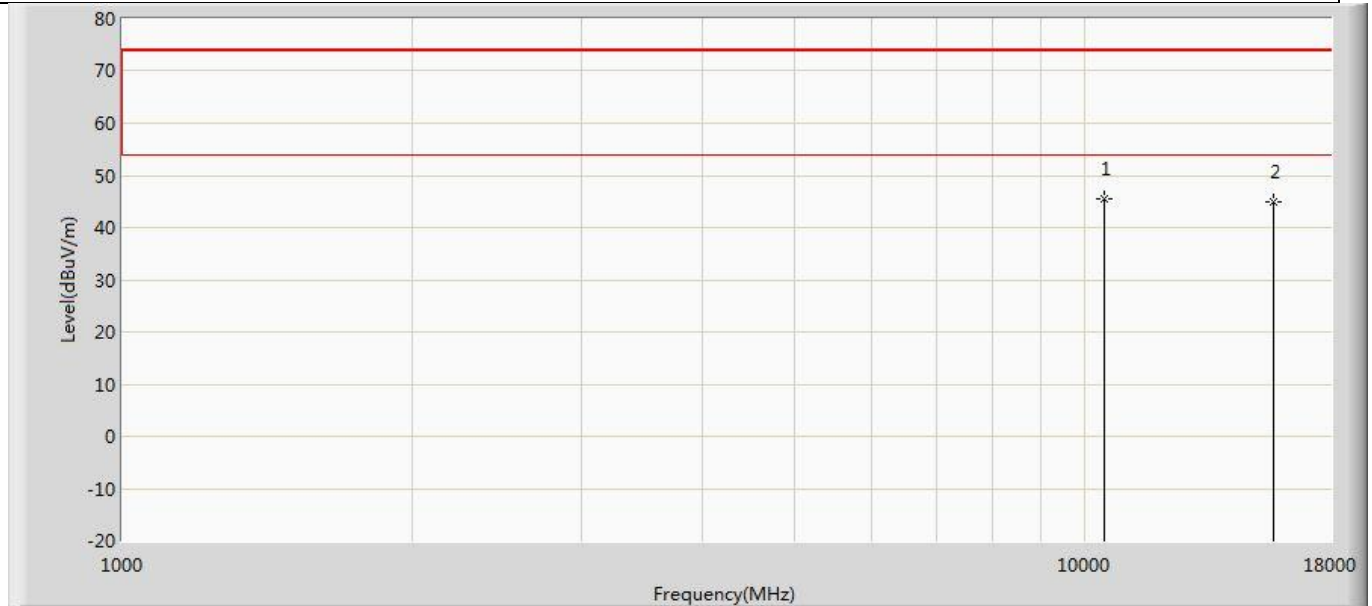


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10460.000	45.390	40.650	-28.610	74.000	4.740	PK
2		15690.000	44.901	35.477	-29.099	74.000	9.425	PK

Profile: 2150775R	Page No.: 367
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5270MHz by 802.11n(40MHz) Ant 1	

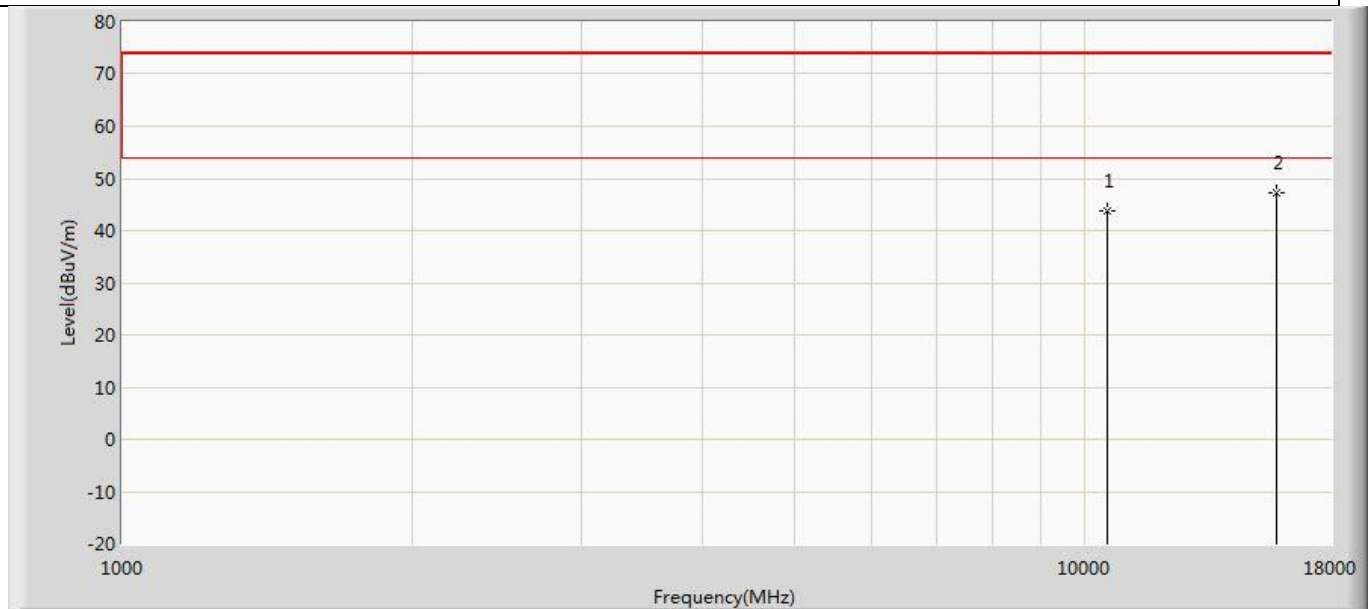


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	43.744	38.823	-30.256	74.000	4.921	PK
2	*	15810.000	47.167	38.494	-26.833	74.000	8.673	PK

Profile: 2150775R	Page No.: 368
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5270MHz by 802.11n(40MHz) Ant 1	

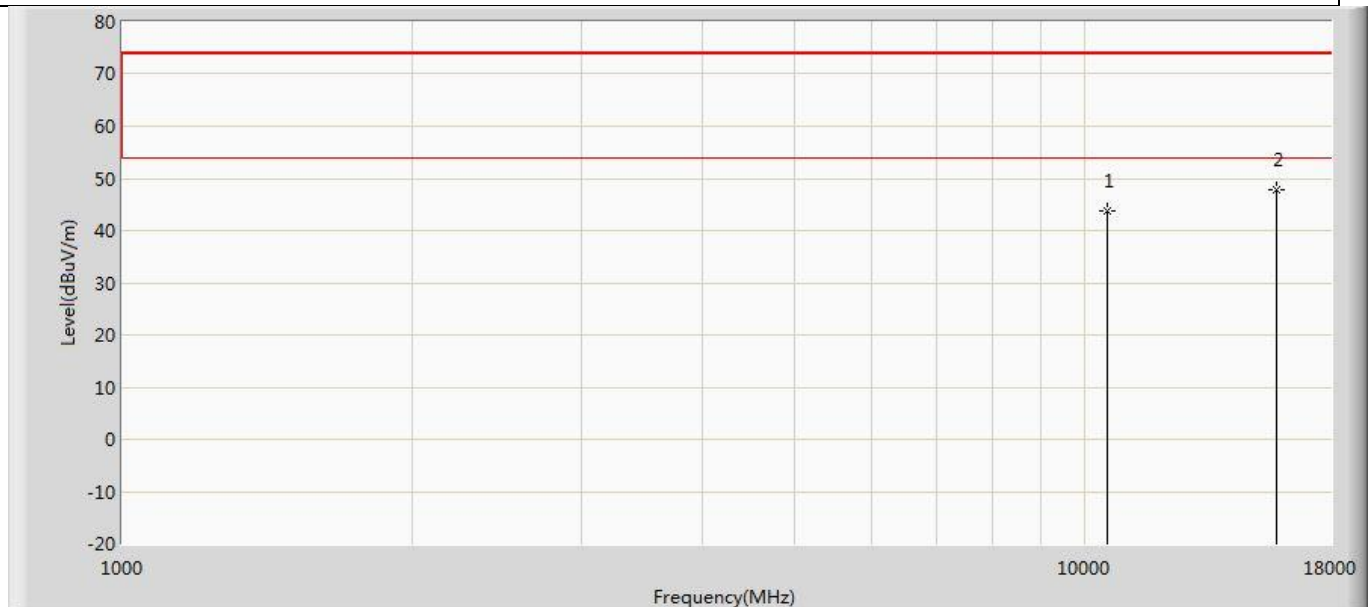


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	43.785	38.864	-30.215	74.000	4.921	PK
2	*	15810.000	47.724	39.051	-26.276	74.000	8.673	PK

Profile: 2150775R	Page No.: 369
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) Ant 1	

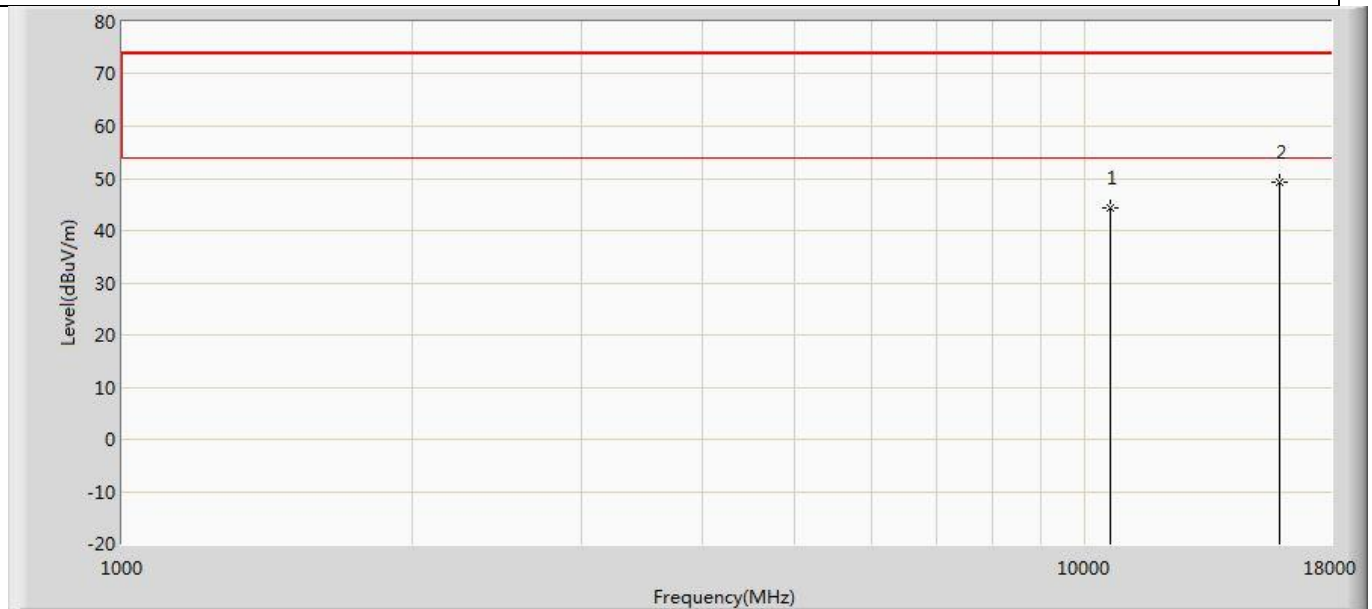


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	44.262	40.156	-29.738	74.000	4.105	PK
2	*	15930.000	49.280	39.631	-24.720	74.000	9.648	PK

Profile: 2150775R	Page No.: 370
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) Ant 1	

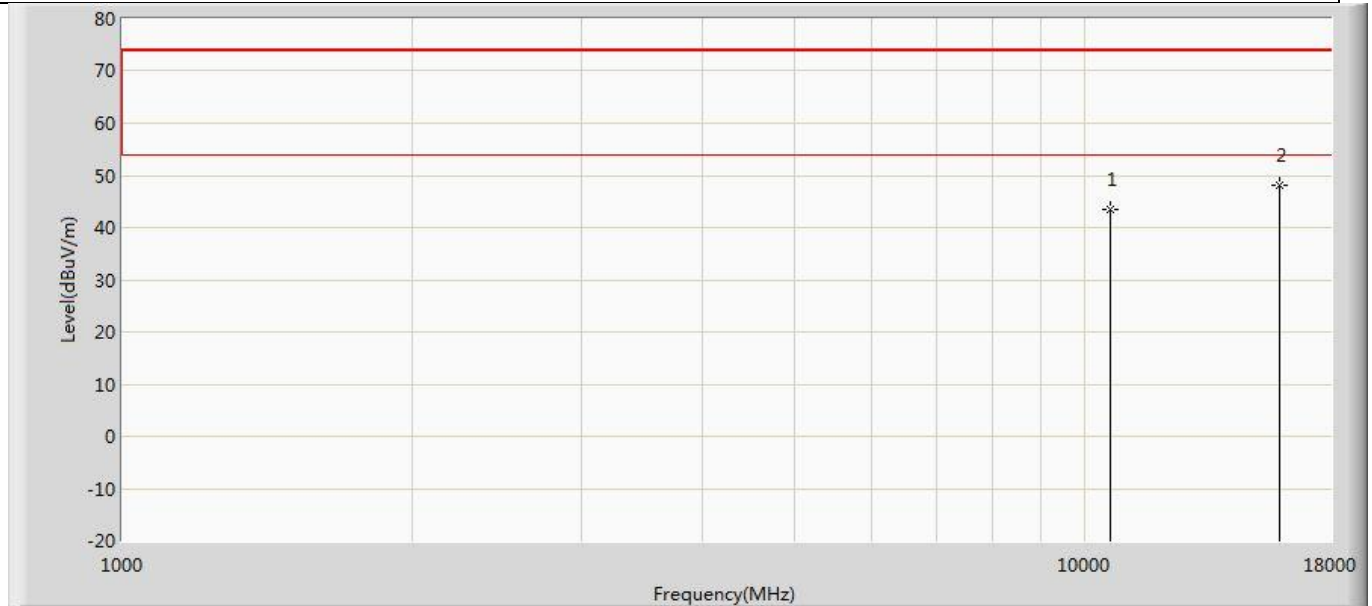


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	43.577	39.471	-30.423	74.000	4.105	PK
2	*	15930.000	48.190	38.541	-25.810	74.000	9.648	PK

Profile: 2150775R	Page No.: 371
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) Ant 1	

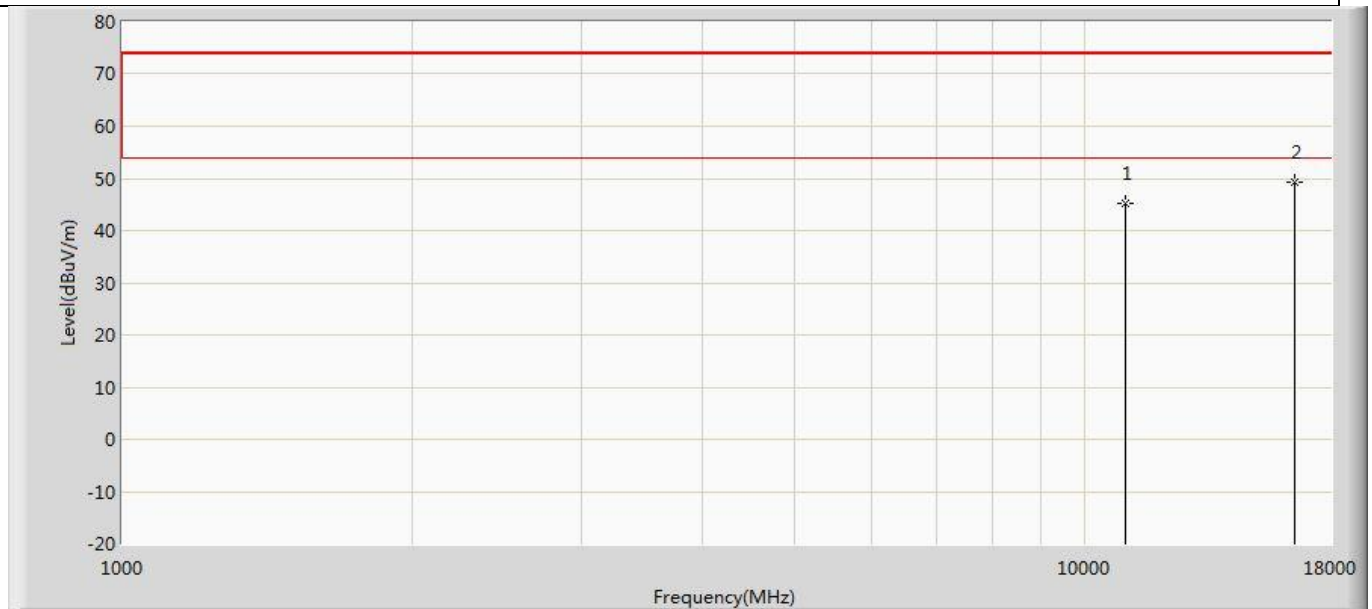


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	45.160	40.455	-28.840	74.000	4.706	PK
2	*	16530.000	49.260	39.655	-24.740	74.000	9.605	PK

Profile: 2150775R	Page No.: 372
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) Ant 1	

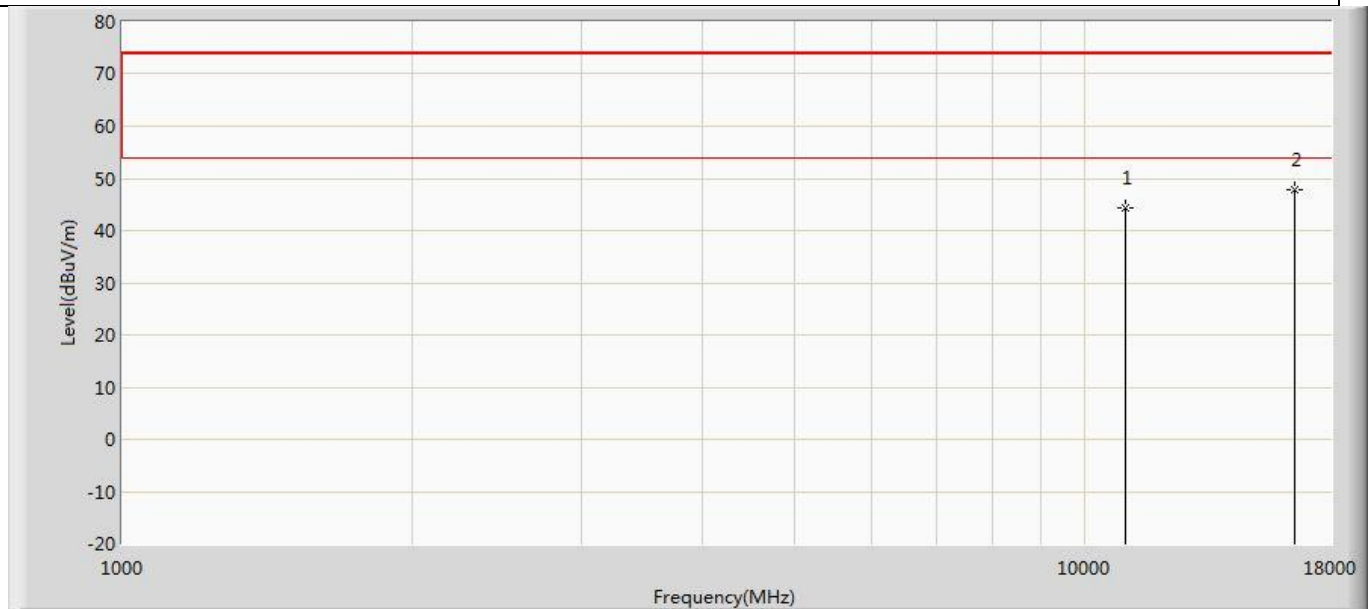


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	44.464	39.759	-29.536	74.000	4.706	PK
2	*	16530.000	47.845	38.240	-26.155	74.000	9.605	PK

Profile: 2150775R	Page No.: 373
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5590MHz by 802.11n(40MHz) Ant 1	

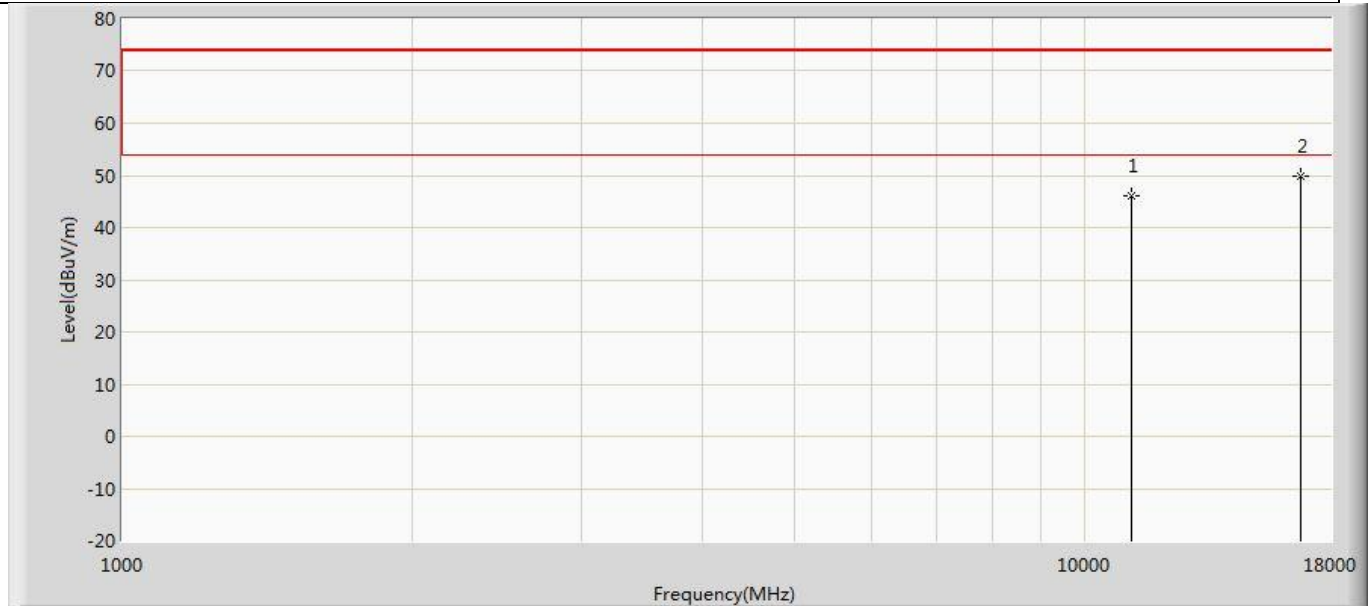


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.230	41.398	-27.770	74.000	4.832	PK
2	*	16770.000	49.931	38.981	-24.069	74.000	10.950	PK

Profile: 2150775R	Page No.: 374
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5590MHz by 802.11n(40MHz) Ant 1	

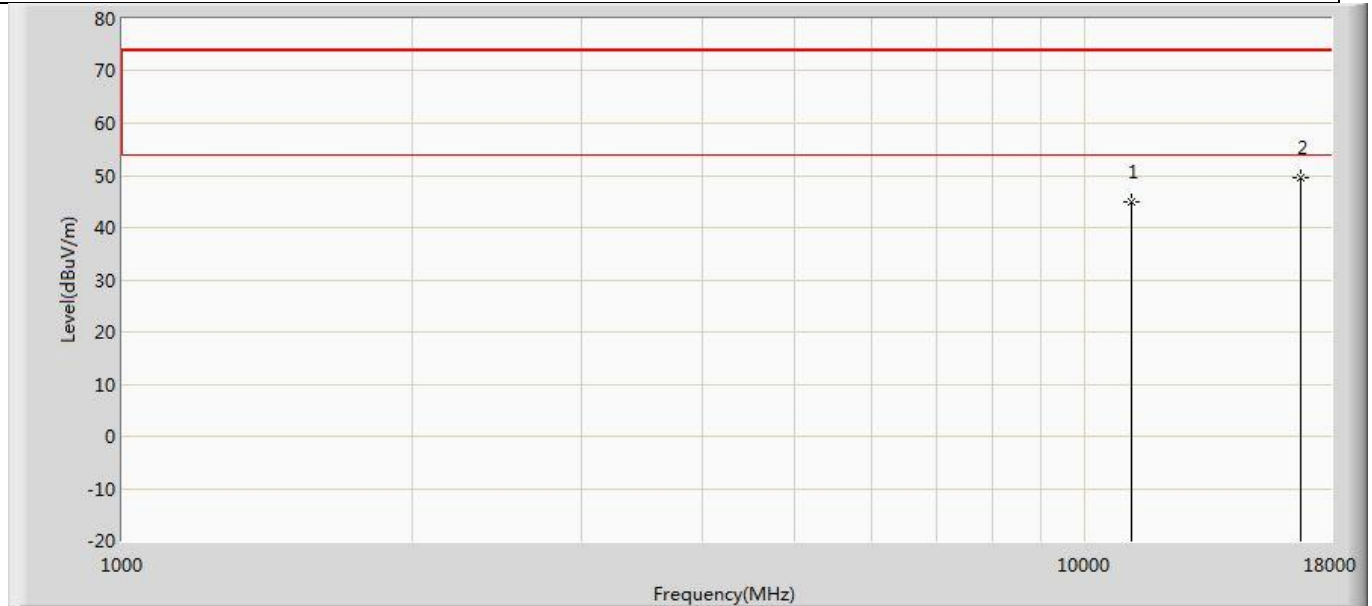


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	44.887	40.055	-29.113	74.000	4.832	PK
2	*	16770.000	49.615	38.665	-24.385	74.000	10.950	PK

Profile: 2150775R	Page No.: 375
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5670MHz by 802.11n(40MHz) Ant 1	

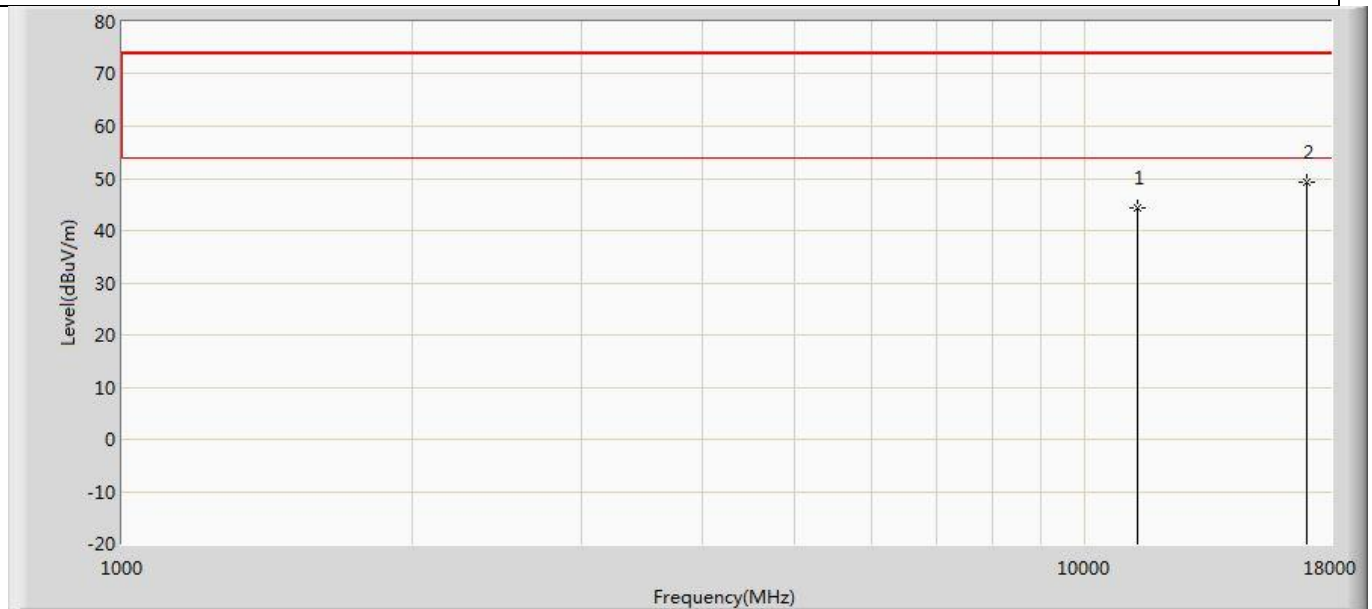


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	44.326	38.516	-29.674	74.000	5.810	PK
2	*	17010.000	49.251	38.313	-24.749	74.000	10.938	PK

Profile: 2150775R	Page No.: 376
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5670MHz by 802.11n(40MHz) Ant 1	

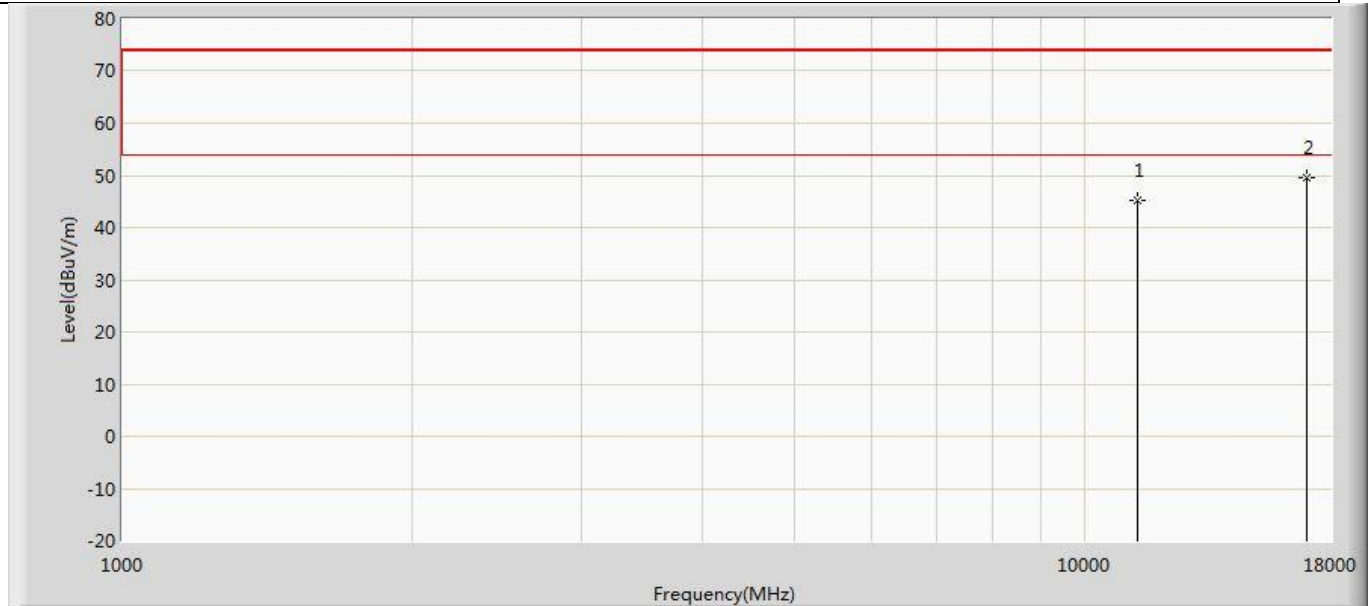


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.159	39.349	-28.841	74.000	5.810	PK
2	*	17010.000	49.434	38.496	-24.566	74.000	10.938	PK

Profile: 2150775R	Page No.: 377
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5755MHz by 802.11n(40MHz) Ant 1	

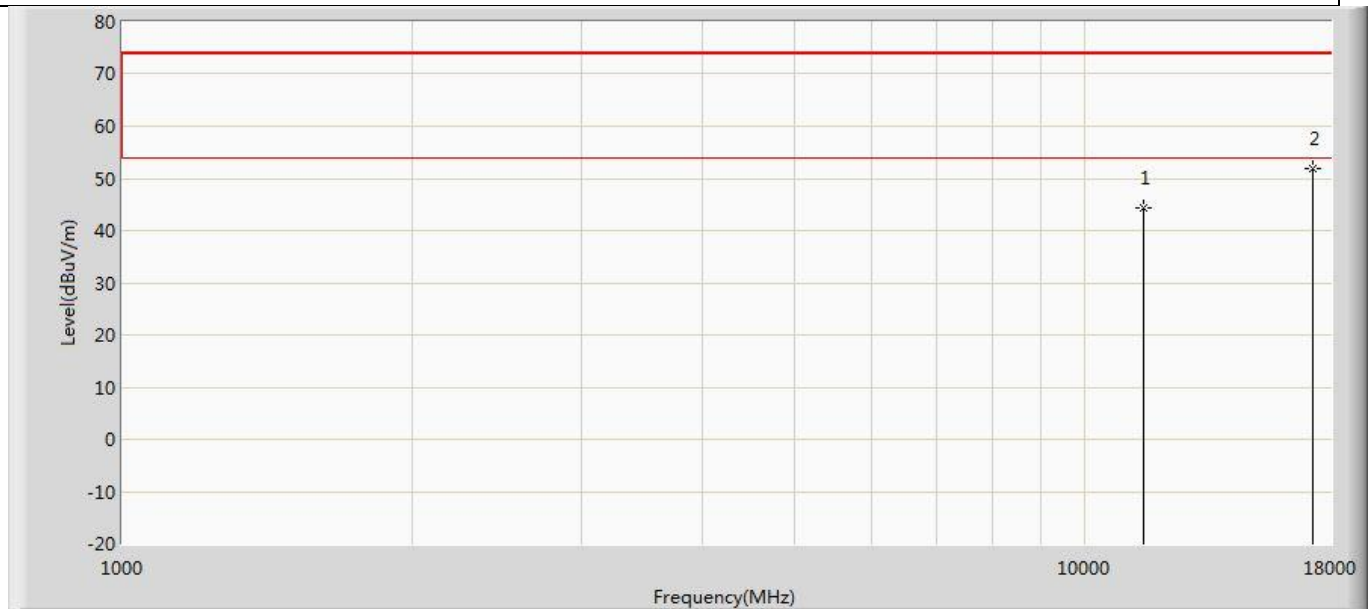


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	44.421	39.708	-29.579	74.000	4.713	PK
2	*	17265.000	51.775	39.299	-22.225	74.000	12.476	PK

Profile: 2150775R	Page No.: 378
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5755MHz by 802.11n(40MHz) Ant 1	

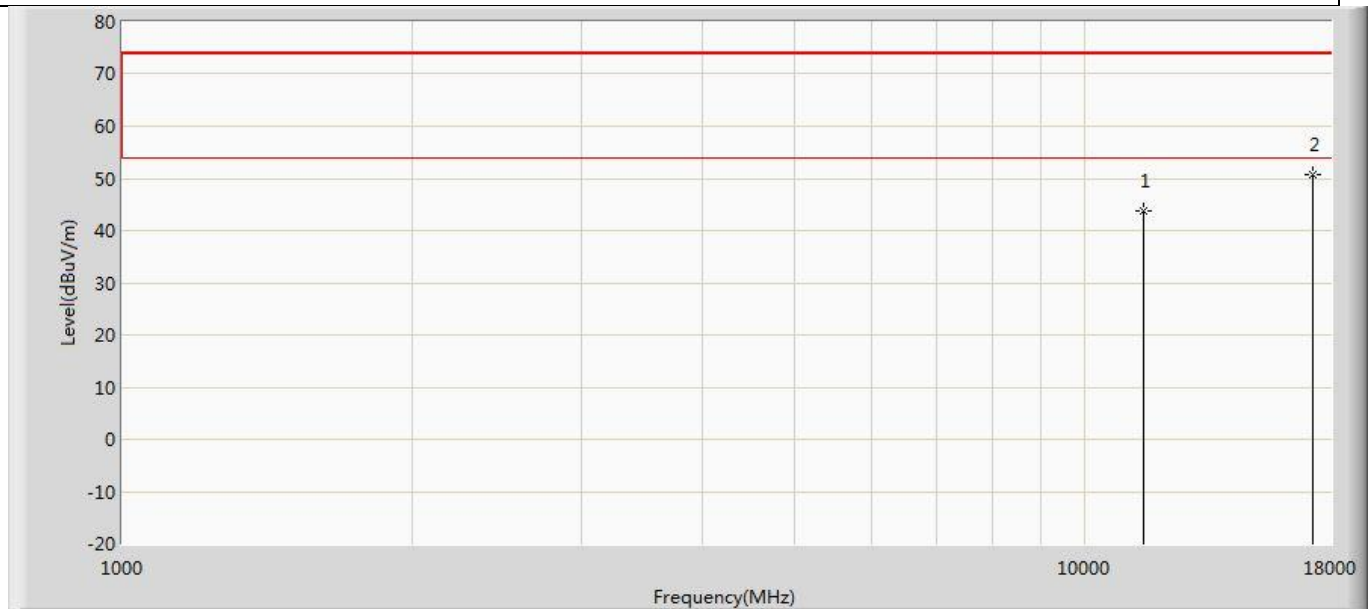


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	43.763	39.050	-30.237	74.000	4.713	PK
2	*	17265.000	50.594	38.118	-23.406	74.000	12.476	PK

Profile: 2150775R	Page No.: 379
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5795MHz by 802.11n(40MHz) Ant 1	

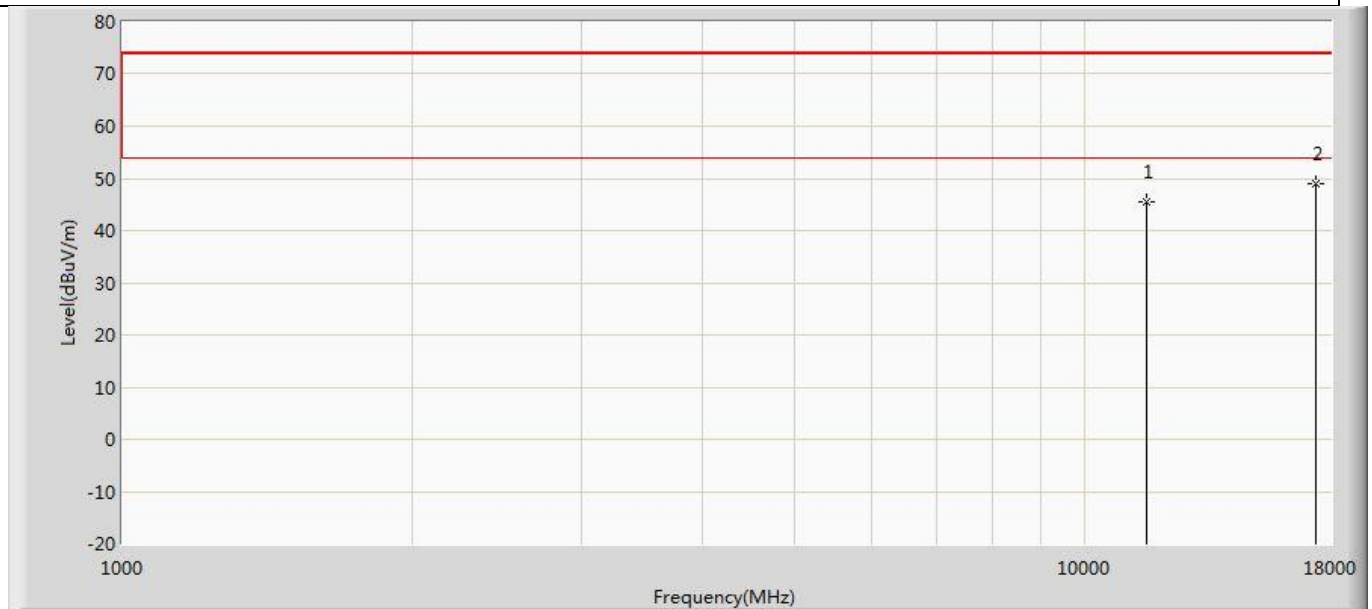


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	45.630	39.484	-28.370	74.000	6.146	PK
2	*	17385.000	49.030	37.658	-24.970	74.000	11.373	PK

Profile: 2150775R	Page No.: 380
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5795MHz by 802.11n(40MHz) Ant 1	

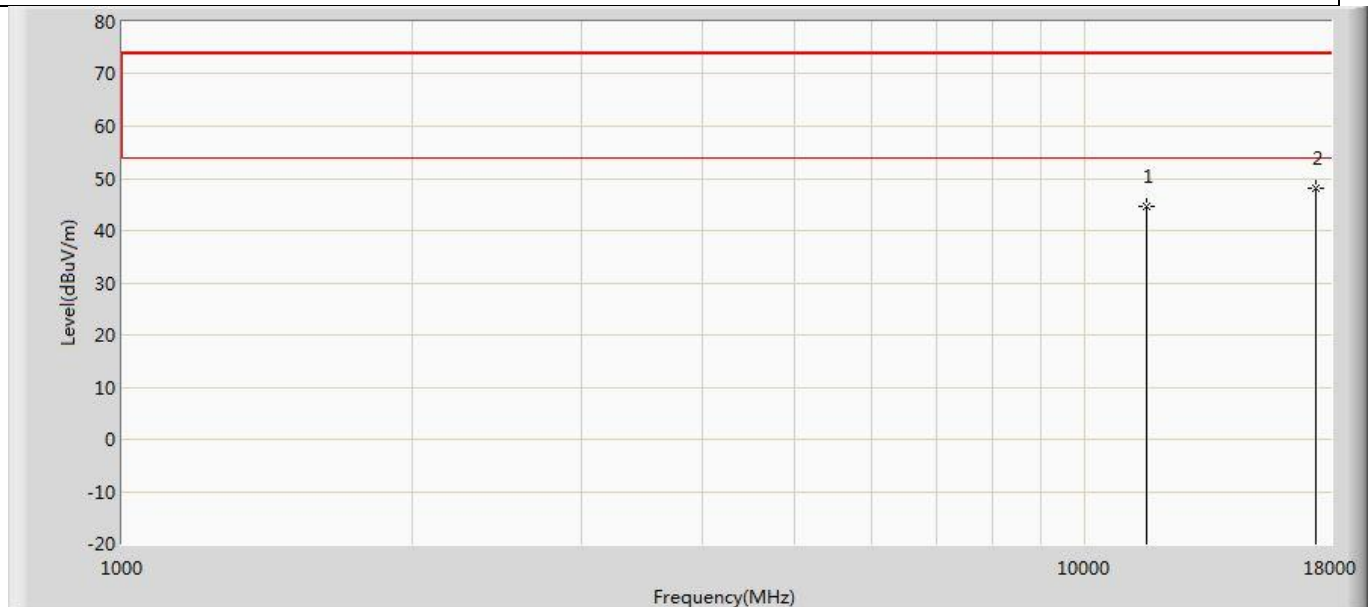


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	44.766	38.620	-29.234	74.000	6.146	PK
2	*	17385.000	48.123	36.751	-25.877	74.000	11.373	PK

Profile: 2150775R	Page No.: 381
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) Ant 1	

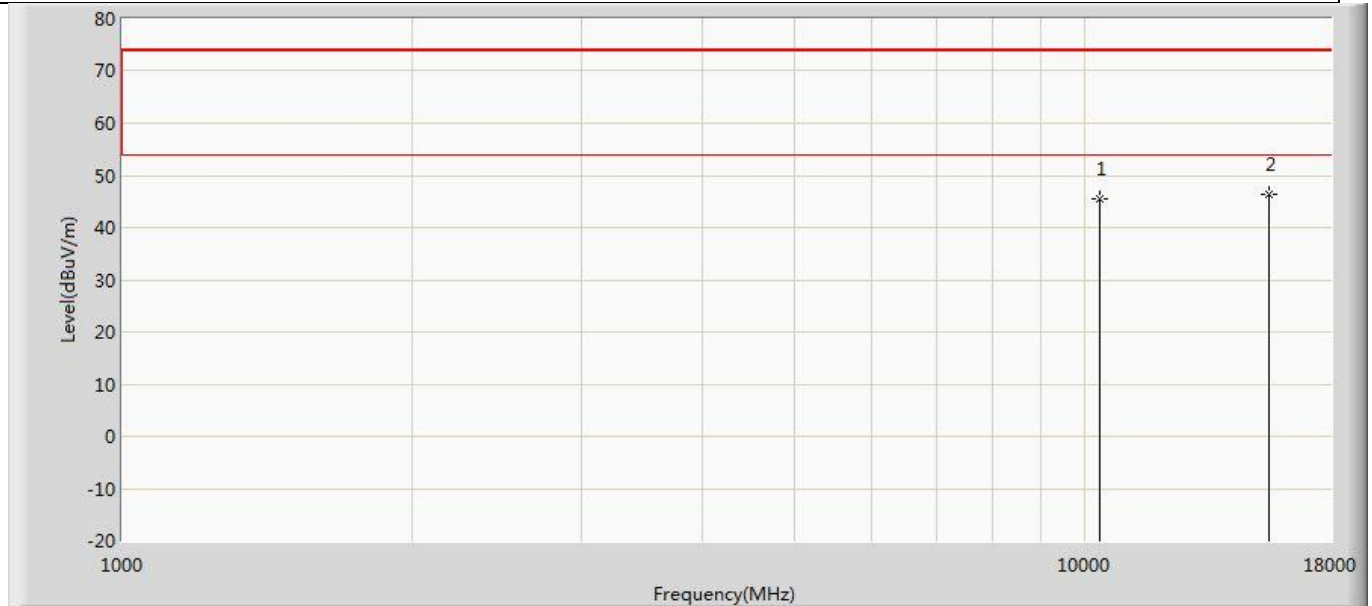


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	45.383	41.662	-28.617	74.000	3.722	PK
2	*	15540.000	46.378	39.025	-27.622	74.000	7.352	PK

Profile: 2150775R	Page No.: 382
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) Ant 1	

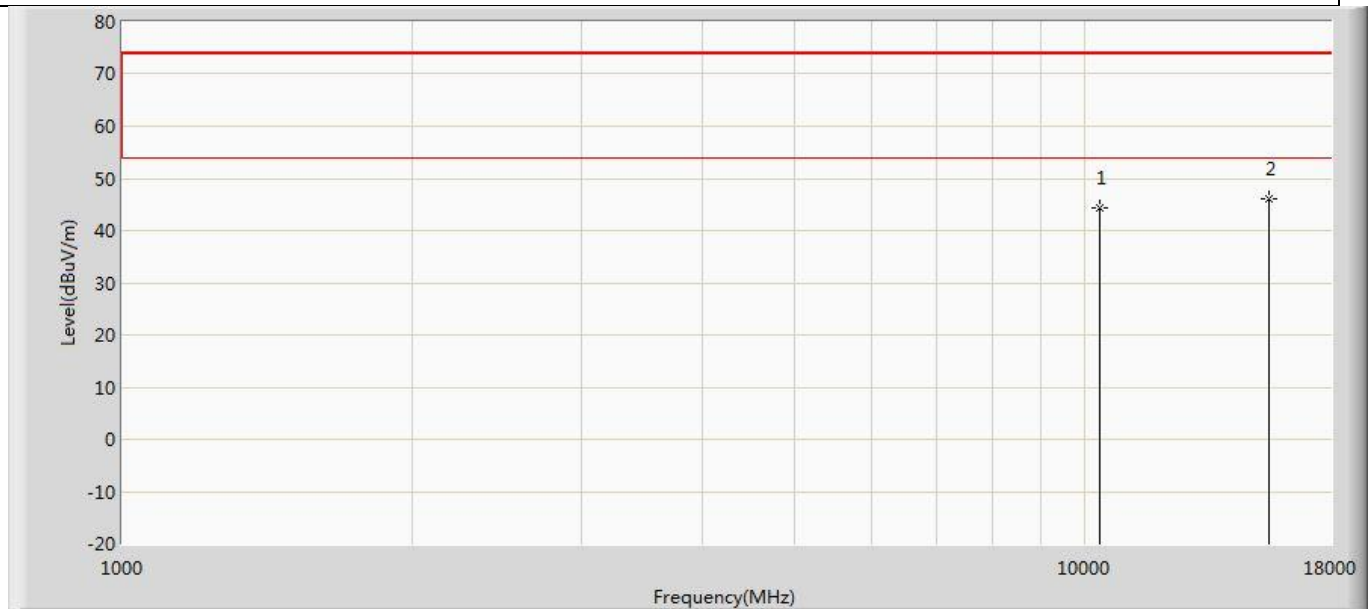


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	44.438	40.717	-29.562	74.000	3.722	PK
2	*	15540.000	46.134	38.781	-27.866	74.000	7.352	PK

Profile: 2150775R	Page No.: 383
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5220MHz by 802.11ac(20MHz) Ant 1	

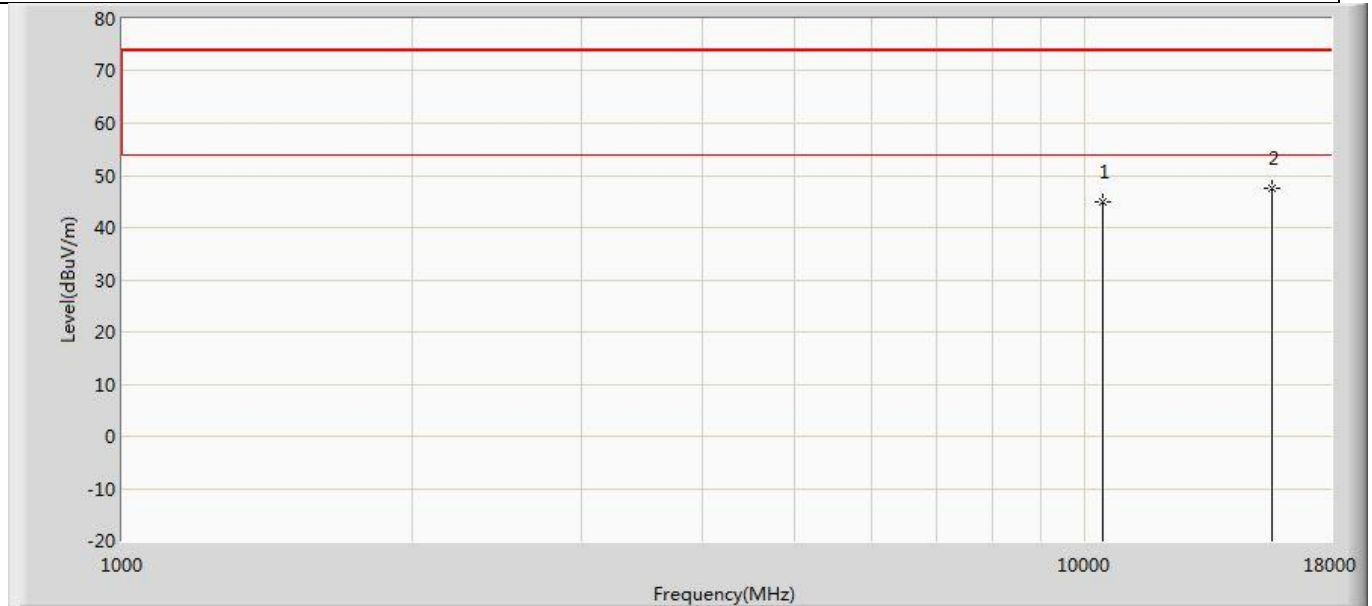


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.786	39.963	-29.214	74.000	4.823	PK
2	*	15660.000	47.607	38.830	-26.393	74.000	8.776	PK

Profile: 2150775R	Page No.: 384
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5220MHz by 802.11ac(20MHz) Ant 1	

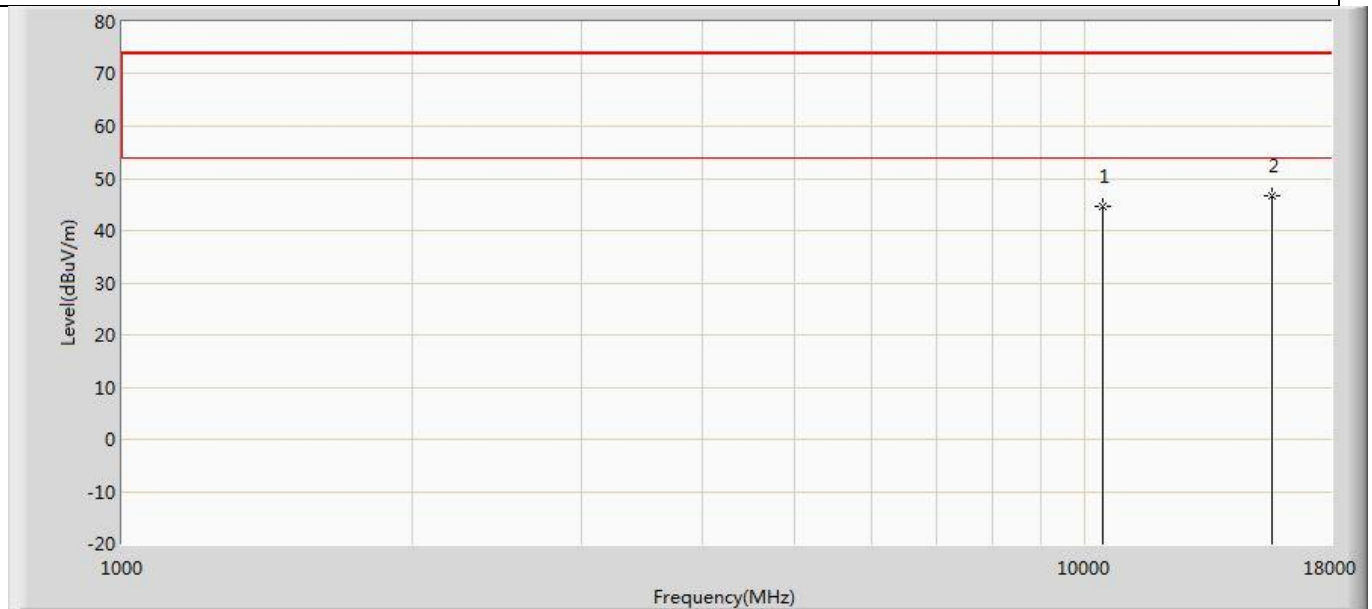


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.497	39.674	-29.503	74.000	4.823	PK
2	*	15660.000	46.770	37.993	-27.230	74.000	8.776	PK

Profile: 2150775R	Page No.: 385
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5240MHz by 802.11ac(20MHz) Ant 1	

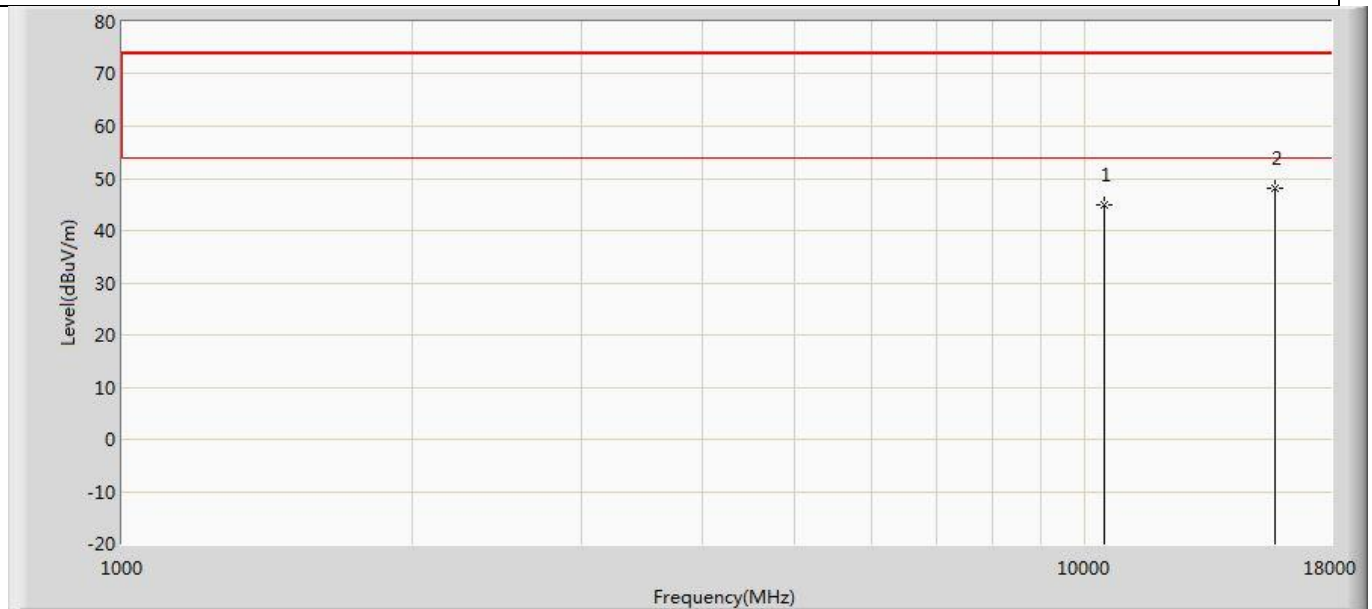


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.025	40.305	-28.975	74.000	4.719	PK
2	*	15720.000	48.099	38.534	-25.901	74.000	9.565	PK

Profile: 2150775R	Page No.: 386
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5240MHz by 802.11ac(20MHz) Ant 1	

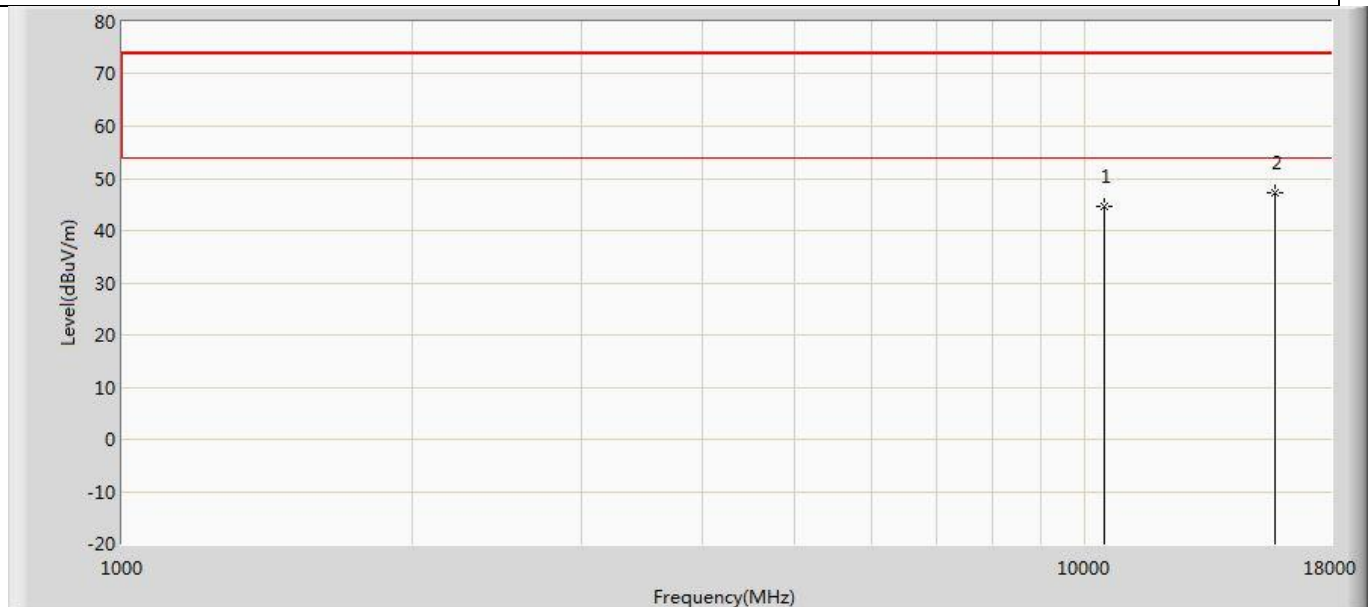


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	44.677	39.957	-29.323	74.000	4.719	PK
2	*	15720.000	47.388	37.823	-26.612	74.000	9.565	PK

Profile: 2150775R	Page No.: 387
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5260MHz by 802.11ac(20MHz) Ant 1	

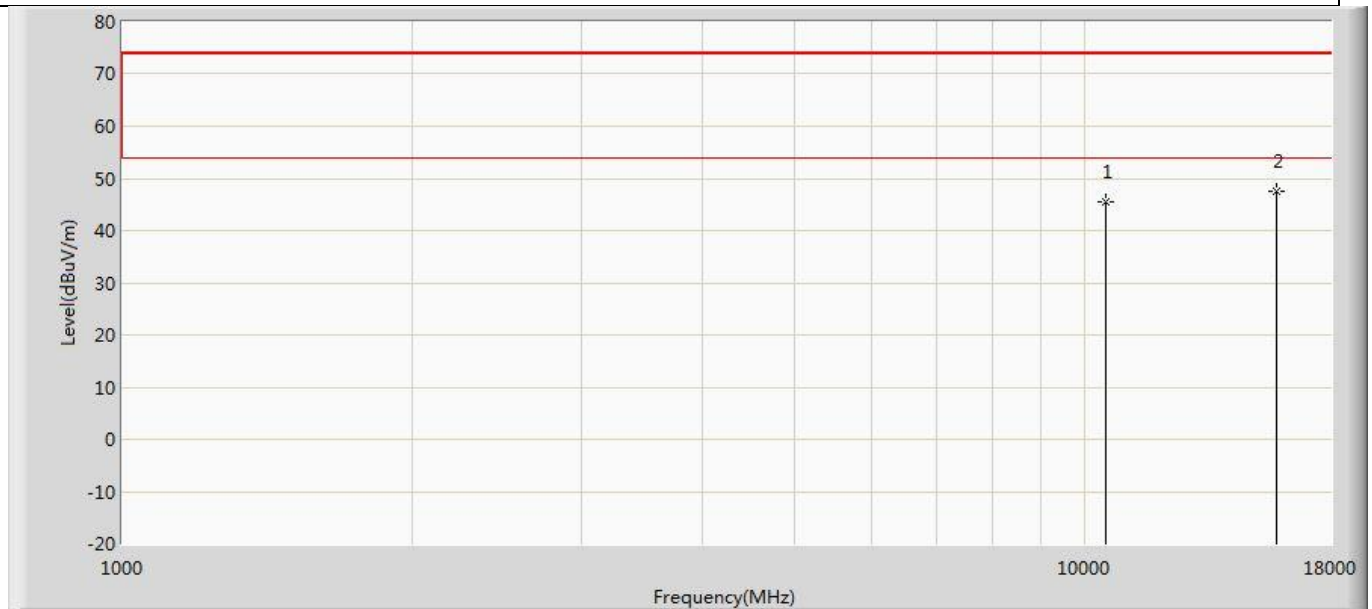


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.623	40.195	-28.377	74.000	5.428	PK
2	*	15780.000	47.403	38.728	-26.597	74.000	8.674	PK

Profile: 2150775R	Page No.: 388
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5260MHz by 802.11ac(20MHz) Ant 1	

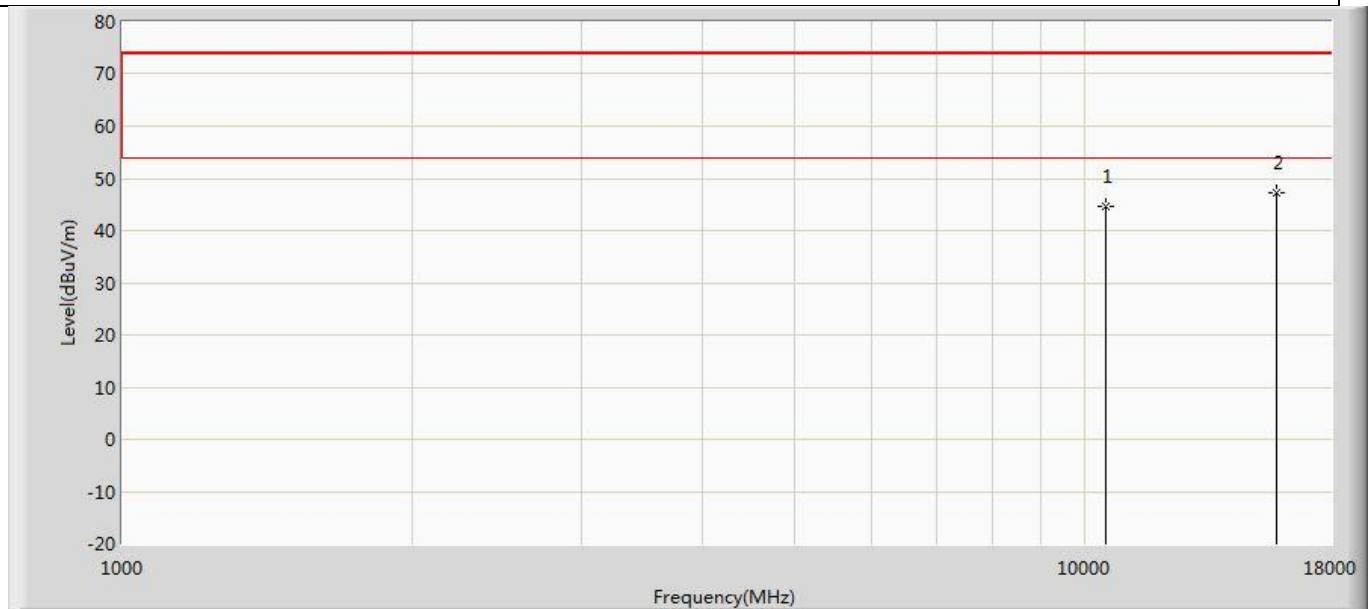


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	44.576	39.148	-29.424	74.000	5.428	PK
2	*	15780.000	47.243	38.568	-26.757	74.000	8.674	PK

Profile: 2150775R	Page No.: 389
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5300MHz by 802.11ac(20MHz) Ant 1	

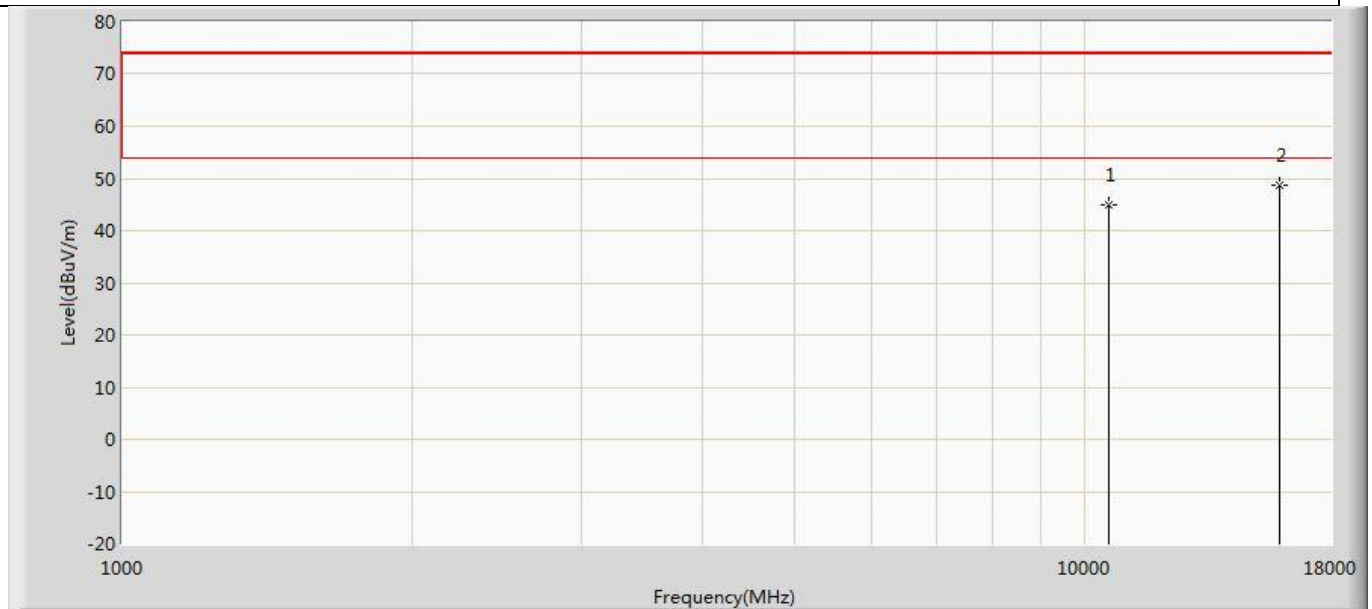


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.927	40.267	-29.073	74.000	4.660	PK
2	*	15900.000	48.741	39.954	-25.259	74.000	8.787	PK

Profile: 2150775R	Page No.: 390
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5300MHz by 802.11ac(20MHz) Ant 1	

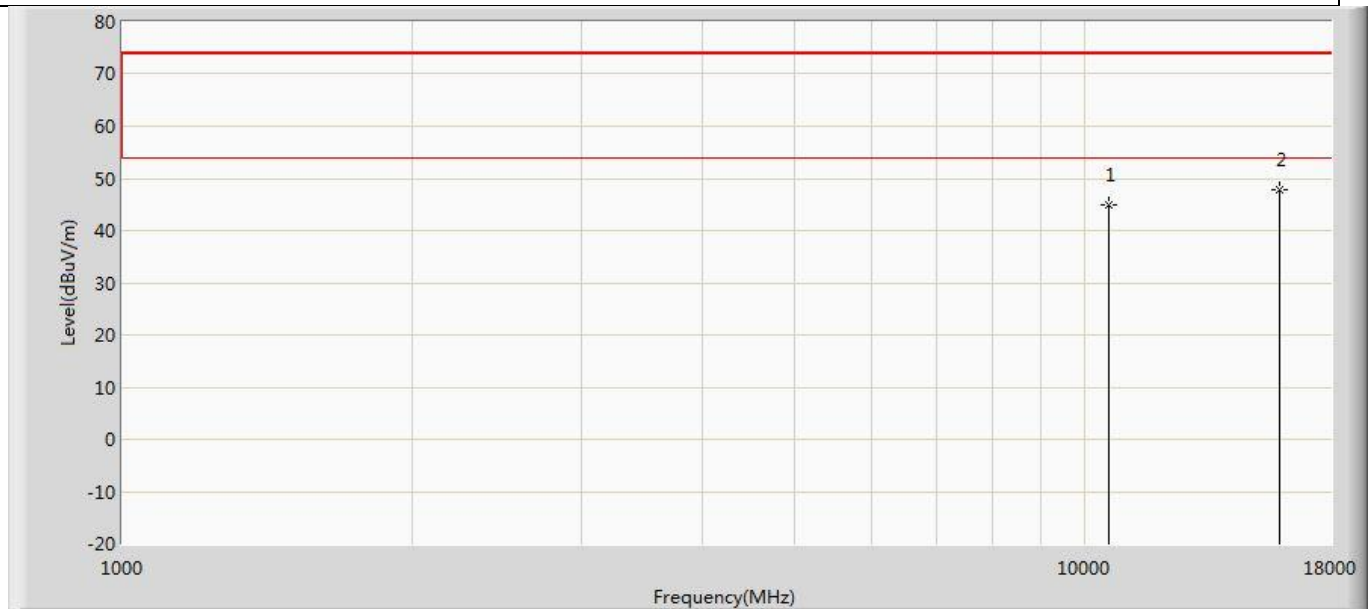


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.927	40.267	-29.073	74.000	4.660	PK
2	*	15900.000	47.804	39.017	-26.196	74.000	8.787	PK

Profile: 2150775R	Page No.: 391
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 802.11ac(20MHz) Ant 1	

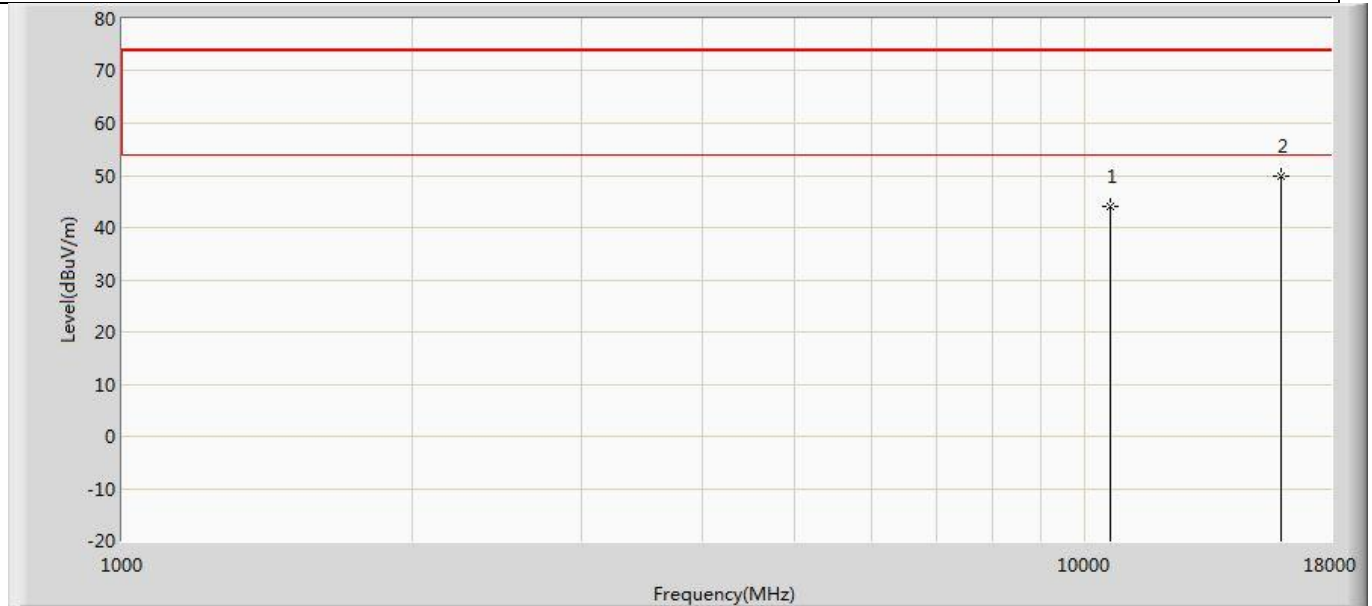


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	44.041	39.722	-29.959	74.000	4.319	PK
2	*	15960.000	49.923	39.673	-24.077	74.000	10.250	PK

Profile: 2150775R	Page No.: 392
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 802.11ac(20MHz) Ant 1	

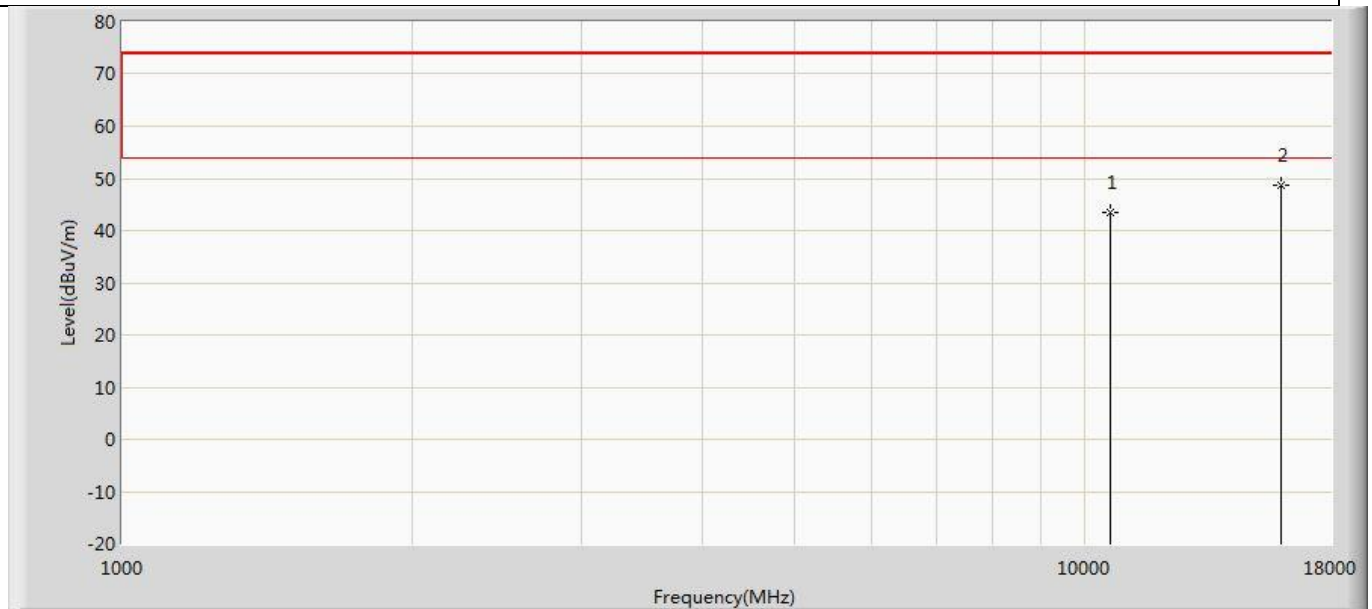


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	43.509	39.190	-30.491	74.000	4.319	PK
2	*	15960.000	48.827	38.577	-25.173	74.000	10.250	PK

Profile: 2150775R	Page No.: 393
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5500MHz by 802.11ac(20MHz) Ant 1	

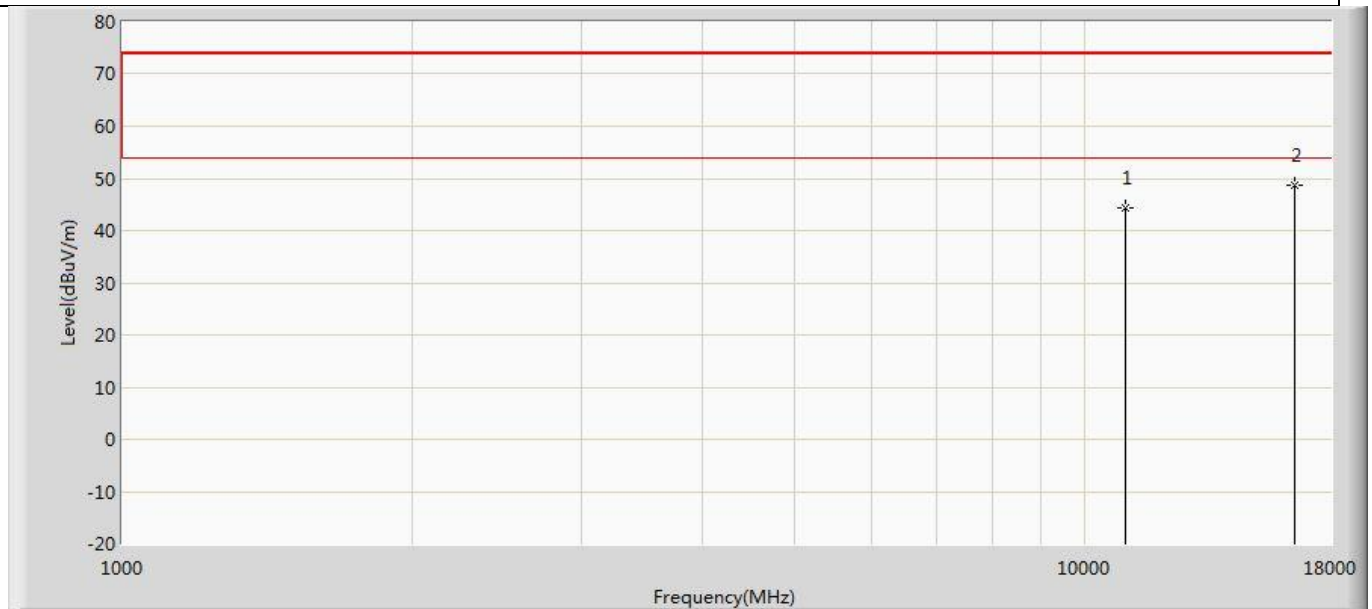


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	44.369	39.977	-29.631	74.000	4.392	PK
2	*	16500.000	48.571	38.887	-25.429	74.000	9.684	PK

Profile: 2150775R	Page No.: 394
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5500MHz by 802.11ac(20MHz) Ant 1	

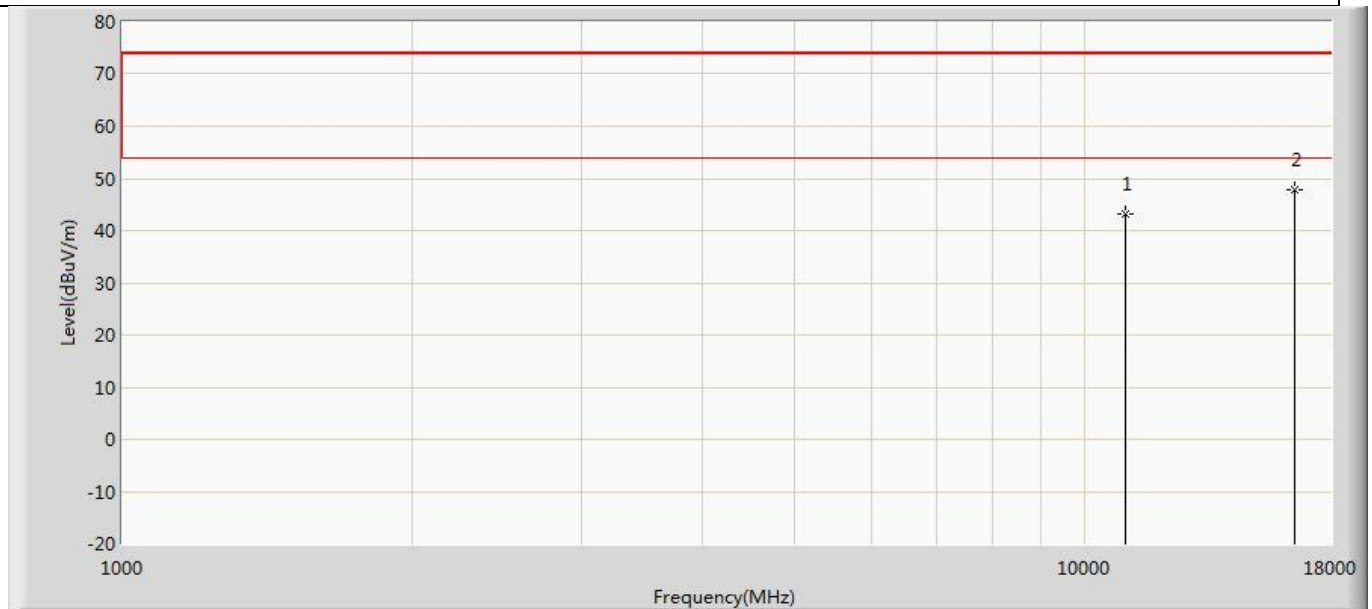


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.273	38.881	-30.727	74.000	4.392	PK
2	*	16500.000	47.767	38.083	-26.233	74.000	9.684	PK

Profile: 2150775R	Page No.: 395
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5580MHz by 802.11ac(20MHz) Ant 1	

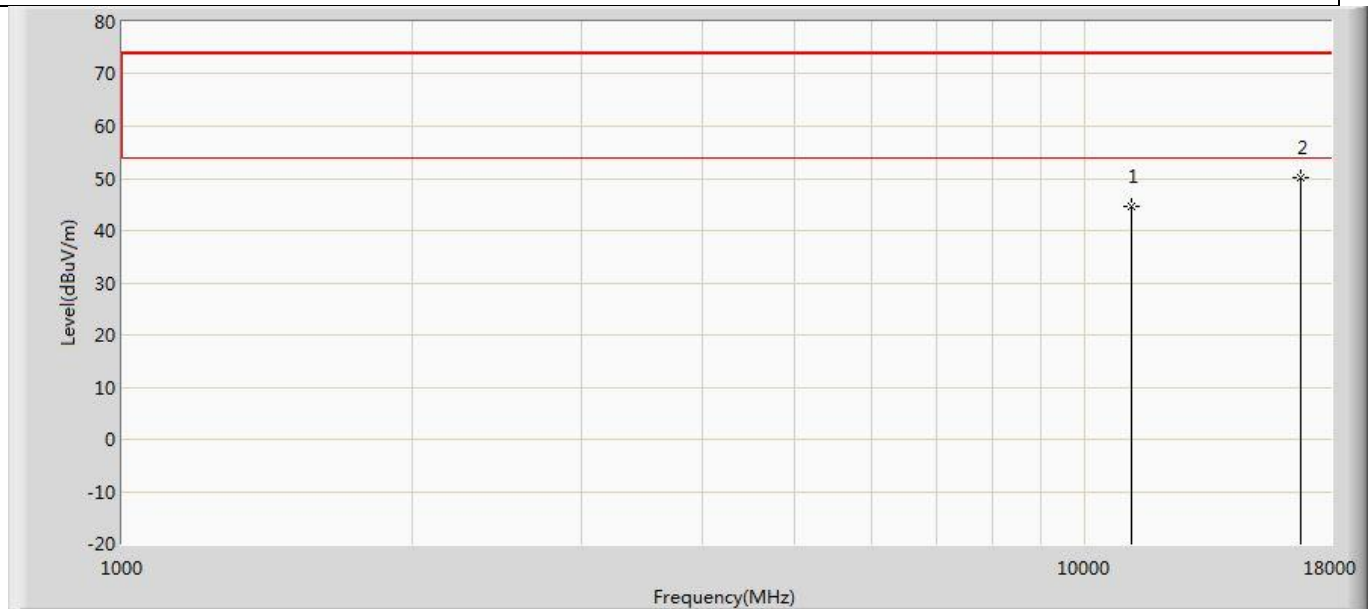


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.541	40.271	-29.459	74.000	4.271	PK
2	*	16740.000	50.228	39.742	-23.772	74.000	10.485	PK

Profile: 2150775R	Page No.: 396
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5580MHz by 802.11ac(20MHz) Ant 1	

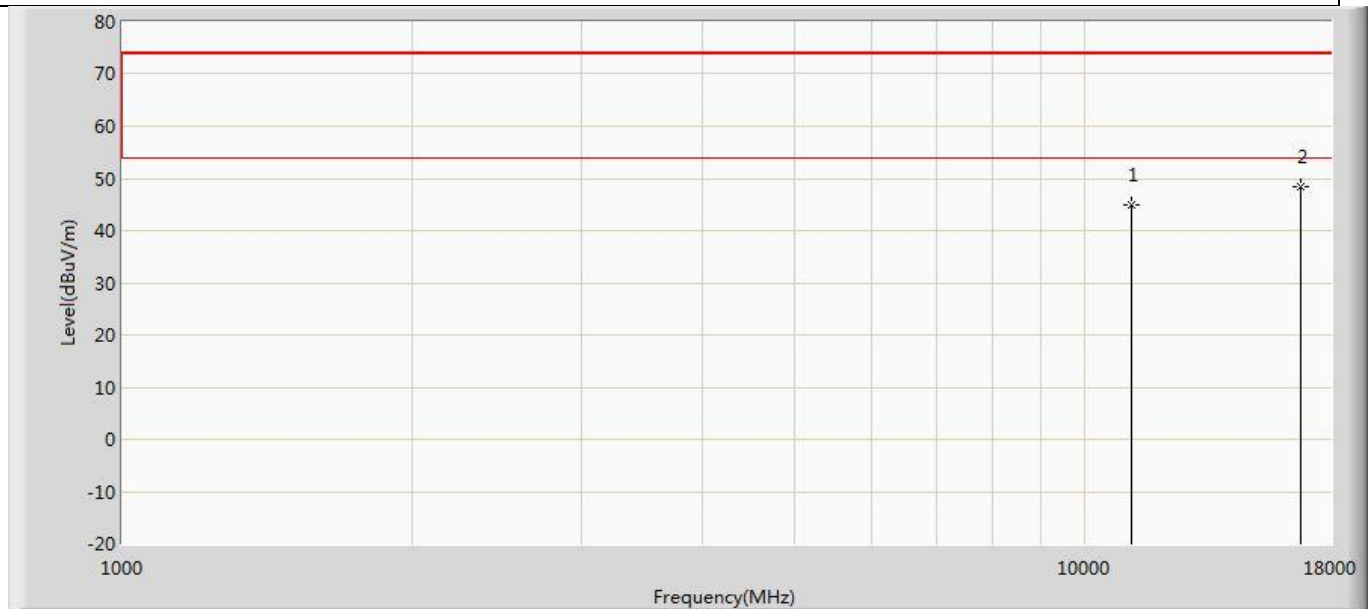


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.967	40.697	-29.033	74.000	4.271	PK
2	*	16740.000	48.445	37.959	-25.555	74.000	10.485	PK

Profile: 2150775R	Page No.: 397
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5700MHz by 802.11ac(20MHz) Ant 1	

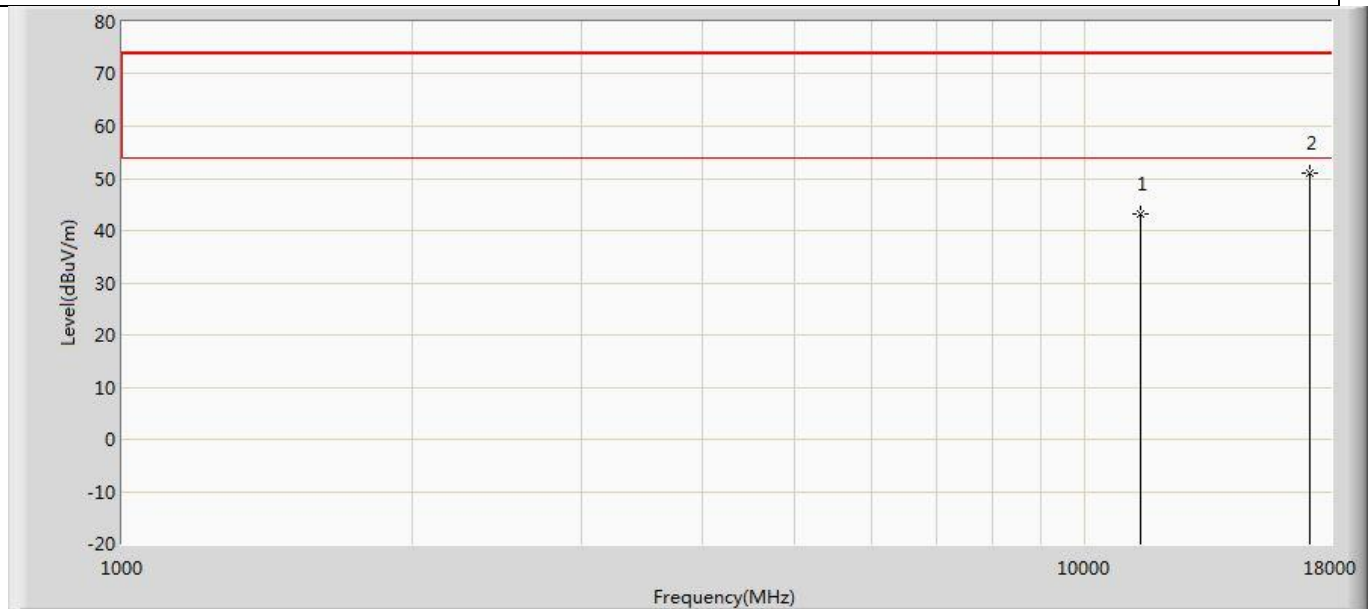


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	43.168	38.440	-30.832	74.000	4.729	PK
2	*	17100.000	50.903	39.375	-23.097	74.000	11.528	PK

Profile: 2150775R	Page No.: 398
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5700MHz by 802.11ac(20MHz) Ant 1	

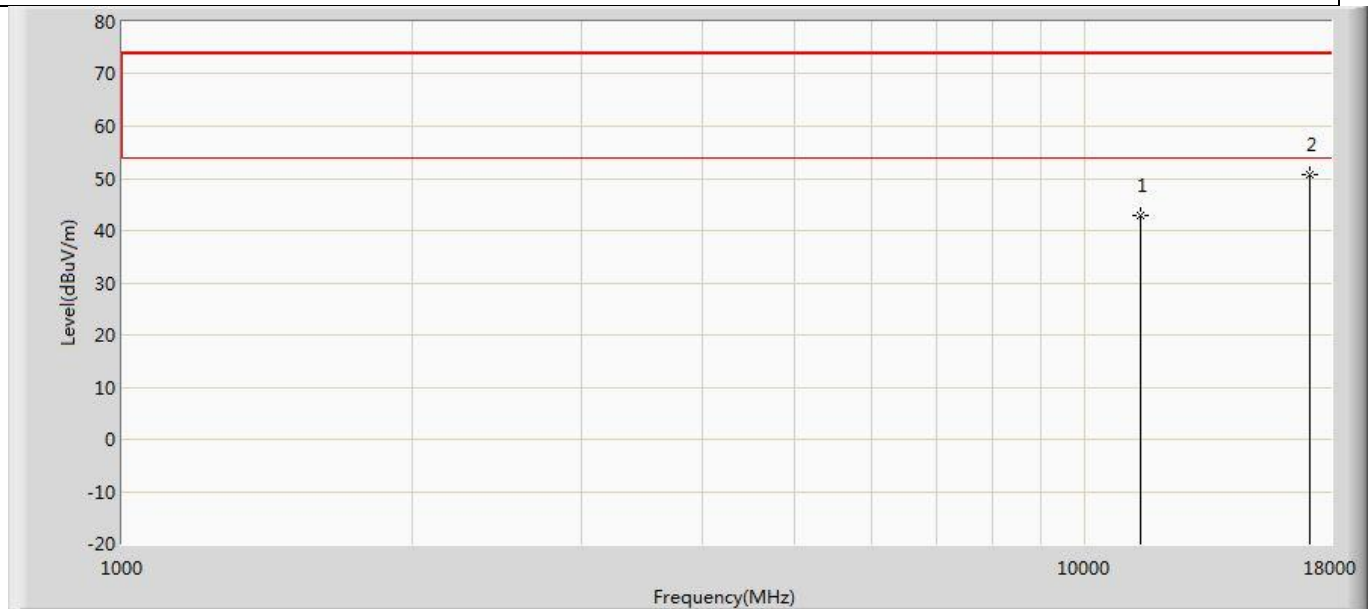


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.817	38.089	-31.183	74.000	4.729	PK
2	*	17100.000	50.596	39.068	-23.404	74.000	11.528	PK

Profile: 2150775R	Page No.: 399
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5745MHz by 802.11ac(20MHz) Ant 1	

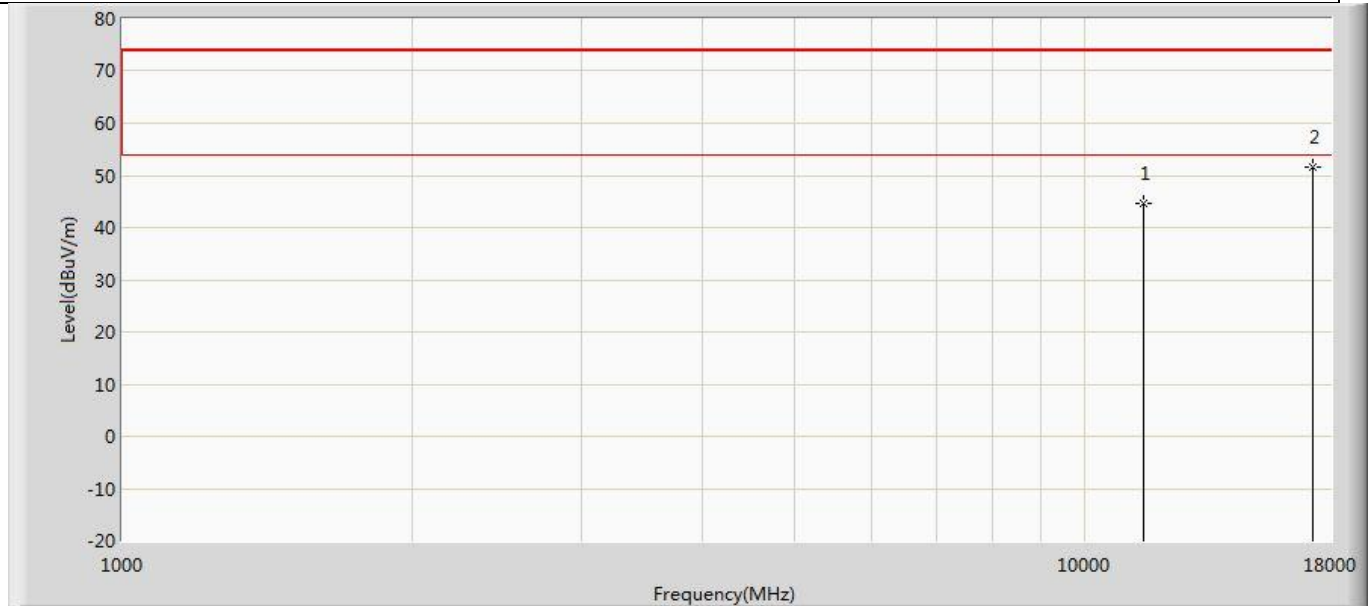


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	44.493	39.864	-29.507	74.000	4.629	PK
2	*	17235.000	51.460	38.012	-22.540	74.000	13.448	PK

Profile: 2150775R	Page No.: 400
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5745MHz by 802.11ac(20MHz) Ant 1	

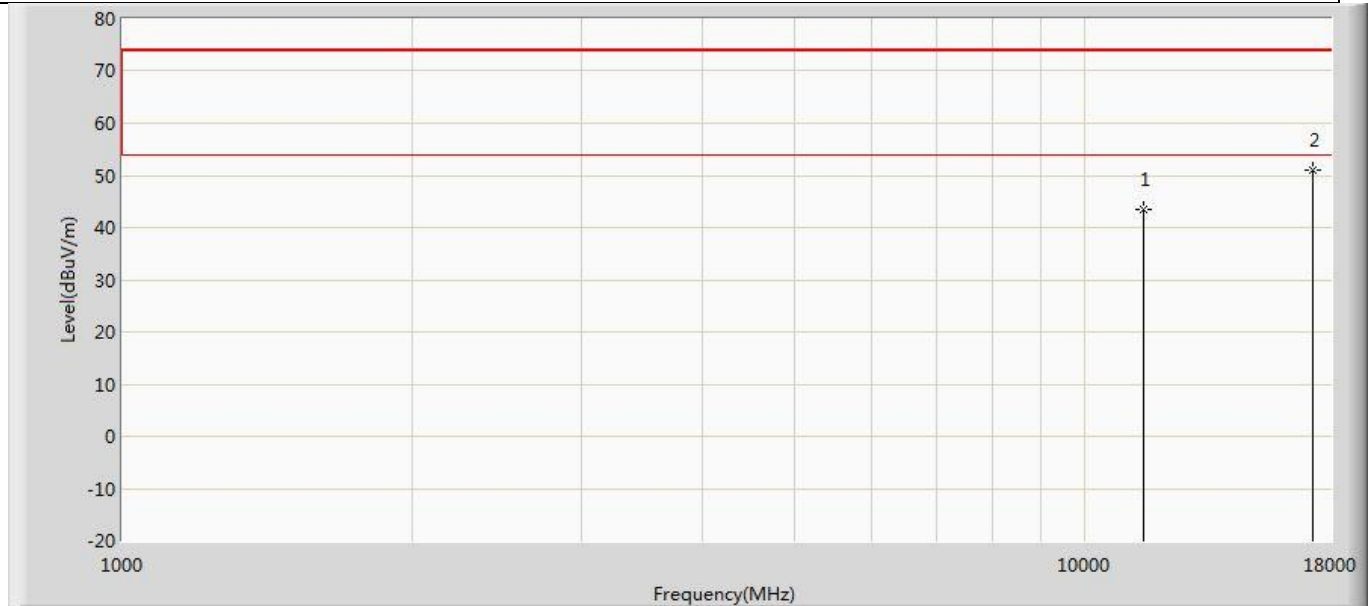


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	43.525	38.896	-30.475	74.000	4.629	PK
2	*	17235.000	50.912	37.464	-23.088	74.000	13.448	PK

Profile: 2150775R	Page No.: 401
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5785MHz by 802.11ac(20MHz) Ant 1	

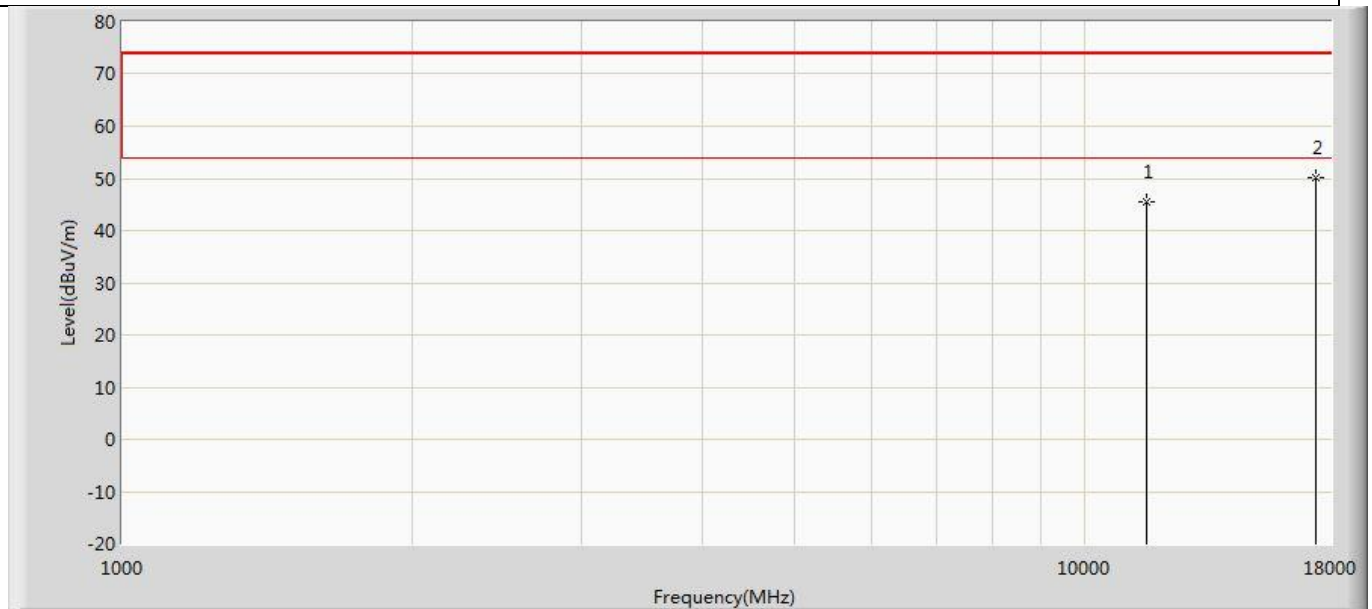


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	45.547	39.634	-28.453	74.000	5.913	PK
2	*	17355.000	50.068	38.848	-23.932	74.000	11.221	PK

Profile: 2150775R	Page No.: 402
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5785MHz by 802.11ac(20MHz) Ant 1	

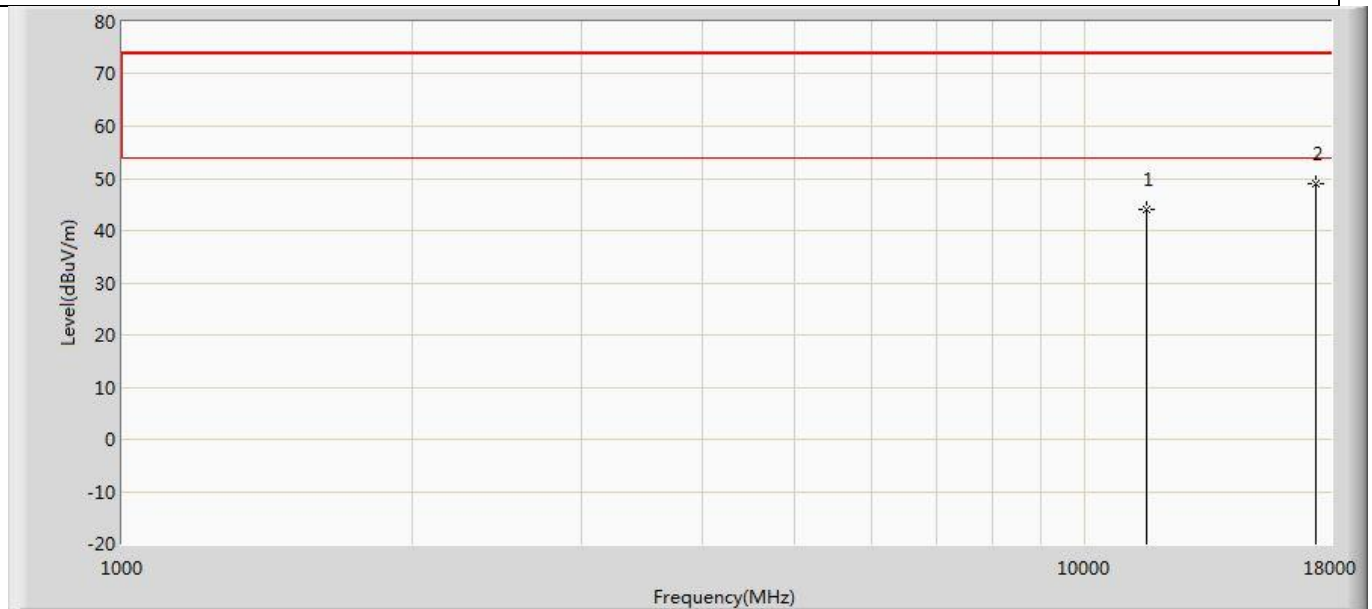


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	44.145	38.232	-29.855	74.000	5.913	PK
2	*	17355.000	49.005	37.785	-24.995	74.000	11.221	PK

Profile: 2150775R	Page No.: 403
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5825MHz by 802.11ac(20MHz) Ant 1	

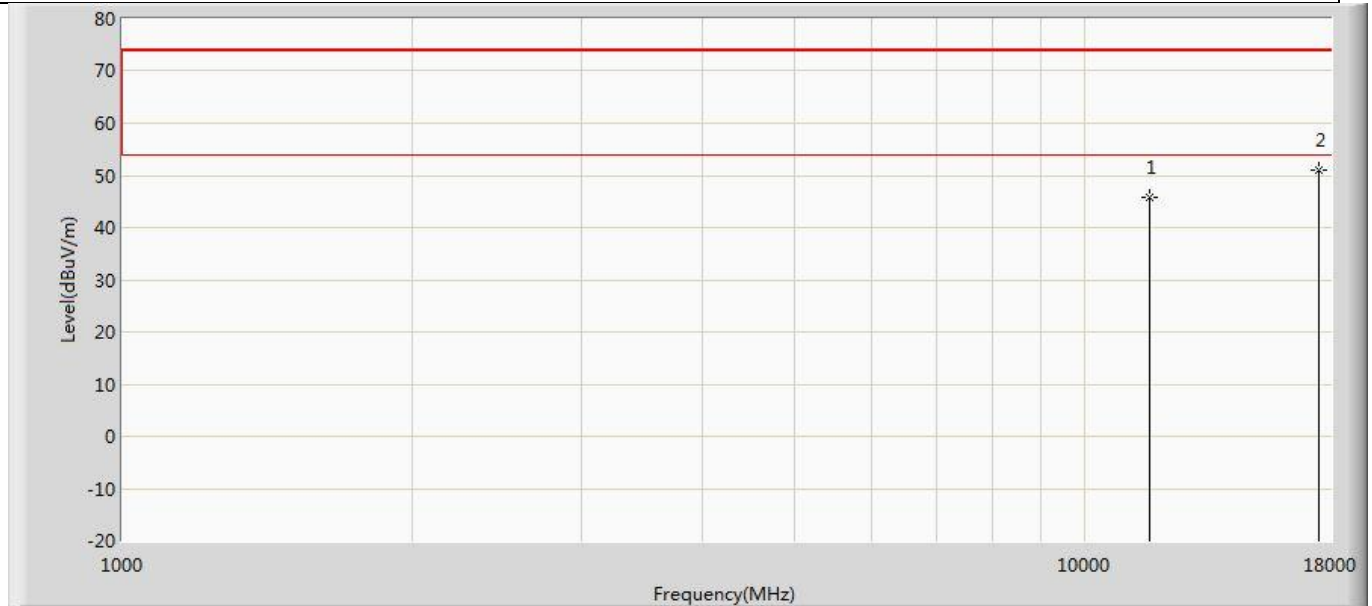


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	45.657	39.157	-28.343	74.000	6.501	PK
2	*	17475.000	50.912	39.607	-23.088	74.000	11.306	PK

Profile: 2150775R	Page No.: 404
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5825MHz by 802.11ac(20MHz) Ant 1	

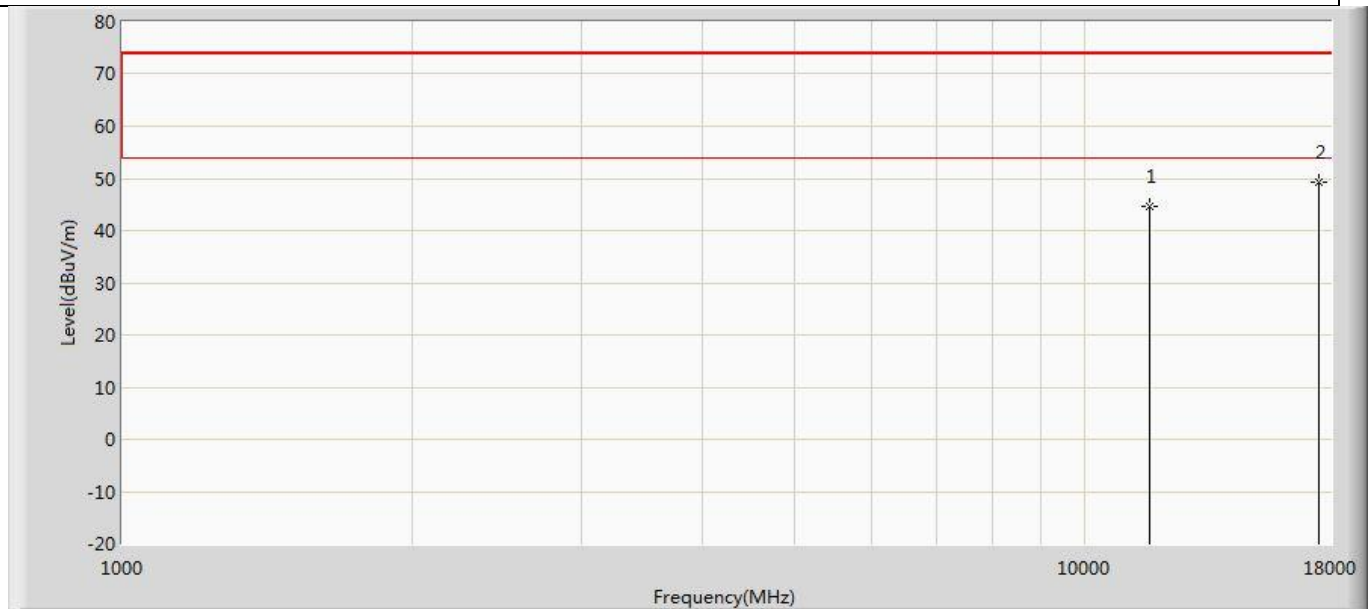


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	44.504	38.004	-29.496	74.000	6.501	PK
2	*	17475.000	49.369	38.064	-24.631	74.000	11.306	PK

Profile: 2150775R	Page No.: 405
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) Ant 1	

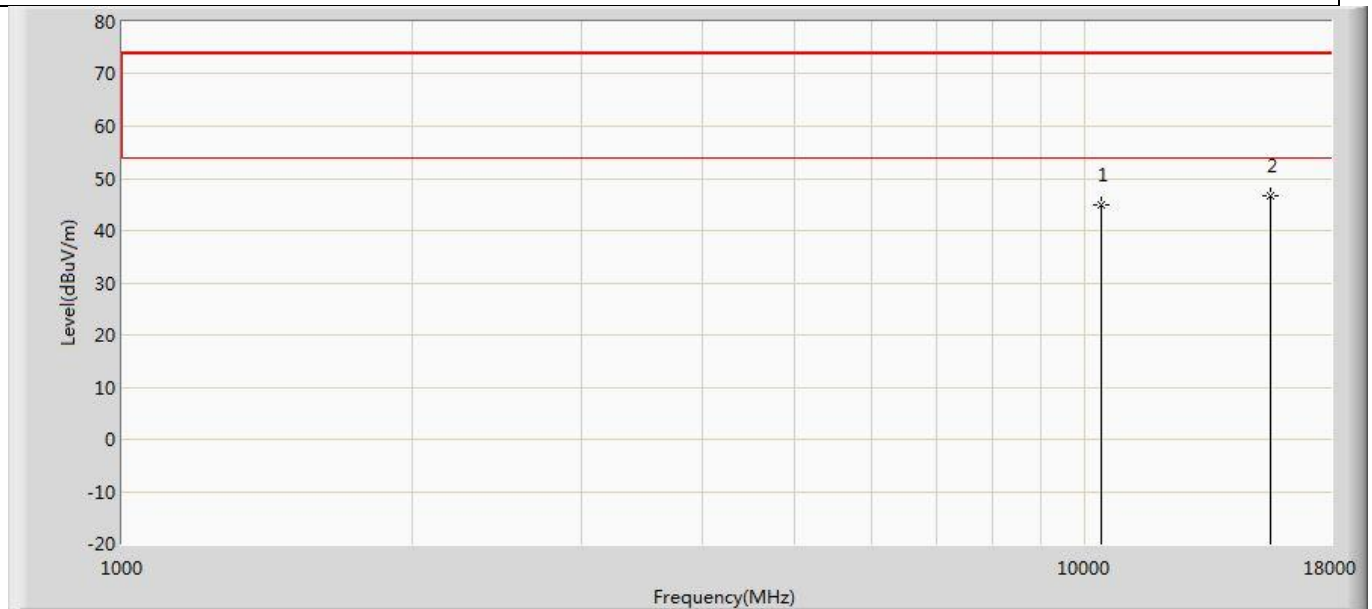


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	45.072	40.631	-28.928	74.000	4.442	PK
2	*	15570.000	46.571	38.052	-27.429	74.000	8.520	PK

Profile: 2150775R	Page No.: 406
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) Ant 1	

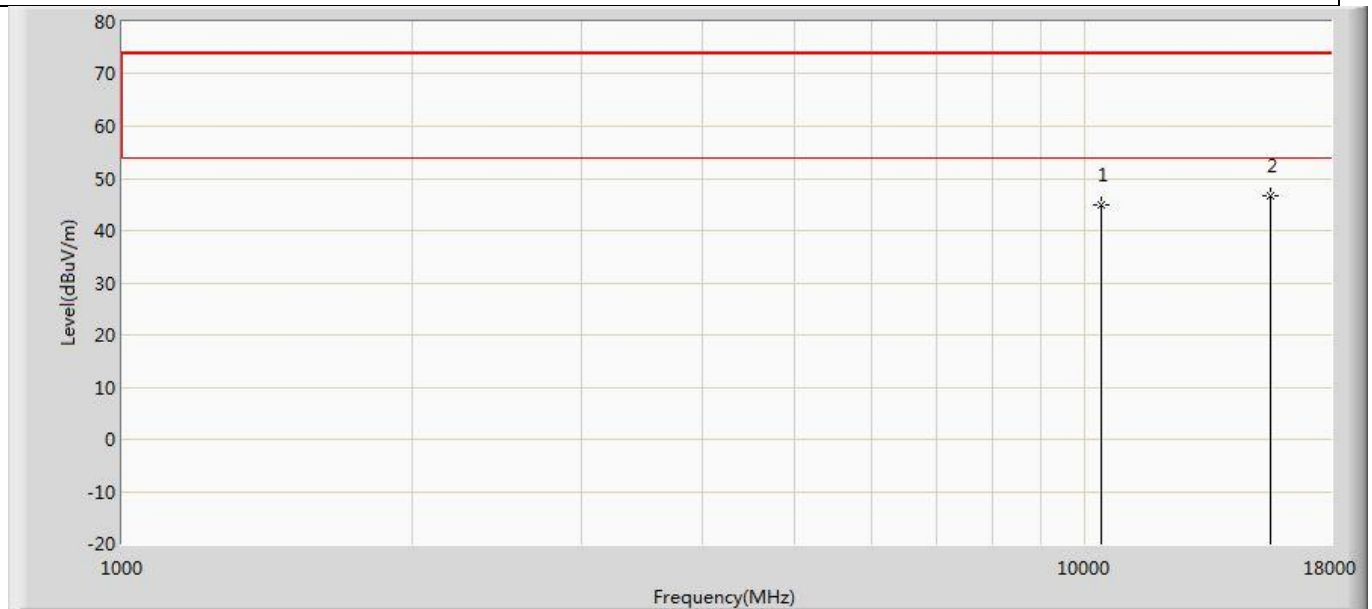


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	44.988	40.547	-29.012	74.000	4.442	PK
2	*	15570.000	46.697	38.178	-27.303	74.000	8.520	PK

Profile: 2150775R	Page No.: 407
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5230MHz by 802.11ac(40MHz) Ant 1	

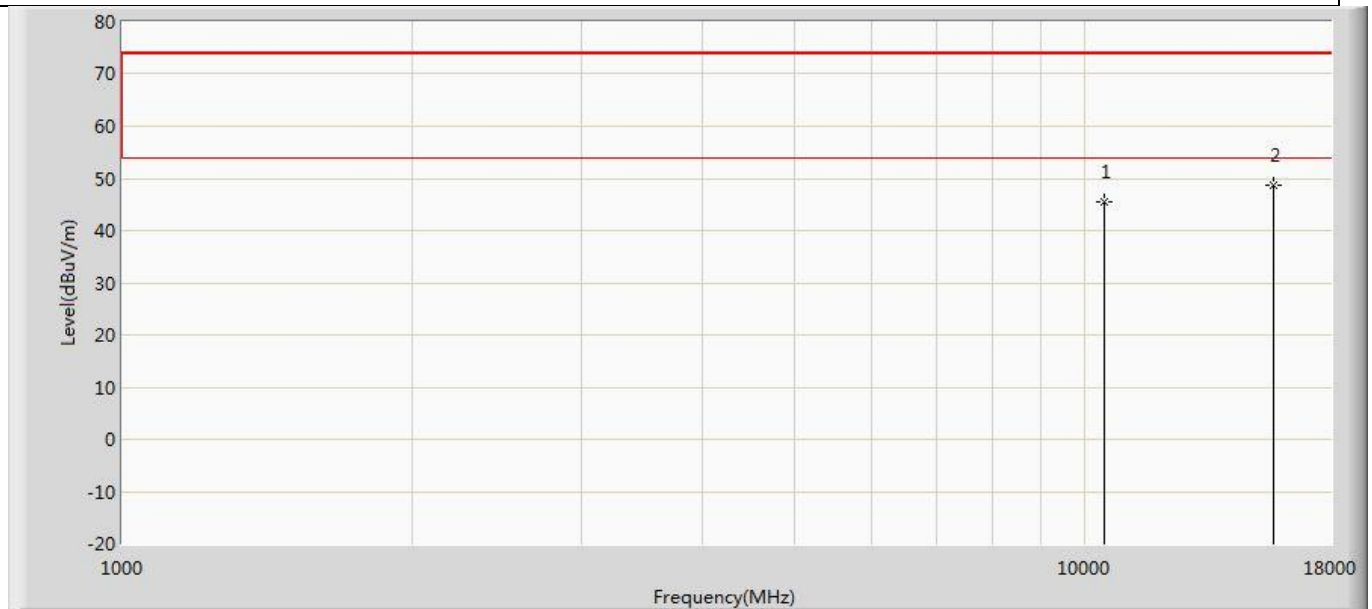


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	45.452	40.712	-28.548	74.000	4.740	PK
2	*	15690.000	48.624	39.200	-25.376	74.000	9.425	PK

Profile: 2150775R	Page No.: 408
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5230MHz by 802.11ac(40MHz) Ant 1	

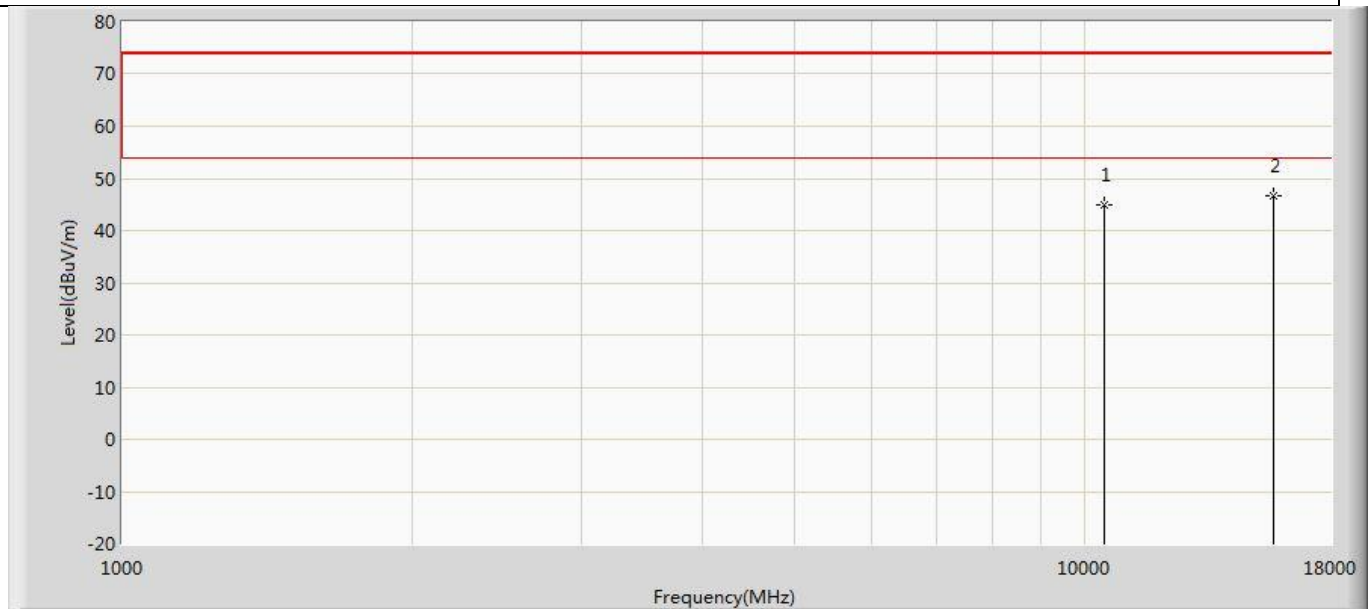


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	44.948	40.208	-29.052	74.000	4.740	PK
2	*	15690.000	46.688	37.264	-27.312	74.000	9.425	PK

Profile: 2150775R	Page No.: 409
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5270MHz by 802.11ac(40MHz) Ant 1	

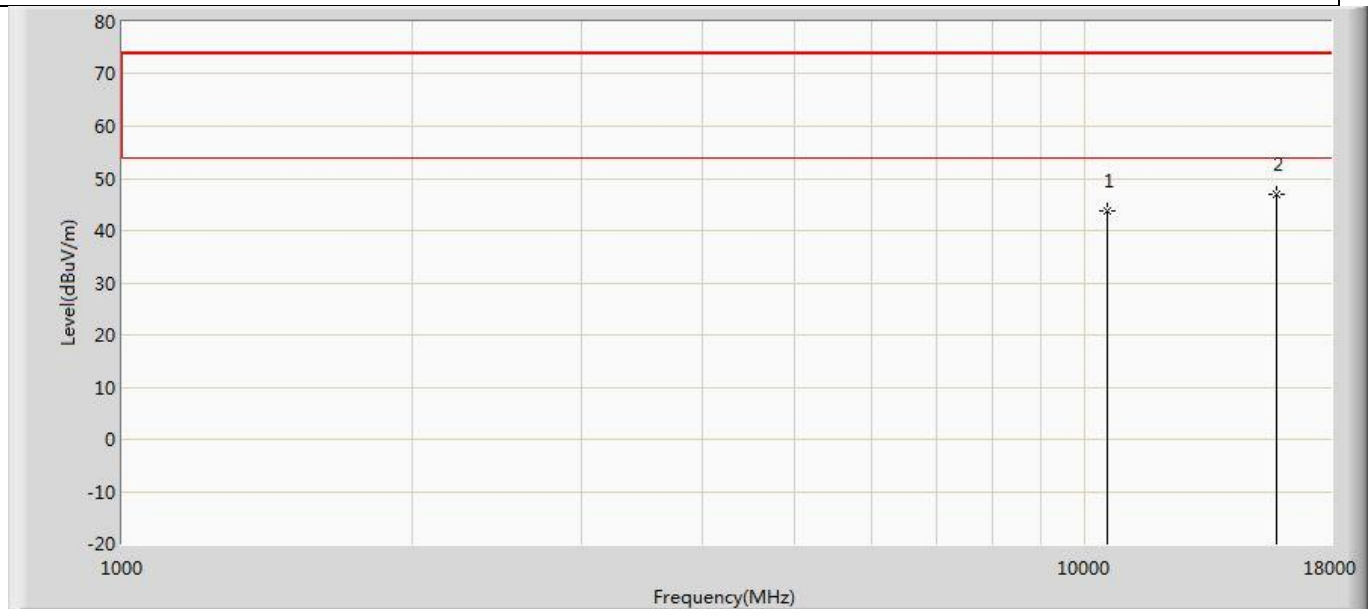


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	43.854	38.933	-30.146	74.000	4.921	PK
2	*	15810.000	47.059	38.386	-26.941	74.000	8.673	PK

Profile: 2150775R	Page No.: 410
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5270MHz by 802.11ac(40MHz) Ant 1	

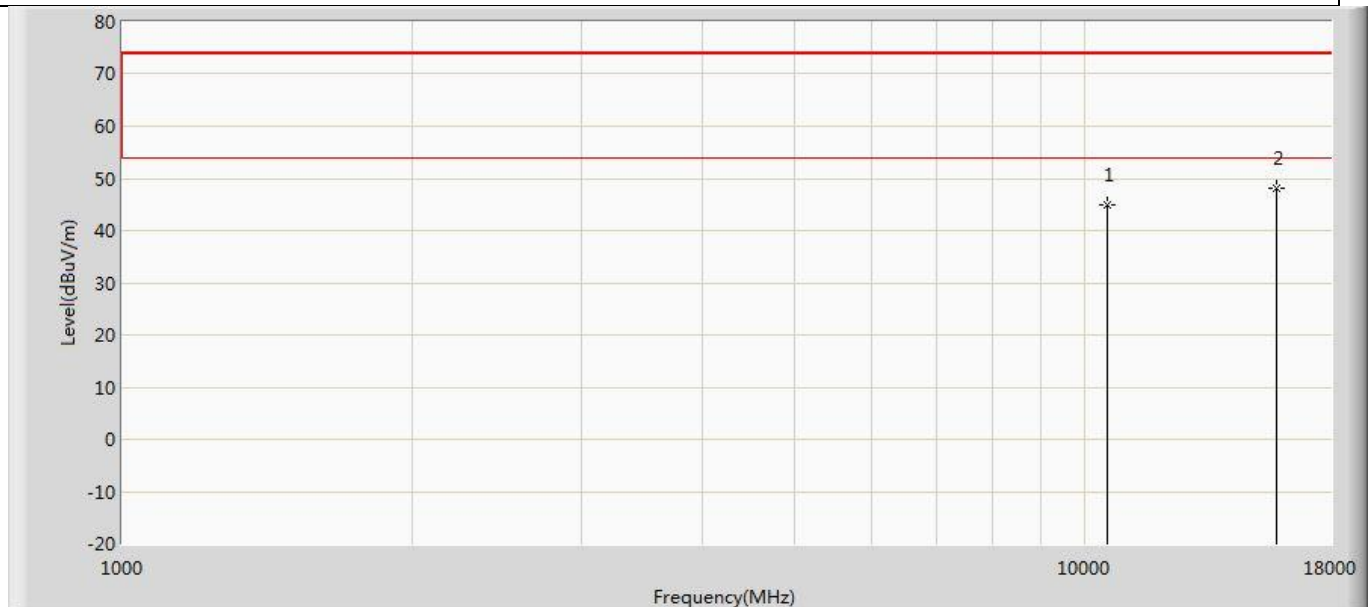


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	44.944	40.023	-29.056	74.000	4.921	PK
2	*	15810.000	48.155	39.482	-25.845	74.000	8.673	PK

Profile: 2150775R	Page No.: 411
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) Ant 1	

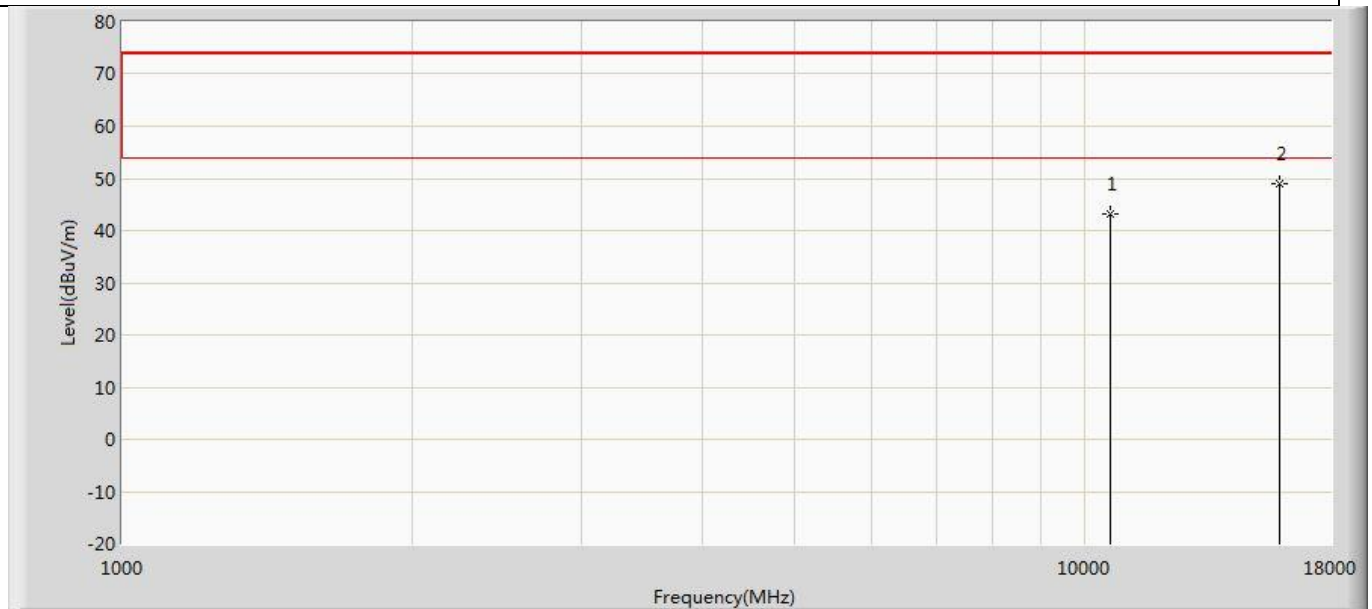


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	43.148	39.042	-30.852	74.000	4.105	PK
2	*	15930.000	49.056	39.407	-24.944	74.000	9.648	PK

Profile: 2150775R	Page No.: 412
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) Ant 1	

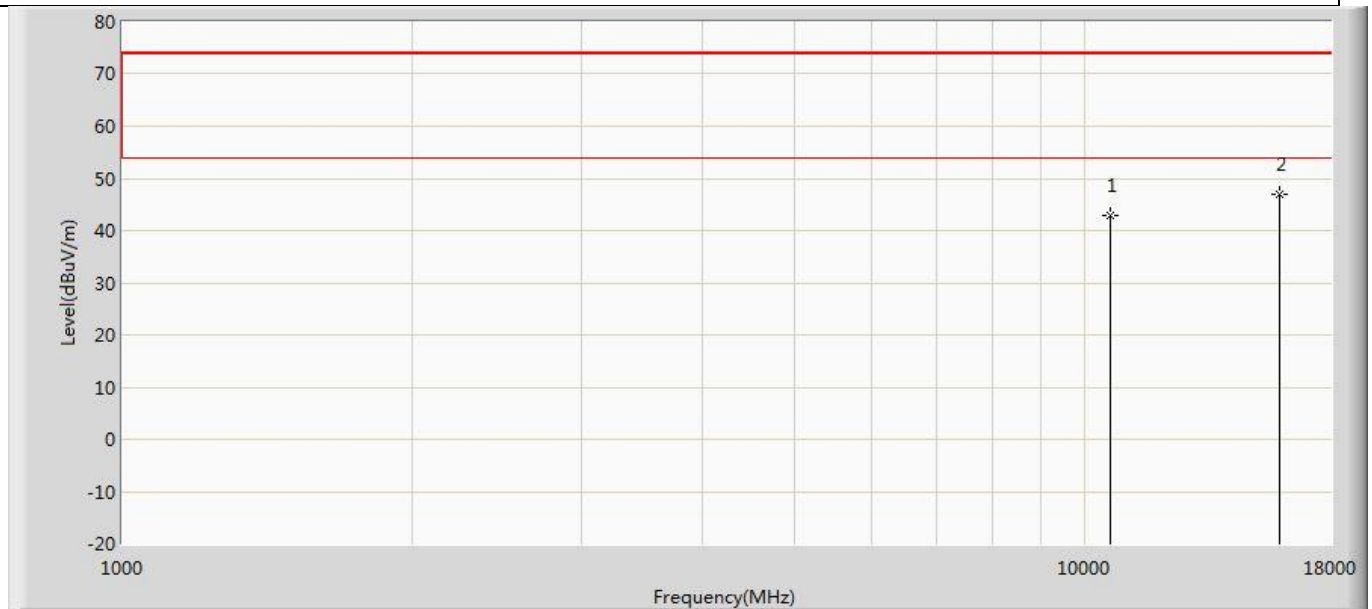


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	42.964	38.858	-31.036	74.000	4.105	PK
2	*	15930.000	47.022	37.373	-26.978	74.000	9.648	PK

Profile: 2150775R	Page No.: 413
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) Ant 1	

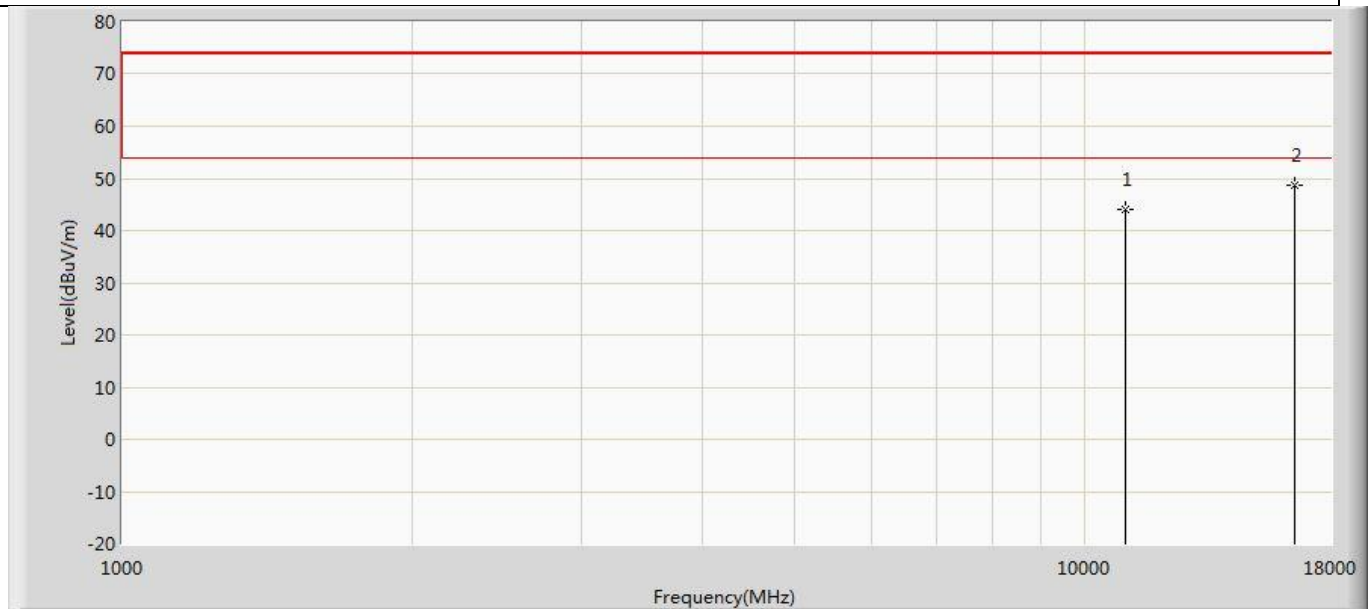


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	44.104	39.399	-29.896	74.000	4.706	PK
2	*	16530.000	48.761	39.156	-25.239	74.000	9.605	PK

Profile: 2150775R	Page No.: 414
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) Ant 1	

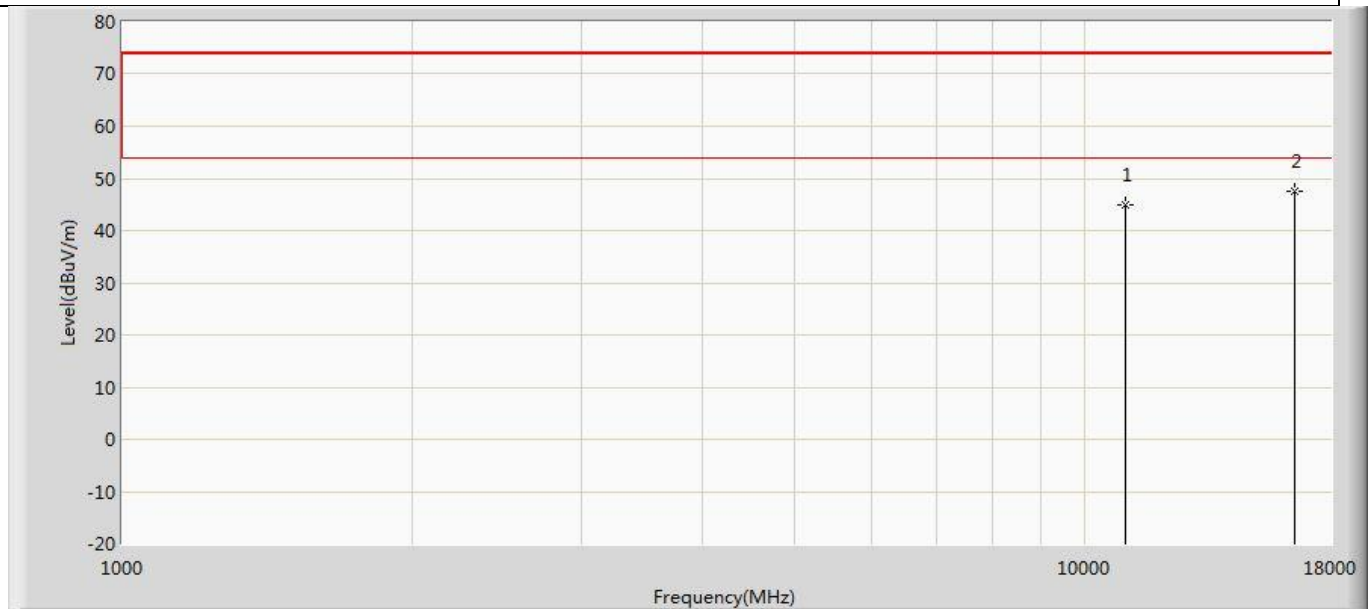


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	44.819	40.114	-29.181	74.000	4.706	PK
2	*	16530.000	47.675	38.070	-26.325	74.000	9.605	PK

Profile: 2150775R	Page No.: 415
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5590MHz by 802.11ac(40MHz) Ant 1	

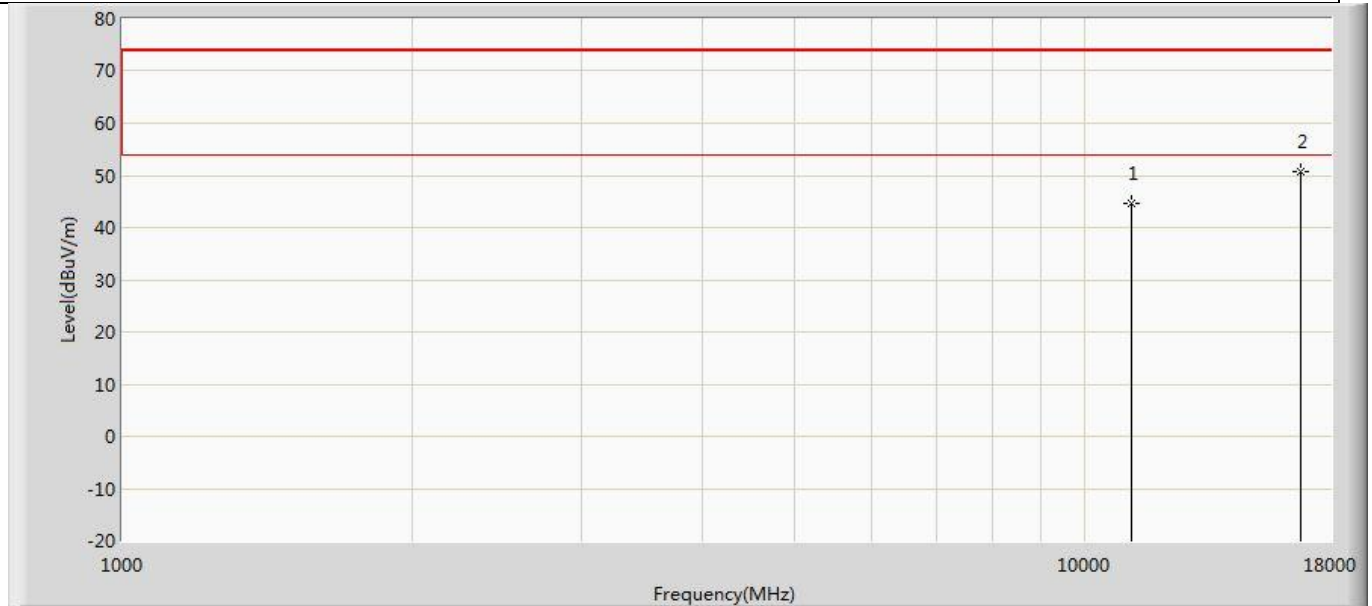


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	44.743	39.911	-29.257	74.000	4.832	PK
2	*	16770.000	50.646	39.696	-23.354	74.000	10.950	PK

Profile: 2150775R	Page No.: 416
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5590MHz by 802.11ac(40MHz) Ant 1	

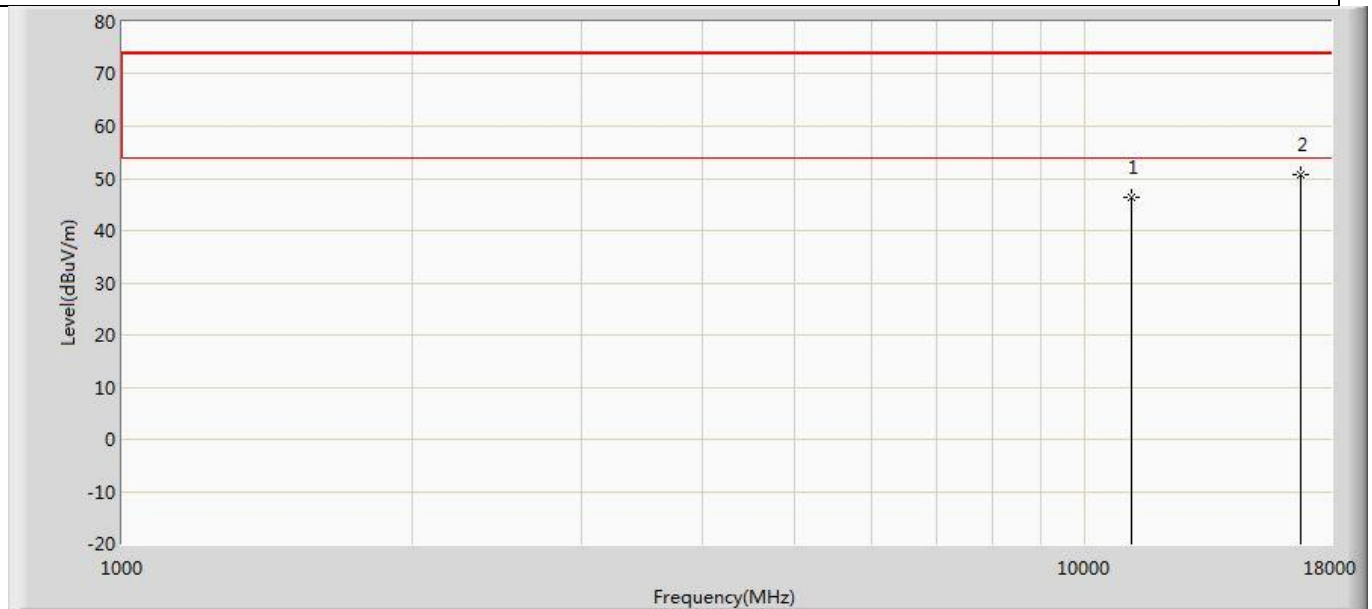


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.365	41.533	-27.635	74.000	4.832	PK
2	*	16770.000	50.726	39.776	-23.274	74.000	10.950	PK

Profile: 2150775R	Page No.: 417
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5670MHz by 802.11ac(40MHz) Ant 1	

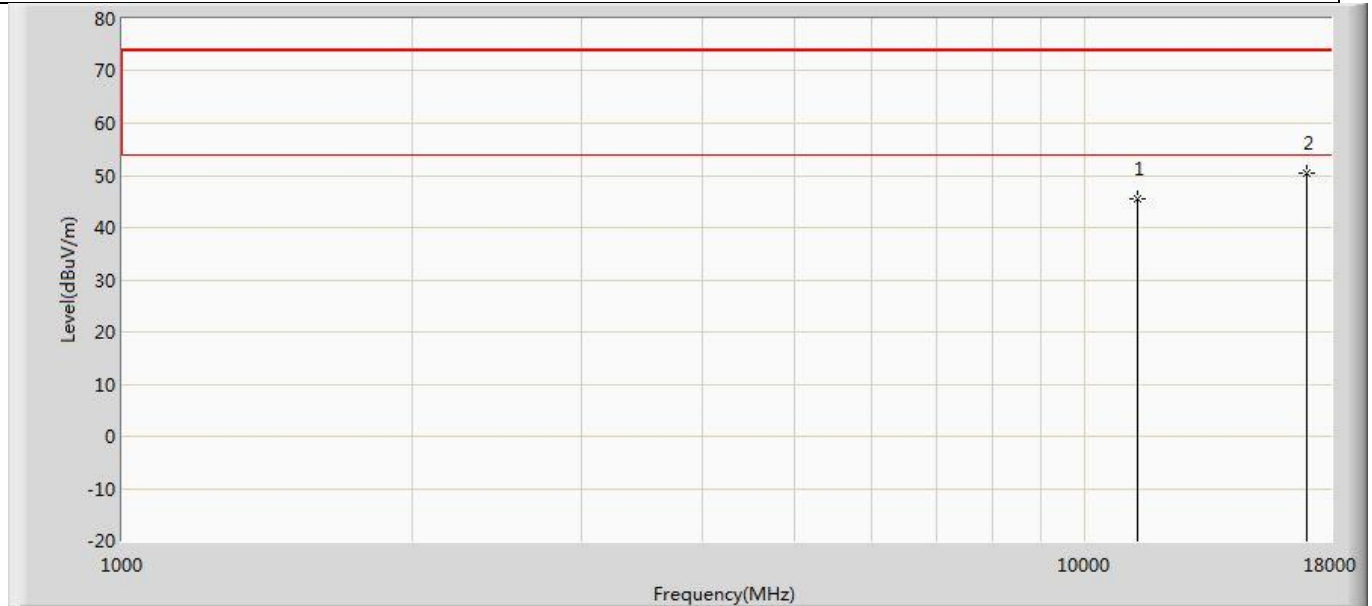


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.383	39.573	-28.617	74.000	5.810	PK
2	*	17010.000	50.295	39.357	-23.705	74.000	10.938	PK

Profile: 2150775R	Page No.: 418
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5670MHz by 802.11ac(40MHz) Ant 1	

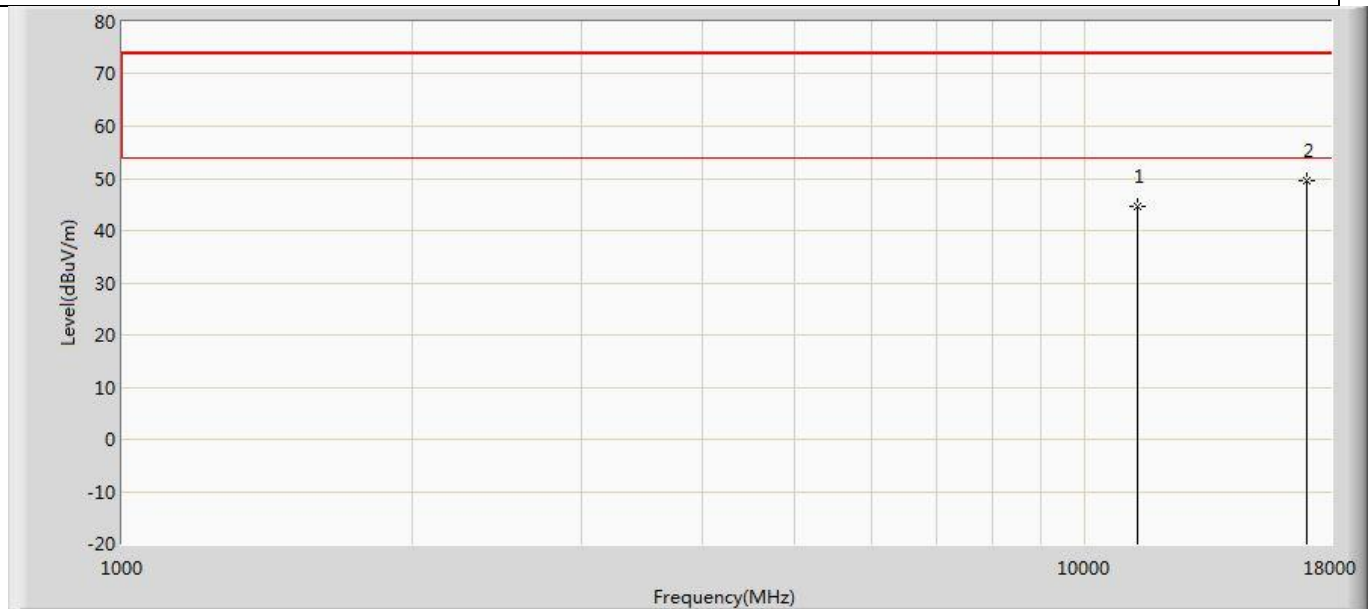


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	44.513	38.703	-29.487	74.000	5.810	PK
2	*	17010.000	49.661	38.723	-24.339	74.000	10.938	PK

Profile: 2150775R	Page No.: 419
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5755MHz by 802.11ac(40MHz) Ant 1	

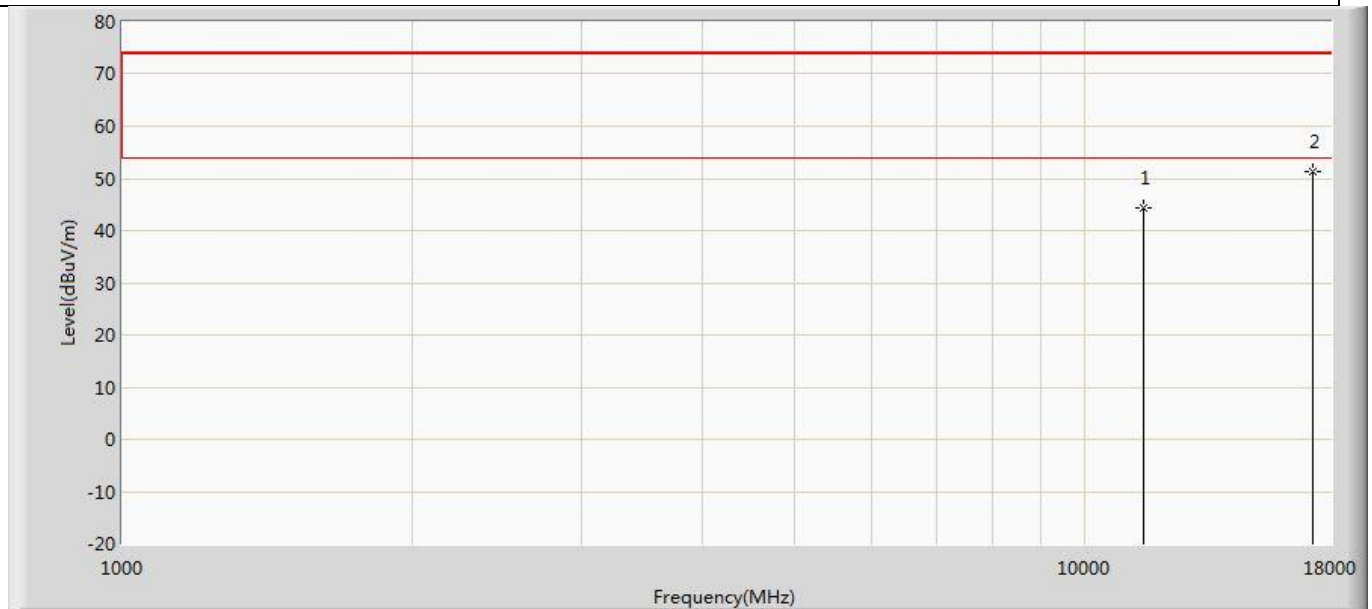


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	44.292	39.579	-29.708	74.000	4.713	PK
2	*	17265.000	51.428	38.952	-22.572	74.000	12.476	PK

Profile: 2150775R	Page No.: 420
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5755MHz by 802.11ac(40MHz) Ant 1	

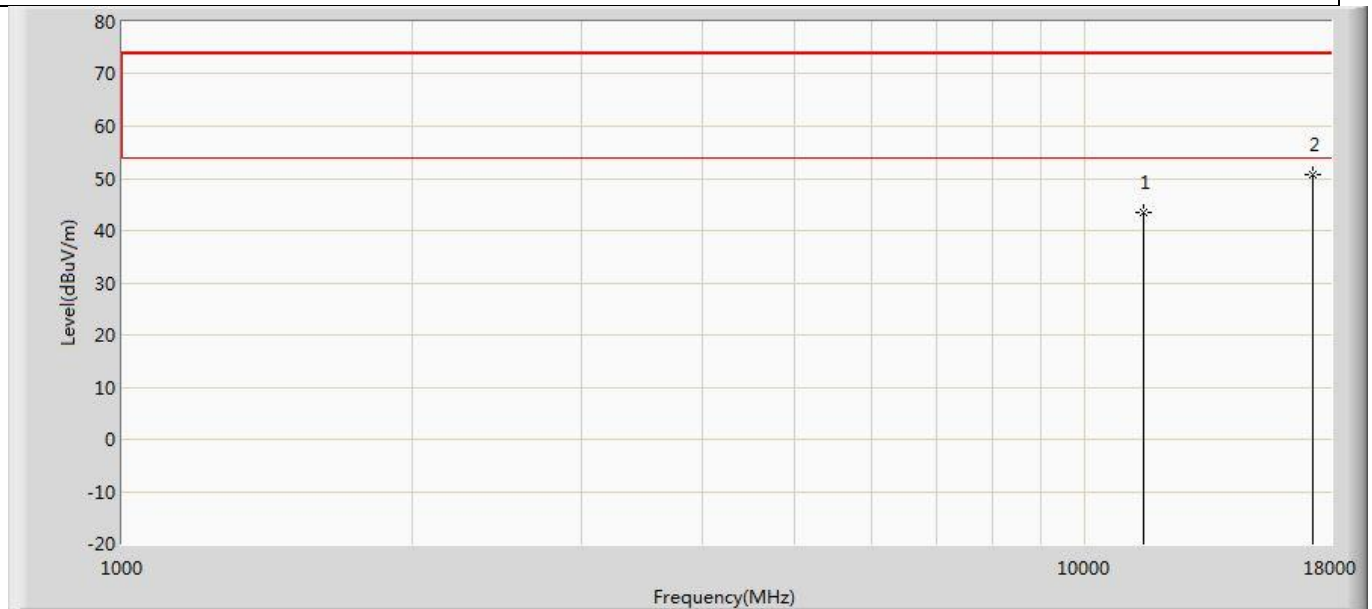


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	43.366	38.653	-30.634	74.000	4.713	PK
2	*	17265.000	50.615	38.139	-23.385	74.000	12.476	PK

Profile: 2150775R	Page No.: 421
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5795MHz by 802.11ac(40MHz) Ant 1	

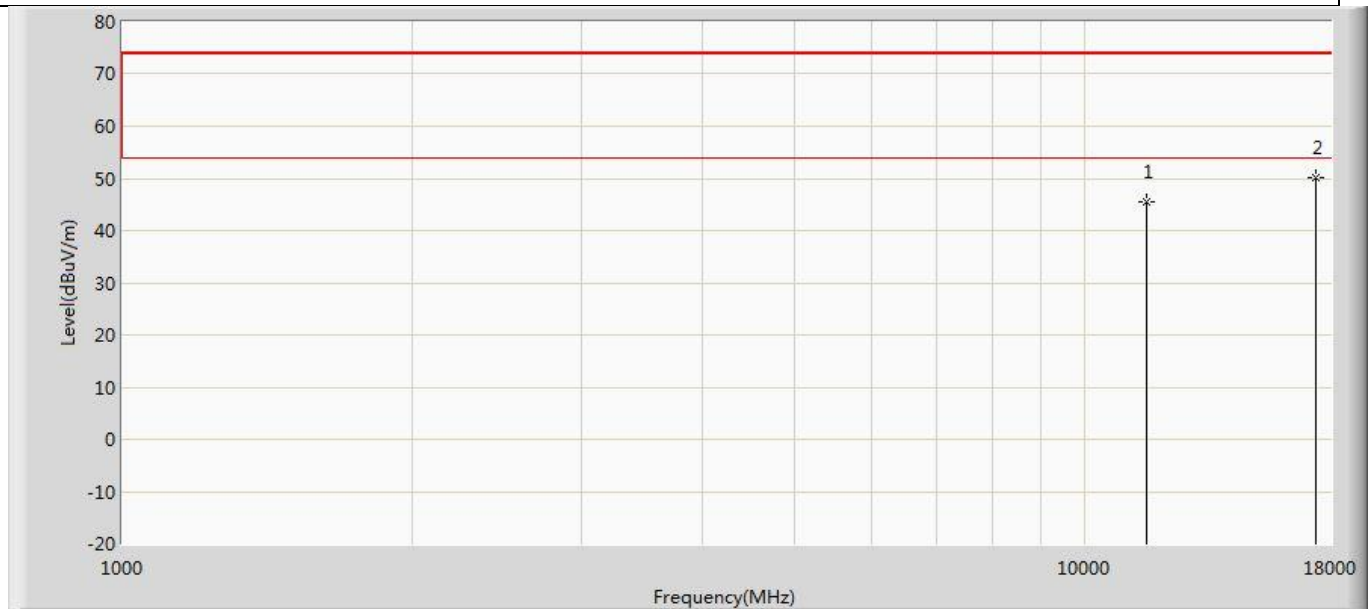


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	45.363	39.217	-28.637	74.000	6.146	PK
2	*	17385.000	50.098	38.726	-23.902	74.000	11.373	PK

Profile: 2150775R	Page No.: 422
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 5: Transmit at 5795MHz by 802.11ac(40MHz) Ant 1	

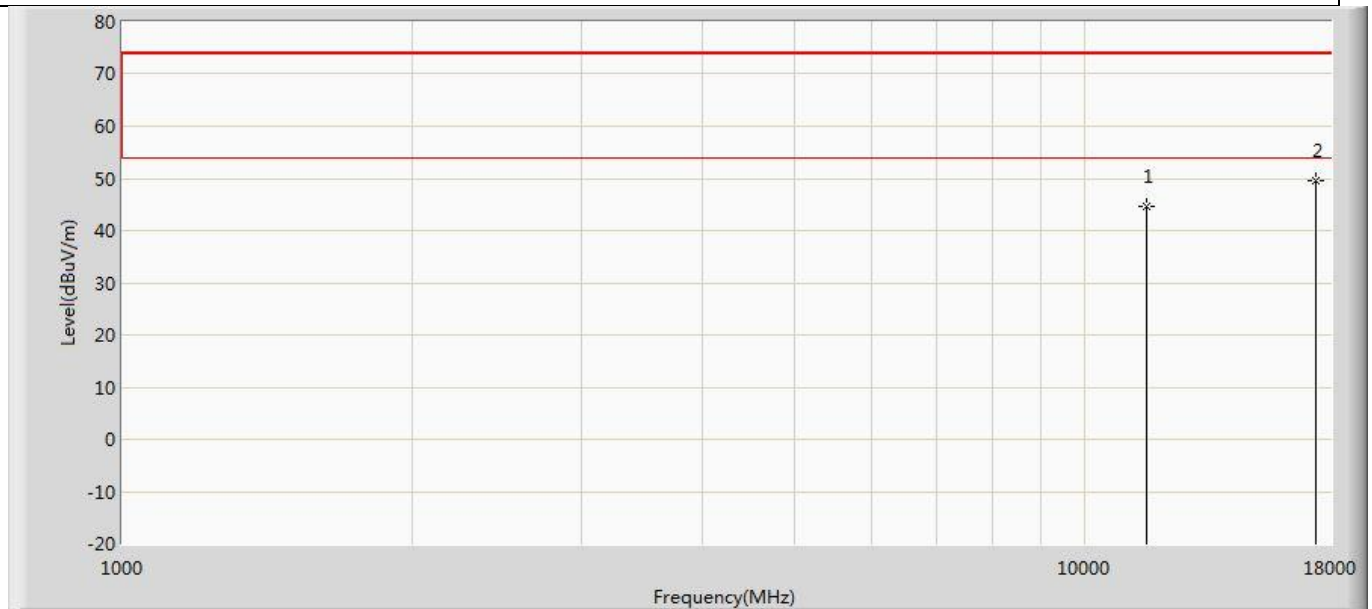


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	44.771	38.625	-29.229	74.000	6.146	PK
2	*	17385.000	49.472	38.100	-24.528	74.000	11.373	PK

Profile: 2150775R	Page No.: 423
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) Ant 1	

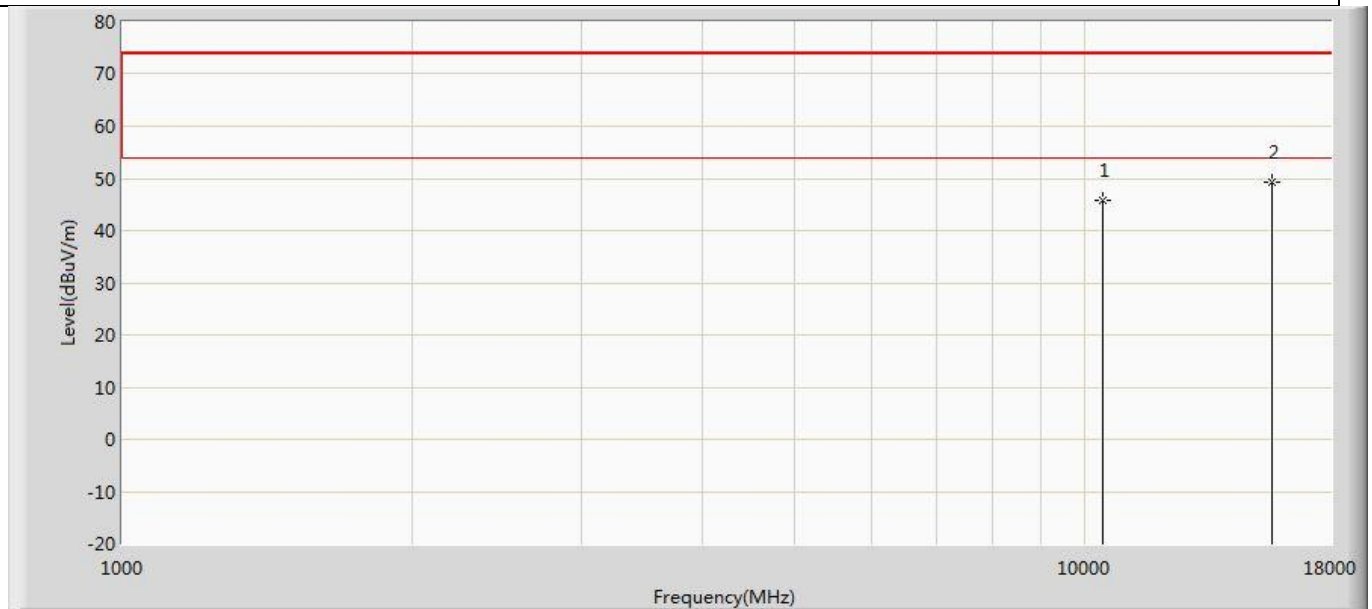


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	45.870	41.505	-28.130	74.000	4.365	PK
2	*	15630.000	49.178	40.625	-24.822	74.000	8.553	PK

Profile: 2150775R	Page No.: 424
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) Ant 1	

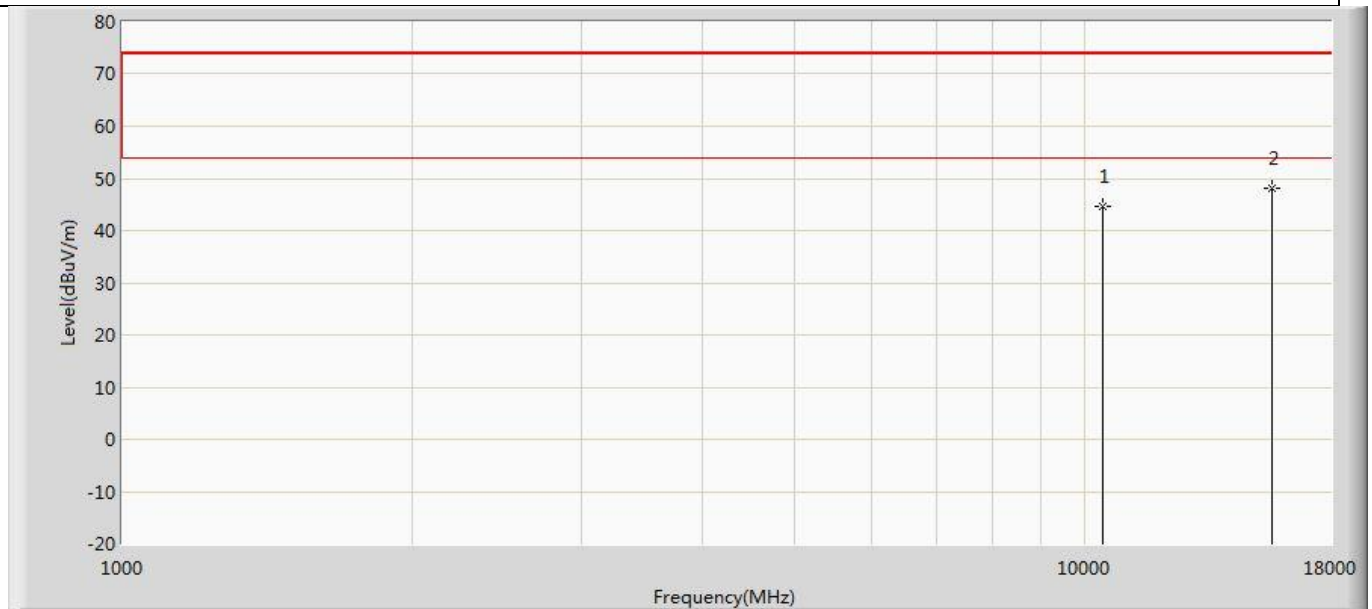


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	44.671	40.306	-29.329	74.000	4.365	PK
2	*	15630.000	48.066	39.513	-25.934	74.000	8.553	PK

Profile: 2150775R	Page No.: 425
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) Ant 1	

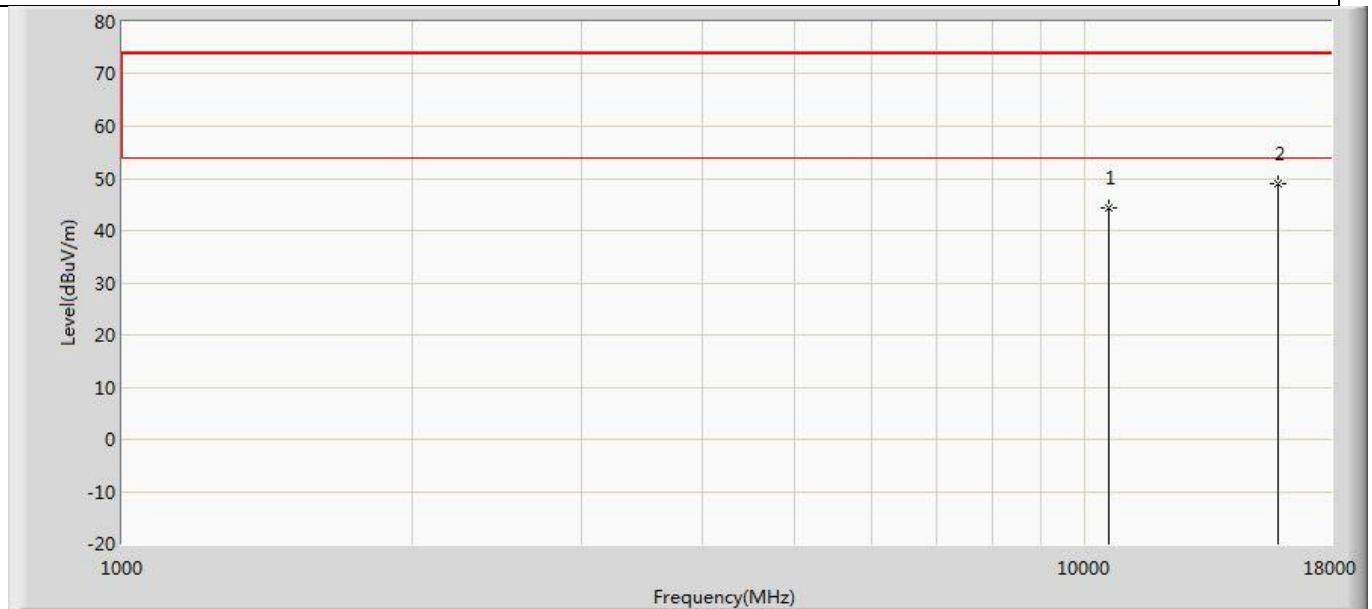


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	44.353	40.278	-29.647	74.000	4.075	PK
2	*	15870.000	48.917	40.413	-25.083	74.000	8.503	PK

Profile: 2150775R	Page No.: 426
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) Ant 1	

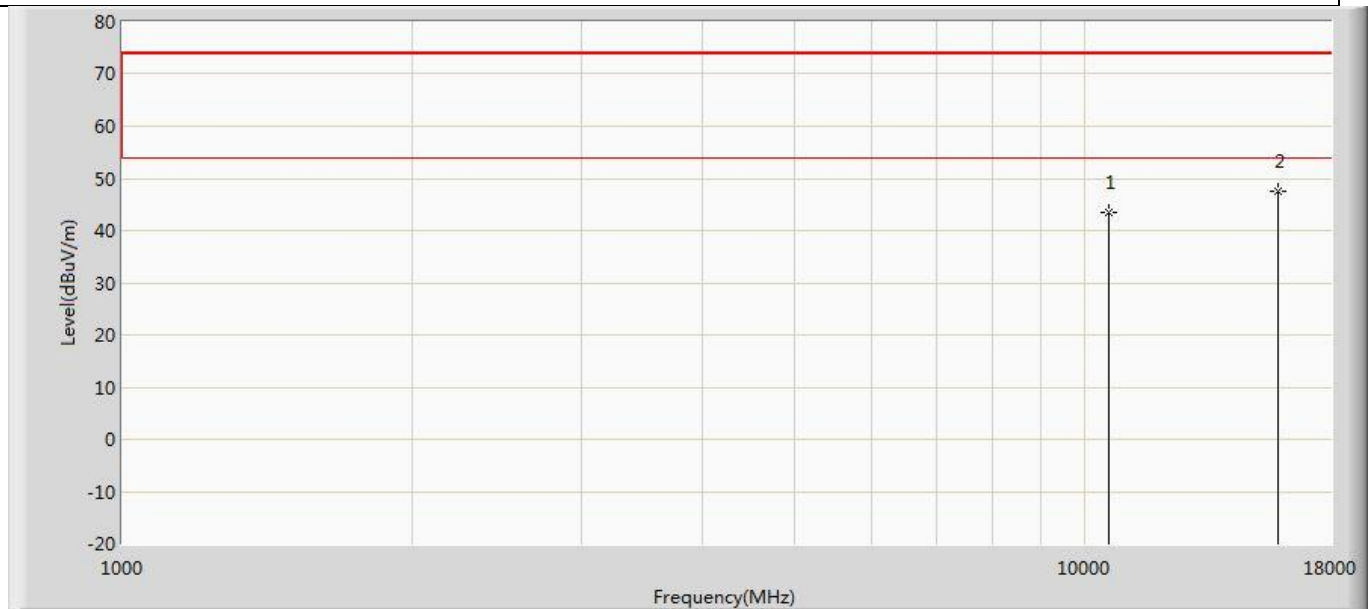


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	43.353	39.278	-30.647	74.000	4.075	PK
2	*	15870.000	47.679	39.175	-26.321	74.000	8.503	PK

Profile: 2150775R	Page No.: 427
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) Ant 1	

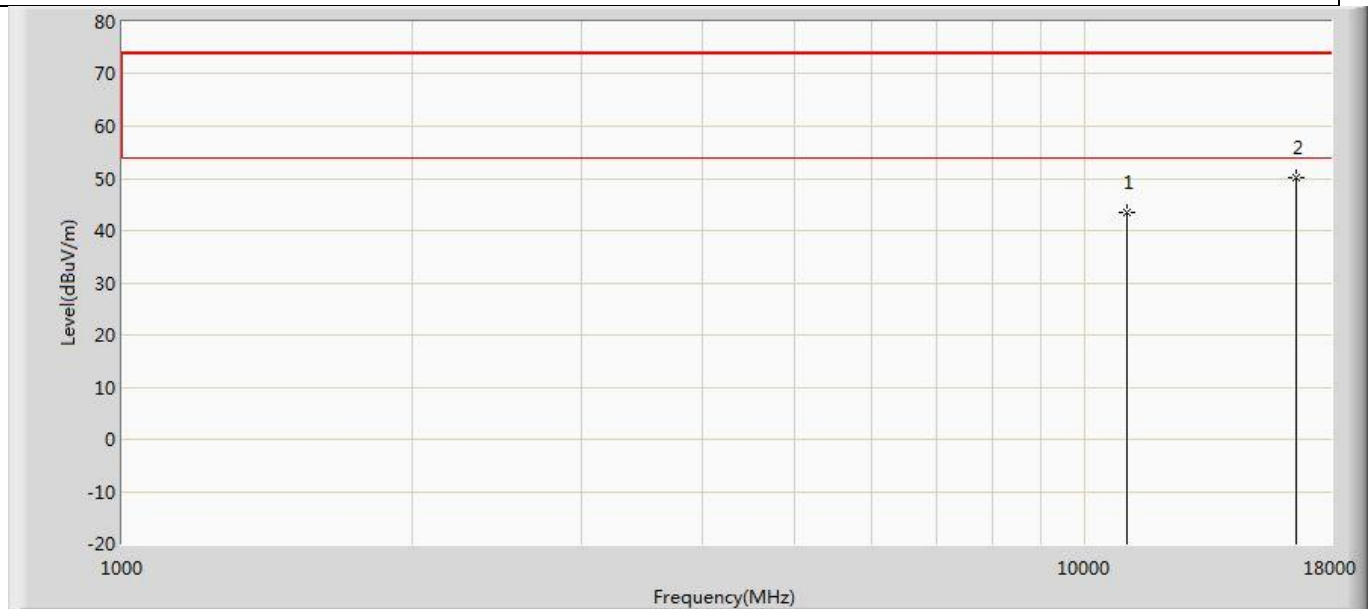


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	43.535	39.655	-30.465	74.000	3.879	PK
2	*	16590.000	50.198	38.929	-23.802	74.000	11.269	PK

Profile: 2150775R	Page No.: 428
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) Ant 1	

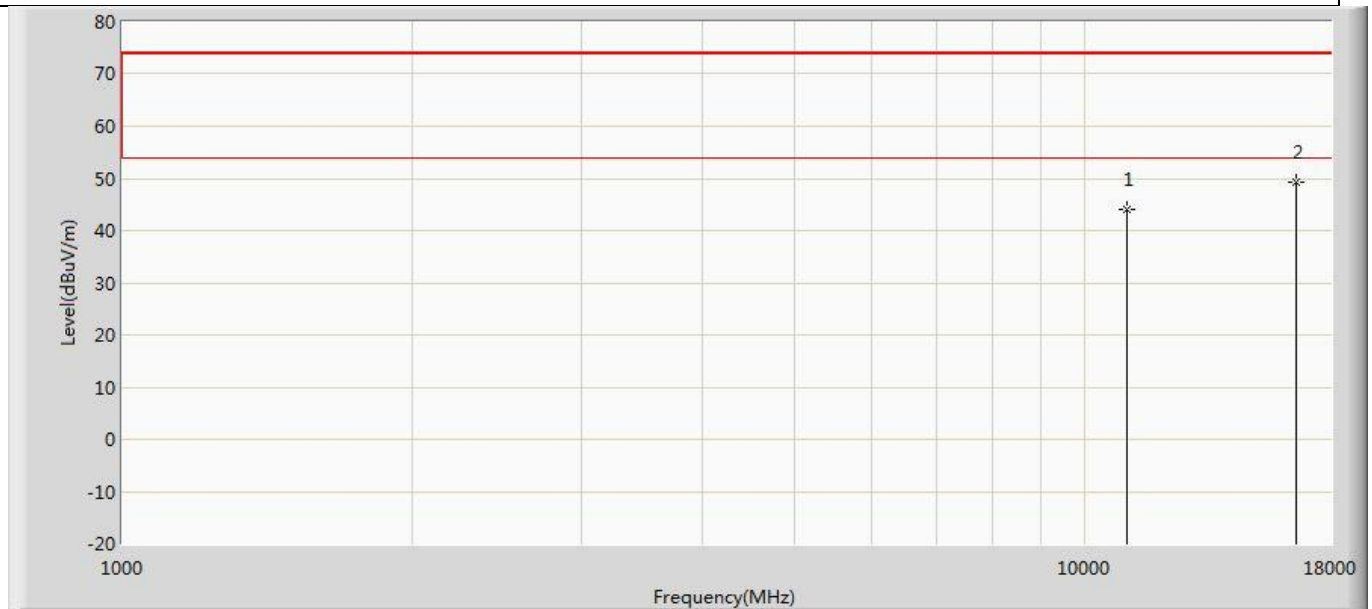


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	44.100	40.220	-29.900	74.000	3.879	PK
2	*	16590.000	49.318	38.049	-24.682	74.000	11.269	PK

Profile: 2150775R	Page No.: 429
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5775MHz by 802.11ac(80MHz) Ant 1	

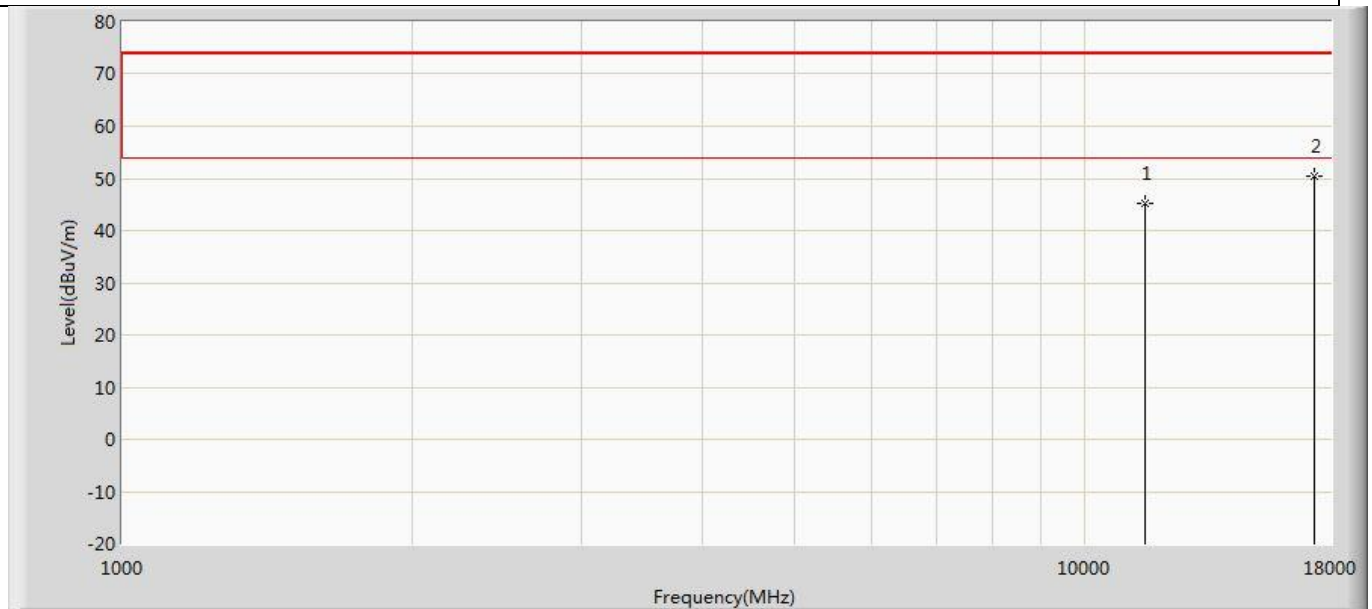


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	45.260	39.611	-28.740	74.000	5.649	PK
2	*	17325.000	50.375	38.432	-23.625	74.000	11.943	PK

Profile: 2150775R	Page No.: 430
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5775MHz by 802.11ac(80MHz) Ant 1	

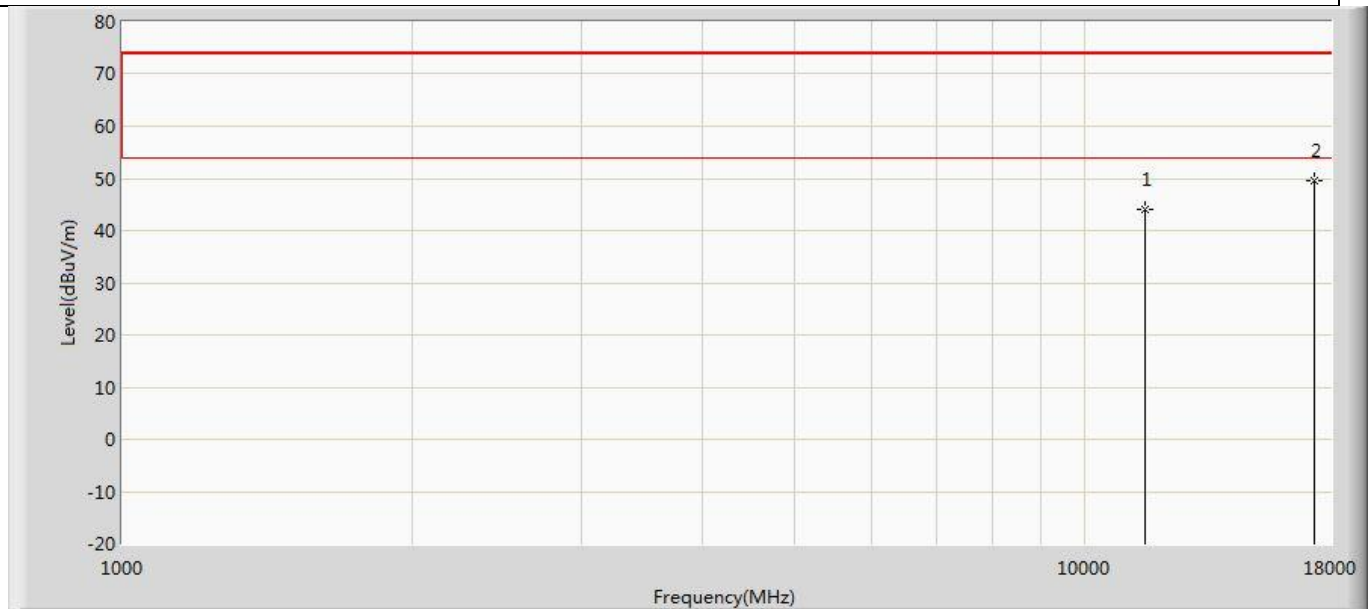


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	44.021	38.372	-29.979	74.000	5.649	PK
2	*	17325.000	49.652	37.709	-24.348	74.000	11.943	PK

Profile: 2150775R	Page No.: 431
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) Ant 1	

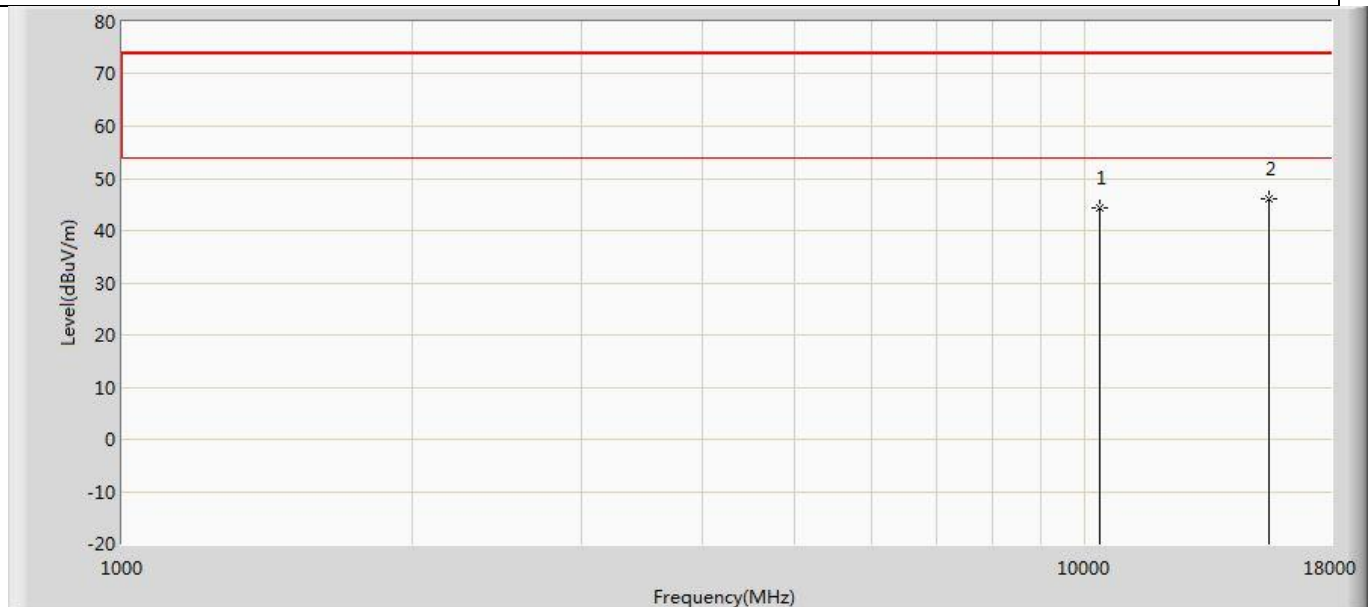


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	44.243	40.522	-29.757	74.000	3.722	PK
2	*	15540.000	46.161	38.808	-27.839	74.000	7.352	PK

Profile: 2150775R	Page No.: 432
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) Ant 1	

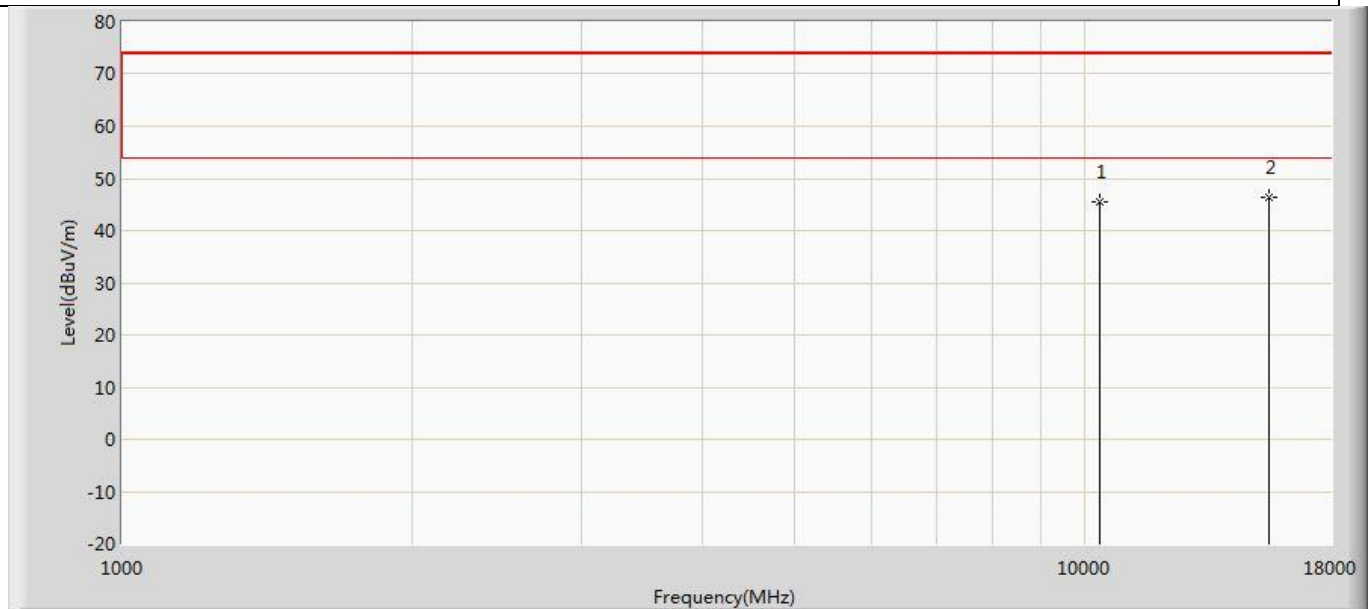


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	45.366	41.645	-28.634	74.000	3.722	PK
2	*	15540.000	46.236	38.883	-27.764	74.000	7.352	PK

Profile: 2150775R	Page No.: 433
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5220MHz by 802.11ax(20MHz) Ant 1	

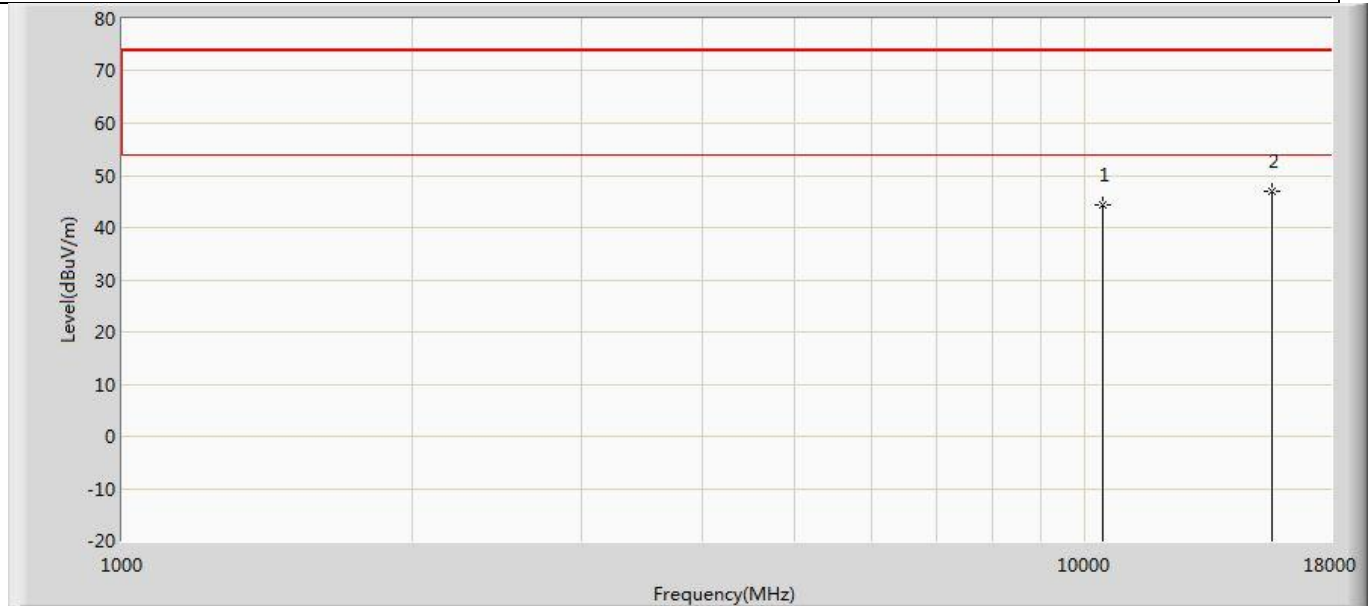


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.486	39.663	-29.514	74.000	4.823	PK
2	*	15660.000	46.983	38.206	-27.017	74.000	8.776	PK

Profile: 2150775R	Page No.: 434
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5220MHz by 802.11ax(20MHz) Ant 1	

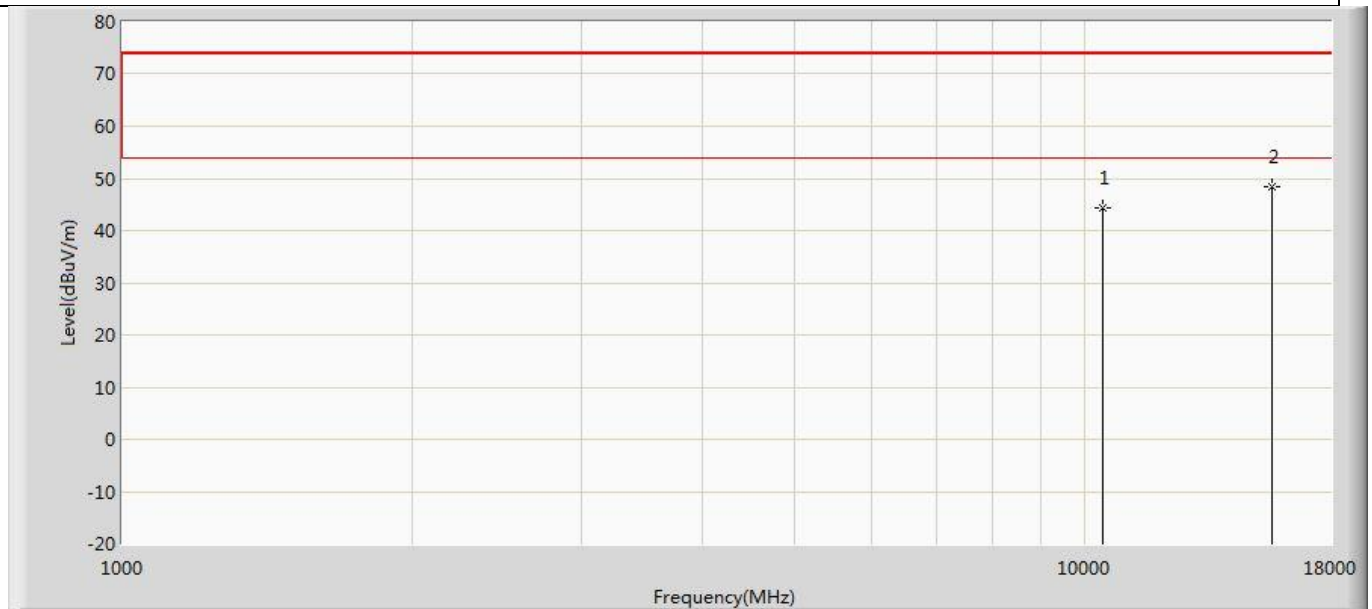


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.354	39.531	-29.646	74.000	4.823	PK
2	*	15660.000	48.309	39.532	-25.691	74.000	8.776	PK

Profile: 2150775R	Page No.: 435
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5240MHz by 802.11ax(20MHz) Ant 1	

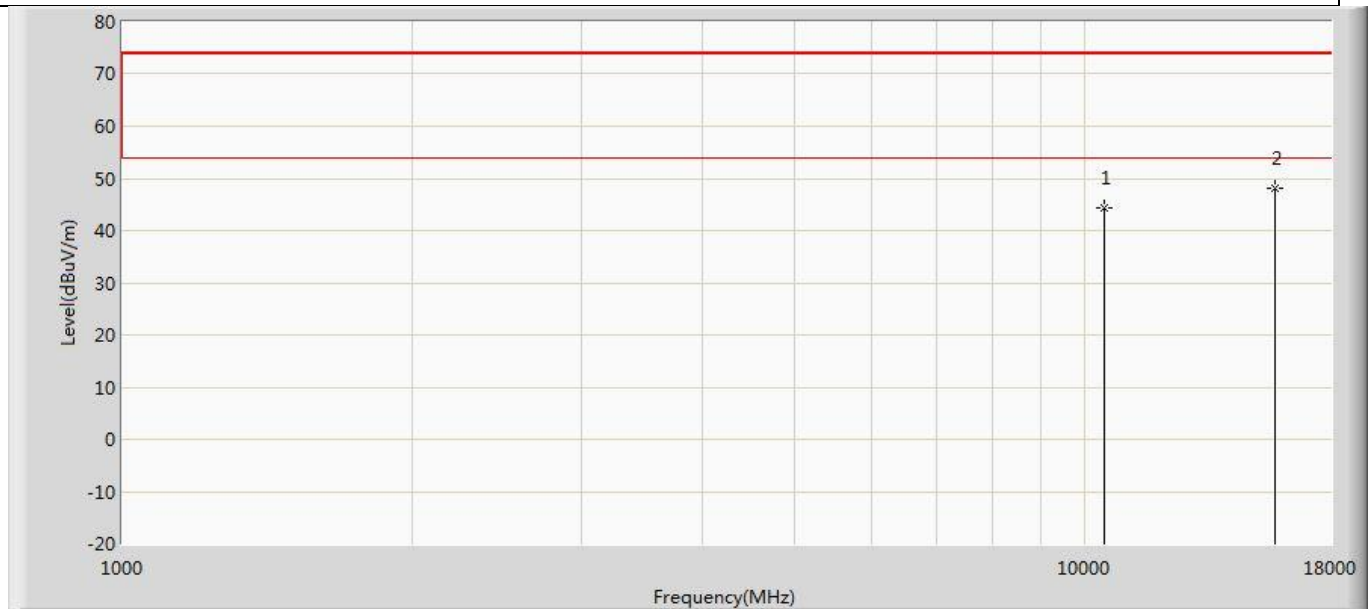


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	44.478	39.758	-29.522	74.000	4.719	PK
2	*	15720.000	48.197	38.632	-25.803	74.000	9.565	PK

Profile: 2150775R	Page No.: 436
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5240MHz by 802.11ax(20MHz) Ant 1	

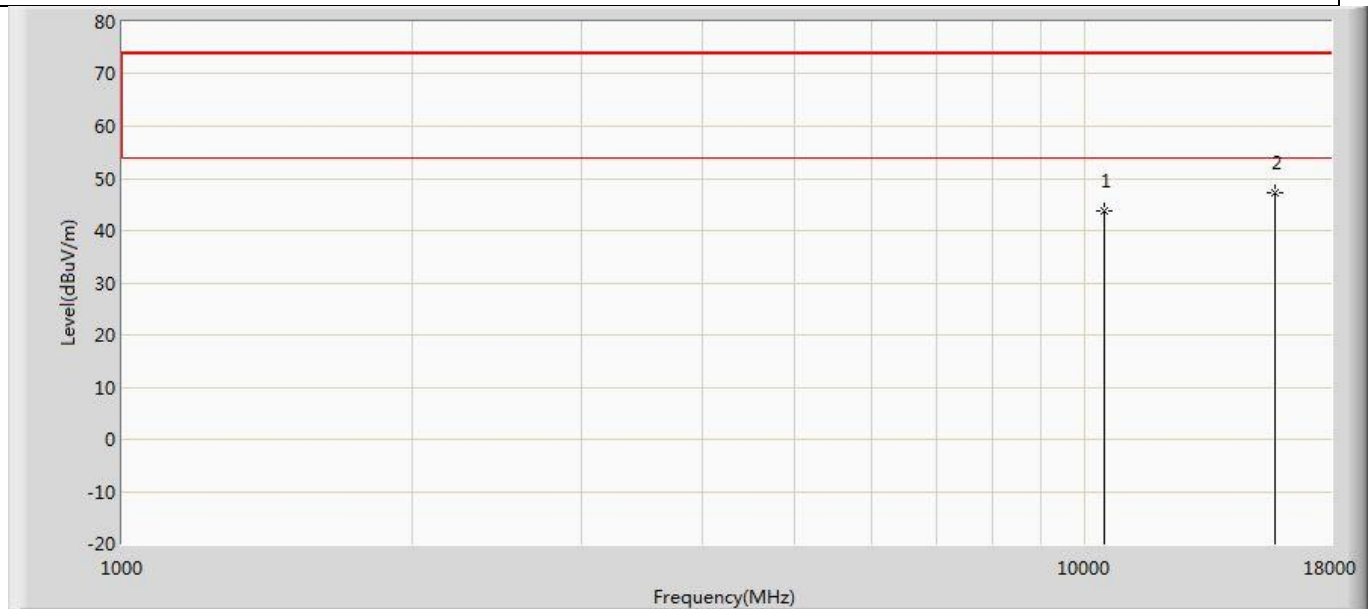


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	43.876	39.156	-30.124	74.000	4.719	PK
2	*	15720.000	47.295	37.730	-26.705	74.000	9.565	PK

Profile: 2150775R	Page No.: 437
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5260MHz by 802.11ax(20MHz) Ant 1	

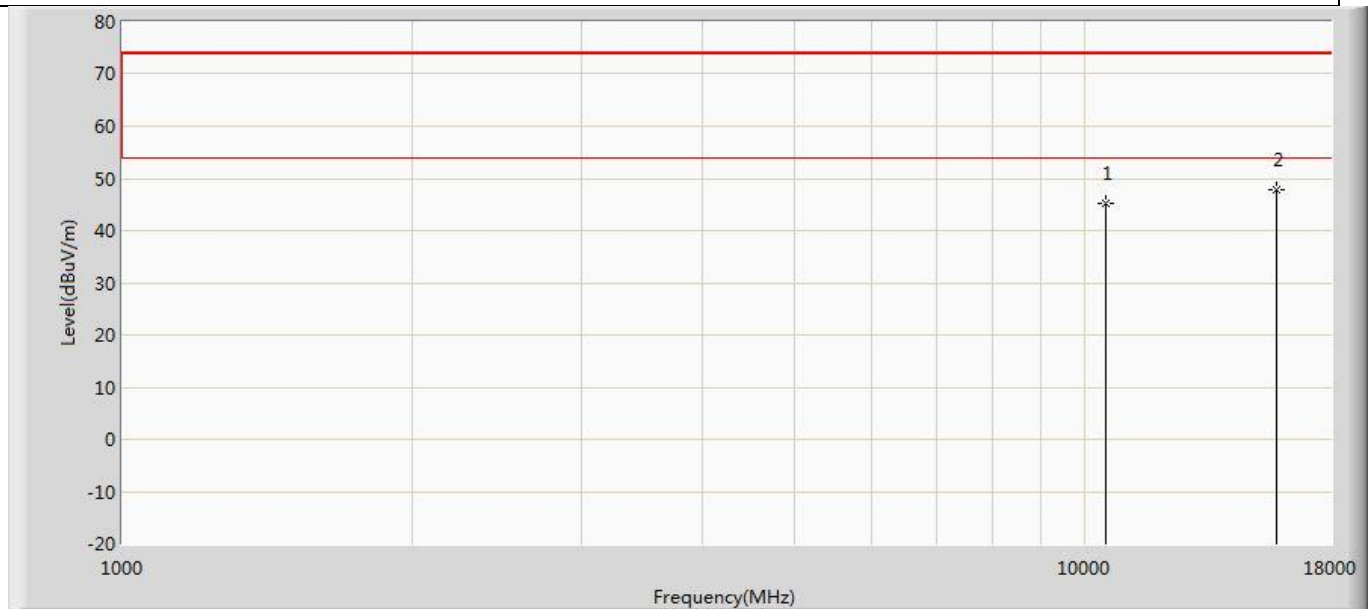


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.265	39.837	-28.735	74.000	5.428	PK
2	*	15780.000	47.937	39.262	-26.063	74.000	8.674	PK

Profile: 2150775R	Page No.: 438
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5260MHz by 802.11ax(20MHz) Ant 1	

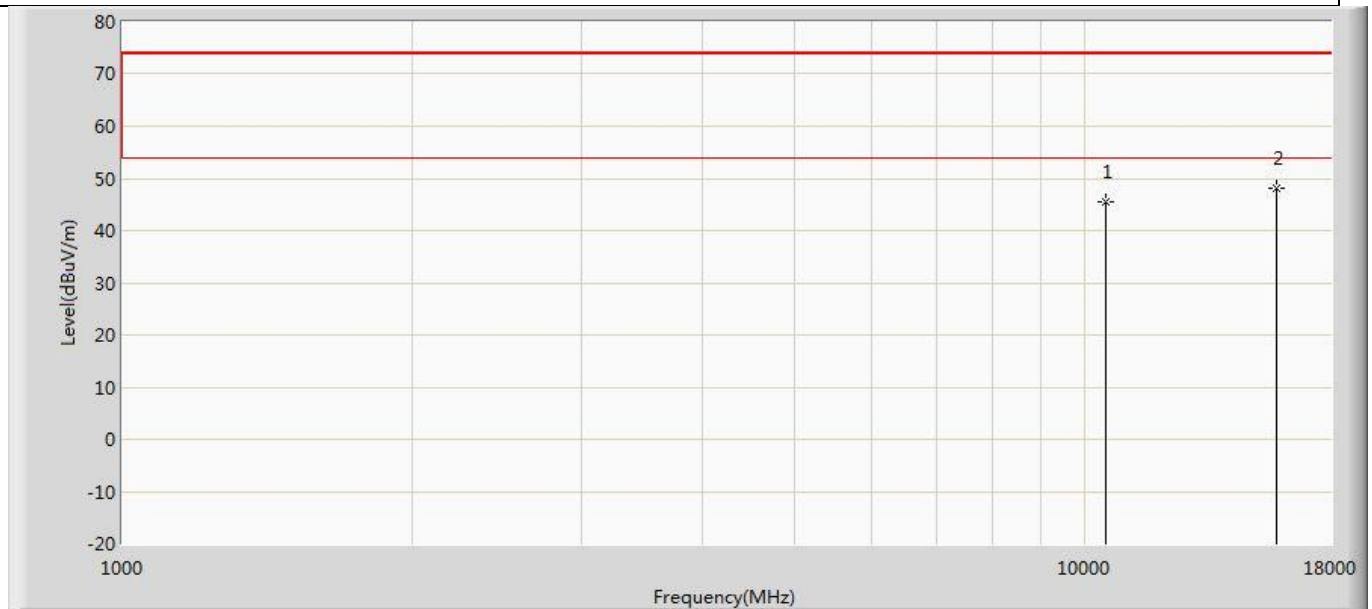


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.458	40.030	-28.542	74.000	5.428	PK
2	*	15780.000	48.148	39.473	-25.852	74.000	8.674	PK

Profile: 2150775R	Page No.: 439
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5300MHz by 802.11ax(20MHz) Ant 1	

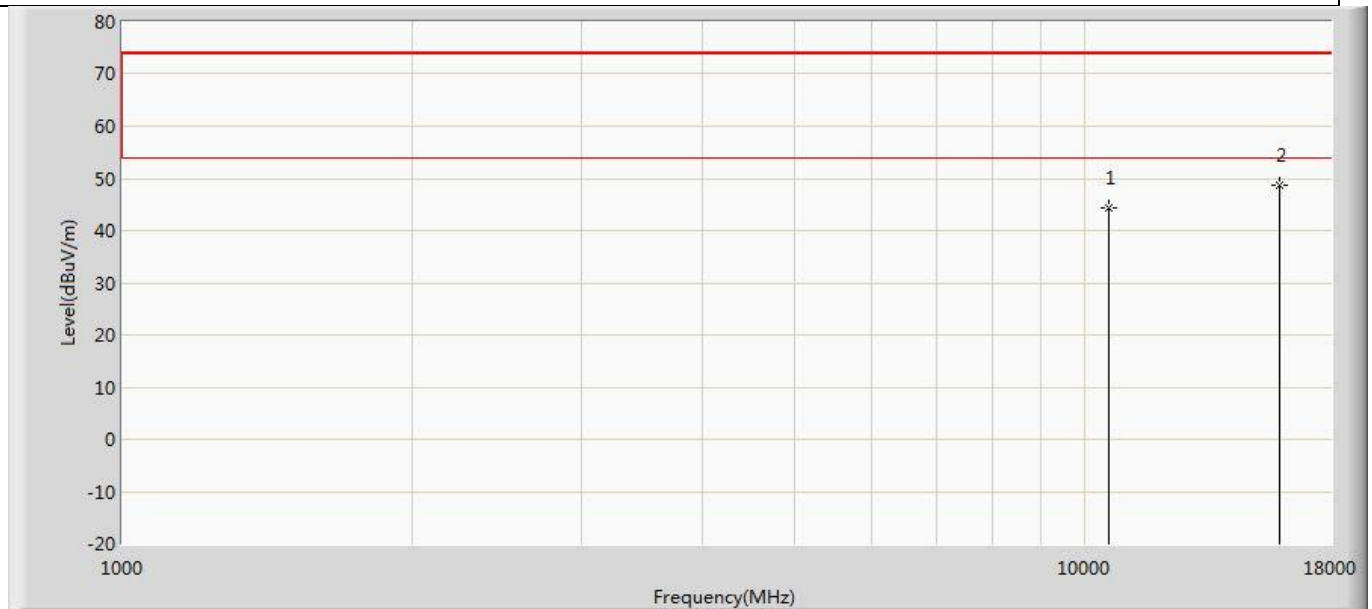


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.229	39.569	-29.771	74.000	4.660	PK
2	*	15900.000	48.717	39.930	-25.283	74.000	8.787	PK

Profile: 2150775R	Page No.: 440
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5300MHz by 802.11ax(20MHz) Ant 1	

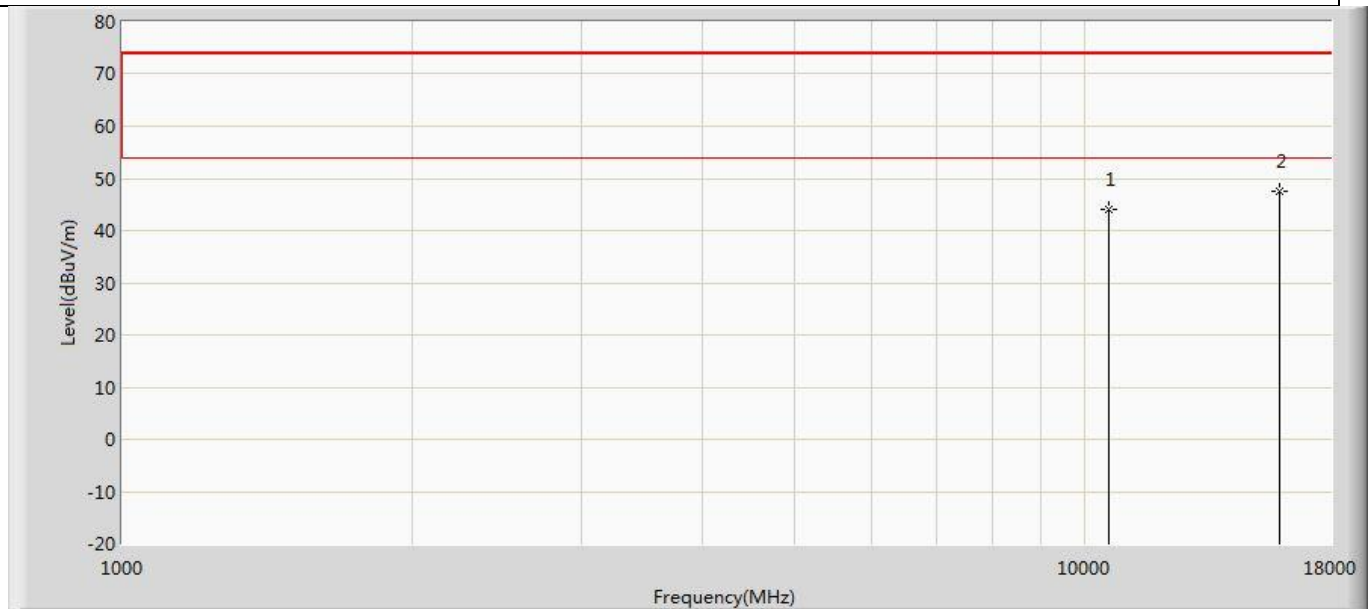


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	43.963	39.303	-30.037	74.000	4.660	PK
2	*	15900.000	47.633	38.846	-26.367	74.000	8.787	PK

Profile: 2150775R	Page No.: 441
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) Ant 1	

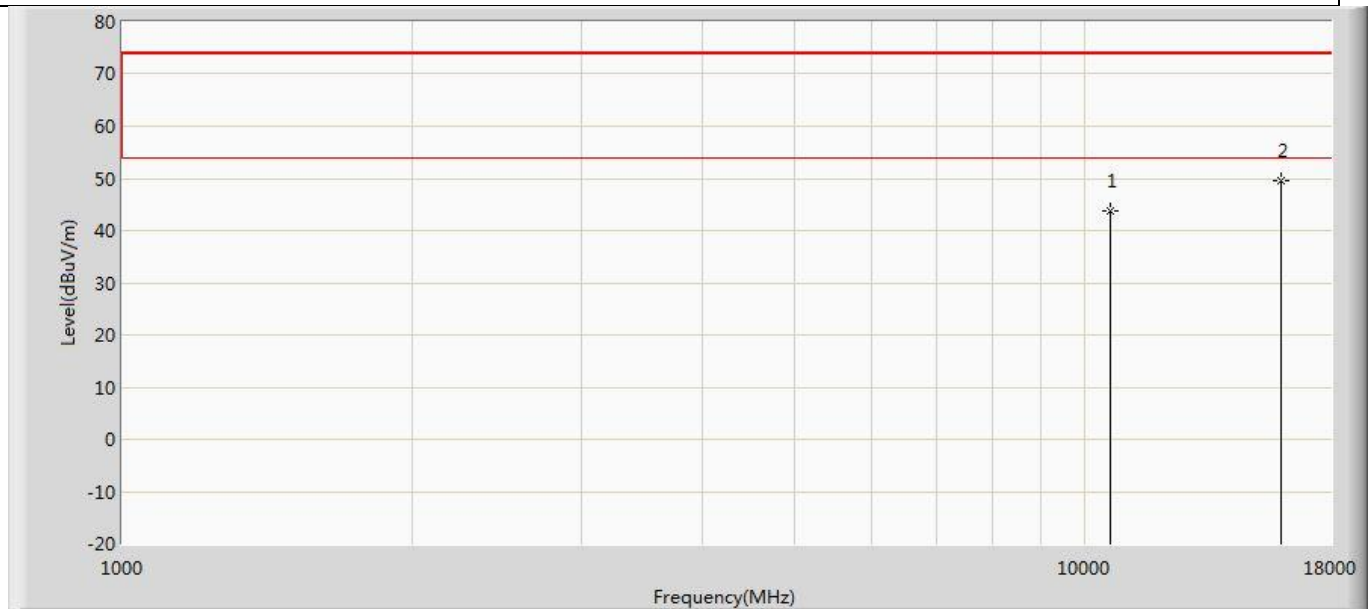


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	43.650	39.331	-30.350	74.000	4.319	PK
2	*	15960.000	49.425	39.175	-24.575	74.000	10.250	PK

Profile: 2150775R	Page No.: 442
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) Ant 1	

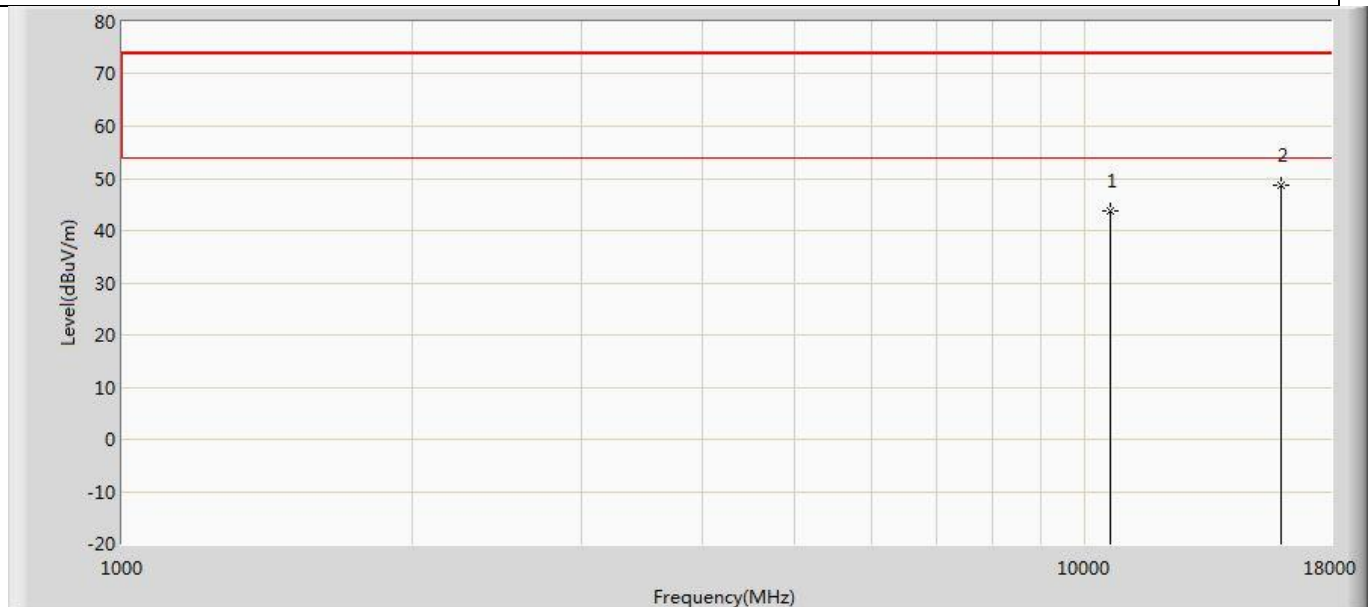


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	43.762	39.443	-30.238	74.000	4.319	PK
2	*	15960.000	48.626	38.376	-25.374	74.000	10.250	PK

Profile: 2150775R	Page No.: 443
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) Ant 1	

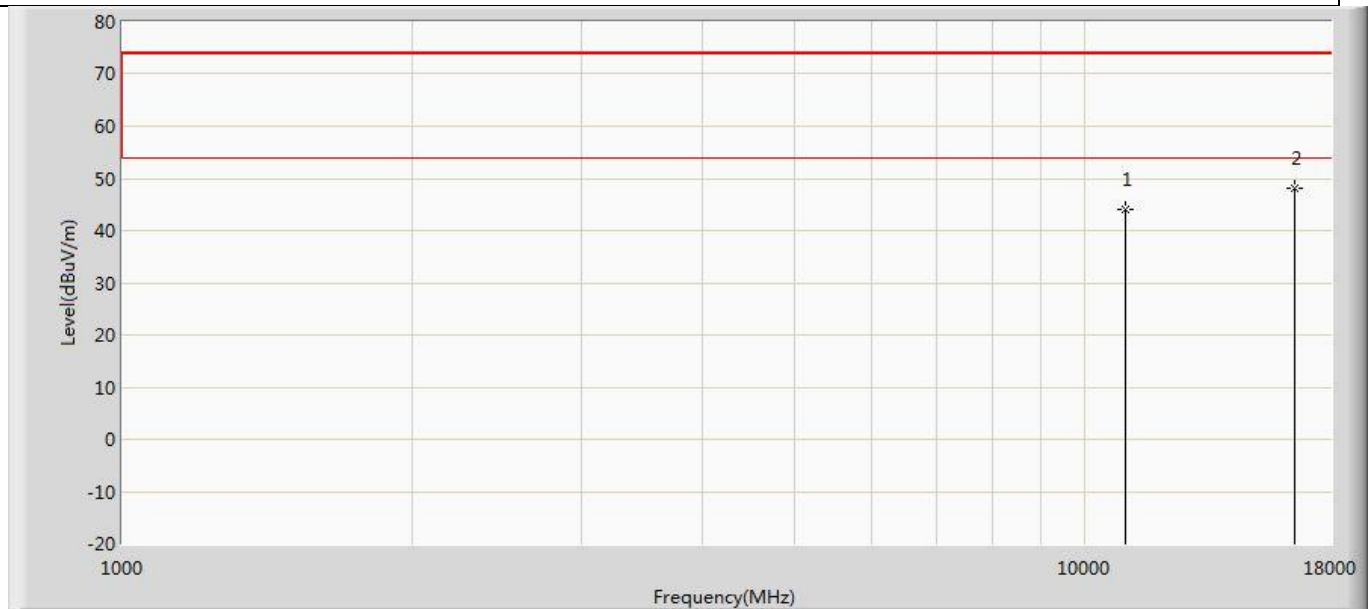

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	44.059	39.667	-29.941	74.000	4.392	PK
2	*	16500.000	48.089	38.405	-25.911	74.000	9.684	PK

Profile: 2150775R	Page No.: 444
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 21:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) Ant 1	

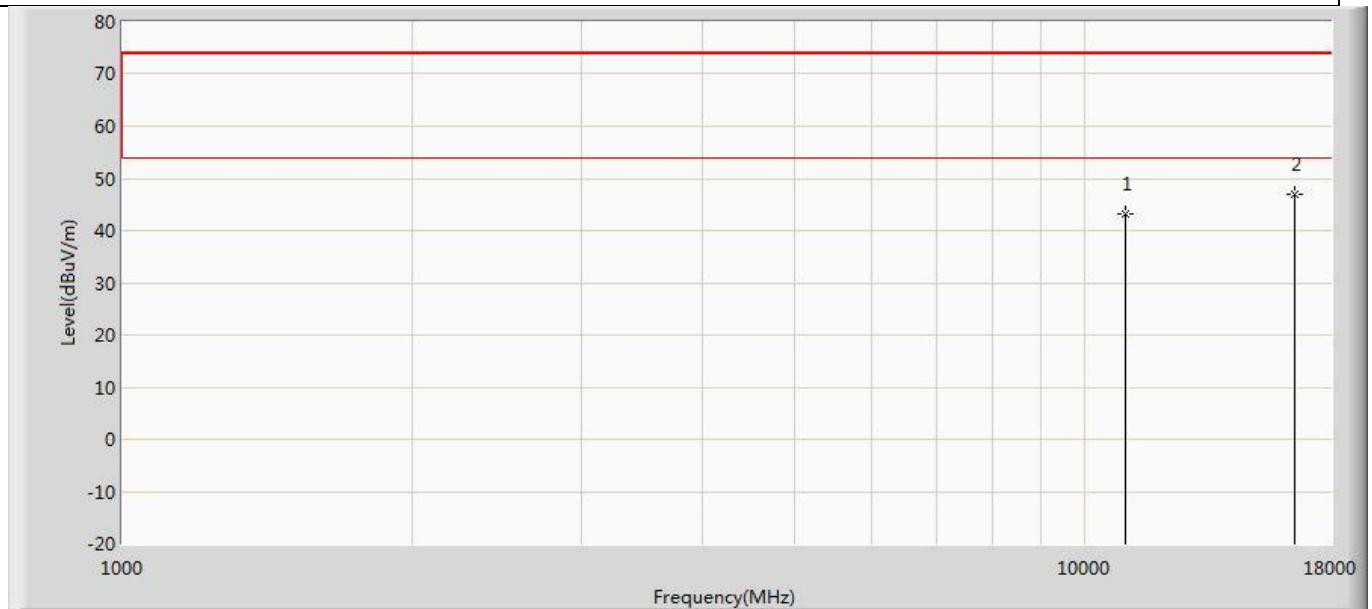

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.249	38.857	-30.751	74.000	4.392	PK
2	*	16500.000	47.005	37.321	-26.995	74.000	9.684	PK