



Profile: 2150775R	Page No.: 431
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5220MHz by 802.11ax(20MHz) MIMO	

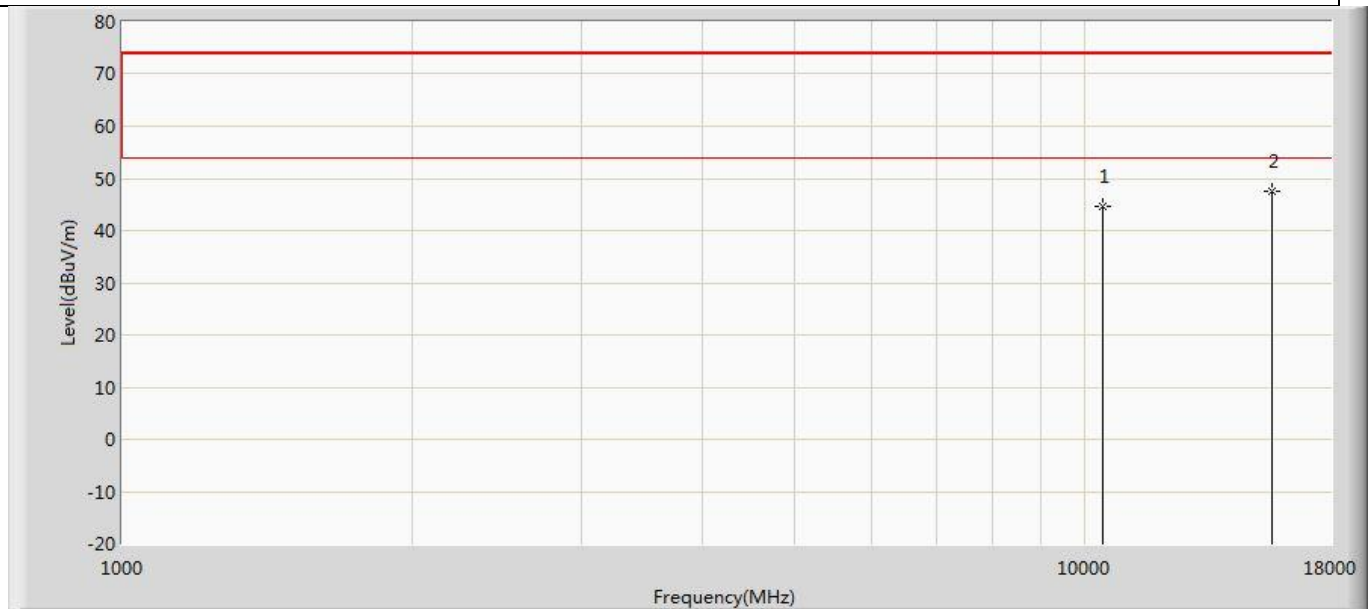


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	44.527	39.704	-29.473	74.000	4.823	PK
2	*	15660.000	47.516	38.739	-26.484	74.000	8.776	PK

Profile: 2150775R	Page No.: 432
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5220MHz by 802.11ax(20MHz) MIMO	

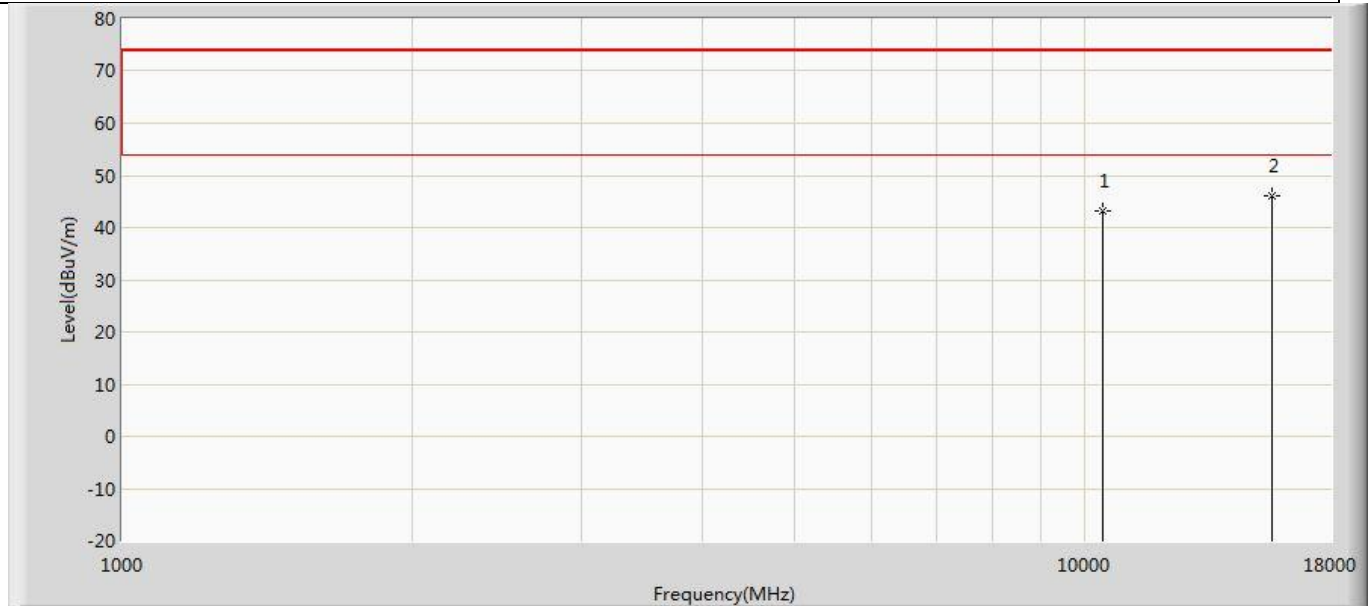


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	43.232	38.409	-30.768	74.000	4.823	PK
2	*	15660.000	46.186	37.409	-27.814	74.000	8.776	PK

Profile: 2150775R	Page No.: 433
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5240MHz by 802.11ax(20MHz) MIMO	

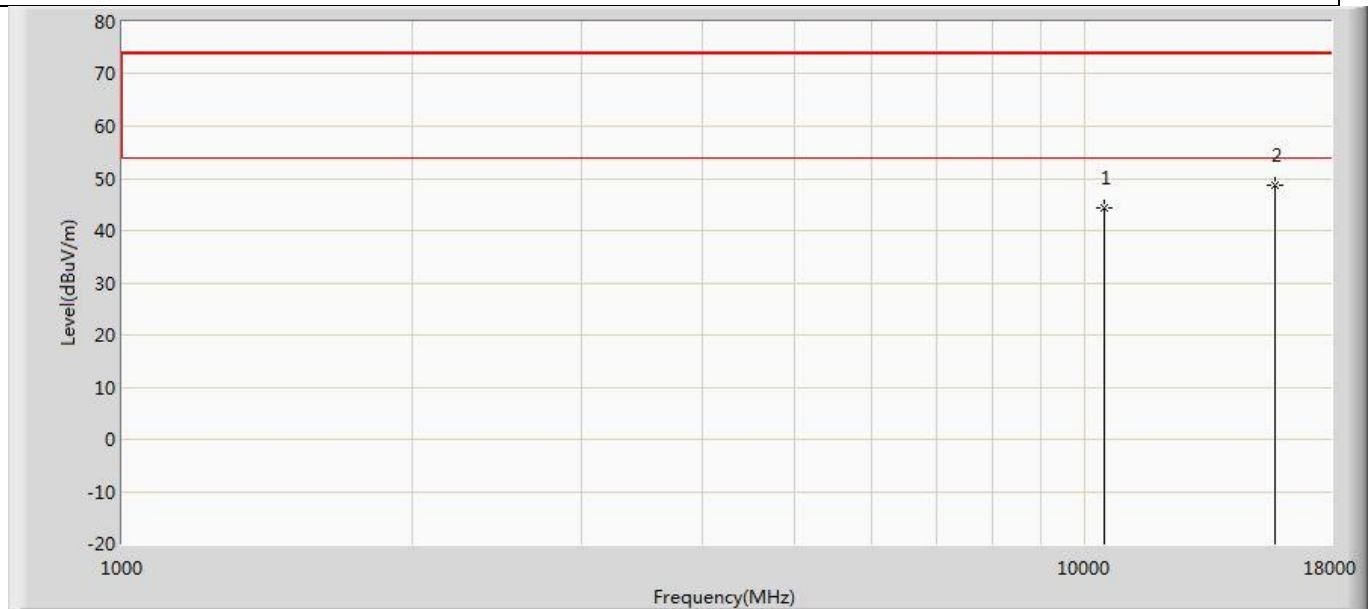


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	44.284	39.564	-29.716	74.000	4.719	PK
2	*	15720.000	48.795	39.230	-25.205	74.000	9.565	PK

Profile: 2150775R	Page No.: 434
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5240MHz by 802.11ax(20MHz) MIMO	

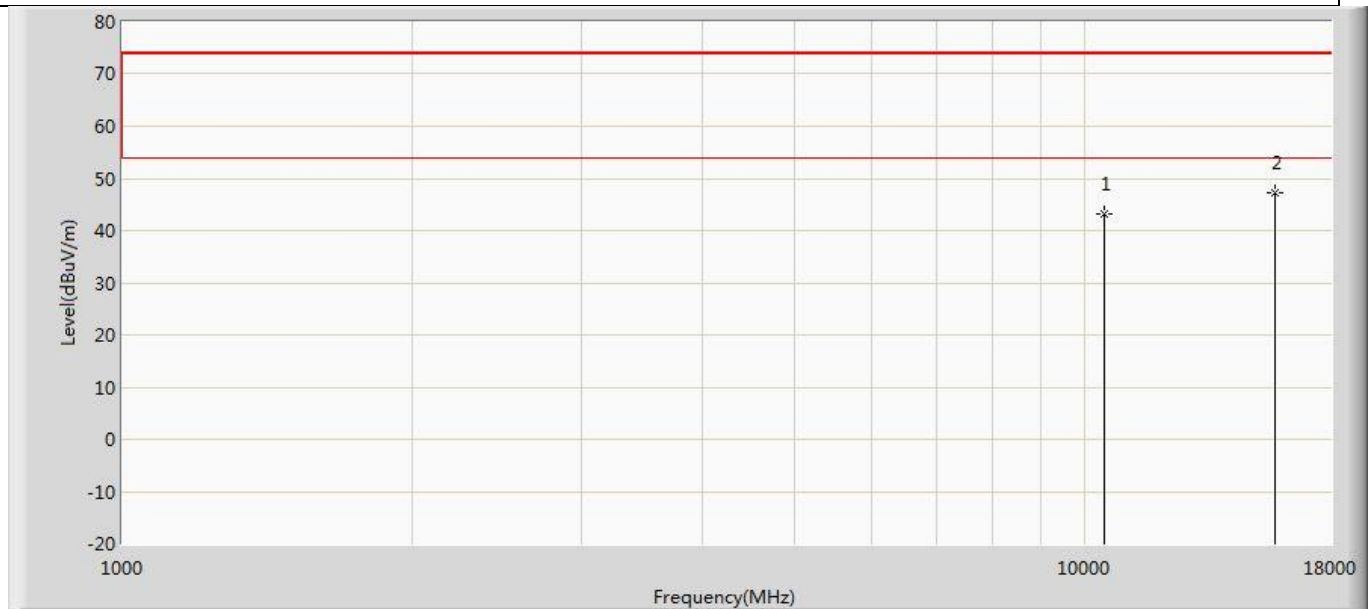


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	43.162	38.442	-30.838	74.000	4.719	PK
2	*	15720.000	47.368	37.803	-26.632	74.000	9.565	PK

Profile: 2150775R	Page No.: 435
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5260MHz by 802.11ax(20MHz) MIMO	

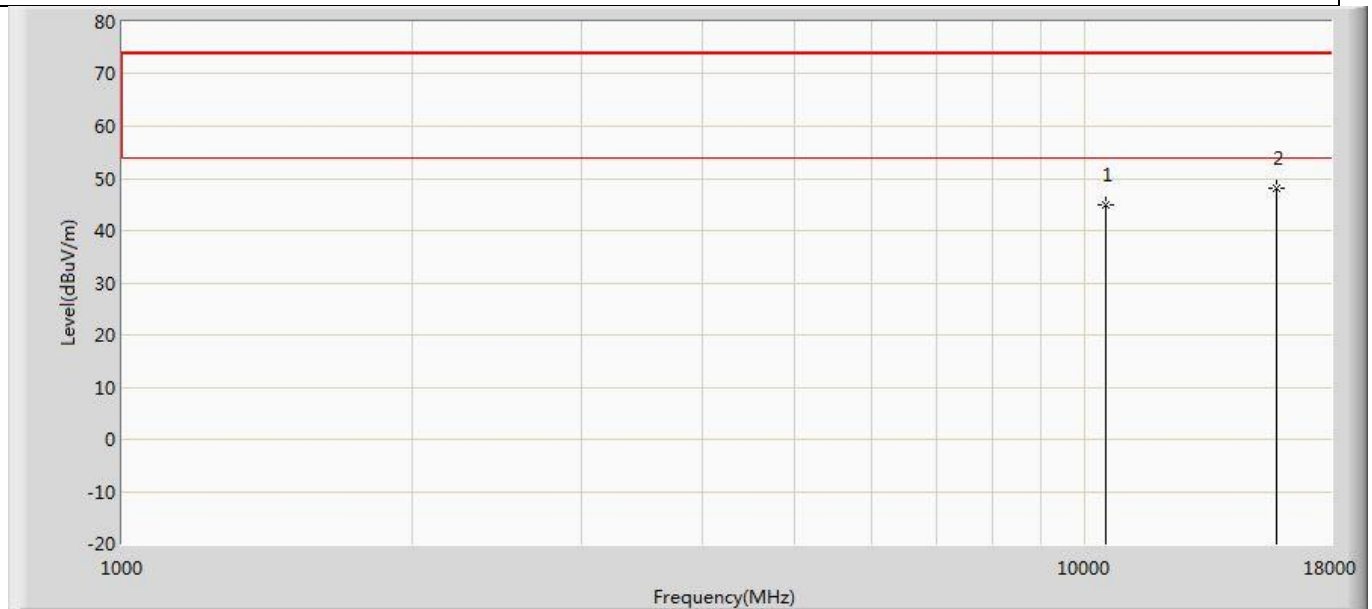


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	44.805	39.377	-29.195	74.000	5.428	PK
2	*	15780.000	48.178	39.503	-25.822	74.000	8.674	PK

Profile: 2150775R	Page No.: 436
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5260MHz by 802.11ax(20MHz) MIMO	

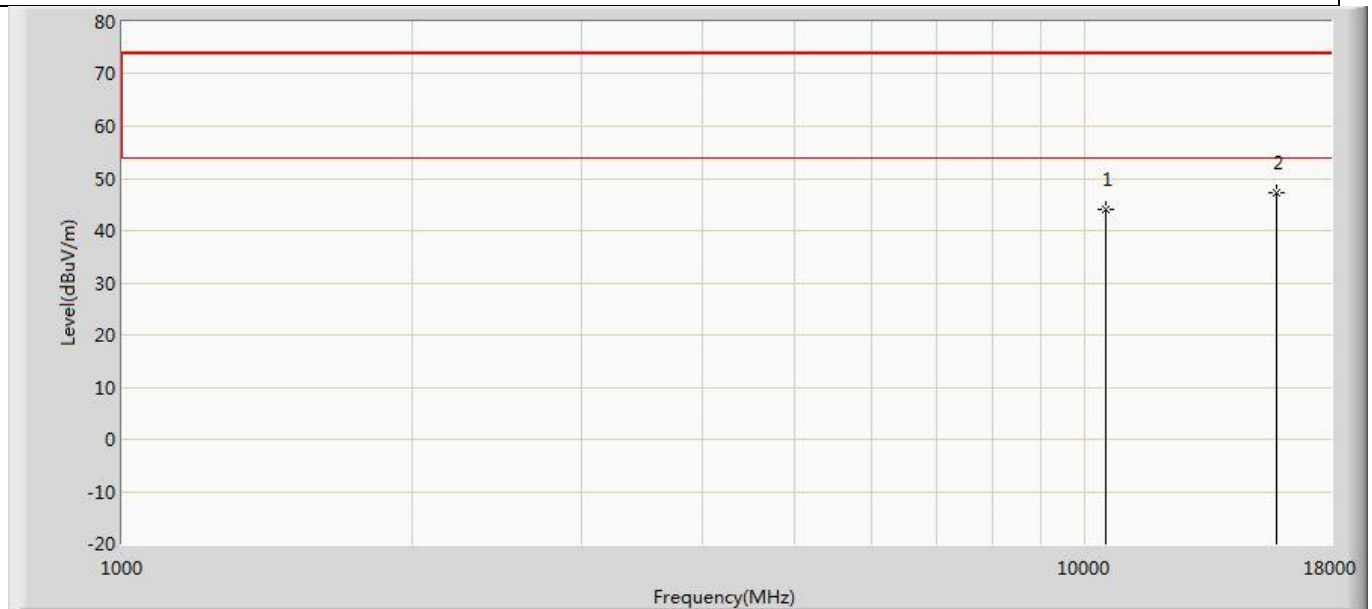


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	44.104	38.676	-29.896	74.000	5.428	PK
2	*	15780.000	47.312	38.637	-26.688	74.000	8.674	PK

Profile: 2150775R	Page No.: 437
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5300MHz by 802.11ax(20MHz) MIMO	

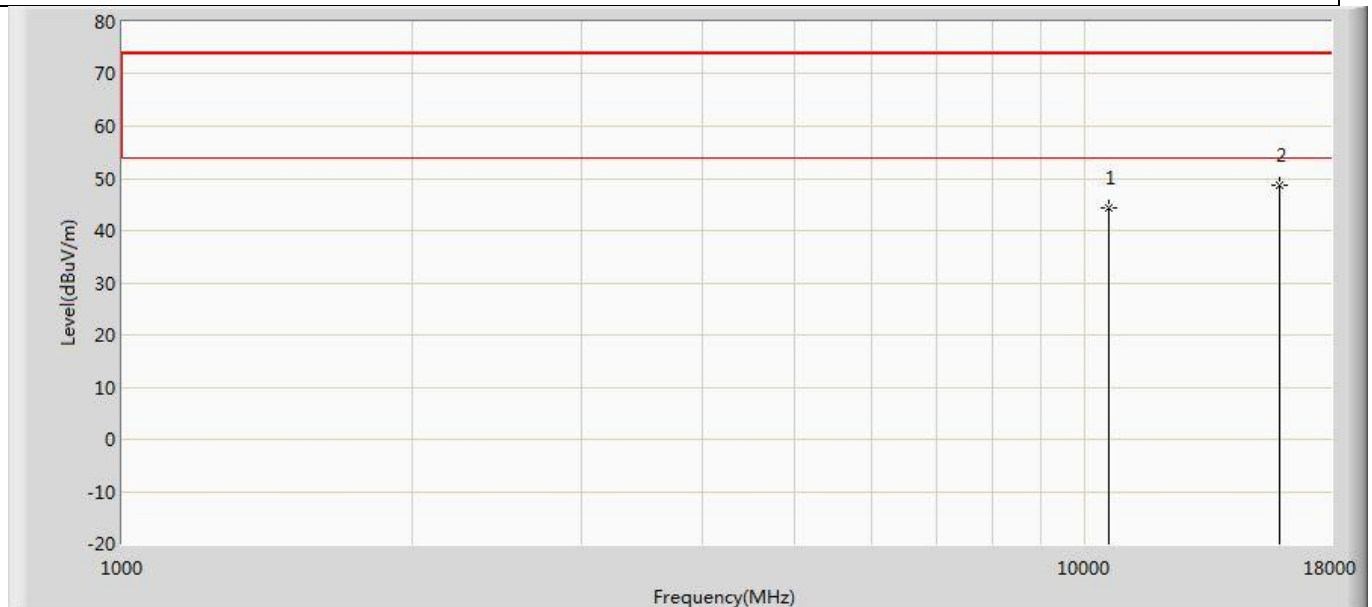


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.293	39.633	-29.707	74.000	4.660	PK
2	*	15900.000	48.670	39.883	-25.330	74.000	8.787	PK

Profile: 2150775R	Page No.: 438
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5300MHz by 802.11ax(20MHz) MIMO	

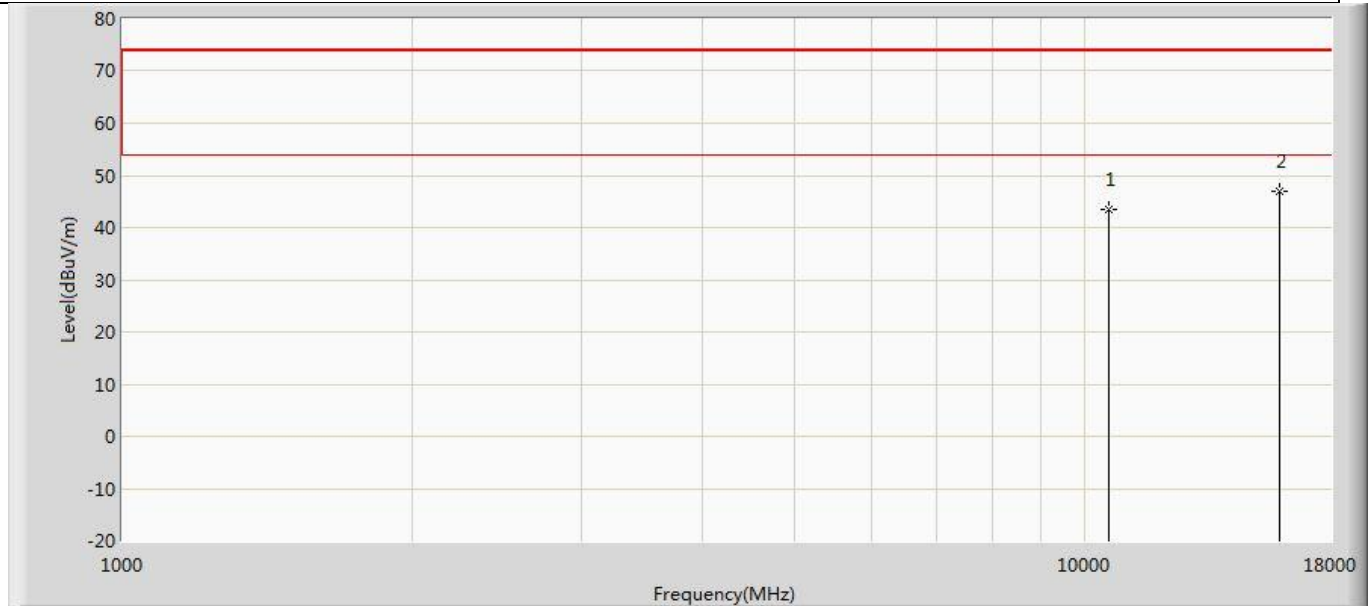


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	43.412	38.752	-30.588	74.000	4.660	PK
2	*	15900.000	46.827	38.040	-27.173	74.000	8.787	PK

Profile: 2150775R	Page No.: 439
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) MIMO	

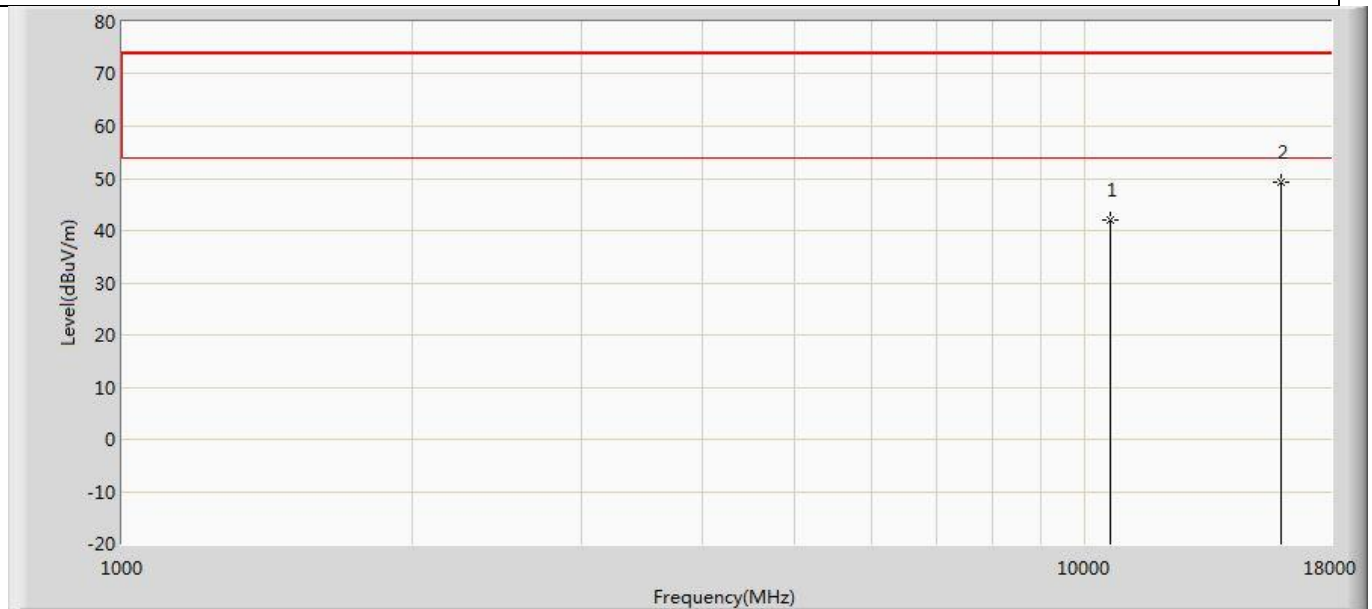


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	42.030	37.711	-31.970	74.000	4.319	PK
2	*	15960.000	49.382	39.132	-24.618	74.000	10.250	PK

Profile: 2150775R	Page No.: 440
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) MIMO	

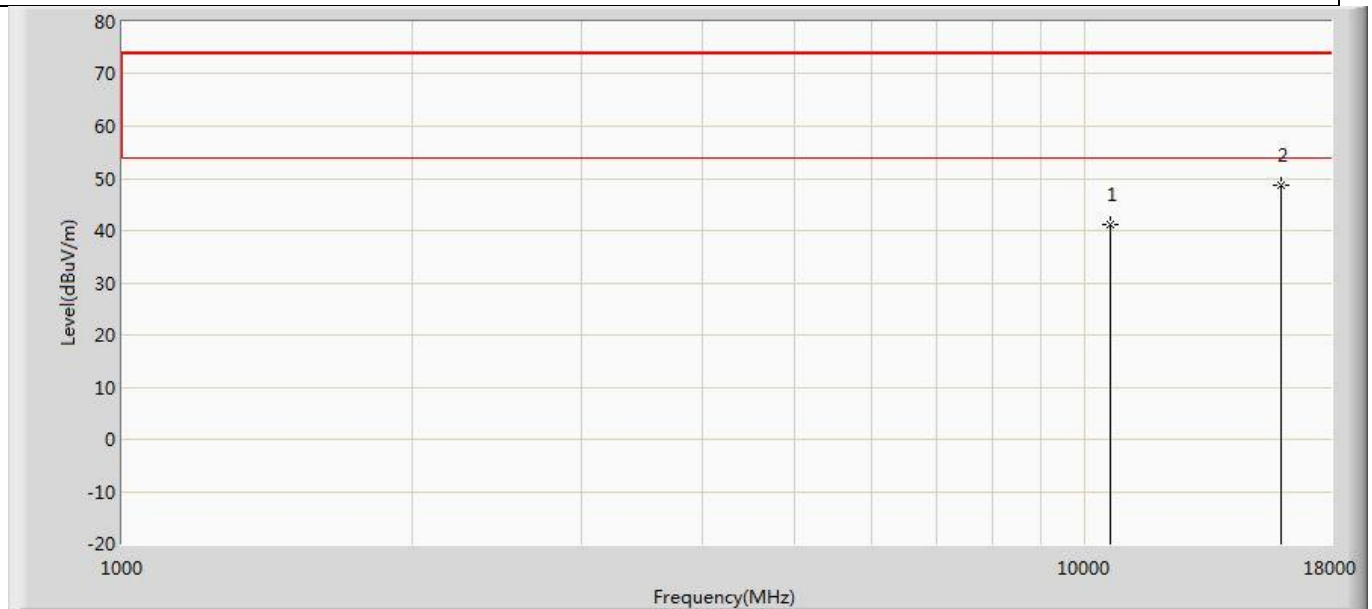


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	41.154	36.835	-32.846	74.000	4.319	PK
2	*	15960.000	48.789	38.539	-25.211	74.000	10.250	PK

Profile: 2150775R	Page No.: 441
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) MIMO	

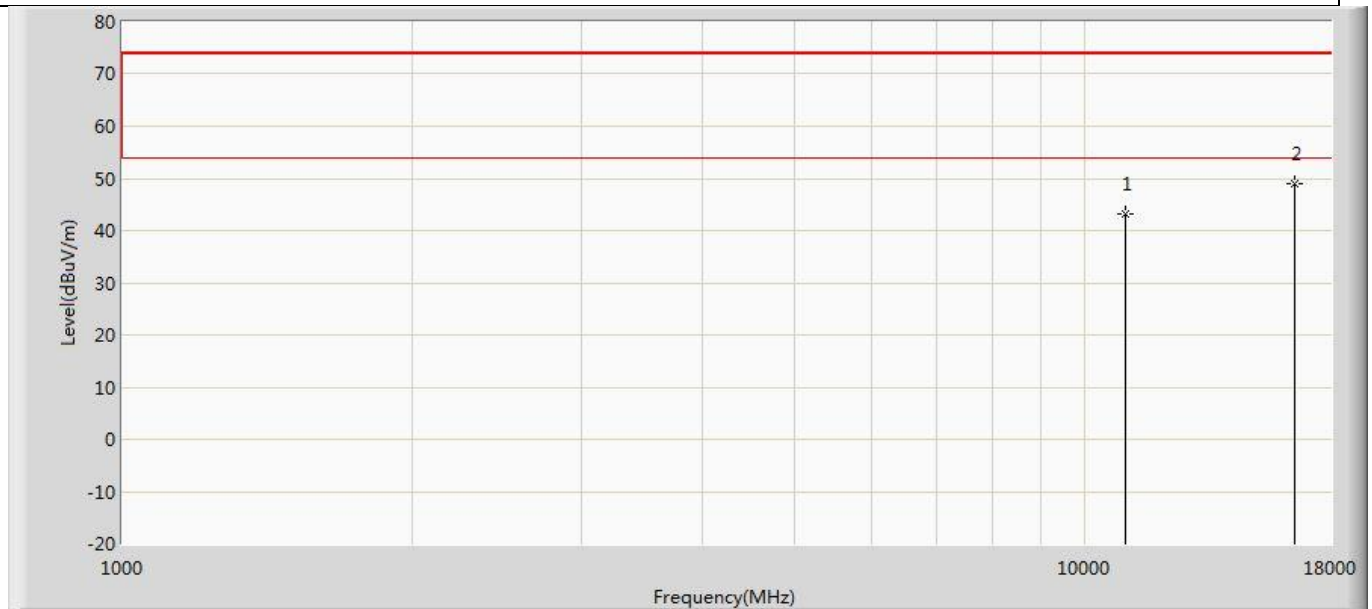


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	43.068	38.676	-30.932	74.000	4.392	PK
2	*	16500.000	49.088	39.404	-24.912	74.000	9.684	PK

Profile: 2150775R	Page No.: 442
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) MIMO	

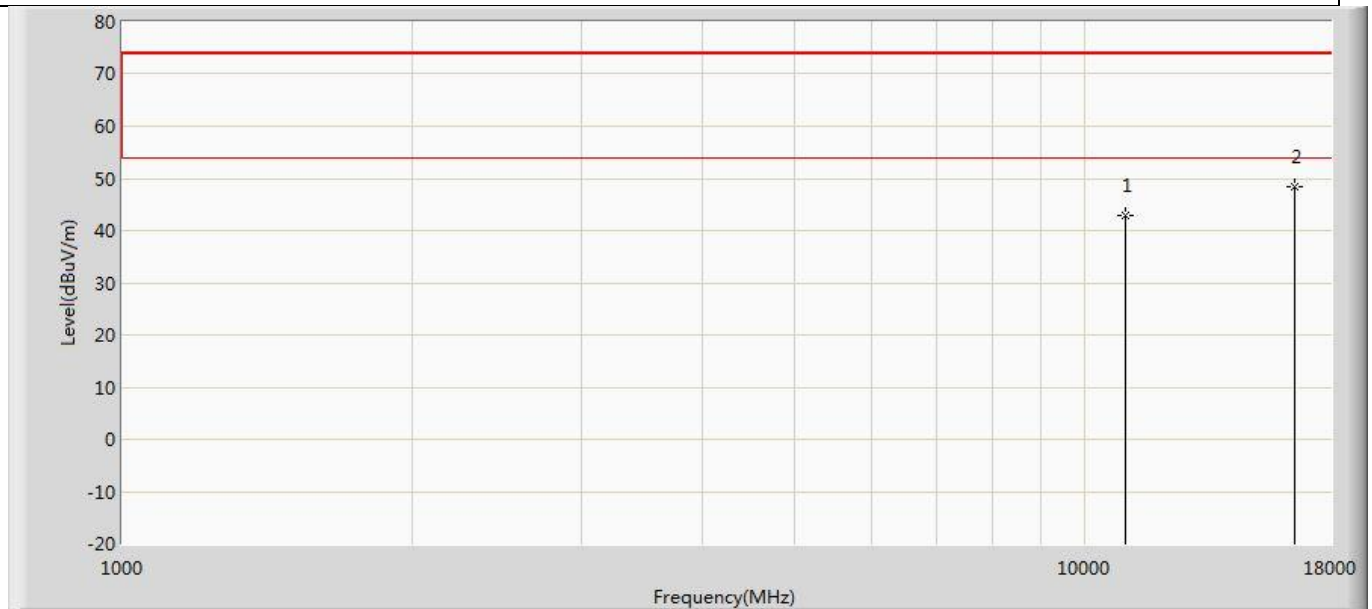


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	42.974	38.582	-31.026	74.000	4.392	PK
2	*	16500.000	48.548	38.864	-25.452	74.000	9.684	PK

Profile: 2150775R	Page No.: 443
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5580MHz by 802.11ax(20MHz) MIMO	

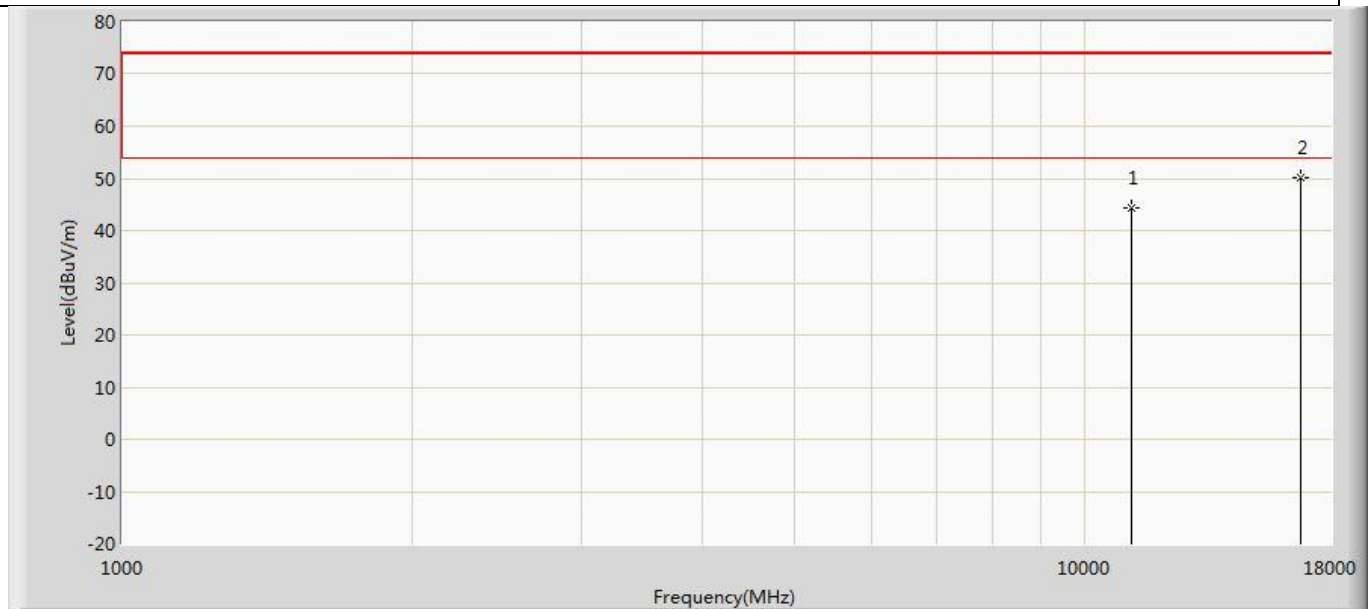


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	44.392	40.122	-29.608	74.000	4.271	PK
2	*	16740.000	50.020	39.534	-23.980	74.000	10.485	PK

Profile: 2150775R	Page No.: 444
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5580MHz by 802.11ax(20MHz) MIMO	

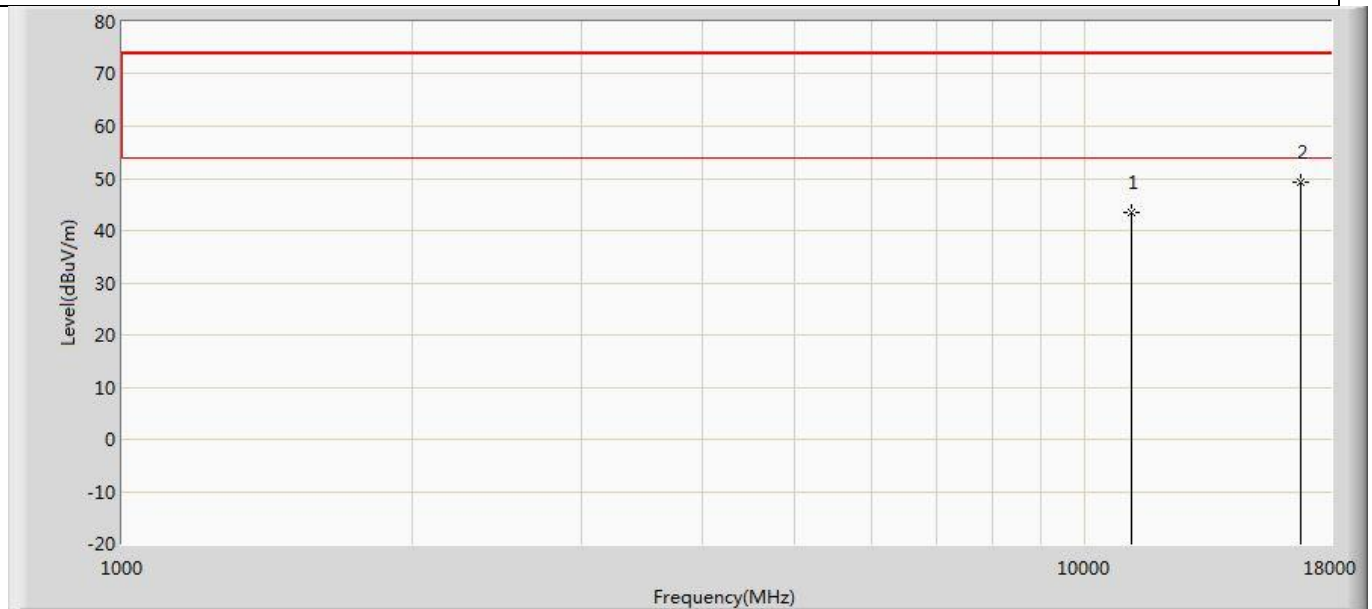


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	43.511	39.241	-30.489	74.000	4.271	PK
2	*	16740.000	49.255	38.769	-24.745	74.000	10.485	PK

Profile: 2150775R	Page No.: 445
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5700MHz by 802.11ax(20MHz) MIMO	

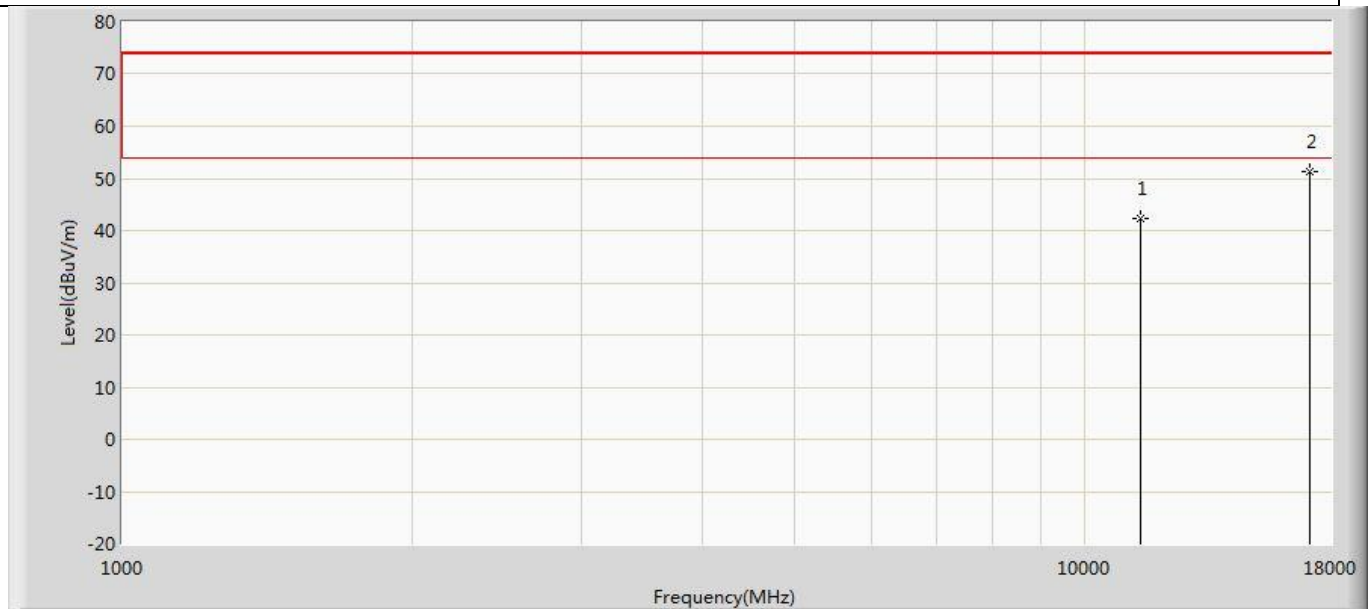


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	42.187	37.459	-31.813	74.000	4.729	PK
2	*	17100.000	51.285	39.757	-22.715	74.000	11.528	PK

Profile: 2150775R	Page No.: 446
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5700MHz by 802.11ax(20MHz) MIMO	

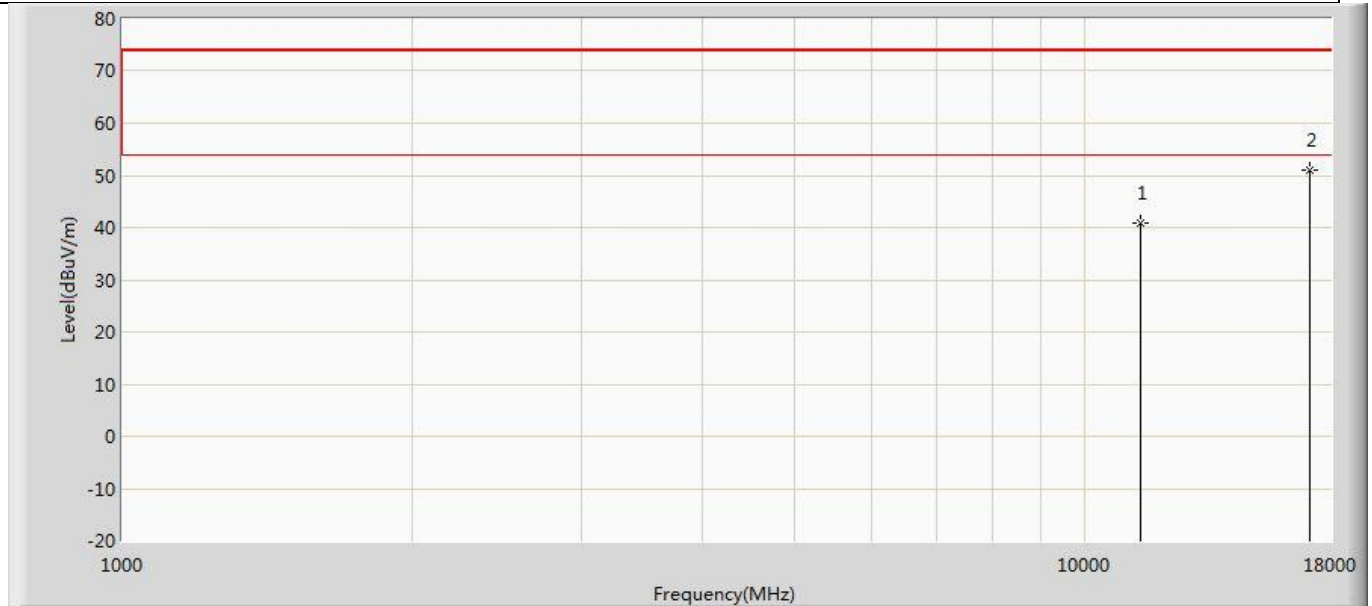


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	40.791	36.063	-33.209	74.000	4.729	PK
2	*	17100.000	50.934	39.406	-23.066	74.000	11.528	PK

Profile: 2150775R	Page No.: 447
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5745MHz by 802.11ax(20MHz) MIMO	

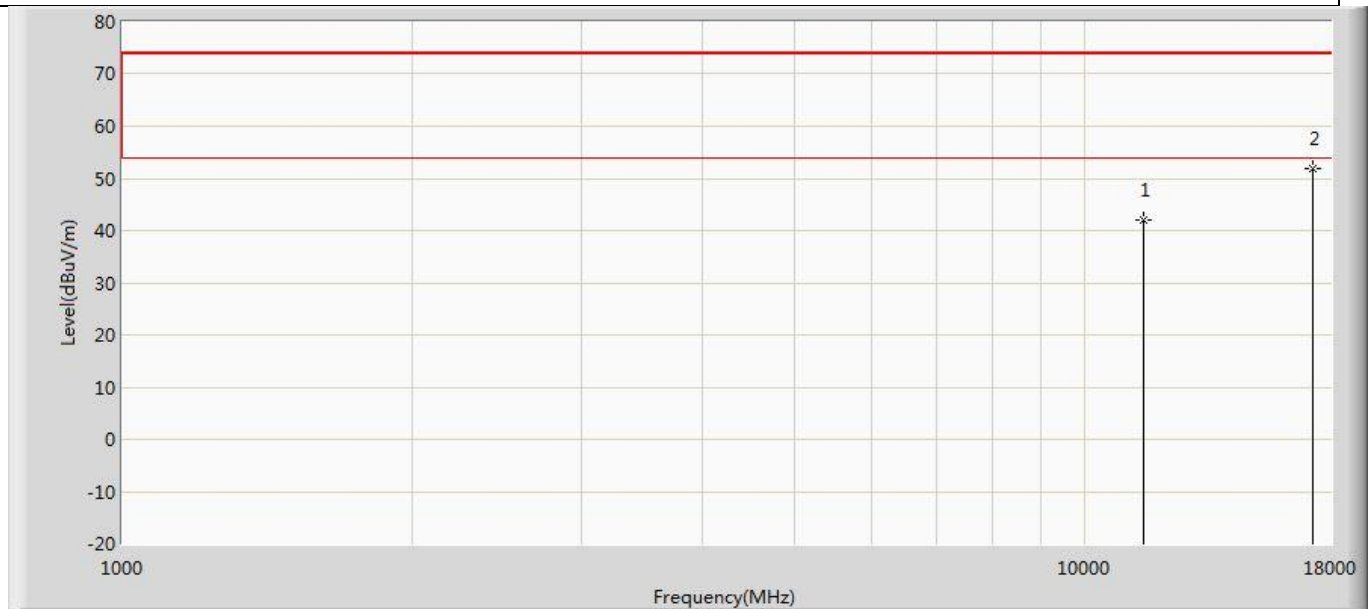


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	42.099	37.470	-31.901	74.000	4.629	PK
2	*	17235.000	51.979	38.531	-22.021	74.000	13.448	PK

Profile: 2150775R	Page No.: 448
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5745MHz by 802.11ax(20MHz) MIMO	

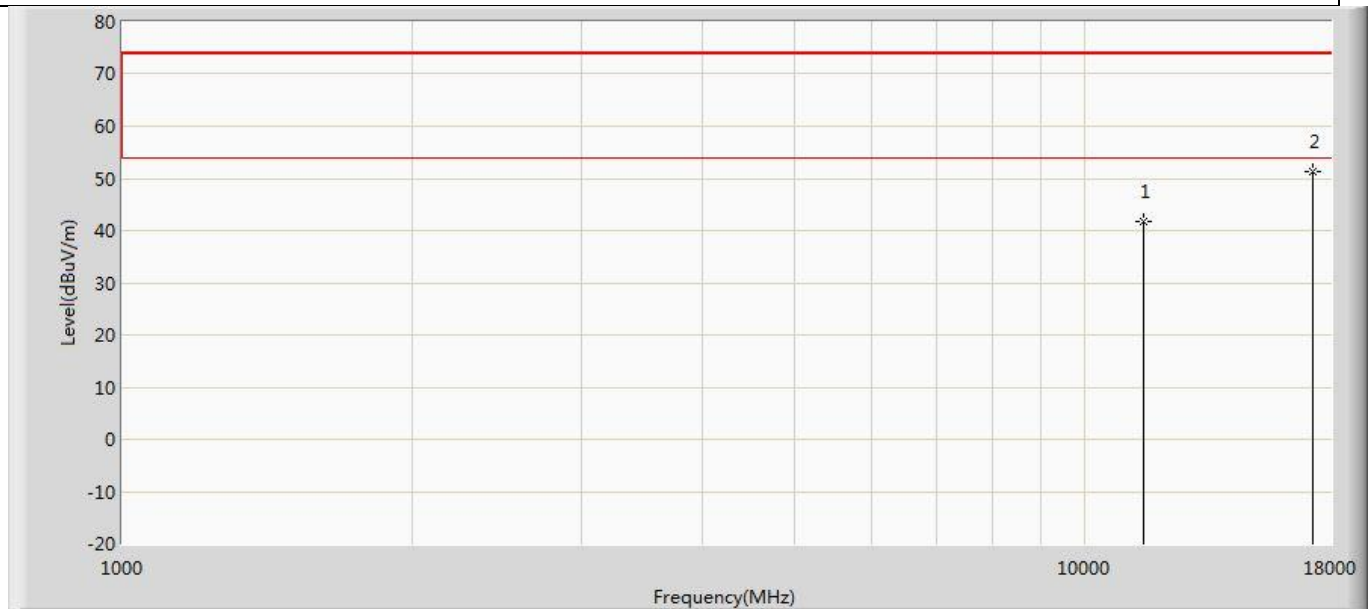


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	41.653	37.024	-32.347	74.000	4.629	PK
2	*	17235.000	51.401	37.953	-22.599	74.000	13.448	PK

Profile: 2150775R	Page No.: 449
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5785MHz by 802.11ax(20MHz) MIMO	

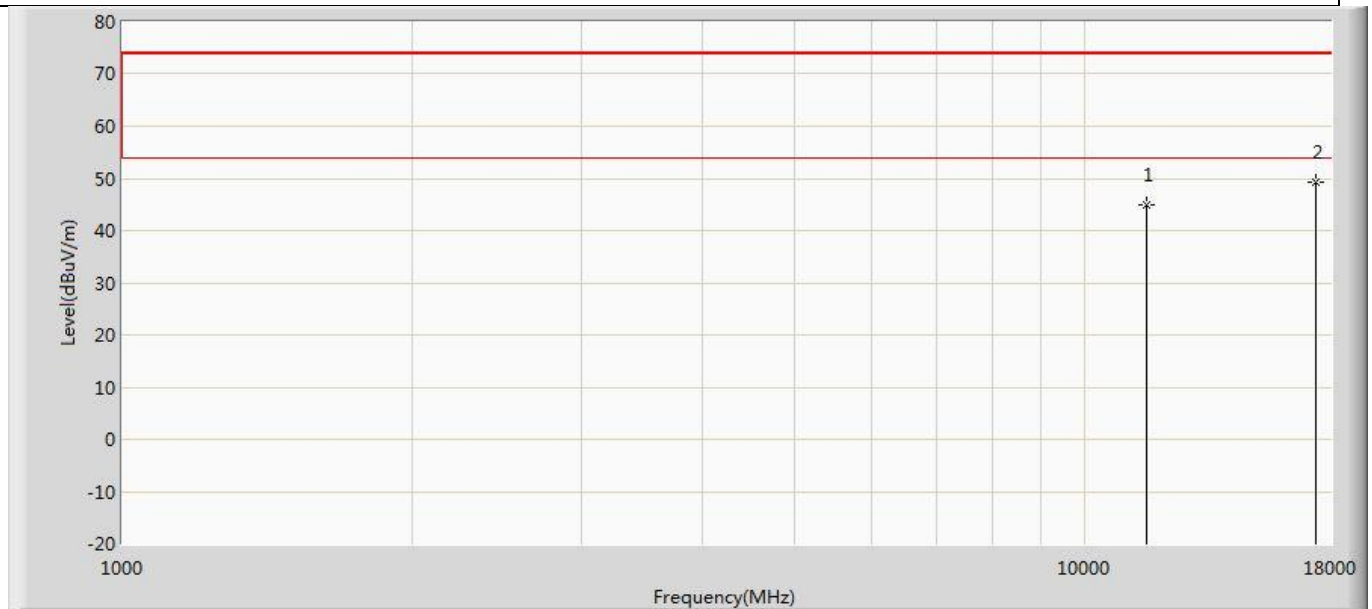


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	44.942	39.029	-29.058	74.000	5.913	PK
2	*	17355.000	49.195	37.975	-24.805	74.000	11.221	PK

Profile: 2150775R	Page No.: 450
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5785MHz by 802.11ax(20MHz) MIMO	

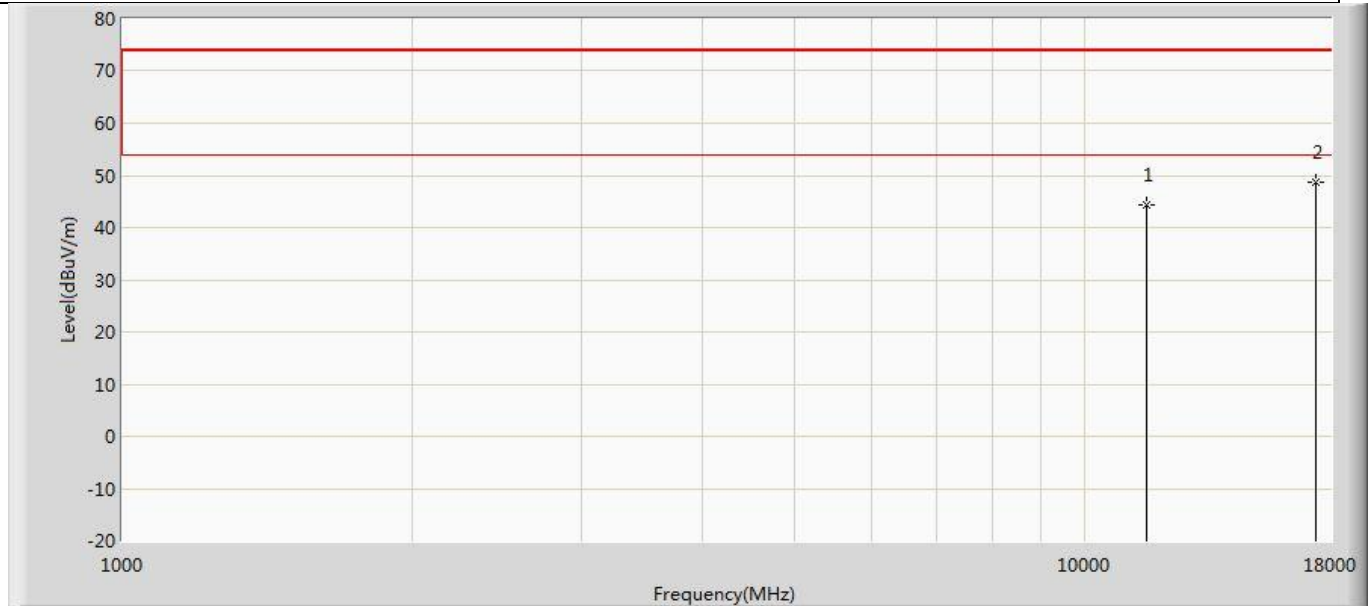


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	44.362	38.449	-29.638	74.000	5.913	PK
2	*	17355.000	48.629	37.409	-25.371	74.000	11.221	PK

Profile: 2150775R	Page No.: 451
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5825MHz by 802.11ax(20MHz) MIMO	

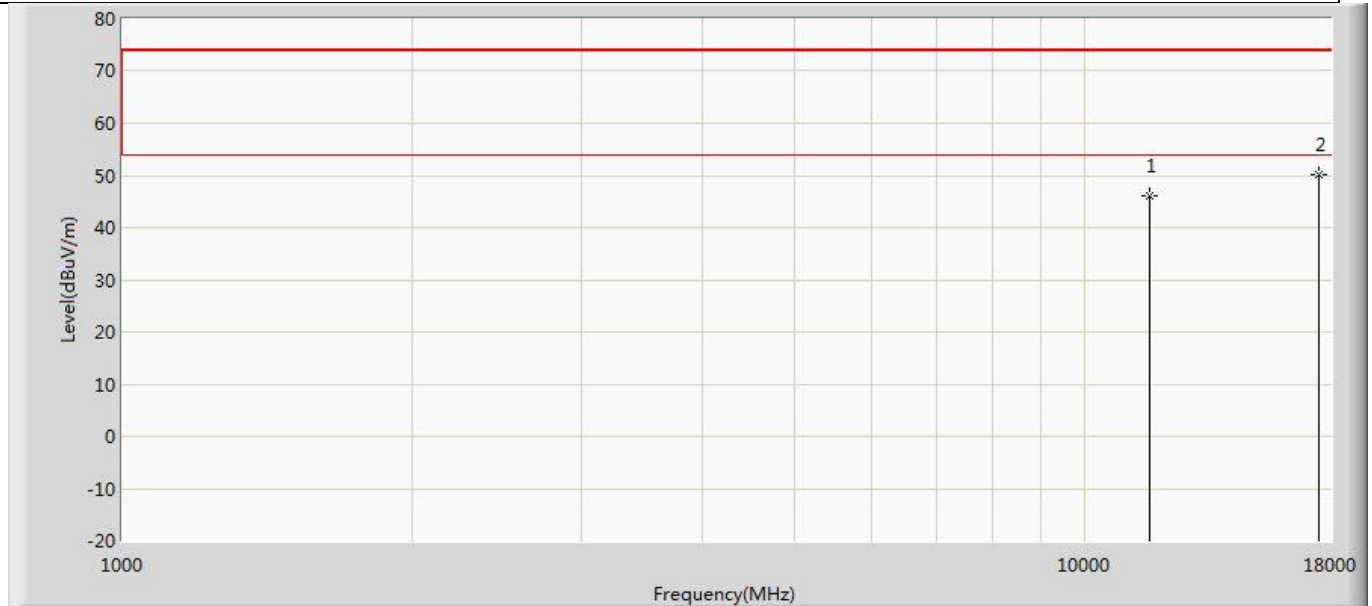


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.044	39.544	-27.956	74.000	6.501	PK
2	*	17475.000	50.039	38.734	-23.961	74.000	11.306	PK

Profile: 2150775R	Page No.: 452
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5825MHz by 802.11ax(20MHz) MIMO	

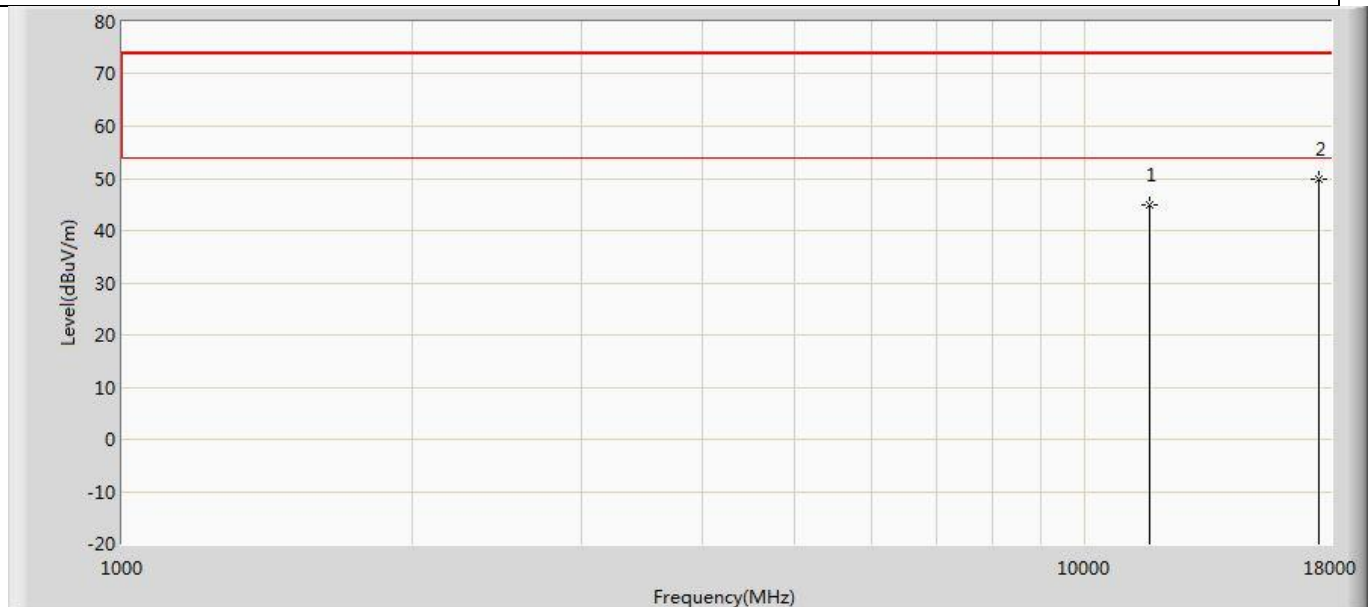


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	44.906	38.406	-29.094	74.000	6.501	PK
2	*	17475.000	49.936	38.631	-24.064	74.000	11.306	PK

Profile: 2150775R	Page No.: 453
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) MIMO	

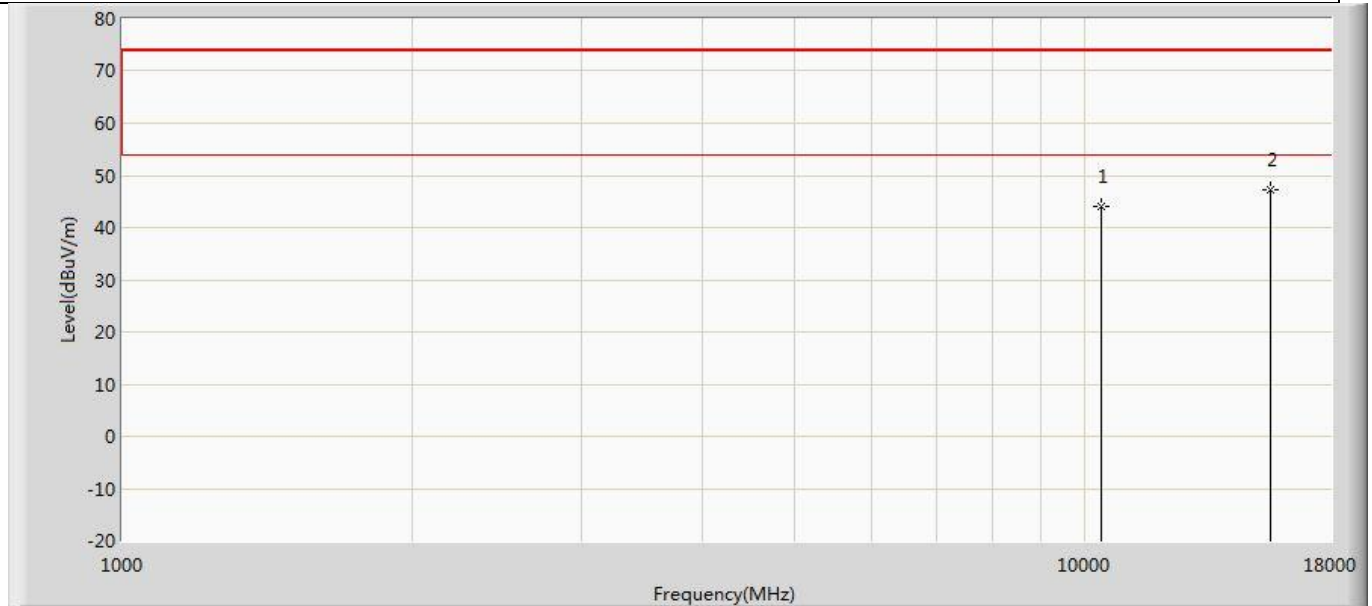


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	44.140	39.699	-29.860	74.000	4.442	PK
2	*	15570.000	47.133	38.614	-26.867	74.000	8.520	PK

Profile: 2150775R	Page No.: 454
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) MIMO	

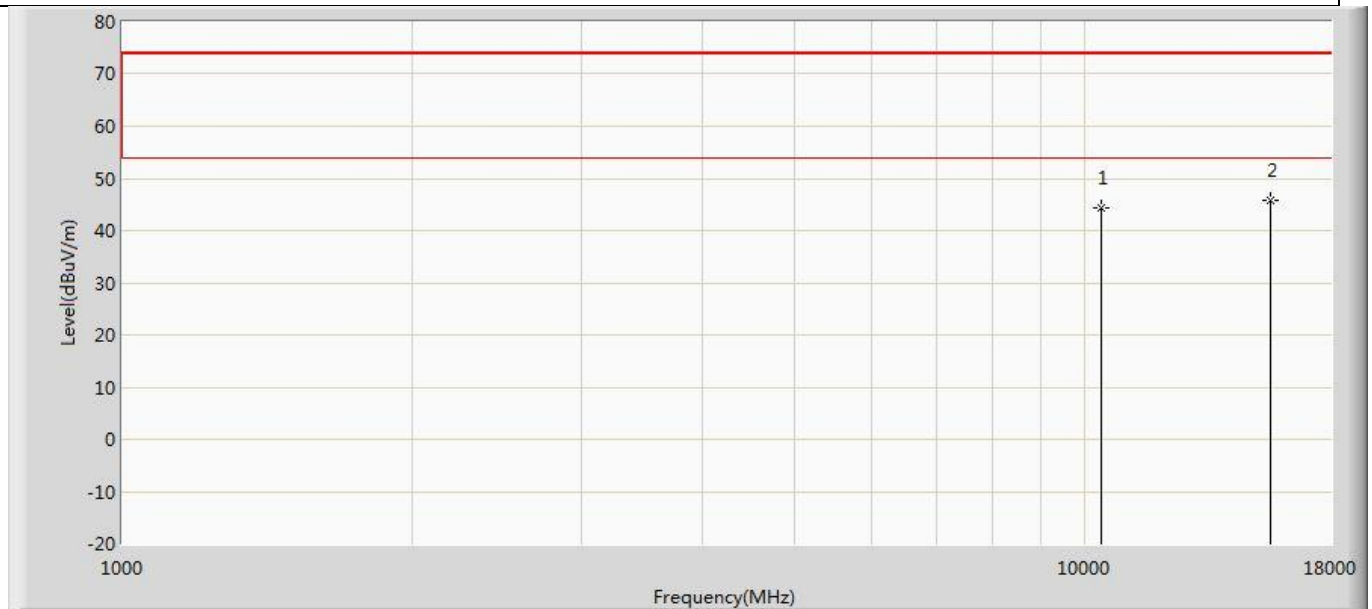


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	44.289	39.848	-29.711	74.000	4.442	PK
2	*	15570.000	45.866	37.347	-28.134	74.000	8.520	PK

Profile: 2150775R	Page No.: 455
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5230MHz by 802.11ax(40MHz) MIMO	

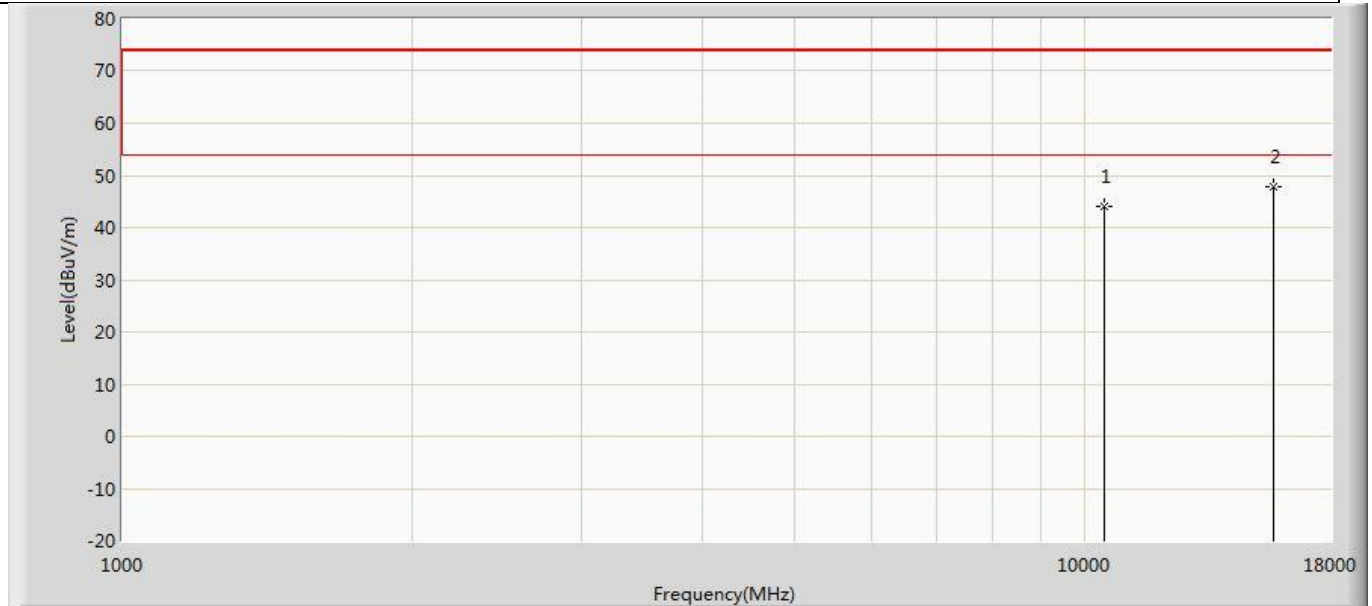


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	43.981	39.241	-30.019	74.000	4.740	PK
2	*	15690.000	47.890	38.466	-26.110	74.000	9.425	PK

Profile: 2150775R	Page No.: 456
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5230MHz by 802.11ax(40MHz) MIMO	

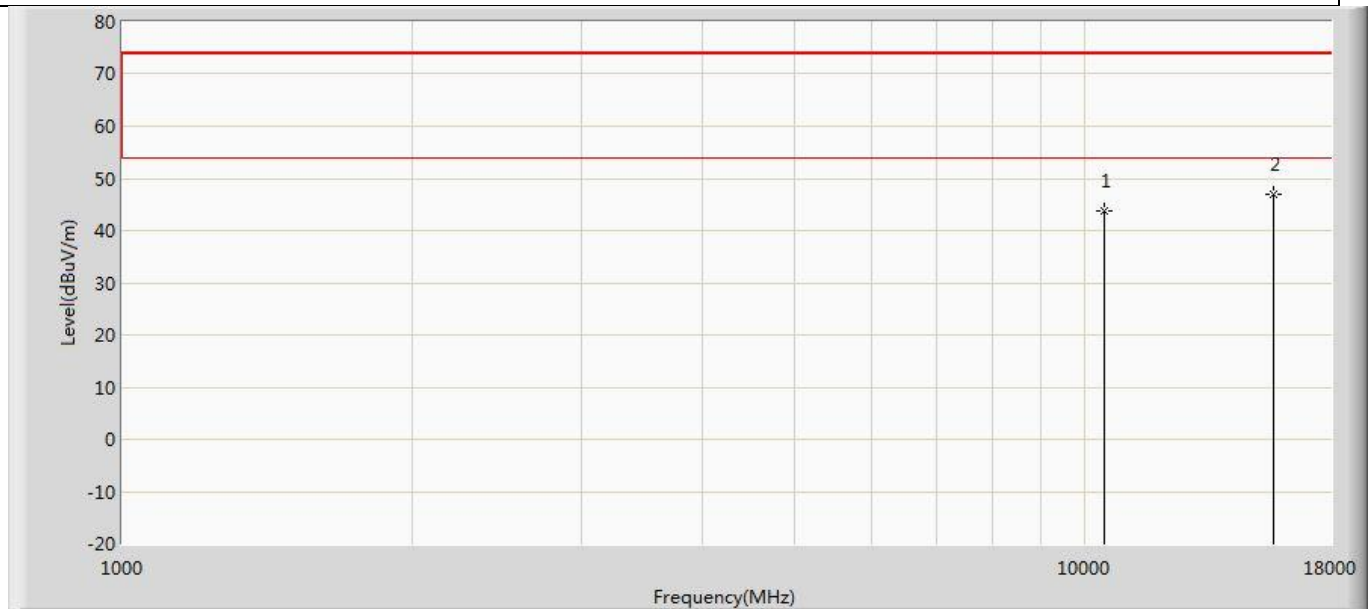


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	43.862	39.122	-30.138	74.000	4.740	PK
2	*	15690.000	46.921	37.497	-27.079	74.000	9.425	PK

Profile: 2150775R	Page No.: 457
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5270MHz by 802.11ax(40MHz) MIMO	

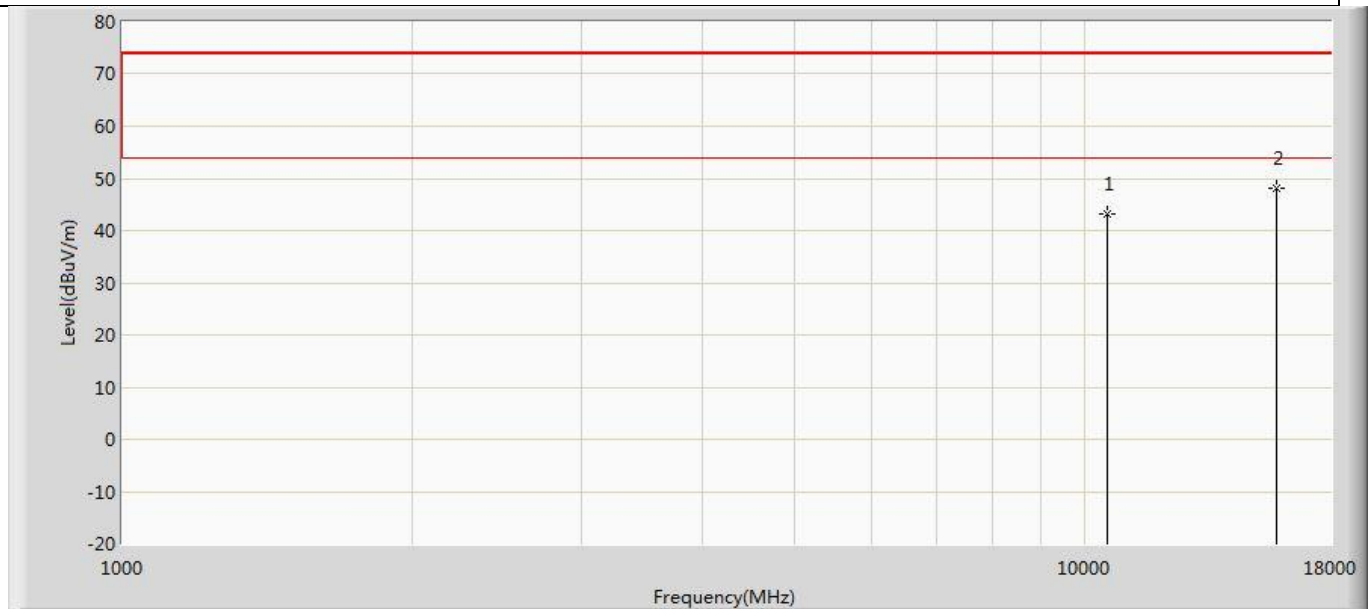


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	43.315	38.394	-30.685	74.000	4.921	PK
2	*	15810.000	48.165	39.492	-25.835	74.000	8.673	PK

Profile: 2150775R	Page No.: 458
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5270MHz by 802.11ax(40MHz) MIMO	

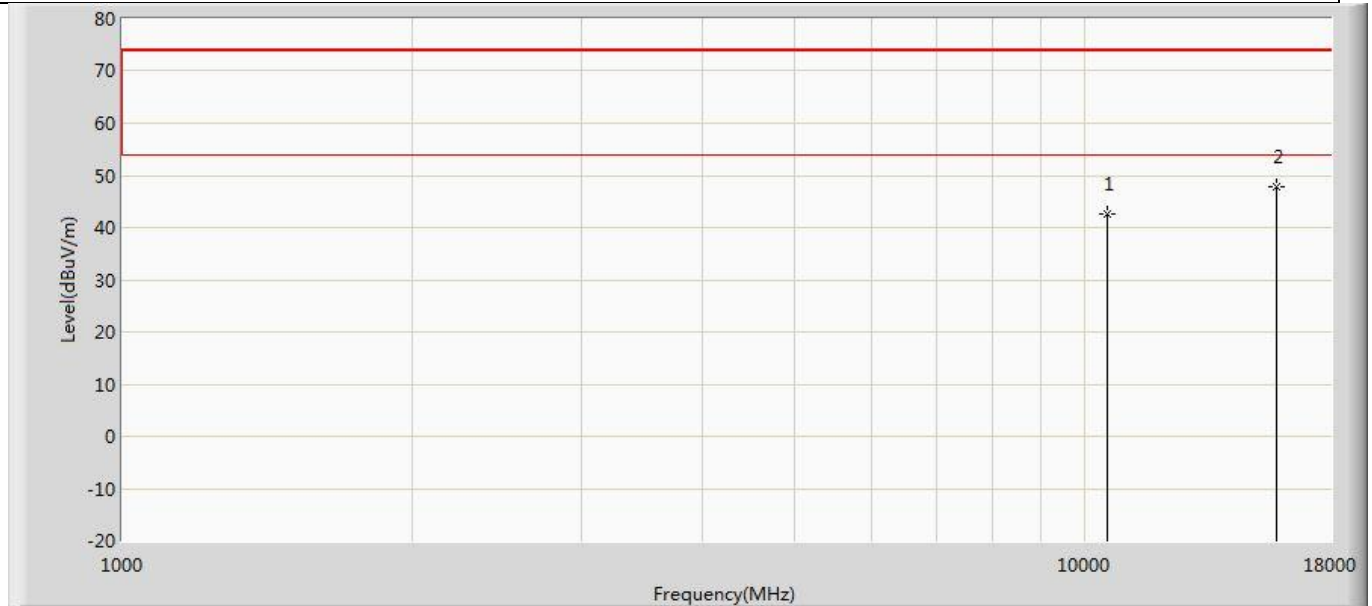


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	42.735	37.814	-31.265	74.000	4.921	PK
2	*	15810.000	47.835	39.162	-26.165	74.000	8.673	PK

Profile: 2150775R	Page No.: 459
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) MIMO	

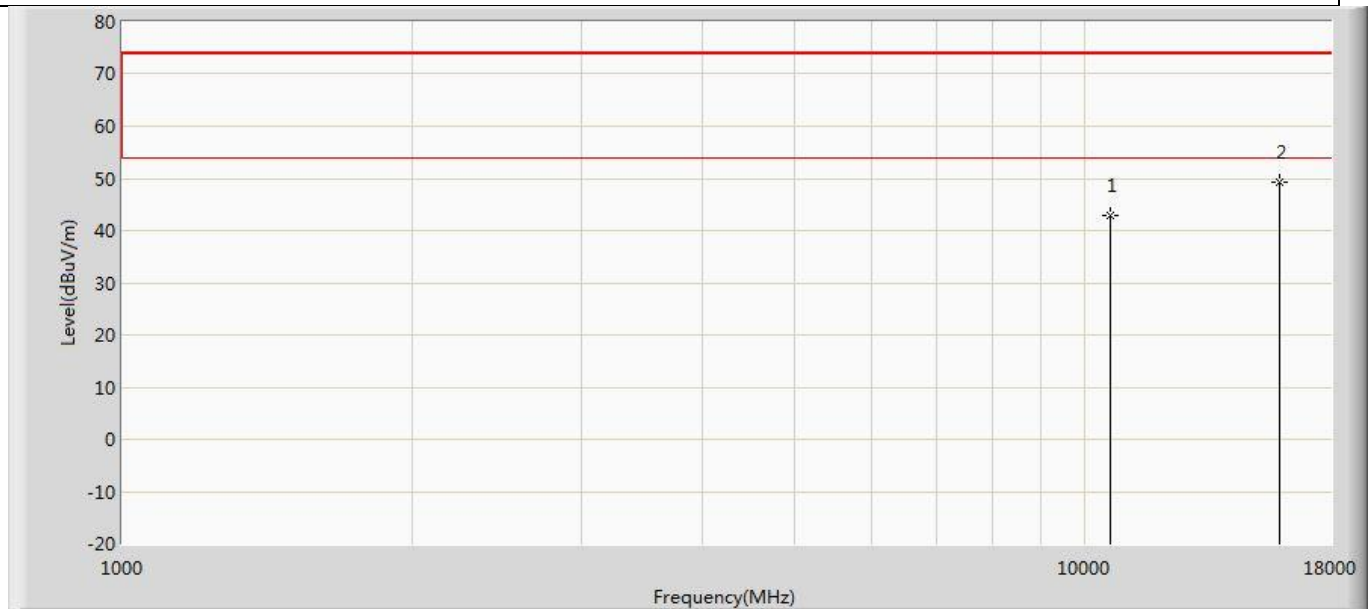


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	42.850	38.744	-31.150	74.000	4.105	PK
2	*	15930.000	49.409	39.760	-24.591	74.000	9.648	PK

Profile: 2150775R	Page No.: 460
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) MIMO	

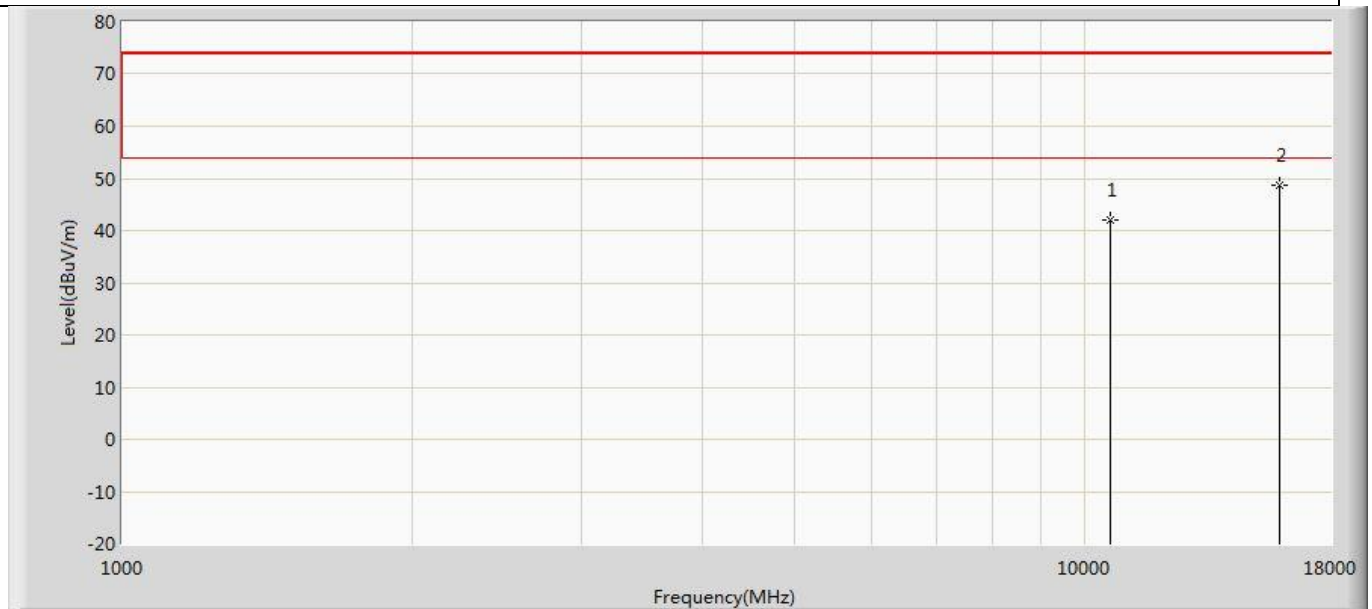


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	41.932	37.826	-32.068	74.000	4.105	PK
2	*	15930.000	48.584	38.935	-25.416	74.000	9.648	PK

Profile: 2150775R	Page No.: 461
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) MIMO	

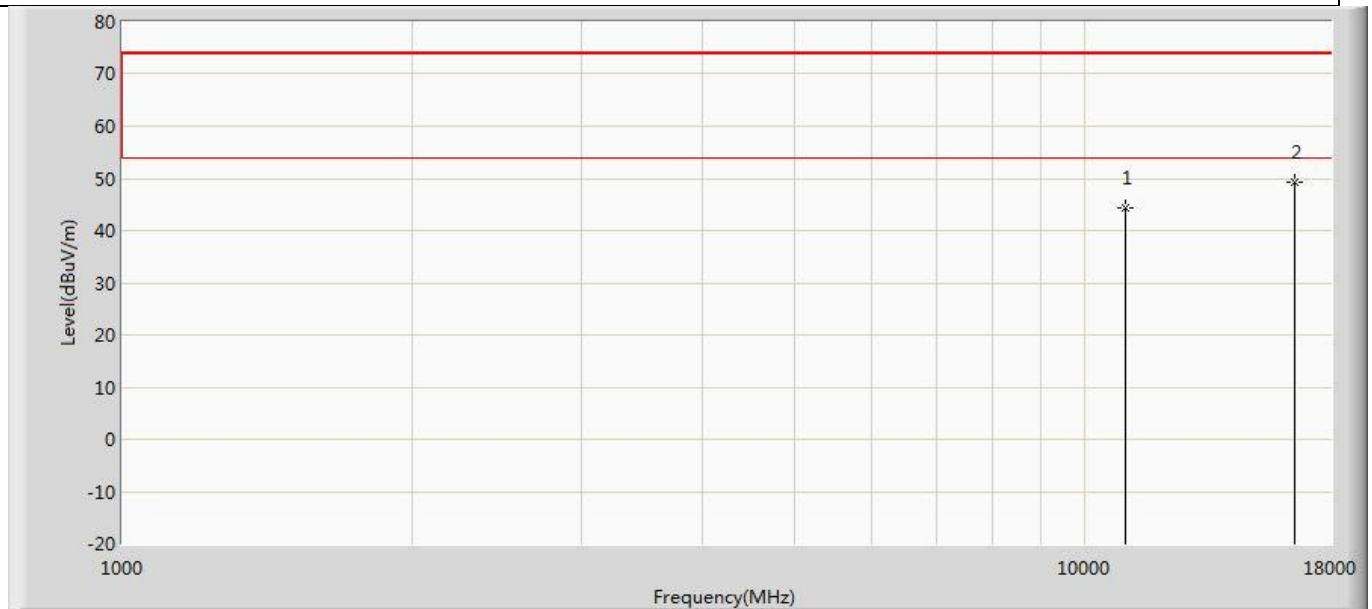


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	44.389	39.684	-29.611	74.000	4.706	PK
2	*	16530.000	49.409	39.804	-24.591	74.000	9.605	PK

Profile: 2150775R	Page No.: 462
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) MIMO	

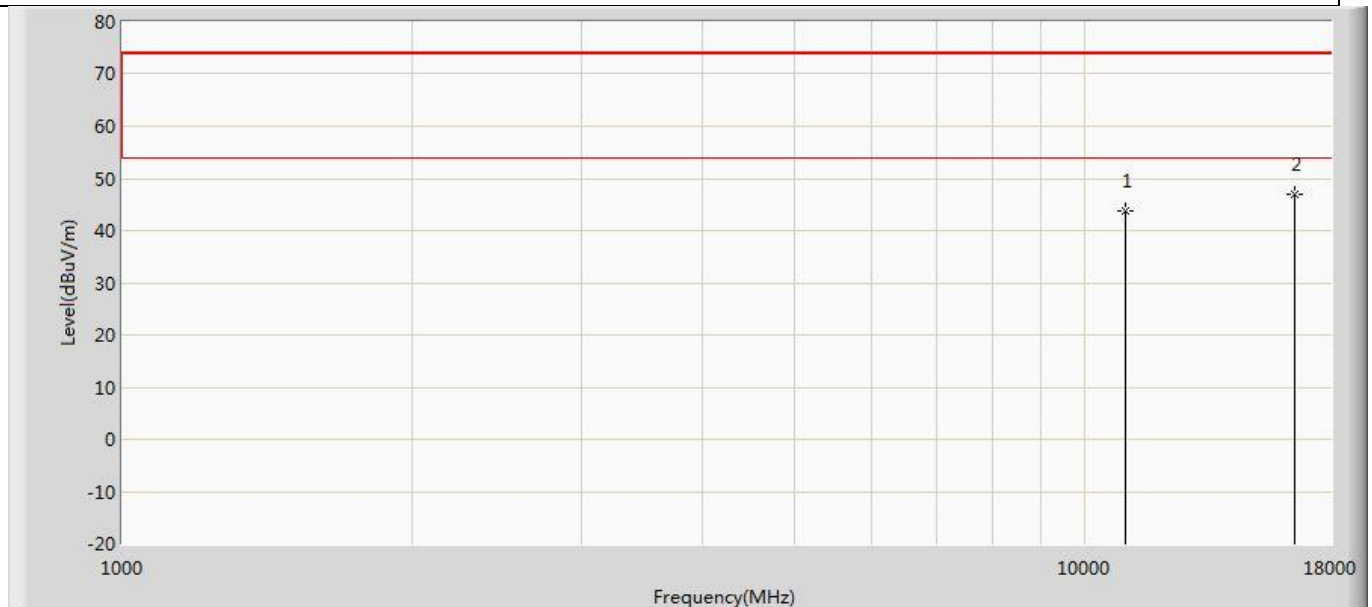


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	43.912	39.207	-30.088	74.000	4.706	PK
2	*	16530.000	46.908	37.303	-27.092	74.000	9.605	PK

Profile: 2150775R	Page No.: 463
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5590MHz by 802.11ax(40MHz) MIMO	

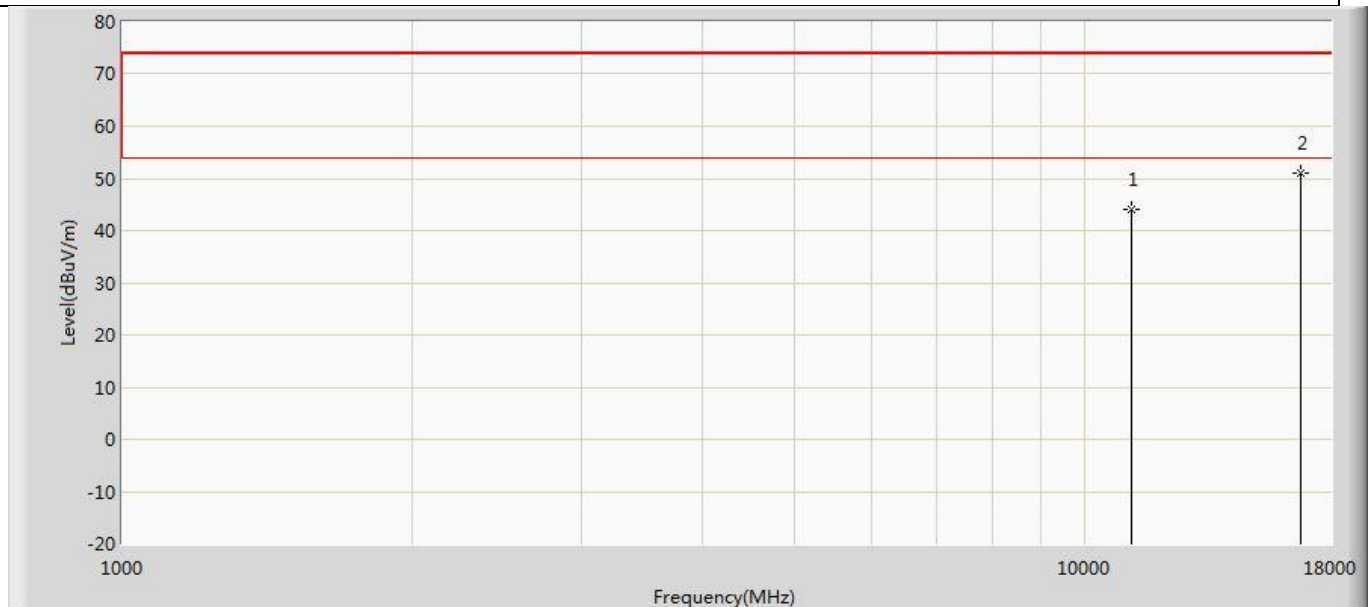


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	43.922	39.090	-30.078	74.000	4.832	PK
2	*	16770.000	51.054	40.104	-22.946	74.000	10.950	PK

Profile: 2150775R	Page No.: 464
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5590MHz by 802.11ax(40MHz) MIMO	

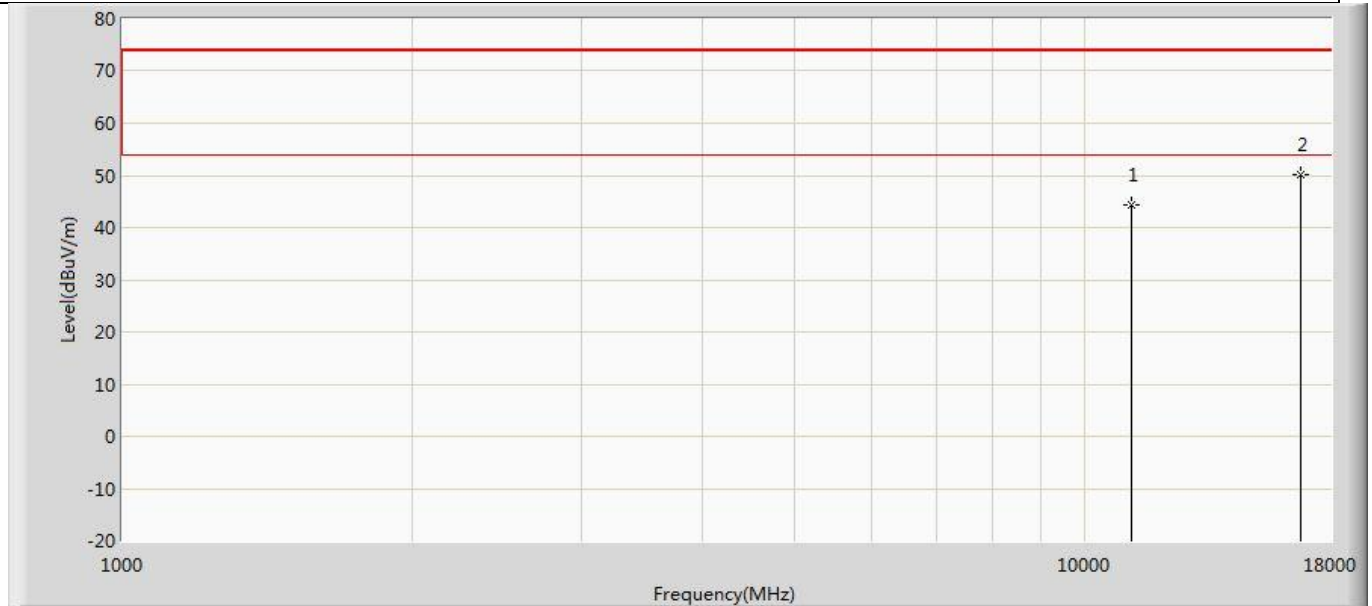


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	44.252	39.420	-29.748	74.000	4.832	PK
2	*	16770.000	50.009	39.059	-23.991	74.000	10.950	PK

Profile: 2150775R	Page No.: 465
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5670MHz by 802.11ax(40MHz) MIMO	

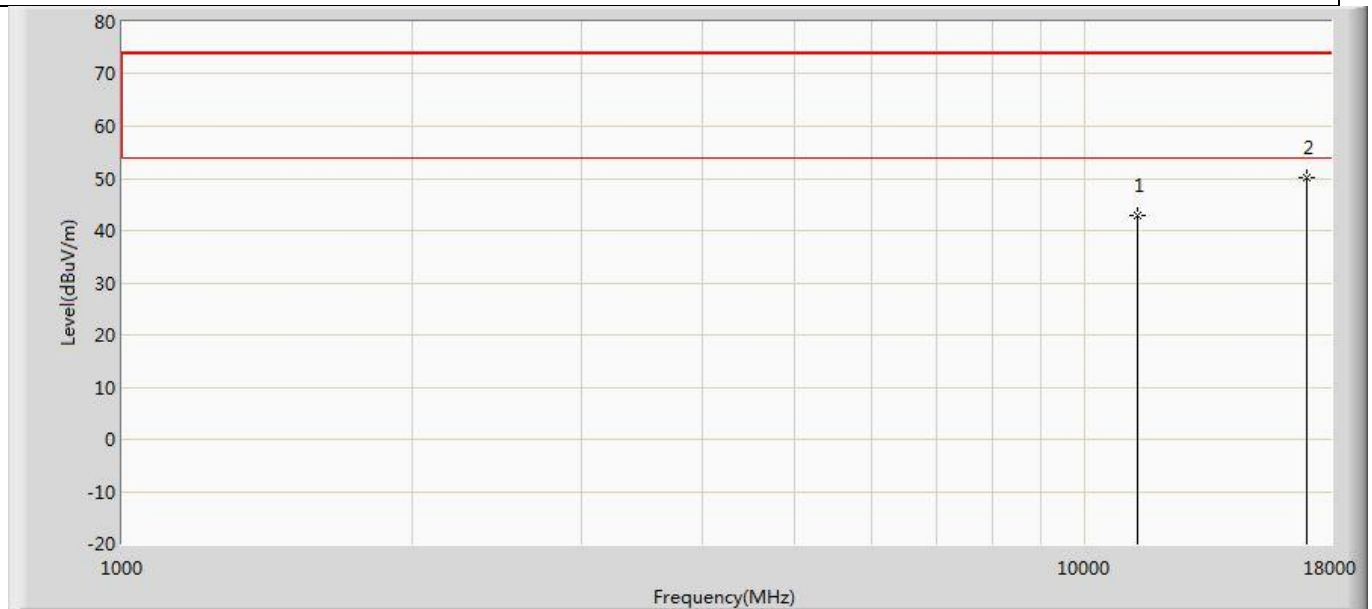


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	42.914	37.104	-31.086	74.000	5.810	PK
2	*	17010.000	50.212	39.274	-23.788	74.000	10.938	PK

Profile: 2150775R	Page No.: 466
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5670MHz by 802.11ax(40MHz) MIMO	

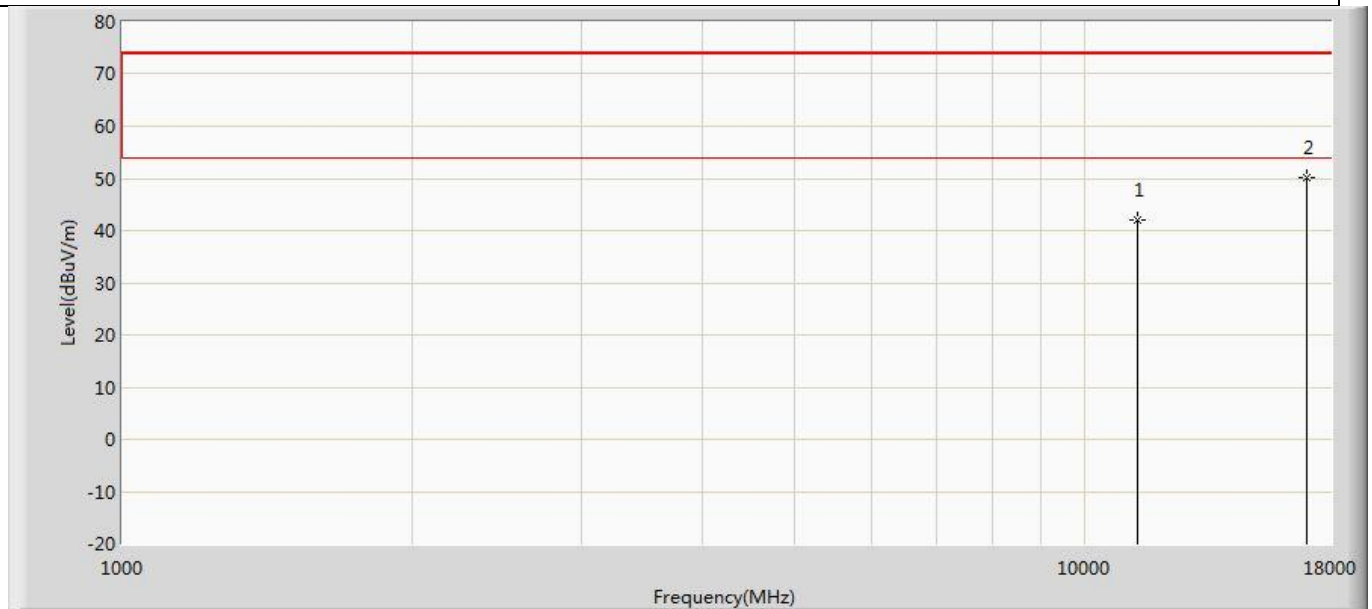


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	41.980	36.170	-32.020	74.000	5.810	PK
2	*	17010.000	50.036	39.098	-23.964	74.000	10.938	PK

Profile: 2150775R	Page No.: 467
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5755MHz by 802.11ax(40MHz) MIMO	

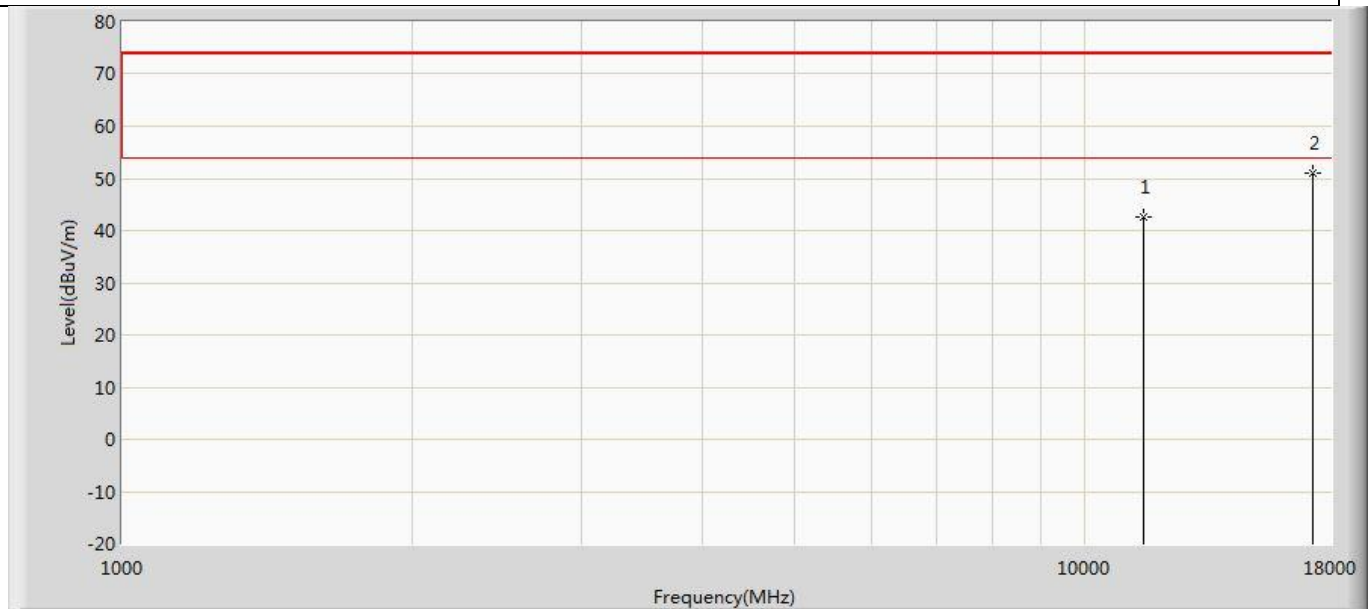


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	42.640	37.927	-31.360	74.000	4.713	PK
2	*	17265.000	51.017	38.541	-22.983	74.000	12.476	PK

Profile: 2150775R	Page No.: 468
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5755MHz by 802.11ax(40MHz) MIMO	

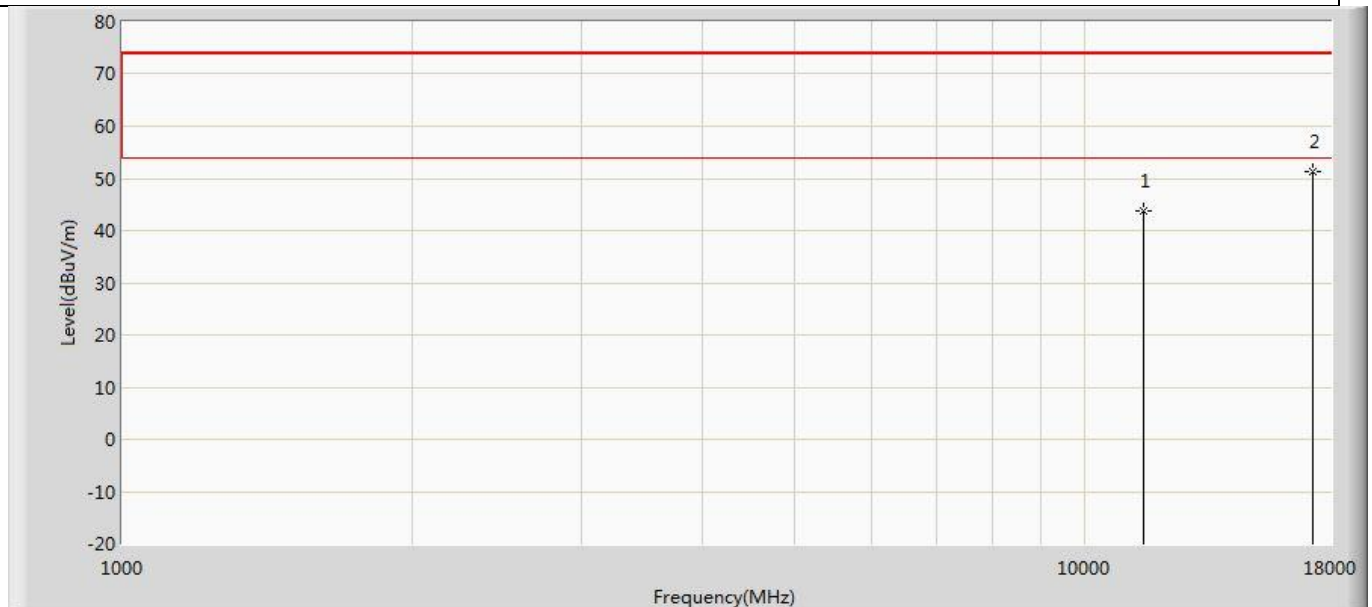


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	43.677	38.964	-30.323	74.000	4.713	PK
2	*	17265.000	51.439	38.963	-22.561	74.000	12.476	PK

Profile: 2150775R	Page No.: 469
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5795MHz by 802.11ax(40MHz) MIMO	

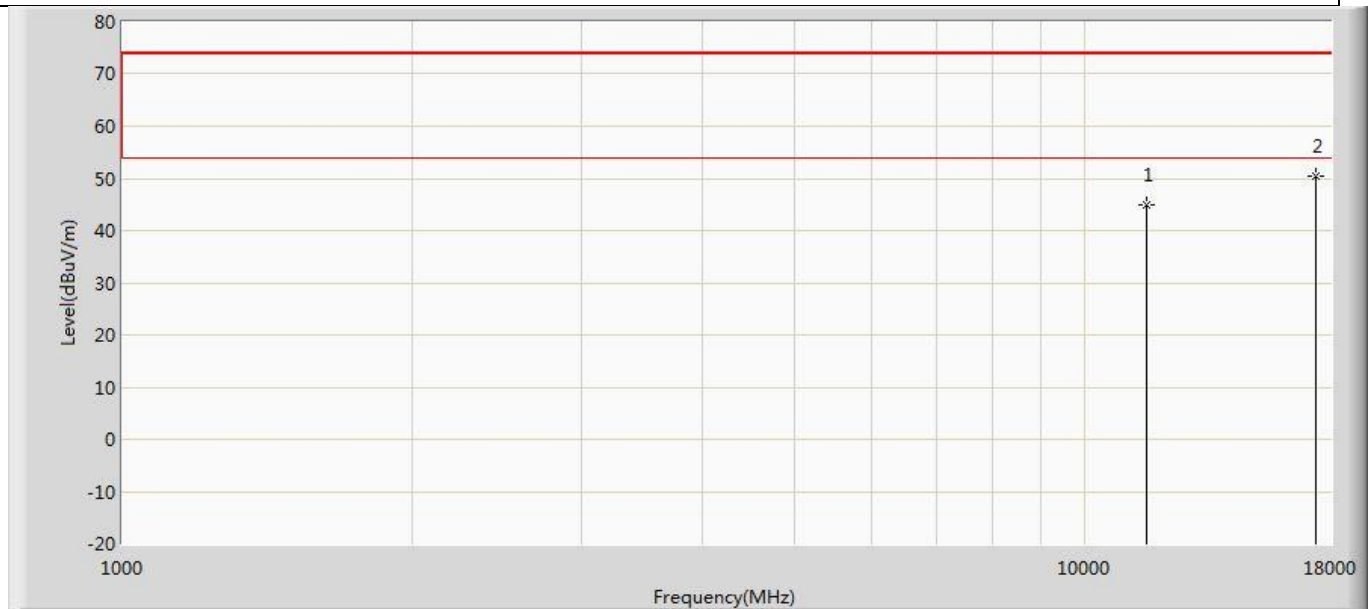


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	44.832	38.686	-29.168	74.000	6.146	PK
2	*	17385.000	50.327	38.955	-23.673	74.000	11.373	PK

Profile: 2150775R	Page No.: 470
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5795MHz by 802.11ax(40MHz) MIMO	

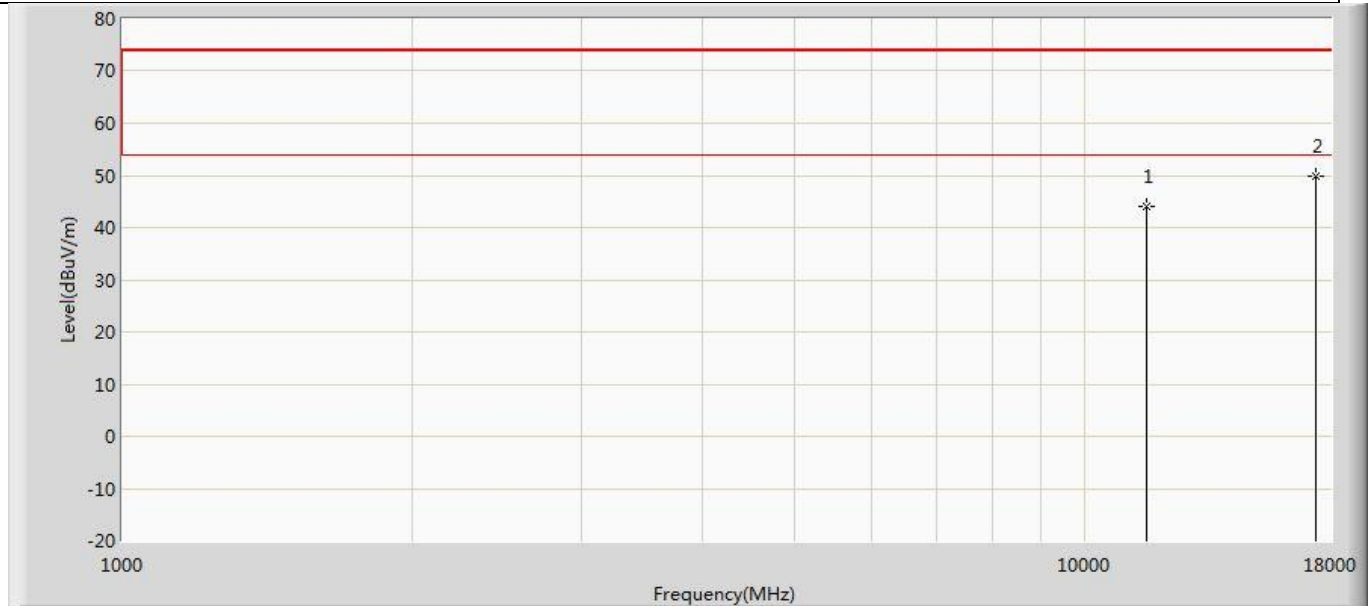


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	44.119	37.973	-29.881	74.000	6.146	PK
2	*	17385.000	49.808	38.436	-24.192	74.000	11.373	PK

Profile: 2150775R	Page No.: 471
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) MIMO	

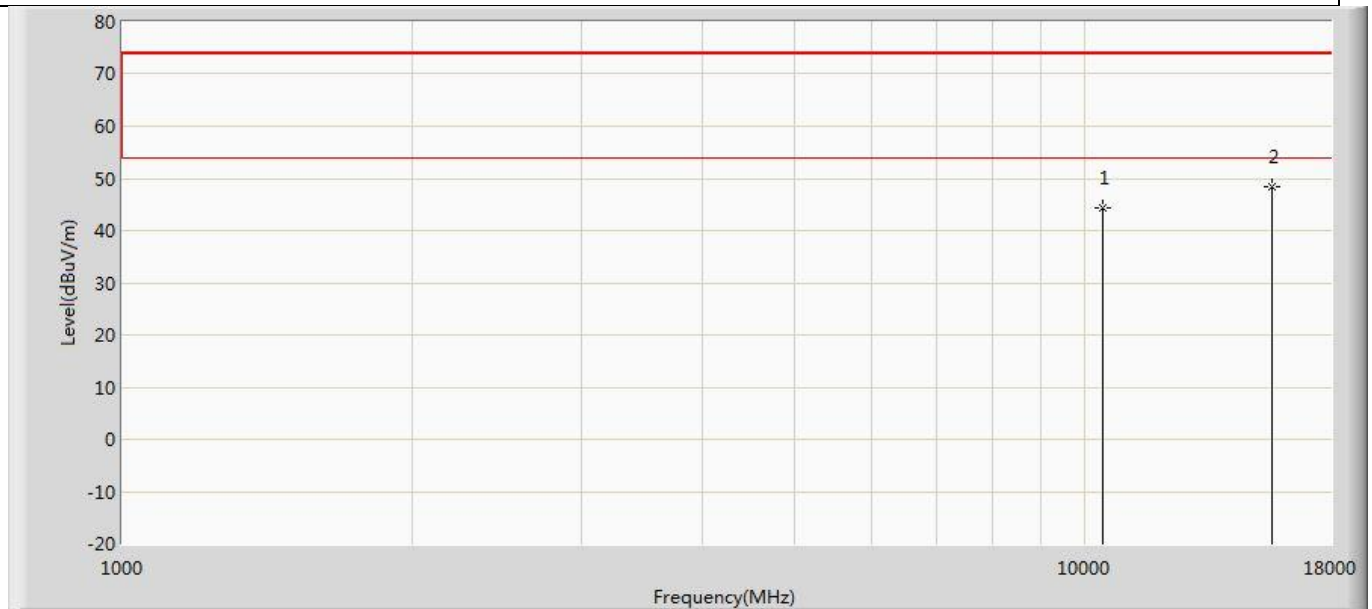


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	44.337	39.972	-29.663	74.000	4.365	PK
2	*	15630.000	48.386	39.833	-25.614	74.000	8.553	PK

Profile: 2150775R	Page No.: 472
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) MIMO	

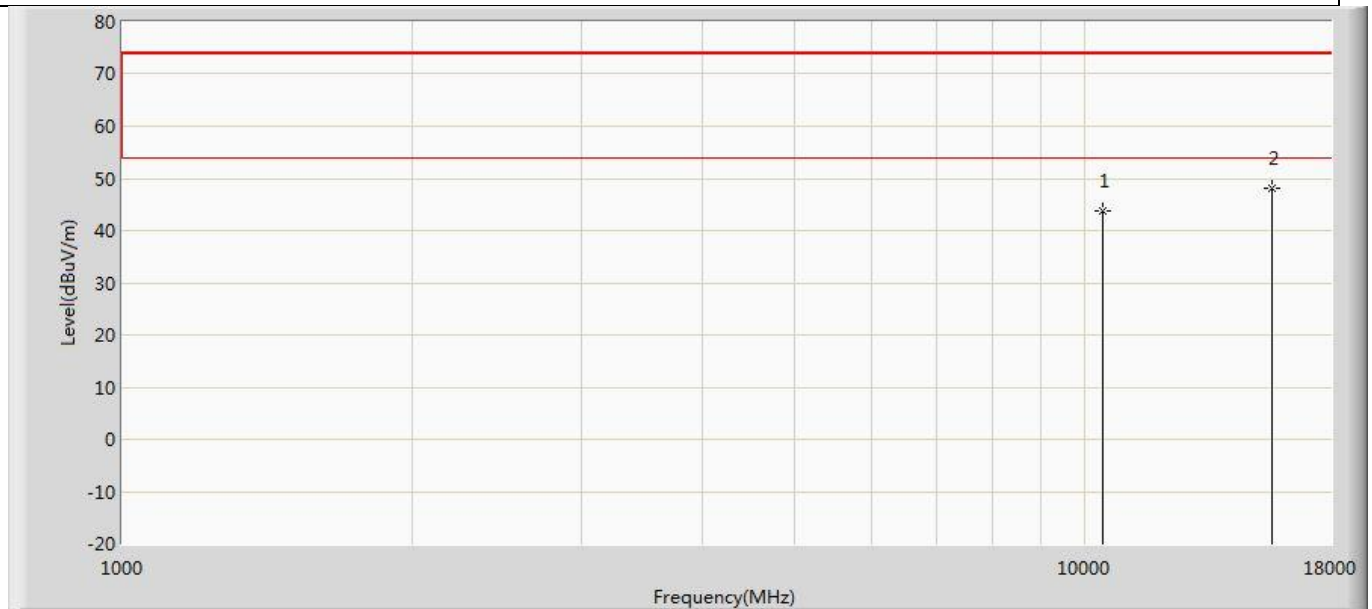


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	43.780	39.415	-30.220	74.000	4.365	PK
2	*	15630.000	48.077	39.524	-25.923	74.000	8.553	PK

Profile: 2150775R	Page No.: 473
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

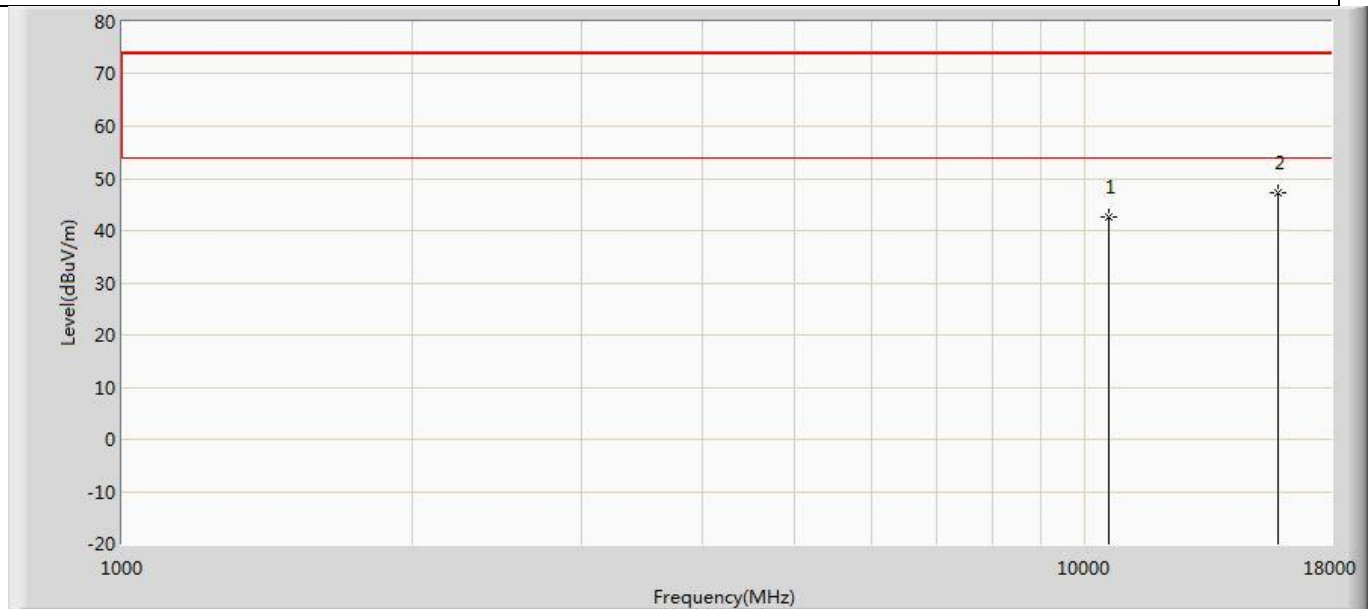


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	42.626	38.551	-31.374	74.000	4.075	PK
2	*	15870.000	47.245	38.741	-26.755	74.000	8.503	PK

Profile: 2150775R	Page No.: 474
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

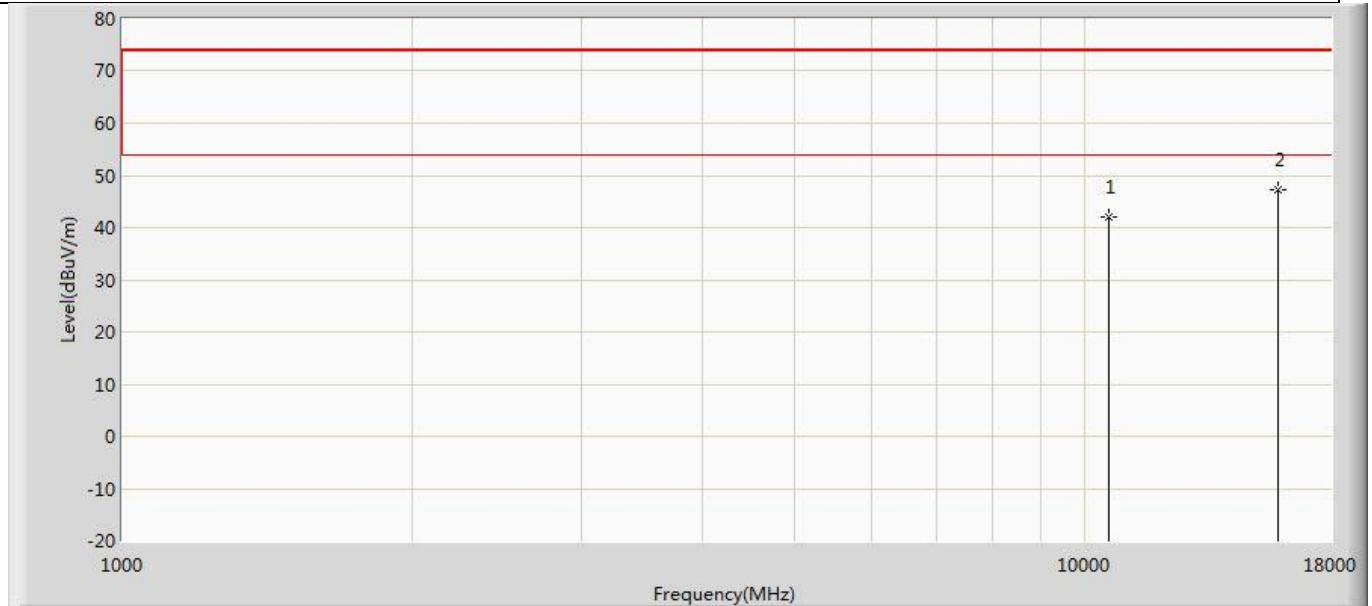


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	41.957	37.882	-32.043	74.000	4.075	PK
2	*	15870.000	47.128	38.624	-26.872	74.000	8.503	PK

Profile: 2150775R	Page No.: 475
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

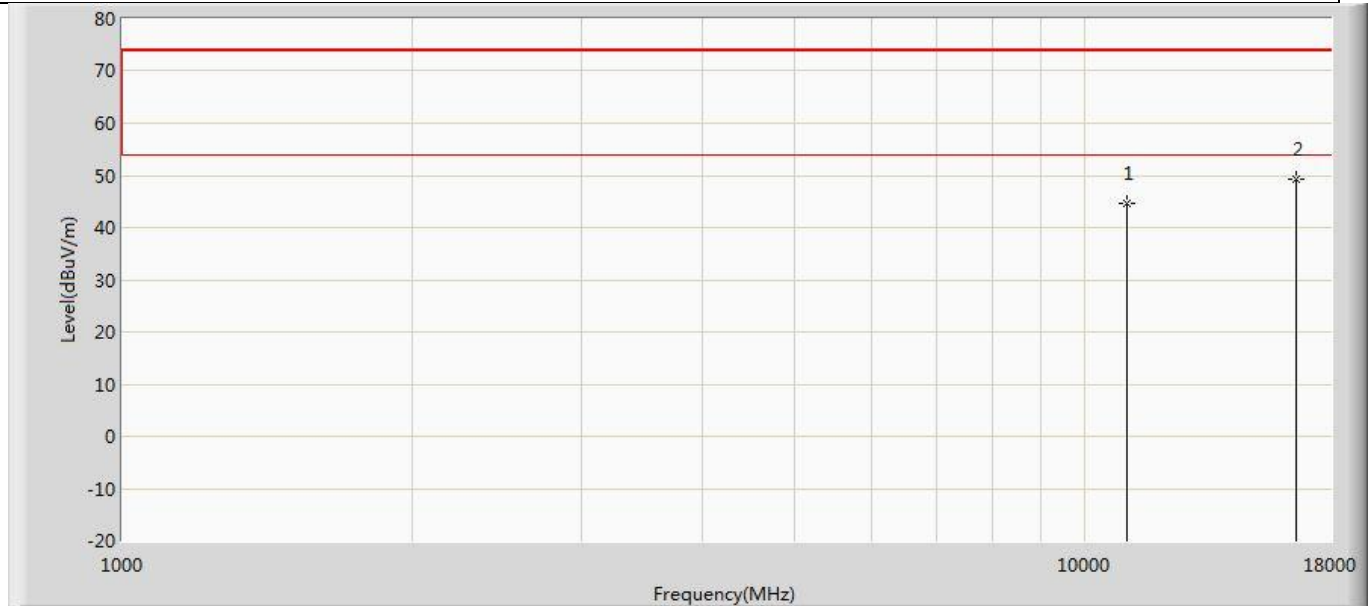


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	44.596	40.716	-29.404	74.000	3.879	PK
2	*	16590.000	49.176	37.907	-24.824	74.000	11.269	PK

Profile: 2150775R	Page No.: 476
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

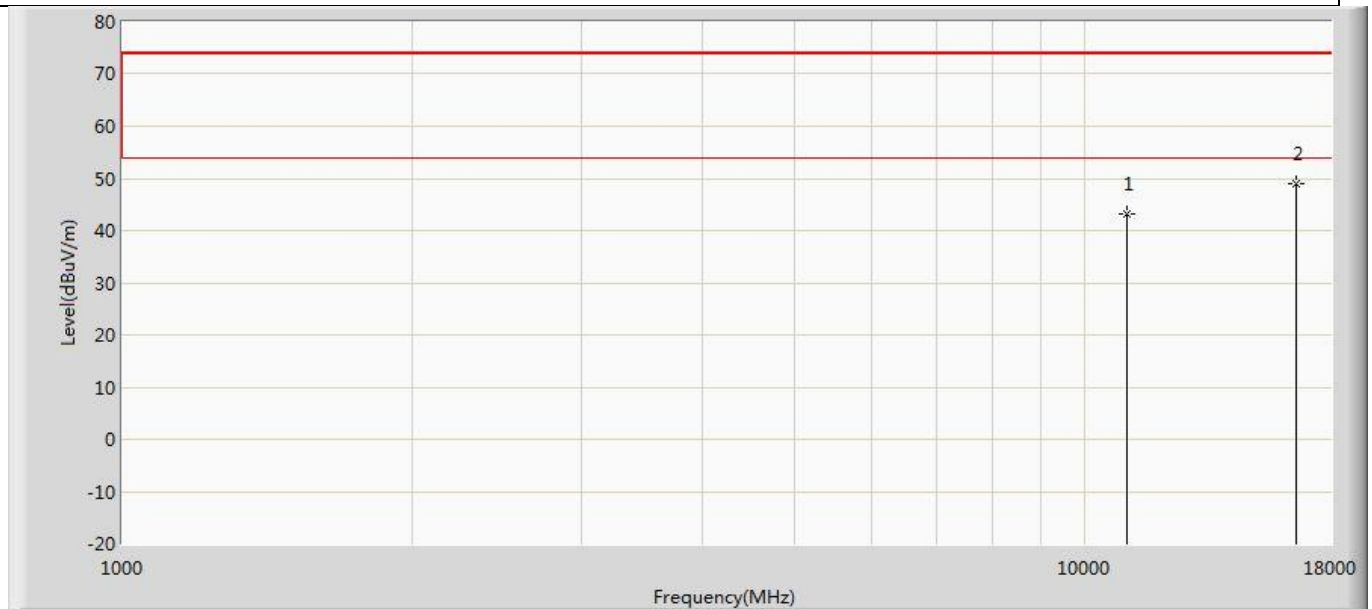


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	43.211	39.331	-30.789	74.000	3.879	PK
2	*	16590.000	48.961	37.692	-25.039	74.000	11.269	PK

Profile: 2150775R	Page No.: 477
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5775MHz by 802.11ax(80MHz) MIMO	

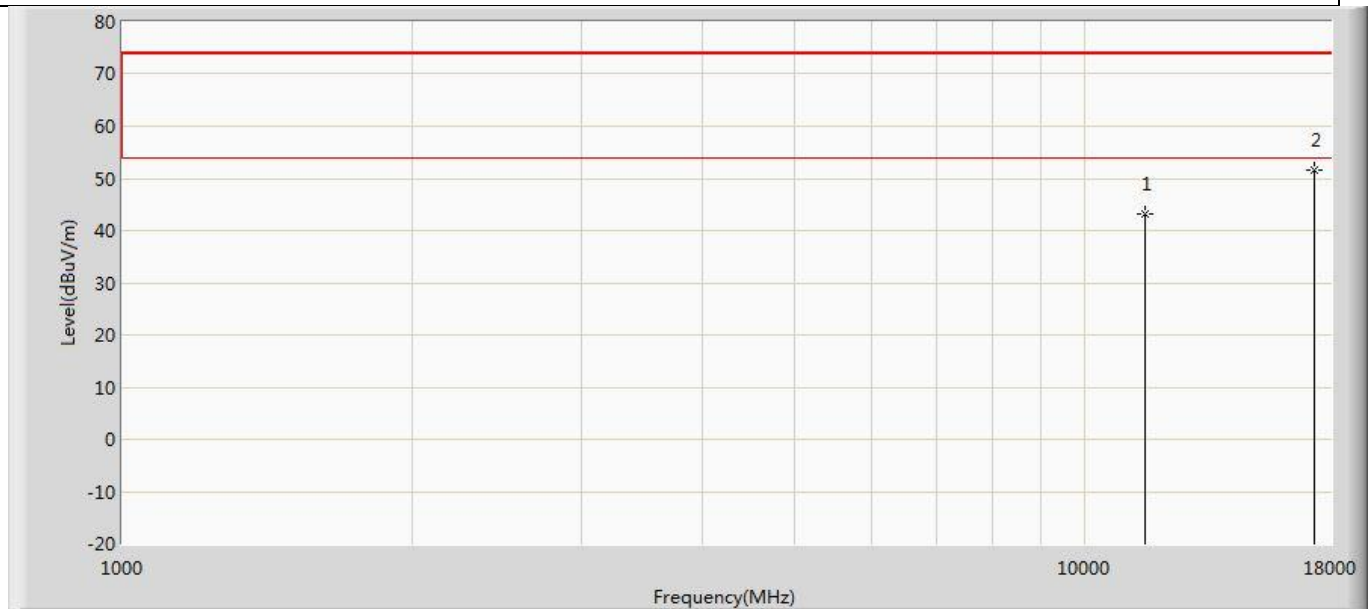

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	43.318	37.669	-30.682	74.000	5.649	PK
2	*	17325.000	51.722	39.779	-22.278	74.000	11.943	PK

Profile: 2150775R	Page No.: 478
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 00:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5775MHz by 802.11ax(80MHz) MIMO	

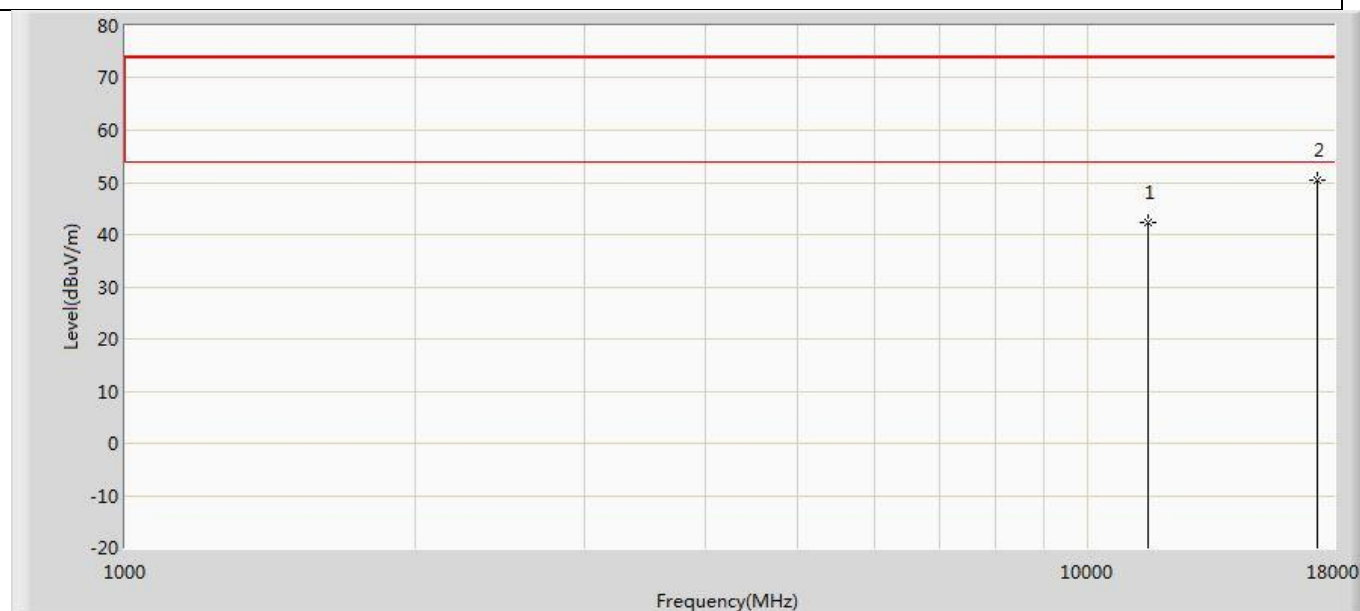


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	42.333	36.684	-31.667	74.000	5.649	PK
2	*	17325.000	50.532	38.589	-23.468	74.000	11.943	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. As the radiated emission was performed, so conducted emission was not tested.


The worst case of Radiated Emission below 1GHz:

Profile: 2150775R	Page No.: 13
Engineer: wangyingfei	
Site: AC2	Time: 2021/06/15 - 22:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Simultaneously transmit by BT+WIFI	

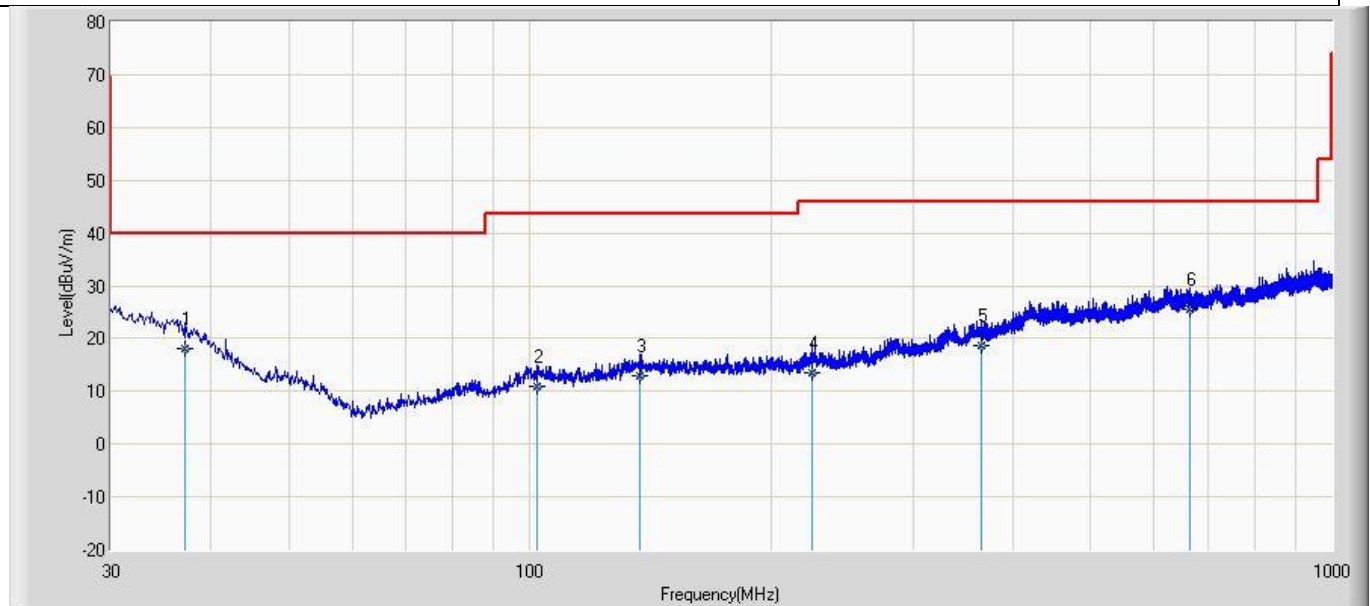

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		37.033	18.169	-6.437	-21.831	40.000	24.606	200	217	QP
2		102.144	11.015	-5.529	-32.485	43.500	16.543	100	108	QP
3		136.821	12.949	-4.602	-30.551	43.500	17.551	200	197	QP
4		224.849	13.574	-5.017	-32.426	46.000	18.591	100	307	QP
5		365.135	18.641	-5.221	-27.359	46.000	23.862	100	55	QP
6	*	665.107	25.685	-3.572	-20.315	46.000	29.257	100	248	QP

Profile: 2150775R	Page No.: 14
Engineer: wangyingfei	
Site: AC2	Time: 2021/06/15 - 22:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Simultaneously transmit by BT+WIFI	

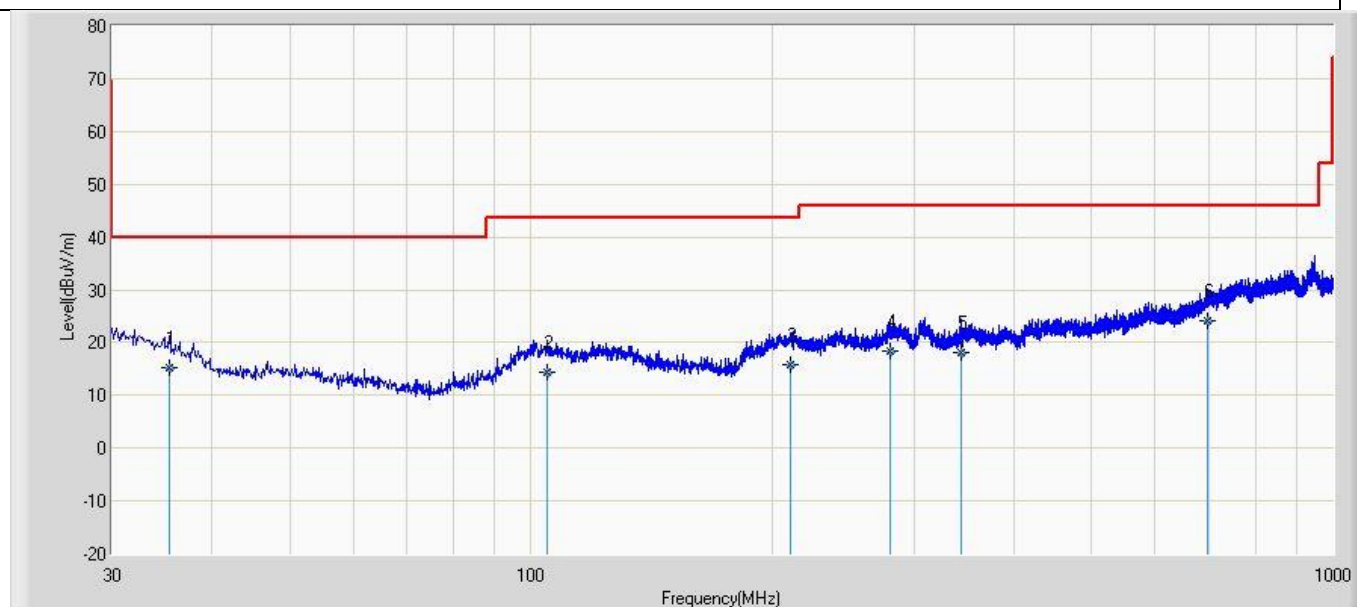


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		35.335	15.245	-6.948	-24.755	40.000	22.193	100	227	QP
2		104.569	14.442	-7.491	-29.058	43.500	21.934	100	169	QP
3		210.420	15.863	-7.358	-27.637	43.500	23.221	200	316	QP
4		280.503	18.429	-6.108	-27.571	46.000	24.537	200	127	QP
5		343.189	17.998	-5.623	-28.002	46.000	23.621	100	95	QP
6	*	698.088	24.167	-5.678	-21.833	46.000	29.846	200	268	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

4.3 Emission bandwidth**VERDICT: PASS****4.3.1 Limit**

Standard	FCC CFR Title 47 Part 15 Subpart E: Section 15.407
N/A	

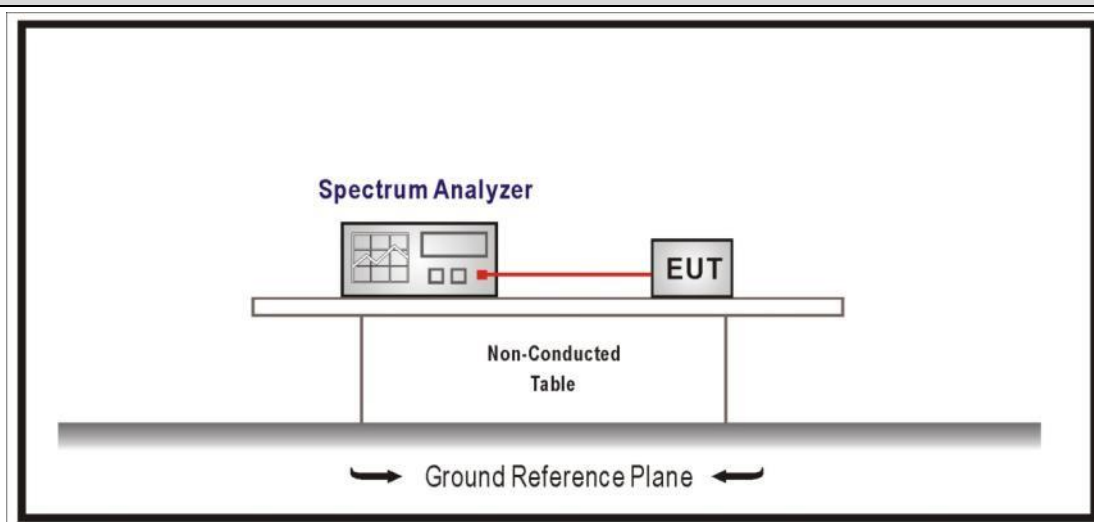4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule		Chapter	Description
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
☒	FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
☐	FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☐	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

4.3.4 Test Data

Ant 1

Mode	CH.	Test Freq. (MHz)	26dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
1	36	5180	19.87	16.474	5171.763	Pass
	44	5220	19.42	16.446	N/A	Pass
	48	5240	18.86	16.428	5248.241	Pass
	52	5260	20.45	16.428	N/A	Pass
	60	5300	19.30	16.384	N/A	Pass
	64	5320	19.11	16.424	N/A	Pass
	100	5500	18.95	16.510	N/A	Pass
	116	5580	18.95	16.416	N/A	Pass
	140	5700	18.91	16.410	N/A	Pass
	149	5745	N/A	16.391	N/A	Pass
	157	5785	N/A	16.463	N/A	Pass
	165	5825	N/A	16.457	N/A	Pass
2	36	5180	20.82	17.646	5171.177	Pass
	44	5220	20.03	17.638	N/A	Pass
	48	5240	20.26	17.654	5248.827	Pass
	52	5260	19.88	17.691	N/A	Pass
	60	5300	20.06	17.662	N/A	Pass
	64	5320	20.07	17.650	N/A	Pass
	100	5500	20.32	17.552	N/A	Pass
	116	5580	20.25	17.608	N/A	Pass
	140	5700	20.02	17.611	N/A	Pass
	149	5745	N/A	17.579	N/A	Pass
	157	5785	N/A	17.609	N/A	Pass
	165	5825	N/A	17.628	N/A	Pass
3	38	5190	51.77	36.069	5171.965	Pass
	46	5230	40.18	36.080	5248.04	Pass
	54	5270	41.21	36.133	N/A	Pass
	62	5310	40.48	36.126	N/A	Pass
	102	5510	40.18	36.093	N/A	Pass
	110	5590	40.90	35.979	N/A	Pass
	134	5670	40.72	36.034	N/A	Pass
	151	5755	N/A	36.086	N/A	Pass
	159	5795	N/A	36.101	N/A	Pass
4	36	5180	19.93	17.637	5171.181	Pass
	44	5220	20.28	17.616	N/A	Pass
	48	5240	20.14	17.639	5248.819	Pass
	52	5260	20.77	17.643	N/A	Pass
	60	5300	19.99	17.651	N/A	Pass


	64	5320	20.09	17.634	N/A	Pass
	100	5500	20.53	17.553	N/A	Pass
	116	5580	19.73	17.567	N/A	Pass
	140	5700	19.90	17.583	N/A	Pass
	149	5745	N/A	17.608	N/A	Pass
	157	5785	N/A	17.598	N/A	Pass
	165	5825	N/A	17.646	N/A	Pass
5	38	5190	41.09	36.107	5171.946	Pass
	46	5230	40.21	36.056	5248.028	Pass
	54	5270	41.39	36.120	N/A	Pass
	62	5310	40.05	36.070	N/A	Pass
	102	5510	39.53	36.160	N/A	Pass
	110	5550	39.95	36.128	N/A	Pass
	134	5670	40.37	36.021	N/A	Pass
	151	5755	N/A	36.091	N/A	Pass
	159	5795	N/A	36.119	N/A	Pass
6	42	5210	82.60	75.538	5172.156/5247.844	Pass
	58	5290	82.45	75.668	N/A	Pass
	106	5530	82.05	75.468	N/A	Pass
	138	5690	82.01	75.459	N/A	Pass
	155	5775	N/A	75.773	N/A	Pass
7	36	5180	20.05	17.656	5171.172	Pass
	44	5220	19.84	17.627	N/A	Pass
	48	5240	20.16	17.666	5248.833	Pass
	52	5260	19.91	17.666	N/A	Pass
	60	5300	20.63	17.648	N/A	Pass
	64	5320	20.12	17.632	N/A	Pass
	100	5500	20.54	17.553	N/A	Pass
	116	5580	20.23	17.596	N/A	Pass
	140	5700	19.72	17.607	N/A	Pass
	149	5745	N/A	18.904	N/A	Pass
	157	5785	N/A	18.943	N/A	Pass
	165	5825	N/A	18.953	N/A	Pass
8	38	5190	40.25	36.090	5171.955	Pass
	46	5230	40.25	36.117	5248.058	Pass
	54	5270	41.57	36.150	N/A	Pass
	62	5310	40.15	36.075	N/A	Pass
	102	5510	39.84	36.073	N/A	Pass
	110	5590	40.33	36.106	N/A	Pass
	134	5670	40.13	36.103	N/A	Pass
	151	5755	N/A	37.772	N/A	Pass
	159	5795	N/A	37.765	N/A	Pass
9	42	5210	83.52	75.554	5172.233/5247.777	Pass
	58	5290	83.14	75.669	N/A	Pass

	106	5530	82.13	75.480	N/A	Pass
	138	5690	82.11	75360	N/A	Pass
	155	5775	N/A	75.505	N/A	Pass

Note 1 : The worst case of Emission Bandwidth as below:


Note 2: We have evaluated SISO/MIMO mode, shown in the report is the worst data.

Mode 7 CH48 (5240MHz)

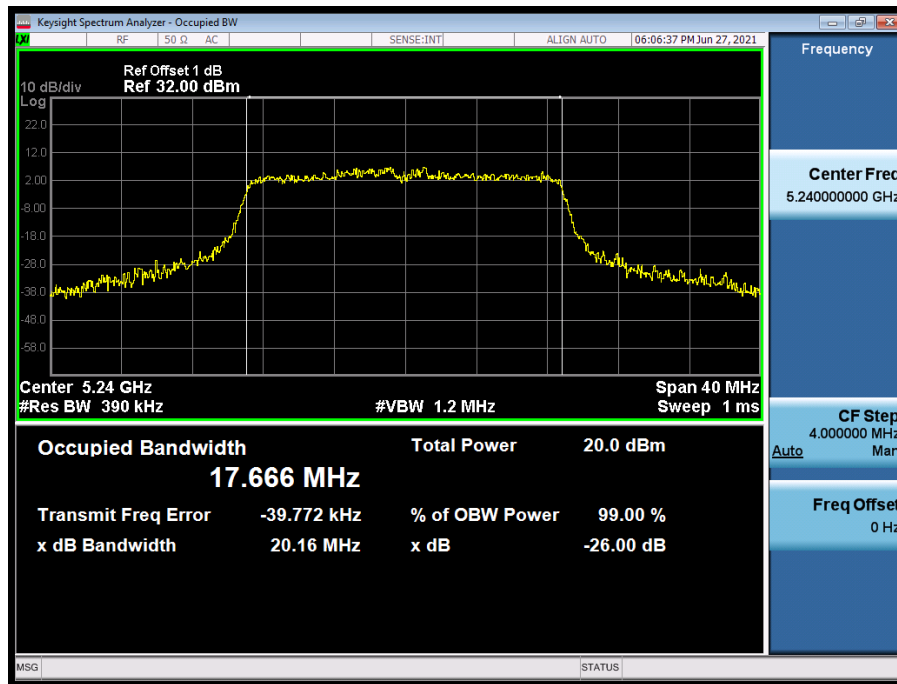

4.4 6dB bandwidth**VERDICT: PASS****4.4.1 Limit**

Standard	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)
6dB Bandwidth $\geq 500\text{KHz}$	

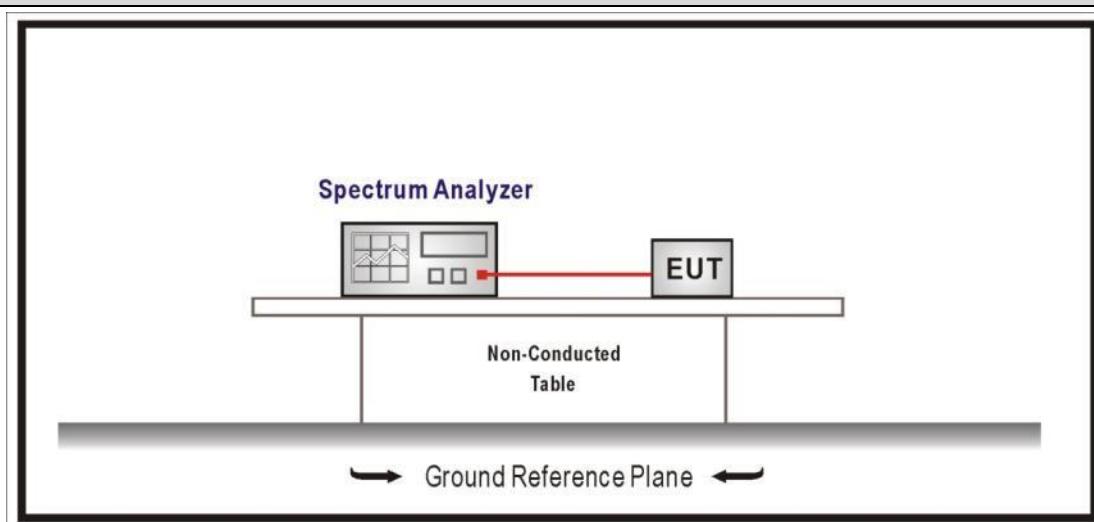4.4.2 Test Setup**4.4.3 Test Procedure**

References Rule		Chapter	Description
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
☐	FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
☒	FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☐	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth


4.4.4 Test Data

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	149	5745	15.36	>500	Pass
	157	5785	15.14	>500	Pass
	165	5825	15.16	>500	Pass
2	149	5745	17.66	>500	Pass
	157	5785	16.30	>500	Pass
	165	5825	17.26	>500	Pass
3	151	5755	32.90	>500	Pass
	159	5795	33.72	>500	Pass
4	149	5745	16.95	>500	Pass
	157	5785	17.59	>500	Pass
	165	5825	16.92	>500	Pass
5	151	5755	36.00	>500	Pass
	159	5795	36.04	>500	Pass
6	155	5775	69.31	>500	Pass
7	149	5745	16.67	>500	Pass
	157	5785	17.65	>500	Pass
	165	5825	16.78	>500	Pass
8	151	5755	35.70	>500	Pass
	159	5795	30.71	>500	Pass
9	155	5775	74.19	>500	Pass

Note 1 : The worst case of Occupied Bandwidth as below:


Note 2: We have evaluated SISO/MIMO mode, shown in the report is the worst data.

Mode 1 CH157(5785MHz)

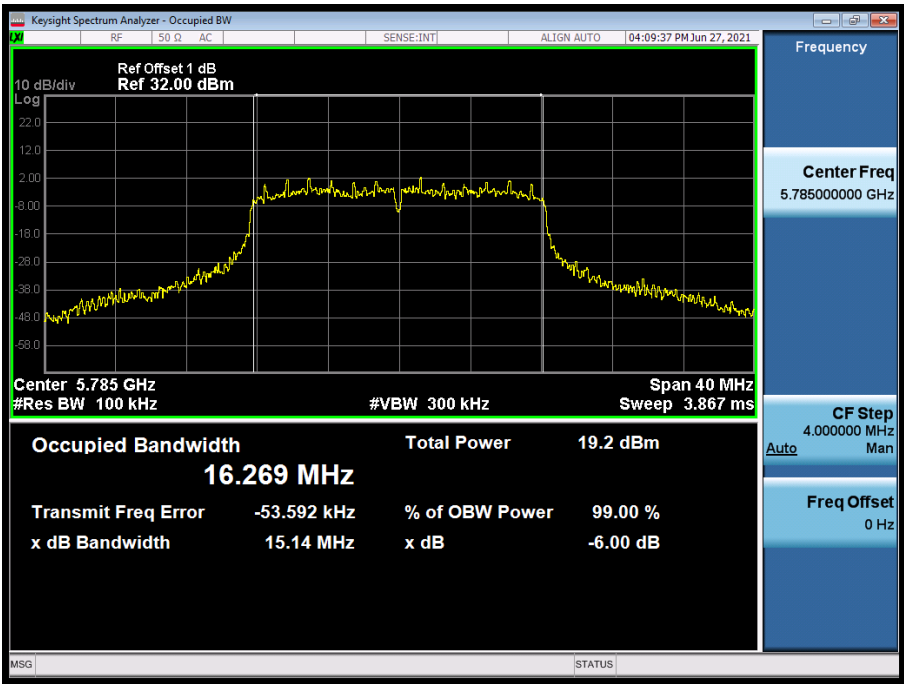

4.5 Duty cycle**VERDICT: PASS****4.5.1 Limit**

N/A

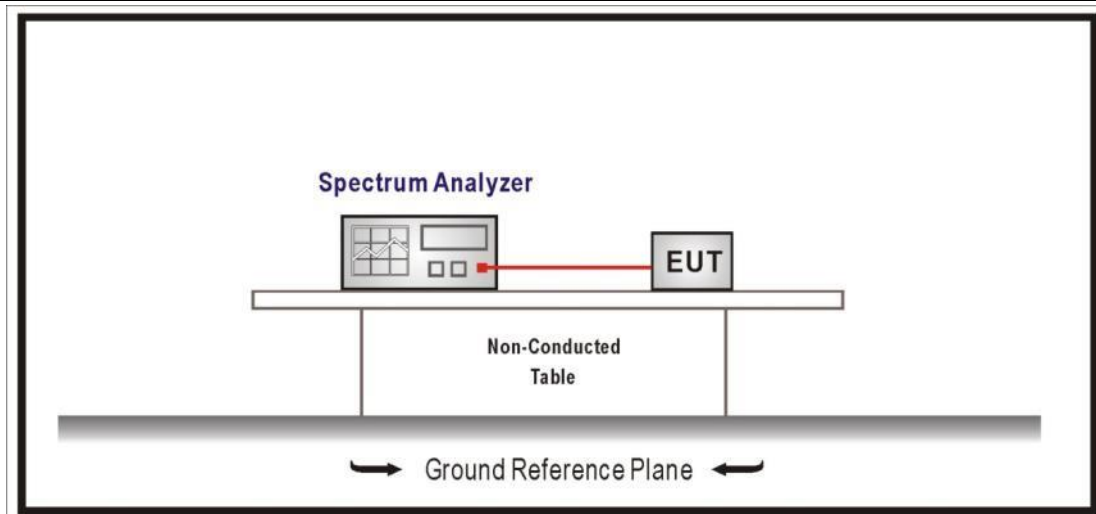4.5.2 Test Setup**4.5.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.5.4 Test Data


Radio 1:

Test Mode	Tx On (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle
1	0.231	5KHz	0.258	89.5%
2	--	10Hz	--	99%
3	5.383	10Hz	5.846	98.8%
4	--	10Hz	--	99%
5	5.370	10Hz	5.445	98.6%
6	5.355	10Hz	5.445	98.3%
7	--	10Hz	--	99%
8	5.385	10Hz	5.445	98.8%
9	5.385	10Hz	5.445	98.8%


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 789033, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.


Mode 1

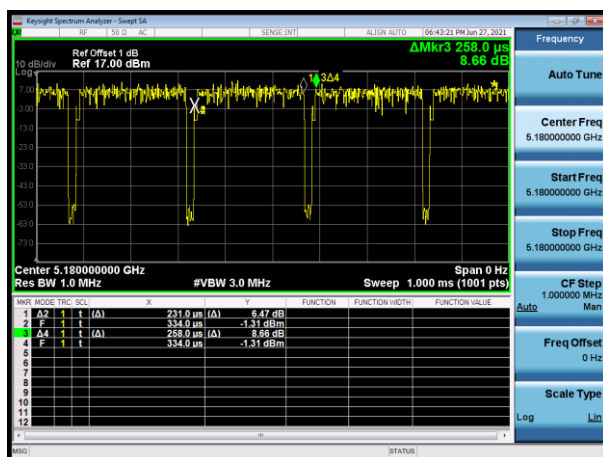


Mode 2

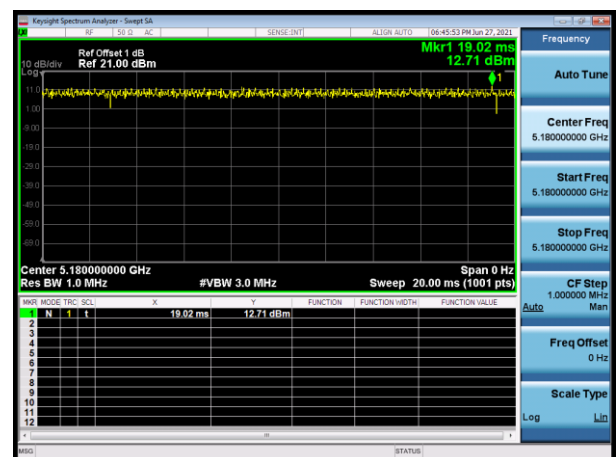


Mode 3

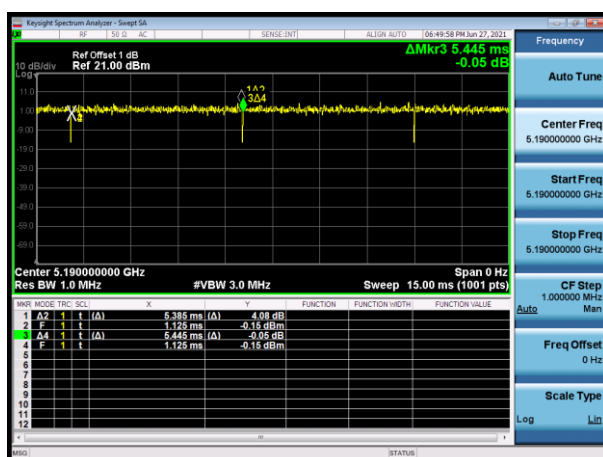


Mode 4

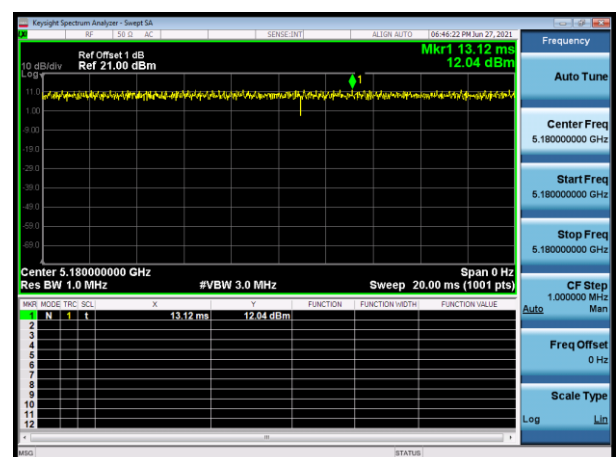


Mode 5

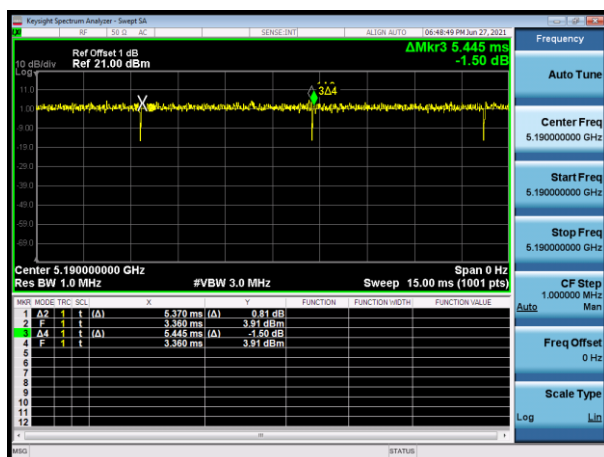


Mode 6

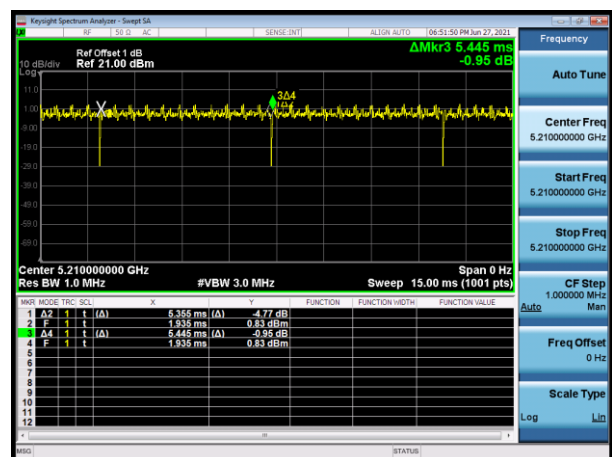


Mode 7

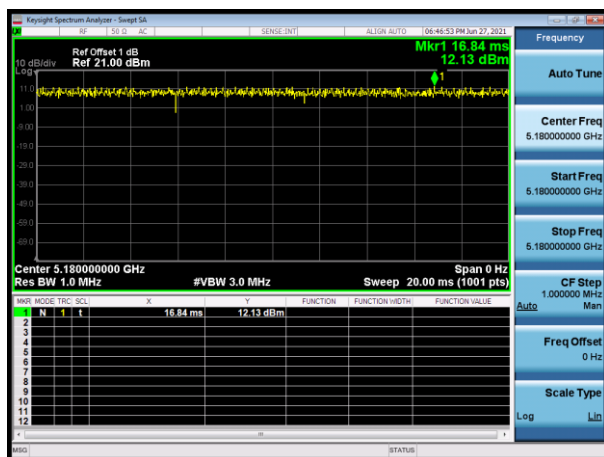

Mode 8

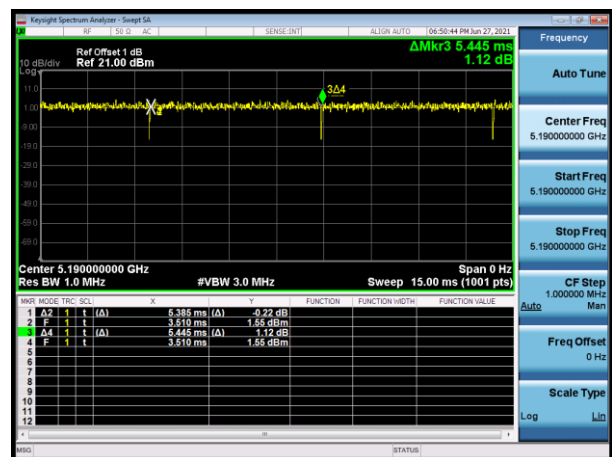

Mode 9

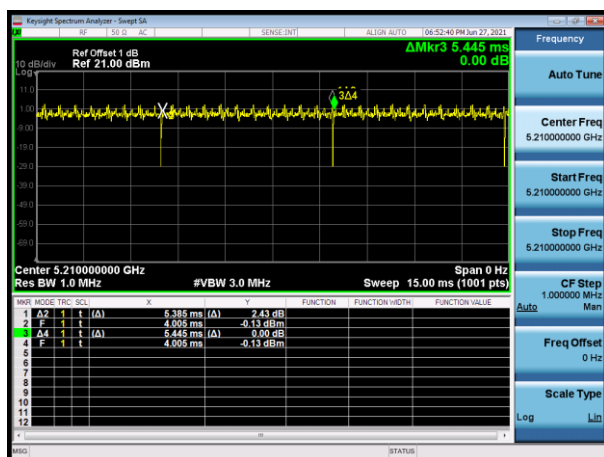


4.6 Power Output**VERDICT: PASS****4.6.1 Limit**

Standard		FCC CFR Title 47 Part 15 Subpart C&E
☒	For the band 5.15-5.25 GHz	
☐	Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees	
☐	Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$	
☐	Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 23)$	
☒	Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 24 - (G_{TX} - 6)$	
☒	For the band 5.25-5.35 GHz:	
☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$	
☒	For the 5.47-5.725 GHz:	
☒	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$	
☒	For the band 5.725-5.85 GHz:	
☒	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6 \text{ dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$	
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W	

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

4.6.2 Test Setup

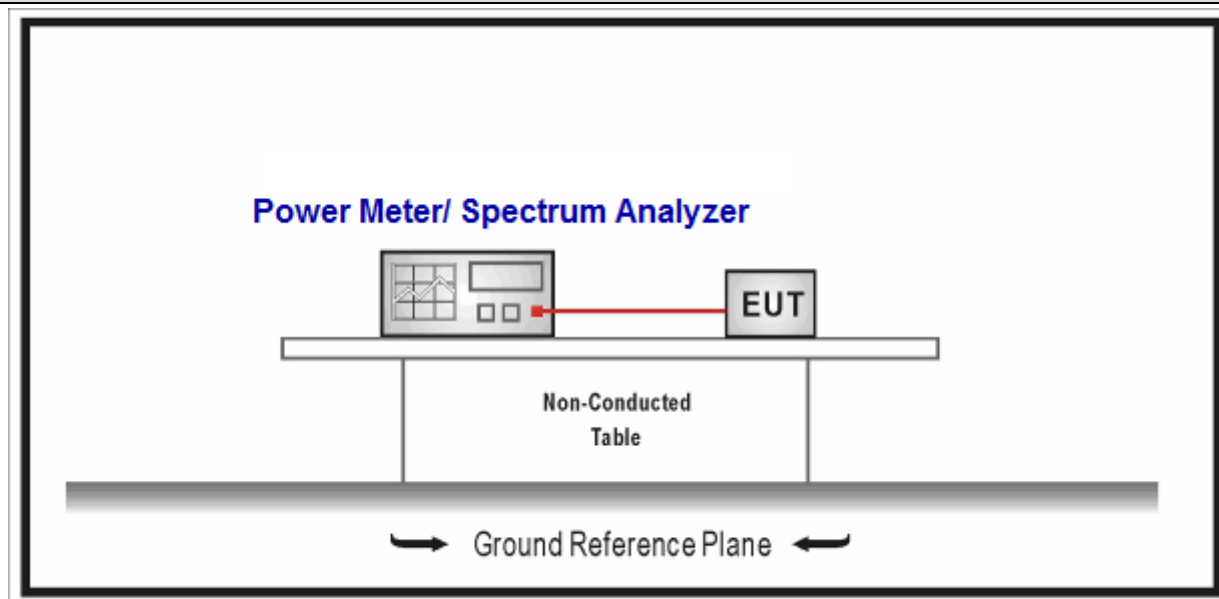

4.6.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		12.3	Maximum conducted output power
	☒	ANSI C63.10	12.3.2	Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver
		☐ ANSI C63.10	12.3.2.2	Method SA-1
		☐ ANSI C63.10	12.3.2.3	Method SA-1A (alternative)
		☒ ANSI C63.10	12.3.2.4	Method SA-2
		☐ ANSI C63.10	12.3.2.5	Method SA-2A (alternative)
		☐ ANSI C63.10	12.3.2.6	Method SA-3
		☐ ANSI C63.10	12.3.2.7	Method SA-3A (alternative)
	☒	ANSI C63.10	12.3.3	Maximum conducted output power using a power meter
		☐ ANSI C63.10	12.3.3.1	Method PM
		☒ ANSI C63.10	12.3.3.2	Method PM-G

Directional Gain Calculations for In-Band test method				
	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☐	KDB 662911		F2)e)	Spatial stream
	☐	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☒	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☒	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

4.6.4 Test Data

SISO Ant 1

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	36	5180	6.03	9.7	≤24	≤22.04	Pass
	44	5220	5.68	9.35	≤24	≤22.04	Pass
	48	5240	5.83	9.5	≤24	≤22.04	Pass
	52	5260	14.04	17.71	≤23.04	≤29.04	Pass
	60	5300	13.84	17.51	≤23.04	≤29.04	Pass
	64	5320	13.97	17.64	≤23.04	≤29.04	Pass
	100	5500	13.65	17.08	≤23.04	≤29.04	Pass
	116	5580	13.74	17.17	≤23.04	≤29.04	Pass
	140	5700	13.68	17.11	≤23.04	≤29.04	Pass
	149	5745	10.74	--	≤30	--	Pass
	157	5785	10.94	--	≤30	--	Pass
	165	5825	10.68	--	≤30	--	Pass
Mode 2	36	5180	5.96	9.63	≤24	≤22.04	Pass
	44	5220	5.62	9.29	≤24	≤22.04	Pass
	48	5240	5.75	9.42	≤24	≤22.04	Pass
	52	5260	14.11	17.78	≤23.04	≤29.04	Pass
	60	5300	13.87	17.54	≤23.04	≤29.04	Pass
	64	5320	14.05	17.72	≤23.04	≤29.04	Pass
	100	5500	13.71	17.14	≤23.04	≤29.04	Pass
	116	5580	13.83	17.26	≤23.04	≤29.04	Pass
	140	5700	13.71	17.14	≤23.04	≤29.04	Pass
	149	5745	10.70	--	≤30	--	Pass
	157	5785	10.86	--	≤30	--	Pass
	165	5825	10.63	--	≤30	--	Pass
Mode 3	38	5190	10.98	14.65	≤24	≤23	Pass
	46	5230	10.92	14.59	≤24	≤23	Pass
	54	5270	14.48	18.15	≤24	≤30	Pass
	62	5310	14.31	17.98	≤24	≤30	Pass
	102	5510	14.30	17.73	≤24	≤30	Pass
	118	5590	14.48	17.91	≤24	≤30	Pass
	134	5670	14.47	17.9	≤24	≤30	Pass
	151	5755	6.88	--	≤30	--	Pass
	159	5795	6.67	--	≤30	--	Pass
Mode 4	36	5180	6.03	9.7	≤24	≤22.04	Pass
	44	5220	5.58	9.25	≤24	≤22.04	Pass
	48	5240	5.74	9.41	≤24	≤22.04	Pass

	52	5260	14.10	17.77	≤23.04	≤29.04	Pass
	60	5300	13.89	17.56	≤23.04	≤29.04	Pass
	64	5320	13.98	17.65	≤23.04	≤29.04	Pass
	100	5500	13.73	17.16	≤23.04	≤29.04	Pass
	116	5580	13.79	17.22	≤23.04	≤29.04	Pass
	140	5700	13.70	17.13	≤23.04	≤29.04	Pass
	149	5745	10.73	--	≤30	--	Pass
	157	5785	10.88	--	≤30	--	Pass
	165	5825	10.68	--	≤30	--	Pass
Mode 5	38	5190	10.91	14.58	≤24	≤23	Pass
	46	5230	10.90	14.57	≤24	≤23	Pass
	54	5270	14.36	18.03	≤24	≤30	Pass
	62	5310	14.42	18.09	≤24	≤30	Pass
	102	5510	14.41	17.84	≤24	≤30	Pass
	118	5590	14.42	17.85	≤24	≤30	Pass
	134	5670	14.48	17.91	≤24	≤30	Pass
	151	5755	6.83	--	≤30	--	Pass
	159	5795	6.66	--	≤30	--	Pass
Mode 6	42	5210	9.11	9.53	≤24	≤23	Pass
	58	5290	14.27	9.37	≤24	≤30	Pass
	106	5530	14.33	9.02	≤24	≤30	Pass
	155	5775	8.49	--	≤30	--	Pass
Mode 7	36	5180	5.95	9.62	≤24	≤22.04	Pass
	44	5220	5.61	9.28	≤24	≤22.04	Pass
	48	5240	5.74	9.41	≤24	≤22.04	Pass
	52	5260	14.07	17.74	≤23.04	≤29.04	Pass
	60	5300	13.85	17.52	≤23.04	≤29.04	Pass
	64	5320	14.03	17.7	≤23.04	≤29.04	Pass
	100	5500	13.71	17.14	≤23.04	≤29.04	Pass
	116	5580	13.83	17.26	≤23.04	≤29.04	Pass
	140	5700	13.70	17.13	≤23.04	≤29.04	Pass
	149	5745	10.68	--	≤30	--	Pass
	157	5785	10.92	--	≤30	--	Pass
	165	5825	10.62	--	≤30	--	Pass
Mode 8	38	5190	10.96	14.63	≤24	≤23	Pass
	46	5230	10.89	14.56	≤24	≤23	Pass
	54	5270	14.41	18.08	≤24	≤30	Pass
	62	5310	14.44	18.11	≤24	≤30	Pass
	102	5510	14.45	17.88	≤24	≤30	Pass
	118	5590	14.36	17.79	≤24	≤30	Pass
	134	5670	14.36	17.79	≤24	≤30	Pass

	151	5755	6.83	--	≤ 30	--	Pass
	159	5795	6.61	--	≤ 30	--	Pass
Mode 9	42	5210	9.06	12.73	≤ 24	≤ 23	Pass
	58	5290	14.23	17.9	≤ 24	≤ 30	Pass
	106	5530	14.19	17.62	≤ 24	≤ 30	Pass
	155	5775	8.47	--	≤ 30	--	Pass

Note

1: For 5150-5250MHz the EIRP limit= $10 + 10 \log_{10} B = 10 + 10 \log(16\text{MHz}) = 22.04\text{dBm}$;

2: For 5250-5350MHz the conducted power limit= $11 + 10 \log_{10} B = 11 + 10 \log(16\text{MHz}) = 23.04\text{dBm}$;

3: For 5250-5350MHz the EIRP limit= $17 + 10 \log_{10} B = 17 + 10 \log(16\text{MHz}) = 29.04\text{dBm}$

4: For 5470-5725MHz the conducted power limit= $11 + 11 \log_{10} B = 10 + 10 \log(16\text{MHz}) = 23.04\text{dBm}$;

5: For 5470-5725MHz the EIRP limit= $17 + 10 \log_{10} B = 17 + 10 \log(16\text{MHz}) = 29.04\text{dBm}$;

6: EIRP=Conducted power+ Antenna Gain

SISO Ant 2							
Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	36	5180	5.86	10.08	≤24	≤22.04	Pass
	44	5220	5.70	9.92	≤24	≤22.04	Pass
	48	5240	5.59	9.81	≤24	≤22.04	Pass
	52	5260	13.78	18	≤23.04	≤29.04	Pass
	60	5300	13.86	18.08	≤23.04	≤29.04	Pass
	64	5320	14.01	18.23	≤23.04	≤29.04	Pass
	100	5500	13.95	17.84	≤23.04	≤29.04	Pass
	116	5580	13.88	17.77	≤23.04	≤29.04	Pass
	140	5700	13.81	17.7	≤23.04	≤29.04	Pass
	149	5745	10.39	--	≤30	--	Pass
	157	5785	10.86	--	≤30	--	Pass
	165	5825	10.37	--	≤30	--	Pass
Mode 2	36	5180	5.83	10.05	≤24	≤22.04	Pass
	44	5220	5.66	9.88	≤24	≤22.04	Pass
	48	5240	5.53	9.75	≤24	≤22.04	Pass
	52	5260	13.83	18.05	≤23.04	≤29.04	Pass
	60	5300	13.94	18.16	≤23.04	≤29.04	Pass
	64	5320	14.01	18.23	≤23.04	≤29.04	Pass
	100	5500	13.98	17.87	≤23.04	≤29.04	Pass
	116	5580	13.93	17.82	≤23.04	≤29.04	Pass
	140	5700	13.85	17.74	≤23.04	≤29.04	Pass
	149	5745	10.32	--	≤30	--	Pass
	157	5785	10.81	--	≤30	--	Pass
	165	5825	10.27	--	≤30	--	Pass
Mode 3	38	5190	10.89	14.63	≤24	≤23	Pass
	46	5230	10.87	14.56	≤24	≤23	Pass
	54	5270	14.49	18.08	≤24	≤30	Pass
	62	5310	14.42	18.11	≤24	≤30	Pass
	102	5510	14.35	17.88	≤24	≤30	Pass
	118	5590	14.36	17.79	≤24	≤30	Pass
	134	5670	14.42	17.79	≤24	≤30	Pass
	151	5755	6.62	--	≤30	--	Pass
	159	5795	6.59	--	≤30	--	Pass
Mode 4	36	5180	5.80	10.02	≤24	≤22.04	Pass
	44	5220	5.63	9.85	≤24	≤22.04	Pass
	48	5240	5.51	9.73	≤24	≤22.04	Pass
	52	5260	13.84	18.06	≤23.04	≤29.04	Pass

	60	5300	13.92	18.14	≤23.04	≤29.04	Pass
	64	5320	14.10	18.32	≤23.04	≤29.04	Pass
	100	5500	13.98	17.87	≤23.04	≤29.04	Pass
	116	5580	13.90	17.79	≤23.04	≤29.04	Pass
	140	5700	13.87	17.76	≤23.04	≤29.04	Pass
	149	5745	10.33	--	≤30	--	Pass
	157	5785	10.77	--	≤30	--	Pass
	165	5825	10.31	--	≤30	--	Pass
Mode 5	38	5190	10.97	15.19	≤24	≤23	Pass
	46	5230	10.85	15.07	≤24	≤23	Pass
	54	5270	14.40	18.62	≤24	≤30	Pass
	62	5310	14.46	18.68	≤24	≤30	Pass
	102	5510	14.48	18.37	≤24	≤30	Pass
	118	5590	14.31	18.2	≤24	≤30	Pass
	134	5670	14.43	18.32	≤24	≤30	Pass
	151	5755	6.81	--	≤30	--	Pass
Mode 6	159	5795	6.61	--	≤30	--	Pass
	42	5210	9.04	13.26	≤24	≤23	Pass
	58	5290	14.31	18.53	≤24	≤30	Pass
	106	5530	14.29	18.18	≤24	≤30	Pass
Mode 7	155	5775	8.43	--	≤30	--	Pass
	36	5180	5.86	10.08	≤24	≤22.04	Pass
	44	5220	5.60	9.82	≤24	≤22.04	Pass
	48	5240	5.49	9.71	≤24	≤22.04	Pass
	52	5260	13.86	18.08	≤23.04	≤29.04	Pass
	60	5300	13.89	18.11	≤23.04	≤29.04	Pass
	64	5320	14.03	18.25	≤23.04	≤29.04	Pass
	100	5500	14.05	17.94	≤23.04	≤29.04	Pass
	116	5580	13.97	17.86	≤23.04	≤29.04	Pass
	140	5700	13.81	17.7	≤23.04	≤29.04	Pass
	149	5745	10.37	--	≤30	--	Pass
	157	5785	10.85	--	≤30	--	Pass
Mode 8	165	5825	10.20	--	≤30	--	Pass
	38	5190	10.90	15.12	≤24	≤23	Pass
	46	5230	10.91	15.13	≤24	≤23	Pass
	54	5270	14.47	18.69	≤24	≤30	Pass
	62	5310	14.34	18.56	≤24	≤30	Pass
	102	5510	14.38	18.27	≤24	≤30	Pass
	118	5590	14.44	18.33	≤24	≤30	Pass
	134	5670	14.46	18.35	≤24	≤30	Pass
	151	5755	6.80	--	≤30	--	Pass

	159	5795	6.63	--	≤ 30	--	Pass
Mode 9	42	5210	9.11	13.33	≤ 24	≤ 23	Pass
	58	5290	14.22	18.44	≤ 24	≤ 30	Pass
	106	5530	14.09	17.98	≤ 24	≤ 30	Pass
	155	5775	8.49	--	≤ 30	--	Pass

Note

- 1: For 5150-5250MHz the EIRP limit= $10 + 10 \log_{10} B = 10 + 10 \log(16\text{MHz}) = 22.04\text{dBm}$;
- 2: For 5250-5350MHz the conducted power limit= $11 + 10 \log_{10} B = 11 + 10 \log(16\text{MHz}) = 23.04\text{dBm}$;
- 3: For 5250-5350MHz the EIRP limit= $17 + 10 \log_{10} B = 17 + 10 \log(16\text{MHz}) = 29.04\text{dBm}$
- 4: For 5470-5725MHz the conducted power limit= $11 + 11 \log_{10} B = 10 + 10 \log(16\text{MHz}) = 23.04\text{dBm}$;
- 5: For 5470-5725MHz the EIRP limit= $17 + 10 \log_{10} B = 17 + 10 \log(16\text{MHz}) = 29.04\text{dBm}$;
- 6: EIRP=Conducted power+ Antenna Gain

MIMO							
Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	36	5180	6.16	10.38	≤24	≤22.04	Pass
	44	5220	6.24	10.46	≤24	≤22.04	Pass
	48	5240	6.21	10.43	≤24	≤22.04	Pass
	52	5260	12.71	16.93	≤23.04	≤29.04	Pass
	60	5300	12.61	16.83	≤23.04	≤29.04	Pass
	64	5320	12.65	16.87	≤23.04	≤29.04	Pass
	100	5500	12.69	16.58	≤23.04	≤29.04	Pass
	116	5580	12.62	16.51	≤23.04	≤29.04	Pass
	140	5700	12.70	16.59	≤23.04	≤29.04	Pass
	149	5745	13.45	--	≤30	--	Pass
	157	5785	13.67	--	≤30	--	Pass
	165	5825	13.74	--	≤30	--	Pass
Mode 2	36	5180	6.13	10.35	≤24	≤22.04	Pass
	44	5220	6.23	10.45	≤24	≤22.04	Pass
	48	5240	6.18	10.4	≤24	≤22.04	Pass
	52	5260	12.72	16.94	≤23.04	≤29.04	Pass
	60	5300	12.68	16.9	≤23.04	≤29.04	Pass
	64	5320	12.67	16.89	≤23.04	≤29.04	Pass
	100	5500	12.67	16.56	≤23.04	≤29.04	Pass
	116	5580	12.63	16.52	≤23.04	≤29.04	Pass
	140	5700	12.74	16.63	≤23.04	≤29.04	Pass
	149	5745	13.99	--	≤30	--	Pass
	157	5785	13.79	--	≤30	--	Pass
	165	5825	13.96	--	≤30	--	Pass
Mode 3	38	5190	11.76	15.98	≤24	≤23	Pass
	46	5230	11.92	16.14	≤24	≤23	Pass
	54	5270	12.51	16.73	≤24	≤30	Pass
	62	5310	12.37	16.59	≤24	≤30	Pass
	102	5510	12.46	16.35	≤24	≤30	Pass
	118	5590	12.42	16.31	≤24	≤30	Pass
	134	5670	12.33	16.22	≤24	≤30	Pass
	151	5755	7.99	--	≤30	--	Pass
	159	5795	7.66	--	≤30	--	Pass
Mode 4	36	5180	6.12	10.34	≤24	≤22.04	Pass
	44	5220	6.23	10.45	≤24	≤22.04	Pass
	48	5240	6.20	10.42	≤24	≤22.04	Pass
	52	5260	12.74	16.96	≤23.04	≤29.04	Pass

	60	5300	12.63	16.85	≤23.04	≤29.04	Pass
	64	5320	12.64	16.86	≤23.04	≤29.04	Pass
	100	5500	12.68	16.57	≤23.04	≤29.04	Pass
	116	5580	12.61	16.5	≤23.04	≤29.04	Pass
	140	5700	12.73	16.62	≤23.04	≤29.04	Pass
	149	5745	14.02	--	≤30	--	Pass
	157	5785	14.07	--	≤30	--	Pass
	165	5825	14.14	--	≤30	--	Pass
Mode 5	38	5190	11.71	15.93	≤24	≤23	Pass
	46	5230	11.90	16.12	≤24	≤23	Pass
	54	5270	12.48	16.7	≤24	≤30	Pass
	62	5310	12.35	16.57	≤24	≤30	Pass
	102	5510	12.38	16.27	≤24	≤30	Pass
	118	5590	12.39	16.28	≤24	≤30	Pass
	134	5670	12.44	16.33	≤24	≤30	Pass
	151	5755	7.95	--	≤30	--	Pass
Mode 6	159	5795	7.63	--	≤30	--	Pass
	42	5210	9.90	14.12	≤24	≤23	Pass
	58	5290	12.40	16.62	≤24	≤30	Pass
	106	5530	12.38	16.27	≤24	≤30	Pass
Mode 7	155	5775	9.64	--	≤30	--	Pass
	36	5180	6.08	10.3	≤24	≤22.04	Pass
	44	5220	6.21	10.43	≤24	≤22.04	Pass
	48	5240	6.14	10.36	≤24	≤22.04	Pass
	52	5260	12.71	16.93	≤23.04	≤29.04	Pass
	60	5300	12.61	16.83	≤23.04	≤29.04	Pass
	64	5320	12.65	16.87	≤23.04	≤29.04	Pass
	100	5500	12.70	16.59	≤23.04	≤29.04	Pass
	116	5580	12.64	16.53	≤23.04	≤29.04	Pass
	140	5700	12.75	16.64	≤23.04	≤29.04	Pass
	149	5745	14.48	--	≤30	--	Pass
	157	5785	14.42	--	≤30	--	Pass
	165	5825	14.50	--	≤30	--	Pass
Mode 8	38	5190	11.68	15.9	≤24	≤23	Pass
	46	5230	11.89	16.11	≤24	≤23	Pass
	54	5270	12.48	16.7	≤24	≤30	Pass
	62	5310	12.41	16.63	≤24	≤30	Pass
	102	5510	12.48	16.37	≤24	≤30	Pass
	118	5590	12.44	16.33	≤24	≤30	Pass
	134	5670	12.43	16.32	≤24	≤30	Pass
	151	5755	7.95	--	≤30	--	Pass


	159	5795	7.62	--	≤ 30	--	Pass
Mode 9	42	5210	9.86	14.08	≤ 24	≤ 23	Pass
	58	5290	12.40	16.62	≤ 24	≤ 30	Pass
	106	5530	12.43	16.32	≤ 24	≤ 30	Pass
	155	5775	9.62	--	≤ 30	--	Pass

Note

- 1: For 5150-5250MHz the EIRP limit= $10 + 10 \log_{10} B = 10 + 10 \log(16\text{MHz}) = 22.04\text{dBm}$;
- 2: For 5250-5350MHz the conducted power limit= $11 + 10 \log_{10} B = 11 + 10 \log(16\text{MHz}) = 23.04\text{dBm}$;
- 3: For 5250-5350MHz the EIRP limit= $17 + 10 \log_{10} B = 17 + 10 \log(16\text{MHz}) = 29.04\text{dBm}$
- 4: For 5470-5725MHz the conducted power limit= $11 + 11 \log_{10} B = 10 + 10 \log(16\text{MHz}) = 23.04\text{dBm}$;
- 5: For 5470-5725MHz the EIRP limit= $17 + 10 \log_{10} B = 17 + 10 \log(16\text{MHz}) = 29.04\text{dBm}$;
- 6: EIRP=Conducted power+ Antenna Gain

4.7 Peak Power Spectral Density	VERDICT: PASS
--	----------------------

4.7.1 Limit:	
Standard	FCC CFR Title 47 Part 15 Subpart C&E
Fundamental emission output power Limit	
☐	For the band 5.15-5.25 GHz
☐	Outdoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$
☐	Indoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 6)$
☐	Fixed point-to-point access points: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 17 - (G_{TX} - 23)$
☒	Mobile and portable client devices: the maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the 5.25-5.35 GHz:
☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the 5.47-5.725 GHz:
☒	The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 11 - (G_{TX} - 6)$
☒	For the band 5.725-5.85 GHz:
☒	The maximum power spectral density shall not exceed 30 dBm/500KHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$
Note 1: GTX directional gain of transmitting antennas.	
Note 2: Pout is maximum peak conducted output power.	

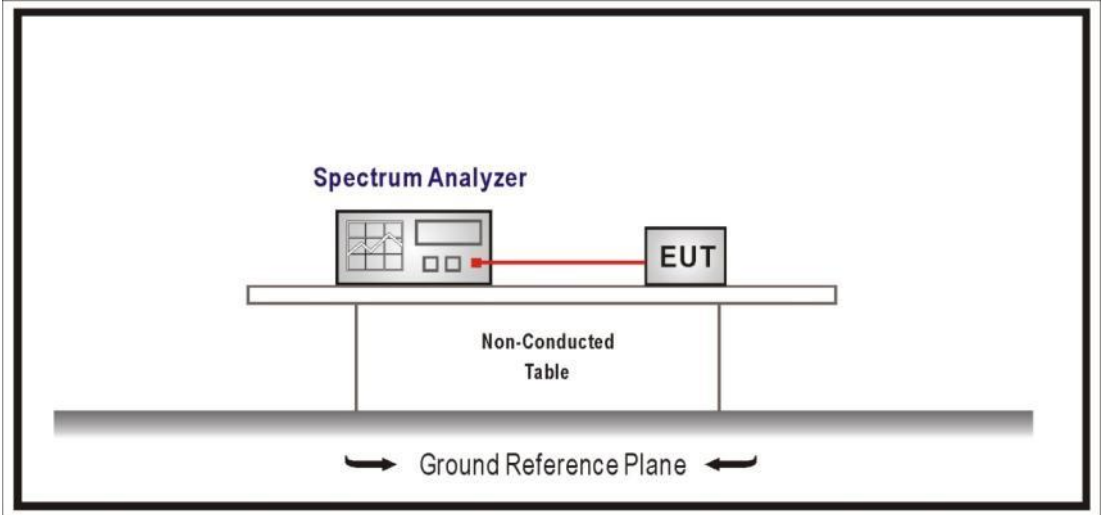4.7.2 Test Setup


4.7.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	12.5	Peak power spectral density
☒	FCC KDB 789033 D02v02r01	F	Maximum Power Spectral Density (PSD)

Directional Gain Calculations for In-Band test method

	References Rule	Chapter			Description
☐	KDB 662911	F2)a)			Basic methodology
	☐ KDB 662911	F2)a) (i)			transmit signals are correlated
	☐ KDB 662911	F2)a) (ii)			transmit signals are uncorrelated
☐	KDB 662911	F2)b)			Sectorized antenna systems.
☐	KDB 662911	F2)c)			Cross-polarized antennas
	☐ ANSI C63.10	F2)c) (i)			Cross-polarized antennas
	☐ ANSI C63.10	F2)c) (ii)			Multiple antennas
☐	KDB 662911	F2)e)			Spatial stream
	☐ KDB 662911	F2)e) (i)			Antennas have the same gain
	☐ KDB 662911	F2)e) (ii)			Antenna have the different gain with one spatial stream
	☐ KDB 662911	F2)e) (iii)			Antenna have the different gain with more than one spatial stream
☒	KDB 662911	F2)f)			Cyclic Delay Diversity (CDD)
	☒ KDB 662911	F2)f) (i)			Antennas have the same gain
	☐ KDB 662911	F2)f) (ii)			Antenna have the different gain with one spatial stream
	☐ KDB 662911	F2)f) (iii)			Antenna have the different gain with more than one spatial stream

4.7.4 Test Data

SISO Ant 1

Mode	Channel	Test Frequency (MHz)	Total Measurement PSD (dBm/MHz)	PSD(e.i.r.p) (dBm/MHz)	Conducted Limit (dBm/MHz)	PSD(e.i.r.p) Limit (dBm/MHz)	Result
1	36	5180	-0.223	3.447	≤ 11	≤ 10	Pass
	44	5220	-0.718	2.952	≤ 11	≤ 10	Pass
	48	5240	-0.691	2.979	≤ 11	≤ 10	Pass
	52	5260	8.317	--	≤ 11	--	Pass
	60	5300	8.089	--	≤ 11	--	Pass
	64	5320	8.189	--	≤ 11	--	Pass
	100	5500	9.796	--	≤ 11	--	Pass
	116	5580	8.813	--	≤ 11	--	Pass
	140	5700	8.690	--	≤ 11	--	Pass
	149	5745	-0.445	--	≤ 30	--	Pass
	157	5785	0.038	--	≤ 30	--	Pass
	165	5825	1.029	--	≤ 30	--	Pass
2	36	5180	-0.525	3.145	≤ 11	≤ 10	Pass
	44	5220	-0.718	2.952	≤ 11	≤ 10	Pass
	48	5240	-0.823	2.847	≤ 11	≤ 10	Pass
	52	5260	8.676	--	≤ 11	--	Pass
	60	5300	8.086	--	≤ 11	--	Pass
	64	5320	8.855	--	≤ 11	--	Pass
	100	5500	8.180	--	≤ 11	--	Pass
	116	5580	7.376	--	≤ 11	--	Pass
	140	5700	7.873	--	≤ 11	--	Pass
	149	5745	-0.730	--	≤ 30	--	Pass
	157	5785	0.066	--	≤ 30	--	Pass
	165	5825	0.949	--	≤ 30	--	Pass

Mode	Channel	Test Frequency (MHz)	Total Measurement PSD (dBm/MHz)	PSD(e.i.r.p) (dBm/MHz)	Conducted Limit (dBm/MHz)	PSD(e.i.r.p) Limit (dBm/MHz)	Result
3	38	5190	0.298	3.968	≤11	≤10	Pass
	46	5230	-0.667	3.003	≤11	≤10	Pass
	54	5270	5.354	2.814	≤11	≤10	Pass
	62	5310	6.650	--	≤11	--	Pass
	102	5510	6.574	--	≤11	--	Pass
	110	5590	4.918	--	≤11	--	Pass
	134	5670	-0.444	--	≤11	--	Pass
	151	5755	-5.339	--	≤30	--	Pass
	159	5795	-4.033	--	≤30	--	Pass
4	36	5180	-0.610	3.06	≤11	≤10	Pass
	44	5220	-1.069	2.601	≤11	≤10	Pass
	48	5240	-1.154	2.516	≤11	≤10	Pass
	52	5260	8.037	--	≤11	--	Pass
	60	5300	8.032	--	≤11	--	Pass
	64	5320	7.796	--	≤11	--	Pass
	100	5500	8.715	--	≤11	--	Pass
	116	5580	7.673	--	≤11	--	Pass
	140	5700	8.128	--	≤11	--	Pass
	149	5745	-0.974	--	≤30	--	Pass
	157	5785	0.597	--	≤30	--	Pass
	165	5825	1.392	--	≤30	--	Pass
5	38	5190	0.068	3.738	≤11	≤10	Pass
	46	5230	-0.501	3.169	≤11	≤10	Pass
	54	5270	5.520	3.002	≤11	≤10	Pass
	62	5310	5.586	--	≤11	--	Pass
	102	5510	6.729	--	≤11	--	Pass
	110	5550	5.479	--	≤11	--	Pass
	134	5670	-0.296	--	≤11	--	Pass
	151	5755	-5.175	--	≤30	--	Pass
	159	5795	-3.987	--	≤30	--	Pass

Mode	Channel	Test Frequency (MHz)	Total Measurement PSD (dBm/MHz)	PSD(e.i.r.p) (dBm/MHz)	Conducted Limit (dBm/MHz)	PSD(e.i.r.p) Limit (dBm/MHz)	Result
6	42	5210	-6.382	-2.712	≤11	≤10	Pass
	58	5290	2.893	--	≤11	--	Pass
	106	5530	2.250	--	≤11	--	Pass
	155	5775	-7.467	--	≤30	--	Pass
For Full RU							
7	36	5180	-0.92	2.75	≤11	≤10	Pass
	44	5220	-0.824	2.846	≤11	≤10	Pass
	48	5240	-1.355	2.315	≤11	≤10	Pass
	52	5260	8.008	--	≤11	--	Pass
	60	5300	8.534	--	≤11	--	Pass
	64	5320	7.625	--	≤11	--	Pass
	100	5500	8.620	--	≤11	--	Pass
	116	5580	7.649	--	≤11	--	Pass
	140	5700	7.864	--	≤11	--	Pass
	149	5745	-0.649	--	≤11	--	Pass
	157	5785	0.050	--	≤30	--	Pass
	165	5825	1.087	--	≤30	--	Pass
8	38	5190	0.126	3.796	≤11	≤10	Pass
	46	5230	-0.559	3.111	≤11	≤10	Pass
	54	5270	5.721	--	≤11	--	Pass
	62	5310	5.542	--	≤11	--	Pass
	102	5510	6.540	--	≤11	--	Pass
	110	5550	5.271	--	≤11	--	Pass
	134	5670	-0.562	--	≤11	--	Pass
	151	5755	-4.880	--	≤30	--	Pass
	159	5795	-3.923	--	≤30	--	Pass
9	42	5210	-6.287	-2.617	≤11	≤10	Pass
	58	5290	2.835	--	≤11	--	Pass
	106	5530	2.747	--	≤11	--	Pass
	155	5775	-7.246	--	≤30	--	Pass
For Partial RU							
7	36	5180	-1.875	1.795	≤11	≤10	Pass
	44	5220	-1.687	1.983	≤11	≤10	Pass
	48	5240	-1.823	1.847	≤11	≤10	Pass
	52	5260	7.008	--	≤11	--	Pass


	60	5300	7.036	--	≤ 11	--	Pass
	64	5320	6.925	--	≤ 11	--	Pass
	100	5500	8.009	--	≤ 11	--	Pass
	116	5580	7.239	--	≤ 11	--	Pass
	140	5700	7.494	--	≤ 11	--	Pass
	149	5745	-1.639	--	≤ 11	--	Pass
	157	5785	-1.750	--	≤ 30	--	Pass
	165	5825	-1.608	--	≤ 30	--	Pass
8	38	5190	-1.523	2.147	≤ 11	≤ 10	Pass
	46	5230	-1.659	2.011	≤ 11	≤ 10	Pass
	54	5270	4.879	--	≤ 11	--	Pass
	62	5310	4.914	--	≤ 11	--	Pass
	102	5510	5.113	--	≤ 11	--	Pass
	110	5550	4.731	--	≤ 11	--	Pass
	134	5670	-1.825	--	≤ 11	--	Pass
	151	5755	-5.836	--	≤ 30	--	Pass
	159	5795	-5.646	--	≤ 30	--	Pass
9	42	5210	-6.981	-3.311	≤ 11	≤ 10	Pass
	58	5290	-4.978	--	≤ 11	--	Pass
	106	5530	-5.600	--	≤ 11	--	Pass
	155	5775	-8.169	--	≤ 30	--	Pass

Note 1: The worst data as below:


Note 2: We have evaluated each operating mode and SISO mode, shown in the report is the worst data.

Note 3: The PSD(e.i.r.p)= Total Measurement PSD(dBm/MHz)+Antenna Gain


Mode 1 5500MHz

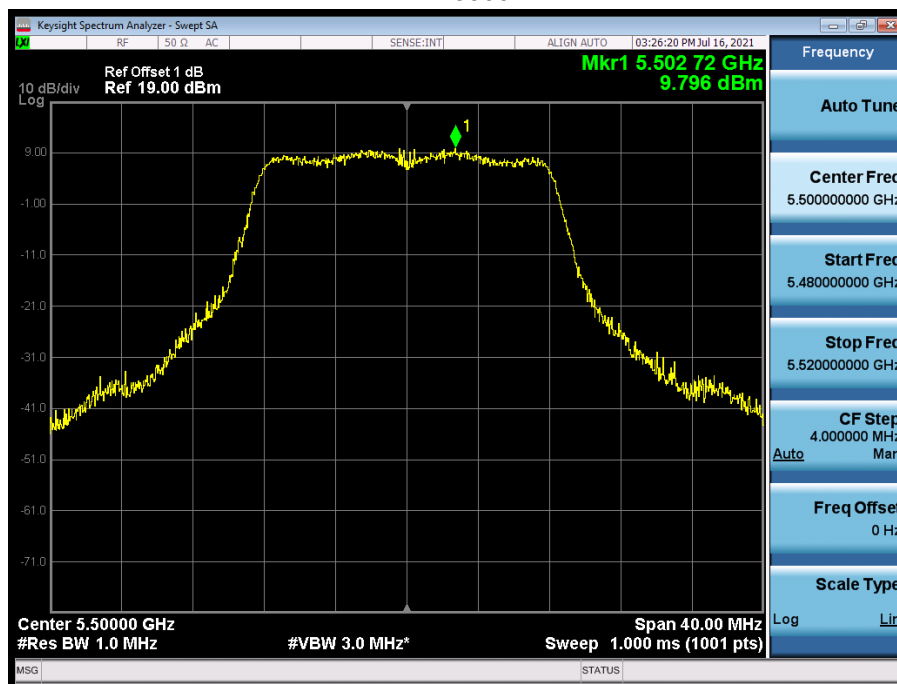


Mode 4 5825MHz

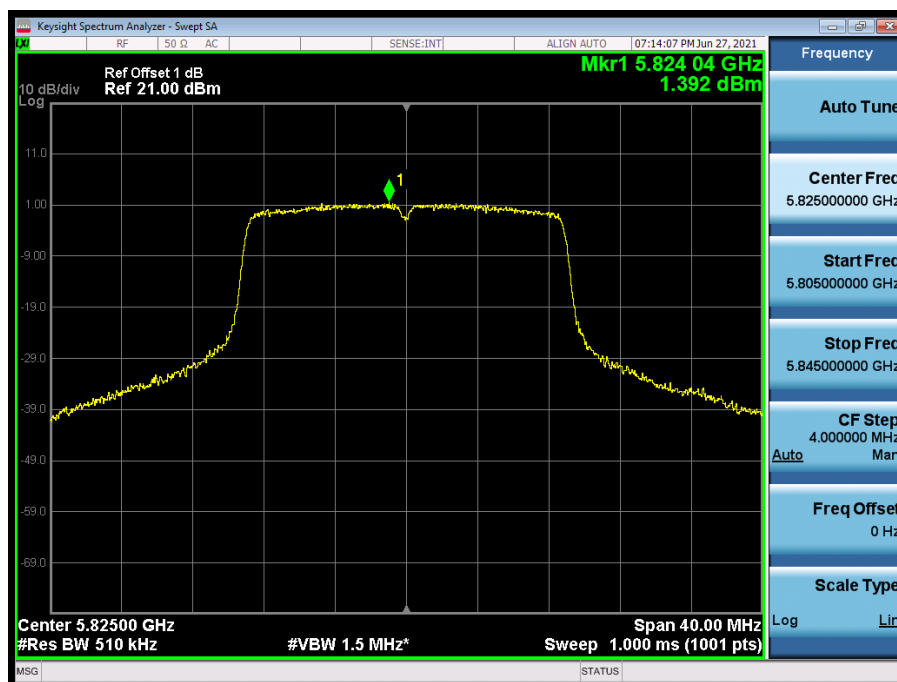

Mode 1 5500MHz

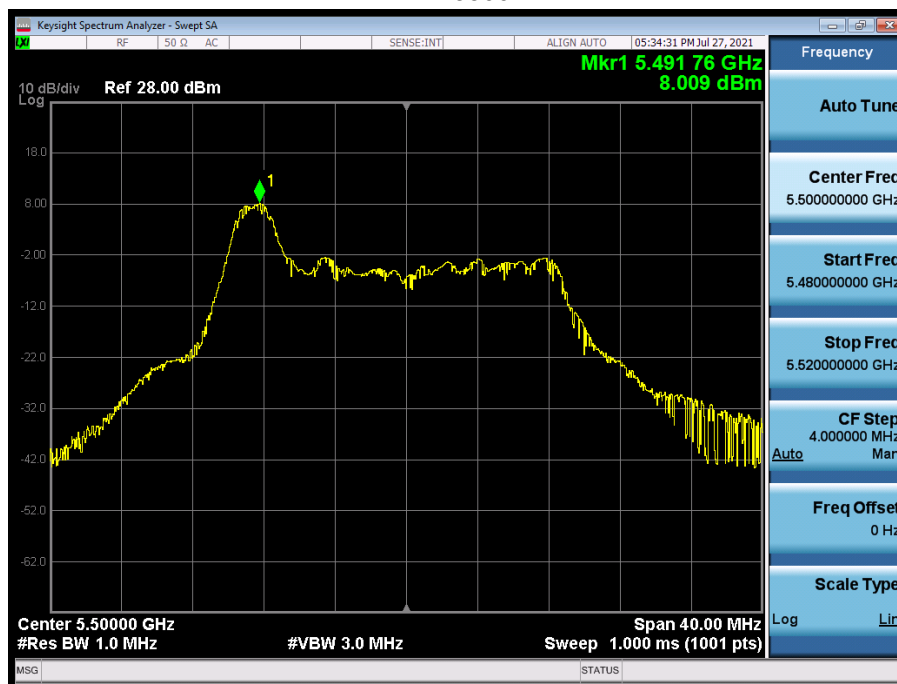

Mode 7 5825MHz

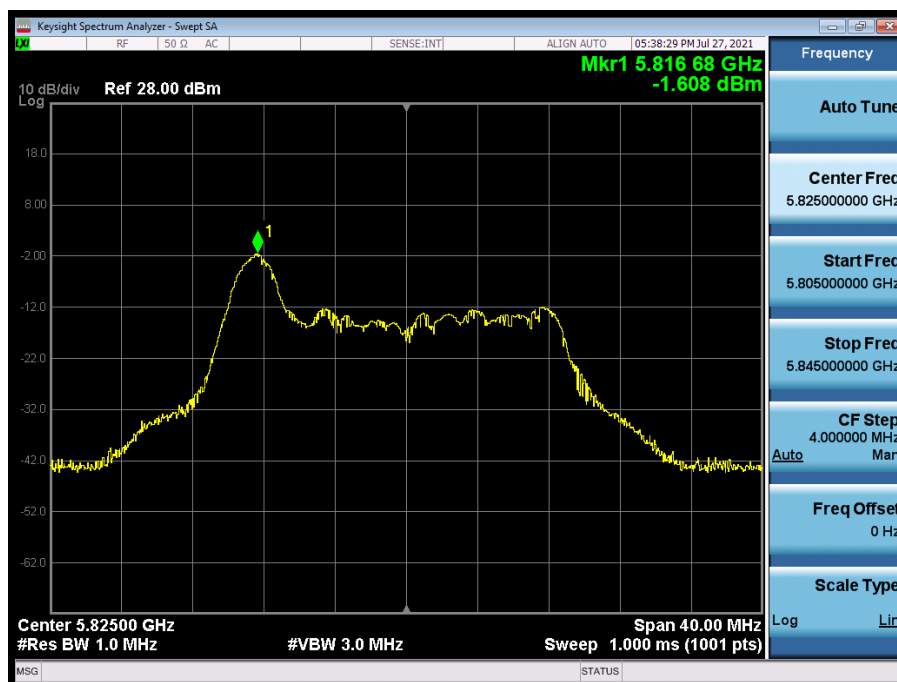

MIMO

Mode	Channel	Test Frequency (MHz)	Total Measurement PSD (dBm/MHz)	PSD(e.i.r.p) (dBm/MHz)	Conducted Limit (dBm/MHz)	PSD(e.i.r.p) Limit (dBm/MHz)	Result
1	36	5180	-2.746	7.474	≤6.78	≤10	Pass
	44	5220	-4.197	6.023	≤6.78	≤10	Pass
	48	5240	-3.424	6.796	≤6.78	≤10	Pass
	52	5260	4.988	--	≤6.78	--	Pass
	60	5300	5.646	--	≤6.78	--	Pass
	64	5320	4.735	--	≤6.78	--	Pass
	100	5500	6.586	--	≤7.11	--	Pass
	116	5580	5.032	--	≤7.11	--	Pass
	140	5700	5.676	--	≤7.11	--	Pass
	149	5745	-2.246	--	≤24.06	--	Pass
	157	5785	-1.126	--	≤24.06	--	Pass
	165	5825	-0.063	--	≤24.06	--	Pass
2	36	5180	-3.578	6.642	≤6.78	≤10	Pass
	44	5220	-3.771	6.449	≤6.78	≤10	Pass
	48	5240	-4.067	6.153	≤6.78	≤10	Pass
	52	5260	5.875	--	≤6.78	--	Pass
	60	5300	5.589	--	≤6.78	--	Pass
	64	5320	5.059	--	≤6.78	--	Pass
	100	5500	5.759	--	≤7.11	--	Pass
	116	5580	4.824	--	≤7.11	--	Pass
	140	5700	4.719	--	≤7.11	--	Pass
	149	5745	-1.086	--	≤24.06	--	Pass
	157	5785	-1.101	--	≤24.06	--	Pass
	165	5825	-0.967	--	≤24.06	--	Pass

Mode	Channel	Test Frequency (MHz)	Total Measurement PSD (dBm/MHz)	PSD(e.i.r.p) (dBm/MHz)	Conducted Limit (dBm/MHz)	PSD(e.i.r.p) Limit (dBm/MHz)	Result
3	38	5190	-3.448	6.772	≤6.78	≤10	Pass
	46	5230	-4.242	5.978	≤6.78	≤10	Pass
	54	5270	2.59		≤6.78		Pass
	62	5310	2.573	--	≤6.78	--	Pass
	102	5510	3.276	--	≤7.11	--	Pass
	110	5590	2.945	--	≤7.11	--	Pass
	134	5670	-4.568	--	≤7.11	--	Pass
	151	5755	-7.804	--	≤24.06	--	Pass
	159	5795	-8.414	--	≤24.06	--	Pass
4	36	5180	-3.397	6.823	≤6.78	≤10	Pass
	44	5220	-3.085	7.135	≤6.78	≤10	Pass
	48	5240	-3.335	6.885	≤6.78	≤10	Pass
	52	5260	5.863	--	≤6.78	--	Pass
	60	5300	5.332	--	≤6.78	--	Pass
	64	5320	4.885	--	≤6.78	--	Pass
	100	5500	5.572	--	≤7.11	--	Pass
	116	5580	5.21	--	≤7.11	--	Pass
	140	5700	5.159	--	≤7.11	--	Pass
	149	5745	-2.57	--	≤24.06	--	Pass
	157	5785	-1.426	--	≤24.06	--	Pass
	165	5825	-0.546	--	≤24.06	--	Pass
5	38	5190	-3.551	6.669	≤6.78	≤10	Pass
	46	5230	-4.242	5.978	≤6.78	≤10	Pass
	54	5270	2.29	--	≤6.78	--	Pass
	62	5310	2.91	--	≤6.78	--	Pass
	102	5510	3.292	--	≤7.11	--	Pass
	110	5550	2.434	--	≤7.11	--	Pass
	134	5670	-4.977	--	≤7.11	--	Pass
	151	5755	-9.104	--	≤24.06	--	Pass
	159	5795	-7.659	--	≤24.06	--	Pass

Mode	Channel	Test Frequency (MHz)	Total Measurement PSD (dBm/MHz)	PSD(e.i.r.p) (dBm/MHz)	Conducted Limit (dBm/MHz)	PSD(e.i.r.p) Limit (dBm/MHz)	Result
6	42	5210	-9.377	0.843	≤6.78	≤10	Pass
	58	5290	0.671	--	≤6.78	--	Pass
	106	5530	-0.45	--	≤7.11	--	Pass
	155	5775	-10.96	--	≤24.06	--	Pass
For Full RU							
7	36	5180	-3.632	6.588	≤6.78	≤10	Pass
	44	5220	-3.845	6.375	≤6.78	≤10	Pass
	48	5240	-4.328	5.892	≤6.78	≤10	Pass
	52	5260	5.552	--	≤6.78	--	Pass
	60	5300	5.541	--	≤6.78	--	Pass
	64	5320	5.387	--	≤6.78	--	Pass
	100	5500	5.874	--	≤7.11	--	Pass
	116	5580	5.258	--	≤7.11	--	Pass
	140	5700	5.526	--	≤7.11	--	Pass
	149	5745	-2.379	--	≤24.06	--	Pass
	157	5785	-1.126	--	≤24.06	--	Pass
	165	5825	-0.112	--	≤24.06	--	Pass
8	38	5190	-3.666	6.554	≤6.78	≤10	Pass
	46	5230	-3.788	6.432	≤6.78	≤10	Pass
	54	5270	2.725	--	≤6.78	--	Pass
	62	5310	2.424	--	≤6.78	--	Pass
	102	5510	3.372	--	≤7.11	--	Pass
	110	5550	1.846	--	≤7.11	--	Pass
	134	5670	-4.77	--	≤7.11	--	Pass
	151	5755	-9.692	--	≤24.06	--	Pass
	159	5795	-7.687	--	≤24.06	--	Pass
	167	5835	-1.126	--	≤24.06	--	Pass
9	42	5210	-8.994	1.226	≤6.78	≤10	Pass
	58	5290	-0.029	--	≤6.78	--	Pass
	106	5530	-0.523	--	≤7.11	--	Pass
	155	5775	-11.785	--	≤24.06	--	Pass
For worst Partial RU							
7	36	5180	-3.969	6.251	≤6.78	≤10	Pass
	44	5220	-4.162	6.058	≤6.78	≤10	Pass
	48	5240	-4.756	5.464	≤6.78	≤10	Pass
	52	5260	-2.298	--	≤6.78	--	Pass
	60	5300	-2.835	--	≤6.78	--	Pass

	64	5320	-2.867	--	≤ 6.78	--	Pass
	100	5500	-2.170	--	≤ 7.11	--	Pass
	116	5580	-2.357	--	≤ 7.11	--	Pass
	140	5700	-2.837	--	≤ 7.11	--	Pass
	149	5745	-4.952	--	≤ 24.06	--	Pass
	157	5785	-4.836	--	≤ 24.06	--	Pass
	165	5825	-2.342	--	≤ 24.06	--	Pass
8	38	5190	-4.800	5.420	≤ 6.78	≤ 10	Pass
	46	5230	-4.896	5.324	≤ 6.78	≤ 10	Pass
	54	5270	-4.683	--	≤ 6.78	--	Pass
	62	5310	-4.926	--	≤ 6.78	--	Pass
	102	5510	-5.817	--	≤ 7.11	--	Pass
	110	5550	-6.287	--	≤ 7.11	--	Pass
	134	5670	-5.834	--	≤ 7.11	--	Pass
	151	5755	-9.992	--	≤ 24.06	--	Pass
	159	5795	-8.382	--	≤ 24.06	--	Pass
9	42	5210	-9.265	0.955	≤ 6.78	≤ 10	Pass
	58	5290	-1.246	--	≤ 6.78	--	Pass
	106	5530	-1.257	--	≤ 7.11	--	Pass
	155	5775	-12.737	--	≤ 24.06	--	Pass

Note 1: The worst data as below:

Note 2: The PSD(e.i.r.p)= Total Measurement PSD(dBm/MHz)+Antenna Gain


Note 3: All chains are tested and only the worst chain of the PSD was showed.

Note 4: 5150~5250MHz PSD limit = 10dBm/MHz - 10Log(Ant number) - (4.22 + 10Log(Ant number))


5725~5850MHz PSD limit = 30dBm/500kHz - 10Log(Ant number) - (5.94 + 10Log(Ant number) - 6)

5250~5350, 5470~5725MHz PSD limit = 11dBm/MHz - 10Log(Ant number) - (4.22 + 10Log(Ant number) - 6)


Mode 1 5500MHz

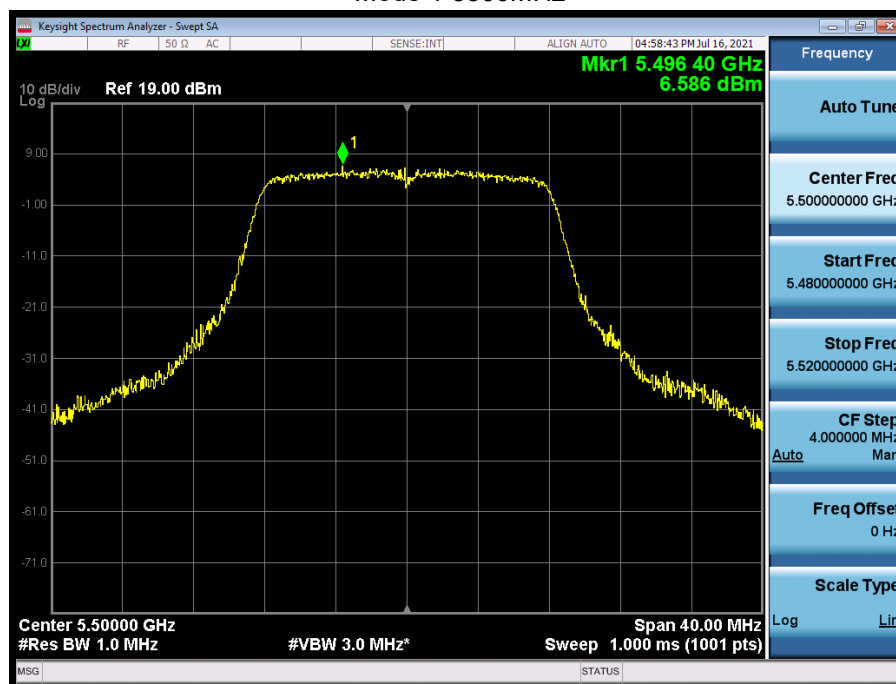


Mode 1 5825MHz

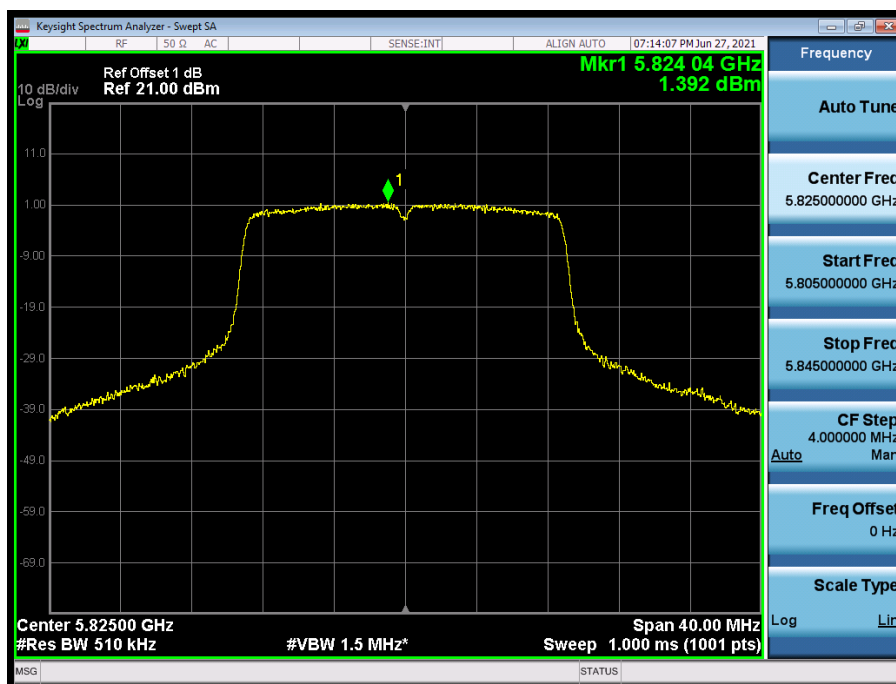

Mode 7 5180MHz

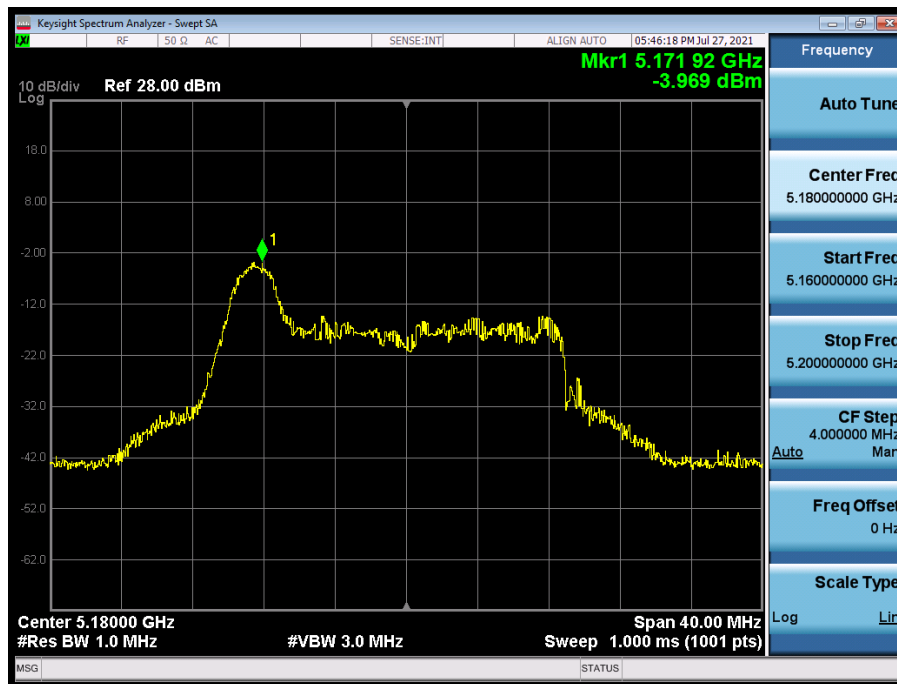


Mode 7 5825MHz

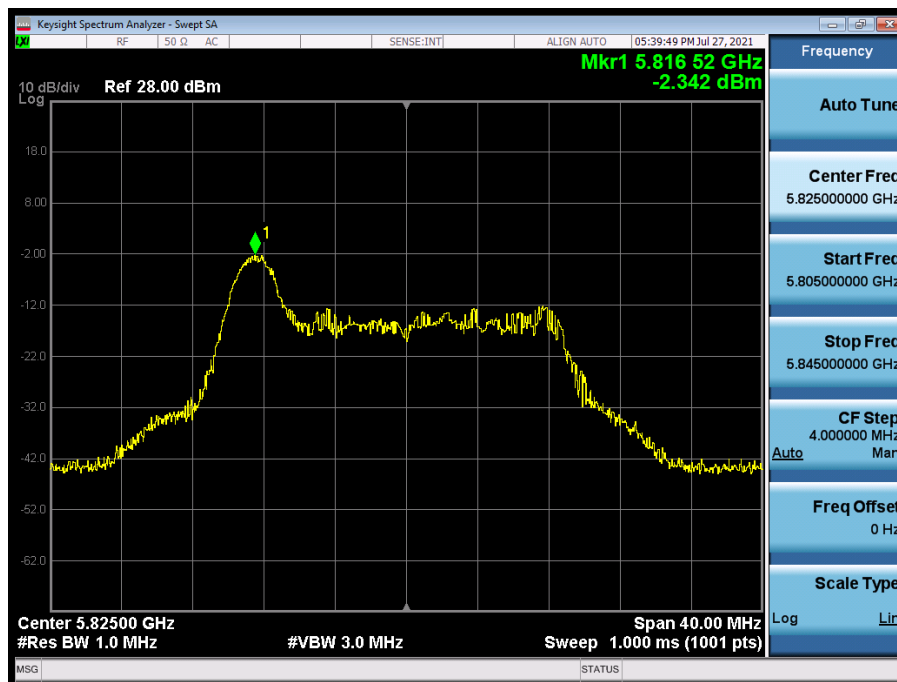

4.8 Radiated Emission Band Edge


VERDICT: PASS

4.8.1 Limit

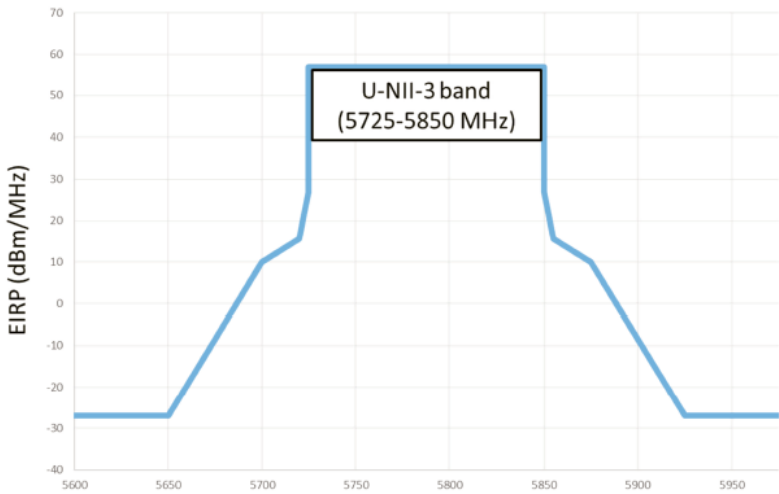Standard	FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209
Operating Frequency Band	5725 - 5850
EIRP Limit	

4.8.2 Test Setup

Above 1GHz Test Setup:

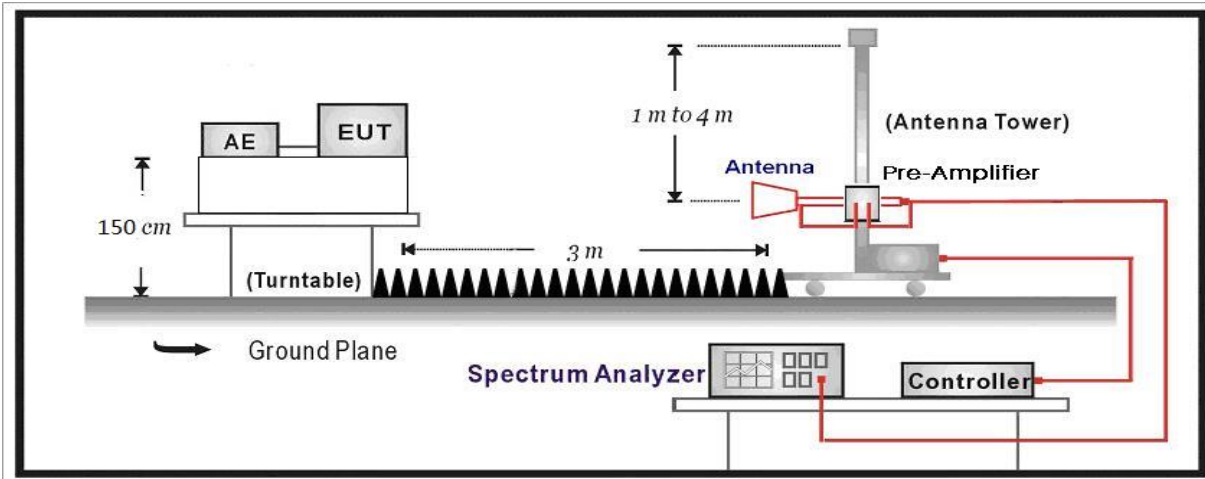


4.8.3 Test Procedure

	References Rule	Chapter	Description
☐	ANSI C63.10	12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10	12.7.2	Emissions in restricted frequency bands
	☐	ANSI C63.10	12.7.5 Radiated emission measurements
	☒	ANSI C63.10	12.7.6 Procedure for peak unwanted emissions measurements above 1000 MHz
	☒	ANSI C63.10	12.7.7 Procedures for average unwanted emissions measurements above 1000 MHz
	☐	ANSI C63.10	12.7.7.2 Method AD (average detection)—primary method
	☒	ANSI C63.10	12.7.7.3 Method VB-A (Alternative)
	☐	ANSI C63.10	6.4 Radiated emissions from unlicensed wireless devices below 30 MHz
	☐	ANSI C63.10	6.5 Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☐	ANSI C63.10	6.6 Radiated emissions from unlicensed wireless devices above 1 GHz
☐	FCC KDB 789033 D02v02r01	G.2	Unwanted Emissions that fall Outside of the Restricted Bands
☐	FCC KDB 789033 D02v02r01	G.1	Unwanted Emissions in the Restricted Bands
	☐	FCC KDB 789033 D02v02r01	G.4 Procedure for Unwanted Emissions Measurements below 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6.c Method AD (Average detection)—primary method
	☐	FCC KDB 789033 D02v02r01	G.6.d Method VB (Averaging using reduced video bandwidth): Alternative method.


4.8.4 Test Data

Profile: 2150775R	Page No.: 1
Engineer: Tongben	
Site: AC5	Time: 2019/07/04 - 20:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 802.11a Ant 1	

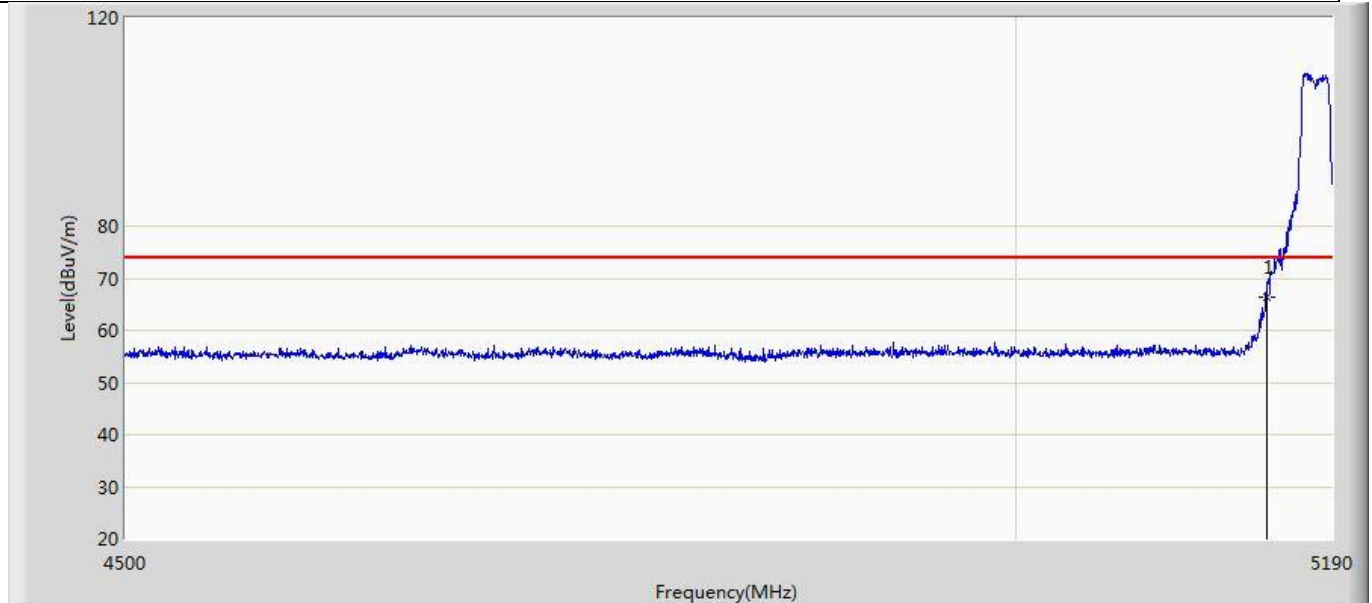


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	66.384	25.176	-7.616	74.000	41.208	PK

Profile: 2150775R	Page No.: 2
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 21:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 802.11a Ant 1	

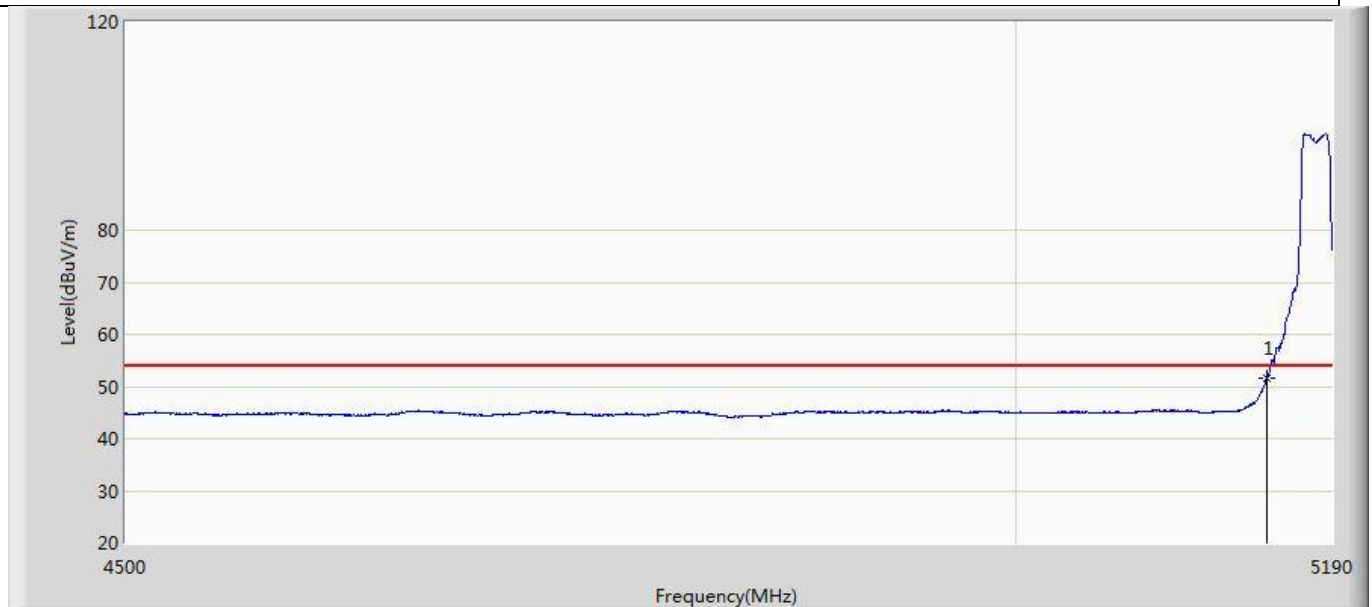


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.566	10.358	-2.434	54.000	41.208	AV

Profile: 2150775R	Page No.: 3
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 21:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 802.11a Ant 1	

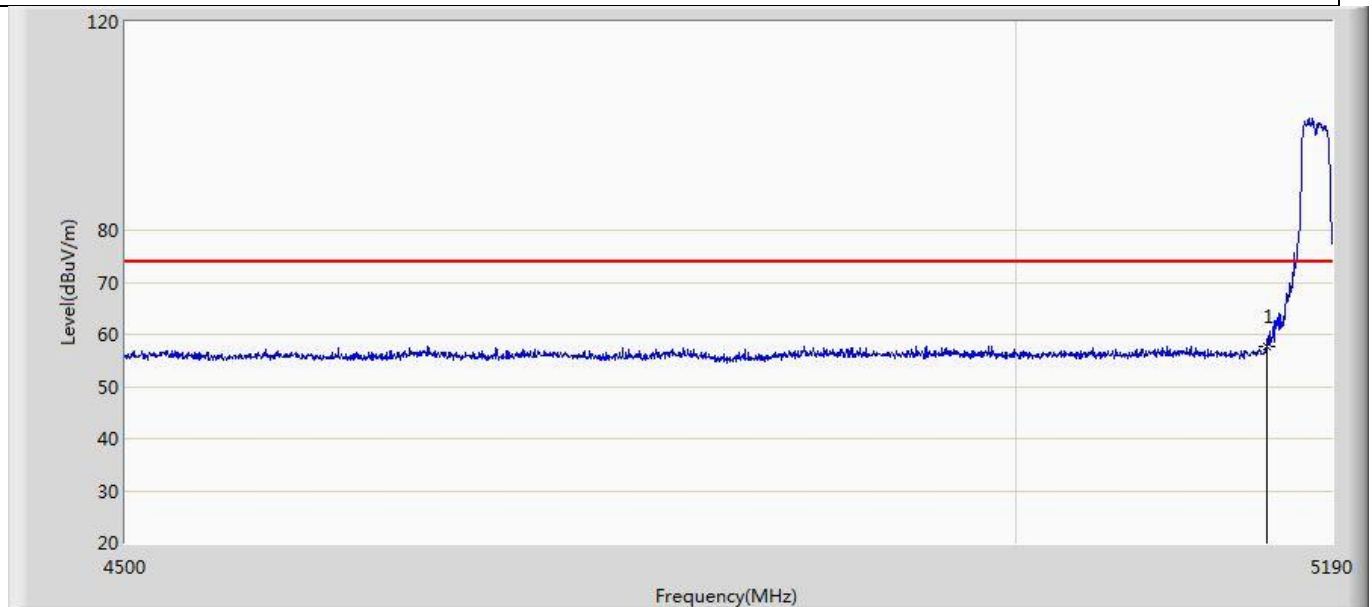


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	57.687	16.479	-16.313	74.000	41.208	PK

Profile: 2150775R	Page No.: 4
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 21:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5180MHz by 802.11a Ant 1	

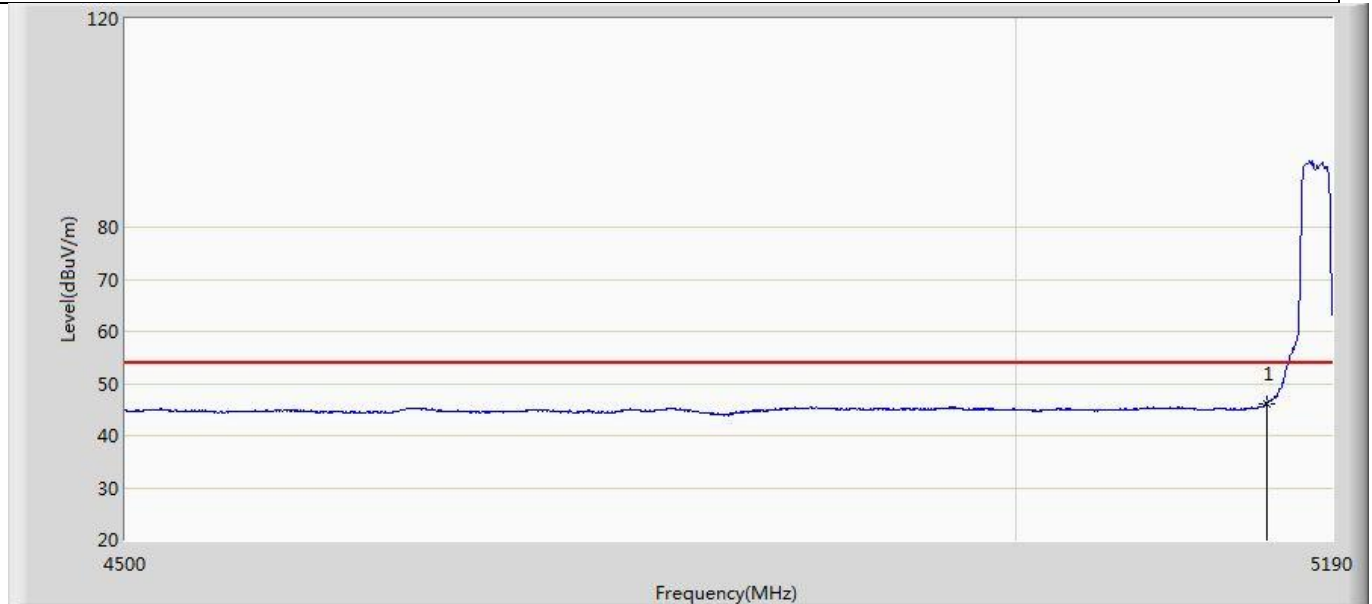


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	46.024	4.816	-7.976	54.000	41.208	AV

Profile: 2150775R	Page No.: 5
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 802.11a Ant 1	

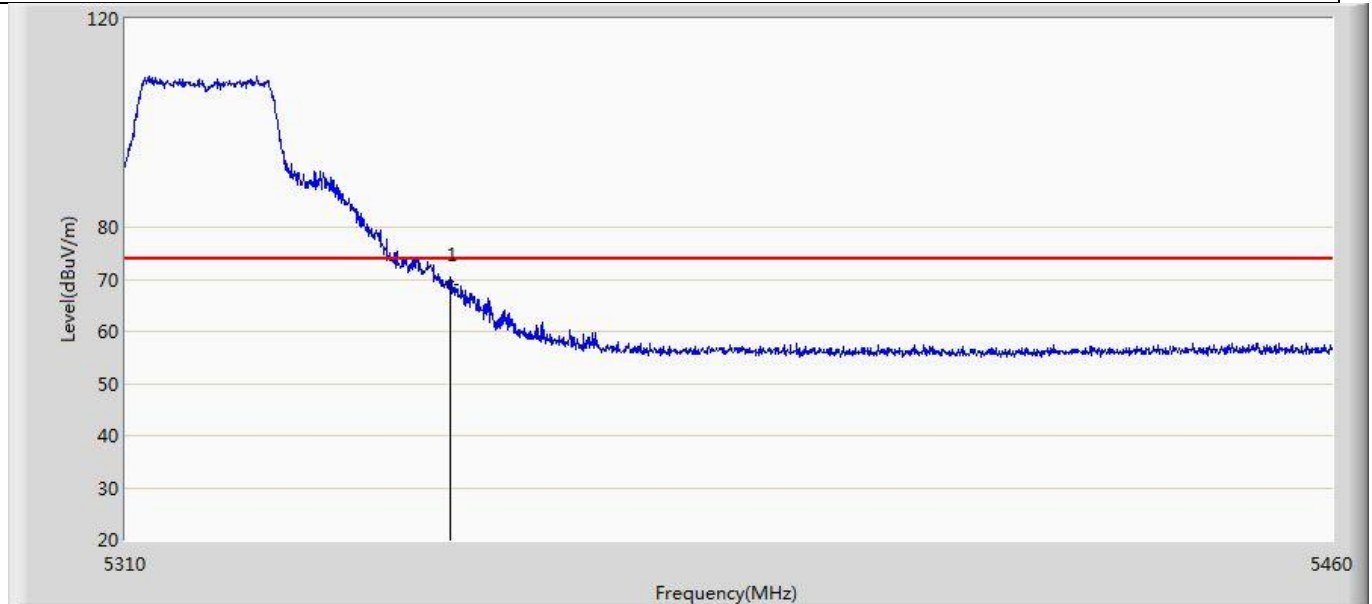


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	69.117	27.722	-4.883	74.000	41.395	PK

Profile: 2150775R	Page No.: 6
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 802.11a Ant 1	

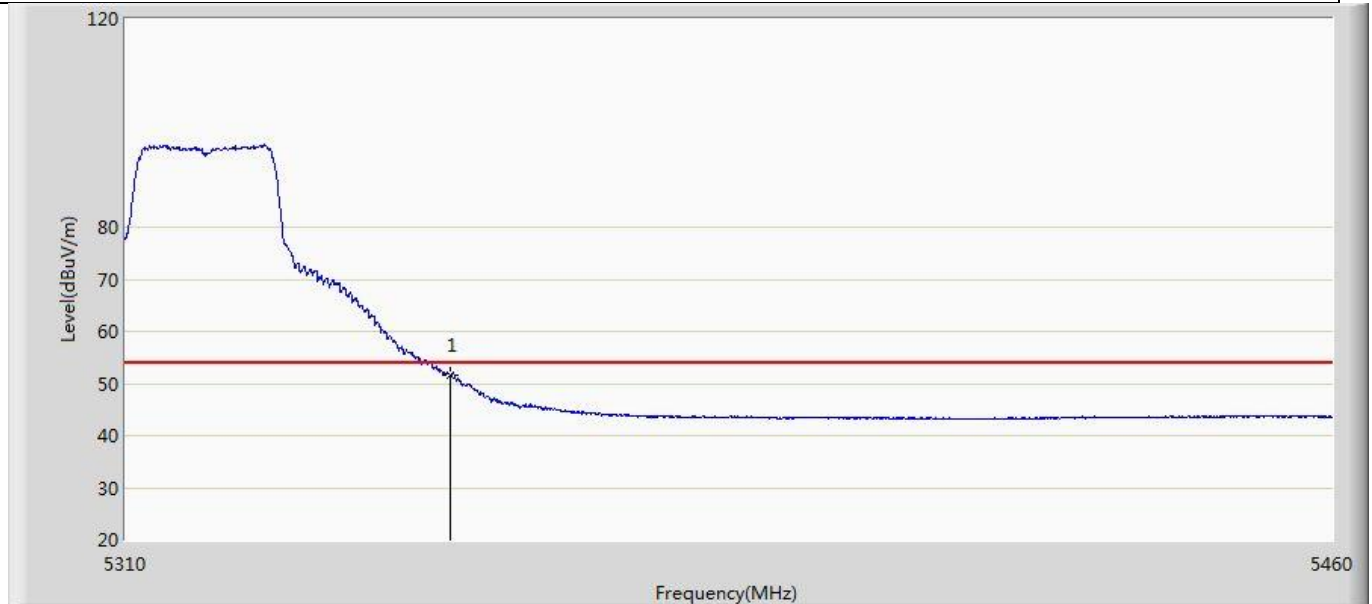


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.590	10.195	-2.410	54.000	41.395	AV

Profile: 2150775R	Page No.: 7
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 802.11a Ant 1	

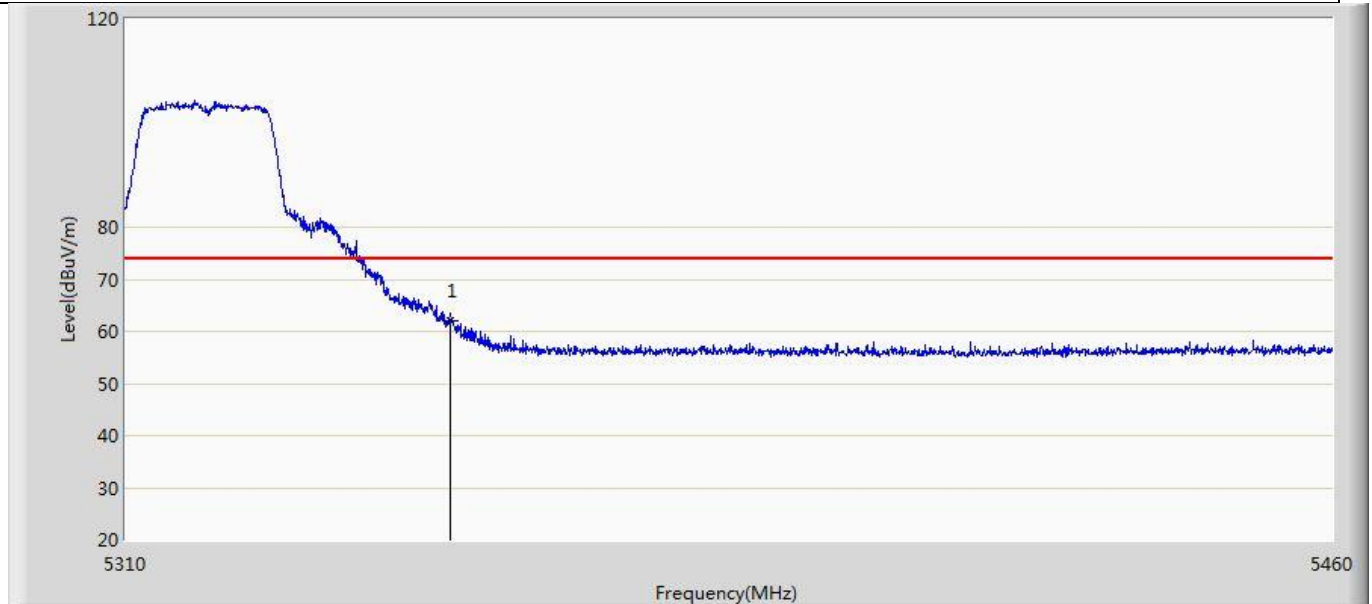


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	62.123	20.728	-11.877	74.000	41.395	PK

Profile: 2150775R	Page No.: 8
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5320MHz by 802.11a Ant 1	

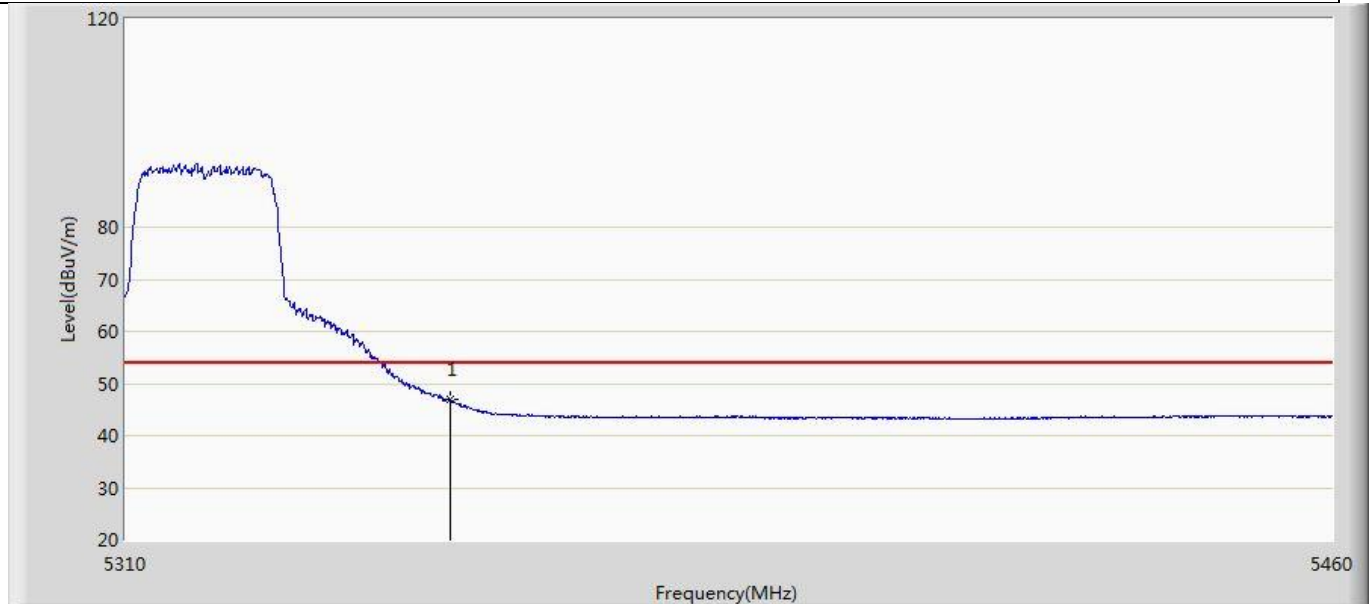


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	46.836	5.441	-7.164	54.000	41.395	AV

Profile: 2150775R	Page No.: 9
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 802.11a Ant 1	

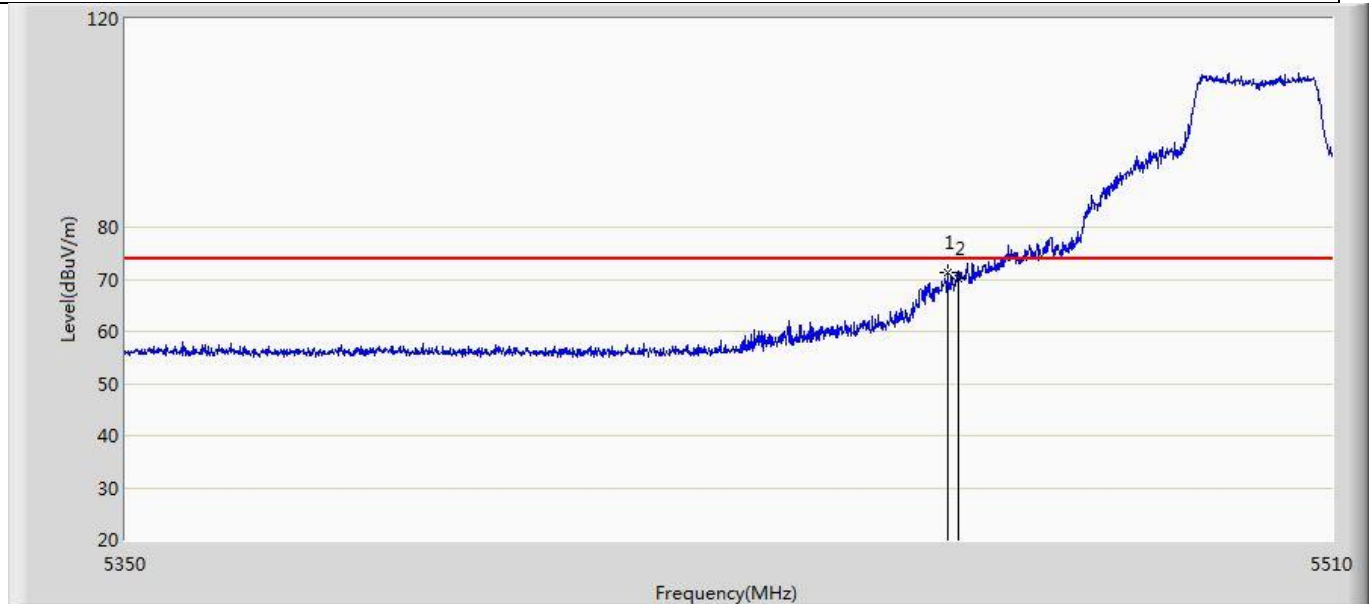


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.480	71.359	29.714	-2.641	74.000	41.644	PK
2		5460.000	70.031	28.399	-3.969	74.000	41.632	PK

Profile: 2150775R	Page No.: 10
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 802.11a Ant 1	

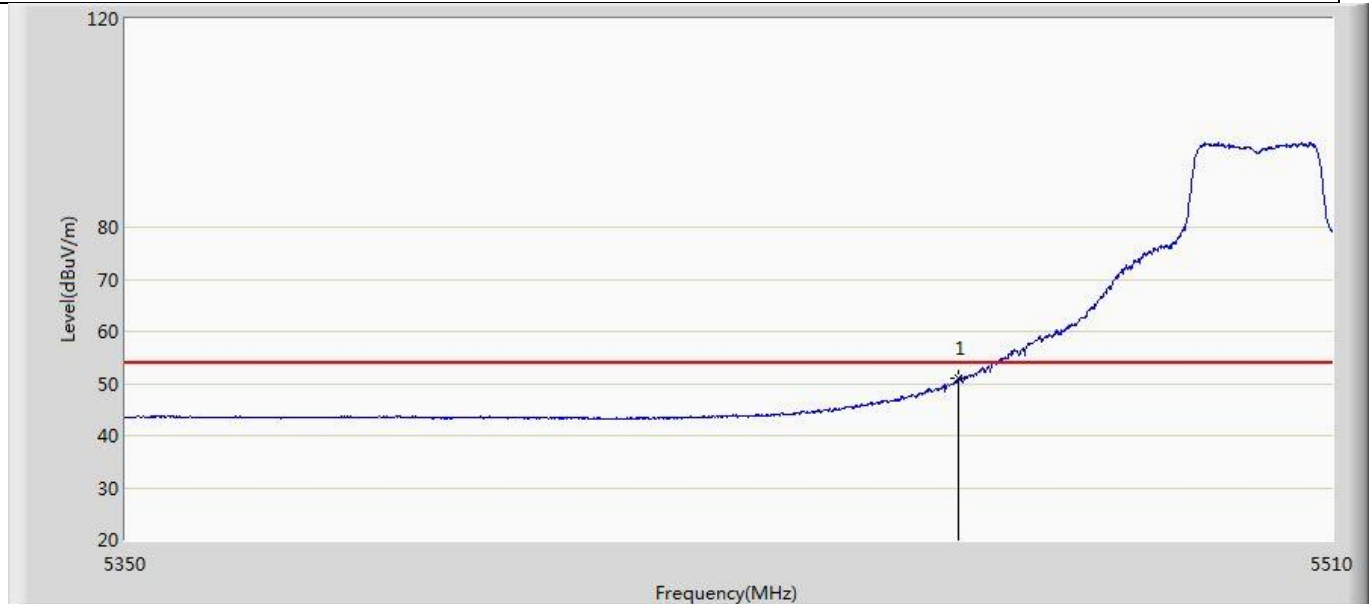


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.066	9.434	-2.934	54.000	41.632	AV

Profile: 2150775R	Page No.: 11
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 802.11a Ant 1	

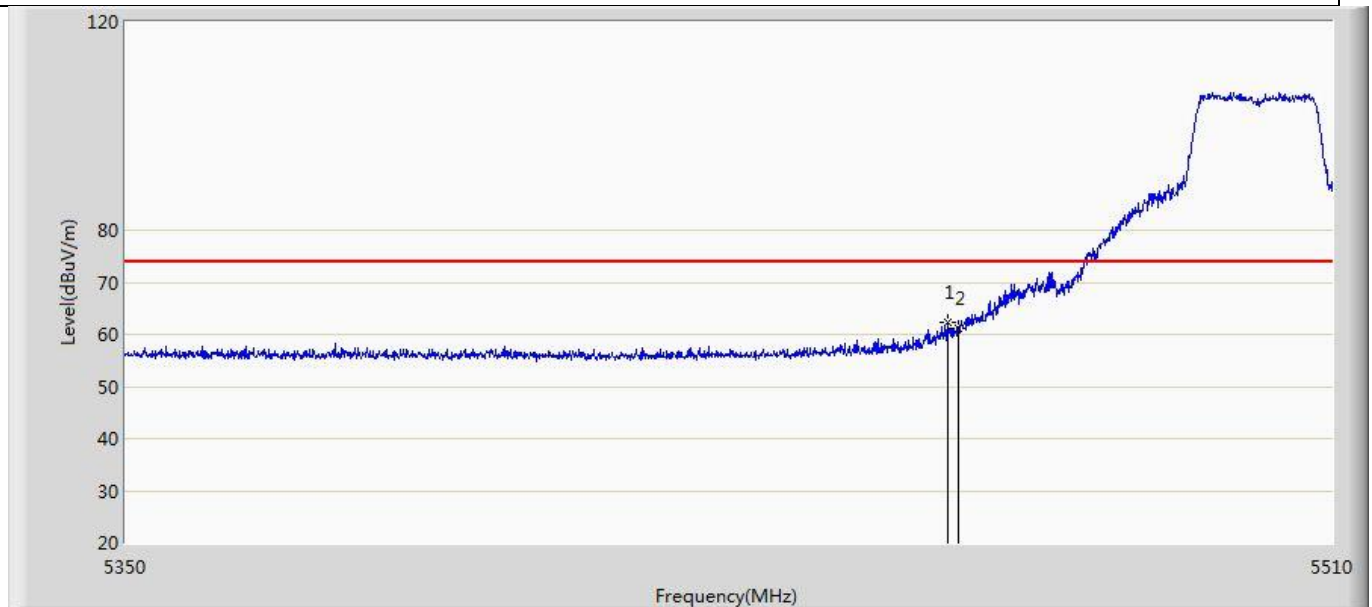


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.640	62.427	20.784	-11.573	74.000	41.643	PK
2		5460.000	61.125	19.493	-12.875	74.000	41.632	PK

Profile: 2150775R	Page No.: 12
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5500MHz by 802.11a Ant 1	

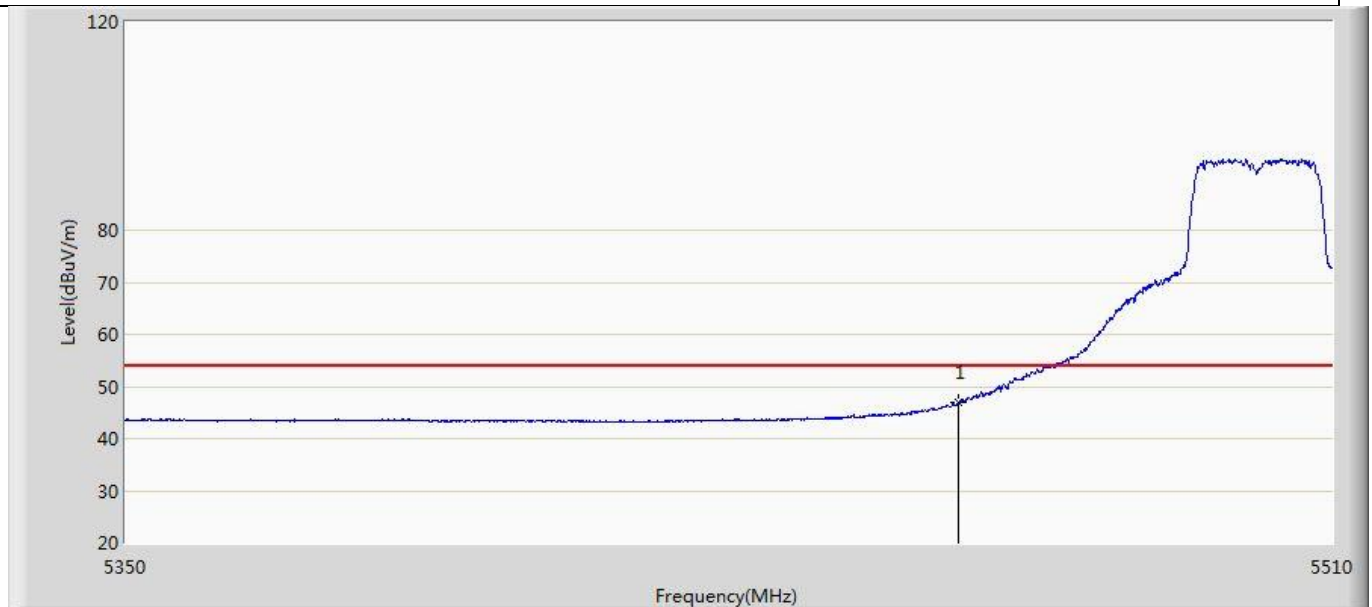


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	46.976	5.344	-7.024	54.000	41.632	AV

Profile: 2150775R	Page No.: 13
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:47
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5745MHz by 802.11a Ant 1	

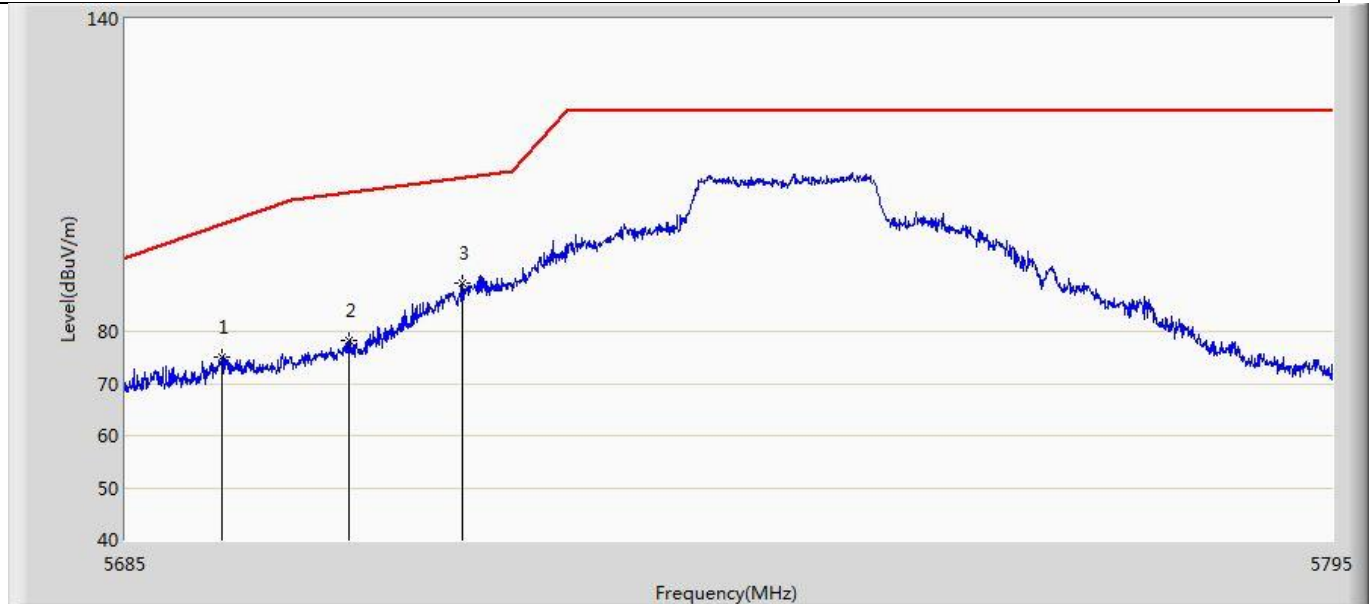


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5693.800	75.132	33.104	-25.497	100.630	42.028	PK
2		5705.185	78.341	36.290	-28.313	106.654	42.051	PK
3	*	5715.470	89.277	47.260	-20.256	109.533	42.017	PK

Profile: 2150775R	Page No.: 14
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:51
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5745MHz by 802.11a Ant 1	

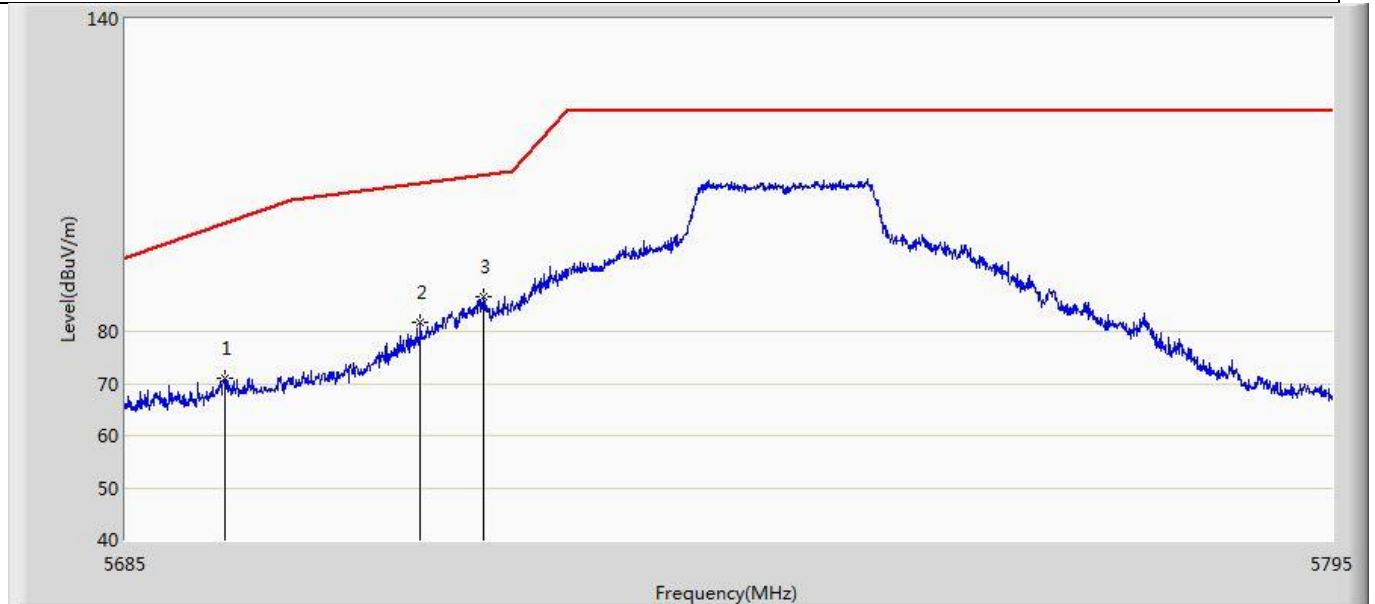


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5694.075	71.066	29.037	-29.767	100.832	42.029	PK
2		5711.730	81.802	39.761	-26.685	108.487	42.041	PK
3	*	5717.450	86.644	44.640	-23.443	110.087	42.005	PK

Profile: 2150775R	Page No.: 15
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:54
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5785MHz by 802.11a Ant 1	

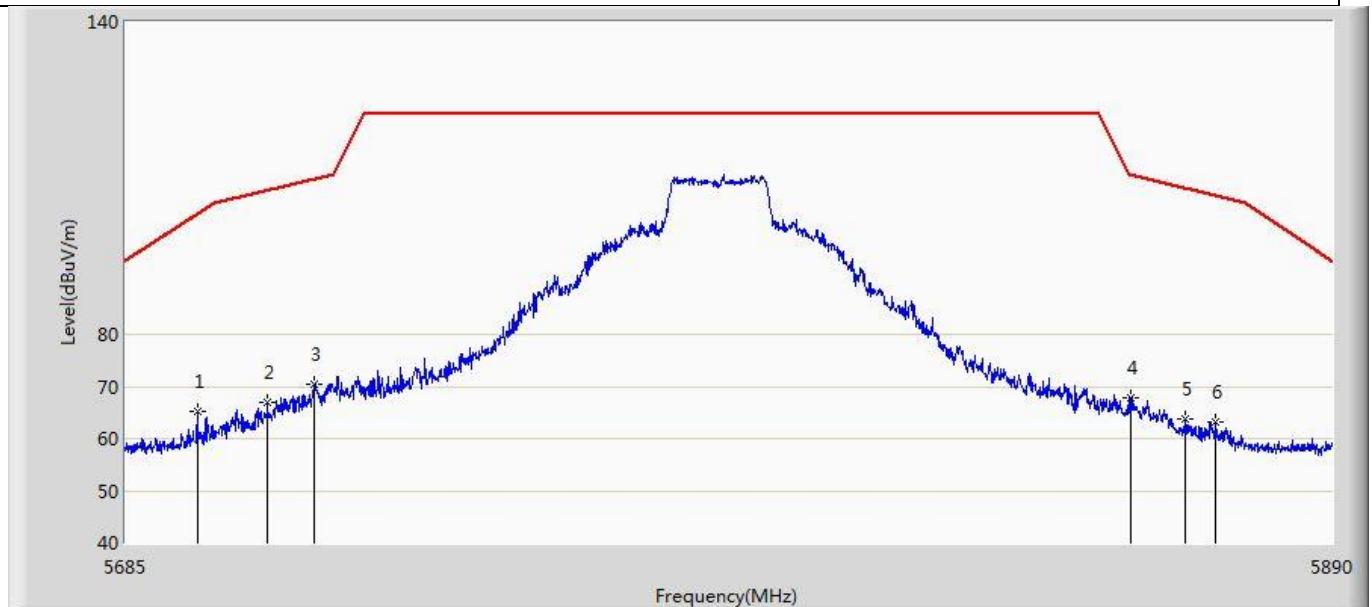


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5697.095	65.185	23.150	-37.874	103.059	42.035	PK
2		5708.780	66.962	24.904	-40.699	107.661	42.058	PK
3		5716.672	70.463	28.454	-39.406	109.870	42.009	PK
4		5855.252	67.944	25.971	-42.785	110.729	41.973	PK
5		5864.785	63.904	21.893	-44.154	108.058	42.011	PK
6		5869.808	63.311	21.271	-43.341	106.652	42.040	PK

Profile: 2150775R	Page No.: 16
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:56
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5785MHz by 802.11a Ant 1	

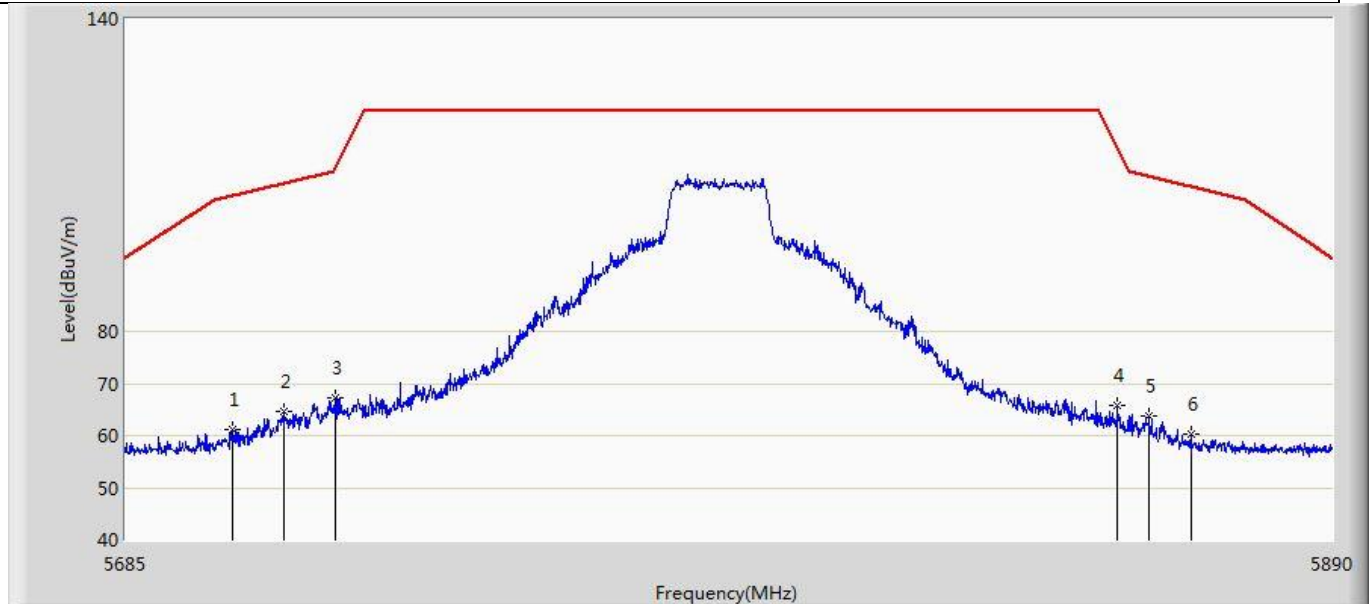


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5702.835	61.130	19.084	-44.865	105.995	42.046	PK
2	*	5711.445	64.540	22.497	-43.867	108.407	42.043	PK
3		5720.158	67.216	25.229	-43.944	111.160	41.987	PK
4		5853.100	65.691	23.725	-49.439	115.131	41.967	PK
5		5858.533	63.675	21.691	-46.134	109.809	41.984	PK
6		5865.708	60.180	18.164	-47.619	107.799	42.016	PK

Profile: 2150775R	Page No.: 17
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 22:58
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5825MHz by 802.11a Ant 1	

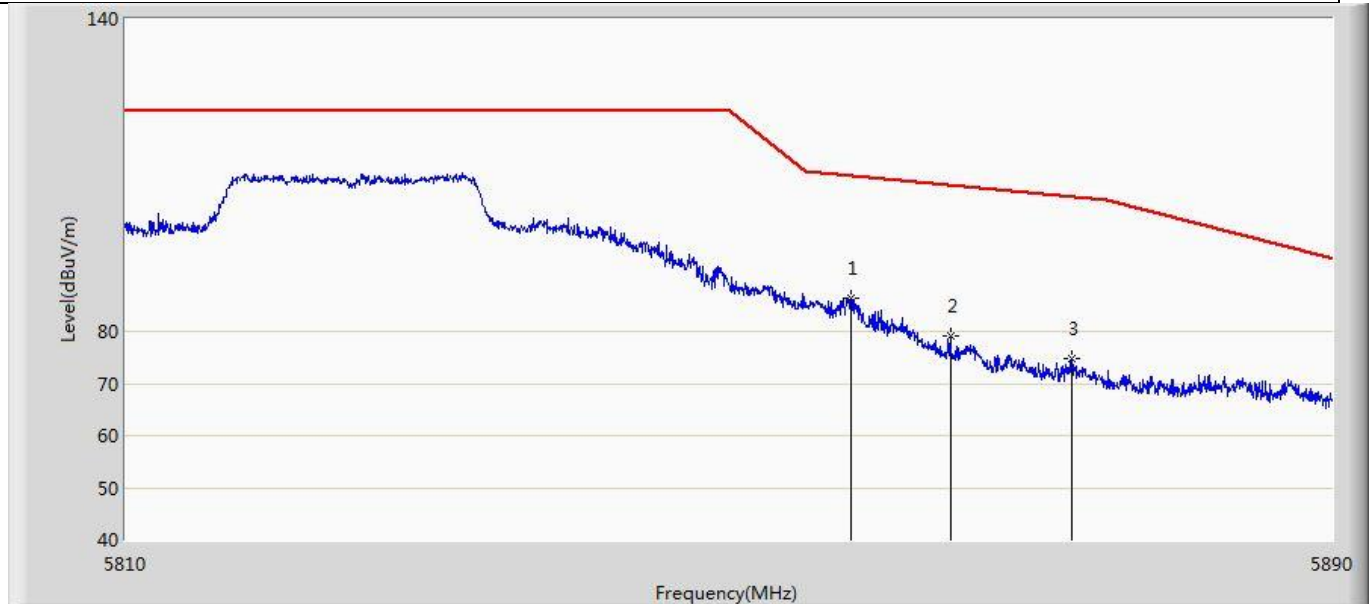


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5858.000	86.393	44.411	-23.566	109.959	41.982	PK
2		5864.600	78.993	36.983	-29.117	108.110	42.010	PK
3		5872.640	74.721	32.665	-31.139	105.860	42.056	PK

Profile: 2150775R	Page No.: 18
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:00
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 5825MHz by 802.11a Ant 1	

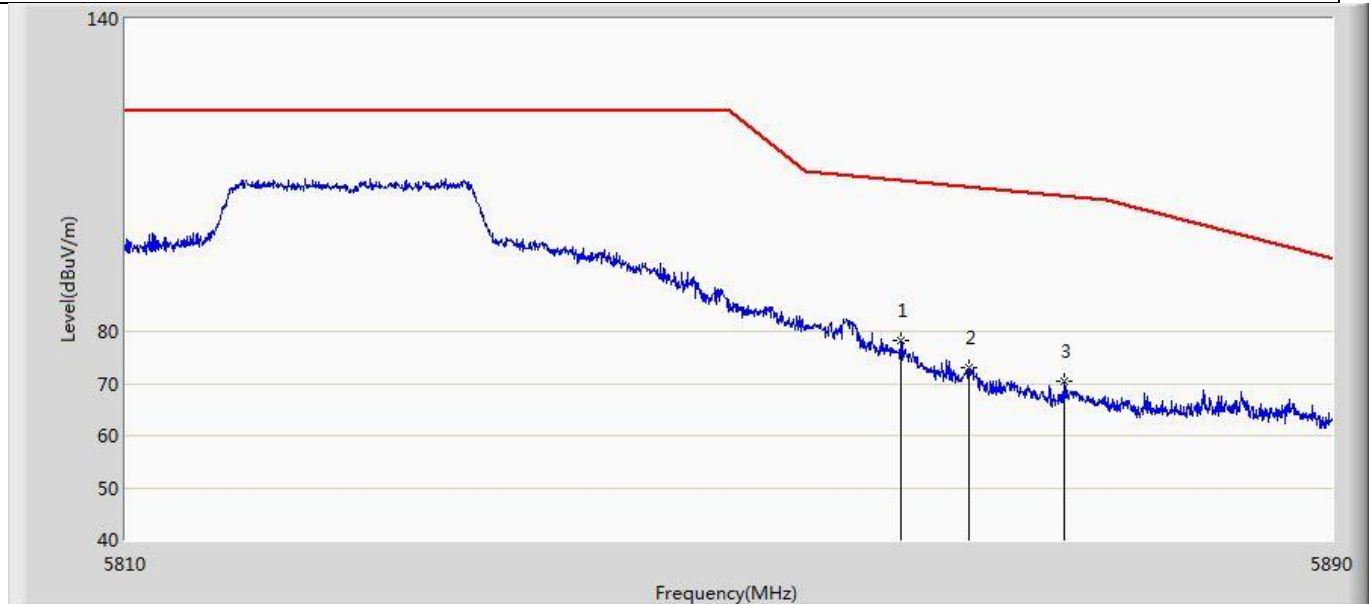


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5861.280	78.217	36.224	-30.823	109.040	41.992	PK
2		5865.840	73.141	31.124	-34.621	107.762	42.017	PK
3		5872.120	70.311	28.258	-35.694	106.005	42.053	PK

Profile: 2150775R	Page No.: 19
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) Ant 1	

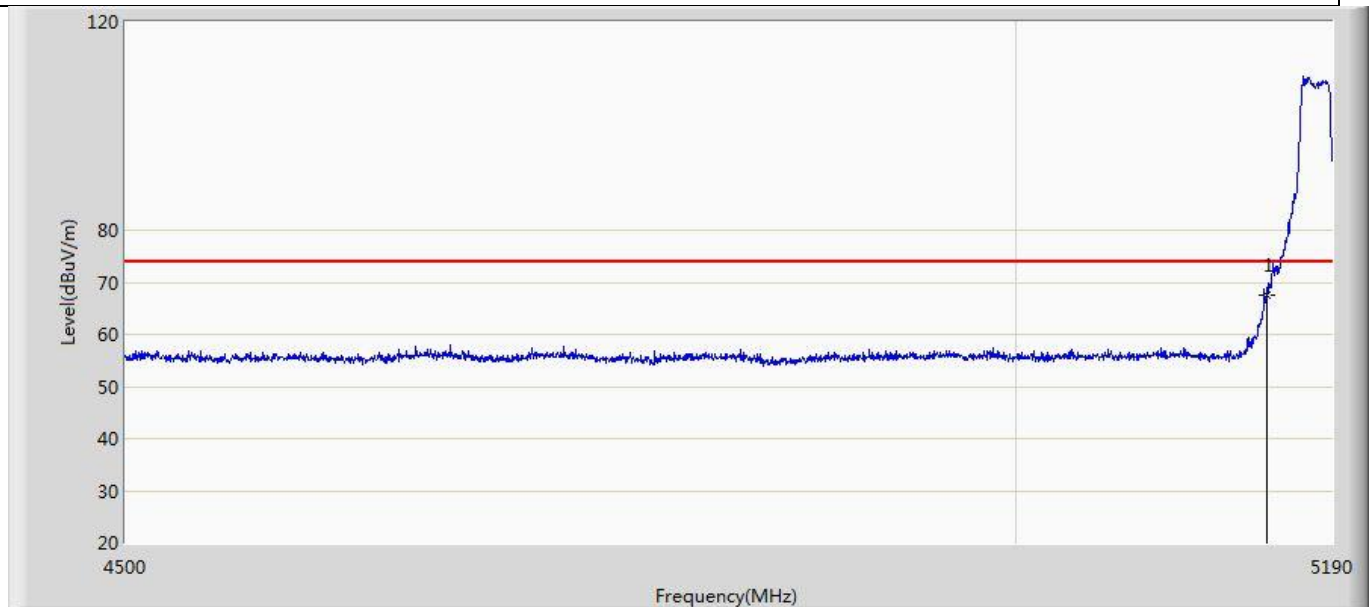


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	67.676	26.468	-6.324	74.000	41.208	PK

Profile: 2150775R	Page No.: 20
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) Ant 1	

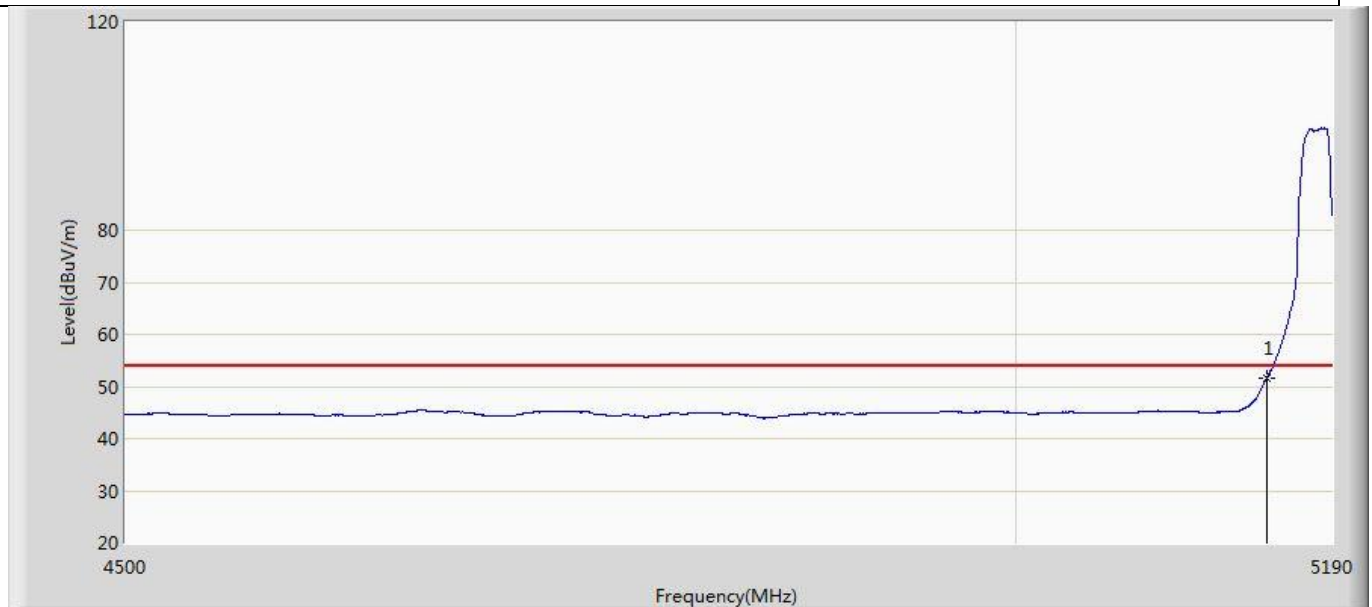


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.482	102.74	-2.518	54.000	41.208	AV

Profile: 2150775R	Page No.: 21
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) Ant 1	

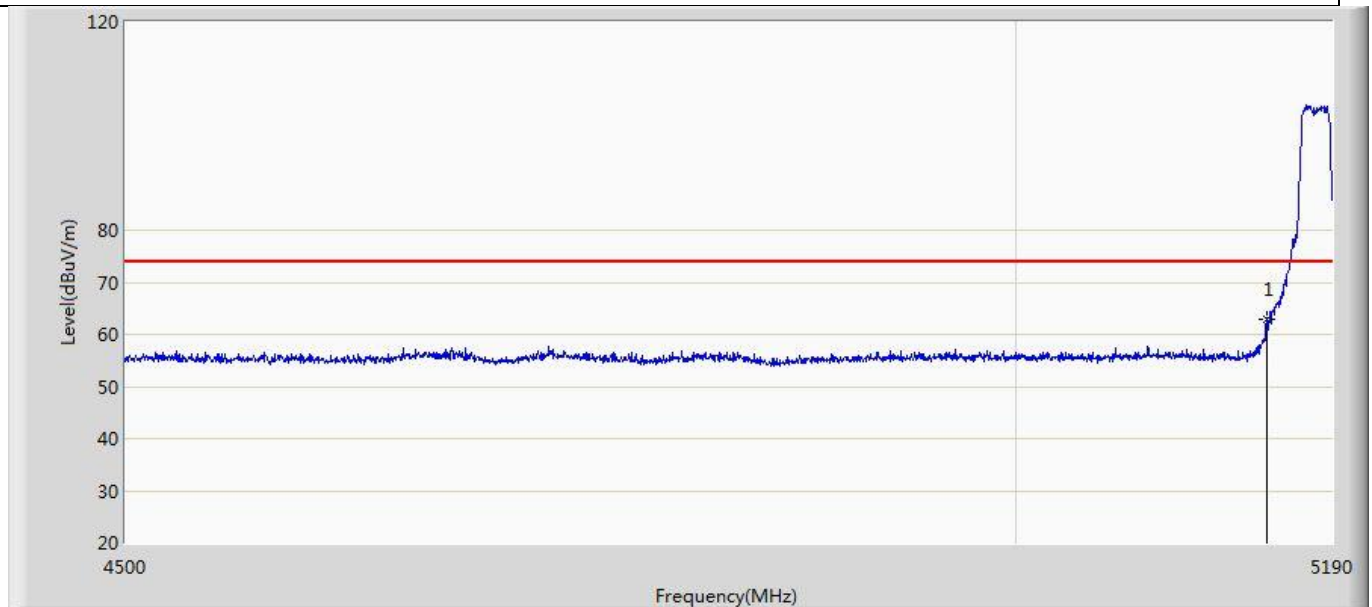


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	62.972	21.764	-11.028	74.000	41.208	PK

Profile: 2150775R	Page No.: 22
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) Ant 1	

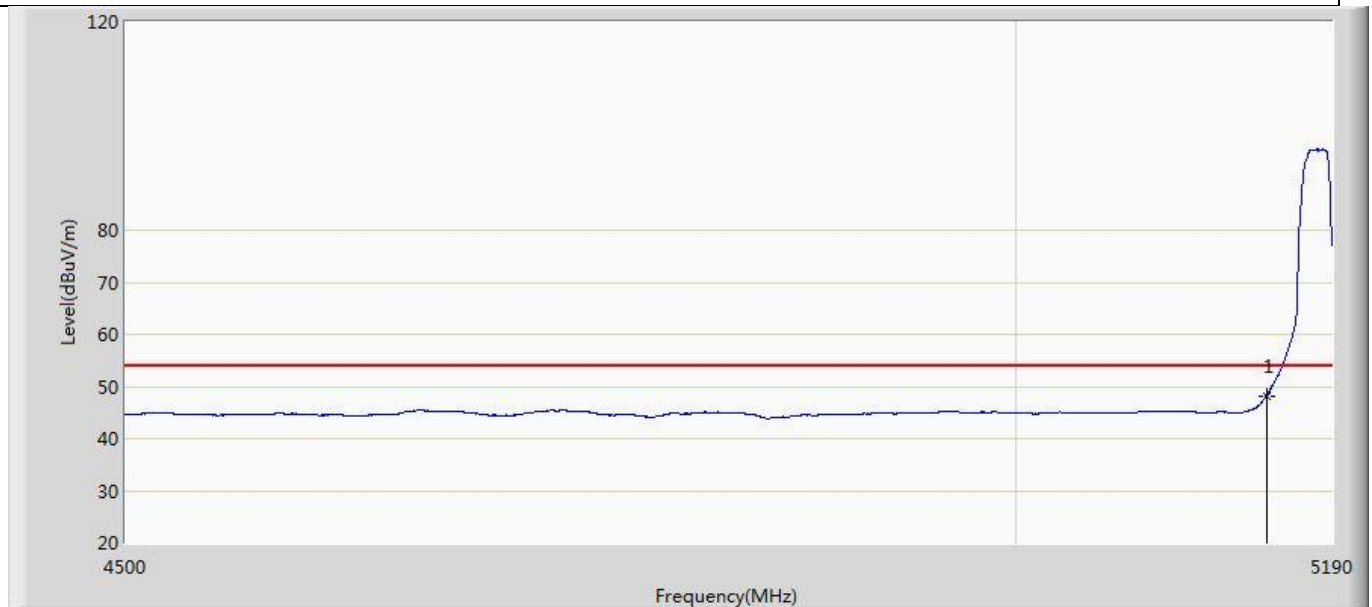


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	48.257	7.049	-5.743	54.000	41.208	AV

Profile: 2150775R	Page No.: 23
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) Ant 1	

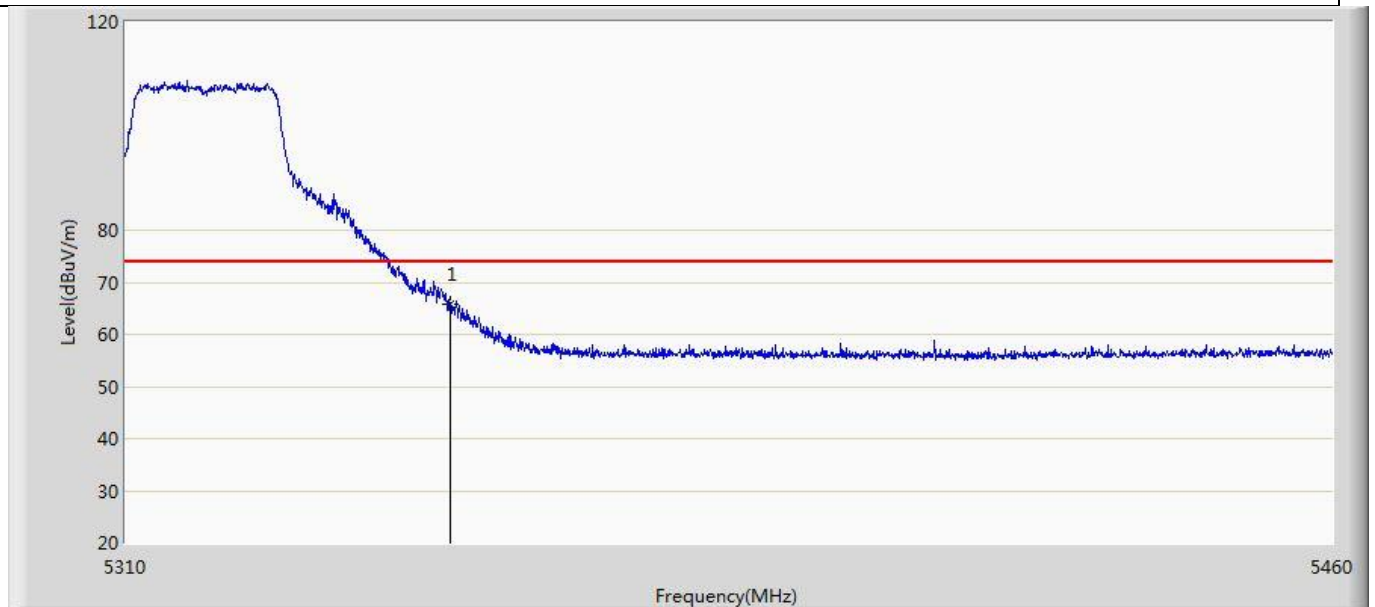


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	65.876	24.481	-8.124	74.000	41.395	PK

Profile: 2150775R	Page No.: 24
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) Ant 1	

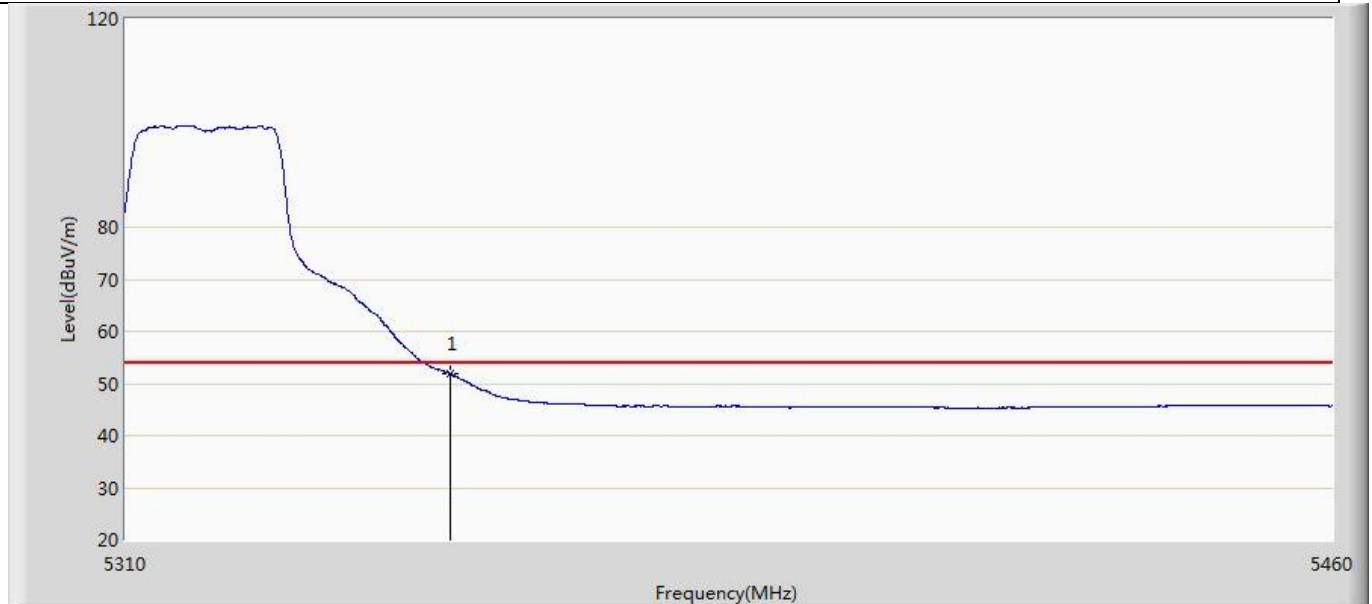


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.837	10.442	-2.163	54.000	41.395	AV

Profile: 2150775R	Page No.: 25
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) Ant 1	

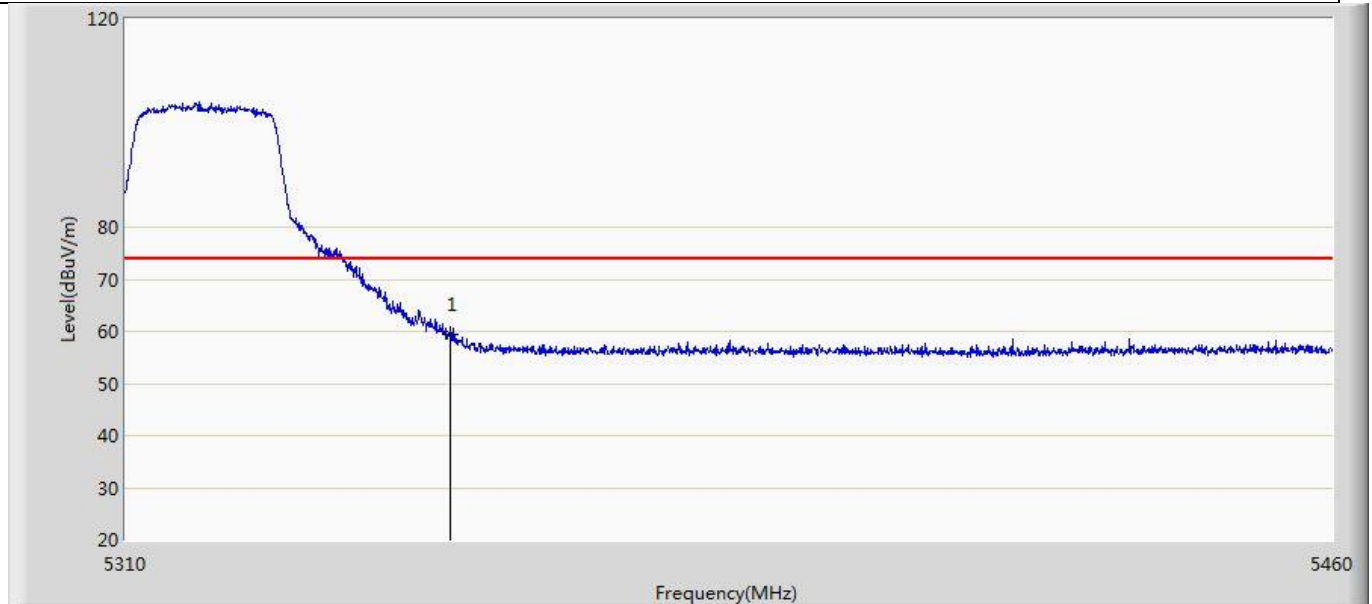


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	59.451	18.056	-14.549	74.000	41.395	PK

Profile: 2150775R	Page No.: 26
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) Ant 1	

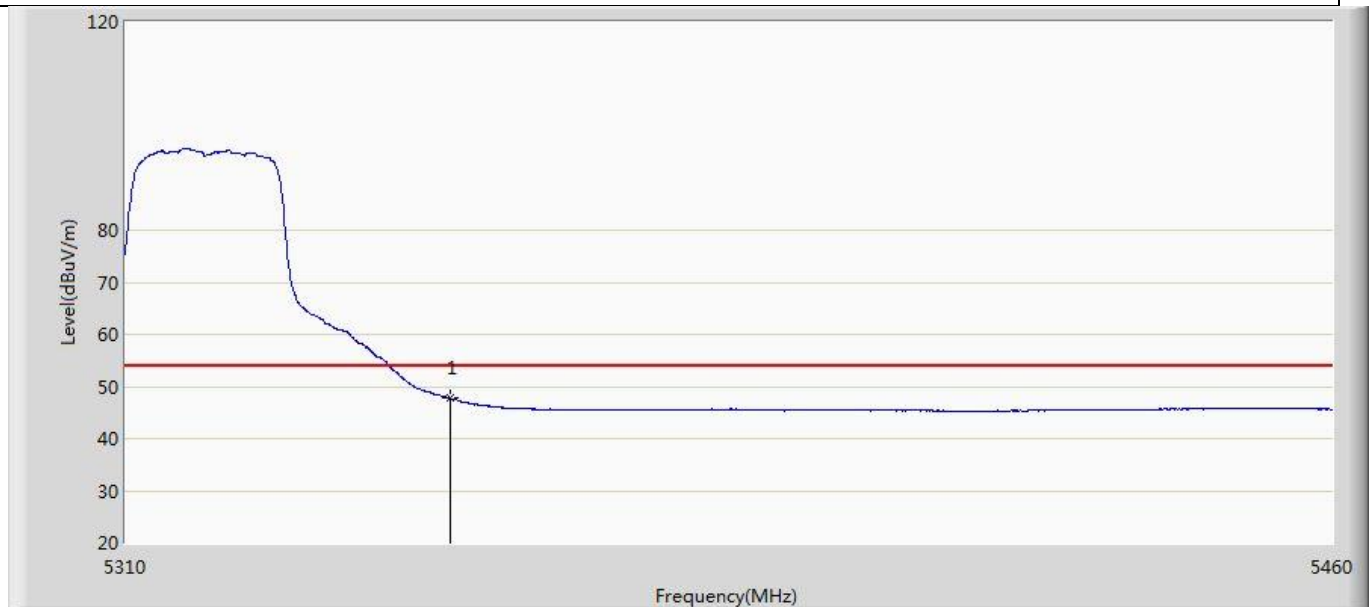


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	47.754	6.359	-6.246	54.000	41.395	AV

Profile: 2150775R	Page No.: 27
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) Ant 1	

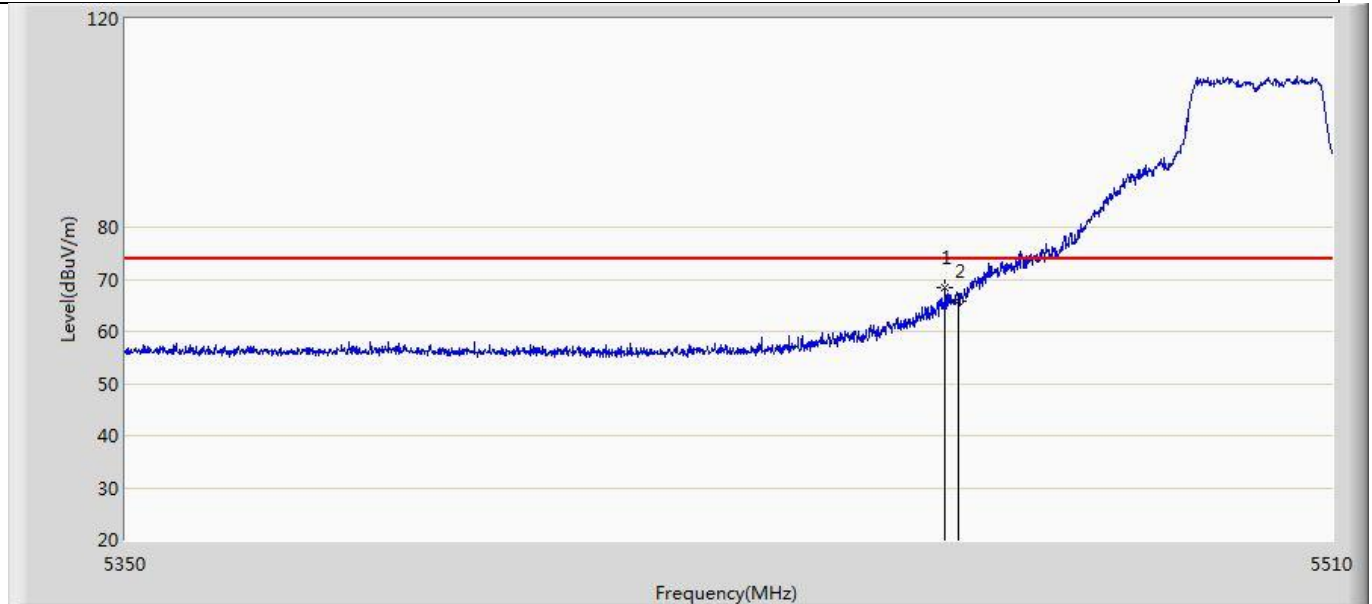


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.240	68.323	26.677	-5.677	74.000	41.646	PK
2		5460.000	65.876	24.244	-8.124	74.000	41.632	PK

Profile: 2150775R	Page No.: 28
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) Ant 1	

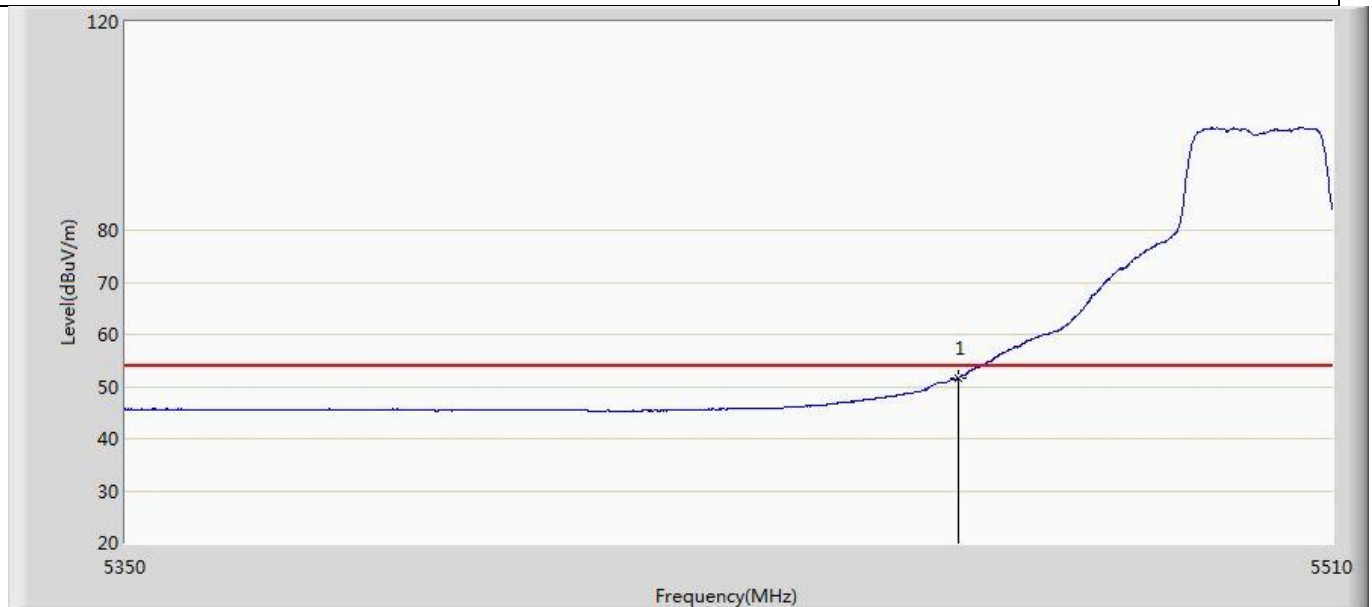


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.737	10.105	-2.263	54.000	41.632	AV

Profile: 2150775R	Page No.: 29
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) Ant 1	

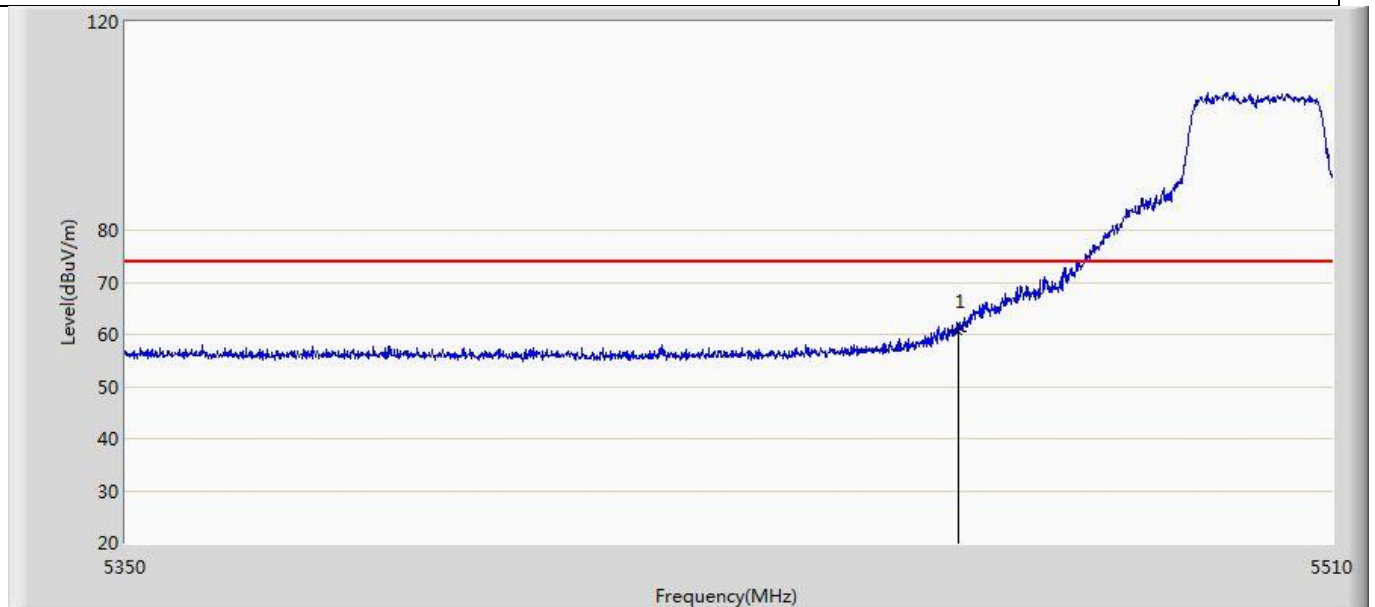


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	60.693	19.061	-13.307	74.000	41.632	PK

Profile: 2150775R	Page No.: 30
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) Ant 1	

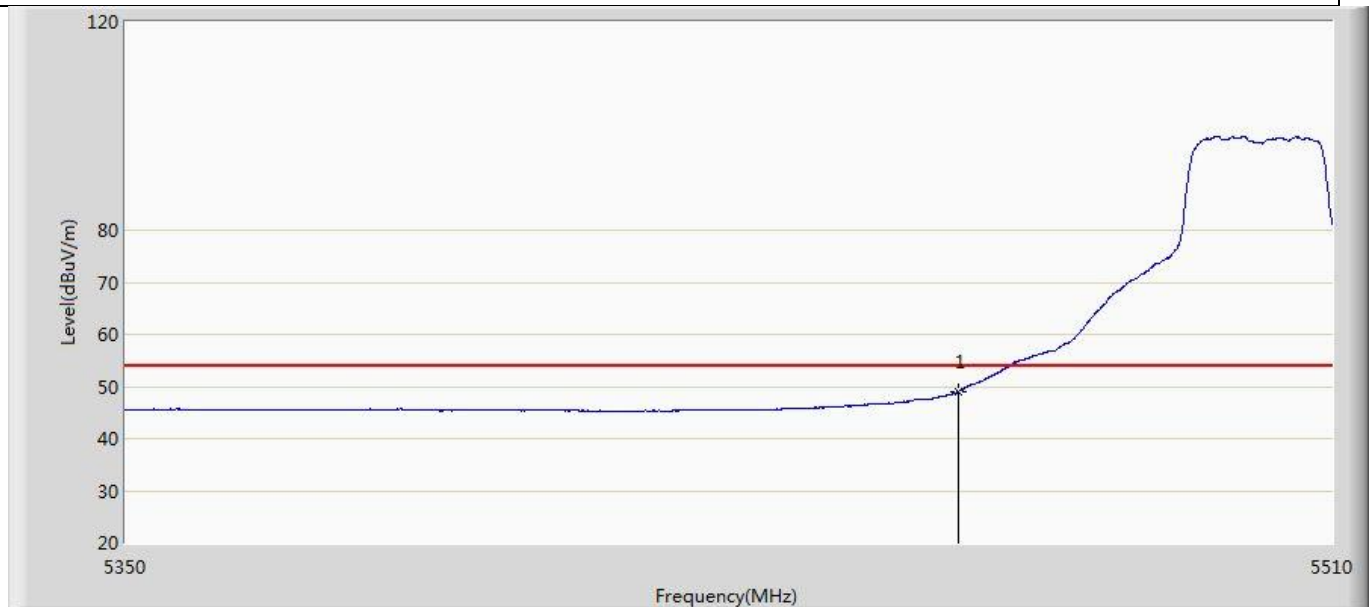


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	49.108	7.476	-4.892	54.000	41.632	AV

Profile: 2150775R	Page No.: 31
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:44
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5745MHz by 802.11n(20MHz) Ant 1	

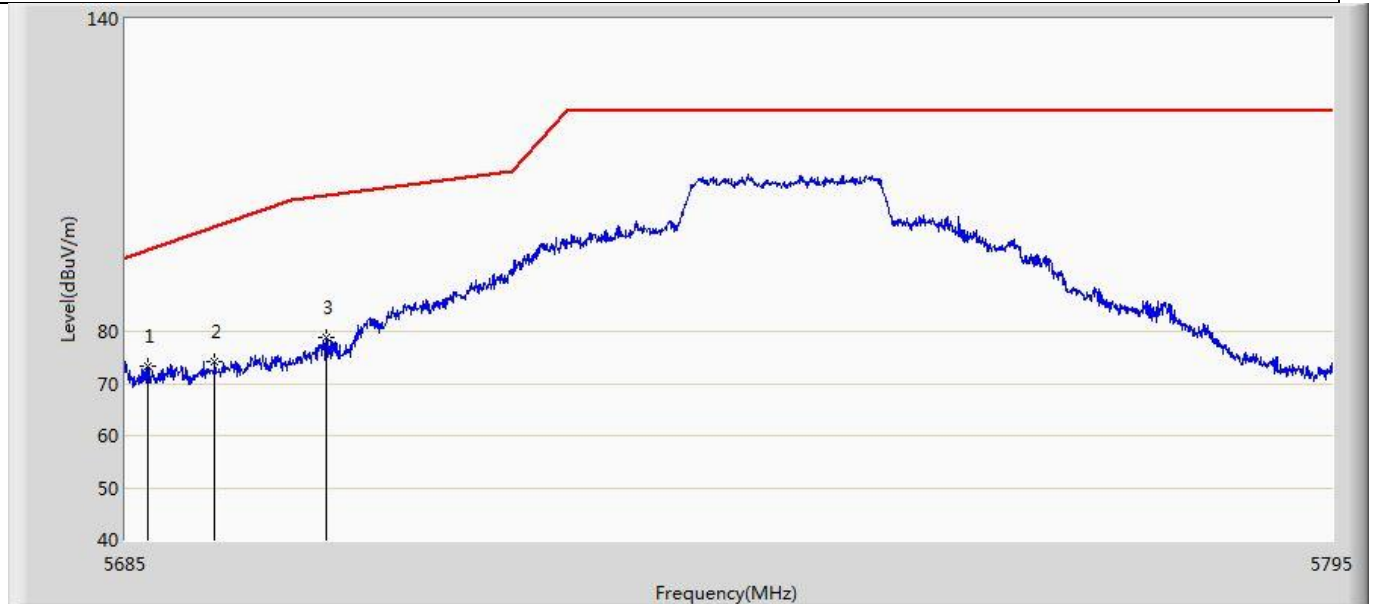


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5687.090	73.360	31.287	-22.318	95.678	42.073	PK
2		5693.085	74.338	32.311	-25.764	100.102	42.027	PK
3		5703.150	78.827	36.780	-27.256	106.083	42.047	PK

Profile: 2150775R	Page No.: 32
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:46
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5745MHz by 802.11n(20MHz) Ant 1	

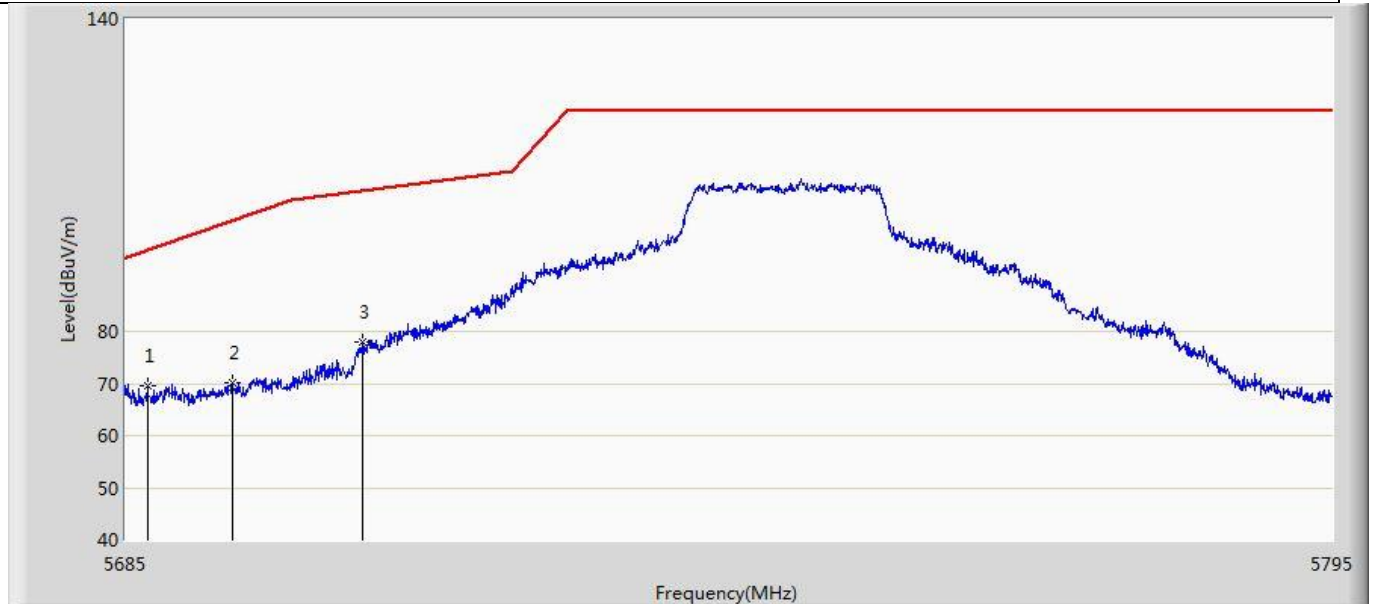


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5687.035	69.667	27.594	-25.970	95.637	42.074	PK
2		5694.680	70.093	28.063	-31.186	101.279	42.030	PK
3		5706.450	77.882	35.829	-29.126	107.008	42.053	PK

Profile: 2150775R	Page No.: 33
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:48
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5785MHz by 802.11n(20MHz) Ant 1	

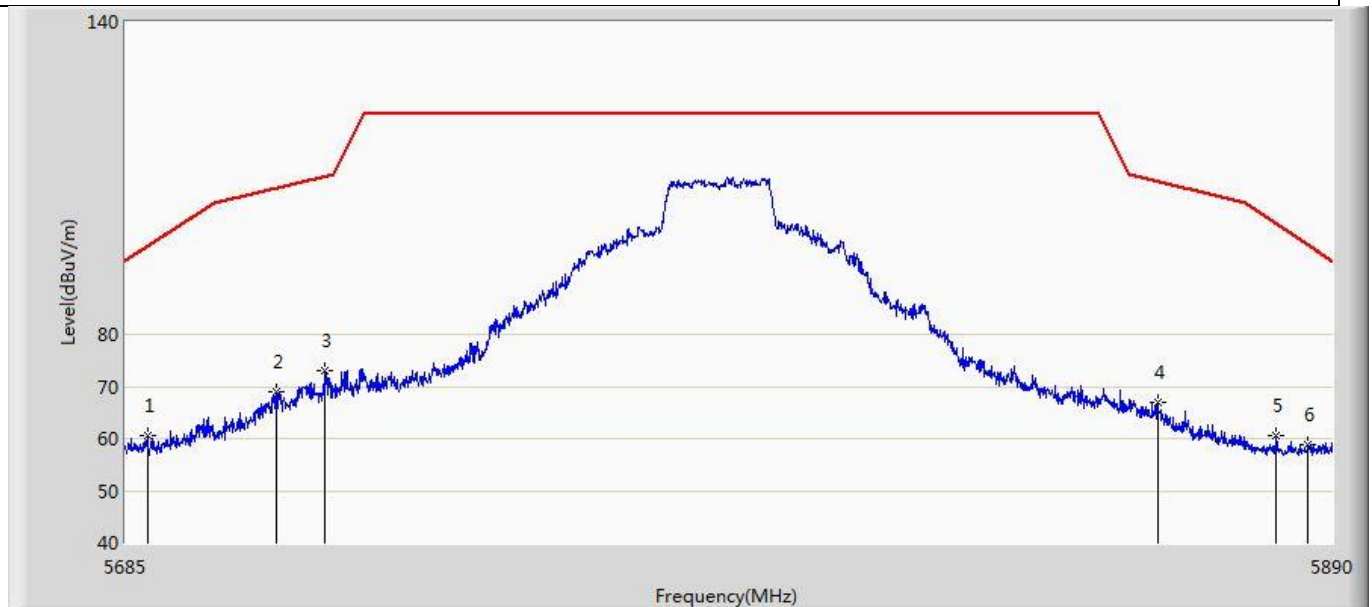


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5688.690	60.715	18.658	-36.144	96.859	42.057	PK
2		5710.215	69.056	27.005	-39.007	108.063	42.051	PK
3		5718.415	72.992	30.994	-37.365	110.357	41.999	PK
4		5859.967	66.968	24.980	-42.439	109.407	41.988	PK
5		5880.365	60.484	18.378	-40.731	101.215	42.105	PK
6		5885.797	58.836	16.678	-38.347	97.184	42.159	PK

Profile: 2150775R	Page No.: 34
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:52
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5785MHz by 802.11n(20MHz) Ant 1	

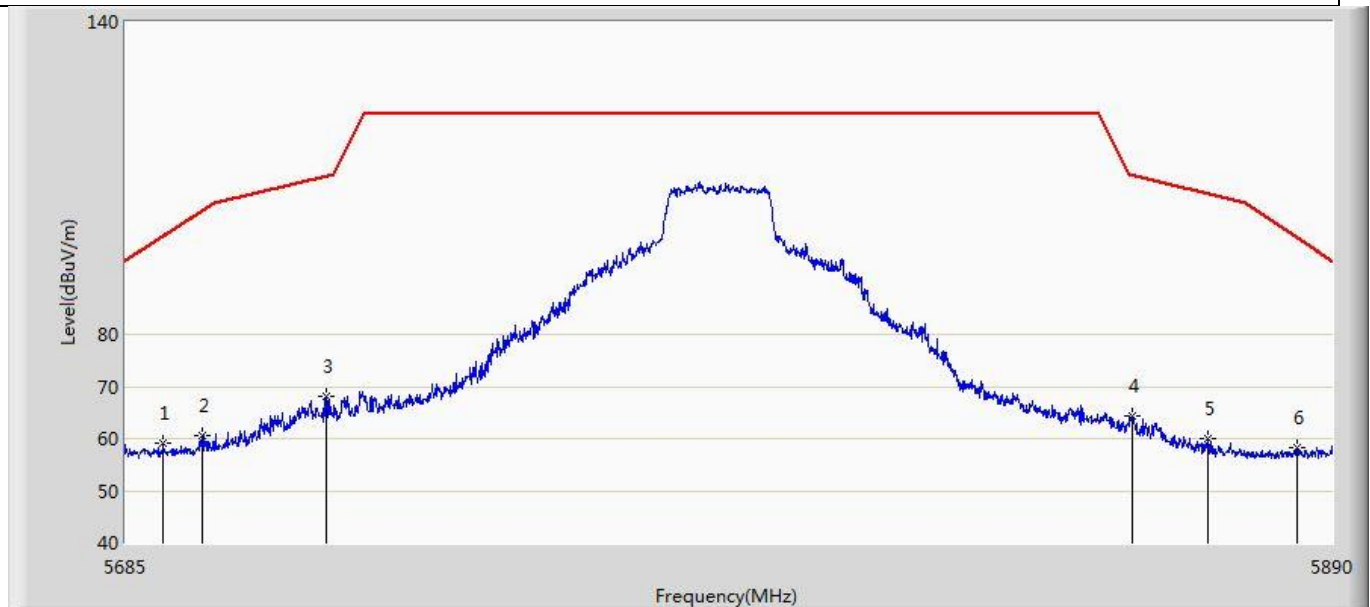


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5691.355	59.084	17.053	-39.742	98.826	42.031	PK
2		5697.812	60.574	18.538	-43.013	103.588	42.036	PK
3		5718.620	68.126	26.129	-42.288	110.414	41.997	PK
4		5855.663	64.489	22.514	-46.125	110.614	41.975	PK
5		5868.680	59.960	17.927	-47.007	106.968	42.033	PK
6		5884.055	58.174	16.033	-40.302	98.476	42.141	PK

Profile: 2150775R	Page No.: 35
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:53
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5825MHz by 802.11n(20MHz) Ant 1	

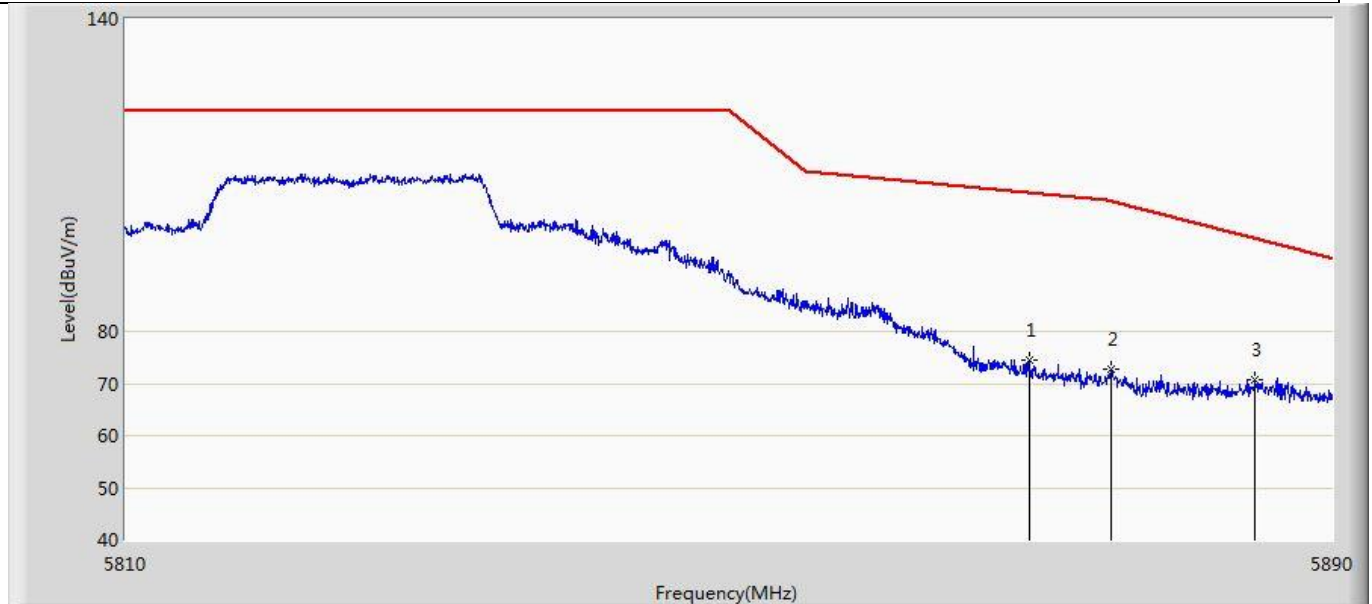


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5869.840	74.476	32.436	-32.167	106.643	42.040	PK
2		5875.240	72.679	30.608	-32.343	105.022	42.071	PK
3	*	5884.880	70.809	28.660	-27.054	97.864	42.150	PK

Profile: 2150775R	Page No.: 36
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:56
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2: Transmit at 5825MHz by 802.11n(20MHz) Ant 1	

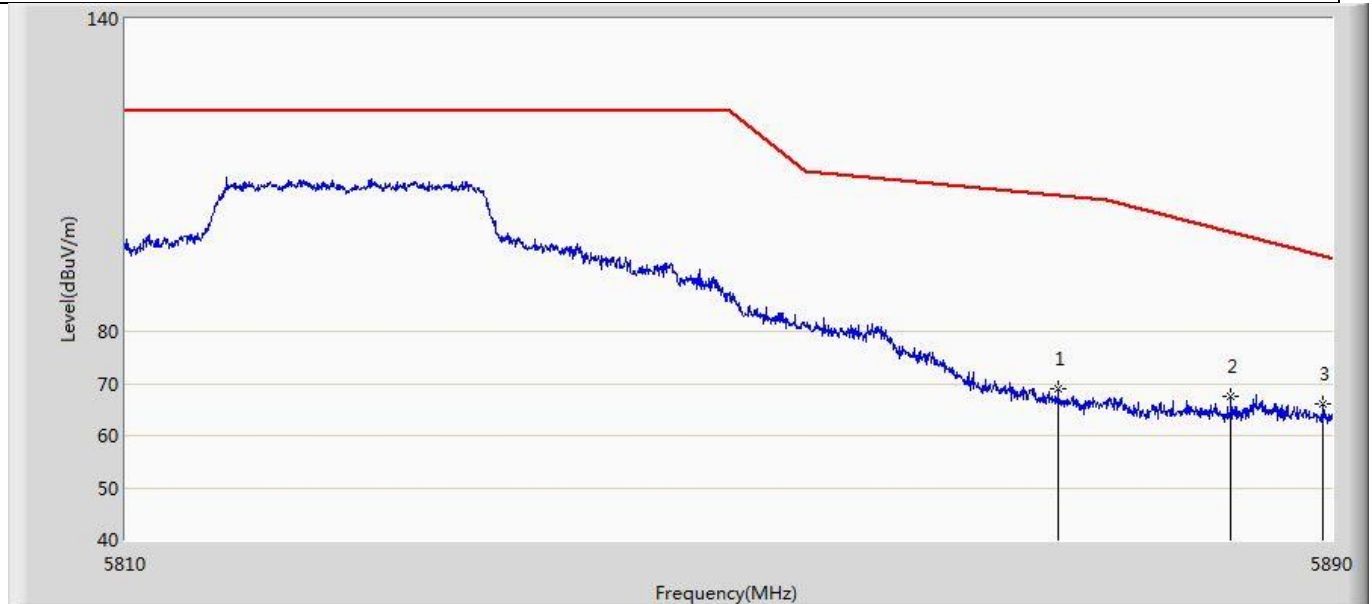


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5871.760	69.064	27.013	-37.042	106.106	42.050	PK
2		5883.280	67.570	25.436	-31.481	99.051	42.134	PK
3	*	5889.440	66.170	23.976	-28.312	94.482	42.194	PK

Profile: 2150775R	Page No.: 37
Engineer: Tongben	
Site: AC5	Time: 2021/06/09 - 23:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) Ant 1	

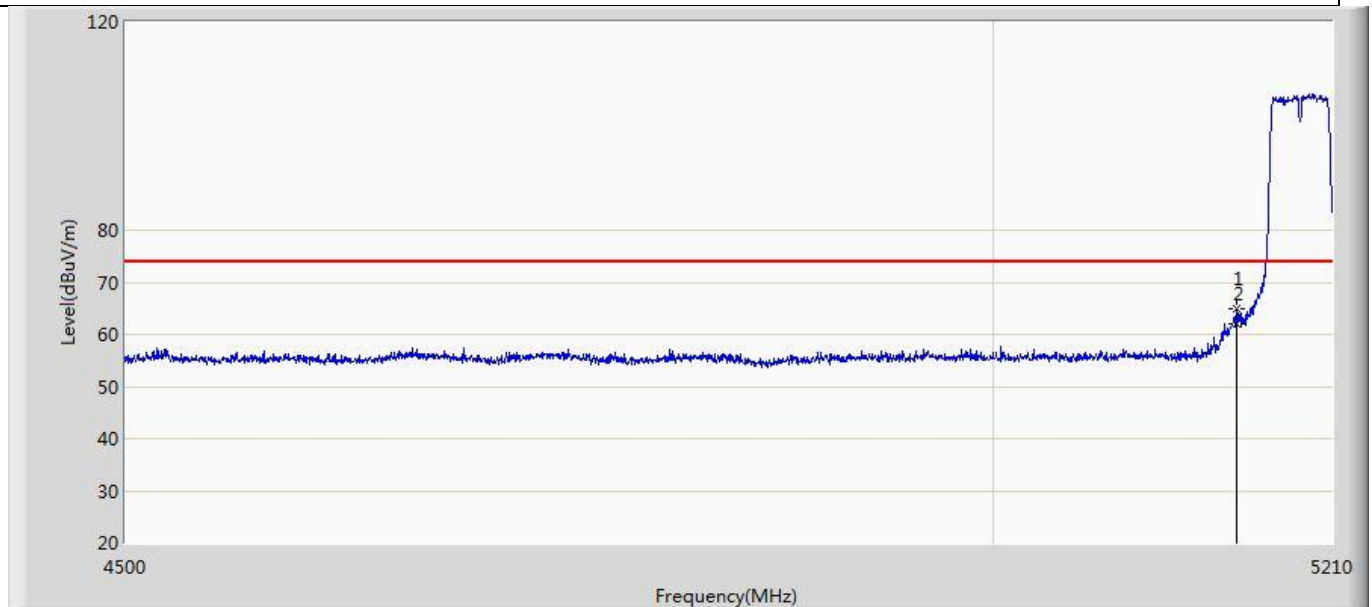


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5149.650	64.903	23.704	-9.097	74.000	41.199	PK
2		5150.000	62.111	20.903	-11.889	74.000	41.208	PK

Profile: 2150775R	Page No.: 38
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) Ant 1	

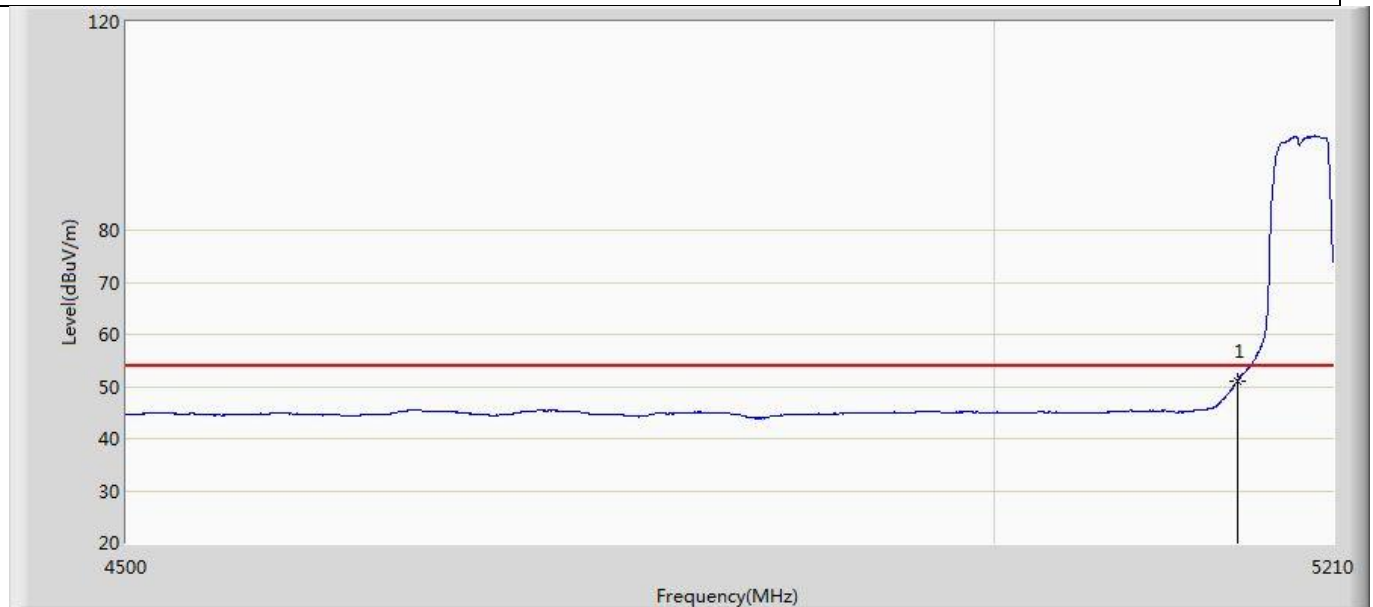


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.051	9.843	-2.949	54.000	41.208	AV

Profile: 2150775R	Page No.: 39
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) Ant 1	

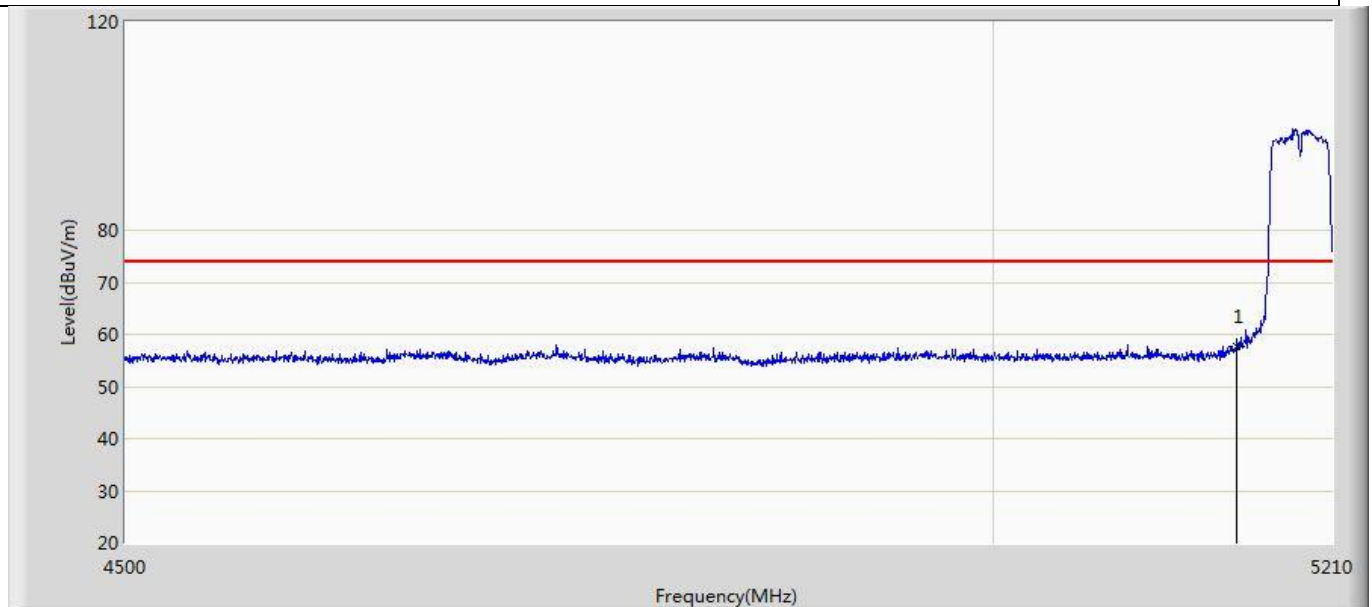


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	57.789	16.581	-16.211	74.000	41.208	PK

Profile: 2150775R	Page No.: 40
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) Ant 1	

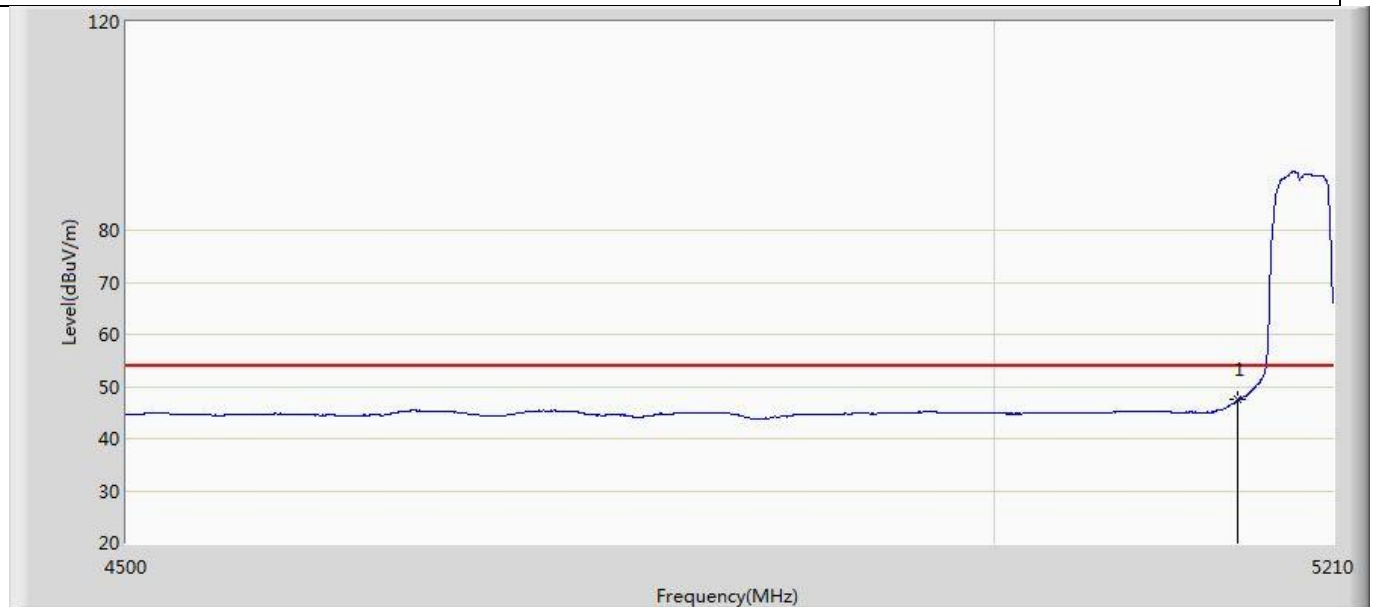


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	47.402	6.194	-6.598	54.000	41.208	AV

Profile: 2150775R	Page No.: 41
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) Ant 1	

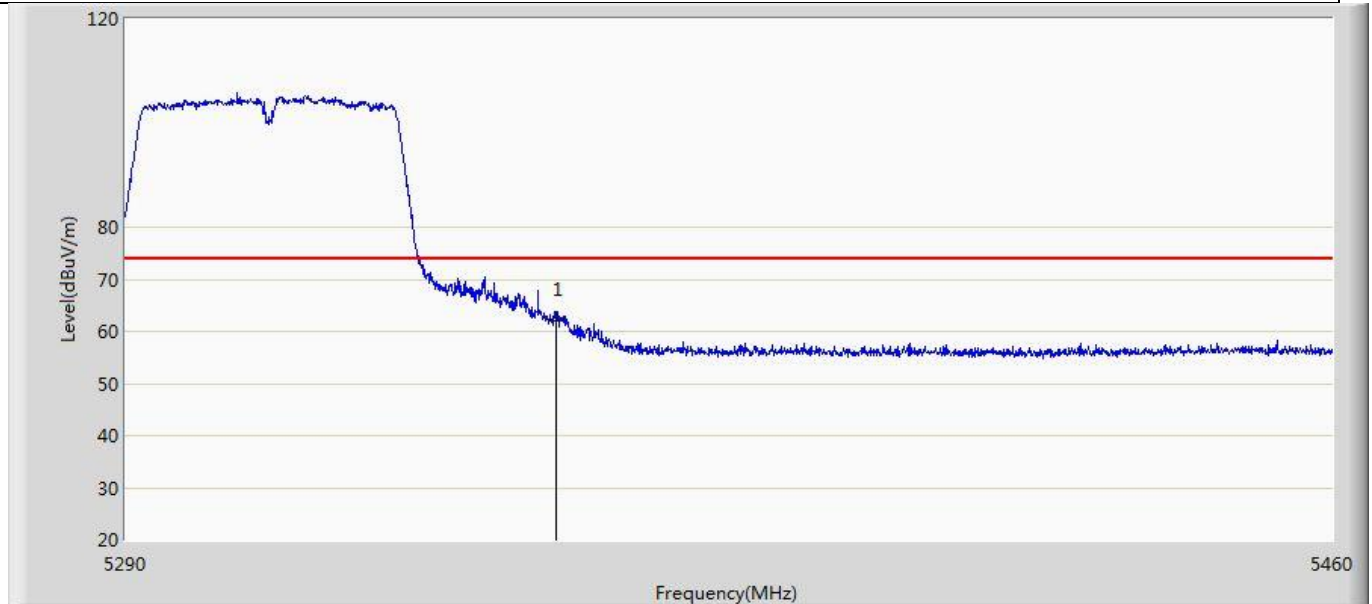


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	62.451	21.056	-11.549	74.000	41.395	PK

Profile: 2150775R	Page No.: 42
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) Ant 1	

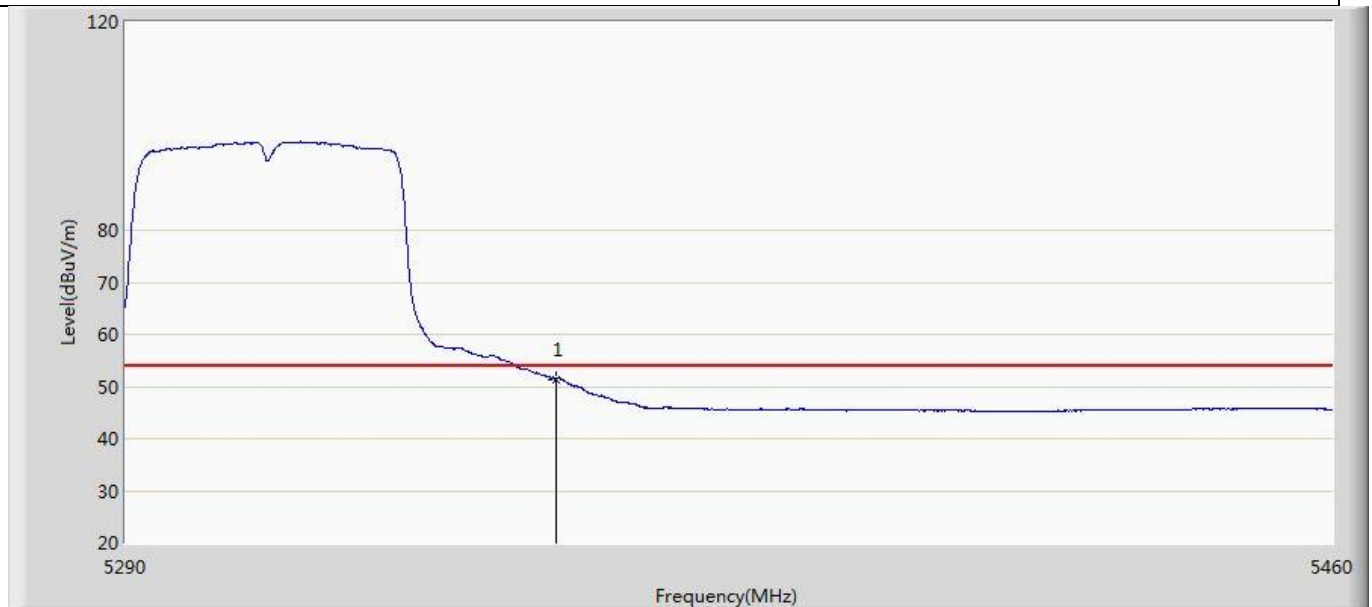


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.432	10.037	-2.568	54.000	41.395	AV

Profile: 2150775R	Page No.: 43
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) Ant 1	

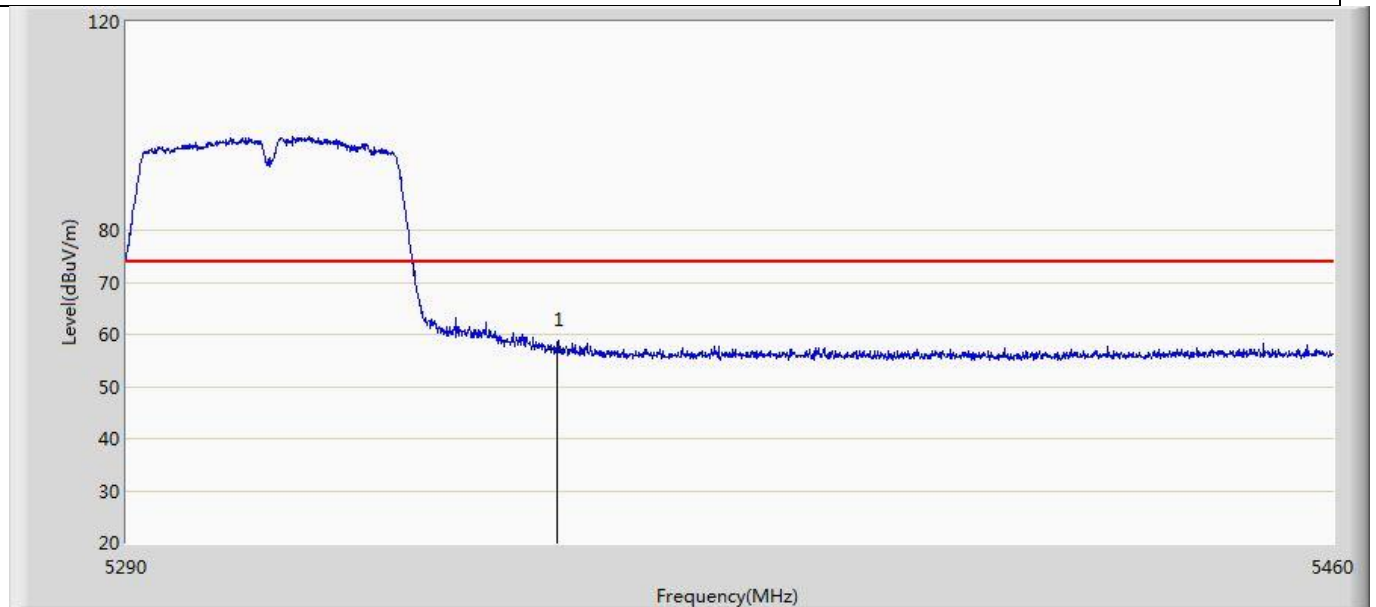


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	57.182	15.787	-16.818	74.000	41.395	PK

Profile: 2150775R	Page No.: 44
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) Ant 1	

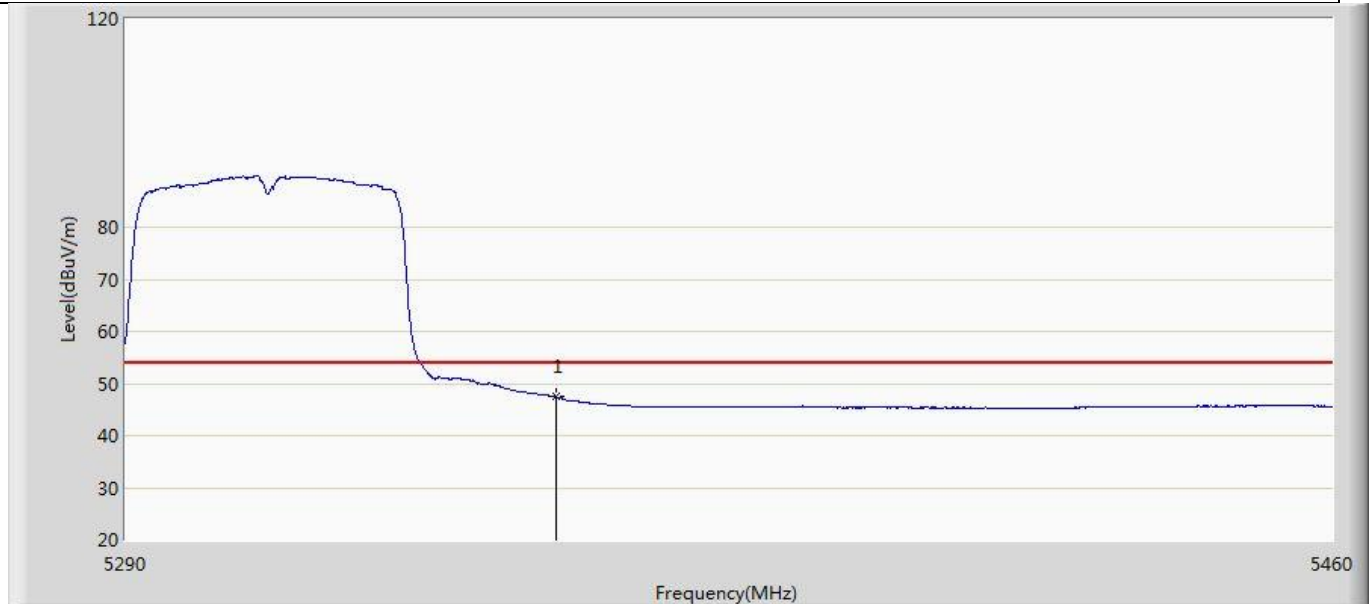


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	47.392	5.997	-6.608	54.000	41.395	AV

Profile: 2150775R	Page No.: 45
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 00:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) Ant 1	

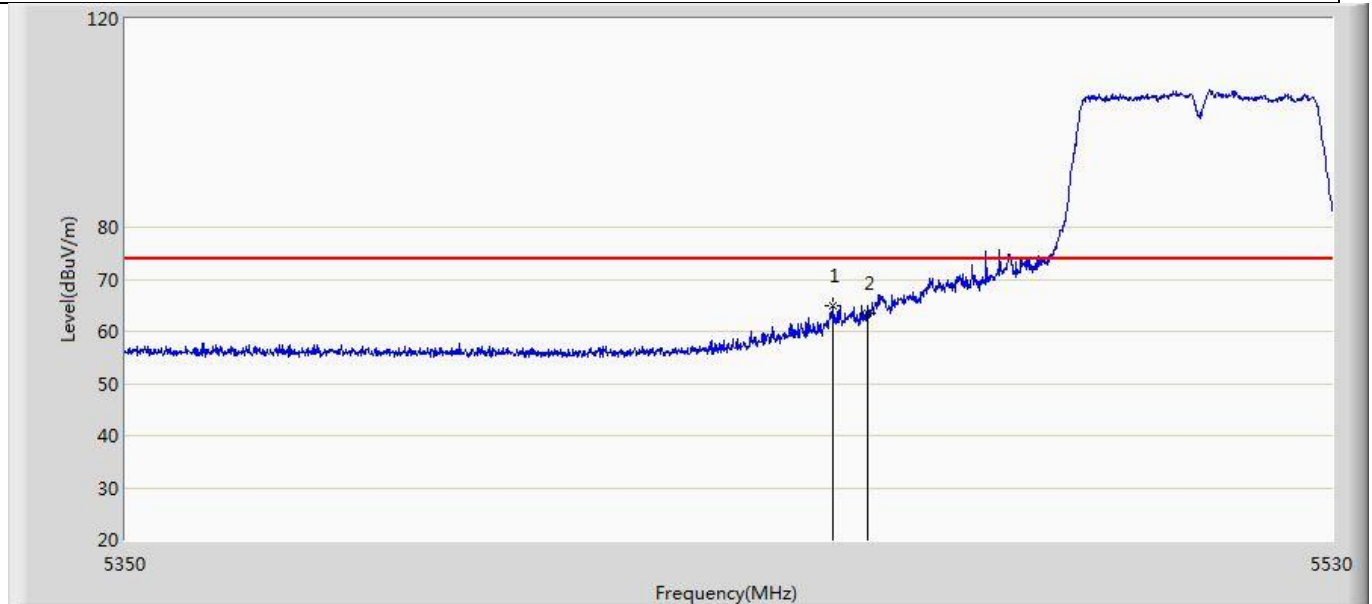


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5454.940	65.069	23.396	-8.931	74.000	41.673	PK
2		5460.000	63.596	21.964	-10.404	74.000	41.632	PK

Profile: 2150775R	Page No.: 46
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 01:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) Ant 1	

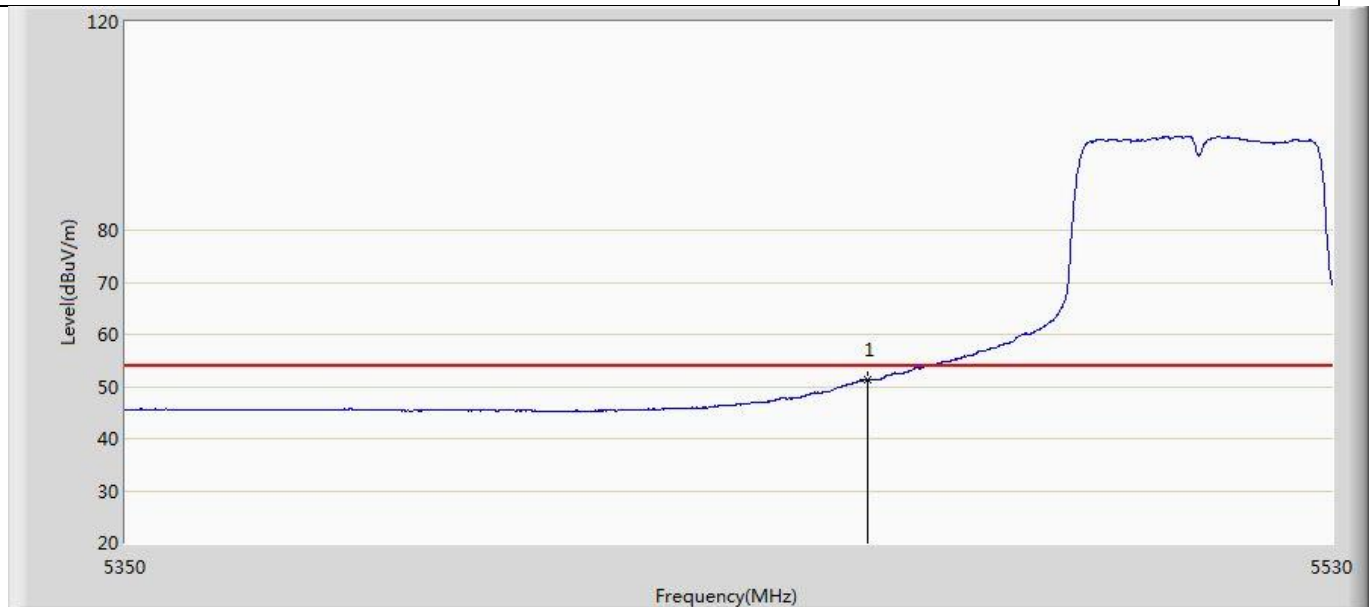


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.304	9.672	-2.696	54.000	41.632	AV

Profile: 2150775R	Page No.: 47
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 01:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) Ant 1	

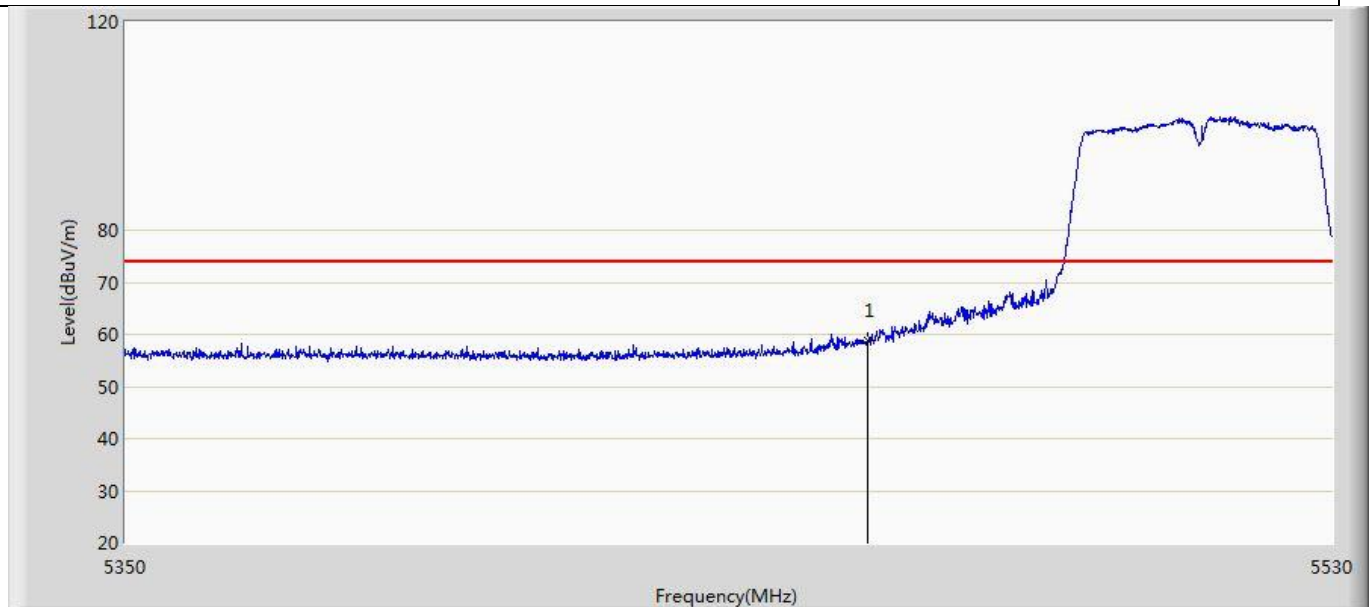


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	58.770	17.138	-15.230	74.000	41.632	PK

Profile: 2150775R	Page No.: 48
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 01:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) Ant 1	

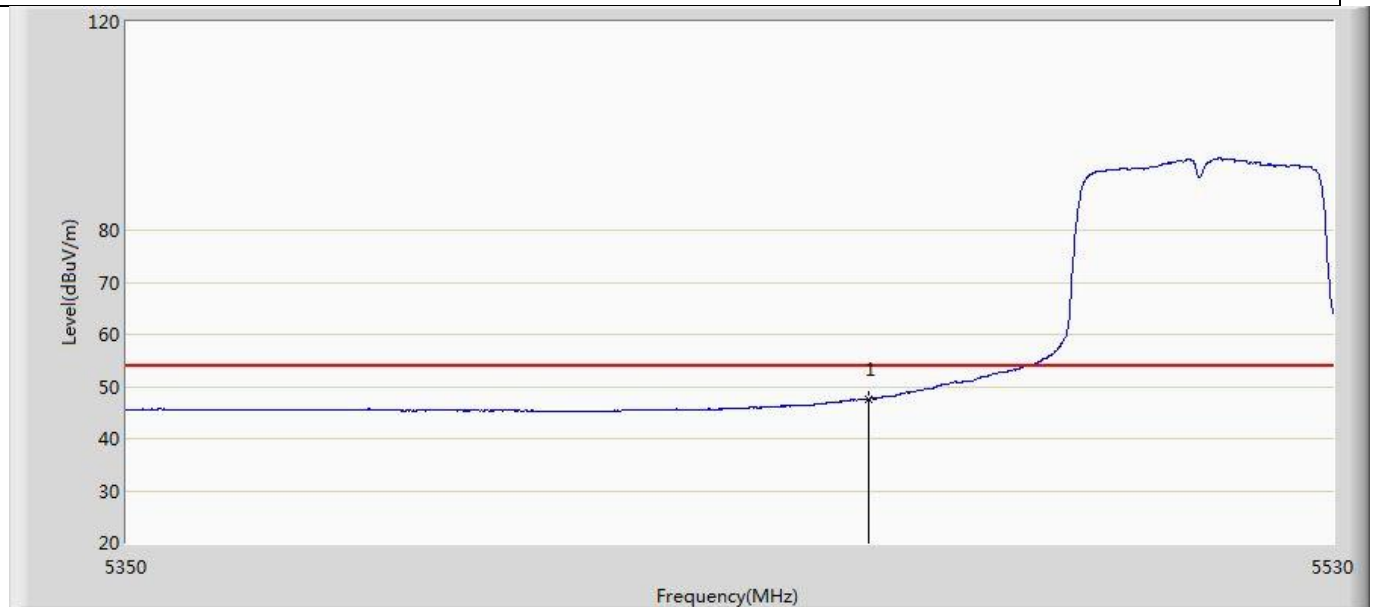


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	47.665	6.033	-6.335	54.000	41.632	AV

Profile: 2150775R	Page No.: 49
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 01:52
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5755MHz by 802.11n(40MHz) Ant 1	

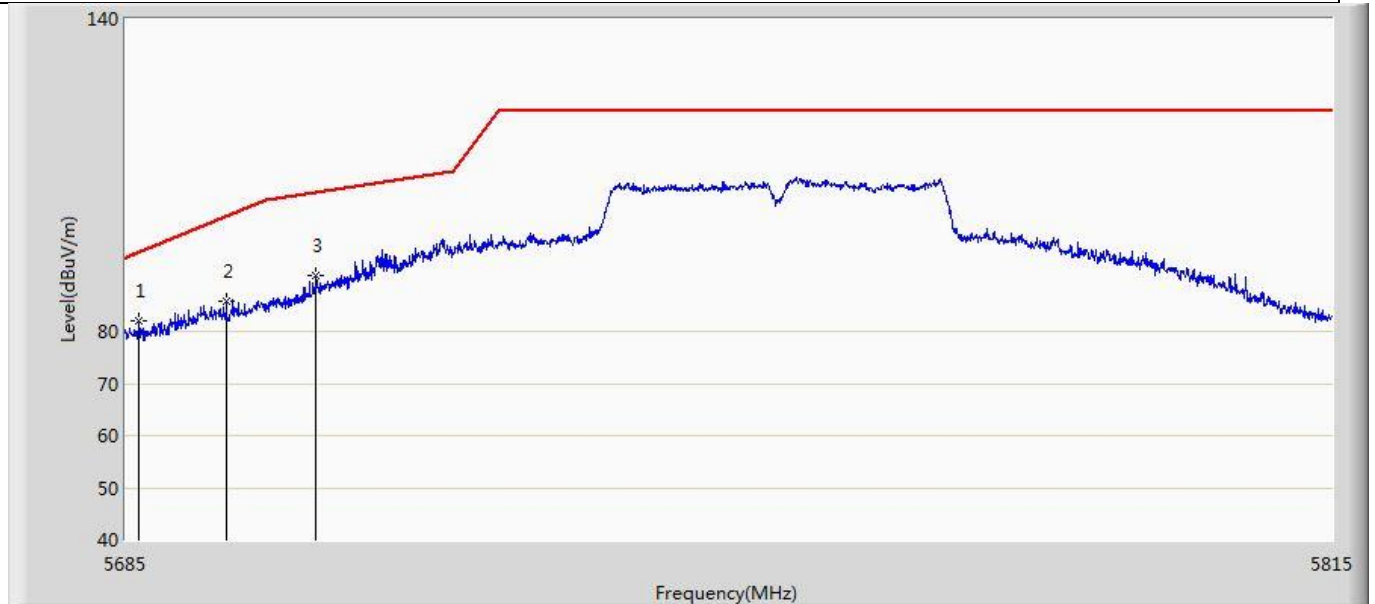


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5686.495	81.899	39.820	-13.340	95.238	42.078	PK
2		5695.790	85.836	43.804	-16.261	102.097	42.032	PK
3		5705.410	90.587	48.536	-16.129	106.717	42.051	PK

Profile: 2150775R	Page No.: 50
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 01:55
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5755MHz by 802.11n(40MHz) Ant 1	

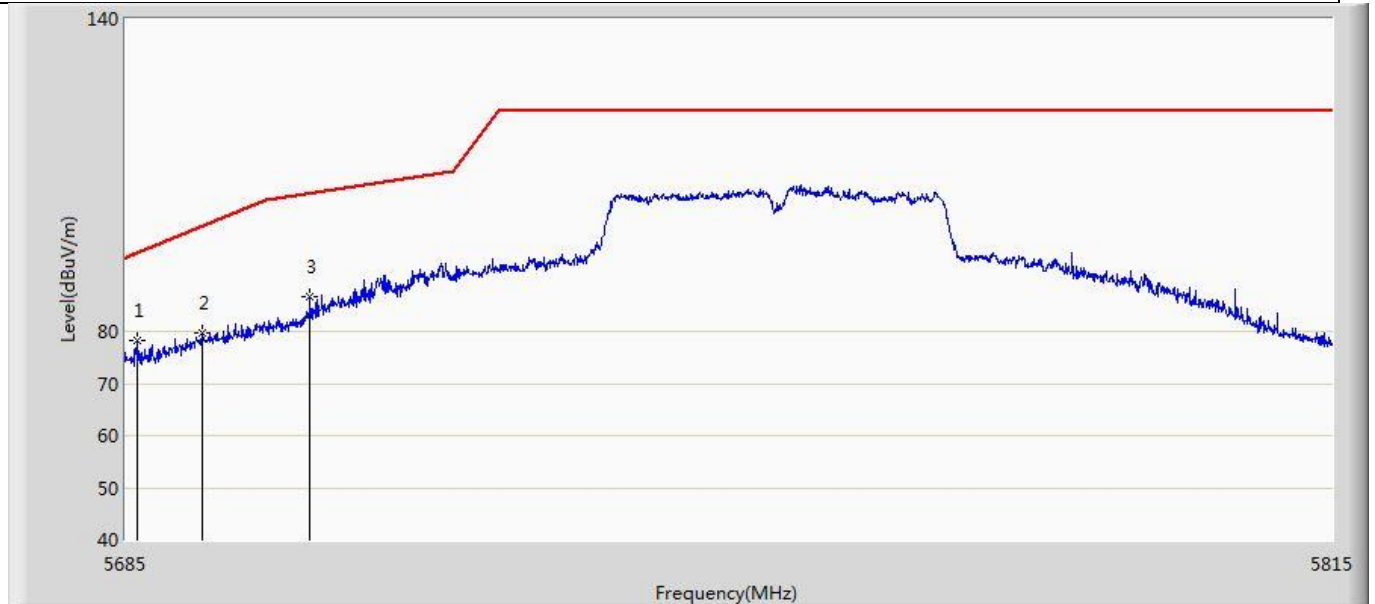


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5686.235	78.329	36.248	-16.717	95.046	42.081	PK
2		5693.255	79.805	37.778	-20.422	100.228	42.027	PK
3		5704.695	86.742	44.692	-19.774	106.516	42.050	PK

Profile: 2150775R	Page No.: 51
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 01:56
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5795MHz by 802.11n(40MHz) Ant 1	

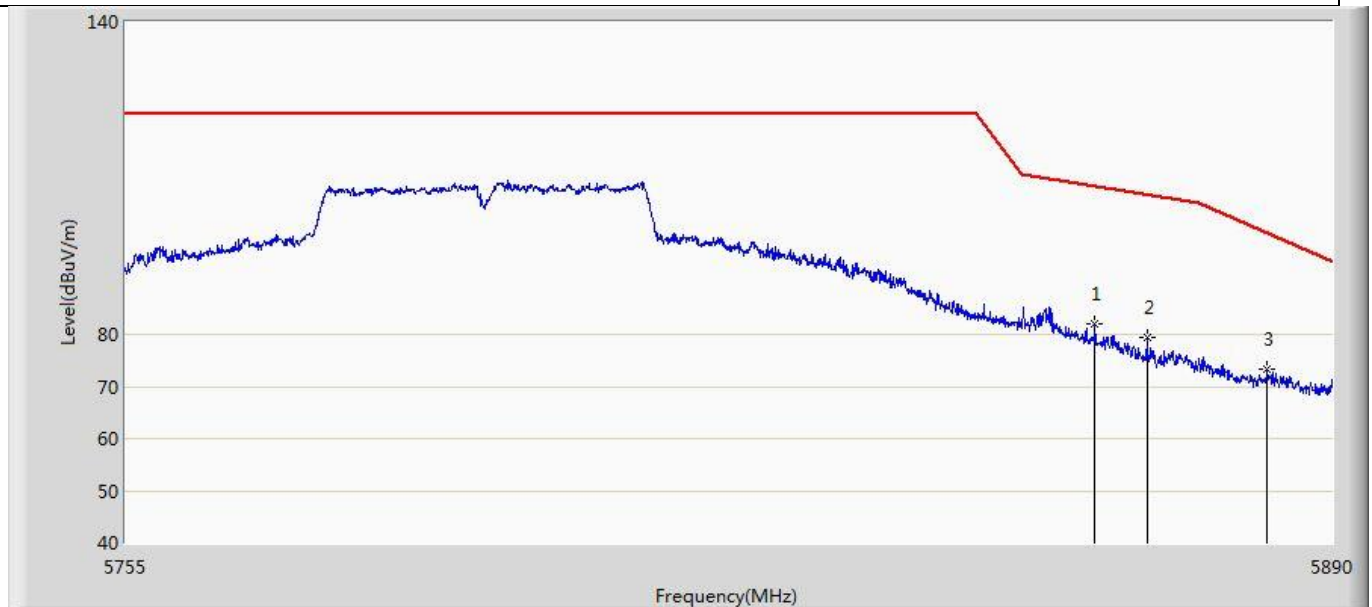


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5863.270	81.952	39.950	-26.530	108.482	42.002	PK
2		5869.075	79.456	37.420	-27.402	106.857	42.035	PK
3	*	5882.643	73.193	31.065	-26.331	99.524	42.128	PK

Profile: 2150775R	Page No.: 52
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:01
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3: Transmit at 5795MHz by 802.11n(40MHz) Ant 1	

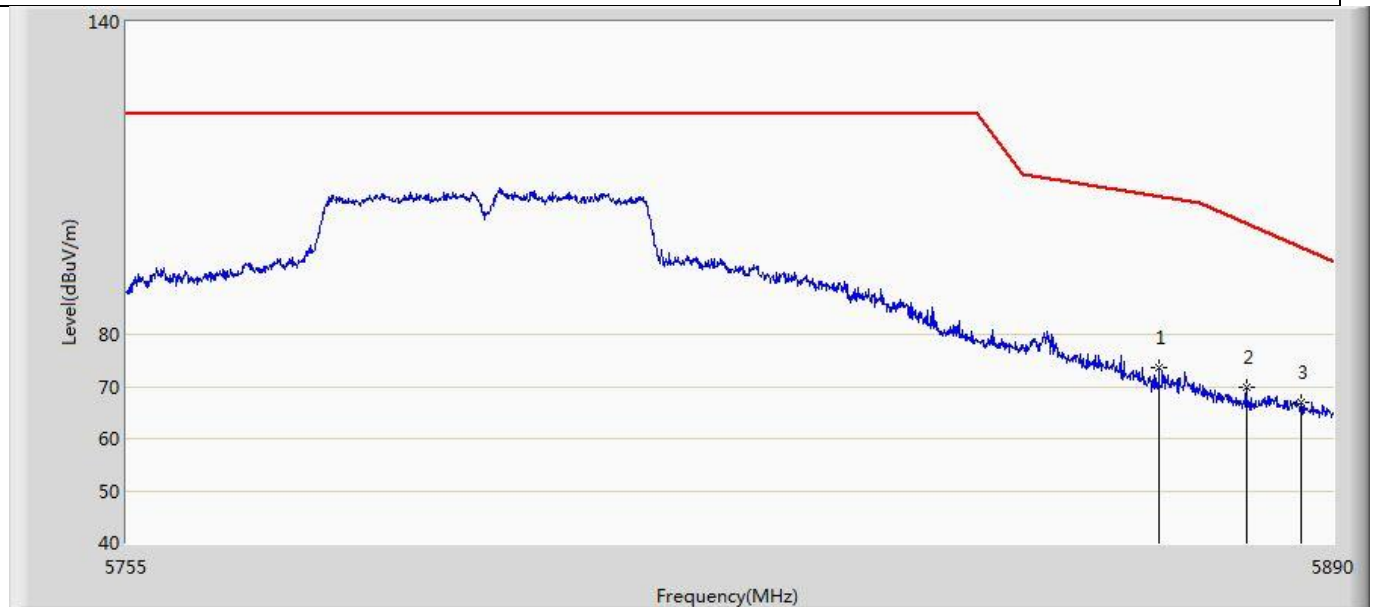


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5870.357	73.750	31.707	-32.748	106.498	42.042	PK
2		5880.212	69.757	27.653	-31.571	101.328	42.104	PK
3	*	5886.422	67.084	24.920	-29.636	96.720	42.164	PK

Profile: 2150775R	Page No.: 53
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) Ant 1	

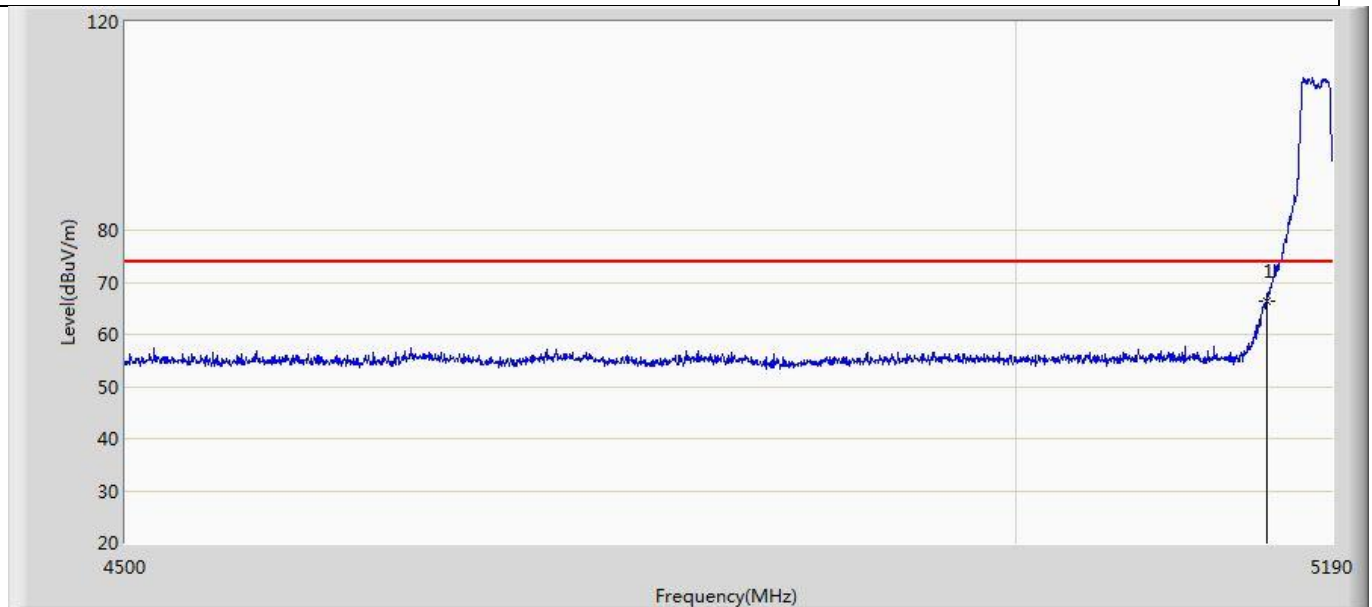


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	66.491	25.283	-7.509	74.000	41.208	PK

Profile: 2150775R	Page No.: 54
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) Ant 1	

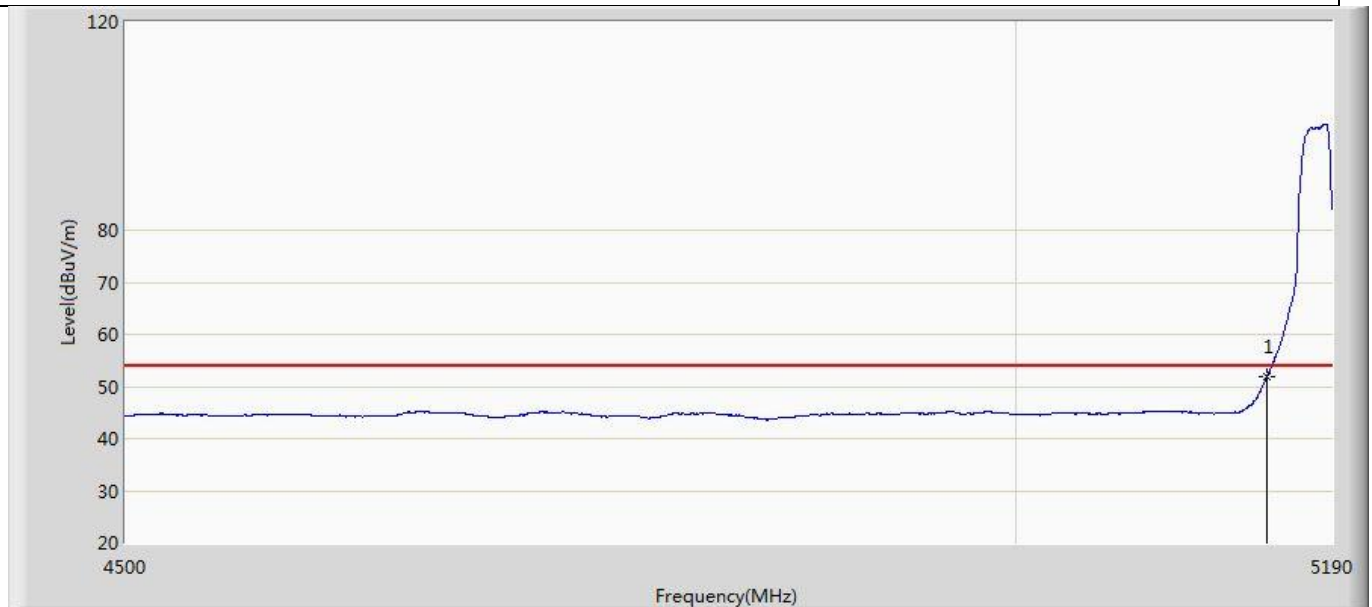


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.815	10.607	-2.185	54.000	41.208	AV

Profile: 2150775R	Page No.: 55
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) Ant 1	

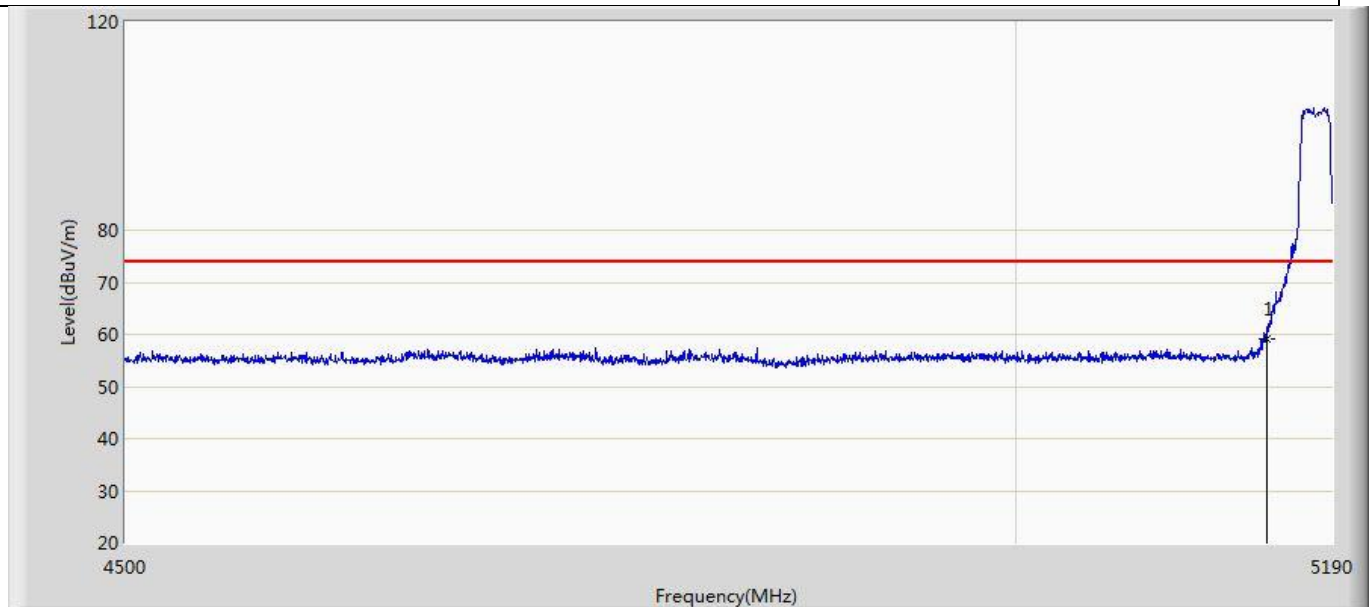


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	59.211	18.003	-14.789	74.000	41.208	PK

Profile: 2150775R	Page No.: 56
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) Ant 1	

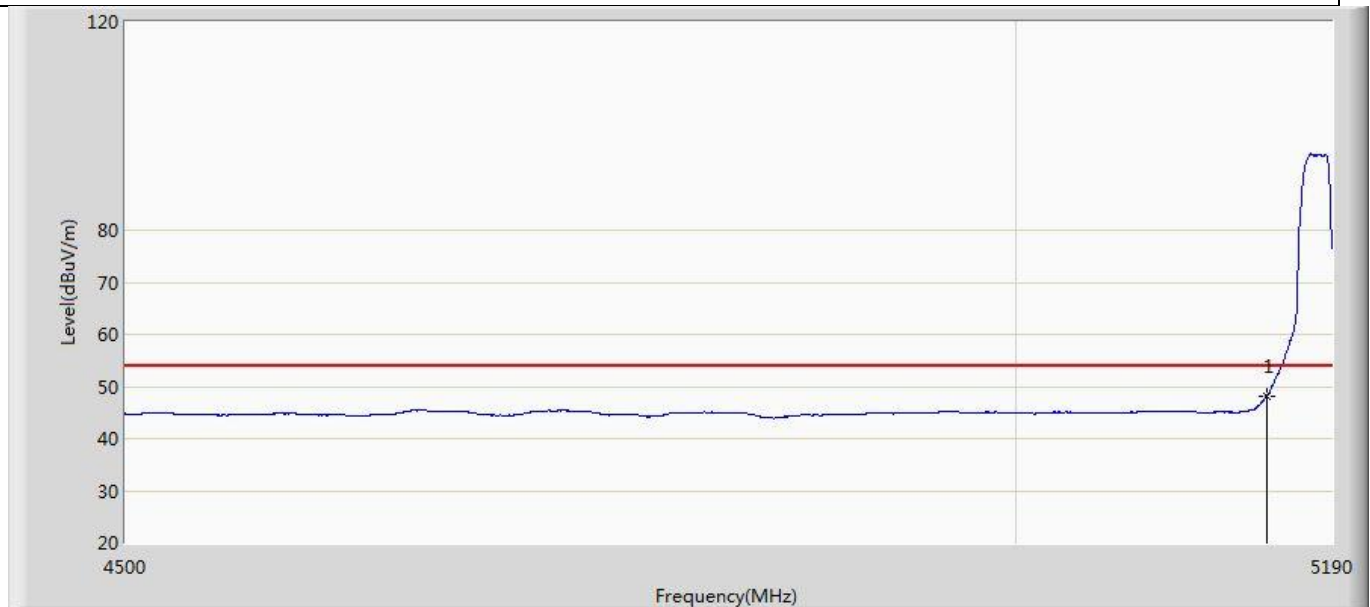


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	48.093	6.885	-5.907	54.000	41.208	AV

Profile: 2150775R	Page No.: 57
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 802.11ac(20MHz) Ant 1	

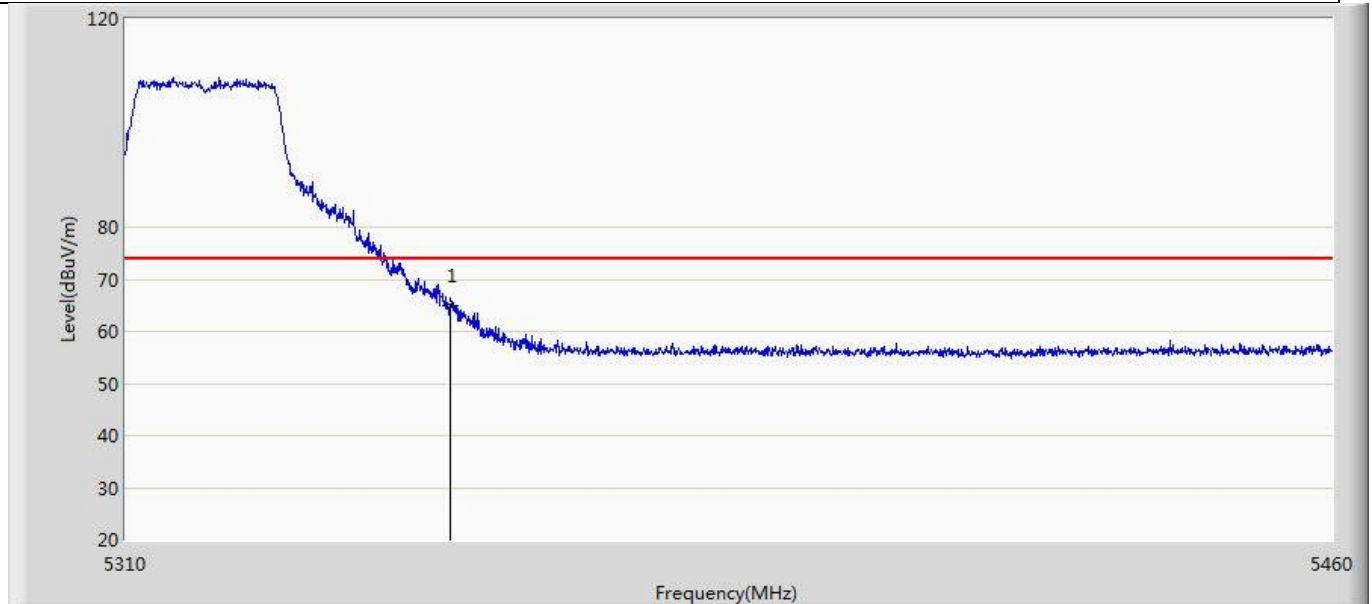

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	64.946	23.551	-9.054	74.000	41.395	PK

Profile: 2150775R	Page No.: 58
Engineer: Tongben	
Site: AC5	Time: 2021/06/10 - 02:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 4: Transmit at 5320MHz by 802.11ac(20MHz) Ant 1	

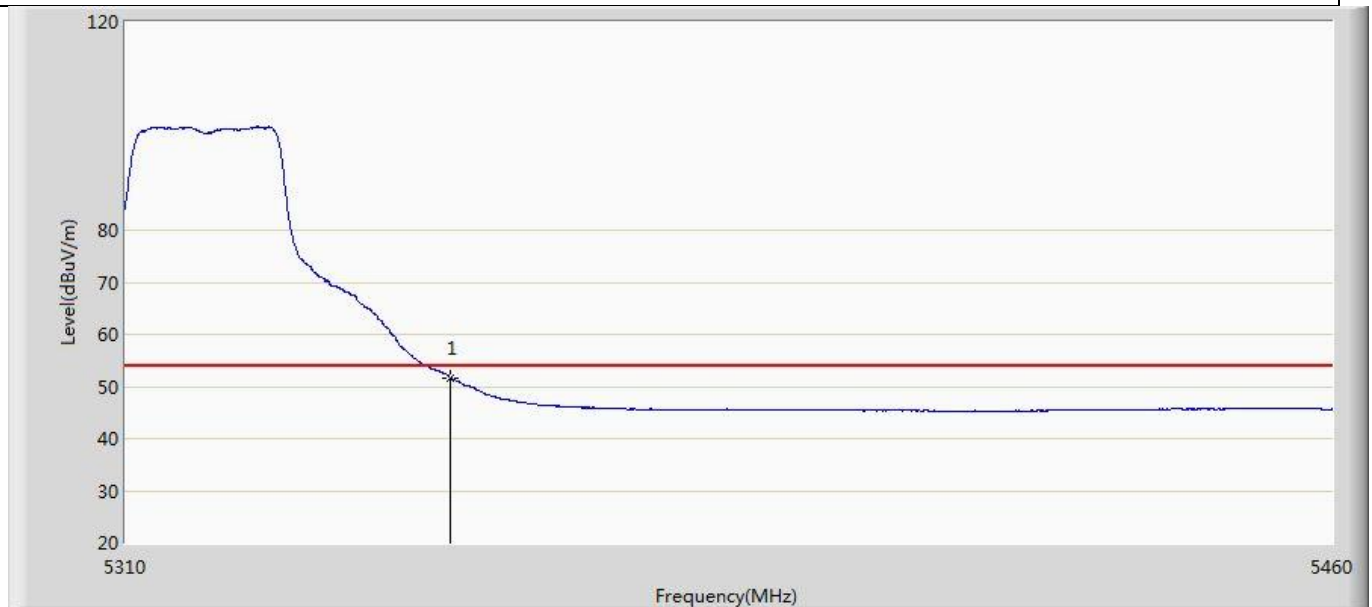

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.693	10.298	-2.307	54.000	41.395	AV