



Profile: 2150775R	Page No.: 99
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 07:32
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5775MHz by 802.11ac(80MHz) MIMO	

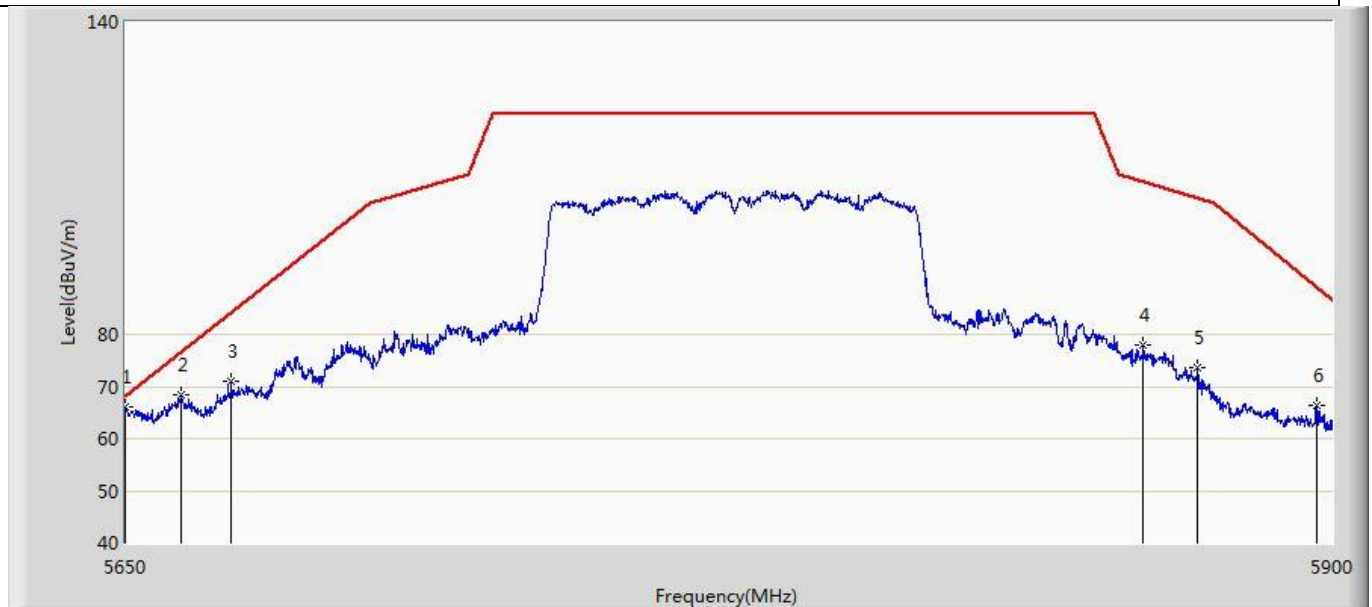


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5650.125	66.171	24.119	-2.122	68.293	42.052	PK
2		5661.500	68.285	26.206	-8.454	76.739	42.079	PK
3		5671.500	71.005	28.843	-13.145	84.150	42.162	PK
4		5860.250	77.948	35.959	-31.380	109.328	41.990	PK
5		5871.625	73.516	31.466	-32.628	106.144	42.050	PK
6		5896.875	66.412	24.142	-22.562	88.974	42.270	PK

Profile: 2150775R	Page No.: 100
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 07:37
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 6: Transmit at 5775MHz by 802.11ac(80MHz) MIMO	

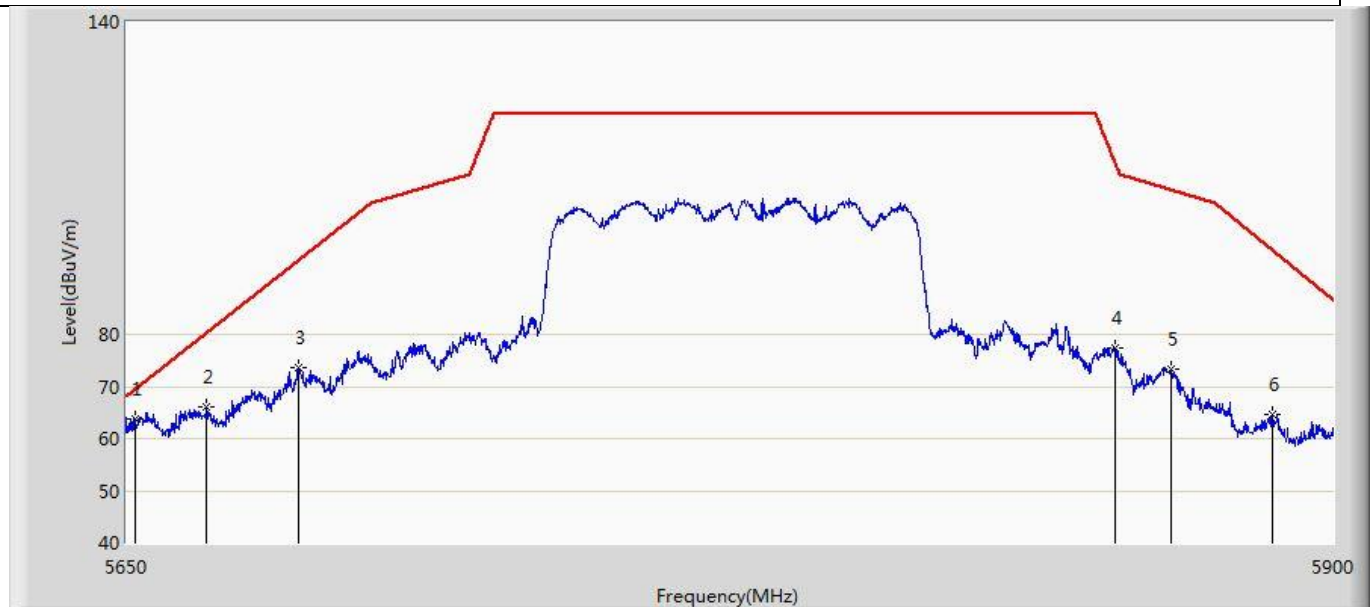


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5651.750	63.716	21.664	-5.785	69.501	42.051	PK
2		5666.375	65.974	23.854	-14.380	80.353	42.120	PK
3		5685.000	73.745	31.652	-20.389	94.134	42.093	PK
4		5854.125	77.275	35.305	-35.520	112.794	41.970	PK
5		5866.000	73.340	31.322	-34.378	107.718	42.018	PK
6		5887.125	64.655	22.484	-31.543	96.199	42.172	PK

Profile: 2150775R	Page No.: 101
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 07:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) MIMO	

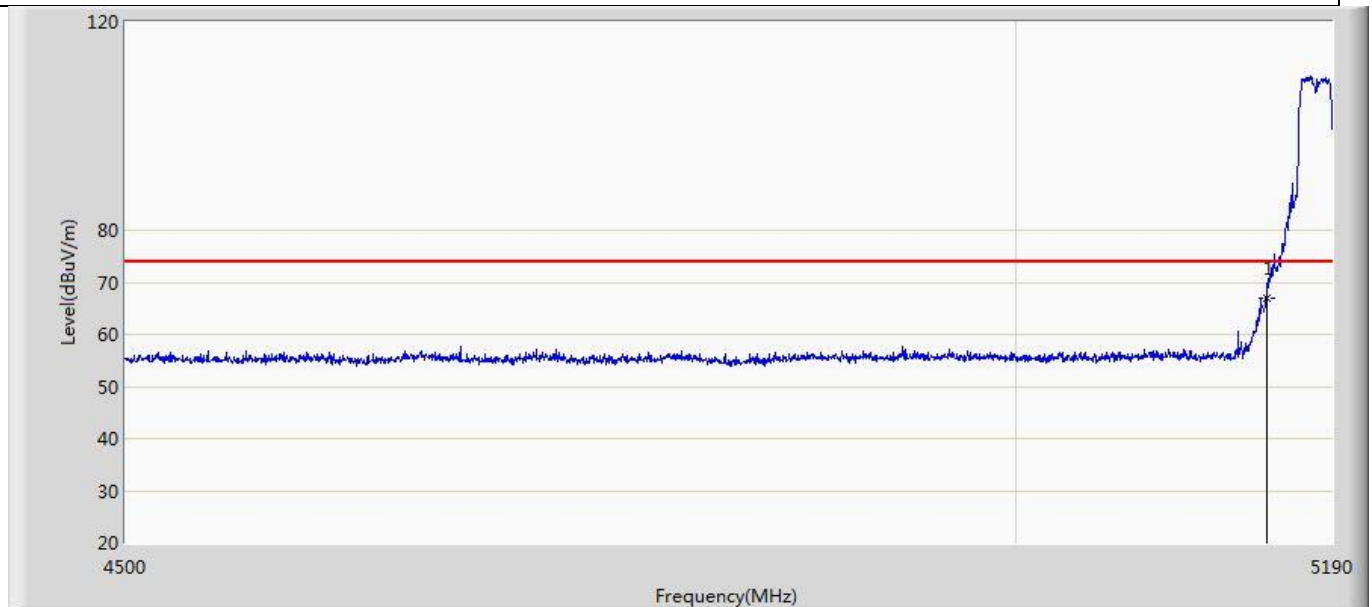


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	67.042	25.834	-6.958	74.000	41.208	PK

Profile: 2150775R	Page No.: 102
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) MIMO	

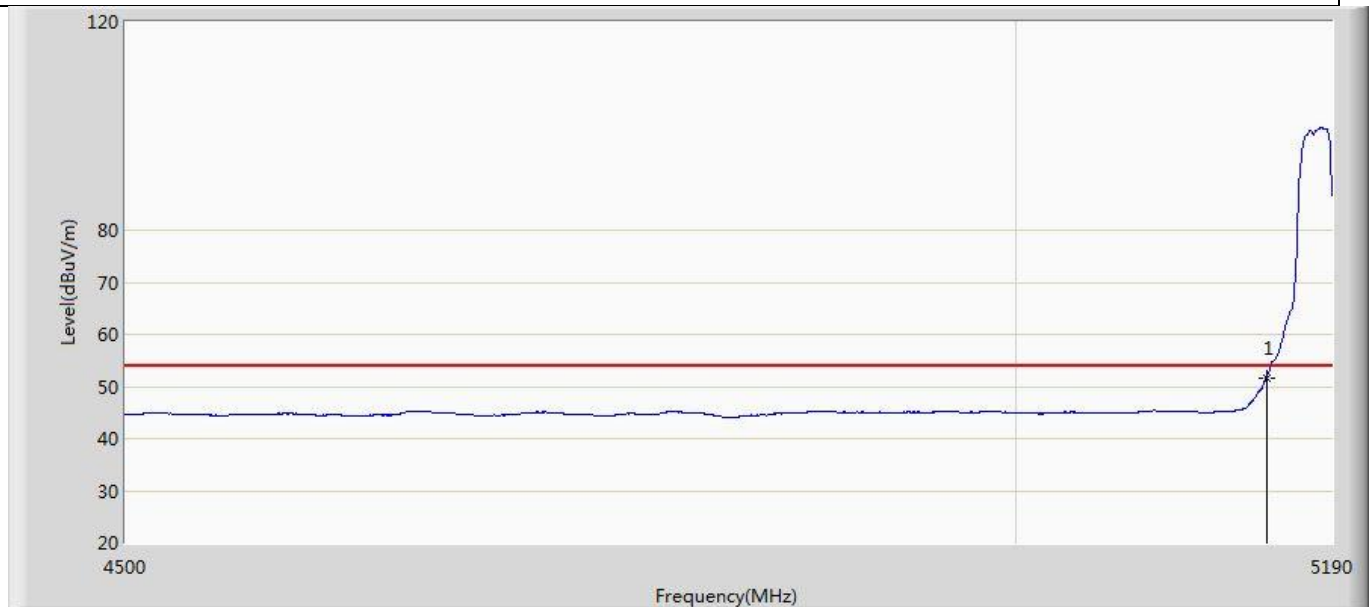


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.690	10.482	-2.310	54.000	41.208	AV

Profile: 2150775R	Page No.: 103
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) MIMO	

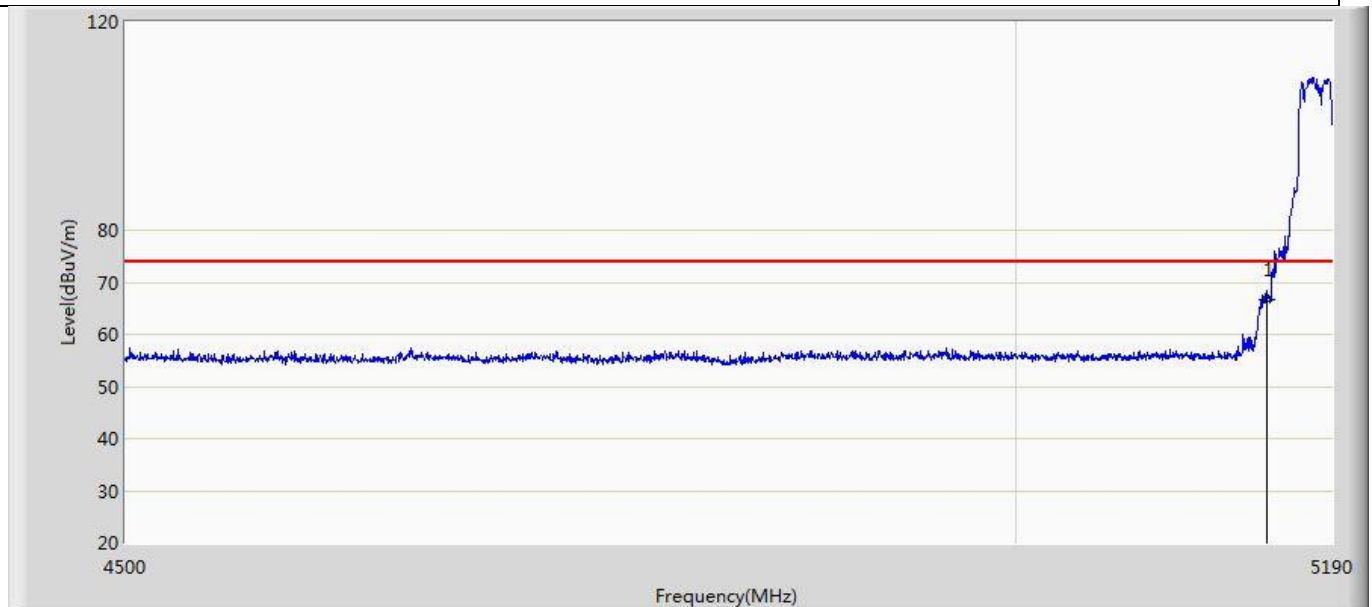


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	66.713	25.505	-7.287	74.000	41.208	PK

Profile: 2150775R	Page No.: 104
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) MIMO	

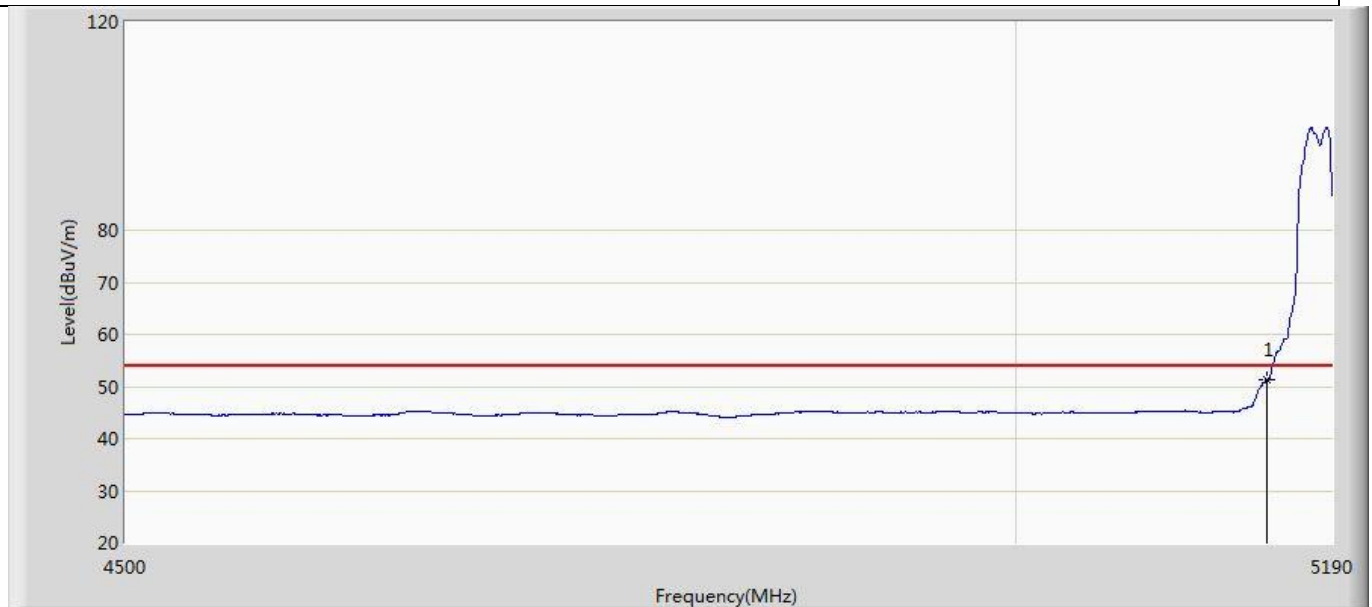


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.421	10.213	-2.579	54.000	41.208	AV

Profile: 2150775R	Page No.: 105
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) MIMO	

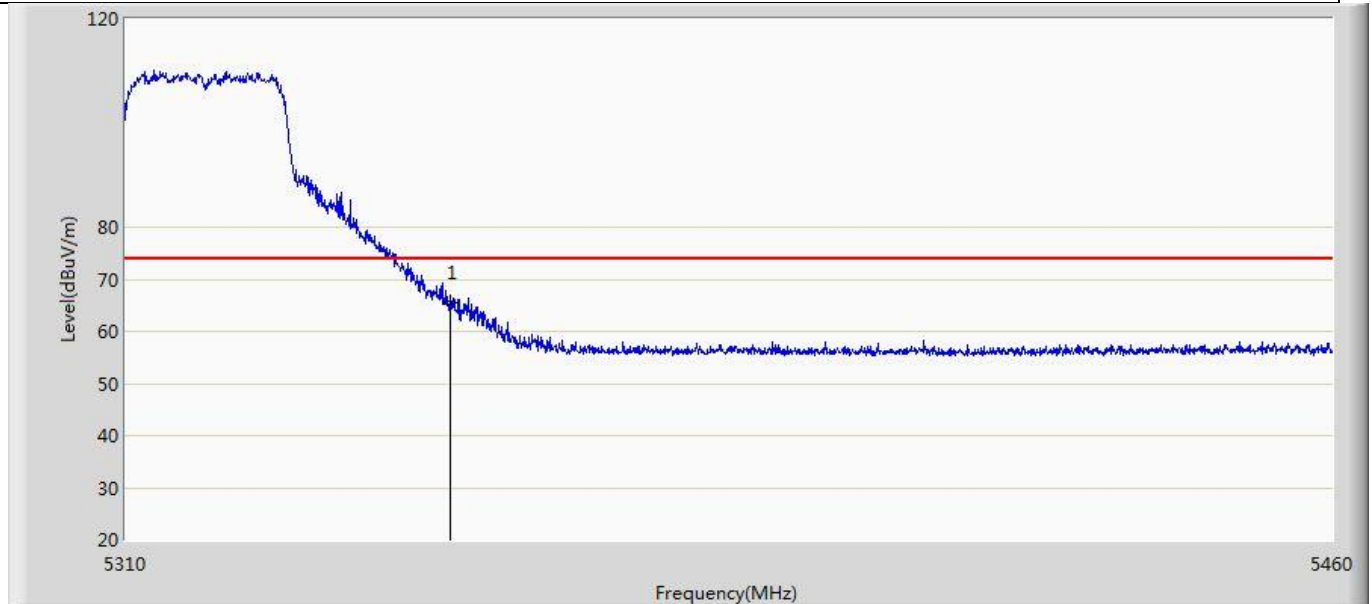


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	65.537	24.142	-8.463	74.000	41.395	PK

Profile: 2150775R	Page No.: 106
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) MIMO	

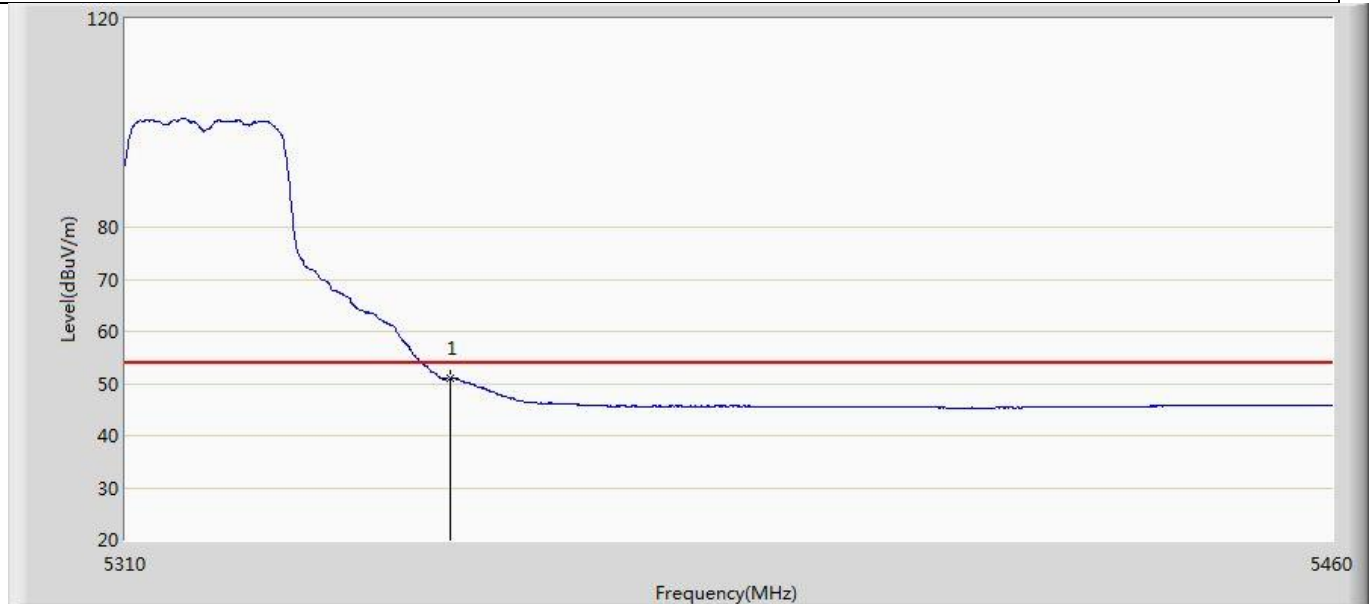


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.087	9.692	-2.913	54.000	41.395	AV

Profile: 2150775R	Page No.: 107
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) MIMO	

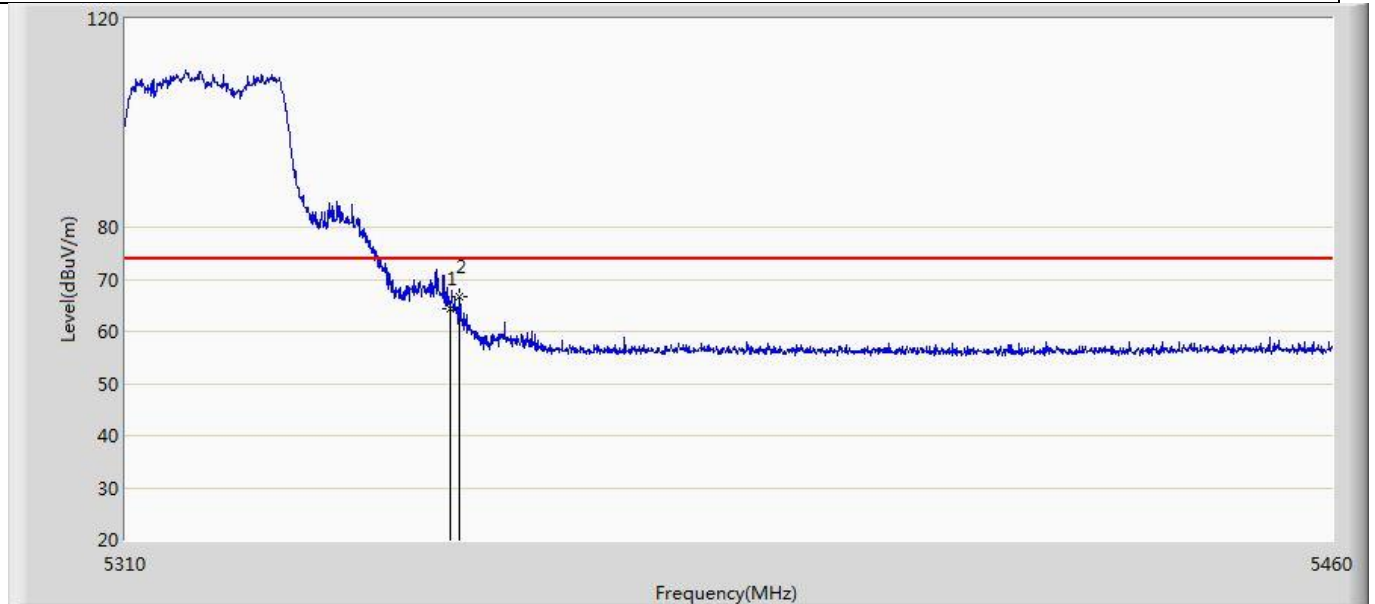


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	64.295	22.900	-9.705	74.000	41.395	PK
2	*	5351.175	66.755	25.354	-7.245	74.000	41.401	PK

Profile: 2150775R	Page No.: 108
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) MIMO	

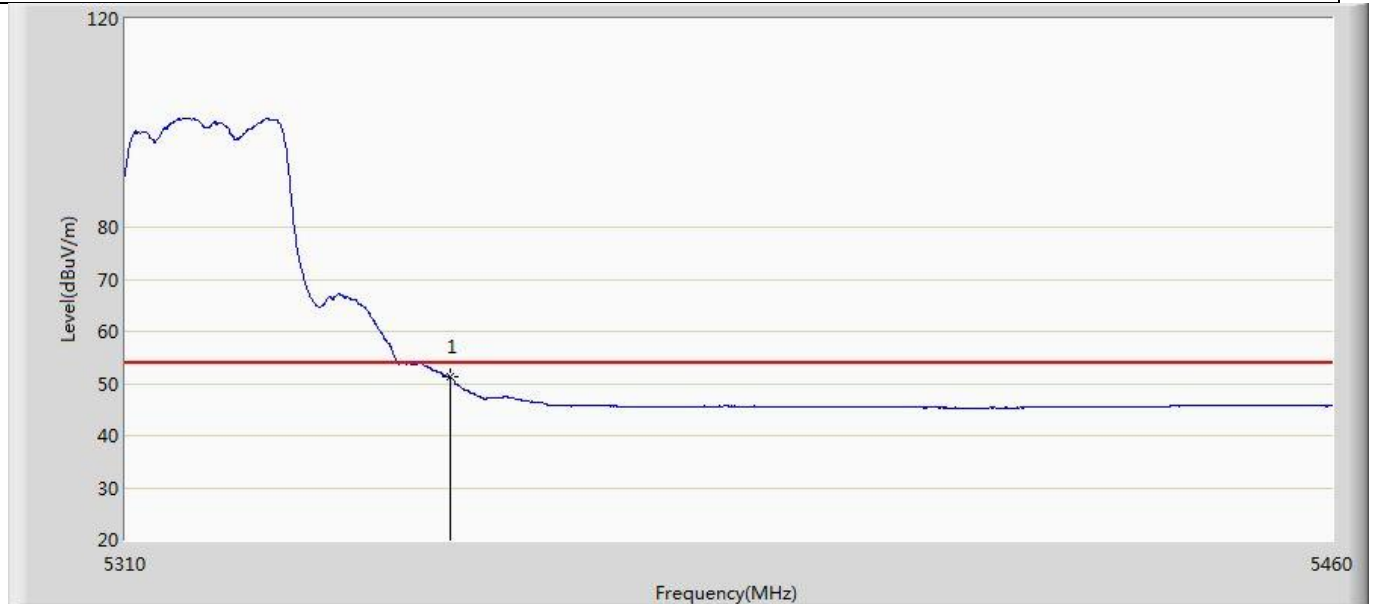


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.221	9.826	-2.779	54.000	41.395	AV

Profile: 2150775R	Page No.: 109
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 19:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) MIMO	

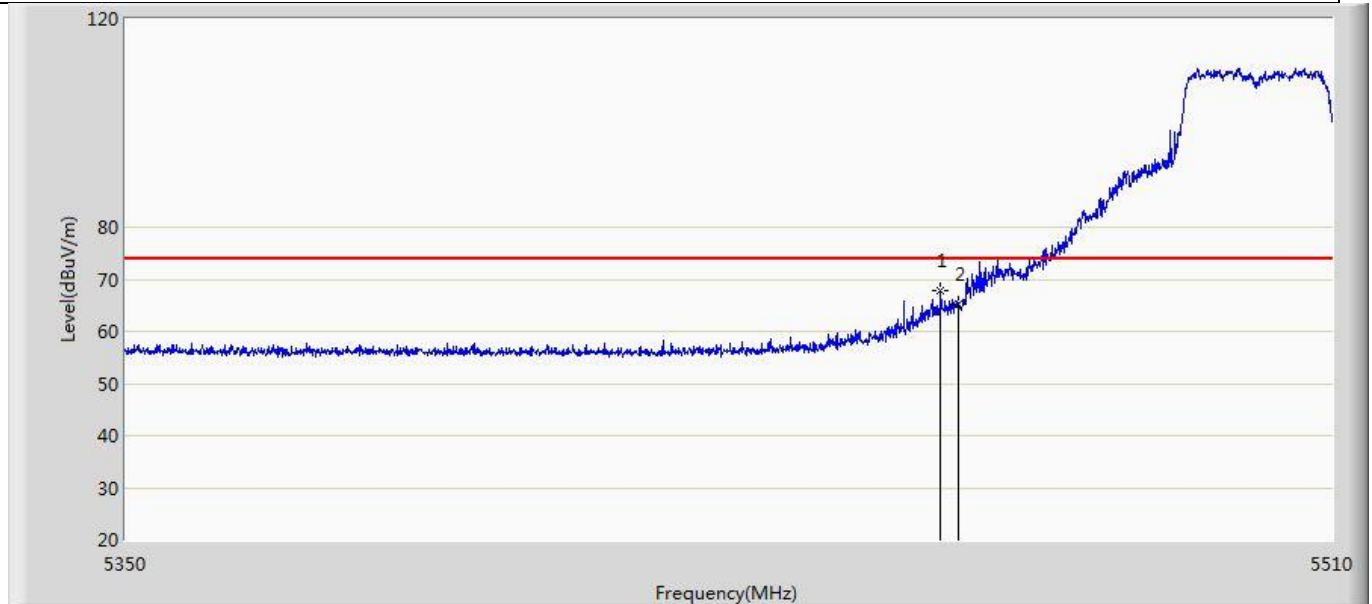


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.600	67.750	26.098	-6.250	74.000	41.651	PK
2		5460.000	65.290	23.658	-8.710	74.000	41.632	PK

Profile: 2150775R	Page No.: 110
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) MIMO	

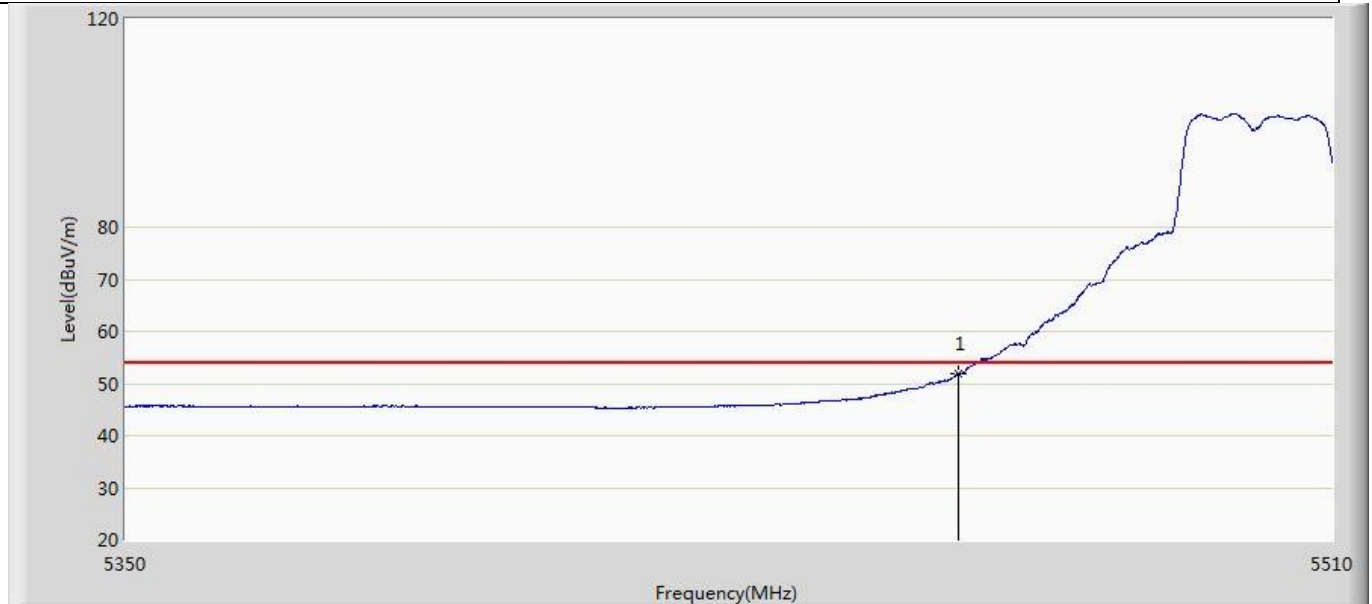


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.796	10.164	-2.204	54.000	41.632	AV

Profile: 2150775R	Page No.: 111
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) MIMO	

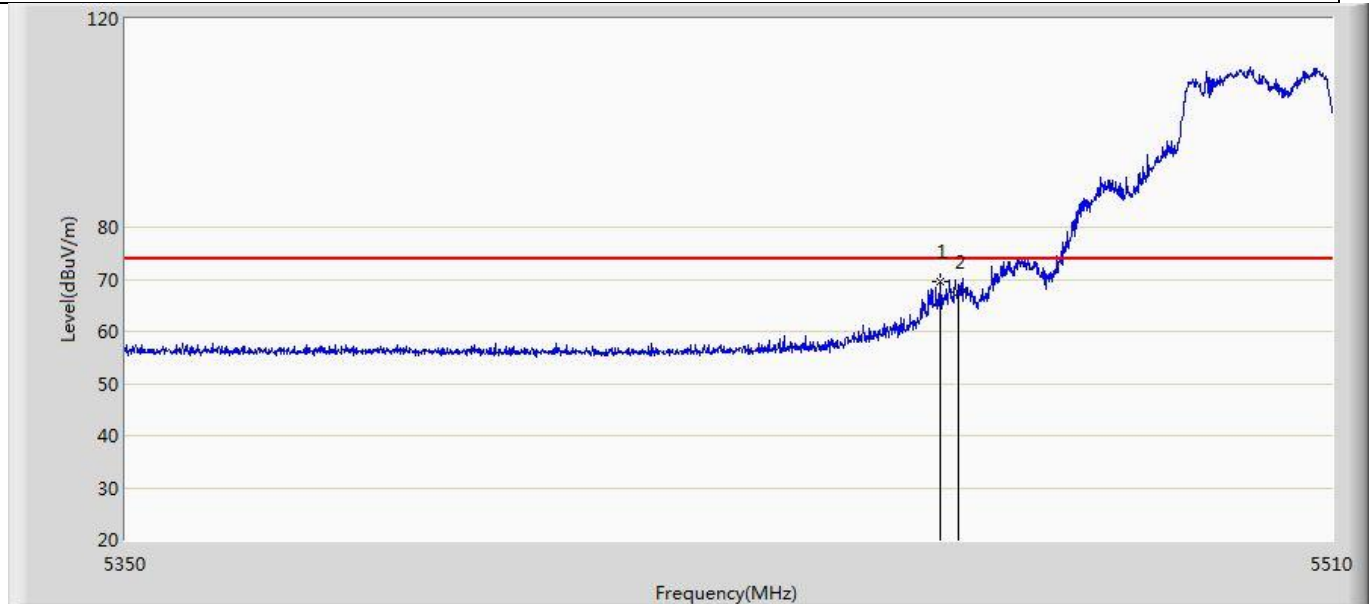


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.600	69.571	27.919	-4.429	74.000	41.651	PK
2		5460.000	67.493	25.861	-6.507	74.000	41.632	PK

Profile: 2150775R	Page No.: 112
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) MIMO	

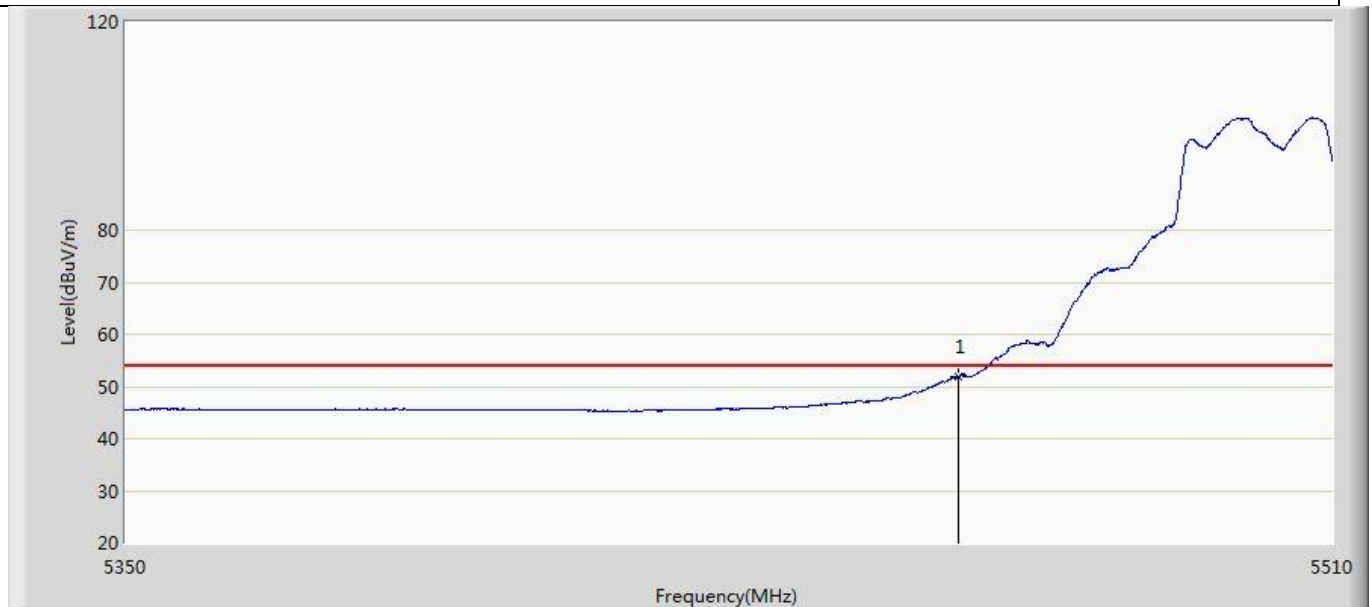

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.845	10.213	-2.155	54.000	41.632	AV

Profile: 2150775R	Page No.: 113
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:11
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5745MHz by 802.11ax(20MHz) MIMO	

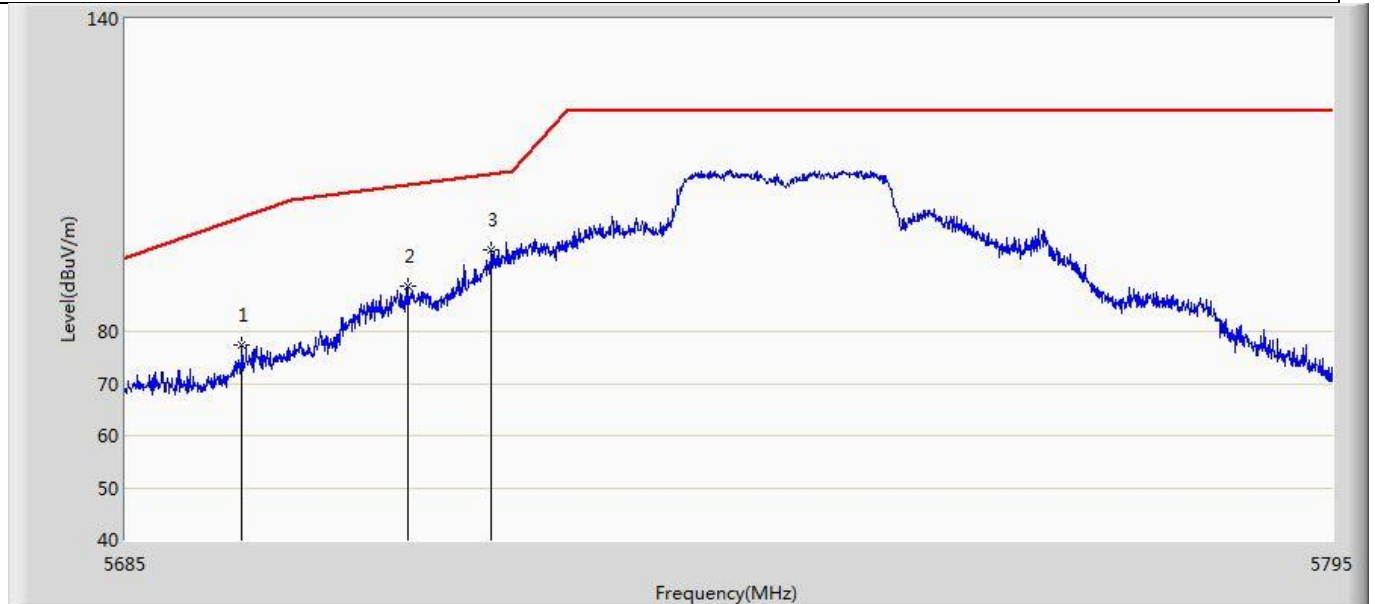


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5695.560	77.429	35.397	-24.499	101.928	42.032	PK
2		5710.520	88.829	46.780	-19.319	108.148	42.048	PK
3	*	5718.165	95.514	53.514	-14.773	110.287	42.000	PK

Profile: 2150775R	Page No.: 114
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:14
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5745MHz by 802.11ax(20MHz) MIMO	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.495	78.136	36.102	-24.481	102.617	42.033	PK
2		5704.580	85.444	43.394	-21.040	106.484	42.050	PK
3	*	5715.360	91.497	49.479	-18.006	109.503	42.018	PK

Profile: 2150775R	Page No.: 115
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:20
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5785MHz by 802.11ax(20MHz) MIMO	

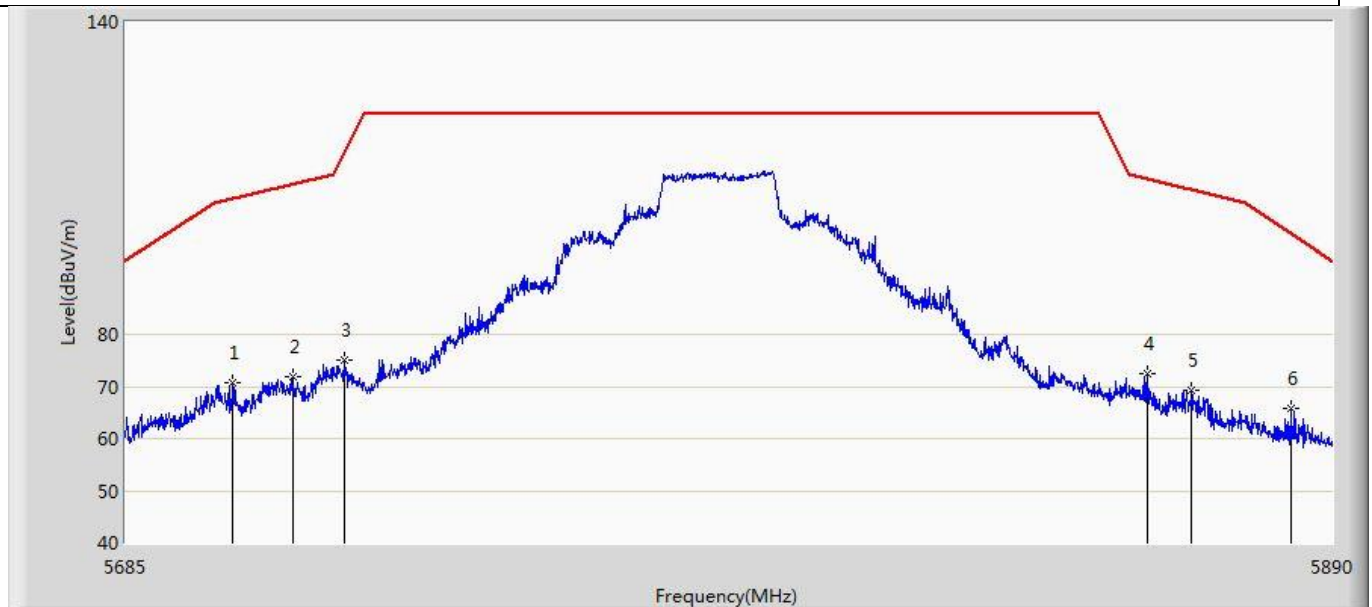


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5702.937	70.787	28.741	-35.236	106.024	42.046	PK
2		5712.982	71.998	29.965	-36.839	108.837	42.033	PK
3		5721.695	75.159	33.182	-39.506	114.666	41.977	PK
4		5858.123	72.475	30.492	-37.450	109.924	41.983	PK
5		5865.708	69.395	27.379	-38.404	107.799	42.016	PK
6	*	5882.825	65.653	23.524	-33.735	99.389	42.129	PK

Profile: 2150775R	Page No.: 116
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:23
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5785MHz by 802.11ax(20MHz) MIMO	

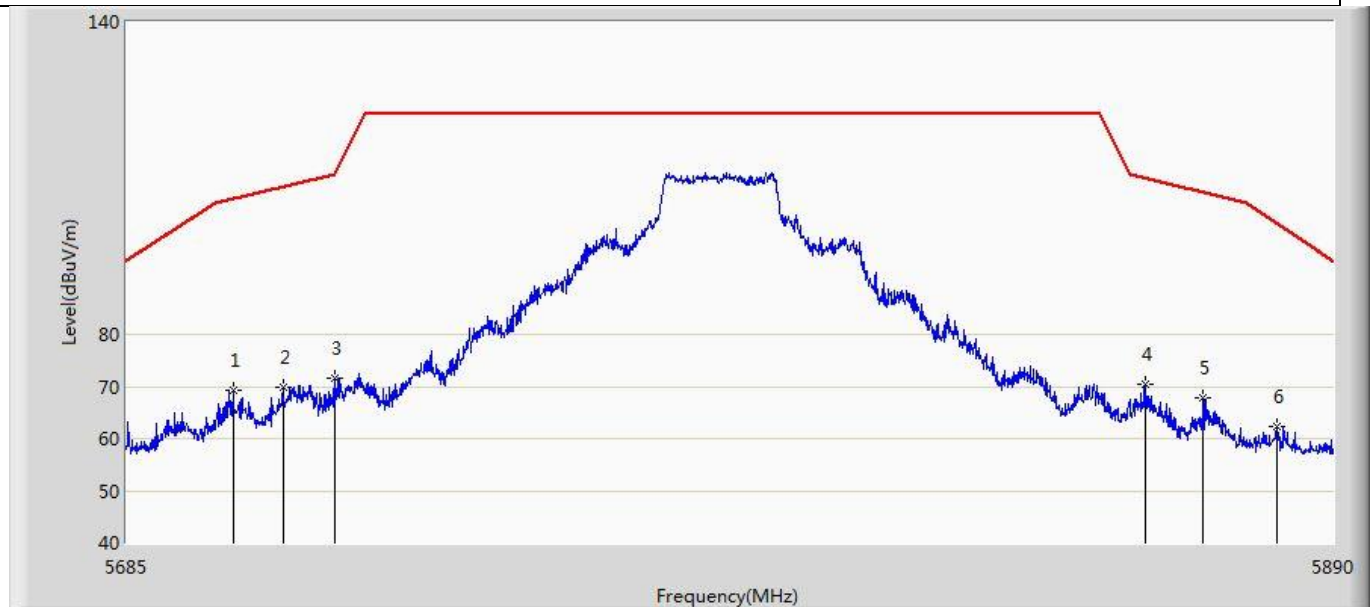


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5702.937	69.196	27.150	-36.827	106.024	42.046	PK
2		5711.240	69.737	27.693	-38.613	108.350	42.044	PK
3		5719.850	71.552	29.563	-39.206	110.758	41.989	PK
4		5857.610	70.362	28.381	-39.706	110.068	41.981	PK
5		5867.655	67.918	25.891	-39.336	107.254	42.027	PK
6		5880.365	62.263	20.157	-38.952	101.215	42.105	PK

Profile: 2150775R	Page No.: 479
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 22:19
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5825MHz by 802.11ax(20MHz) MIMO	

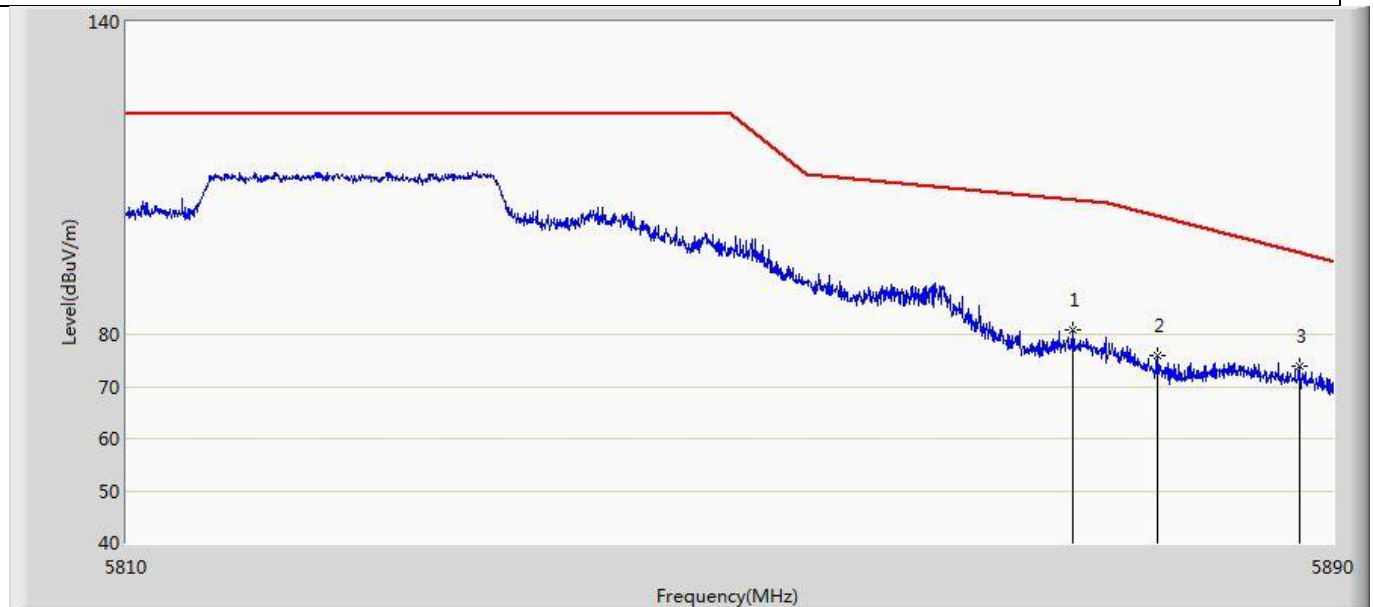


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5872.640	80.782	38.726	-25.078	105.860	42.056	PK
2		5878.280	76.024	33.936	-26.739	102.763	42.088	PK
3	*	5887.760	74.020	31.843	-21.707	95.728	42.177	PK

Profile: 2150775R	Page No.: 480
Engineer: Tongben	
Site: AC5	Time: 2021/06/16 - 22:27
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5825MHz by 802.11ax(20MHz) MIMO	

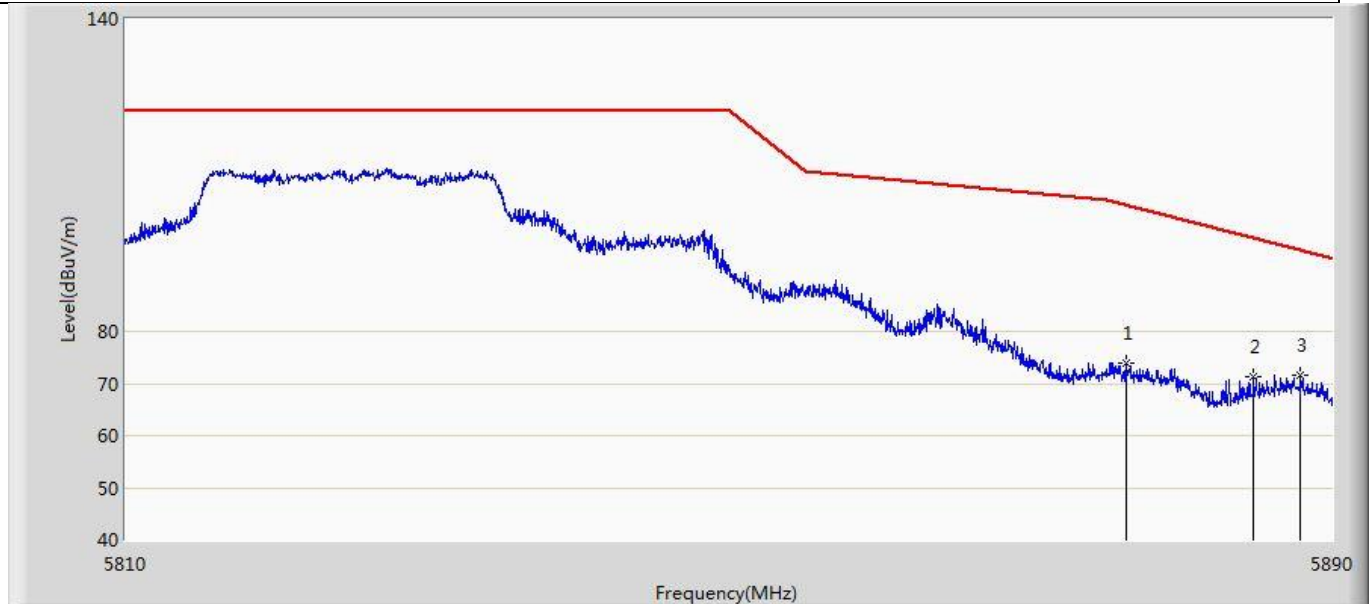


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5876.280	74.015	31.938	-30.234	104.249	42.077	PK
2		5884.800	71.320	29.171	-26.604	97.923	42.149	PK
3	*	5887.880	71.528	29.349	-24.111	95.639	42.178	PK

Profile: 2150775R	Page No.: 117
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) MIMO	

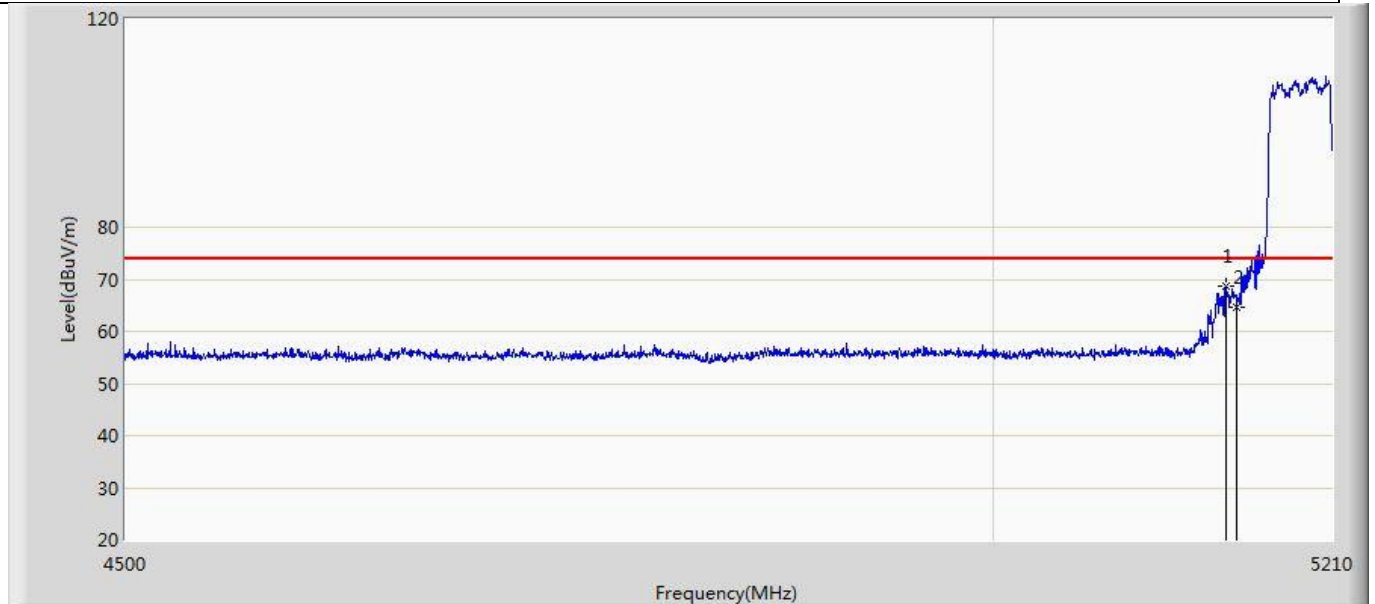


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5143.615	68.676	27.594	-5.324	74.000	41.083	PK
2		5150.000	64.670	23.462	-9.330	74.000	41.208	PK

Profile: 2150775R	Page No.: 118
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) MIMO	

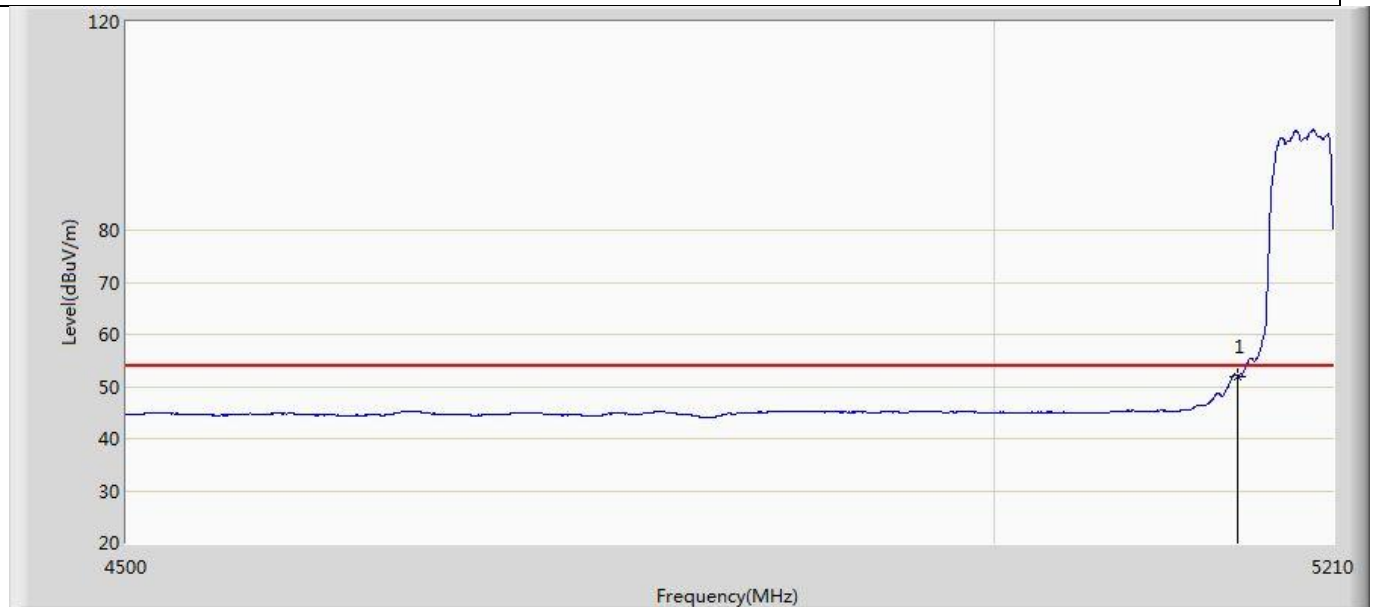


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.913	10.705	-2.087	54.000	41.208	AV

Profile: 2150775R	Page No.: 119
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) MIMO	

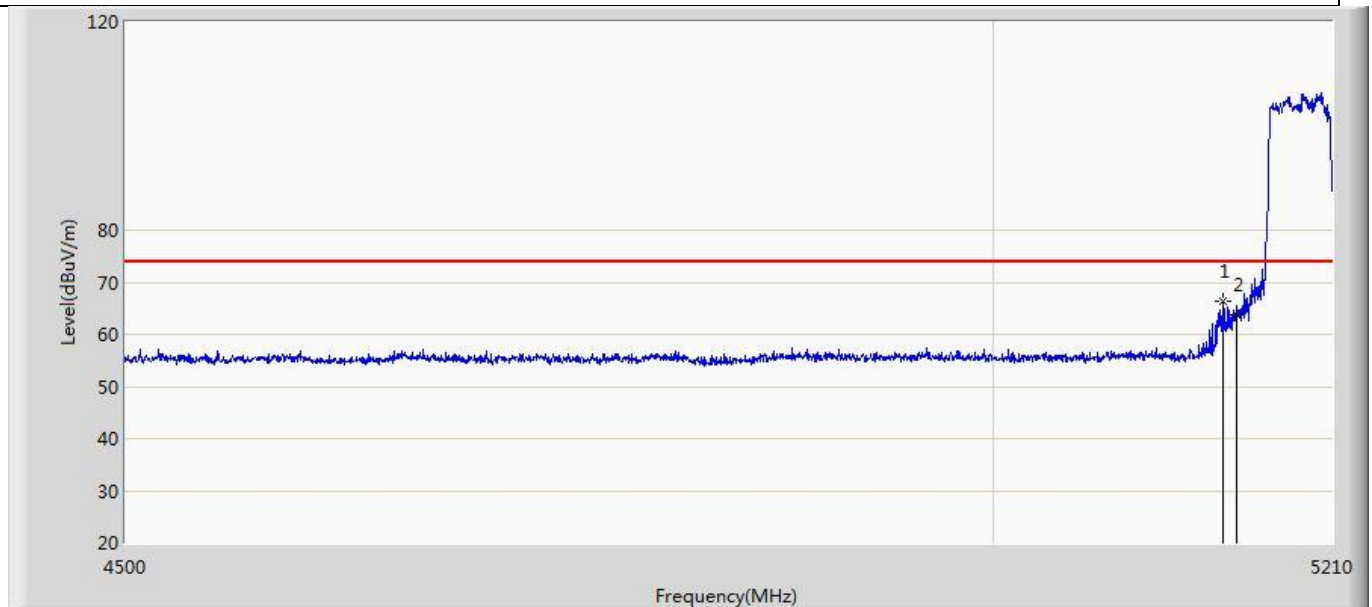


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5141.130	66.432	25.391	-7.568	74.000	41.041	PK
2		5150.000	63.753	22.545	-10.247	74.000	41.208	PK

Profile: 2150775R	Page No.: 120
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) MIMO	

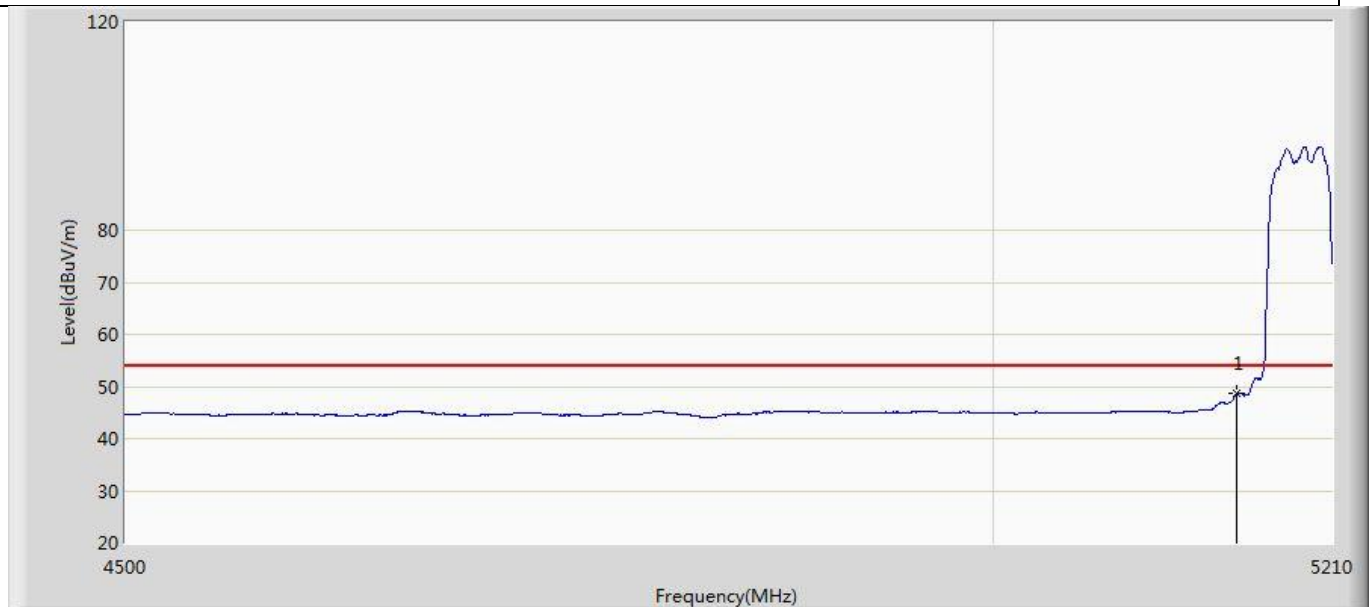


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	48.577	7.369	-5.423	54.000	41.208	AV

Profile: 2150775R	Page No.: 121
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) MIMO	

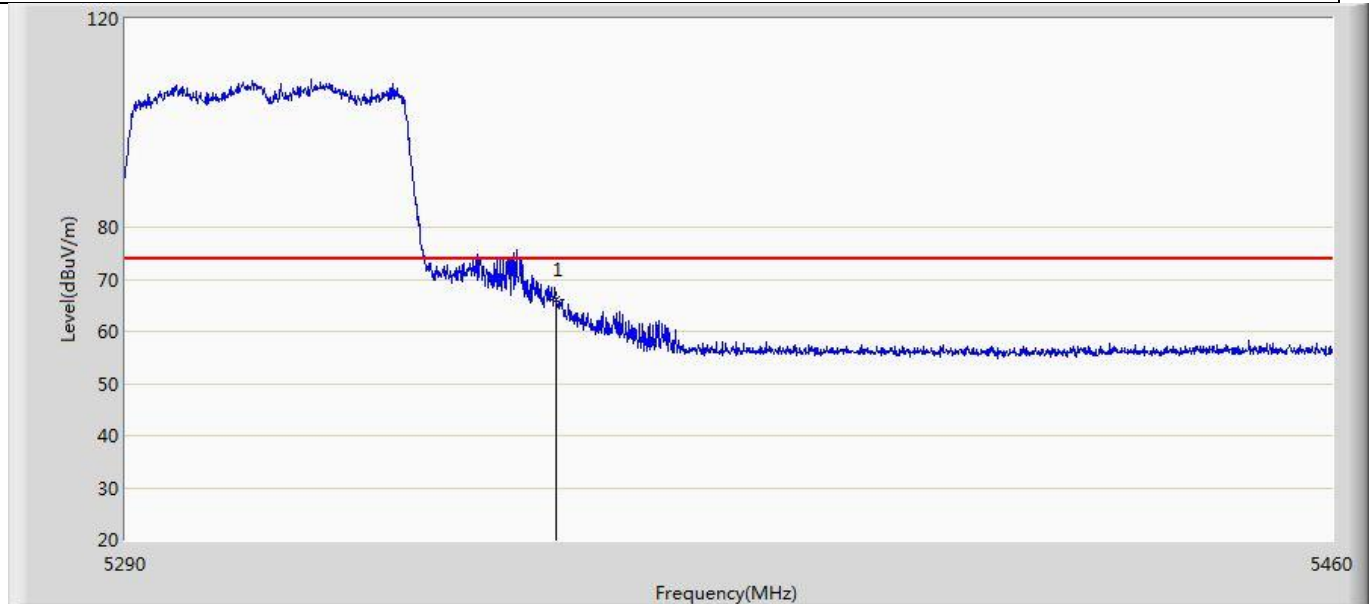


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	66.198	24.803	-7.802	74.000	41.395	PK

Profile: 2150775R	Page No.: 122
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) MIMO	

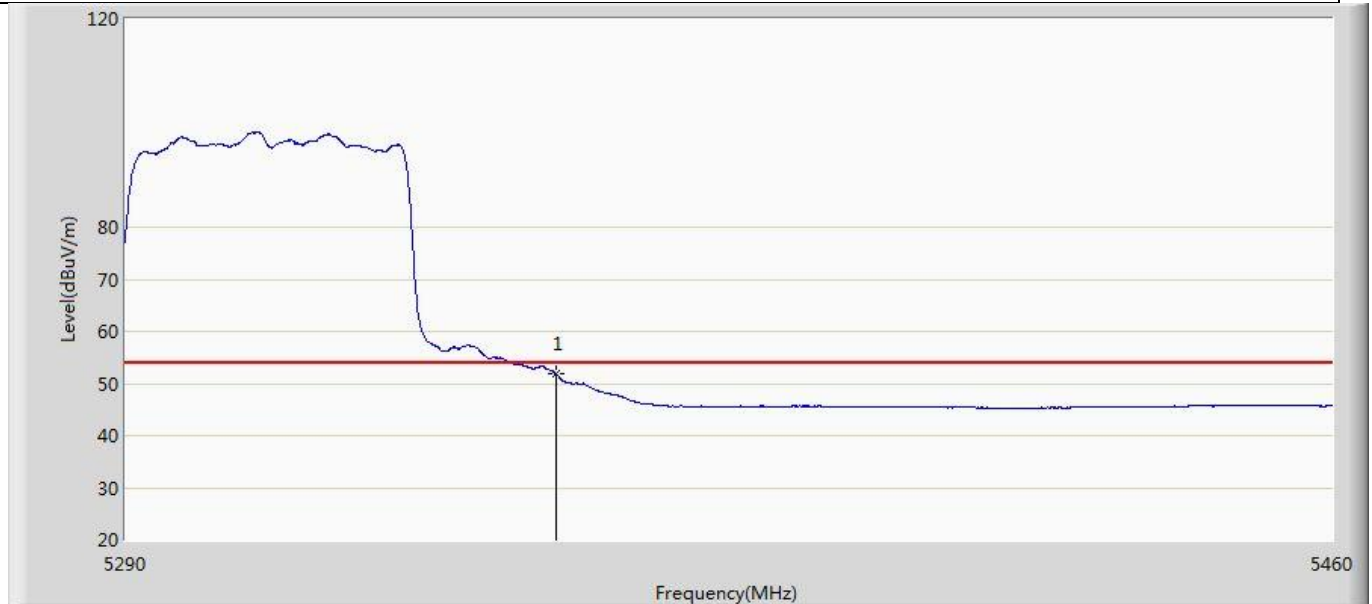


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	51.787	10.392	-2.213	54.000	41.395	AV

Profile: 2150775R	Page No.: 123
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) MIMO	

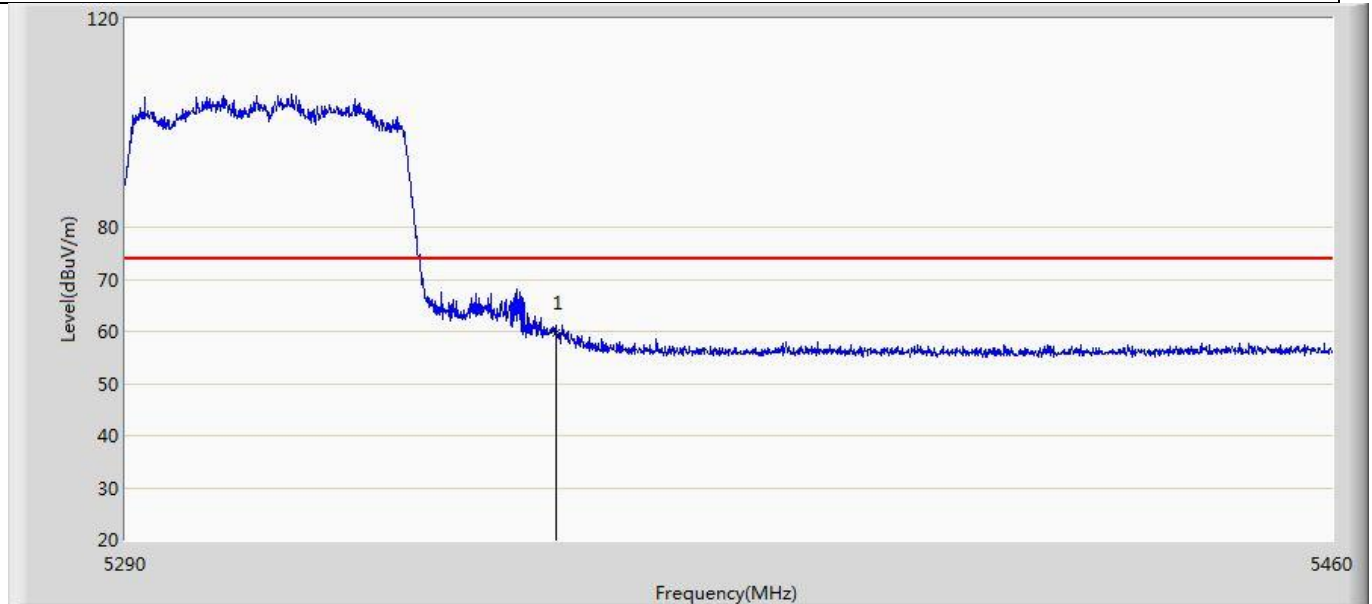

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	59.673	18.278	-14.327	74.000	41.395	PK

Profile: 2150775R	Page No.: 124
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) MIMO	

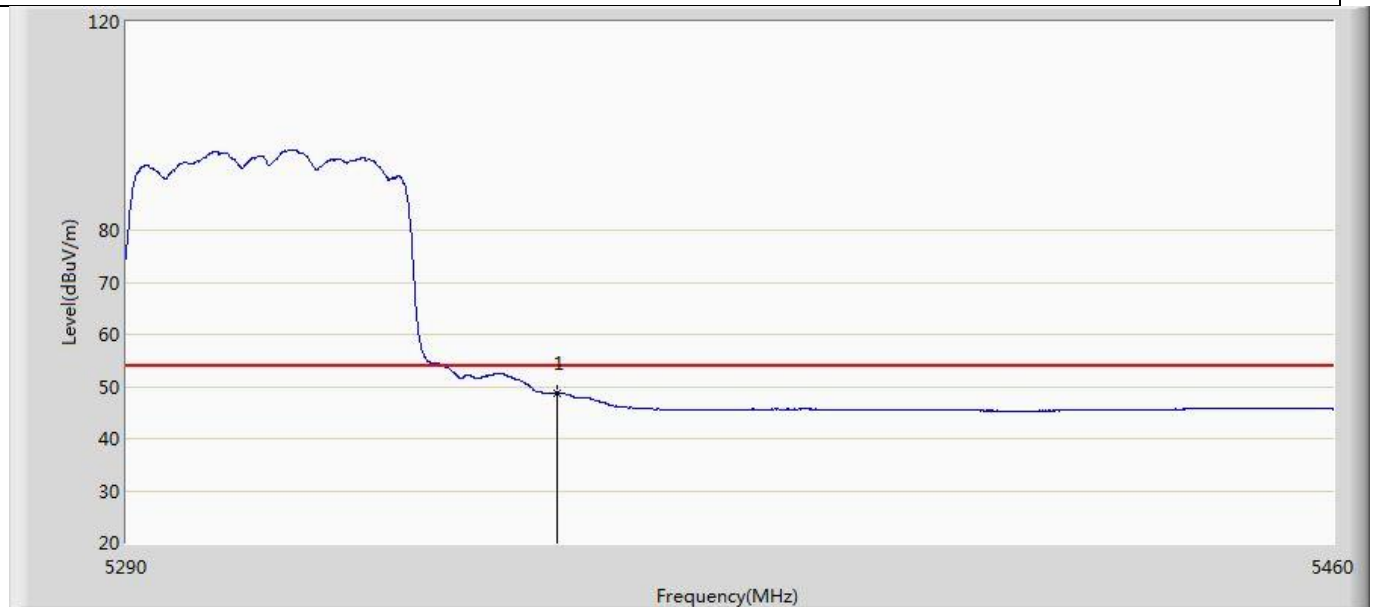


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	48.789	7.394	-5.211	54.000	41.395	AV

Profile: 2150775R	Page No.: 125
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) MIMO	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.360	70.232	28.586	-3.768	74.000	41.645	PK
2		5460.000	66.556	24.924	-7.444	74.000	41.632	PK

Profile: 2150775R	Page No.: 126
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) MIMO	

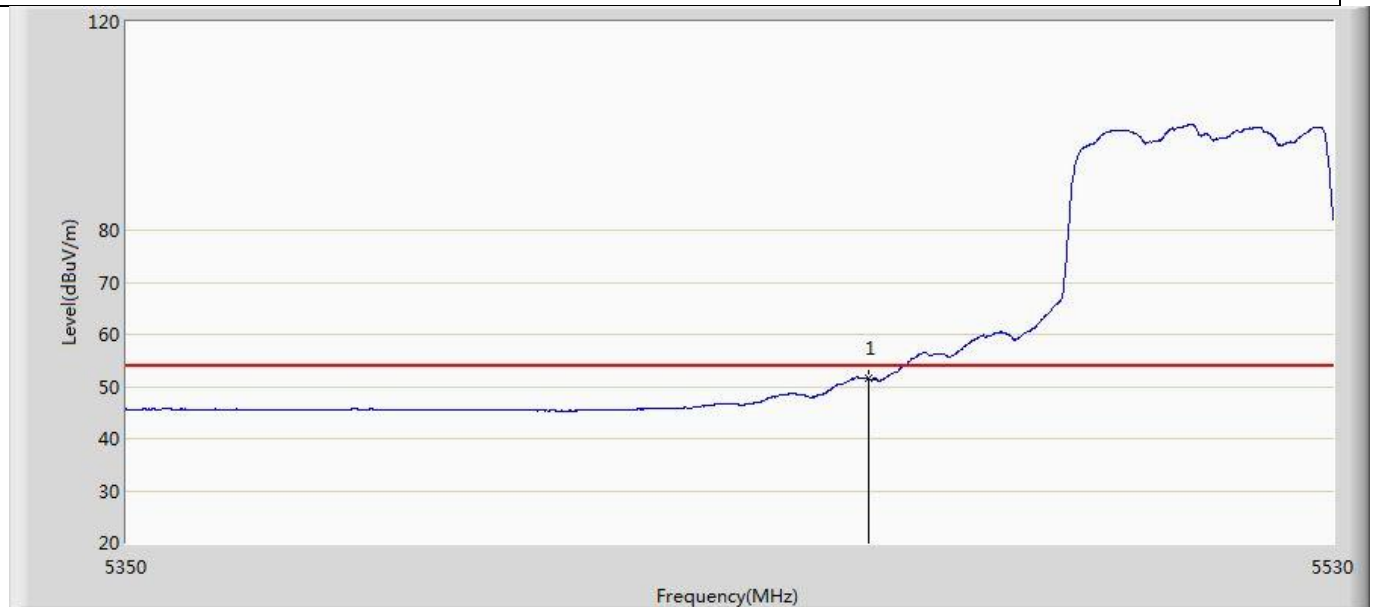


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.520	9.888	-2.480	54.000	41.632	AV

Profile: 2150775R	Page No.: 127
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 20:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) MIMO	

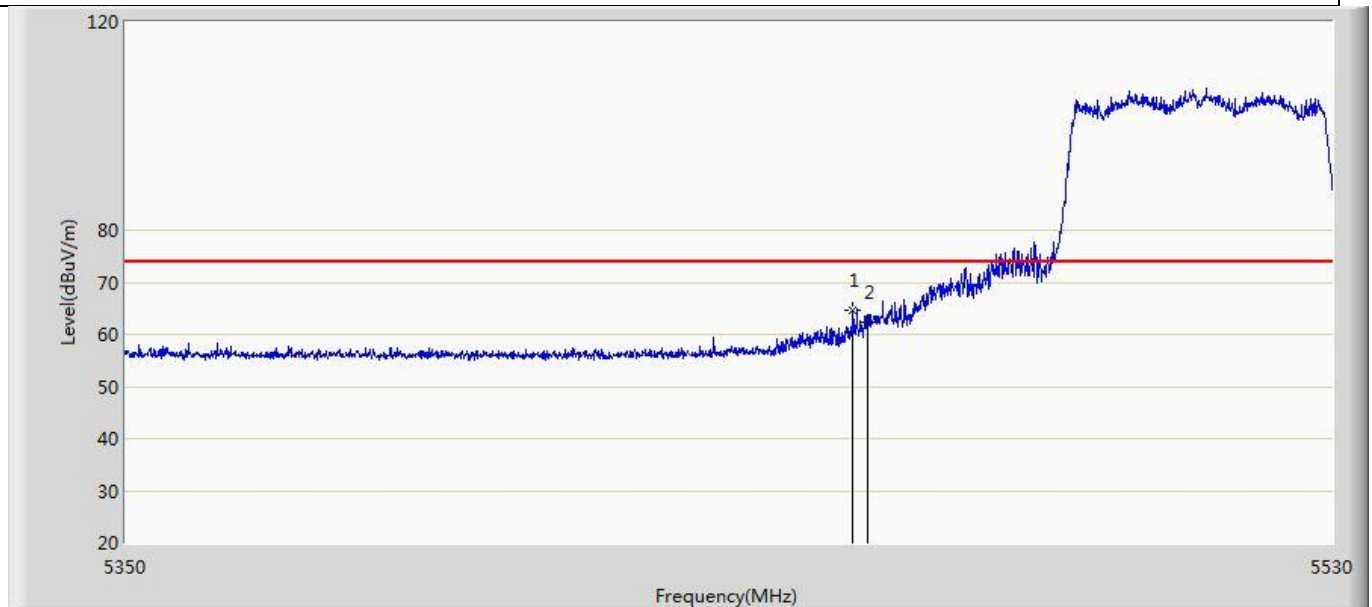


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5457.820	64.753	23.103	-9.247	74.000	41.649	PK
2		5460.000	62.340	20.708	-11.660	74.000	41.632	PK

Profile: 2150775R	Page No.: 128
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) MIMO	

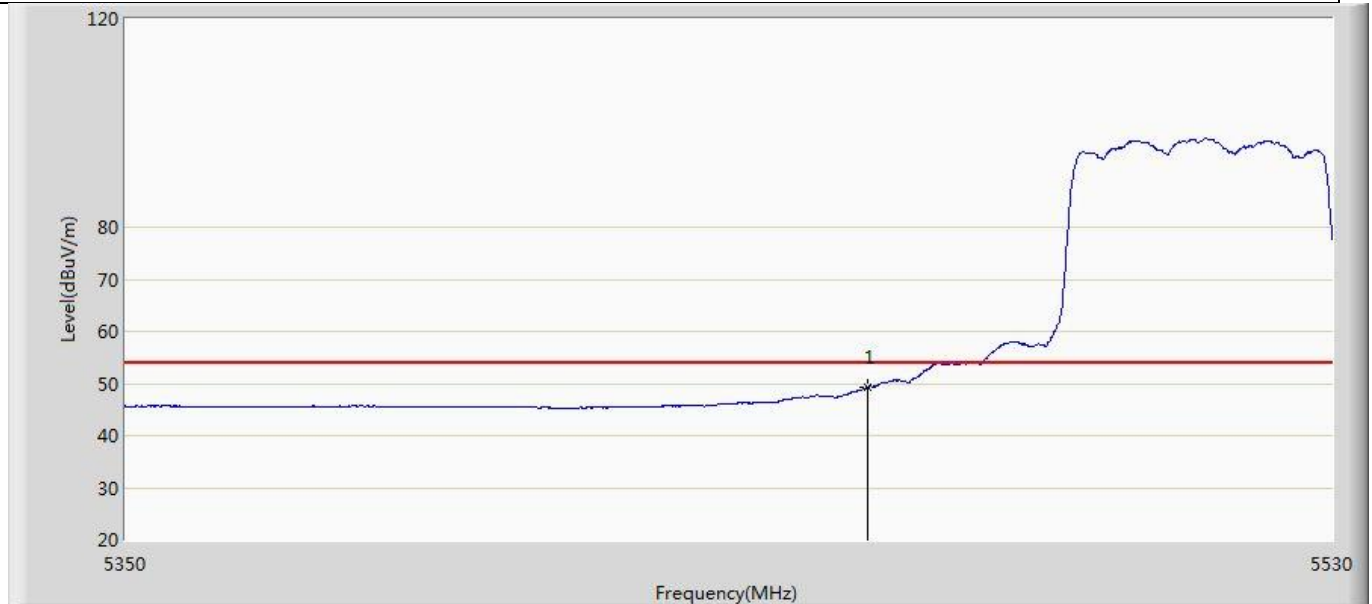


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	49.299	7.667	-4.701	54.000	41.632	AV

Profile: 2150775R	Page No.: 129
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:02
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5755MHz by 802.11ax(40MHz) MIMO	

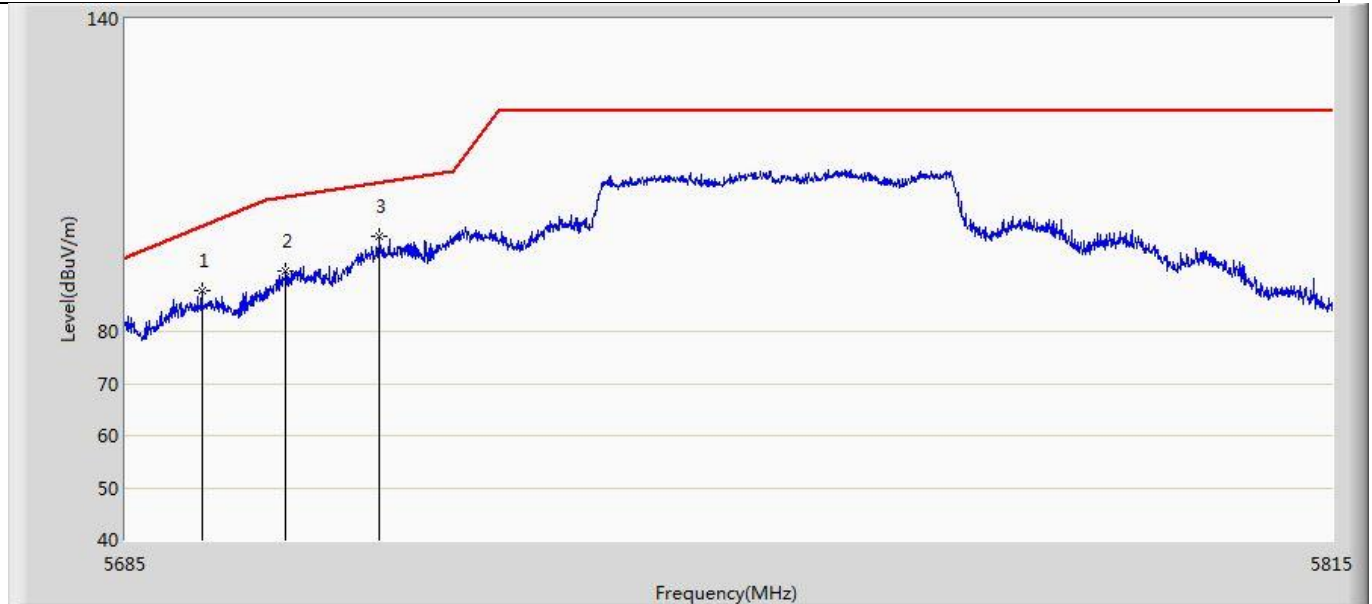


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5693.190	87.755	45.728	-12.425	100.180	42.027	PK
2		5702.160	91.480	49.435	-14.326	105.806	42.045	PK
3	*	5712.170	98.211	56.173	-10.399	108.610	42.039	PK

Profile: 2150775R	Page No.: 130
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:05
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5755MHz by 802.11ax(40MHz) MIMO	

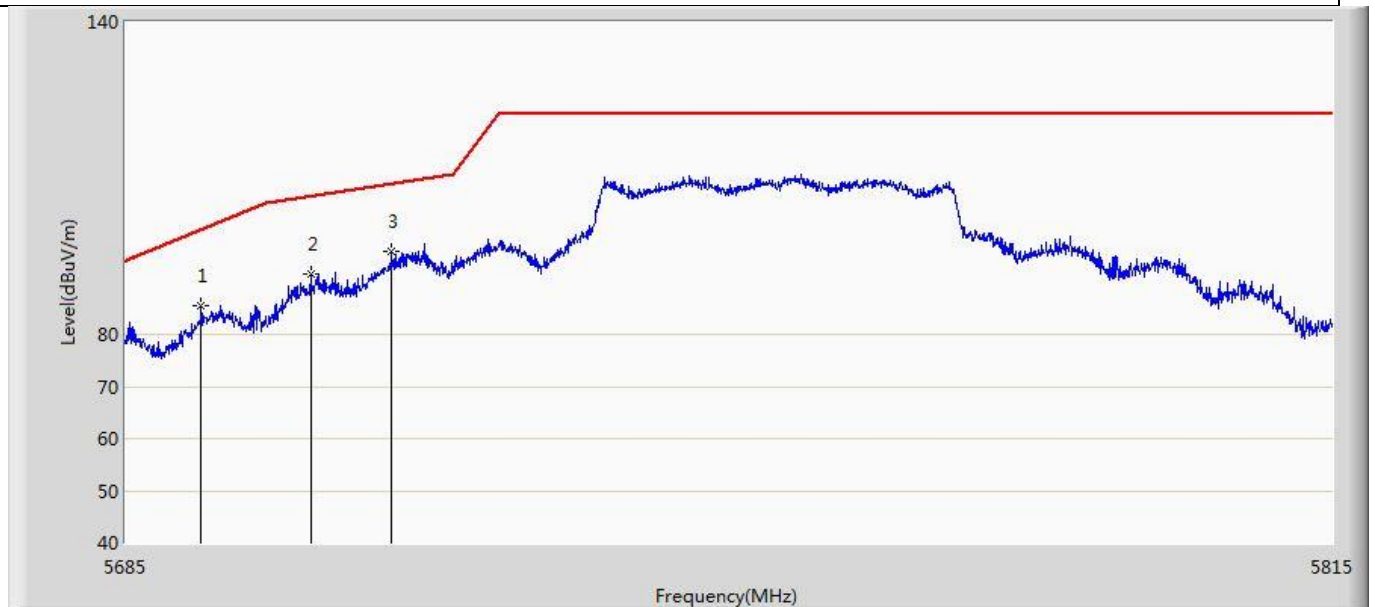


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5693.060	85.613	43.586	-14.471	100.084	42.027	PK
2		5704.825	91.587	49.537	-14.966	106.553	42.050	PK
3	*	5713.470	95.846	53.816	-13.128	108.974	42.030	PK

Profile: 2150775R	Page No.: 131
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:07
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5795MHz by 802.11ax(40MHz) MIMO	

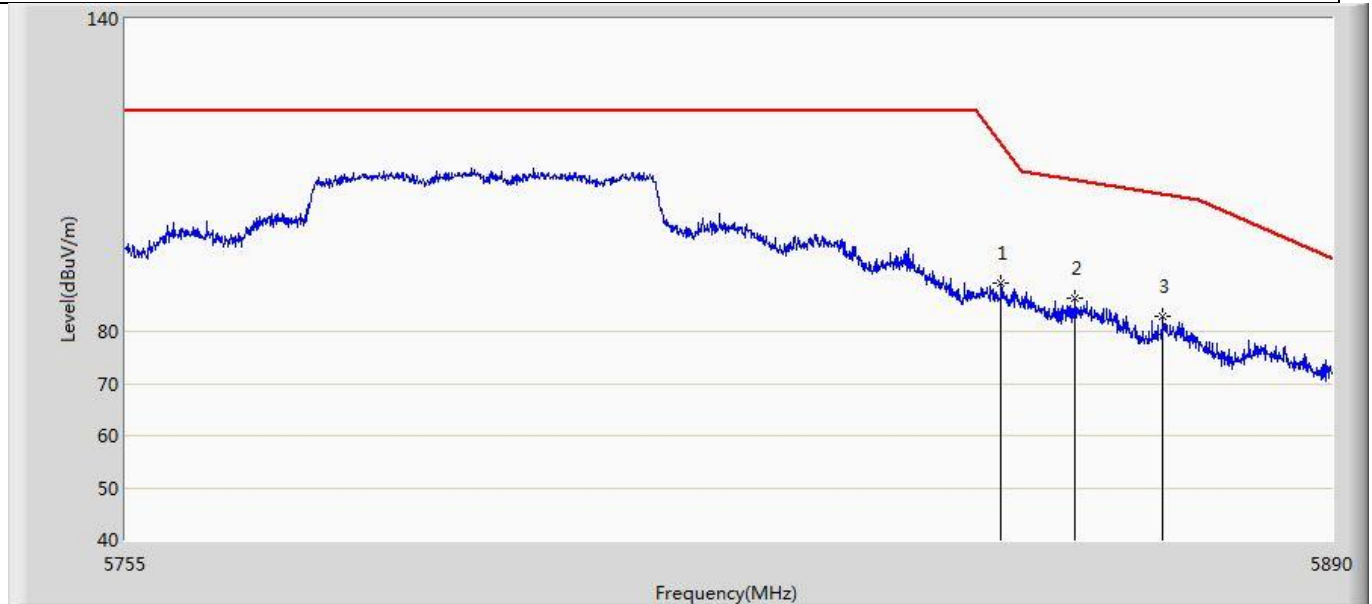


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.672	89.155	47.190	-26.952	116.107	41.965	PK
2	*	5860.975	86.411	44.419	-22.714	109.125	41.992	PK
3		5870.897	82.831	40.785	-23.516	106.347	42.046	PK

Profile: 2150775R	Page No.: 132
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:10
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5795MHz by 802.11ax(40MHz) MIMO	

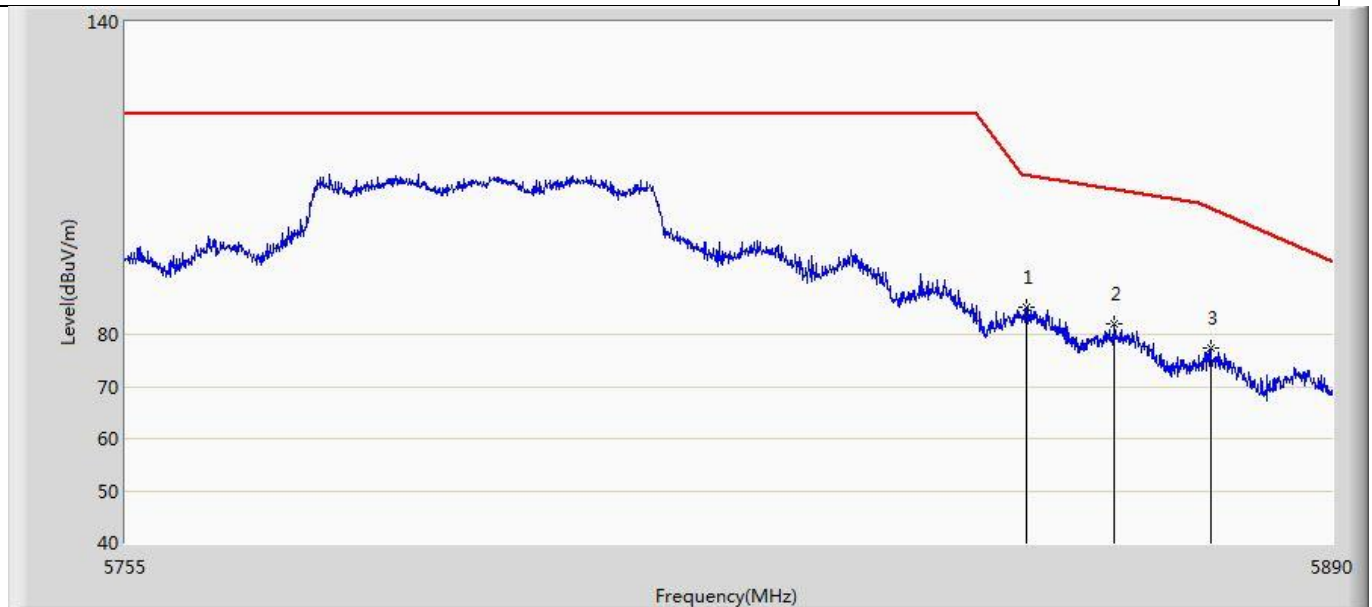


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5855.575	85.357	43.383	-25.281	110.639	41.975	PK
2		5865.430	81.919	39.904	-25.959	107.877	42.015	PK
3		5876.297	77.452	35.375	-26.784	104.236	42.077	PK

Profile: 2150775R	Page No.: 133
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) MIMO	

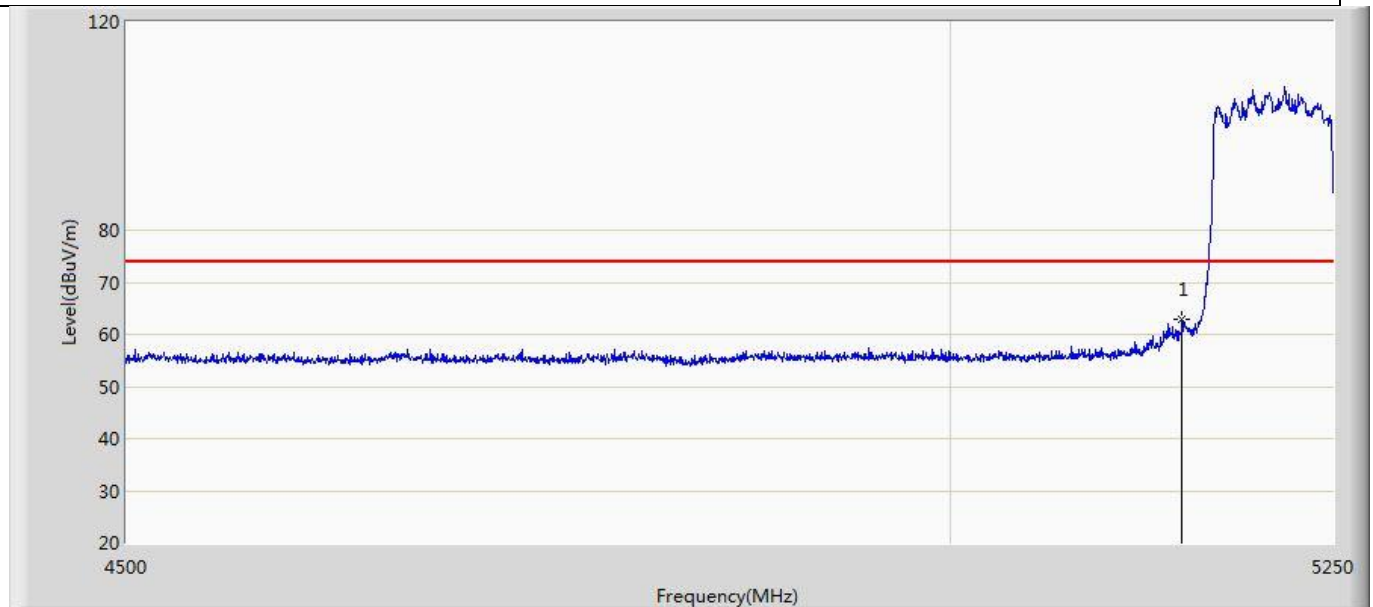


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	62.851	21.643	-11.149	74.000	41.208	PK

Profile: 2150775R	Page No.: 134
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) MIMO	

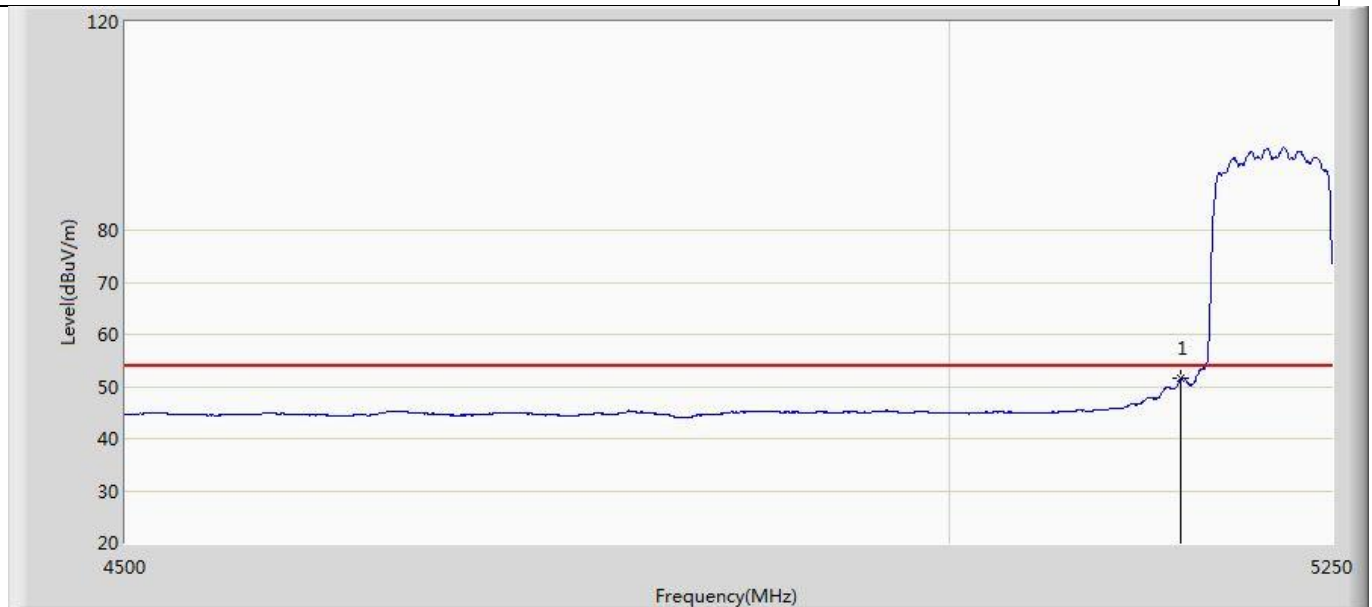


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.491	10.283	-2.509	54.000	41.208	AV

Profile: 2150775R	Page No.: 135
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) MIMO	

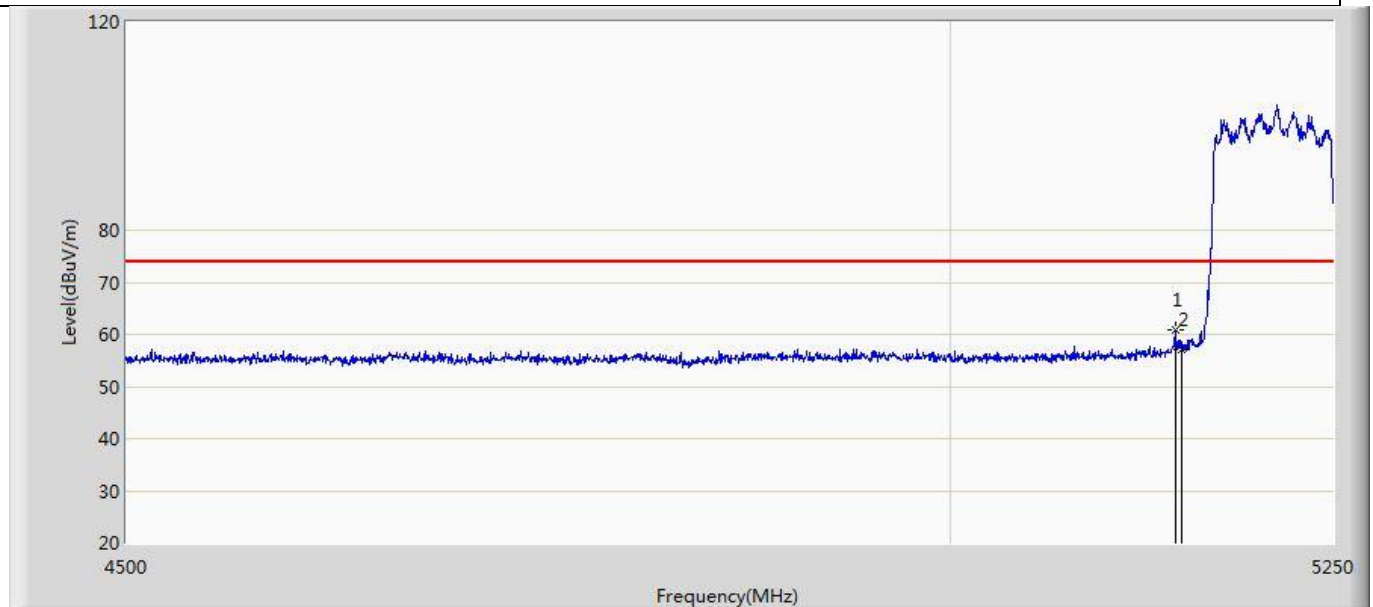


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5145.375	61.001	19.890	-12.999	74.000	41.112	PK
2		5150.000	57.009	15.801	-16.991	74.000	41.208	PK

Profile: 2150775R	Page No.: 136
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) MIMO	

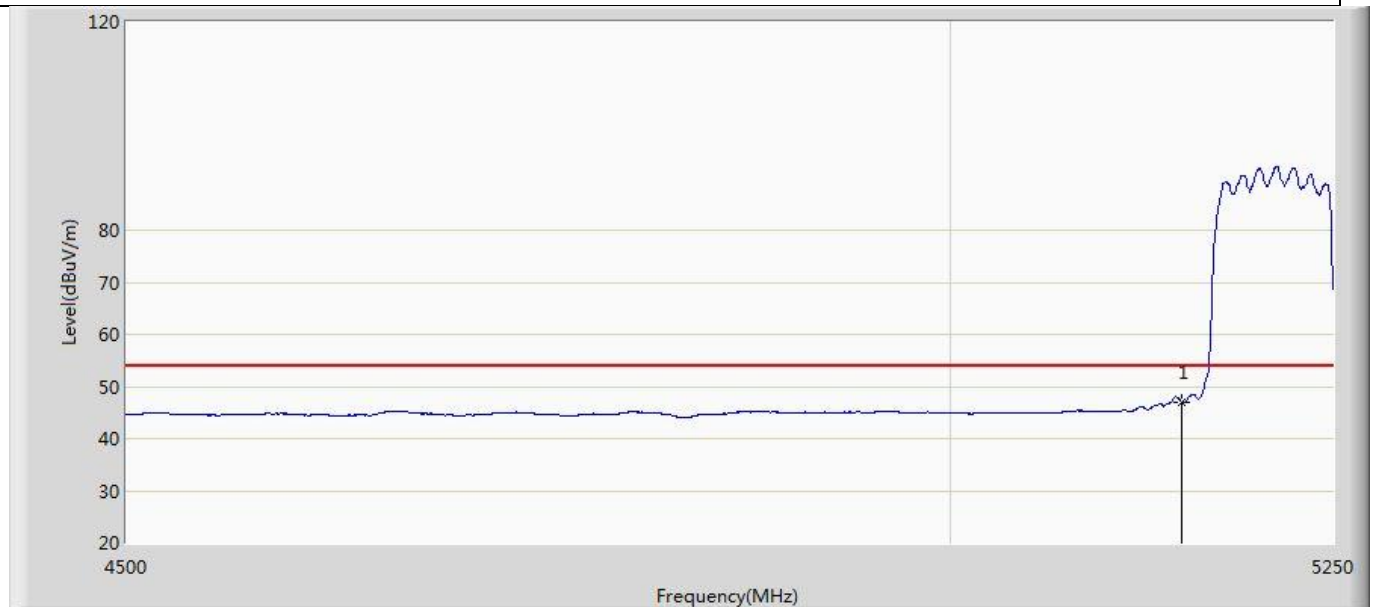


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	46.953	5.745	-7.047	54.000	41.208	AV

Profile: 2150775R	Page No.: 137
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

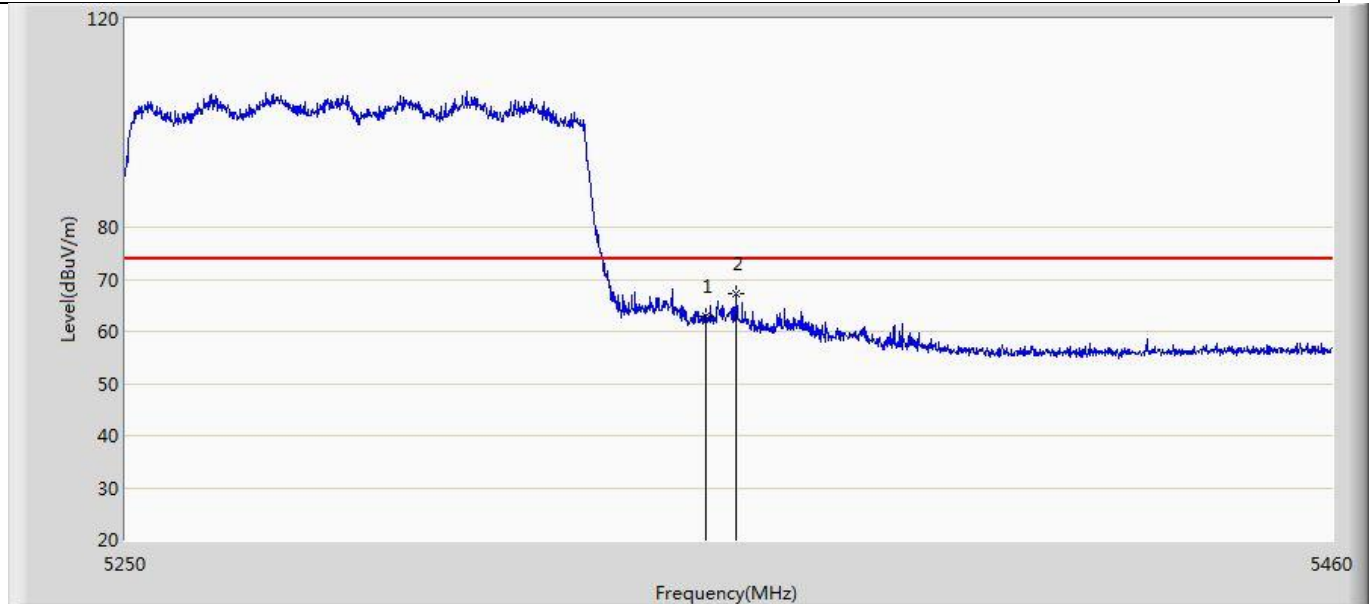


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	63.009	21.614	-10.991	74.000	41.395	PK
2	*	5355.315	67.325	25.927	-6.675	74.000	41.398	PK

Profile: 2150775R	Page No.: 138
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

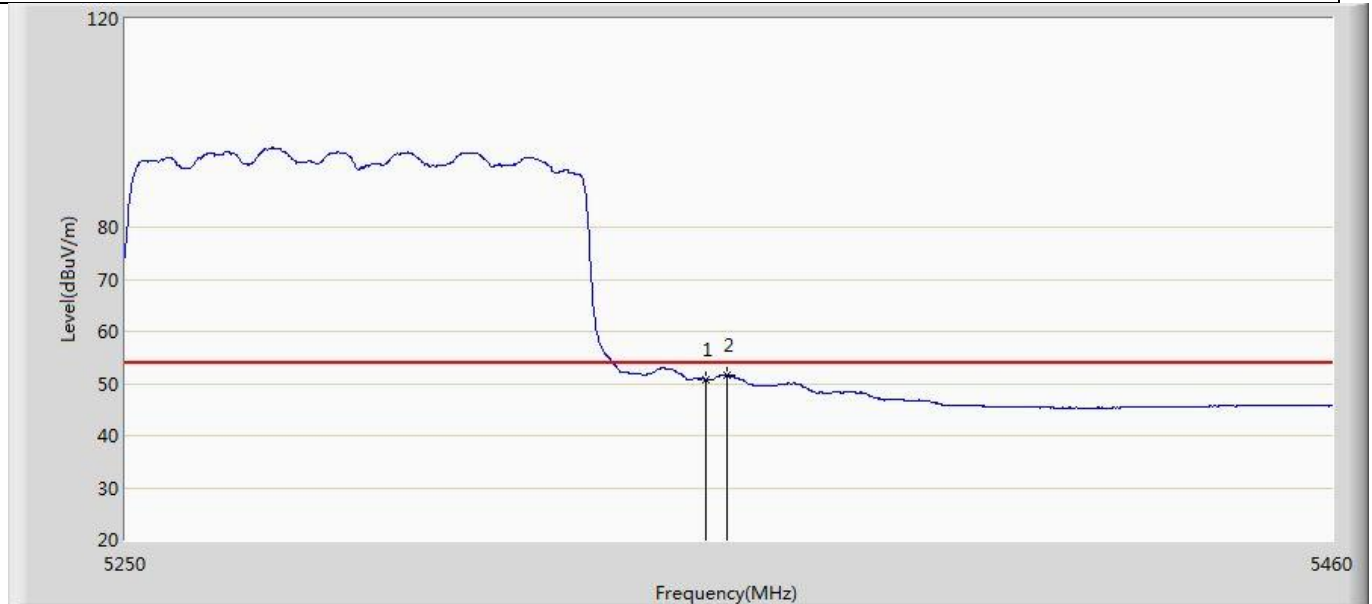


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	50.808	9.413	-3.192	54.000	41.395	AV
2	*	5353.740	51.696	10.294	-2.304	54.000	41.402	AV

Profile: 2150775R	Page No.: 139
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

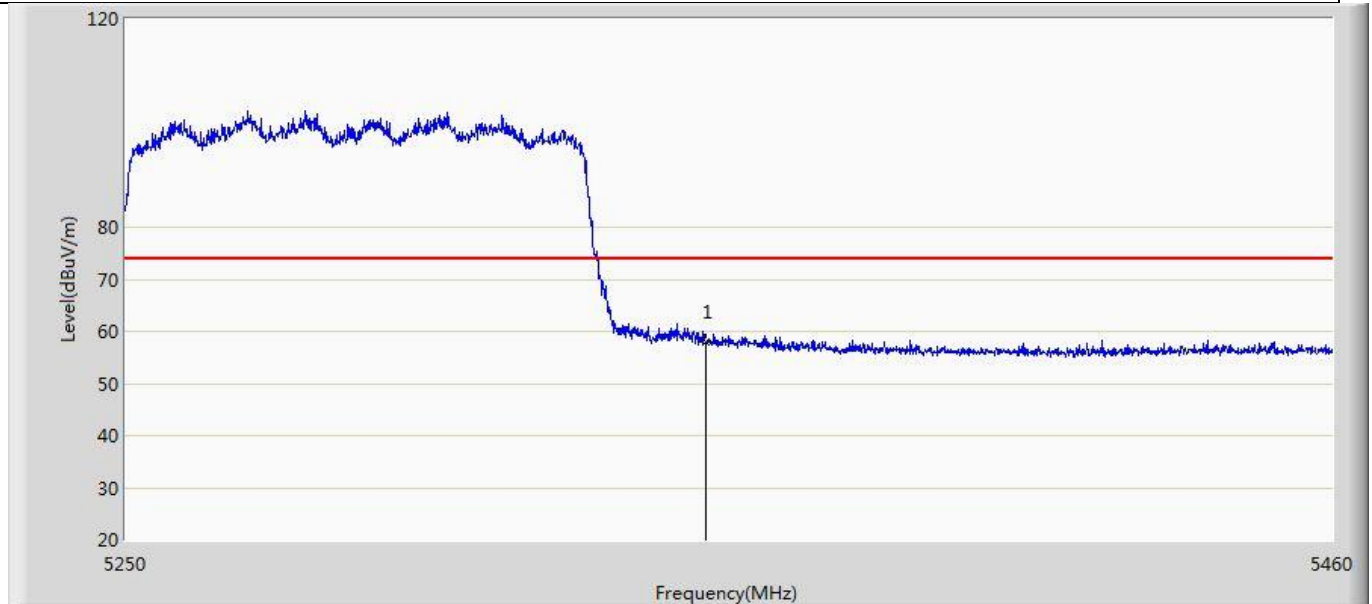

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	57.923	16.528	-16.077	74.000	41.395	PK

Profile: 2150775R	Page No.: 140
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) MIMO	

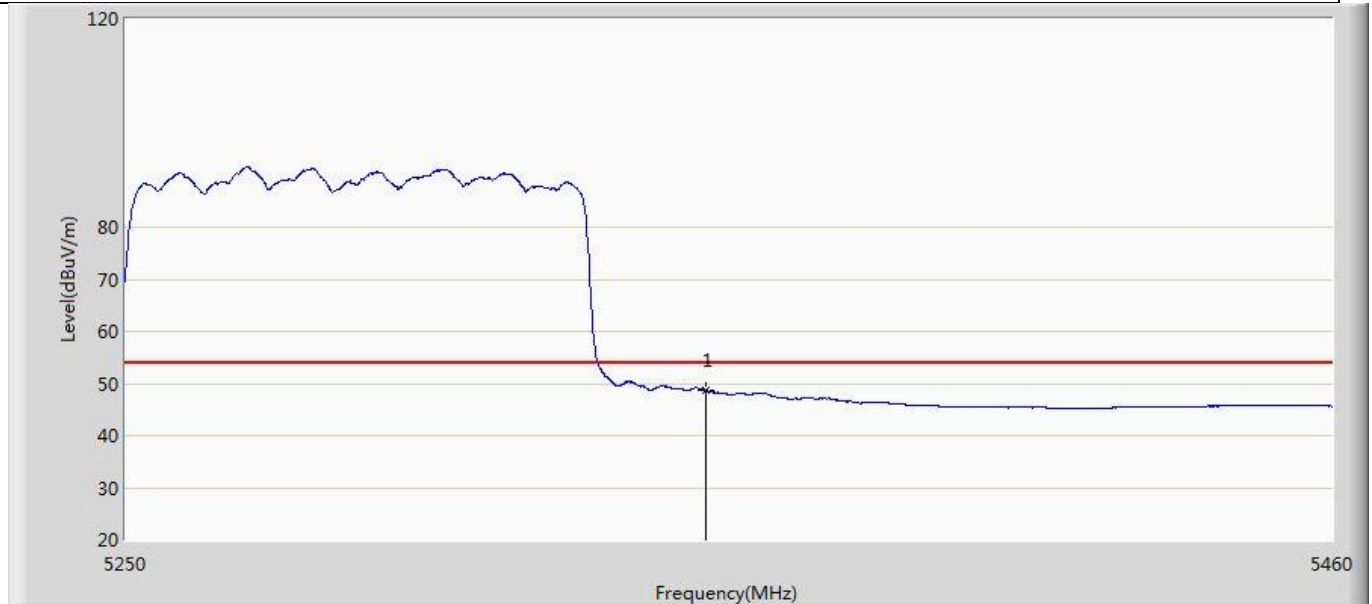


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	48.663	7.268	-5.337	54.000	41.395	AV

Profile: 2150775R	Page No.: 141
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5459.560	68.646	27.010	-5.354	74.000	41.636	PK
2		5460.000	65.379	23.747	-8.621	74.000	41.632	PK

Profile: 2150775R	Page No.: 142
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

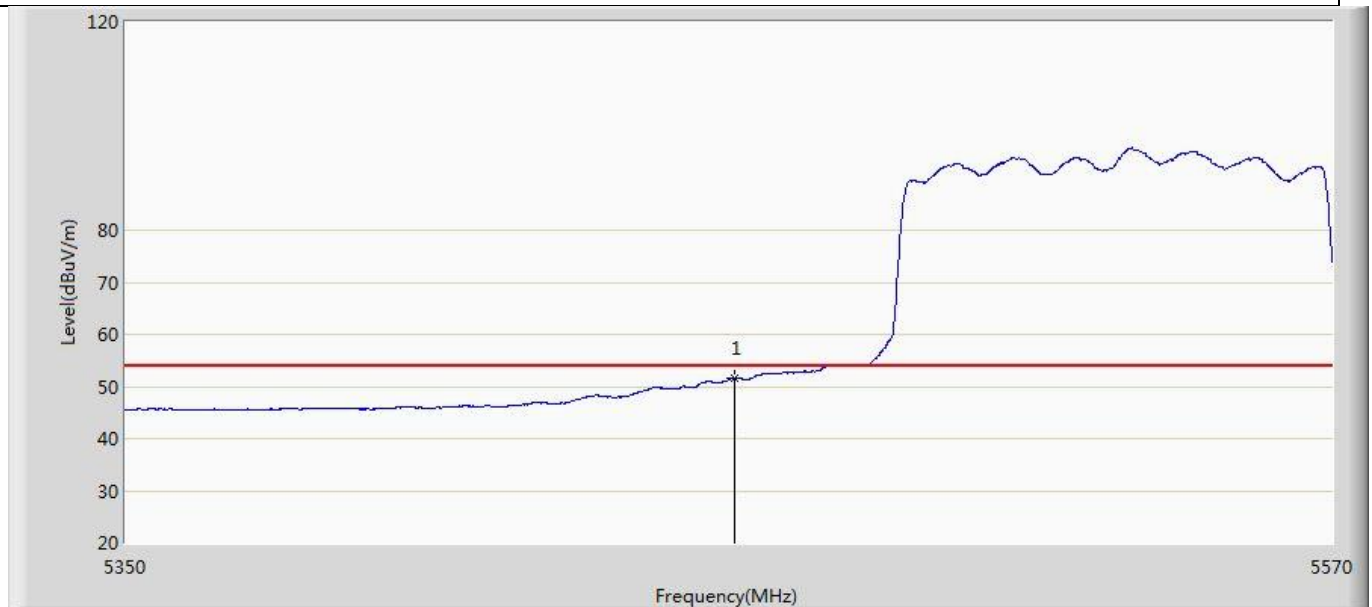


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.578	9.946	-2.422	54.000	41.632	AV

Profile: 2150775R	Page No.: 143
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

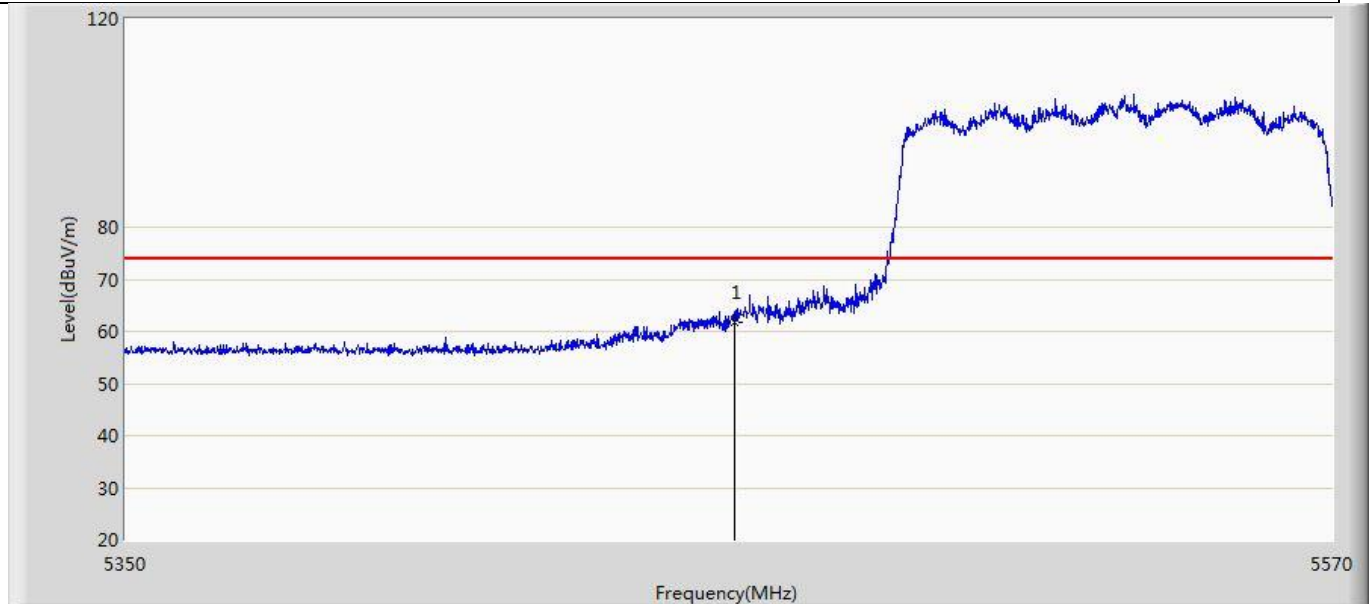

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	61.841	20.209	-12.159	74.000	41.632	PK

Profile: 2150775R	Page No.: 144
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) MIMO	

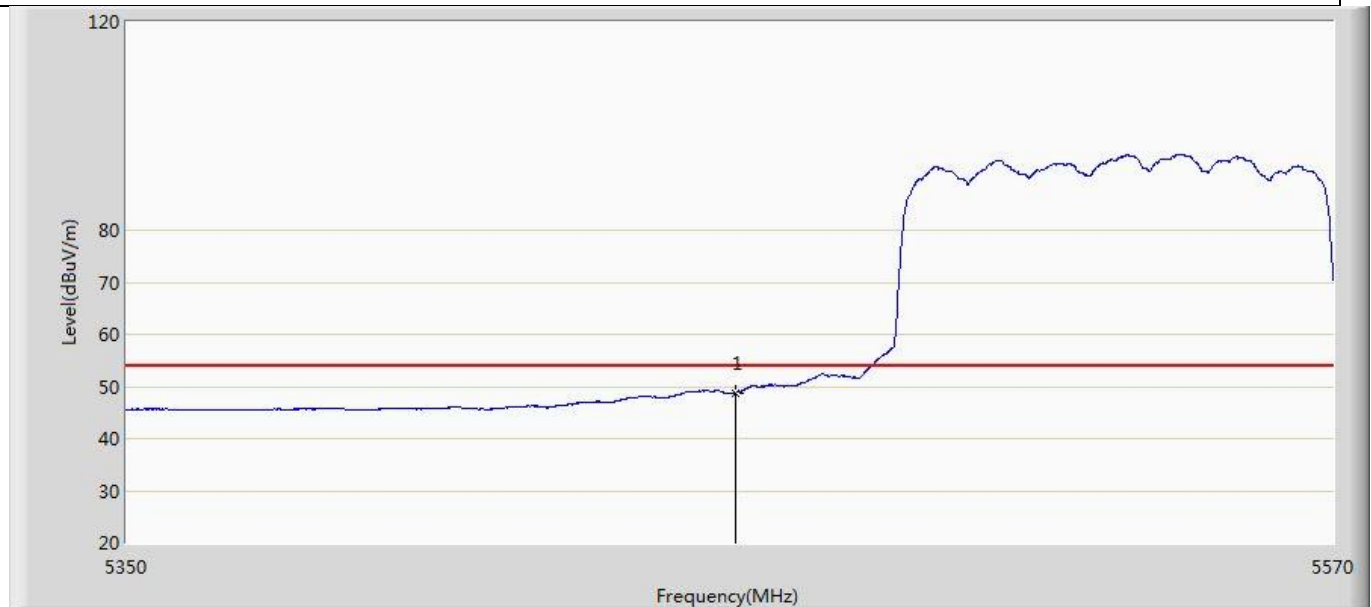


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	48.803	7.171	-5.197	54.000	41.632	AV

Profile: 2150775R	Page No.: 145
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:42
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5775MHz by 802.11ax(80MHz) MIMO	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5652.000	67.129	25.077	-2.558	69.686	42.051	PK
2		5684.000	77.275	35.172	-16.120	93.395	42.103	PK
3		5697.875	81.395	39.359	-22.239	103.634	42.036	PK
4		5859.750	79.919	37.931	-29.549	109.468	41.988	PK
5		5874.250	74.022	31.957	-31.388	105.410	42.065	PK
6		5884.875	70.021	27.872	-27.846	97.868	42.150	PK

Profile: 2150775R	Page No.: 146
Engineer: Tongben	
Site: AC5	Time: 2021/06/08 - 21:46
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5775MHz by 802.11ax(80MHz) MIMO	

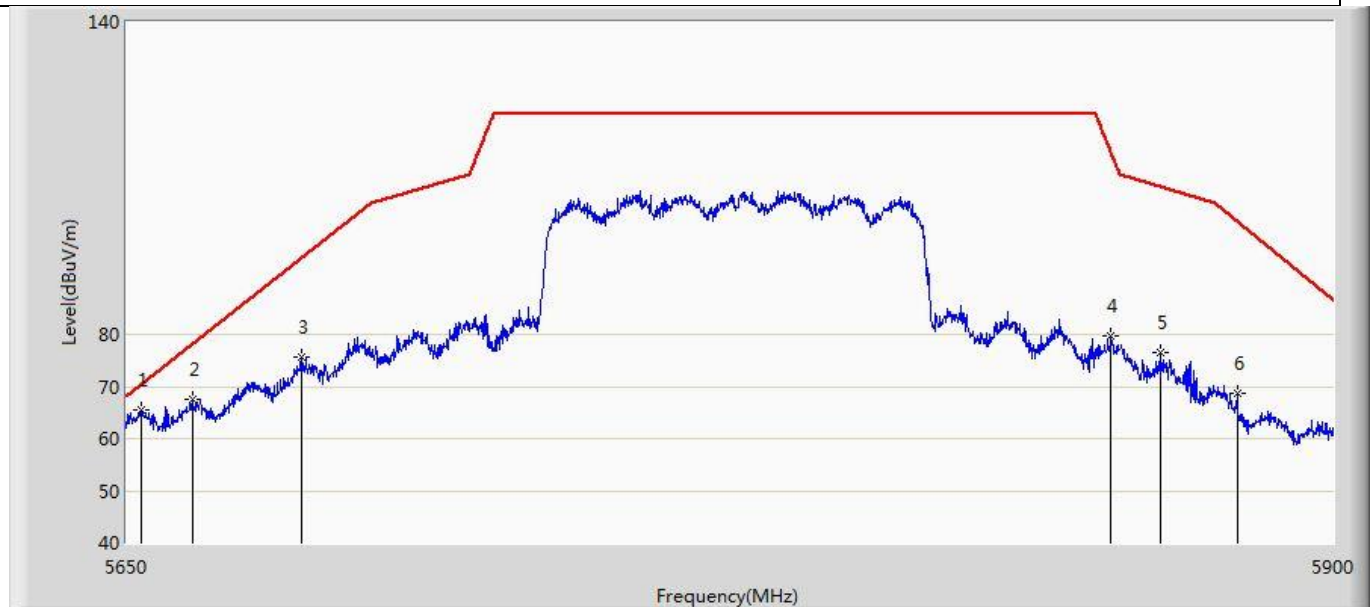


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5653.125	65.371	23.320	-5.151	70.522	42.051	PK
2		5663.500	67.439	25.343	-10.783	78.222	42.096	PK
3		5685.625	75.574	33.487	-19.022	94.596	42.088	PK
4		5853.250	79.596	37.629	-35.193	114.789	41.967	PK
5		5863.625	76.653	34.649	-31.729	108.383	42.004	PK
6		5879.750	68.751	26.651	-32.921	101.671	42.100	PK

Note : We have evaluated Full RU and Partial RU, shown in the report is the worst data. The spot check of Partial RU .


For partial RU bandedge spot check

Profile: 2150775R	Page No.: 481
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax20	

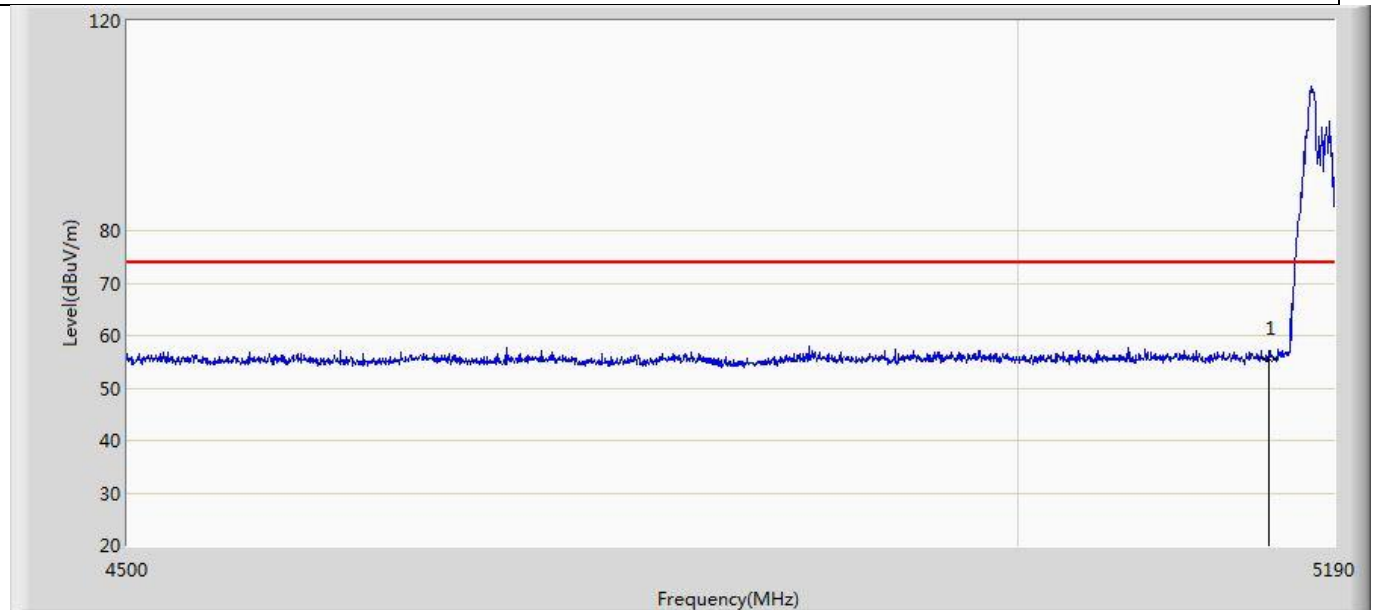


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	55.779	14.571	-18.221	74.000	41.208	PK

Profile: 2150775R	Page No.: 482
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax20	

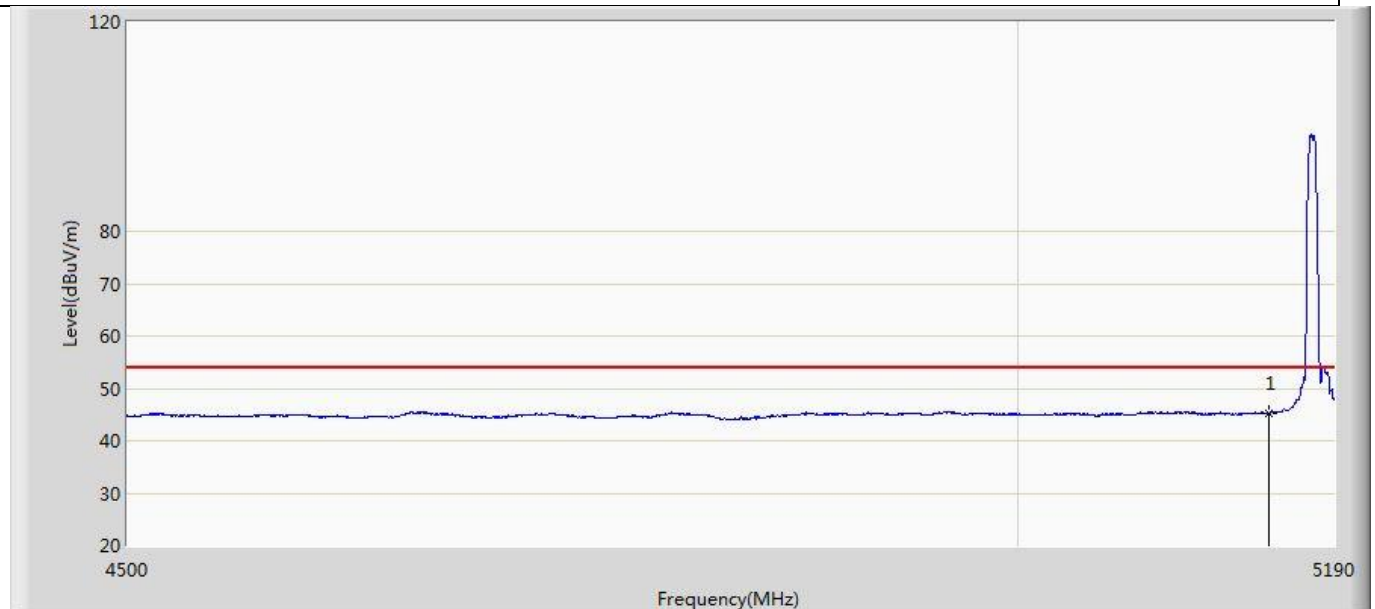


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.355	4.147	-8.645	54.000	41.208	AV

Profile: 2150775R	Page No.: 483
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax20	

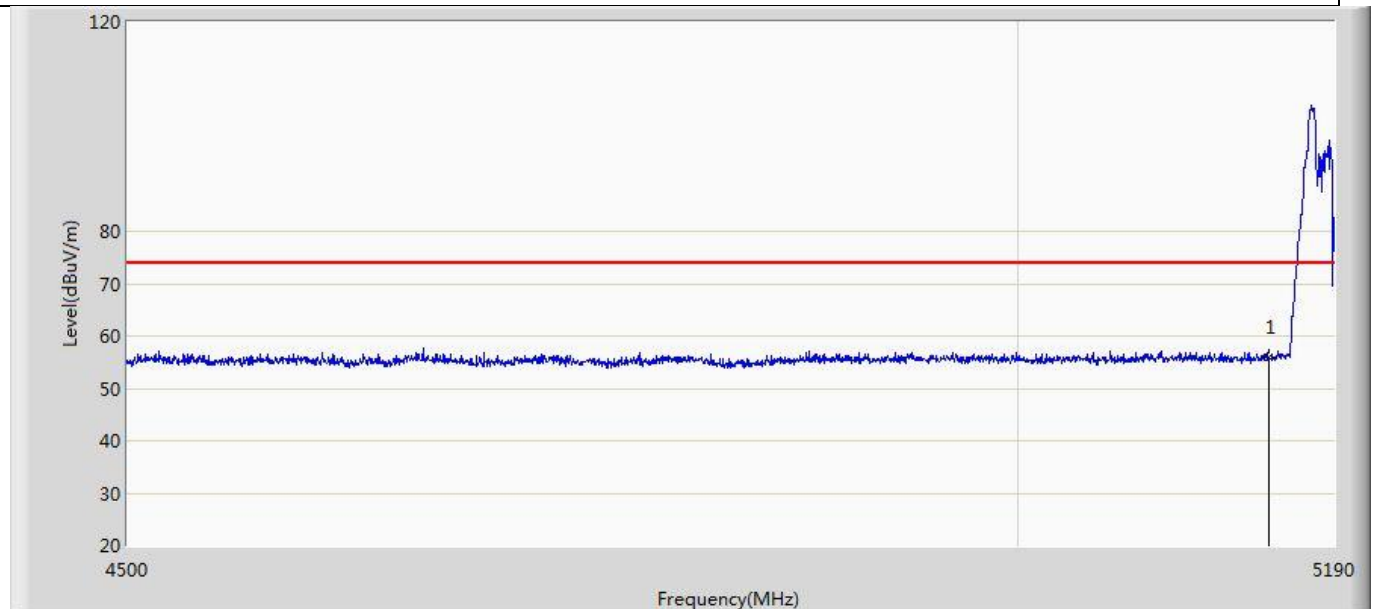


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	55.812	14.604	-18.188	74.000	41.208	PK

Profile: 2150775R	Page No.: 484
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 7: Transmit at 5180MHz by 802.11ax20	

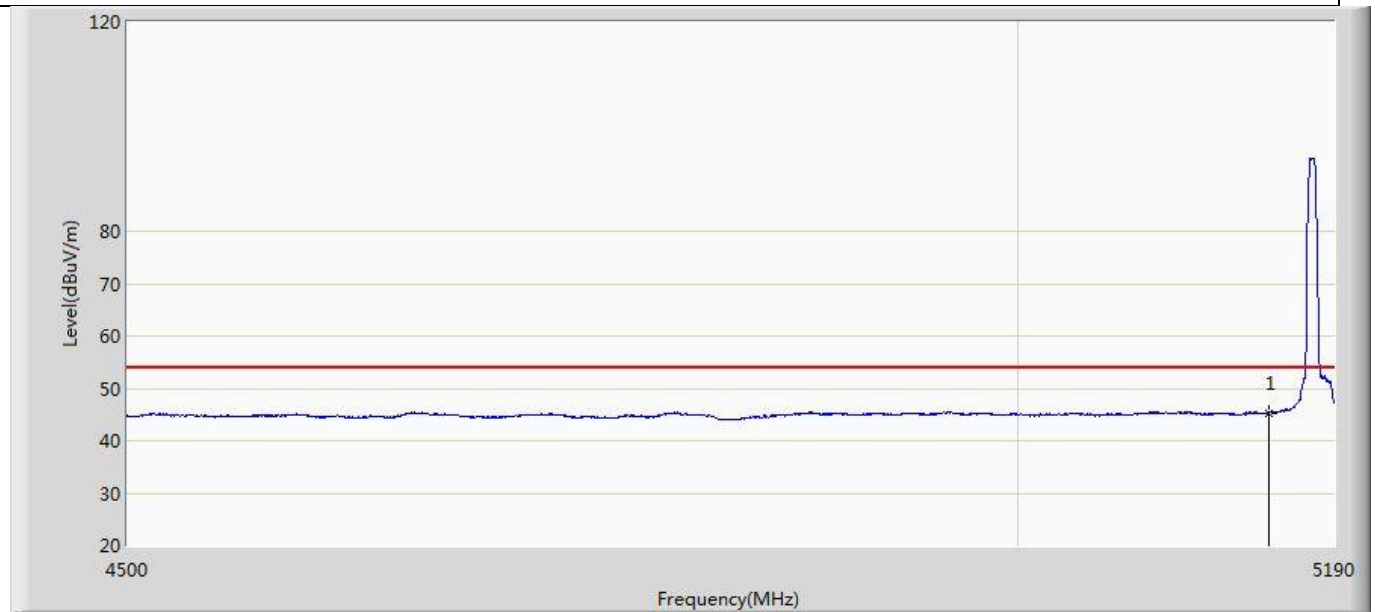


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.359	4.151	-8.641	54.000	41.208	AV

Profile: 2150775R	Page No.: 485
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax40	

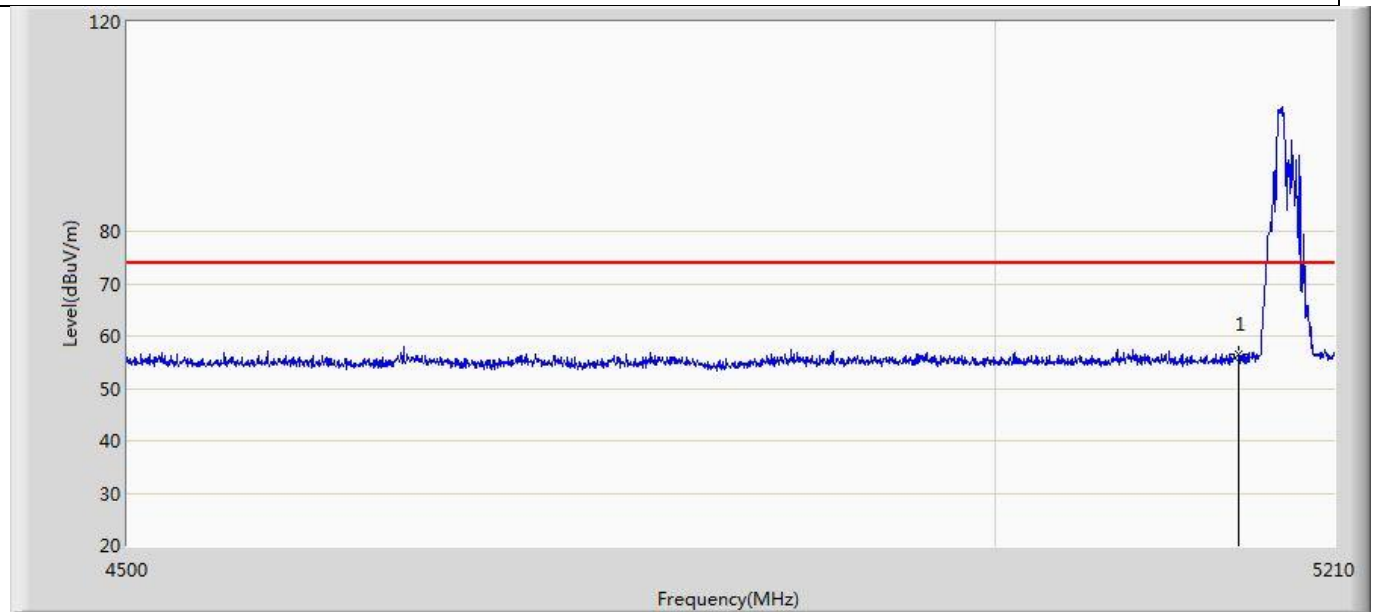


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	56.633	15.425	-17.367	74.000	41.208	PK

Profile: 2150775R	Page No.: 486
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax40	

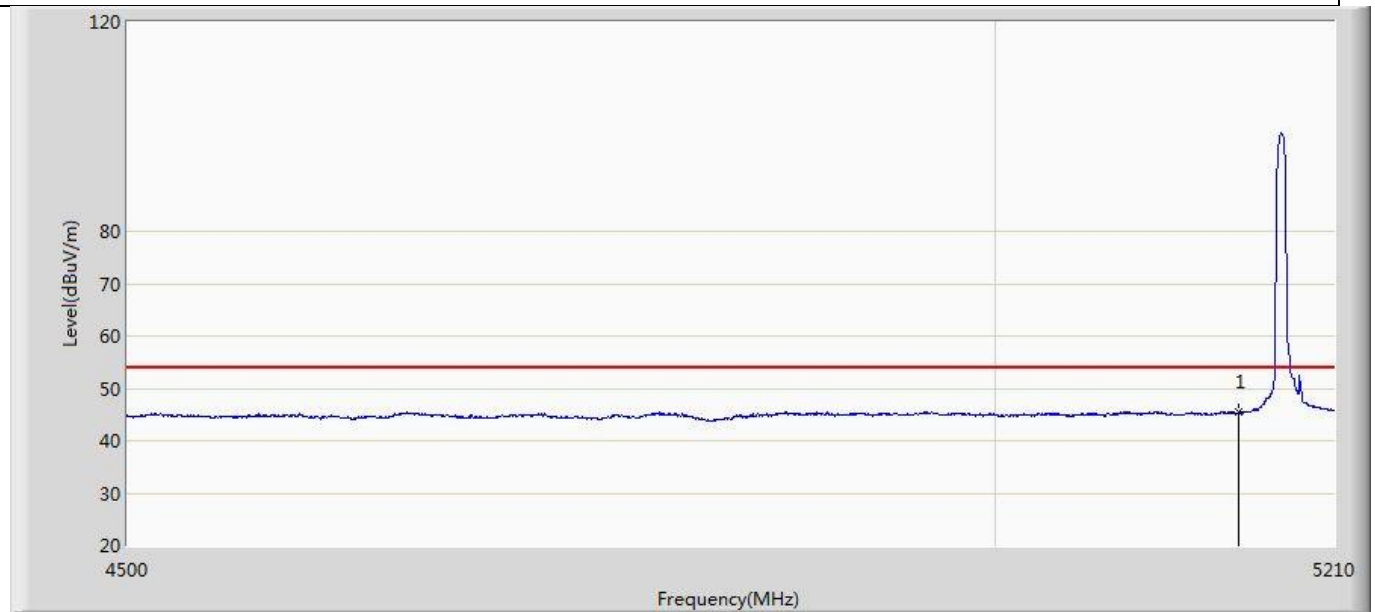


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.452	4.244	-8.548	54.000	41.208	AV

Profile: 2150775R	Page No.: 487
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax40	

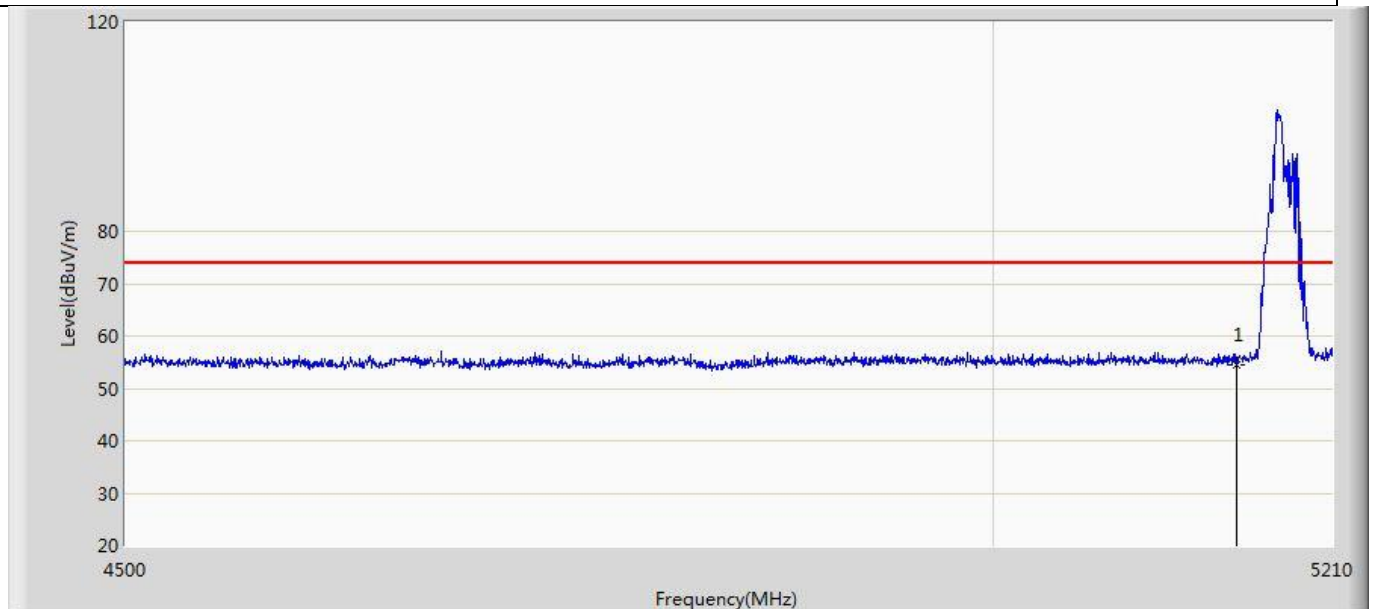


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	54.600	13.392	-19.400	74.000	41.208	PK

Profile: 2150775R	Page No.: 488
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 8: Transmit at 5190MHz by 802.11ax40	

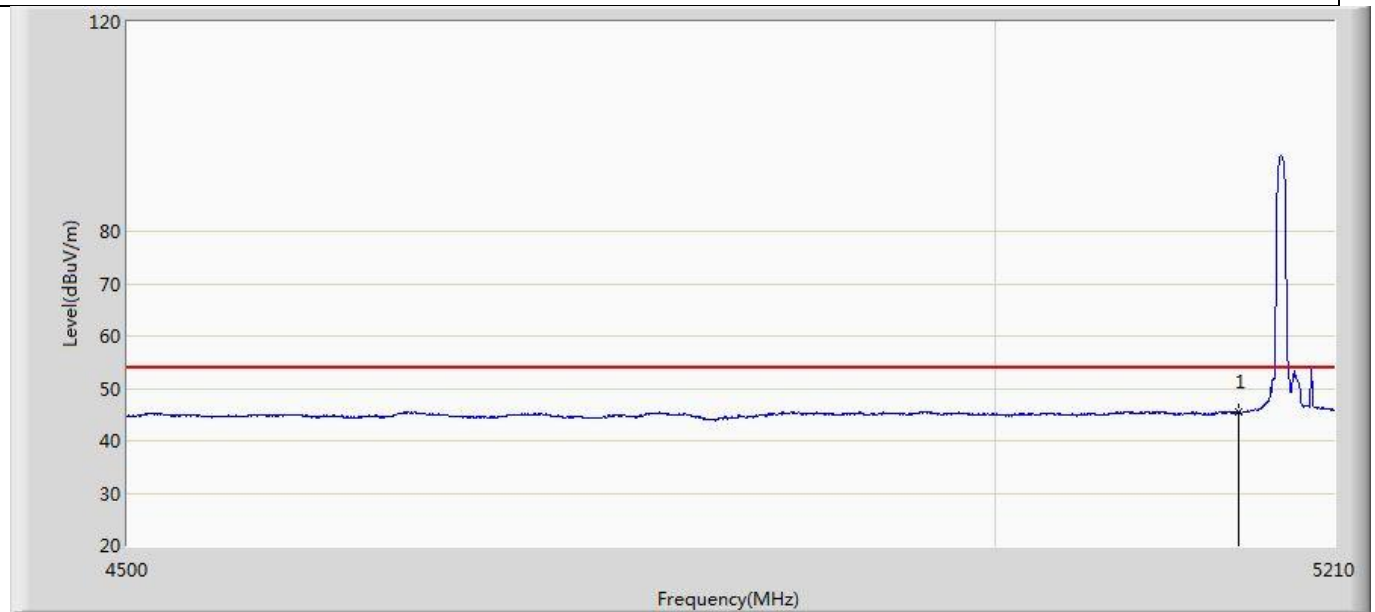


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.411	4.203	-8.589	54.000	41.208	AV

Profile: 2150775R	Page No.: 489
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax80	

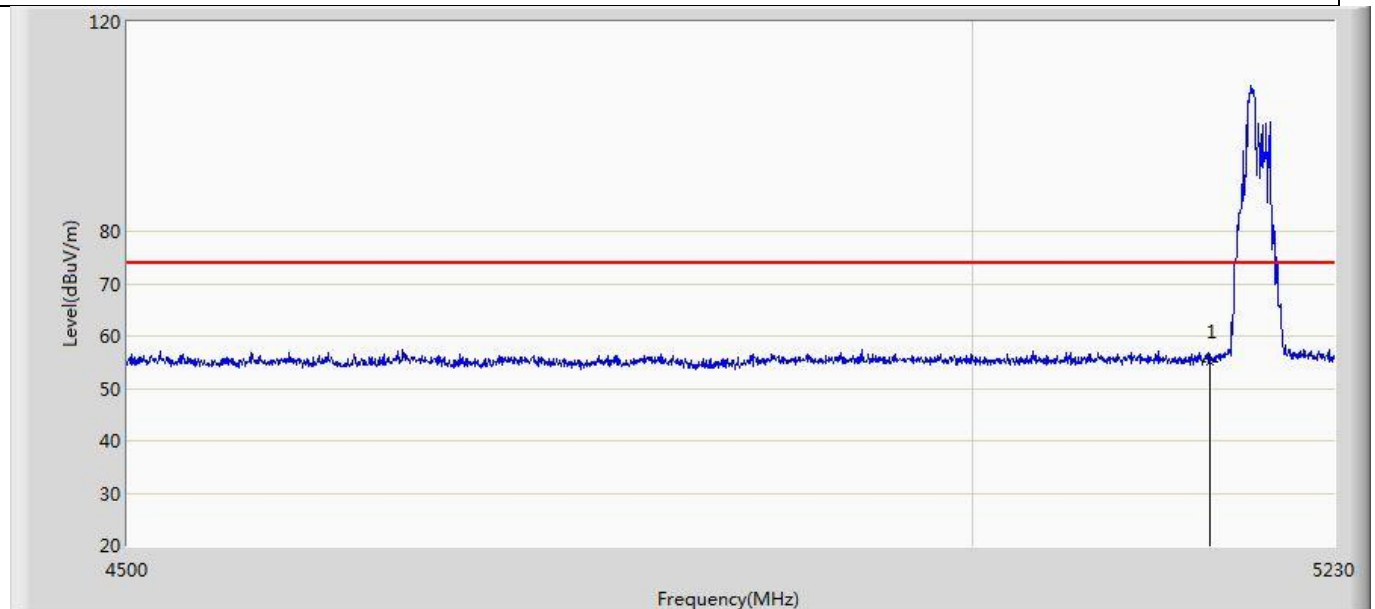


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	55.017	13.809	-18.983	74.000	41.208	PK

Profile: 2150775R	Page No.: 490
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax80	

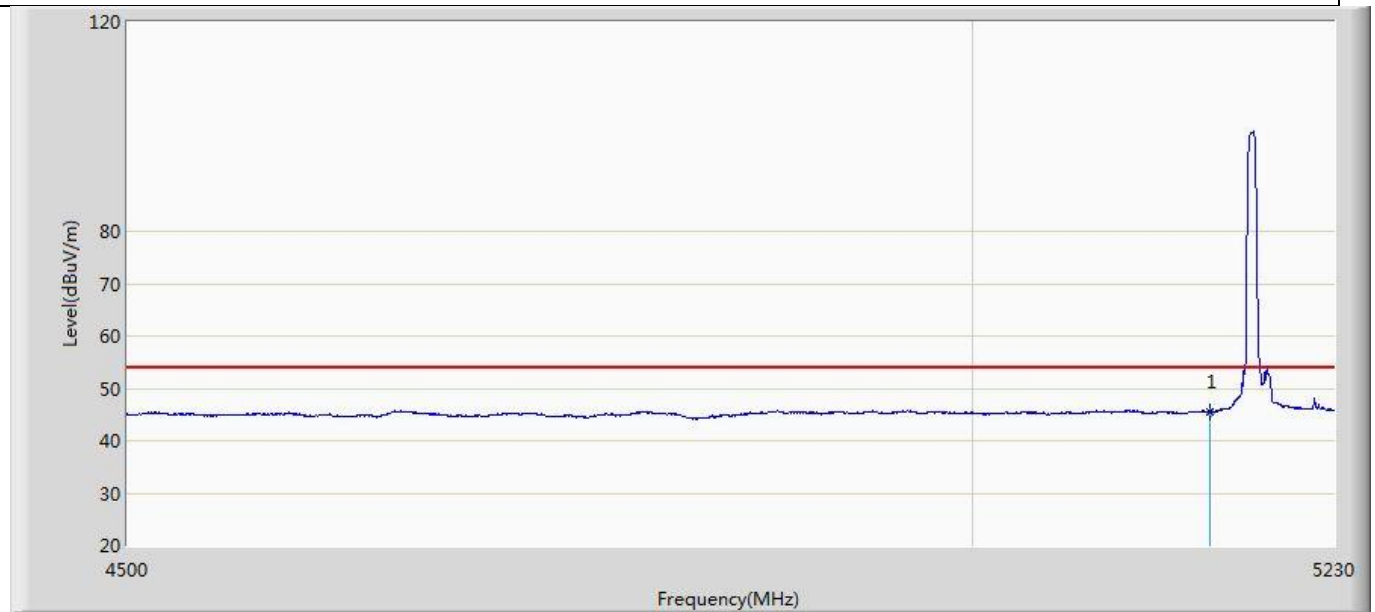


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.621	4.413	-28.379	74.000	41.208	PK

Profile: 2150775R	Page No.: 491
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax80	

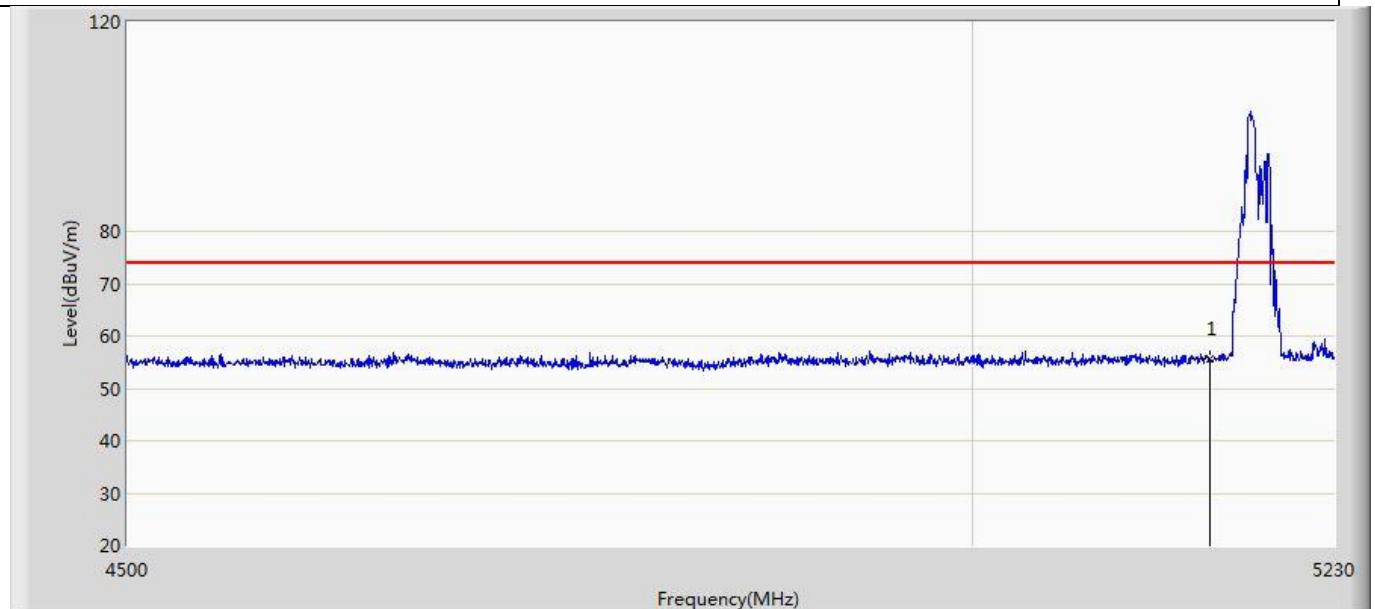

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	55.609	14.401	-18.391	74.000	41.208	PK

Profile: 2150775R	Page No.: 492
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 20:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 9: Transmit at 5210MHz by 802.11ax80	

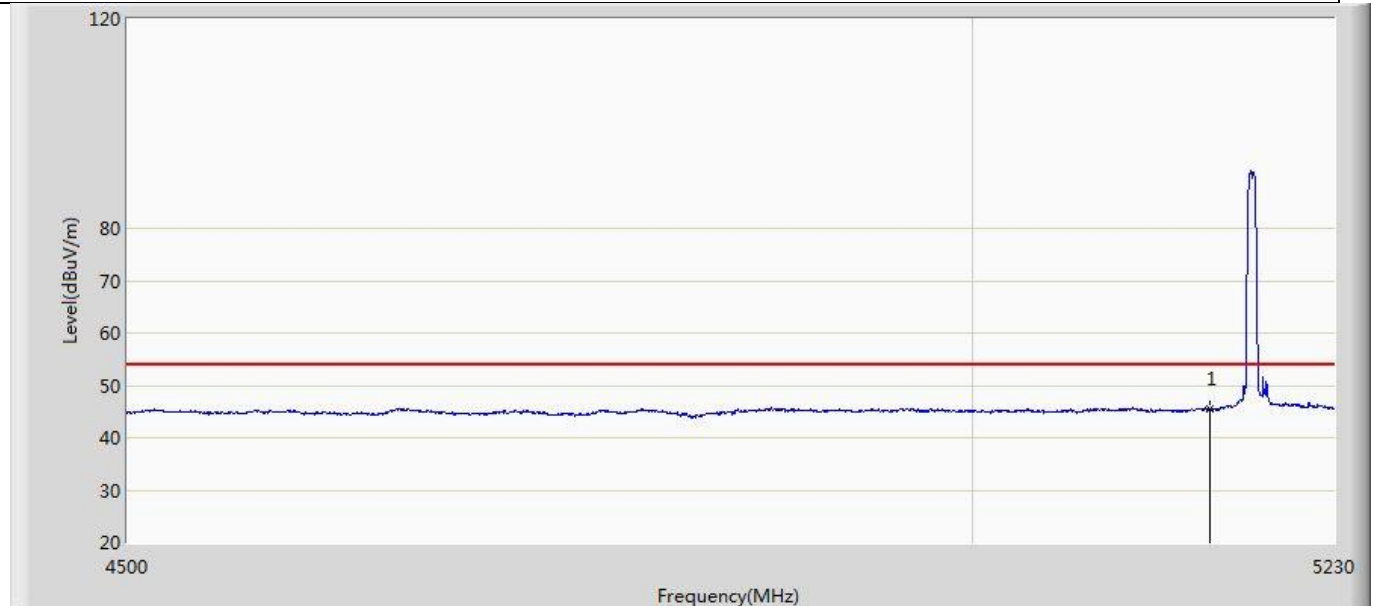

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.507	4.299	-8.493	54.000	41.208	AV

4.9 Frequency Stability


VERDICT: PASS

4.9.1 Limit:

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.

4.9.2 Test Setup

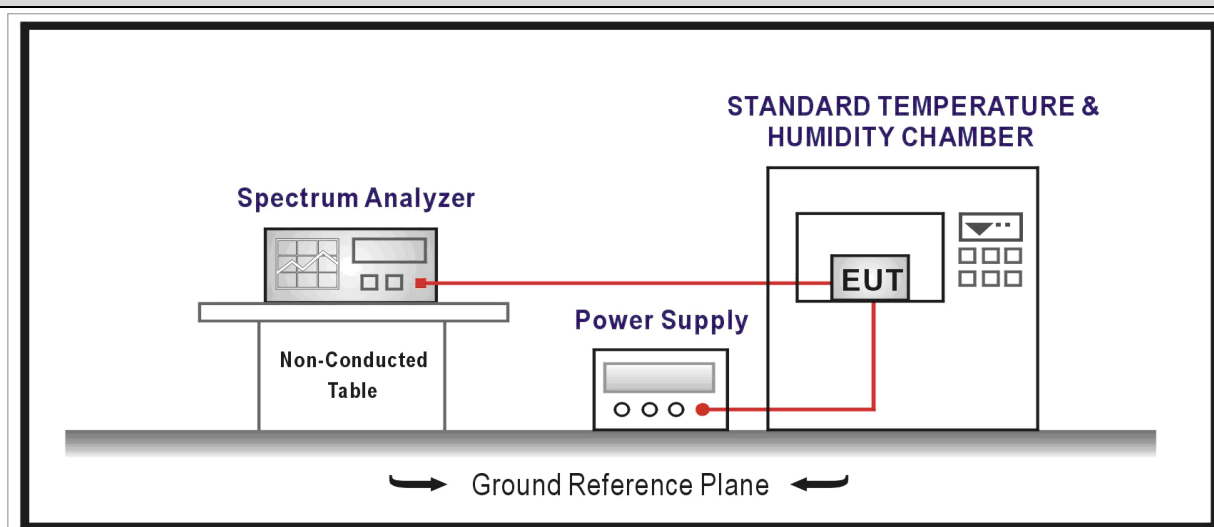

4.9.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		6.8	Frequency stability tests
☒	ANSI C63.10	6.8.1	Frequency stability with respect to ambient temperature	
☒	ANSI C63.10	6.8.2	Frequency stability when varying supply voltage	

4.9.4 Test Data

Frequency Stability under Temperature at 0min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	87	±20	Pass
10	5500.000	122	±20	Pass
20	5500.000	-41	±20	Pass
35	5500.000	143	±20	Pass

Frequency Stability under Temperature at 2min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	102	±20	Pass
10	5500.000	144	±20	Pass
20	5500.000	107	±20	Pass
35	5500.000	128	±20	Pass

Frequency Stability under Temperature at 5min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	103	±20	Pass
10	5500.000	137	±20	Pass
20	5500.000	111	±20	Pass
35	5500.000	124	±20	Pass

Frequency Stability under Temperature at 10min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	111	±20	Pass
10	5500.000	141	±20	Pass
20	5500.000	123	±20	Pass
35	5500.000	134	±20	Pass

4.10 Antenna Requirement**VERDICT: PASS****4.10.1 Limit:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.10.2 Antenna Connector Construction:

☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

4.11 Test setup photo and EUT Photo	VERDICT: PASS
-------------------------------------	---------------

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____