

FCC Part 15C

Measurement and Test Report

For

XIAMEN DNAKE INTELLIGENT TECHNOLOGY CO.,LTD

NORTH GATE,NO.1, HAIJING ROAD,HAICANG

DISTRICT,XIAMEN,361026, FUJIAN,CHINA

FCC ID: 2ATT5-902D

FCC Rule(s): FCC Part 15.225

Product Description: Outdoor Station

Tested Model: 902D-B3

Report No.: WTX19X06041994W

Sample Receipt Date: 2019-06-05

Tested Date: 2019-06-05 to 2019-06-17

Issued Date: 2019-06-26

Tested By: Mike Shi / Engineer

Reviewed By: Silin Chen / EMC Manager

Approved & Authorized By: Jandy so / PSQ Manager

Prepared By:

Mike Shi

Silin Chen

Jandy so

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
2. SUMMARY OF TEST RESULTS.....	8
3. ANTENNA REQUIREMENT.....	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. RADIATED EMISSIONS.....	10
4.1 STANDARD APPLICABLE.....	10
4.2 TEST PROCEDURE.....	10
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
5. OUT OF BAND EMISSIONS.....	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST PROCEDURE.....	15
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	15
6. FREQUENCY STABILITY.....	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	17
7. EMISSION BANDWIDTH.....	18
7.1 APPLICABLE STANDARD.....	18
7.2 TEST PROCEDURE.....	18
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	18
8. CONDUCTED EMISSIONS.....	20
8.1 TEST PROCEDURE.....	20
8.2 BASIC TEST SETUP BLOCK DIAGRAM.....	20
8.3 TEST RECEIVER SETUP.....	20
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	20

Report version

Version No.	Date of issue	Description
Rev.1	2019-06-26	Refer the old report WTX19X06036654W updated the model name,cert holder, but the circuit and the electronic construction do not change, declared by the manufacturer.so the test data from the original report.

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: XIAMEN DNAKE INTELLIGENT TECHNOLOGY CO.,LTD
Address of applicant: NORTH GATE,NO.1, HAIJING ROAD,HAICANG
DISTRICT,XIAMEN,361026, FUJIAN,CHINA

Manufacturer: XIAMEN DNAKE INTELLIGENT TECHNOLOGY CO.,LTD
Address of manufacturer: NORTH GATE,NO.1, HAIJING ROAD,HAICANG
DISTRICT,XIAMEN,361026, FUJIAN,CHINA

General Description of EUT	
Product Name:	Outdoor Station
Trade Name:	/
Model No.:	902D-B3
Adding Model(s):	902D-B7, 902D-B4, 902D-B2, 902D-B5, 902D-B6
Rated Voltage:	DC12V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model 902D-B3, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	NFC
Frequency Range:	13.56MHz
Max. Field Strength:	69.27dBuV/m (at 3m)
Antenna Type:	Integral Antenna

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.225: Operation within the band 13.110-14.010 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	13.56MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
RJ45	4.5	Unshielded	With Ferrite
RJ45	1.5	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Frequency Deviation	2.3%	± 5%
Conducted Emissions	Conducted	9-150kHz ± 3.74dB
		0.15-30MHz ± 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ± 4.52dB
		0.2-1GHz ± 5.56dB
		1-6GHz ± 3.84dB
		6-18GHz ± 3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	CCS	EZ-EMC	V1.0
EMI Test Software (Conducted Emission)*	CCS	EZ-EMC	V1.0

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission	Compliant
§15.225(a)	Field Strength	Compliant
§15.225(b)(c)	Out of Band Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant

N/A: not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.225(a), the field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

According to §15.225(d), the field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.225(d) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

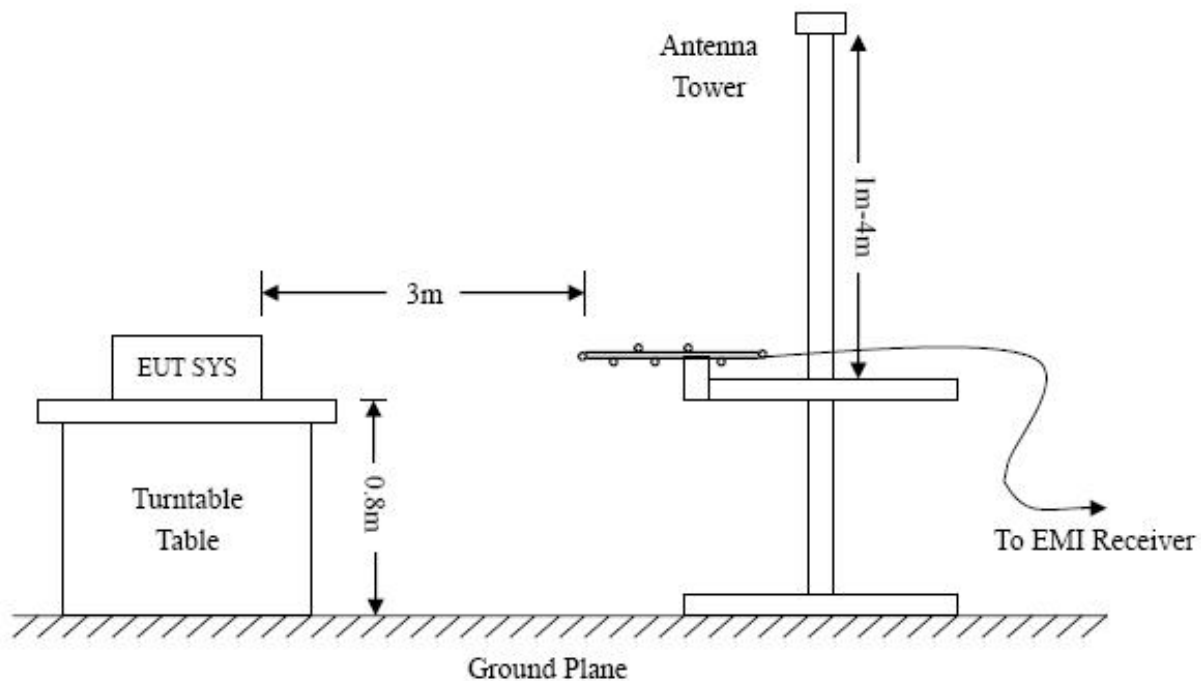

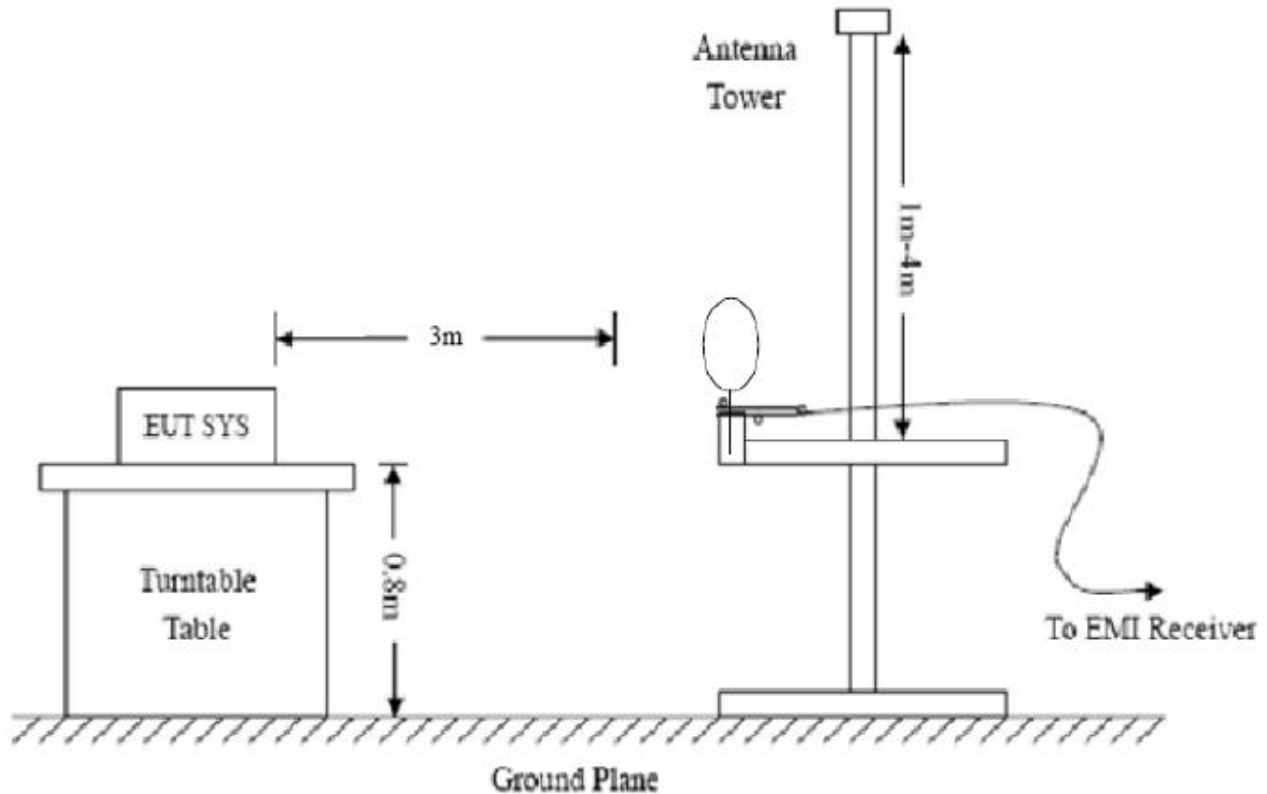

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

4.4 Summary of Test Results/Plots


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Below 30MHz

Frequency	Reading	Correction Factor	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	X/Y/Z	
13.56	78.40	-9.13	69.27	124.0	-54.73	X	Peak
27.12	58.52	-2.27	56.25	69.5	-13.25	X	Peak
13.56	68.41	-9.13	59.28	124.0	-64.72	Y	Peak
27.12	44.33	-2.27	42.06	69.5	-27.44	Y	Peak
13.56	67.34	-9.13	58.21	124.0	-65.79	Z	Peak
27.12	41.45	-2.27	39.18	69.5	-30.32	Z	Peak


➤ Above 30MHz

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

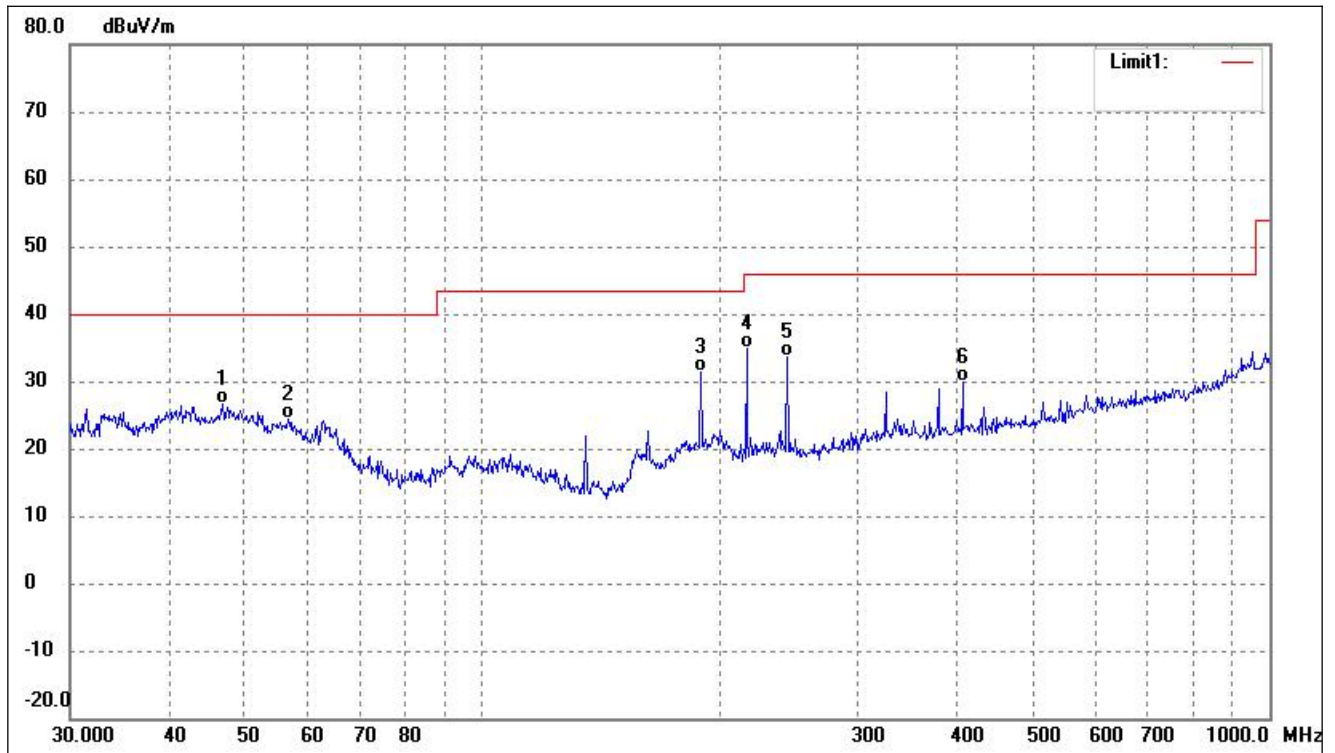

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.8303	34.63	-8.11	26.52	40.00	-13.48	221	100	QP
2	56.7917	34.29	-9.96	24.33	40.00	-15.67	92	100	QP
3	189.7385	45.55	-14.21	31.34	43.50	-12.16	187	100	QP
4	216.7828	47.70	-12.76	34.94	46.00	-11.06	117	100	QP
5	244.2321	44.91	-11.25	33.66	46.00	-12.34	229	100	QP
6	407.5145	37.17	-7.23	29.94	46.00	-16.06	276	100	QP

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

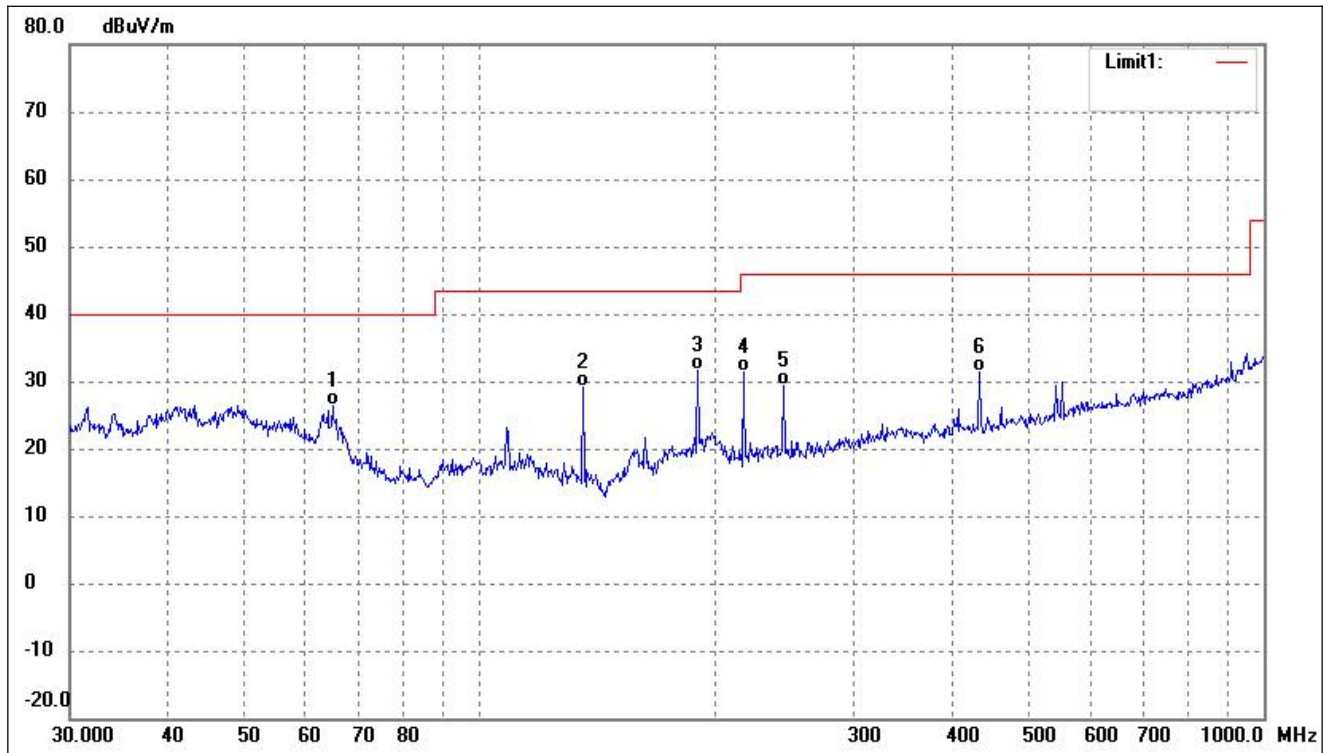

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	64.8865	38.50	-12.13	26.37	40.00	-13.63	235	100	QP
2	135.5062	46.90	-17.75	29.15	43.50	-14.35	91	100	QP
3	189.7385	45.80	-14.21	31.59	43.50	-11.91	149	100	QP
4	216.7828	44.08	-12.76	31.32	46.00	-14.68	111	100	QP
5	244.2321	40.75	-11.25	29.50	46.00	-16.50	236	100	QP
6	434.0651	38.30	-6.99	31.31	46.00	-14.69	254	100	QP

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics.

5. OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to FCC 15.225 (b), within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


5.2 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test Mode	TM1	Polarity:	/
-----------	-----	-----------	---

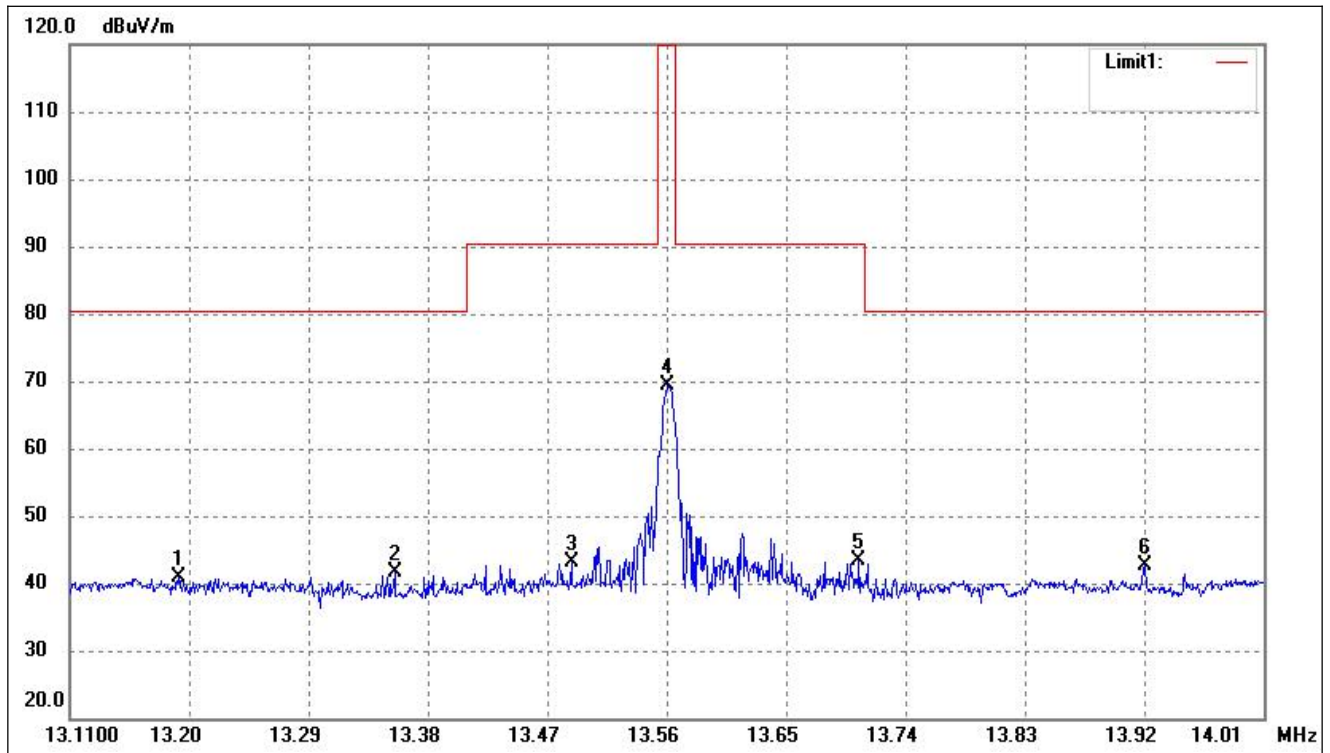

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	13.1919	50.22	-9.23	40.99	80.50	-39.51	195	100	peak
2	13.3547	50.93	-9.19	41.74	80.50	-38.76	100	100	peak
3	13.4879	52.22	-9.16	43.06	90.50	-47.44	96	100	peak
4	13.5609	78.40	-9.13	69.27	124.00	-54.73	197	100	peak
5	13.7049	52.43	-9.10	43.33	90.50	-47.17	192	100	peak
6	13.9199	51.59	-9.04	42.55	80.50	-37.95	228	100	peak

6. Frequency Stability

6.1 Standard Applicable

According to 15.225(e), the frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.

6.3 Summary of Test Results/Plots

Reference Frequency: 13.56MHz, Limit: 100ppm				
Voltage(%)	Power(VDC)	TEMP($^{\circ}$ C)	Freq.Dev(Hz)	Deviation(ppm)
100%	12.0	-30	1105	81
100%		-20	1124	83
100%		-10	1134	84
100%		0	1089	80
100%		+10	1095	81
100%		+20	1125	83
100%		+30	1129	83
100%		+40	1135	84
100%		+50	1154	85
Low	10.2	+20	1138	84
High	13.8	+20	1121	83

7. EMISSION BANDWIDTH

7.1 Applicable Standard

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Set span = 10kHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down of the emission.

7.3 Summary of Test Results/Plots

Tx Frequency	20dB Emission bandwidth(Hz)
13.56MHz	728.426

Please refer to the test plots as below:

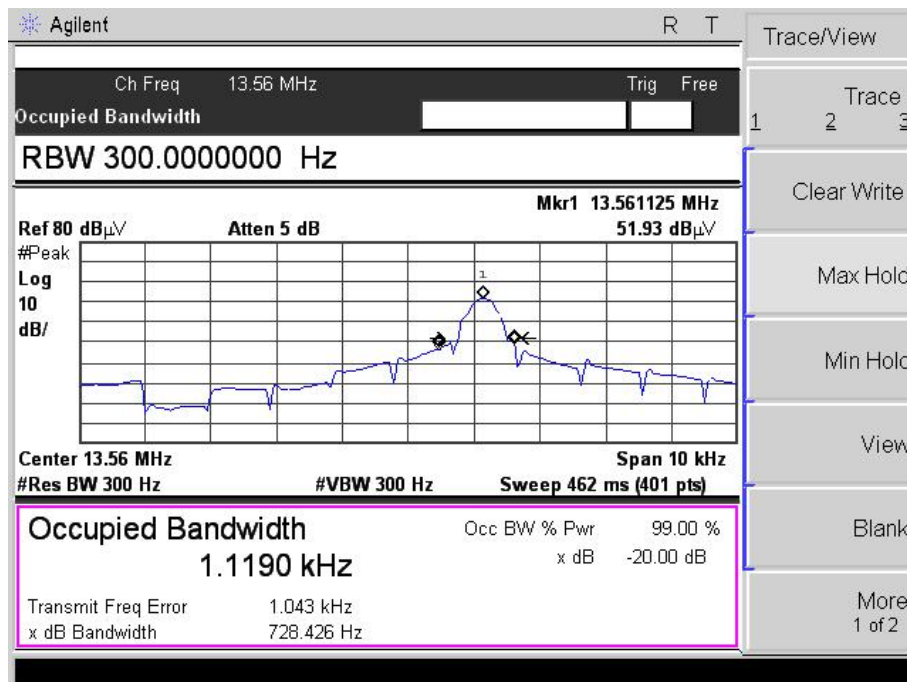


8. Conducted Emissions

8.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

8.2 Basic Test Setup Block Diagram

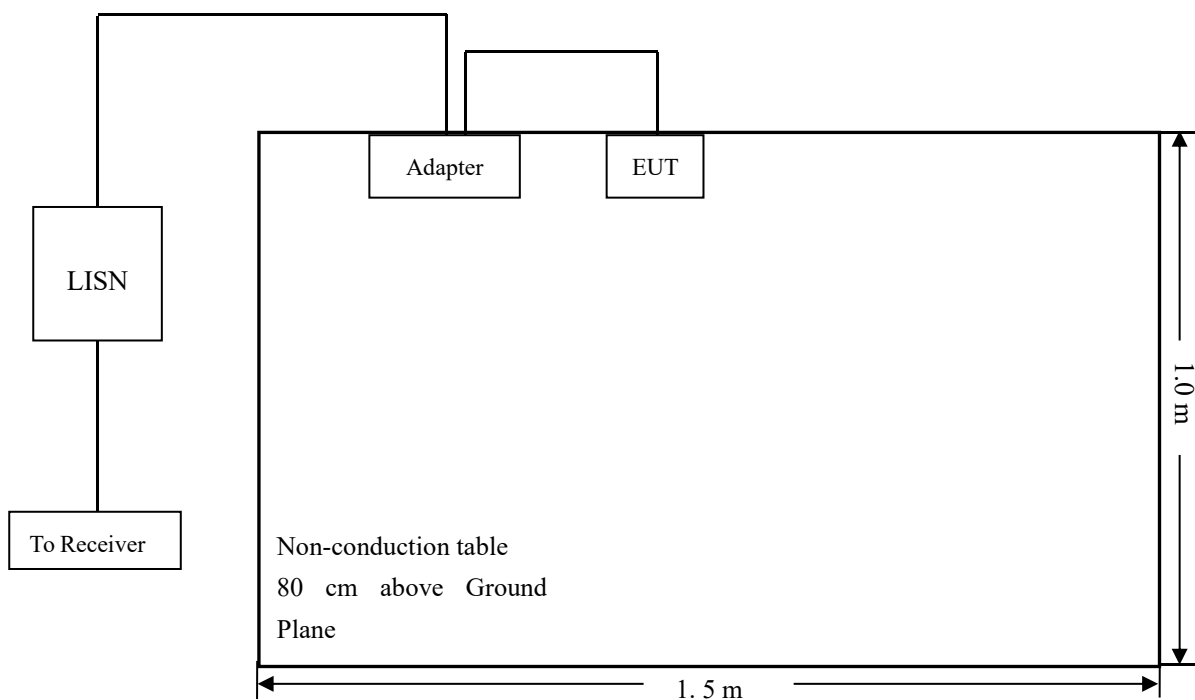


8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


8.4 Summary of Test Results/Plots

Test Mode	TM1(AC120V 60Hz)	Polarity:	Neutral
-----------	------------------	-----------	---------

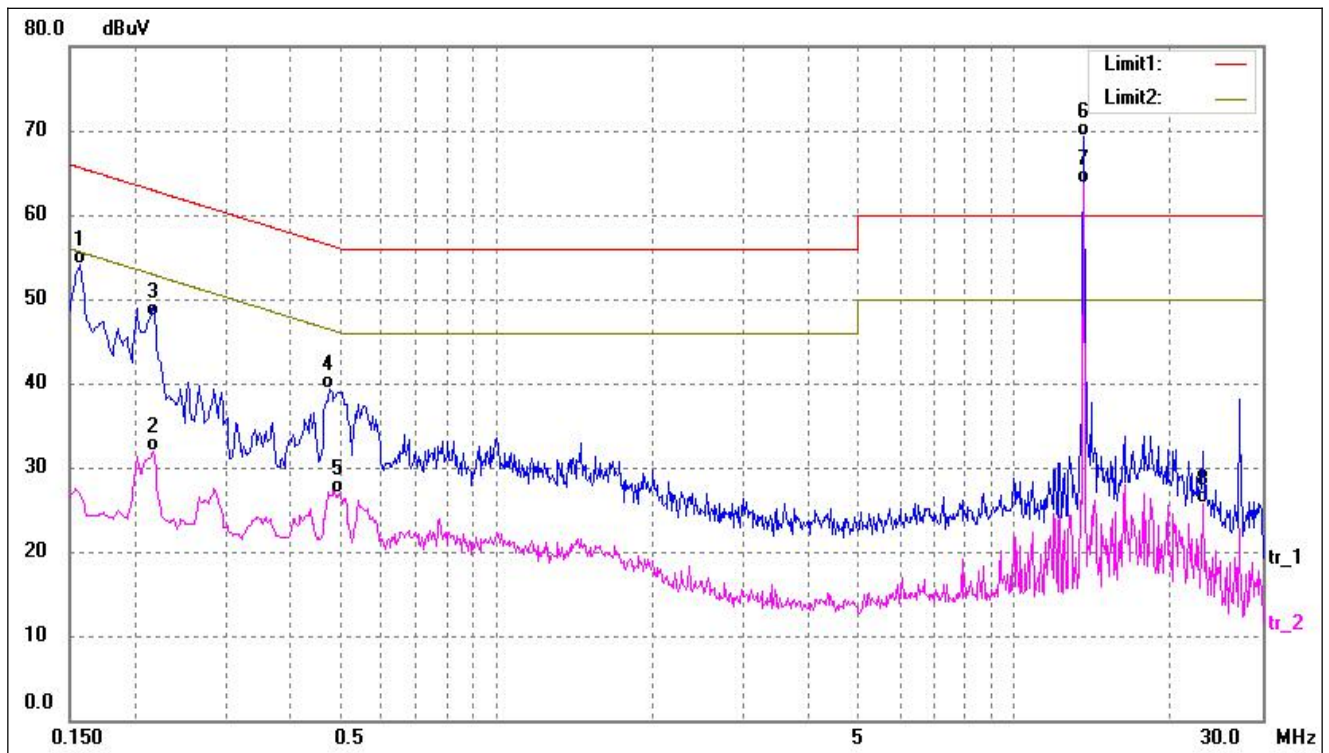

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	44.07	10.10	54.17	65.57	-11.40	QP
2	0.2180	21.82	10.13	31.95	52.89	-20.94	AVG
3	0.2185	37.72	10.13	47.85	62.88	-15.03	QP
4	0.4780	28.96	10.28	39.24	56.37	-17.13	QP
5	0.4980	16.57	10.29	26.86	46.03	-19.17	AVG
6X	13.5620	58.26	11.01	69.27	Fundamental wave		QP
7*	13.5620	52.64	11.01	63.65			AVG
8	23.1300	14.53	11.21	25.74	50.00	-24.26	AVG

Test Mode	TM1(AC120V 60Hz)	Polarity:	Line
-----------	------------------	-----------	------

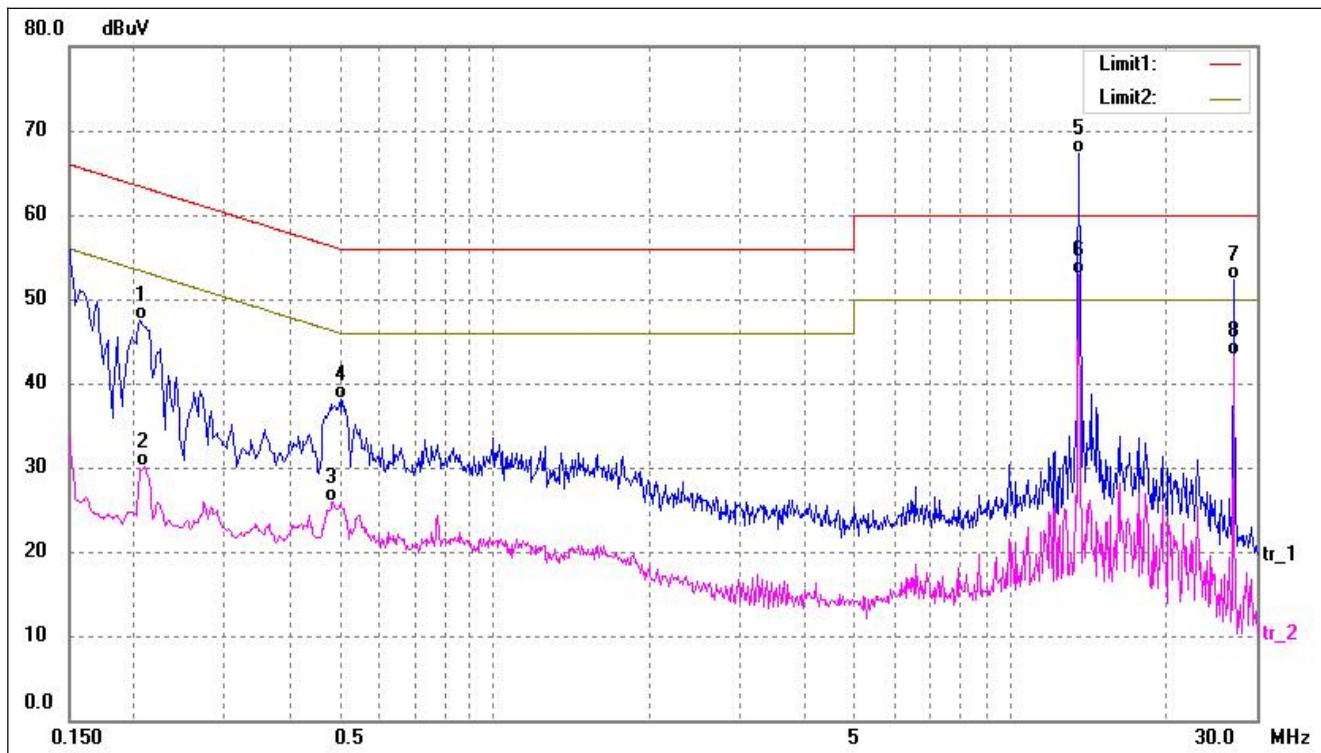

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2060	37.43	10.12	47.55	63.37	-15.82	QP
2	0.2100	19.88	10.13	30.01	53.21	-23.20	AVG
3	0.4860	15.60	10.28	25.88	46.24	-20.36	AVG
4	0.5020	27.79	10.29	38.08	56.00	-17.92	QP
5*	13.5580	56.23	11.01	67.24	Fundamental wave		QP
6X	13.5580	41.97	11.01	52.98			AVG
7	27.1220	41.01	11.24	52.25	60.00	-7.75	QP
8	27.1220	32.12	11.24	43.36	50.00	-6.64	AVG

***** END OF REPORT *****