



EMI - T E S T R E P O R T

- FCC Part 15.225, RSS 210-

Type / Model Name : ULR01

Product Description : RFID Reader

Applicant : Dürr Dental SE

Address : Höfigheimer Str. 17
74321 Bietigheim-Bissingen, GERMANY

Manufacturer : Dürr Dental SE

Address : Höfigheimer Str. 17
74321 Bietigheim-Bissingen, GERMANY

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

Test Report No. :	80115210-02 Rev_0	07. June 2022
		Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

Contents

1 TEST STANDARDS	3
2 EQUIPMENT UNDER TEST	4
2.1 Information provided by the Client	4
2.2 Sampling	4
2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.4 Equipment type	4
2.5 Short description of the equipment under test (EUT)	4
2.6 EUT operation mode	5
2.7 EUT configuration	5
2.8 Power supply system utilised	5
3 TEST RESULT SUMMARY	6
3.1 Revision history of test report	6
3.2 FINAL ASSESSMENT	6
4 TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 Environmental conditions	7
4.3 Statement of the measurement uncertainty	7
4.4 Conformity Decision Rule	8
4.1 Measurement protocol for FCC and ISED	8
5 TEST CONDITIONS AND RESULTS	10
5.1 Conducted emissions	10
5.2 Field strength of the fundamental wave	13
5.3 Spurious emissions	14
5.4 Frequency tolerance	17
5.5 Bandwidth	18
5.6 Transmitter spectrum mask	20
6 USED TEST EQUIPMENT AND ACCESSORIES	22

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September 2021)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September 2021)

Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.225	Operation within the band 13.110 - 14.010 MHz

RSS Rules and Regulations

RSS-Gen Issue 5, March 2018 Amendment 1 (March 2019) Amendment 2 (February 2021)	General Requirements and Information for the Certification of Radiocommunication Equipment
RSS-210 Issue 10, December 2019 Amendment (April 2020)	Low Power Licence – Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
ANSI C63.10: 2013	Testing Unlicensed Wireless Devices

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A



2.4 Equipment type

RFID reader at 13.56 MHz.

2.5 Short description of the equipment under test (EUT)

ULR01 is a RFID reader, which can be connected via USB cable to a computer. It reads RFID tags (e.g. of image plates) and transfers that data to a software on the connected computer.

The Reader uses the NFC controller NXP PN7150 to communicate with RFID-Tags. Tags complying to standard ISO15693 are supported. The modulation on PN7150 side is 100% Amplitude Shift Keying (ASK) pulse position coded. The RFID-Tag uses subcarrier load modulation with manchester bit coding.

Number of tested samples: 1
 Serial number: P464875007

FCC ID: 2ATTE-2162100005**IC ID: 25412-2162100005**

2.6 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- Continuously tag reading at 13.56 MHz (full power).

2.7 EUT configuration

The following peripheral devices and interface cables were connected during the measurements:

- USB Cable Model : 2m - Type A / Type C
- RFID TAG Model : 0+ SN: 00001487
- Laptop Model : HP EliteBook 840 (01-01/01-15-019)

2.8 Power supply system utilised

Power supply voltage is: $V_{nom} = 5.00 \text{ V DC}$ (powered over USB)

The extreme voltage for the EUT is: $V_{min} = 4.75 \text{ V DC}$
 $V_{max} = 5.25 \text{ V DC}$

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

3 TEST RESULT SUMMARY

FCC Rule Part	RSS Rule Part	Description	Result
15.207	RSS Gen, 8.8	AC power line conducted emissions	passed
15.225	RSS-210, B.6	Field strength of fundamental	passed
15.209	RSS Gen, 8.9	Spurious emissions	passed
15.225	RSS-210, B.6	Frequency tolerance	passed
15.215	RSS-Gen, 6.7	Occupied bandwidth	passed
15.225	RSS-210, B.6	Transmitter spectrum mask	passed

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80115210-02	0	05 May 2022	Initial test report

The test report with the highest revision number replaces the previous test reports.

3.2 FINAL ASSESSMENT

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 23 February 2022

Testing concluded on : 05 April 2022

Checked by: Tested by:

Jürgen Pessinger
Deputy Teamleader Radio

Josef Knab
Radio Team

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 ° C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
20 dB Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \cdot 10^{-7}$
99% Occupied Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \cdot 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	± 3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 3.71 dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	± 2.34 dB
Peak conducted output power	902 MHz to 928 MHz	95%	± 0.35 dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	± 2.15 dB

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$). Details can be found in the procedure CSA_B_V50_29.

4.1 Measurement protocol for FCC and ISED

4.1.1 GENERAL INFORMATION

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

**FCC: DE 0011
ISED: DE0009**

4.1.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.1.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.1.3 Details of test procedures

4.1.3.1 Conducted emission

Test setup according ANSI C63.10

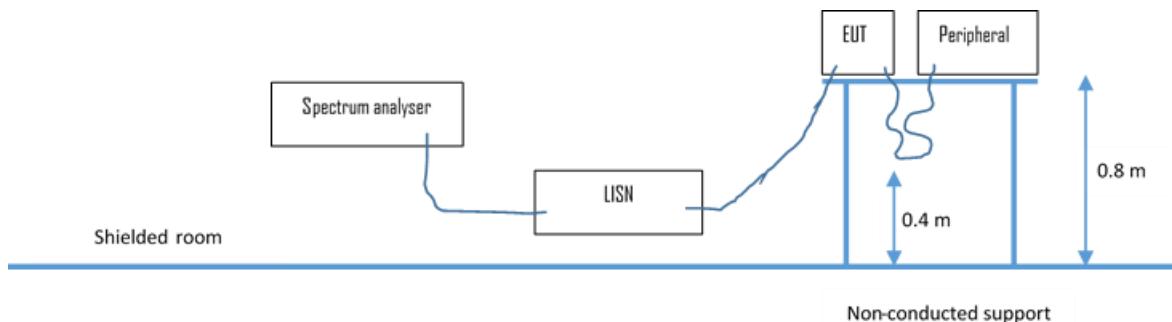

The final level, expressed in $\text{dB}\mu\text{V}$, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between $\text{dB}\mu\text{V}$ and μV , the following conversions apply:

$$\begin{aligned}\text{dB}\mu\text{V} &= 20(\log \mu\text{V}) \\ \mu\text{V} &= \text{Inverse log}(\text{dB}\mu\text{V}/20)\end{aligned}$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with $50 \Omega / 50 \mu\text{H}$ (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.


FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

4.1.3.2 Radiated emission

4.1.3.2.1 OATS1 test site (9 kHz - 30 MHz):


Test setup according ANSI C63.10

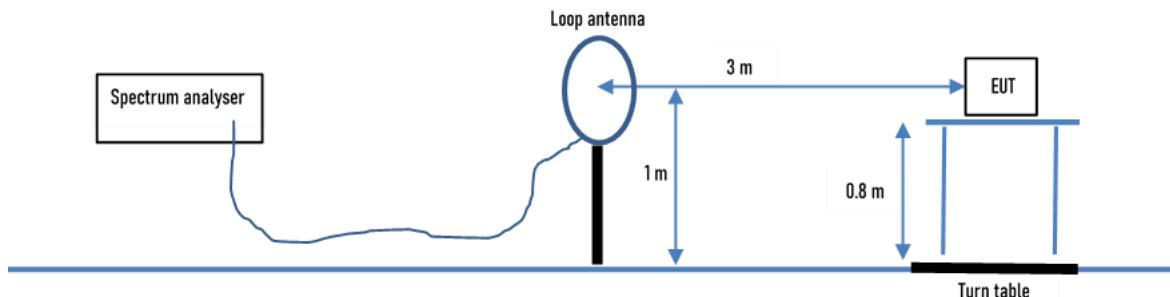

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.1.3.2.2 OATS1 test site (30 MHz - 1 GHz):

Test setup according ANSI C63.10.

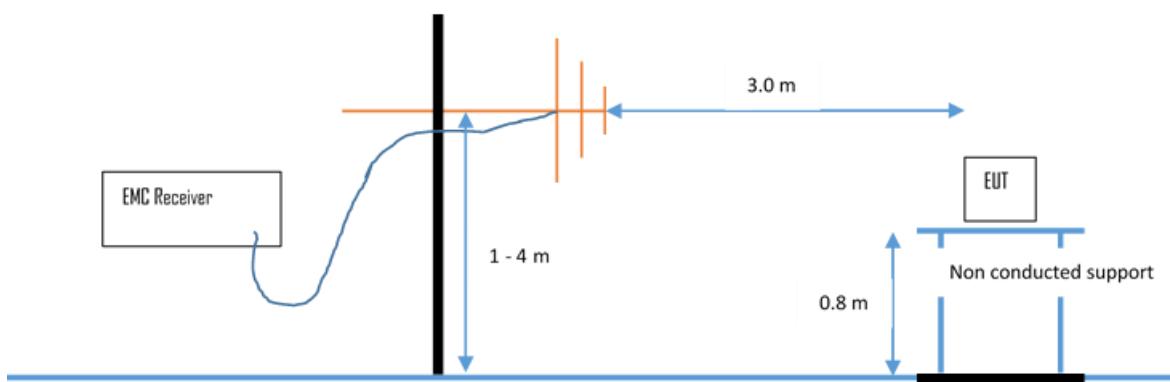

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used, see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S4

5.1.2 Photo documentation of the test set-up

See attachment B to this report

5.1.3 Applicable standard

FCC Part 15, Section 15.207.

5.1.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10.

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin 14.65 dB at 0.4775 MHz

Limit according to FCC Part 15, Section 15.207:

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.


Remarks: For detailed test result please refer to following test protocols


FCC ID: 2ATTE-2162100005


IC ID: 25412-2162100005


5.1.6 Test protocol

Test point: AC line of the laptop
 Operation mode: Continuously tag reading at 13.56 MHz (full power).
 Remarks: None
 Tested by: KJ


 FCC/FCC Part 15C (15.207) B - Avg/
 FCC/FCC Part 15C (15.207) B - Q-Peak/
 Peak (Neutral)
 CISPR.AVG (Neutral)
 QuasiPeak (Finals) (Neutral)
 CISPR AV (Finals) (Neutral)

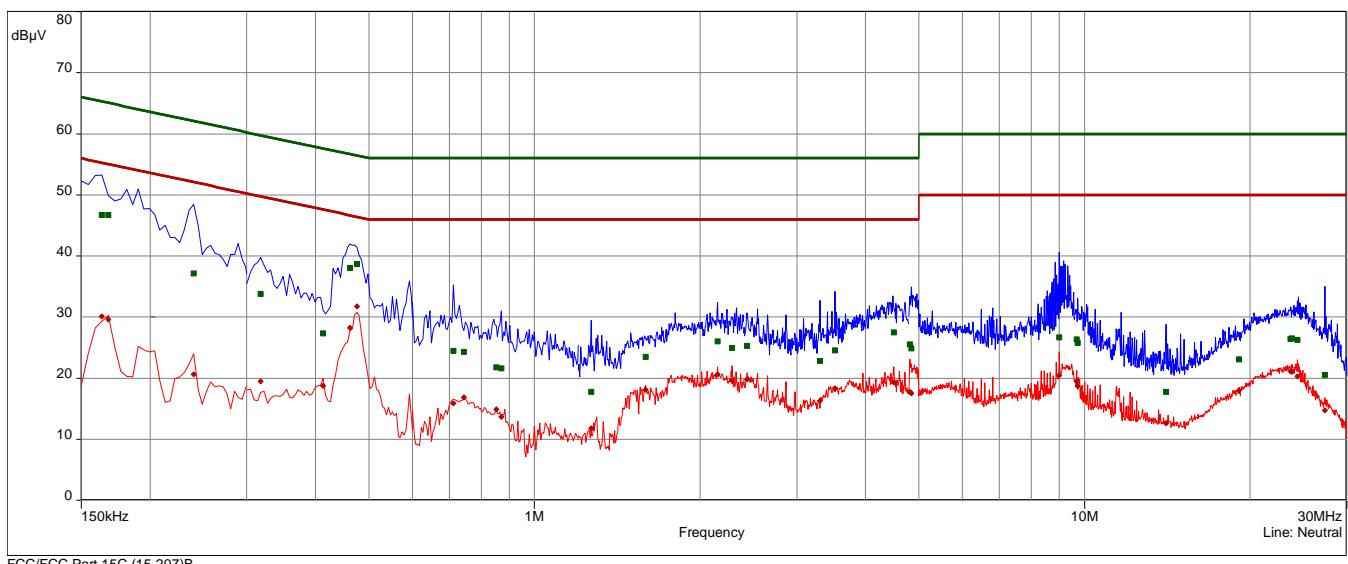


 FCC/FCC Part 15C (15.207) B - Avg/
 FCC/FCC Part 15C (15.207) B - Q-Peak/
 Peak (Phase 1)
 CISPR.AVG (Phase 1)
 QuasiPeak (Finals) (Phase 1)
 CISPR AV (Finals) (Phase 1)

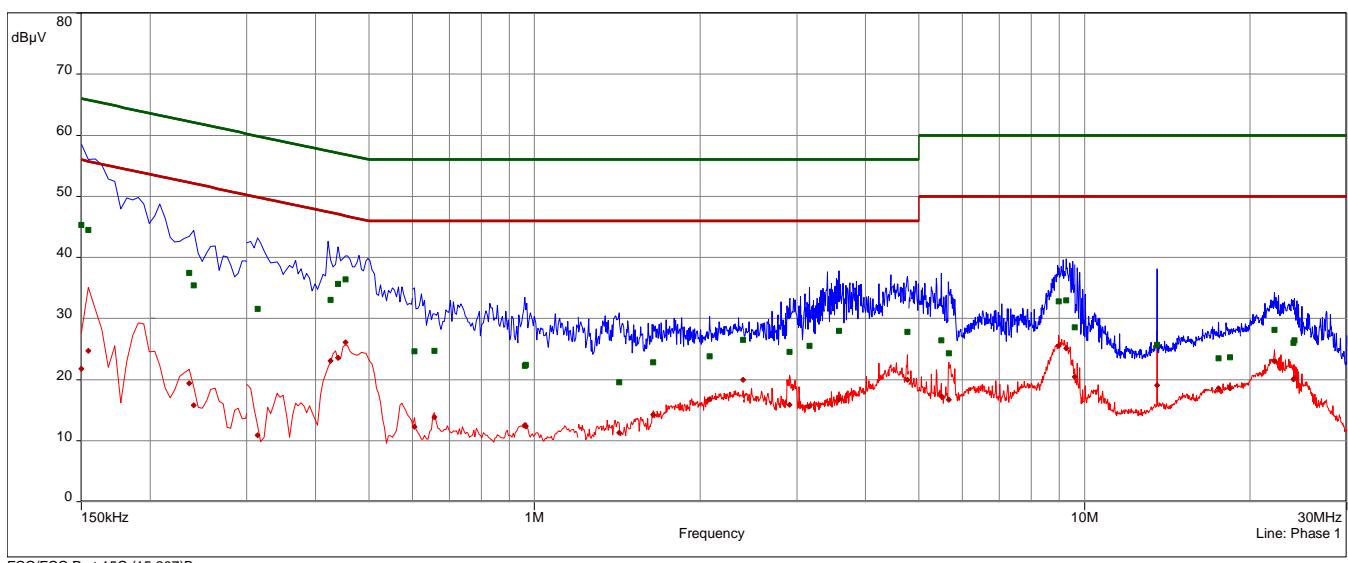

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

freq	SR	QP	margin	limit	AV	margin	limit	line	RBW	Measure time	corr
MHz			dB	dB μ V	dB μ V	dB	dB μ V		Hz	sec	dB
0.15	1	45.31	-20.69	66.00	21.76	-34.24	56.00	Phase 1	9k	1.00	10.12
0.1545	1	44.54	-21.21	65.75	24.68	-31.07	55.75	Phase 1	9k	1.00	10.12
0.2355	1	37.46	-24.79	62.25	19.38	-32.88	52.25	Phase 1	9k	1.00	10.15
0.24	1	35.41	-26.68	62.10	15.76	-36.34	52.10	Phase 1	9k	1.00	10.15
0.3135	2	31.54	-28.33	59.88	10.87	-39.01	49.88	Phase 1	9k	1.00	10.17
0.426	2	33.06	-24.27	57.33	23.10	-24.23	47.33	Phase 1	9k	1.00	10.19
0.4395	2	35.64	-21.43	57.07	23.58	-23.50	47.07	Phase 1	9k	1.00	10.19
0.453	2	36.43	-20.39	56.82	26.07	-20.75	46.82	Phase 1	9k	1.00	10.19
0.6045	3	24.60	-31.40	56.00	12.29	-33.71	46.00	Phase 1	9k	1.00	10.21
0.6585	3	24.69	-31.31	56.00	13.83	-32.17	46.00	Phase 1	9k	1.00	10.22
0.96	3	22.27	-33.73	56.00	12.49	-33.51	46.00	Phase 1	9k	1.00	10.24
0.9645	3	22.42	-33.58	56.00	12.38	-33.62	46.00	Phase 1	9k	1.00	10.24
1.425	4	19.53	-36.47	56.00	11.26	-34.74	46.00	Phase 1	9k	1.00	10.30
1.6455	4	22.82	-33.18	56.00	14.22	-31.78	46.00	Phase 1	9k	1.00	10.32
2.082	4	23.83	-32.17	56.00	16.79	-29.21	46.00	Phase 1	9k	1.00	10.33
2.397	4	26.52	-29.48	56.00	19.99	-26.01	46.00	Phase 1	9k	1.00	10.37
2.9085	5	24.56	-31.44	56.00	15.90	-30.10	46.00	Phase 1	9k	1.00	10.40
3.1605	5	25.55	-30.45	56.00	15.64	-30.36	46.00	Phase 1	9k	1.00	10.42
3.5745	5	27.97	-28.03	56.00	16.75	-29.25	46.00	Phase 1	9k	1.00	10.42
4.7625	5	27.78	-28.22	56.00	19.99	-26.01	46.00	Phase 1	9k	1.00	10.51
5.4975	6	26.42	-33.58	60.00	17.23	-32.77	50.00	Phase 1	9k	1.00	10.57
5.664	6	24.34	-35.66	60.00	16.73	-33.27	50.00	Phase 1	9k	1.00	10.58
8.976	6	32.83	-27.17	60.00	25.51	-24.49	50.00	Phase 1	9k	1.00	10.80
9.264	6	32.97	-27.03	60.00	25.13	-24.87	50.00	Phase 1	9k	1.00	10.81
9.6	7	28.52	-31.48	60.00	20.45	-29.55	50.00	Phase 1	9k	1.00	10.82
13.5555	7	25.69	-34.31	60.00	19.07	-30.93	50.00	Phase 1	9k	1.00	11.18
17.52	7	23.51	-36.49	60.00	18.56	-31.44	50.00	Phase 1	9k	1.00	11.48
18.4065	7	23.65	-36.35	60.00	18.60	-31.40	50.00	Phase 1	9k	1.00	11.53
22.1385	8	28.14	-31.86	60.00	22.99	-27.01	50.00	Phase 1	9k	1.00	11.71
24.006	8	26.03	-33.97	60.00	20.09	-29.91	50.00	Phase 1	9k	1.00	11.79
24.069	8	26.41	-33.59	60.00	20.21	-29.79	50.00	Phase 1	9k	1.00	11.79
0.1635	9	46.73	-18.55	65.28	30.15	-25.14	55.28	Neutral	9k	1.00	10.13
0.168	9	46.70	-18.36	65.06	29.59	-25.47	55.06	Neutral	9k	1.00	10.14
0.24	9	37.17	-24.93	62.10	20.64	-31.45	52.10	Neutral	9k	1.00	10.16
0.318	10	33.82	-25.94	59.76	19.47	-30.28	49.76	Neutral	9k	1.00	10.17
0.4125	10	27.36	-30.24	57.60	18.70	-28.90	47.60	Neutral	9k	1.00	10.19
0.462	10	38.03	-18.62	56.66	28.23	-18.43	46.66	Neutral	9k	1.00	10.19
0.4755	10	38.71	-17.70	56.42	31.77	-14.65	46.42	Neutral	9k	1.00	10.19
0.7125	11	24.45	-31.55	56.00	15.84	-30.16	46.00	Neutral	9k	1.00	10.23
0.744	11	24.26	-31.74	56.00	16.82	-29.18	46.00	Neutral	9k	1.00	10.23
0.852	11	21.76	-34.24	56.00	14.91	-31.09	46.00	Neutral	9k	1.00	10.23
0.87	11	21.61	-34.39	56.00	13.68	-32.32	46.00	Neutral	9k	1.00	10.23
1.2675	12	17.80	-38.20	56.00	11.81	-34.19	46.00	Neutral	9k	1.00	10.28
1.5915	12	23.46	-32.54	56.00	18.11	-27.89	46.00	Neutral	9k	1.00	10.32
2.154	12	26.01	-29.99	56.00	20.64	-25.36	46.00	Neutral	9k	1.00	10.34
2.289	12	24.96	-31.04	56.00	19.52	-26.48	46.00	Neutral	9k	1.00	10.35
2.436	13	25.28	-30.72	56.00	19.78	-26.22	46.00	Neutral	9k	1.00	10.37
3.3045	13	22.82	-33.18	56.00	16.26	-29.74	46.00	Neutral	9k	1.00	10.41
3.5205	13	24.54	-31.46	56.00	18.32	-27.68	46.00	Neutral	9k	1.00	10.42
4.506	13	27.45	-28.55	56.00	19.33	-26.67	46.00	Neutral	9k	1.00	10.49
4.8135	14	25.56	-30.44	56.00	17.79	-28.21	46.00	Neutral	9k	1.00	10.51
4.8495	14	24.91	-31.09	56.00	17.49	-28.51	46.00	Neutral	9k	1.00	10.51
9.003	14	26.70	-33.30	60.00	20.46	-29.54	50.00	Neutral	9k	1.00	10.74
9.6855	15	26.32	-33.68	60.00	19.51	-30.49	50.00	Neutral	9k	1.00	10.76
9.7305	15	25.81	-34.19	60.00	18.72	-31.28	50.00	Neutral	9k	1.00	10.76
14.082	15	17.75	-42.25	60.00	12.62	-37.38	50.00	Neutral	9k	1.00	11.06
19.1175	15	23.11	-36.89	60.00	17.99	-32.01	50.00	Neutral	9k	1.00	11.36
23.6685	16	26.41	-33.59	60.00	21.10	-28.90	50.00	Neutral	9k	1.00	11.41
23.8215	16	26.48	-33.52	60.00	21.04	-28.96	50.00	Neutral	9k	1.00	11.41
24.3705	16	26.28	-33.72	60.00	20.28	-29.72	50.00	Neutral	9k	1.00	11.41
27.3405	16	20.57	-39.43	60.00	14.73	-35.27	50.00	Neutral	9k	1.00	11.34

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

5.2 Field strength of the fundamental wave

For test instruments and accessories used see section 6 Part **CPR 1**.

5.2.1 Description of the test location

Test location: OATS 1
 Test distance: 3 metres

5.2.2 Photo documentation of the test set-up

See attachment B to this report

5.2.3 Applicable standard

FCC Part 15, Section 15.225(a).

5.2.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10.

5.2.5 Test result

a) Result at a measurement distance of 3m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)
13.56	29.3	20.5	49.8

b) Result extrapolated to a distance of 30 m

Frequency (MHz)	Field strength dB(μ V/m) @3m	Extrapolation factor (dB)	Field strength dB(μ V/m) @30m	Limit dB(μ V/m)	Delta (dB)
13.56	49.8	-40	9.8	84.0	-74.2

Limit according to FCC Part 15, Section 15.225(a):

Frequency (MHz)	Field strength of fundamental wave		Measurement distance (metres)
	(μ V/m)	dB(μ V/m)	
13.553 - 13.567	15848	84.0	30

The requirements are **FULFILLED**.

Remarks:

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

5.3 Spurious emissions

For test instruments and accessories used see section 6 Part **SER 1, SER 2**.

5.3.1 Description of the test location

Test location: OATS 1
 Test distance: 3 metres

5.3.2 Photo documentation of the test set-up

See attachment B to this report

5.3.3 Applicable standard

FCC Part 15, Section 15.209.

5.3.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz
 150 kHz – 30 MHz: RBW: 9 kHz
 30 MHz – 1000 MHz: RBW: 120 kHz

Detector: QP (In frequency range 9-90 kHz and 110-490 kHz a linear average detector is used for iSED)

5.3.5 Test result < 30MHz

FCC

<i>f</i> (MHz)	Level QP@3m (dB μ V)	Ant. Factor (dB/m)	Field strength QP@3m dB(μ V/m)	Distance corr. 3m to 30m (dB)	Corrected level QP@30m dB(μ V/m)	Limit QP@30m dB(μ V/m)	Delta (dB)
0.50	24.0	20.5	44.5	-40	4.5	33.6	-29.1
5.00	25.3	20.5	45.8	-40	5.8	29.5	-23.7
15.0	27.8	20.5	48.3	-40	8.3	29.5	-21.2

ISED

<i>f</i> (MHz)	Level QP@3m (dB μ A)	Ant. factor (dB/m)	Field strength QP@3m dB(μ A/m)	Distance corr. 3m to 30m (dB)	Corrected level QP@30m dB(μ A/m)	Limit QP@30m dB(μ A/m)	Delta (dB)
0.50	-27.5	20.5	-7.0	-40	-47.0	-17.9	-29.1
5.00	-26.2	20.5	-5.7	-40	-45.7	-21.9	-23.8
15.0	-23.7	20.5	-3.2	-40	-43.2	-21.9	-21.3

Note: No unwanted emissions from the EuT could be measured in the relevant frequency ranges.
 Only ambient nosies could be detected!

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005
5.3.6 Test result 30 MHz < f < 1 GHz

Frequency (MHz)	Reading Vert. (dB μ V)	Reading Hor. (dB μ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB μ V/m)	Level Hor. (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
40.69	11.3		16.9		28.2		40.0	-11.8
54.24	0.2		17.3		17.5		40.0	-22.5
67.79	4.5		16.1		20.6		40.0	-19.4
81.35	2.8		14.1		16.9		40.0	-23.1
94.91	23.2	26.6	14.2	13.2	37.4	39.8	43.5	-3.7
108.47	2.4		16.1		18.5		43.5	-25.0
122.04	1.5		17.6		19.1		43.5	-24.4
135.61	0.5		18.9		19.4		43.5	-24.1
149.16	4.3		19.5		23.8		43.5	-19.7
162.73	7.2		19.6		26.8		43.5	-16.7
176.29	9.9		18.6		28.5		43.5	-15.0
189.85	-2.1		17.7		15.6		43.5	-27.9
216.97	12.3	16.0	17.6	17.1	29.9	33.1	46.0	-12.9
230.52	0.5	4.2	18.0	17.8	18.5	22.0	46.0	-24.0
244.08	-0.2	1.4	18.5	18.4	18.3	19.8	46.0	-26.2
257.64	-0.5	5.6	18.9	19.0	18.4	24.6	46.0	-21.4
271.20	-3.5		19.3		15.8		46.0	-30.2
284.77	-3.7		19.7		16.0		46.0	-30.0
311.89	-4.1		20.5		16.4		46.0	-29.6
433.93	-3.0		24.0		21.0		46.0	-25.0
461.05	-4.0		24.7		20.7		46.0	-25.3
488.17	0.0	-0.5	25.4	25.7	25.4	25.2	46.0	-20.6
515.29	4.5		26.1		30.6		46.0	-15.4
542.42	2.2		26.7		28.9		46.0	-17.1
610.23	-3.4		28.2		24.8		46.0	-21.2
637.35	-7.6		28.6		21.0		46.0	-25.0

Note: The correction factor includes cable loss and antenna factor.

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	(μ V/m)	dB(μ V/m)	
0.009 - 0.490	2400/F(kHz)	--	300
0.490 - 1.705	24000/F (kHz)	--	30
1.705 - 30.0	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

Limit according to RSS-Gen clause 8.9

Frequency (MHz)	Field strength of spurious emissions (μ A/m)	dB(μ A/m)	Measurement distance (metres)
0.009 - 0.490	6.37/F(kHz)	--	300 (Note 1)
0.490 - 1.705	63.7/F (kHz)	--	30
1.705 - 30.0	0.08	-22	30
Frequency (MHz)	Field strength of spurious emissions (μ V/m)	dB(μ V/m)	Measurement distance (metres)
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

 The requirements are **FULFILLED**.

Remarks: Measurement has been performed up to 1000 MHz.

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

5.4 Frequency tolerance

For test instruments and accessories used see section 6 Part **FE**.

5.4.1 Description of the test location

Test location: AREA4

5.4.2 Photo documentation of the test set-up

See attachment B to this report

5.4.3 Applicable standard

According to FCC Part 15, Section 15.225(e).

5.4.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10.

5.4.5 Test result

Test conditions		Test result	Tolerance	Limit
		Frequency (MHz)	(kHz)	(kHz)
T_{min} (-20)°C	V_{nom} (5.0 V)	13.5606389	0.6389	\pm 1.356
T (-10)°C	V_{nom} (5.0 V)	13.5606439	0.6439	\pm 1.356
T (0)°C	V_{nom} (5.0 V)	13.5606299	0.6299	\pm 1.356
T (10)°C	V_{nom} (5.0 V)	13.5605909	0.5909	\pm 1.356
T_{nom} (20)°C	V_{min} (4.75 V)	13.5605659	0.5659	\pm 1.356
	V_{nom} (5.0 V)	13.5605719	0.5719	\pm 1.356
	V_{max} (5.25 V)	13.5605719	0.5719	\pm 1.356
T (30)°C	V_{nom} (5.0 V)	13.5605489	0.5489	\pm 1.356
T (40)°C	V_{nom} (5.0 V)	13.5605419	0.5419	\pm 1.356
T_{max} (50)°C	V_{nom} (5.0 V)	13.5605419	0.5419	\pm 1.356

Limit Calculation:

Carrier frequency: $f_c = 13.56 \text{ MHz}$

Max. tolerance: $\pm 0.01\% \text{ of } 13.56 \text{ MHz} = \pm 1.356 \text{ kHz}$

Limit according to FCC Part 15, Section 15.225(e) and RSS-210 clause B.6(b):

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

The requirements are **FULFILLED**.

Remarks:

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

5.5 Bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.5.1 Description of the test location

Test location: Shielded Room S6

5.5.2 Photo documentation of the test set-up

See attachment B to this report

5.5.3 Applicable standard

According to FCC Part 15, Section 15.215(c).

5.5.4 Test result

Measured Bandwidth	result (kHz)	Limit (kHz)
20dB	2.72	--
99%	2.49	--

Limit according to FCC Part 15C, Section 15.215(c):

Frequency band (MHz)	Limit 20 dB bandwidth (kHz)
13.553 - 13.567	14.0

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

5.5.5 Test protocol

20 dB bandwidth



99% Bandwidth



FCC ID: 2ATTE-2162100005**IC ID: 25412-2162100005**

5.6 Transmitter spectrum mask

For test instruments and accessories used see section 6 Part **MB**.

5.6.1 Description of the test location

Test location: **NONE**

5.6.2 Photo documentation of the test set-up

See attachment B to this report

5.6.3 Applicable standard

According to FCC Part 15, Section 15.225 (a-d).

5.6.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10.

5.6.5 Test result

Limits according to FCC Part 15, Section 15.225(a-d)

Frequency band (MHz)	Emission level limit at 30 m (µV/m)	Emission level limit at 30 m (dBµV/m)
13.110 – 13.410	106	40.5
13.410 - 13.553	334	50.5
13.553 - 13.567	15.848	84.0
13.567 – 13.710	334	50.5
13.710 – 14.010	106	40.5
outside of 13.110 – 14.010	30	29.5

Limits according to RSS-210 clause B.6 (i-iv)

Frequency band (MHz)	Emission level limit at 30 m (µV/m)	Emission level limit at 30 m (dBµV/m)
13.110 – 13.410	106	40.5
13.410 - 13.553	334	50.5
13.553 - 13.567	15.848	84.0
13.567 – 13.710	334	50.5
13.710 – 14.010	106	40.5
Frequency band (MHz)	Emission level limit at 30 m (µA/m)	Emission level limit at 30 m (dBµA/m)
outside of 13.110 – 14.010	0.08	-22


The requirements are **FULFILLED**.

Remarks:

FCC ID: 2ATTE-2162100005

IC ID: 25412-2162100005

5.6.6 Test protocol

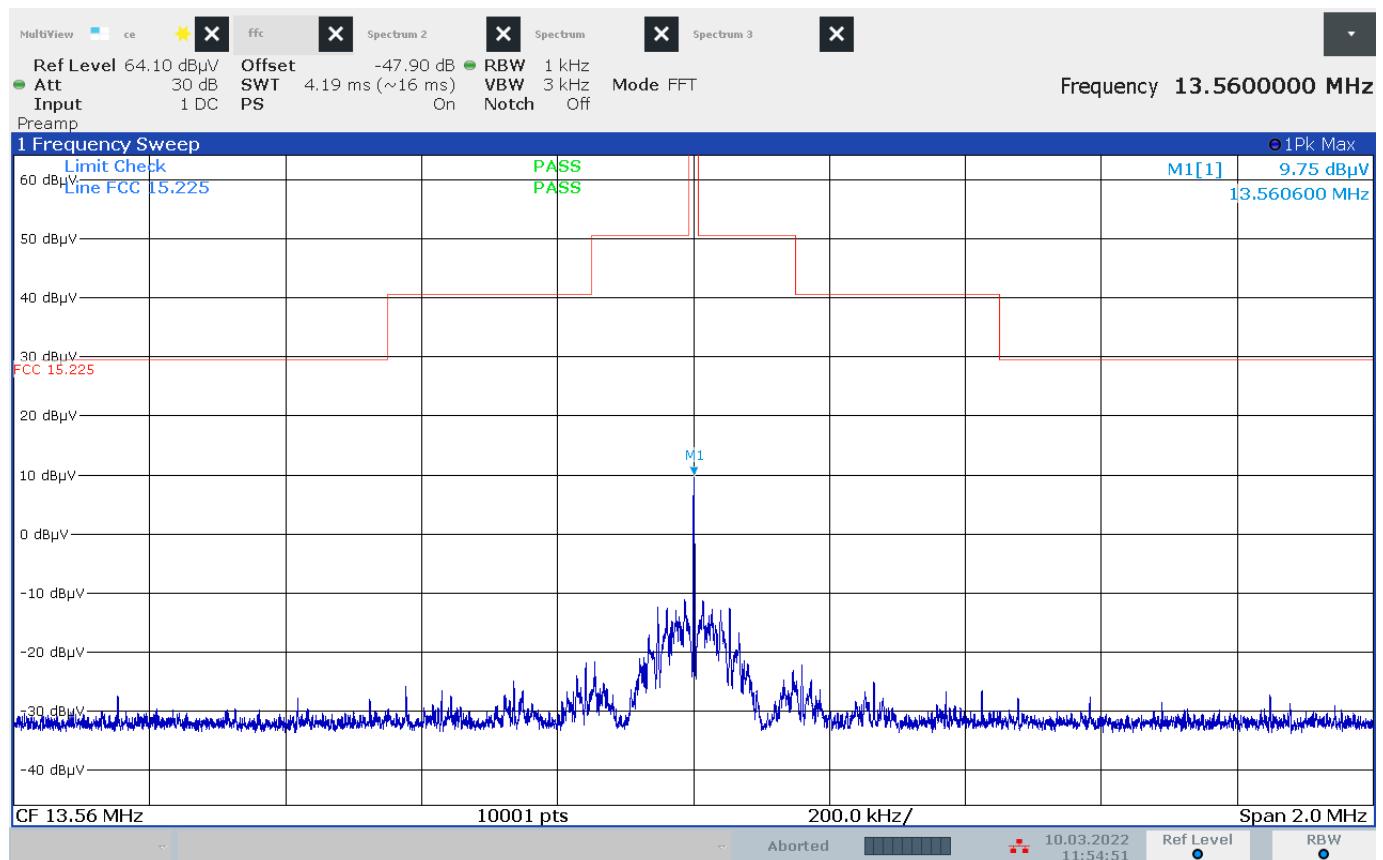

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ATTE-2162100005 IC ID: 25412-2162100005

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 3.21.0.24	01-02/68-13-001				
	ESCI	02-02/03-15-001	21/06/2022	21/06/2021		
	ESH 2 - Z 5	02-02/20-05-004	31/10/2022	31/10/2019	22/09/2022	22/03/2022
	N-4000-BNC	02-02/50-05-138				
	ESH 3 - Z 2	02-02/50-05-155	13/11/2022	13/11/2019	08/09/2022	08/03/2022
CPR 1	ESR 7	02-02/03-17-001	29/07/2022	29/07/2021		
	HFH 2 - Z 2	02-02/24-15-001	31/03/2023	31/03/2022		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
FE	ESW26	02-02/03-17-002	10/02/2023	10/02/2022		
	HZ-10	02-02/24-05-012	15/12/2022	15/12/2021		
	METRAHIT WORLD	02-02/32-15-001	26/11/2022	26/11/2021		
	WK-340/40	02-02/45-05-001	05/08/2022	05/08/2021		
	6543A	02-02/50-05-157				
MB	ESW26	02-02/03-17-002	10/02/2023	10/02/2022		
	HZ-10	02-02/24-05-012	15/12/2022	15/12/2021		
SER 1	ESR 7	02-02/03-17-001	29/07/2022	29/07/2021		
	HFH 2 - Z 2	02-02/24-15-001	31/03/2023	31/03/2022		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 2	ESR 7	02-02/03-17-001	29/07/2022	29/07/2021		
	VULB 9168	02-02/24-05-005	20/12/2022	20/12/2021	07/07/2022	07/07/2021
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
	50F-003 N 3 dB	02-02/50-21-010				