



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

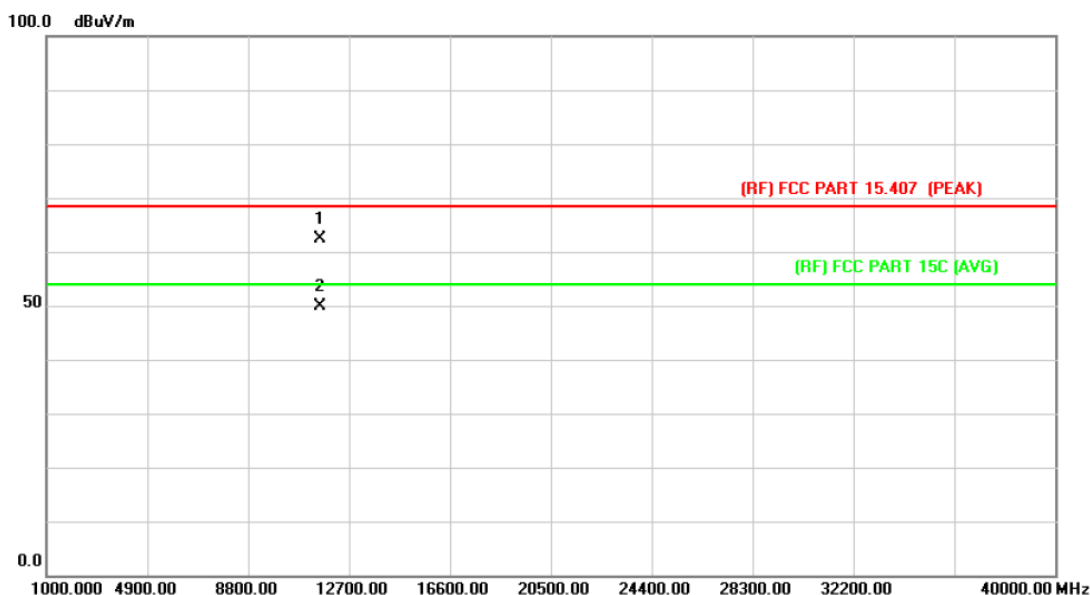

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11589.876	45.51	16.85	62.36	68.30	-5.94	peak
2	*	11591.145	33.03	16.85	49.88	54.00	-4.12	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

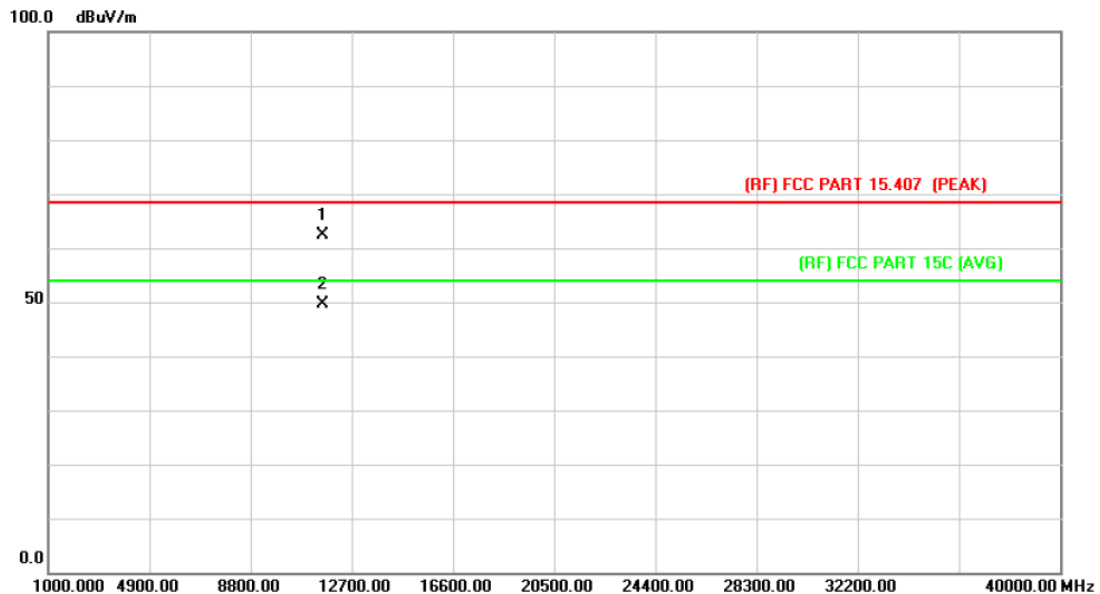

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11587.869	45.53	16.85	62.38	68.30	-5.92	peak
2	*	11591.225	32.76	16.85	49.61	54.00	-4.39	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

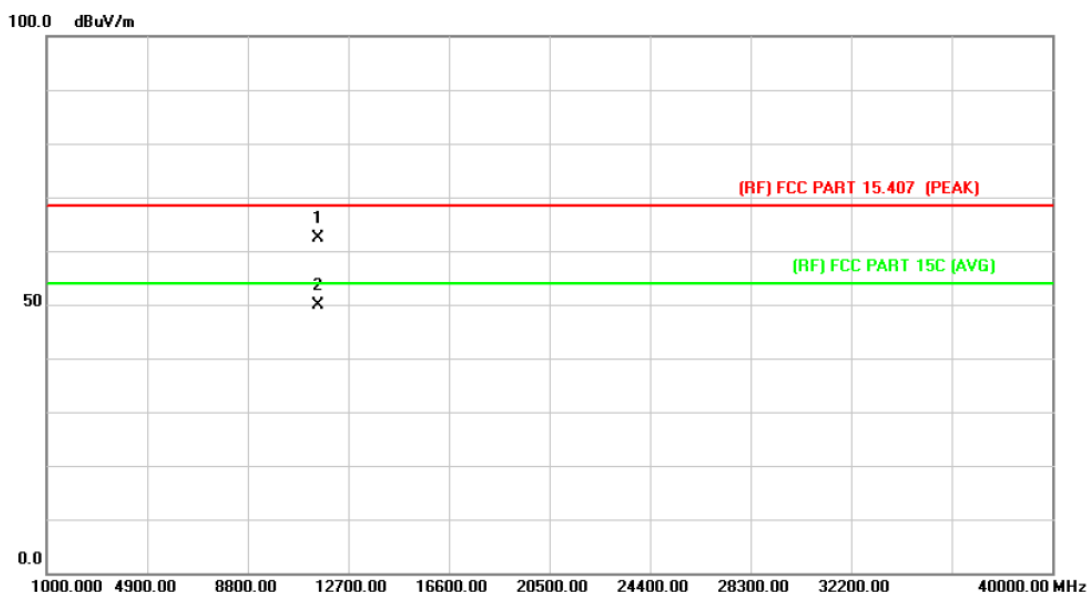

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	11549.825	45.73	16.75	62.48	68.30	-5.82	peak
2 *	11552.125	33.12	16.75	49.87	54.00	-4.13	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

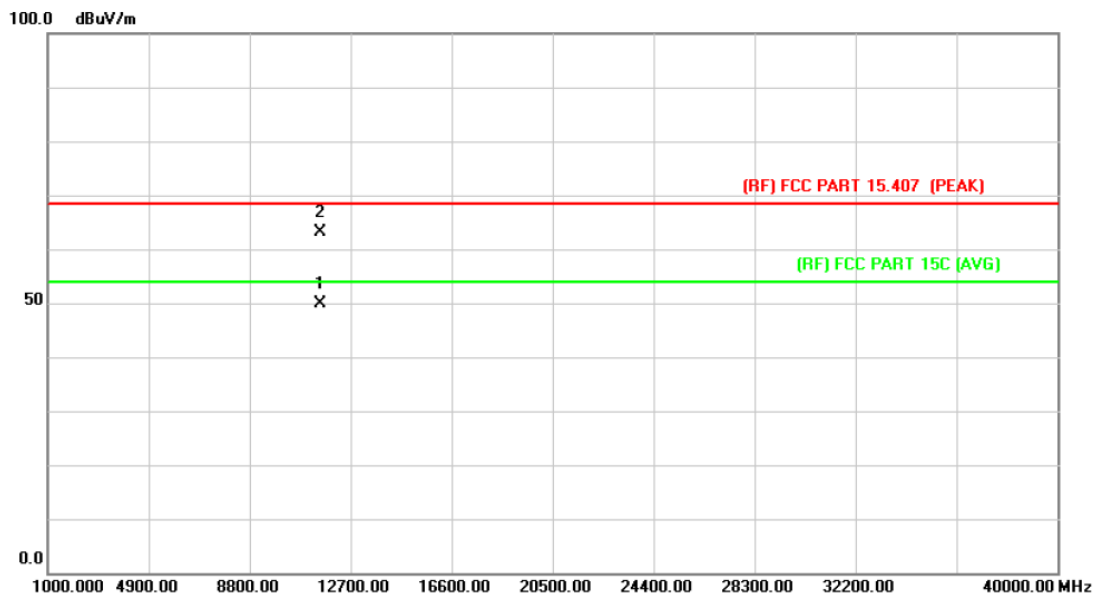



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11545.325	33.09	16.75	49.84	54.00	-4.16	AVG
2		11553.250	46.26	16.76	63.02	68.30	-5.28	peak


Emission Level= Read Level+ Correct Factor

Attachment C-- Band Edge Emissions Test Data


(1) Radiation Test a/n(20)/ac(20)

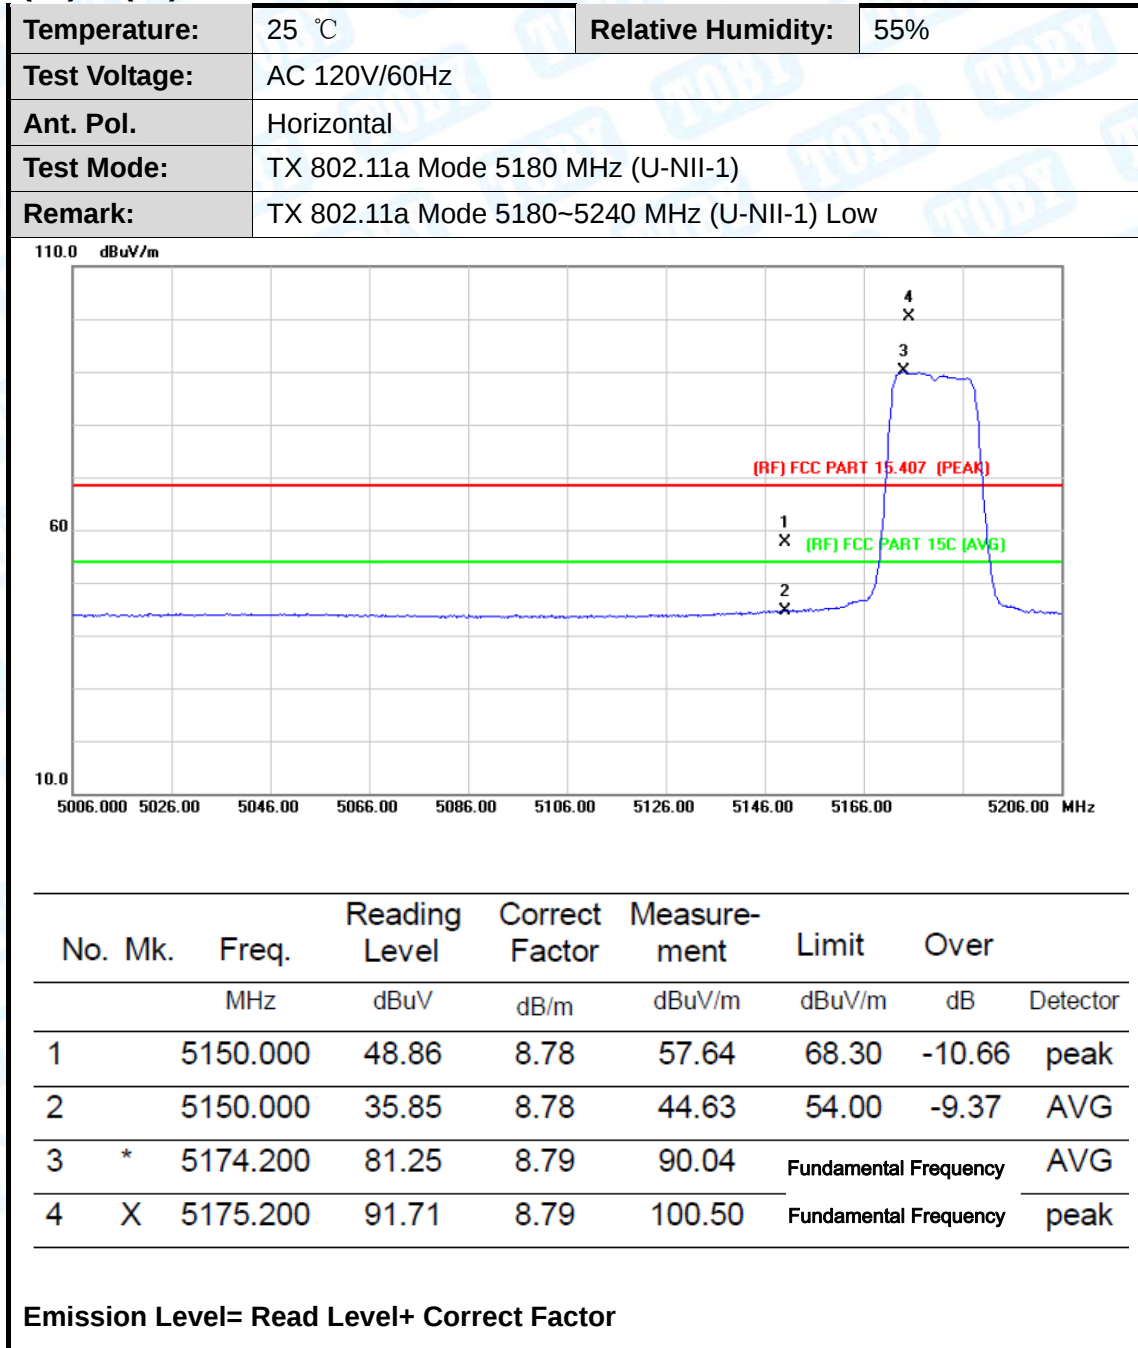

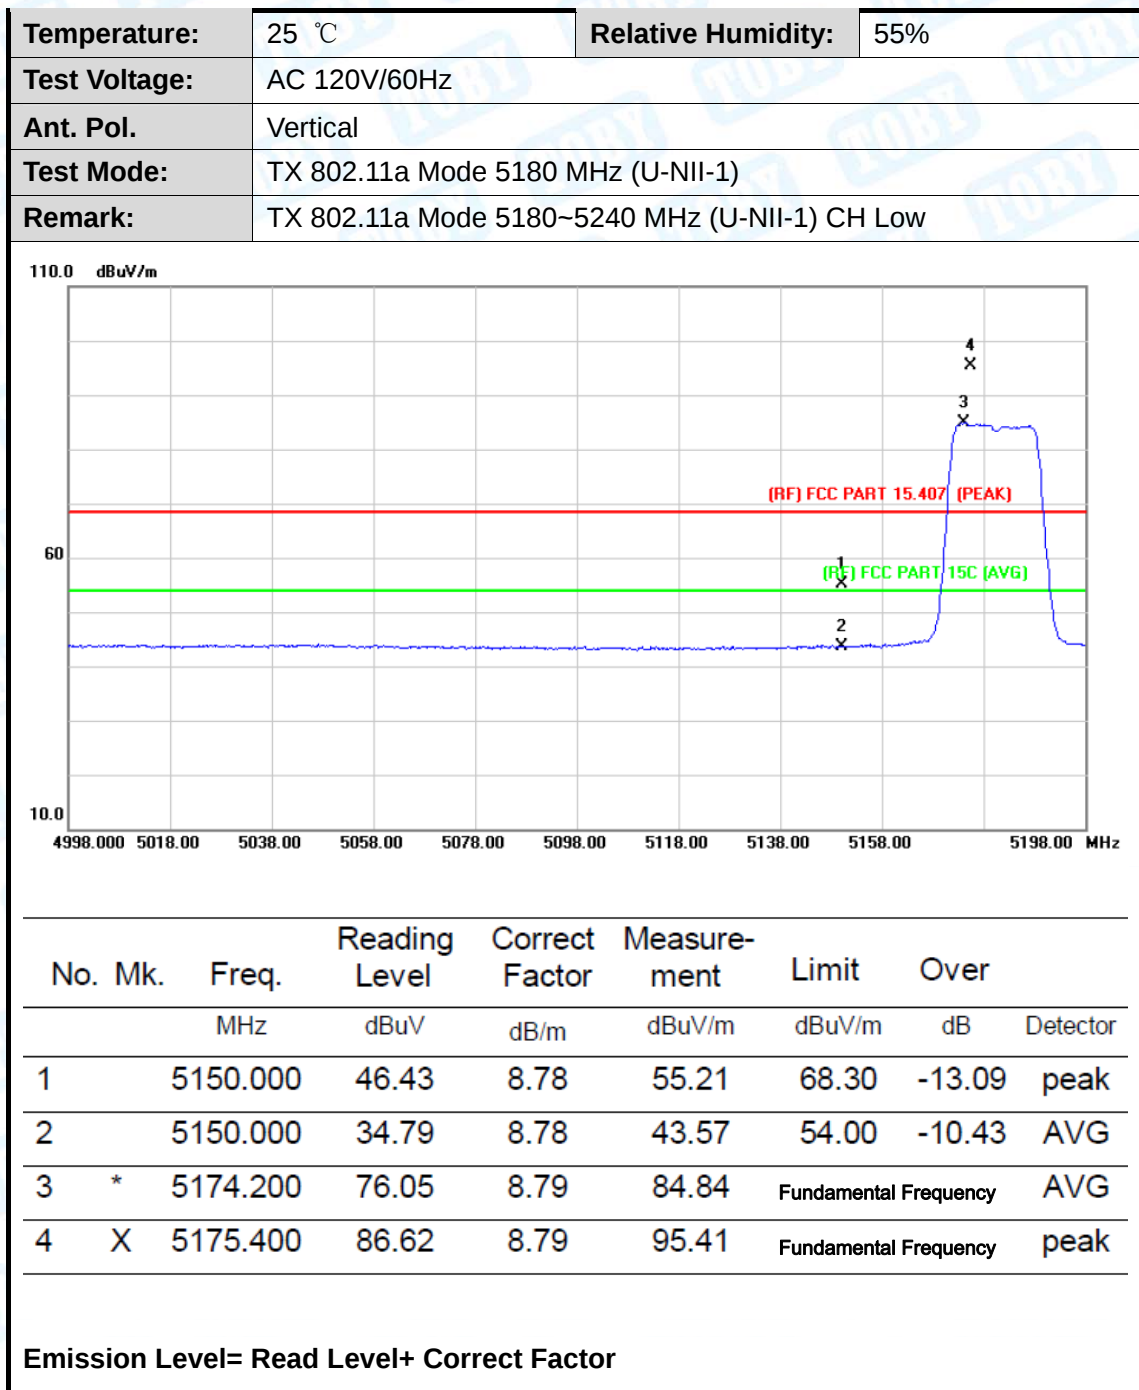

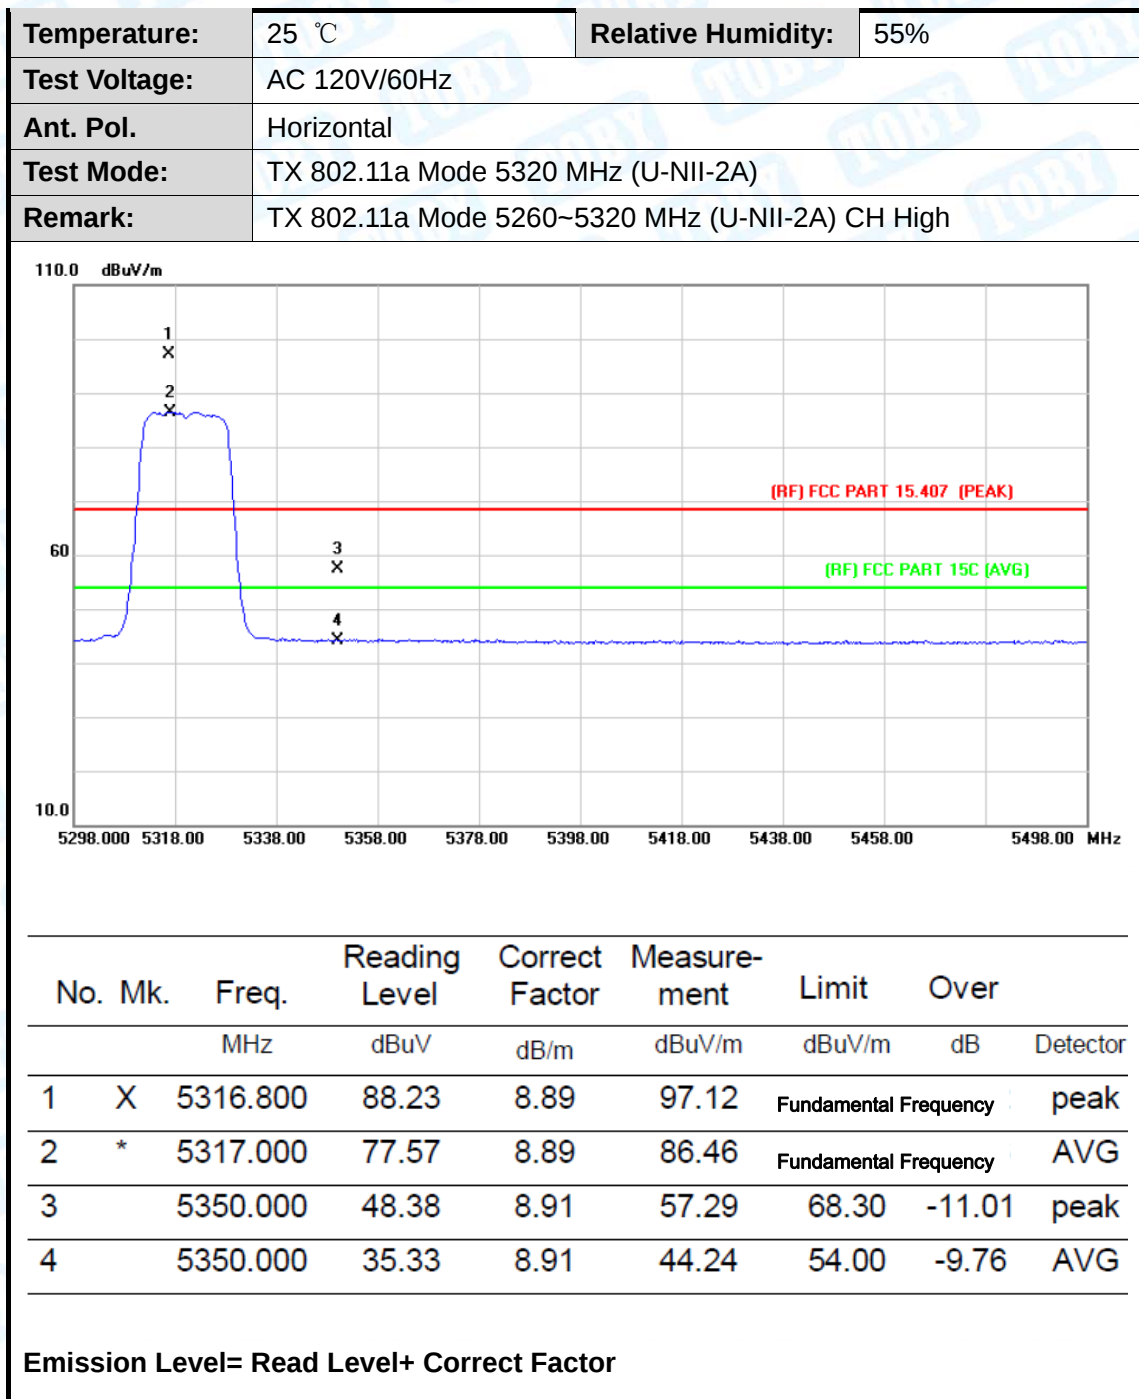



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)		
Remark:	TX 802.11a Mode 5260~5320 MHz (U-NII-2A) CH High		

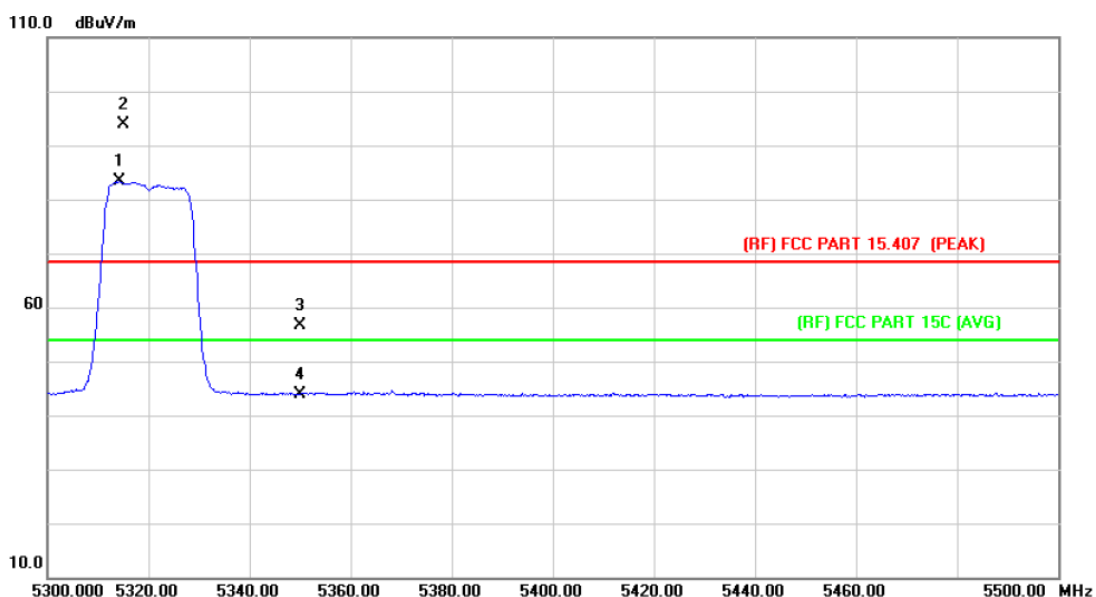

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5314.200	74.42	8.88	83.30	Fundamental Frequency		AVG
2	X	5315.200	84.97	8.88	93.85	Fundamental Frequency		peak
3		5350.000	47.66	8.91	56.57	68.30	-11.73	peak
4		5350.000	35.08	8.91	43.99	54.00	-10.01	AVG

Emission Level= Read Level+ Correct Factor

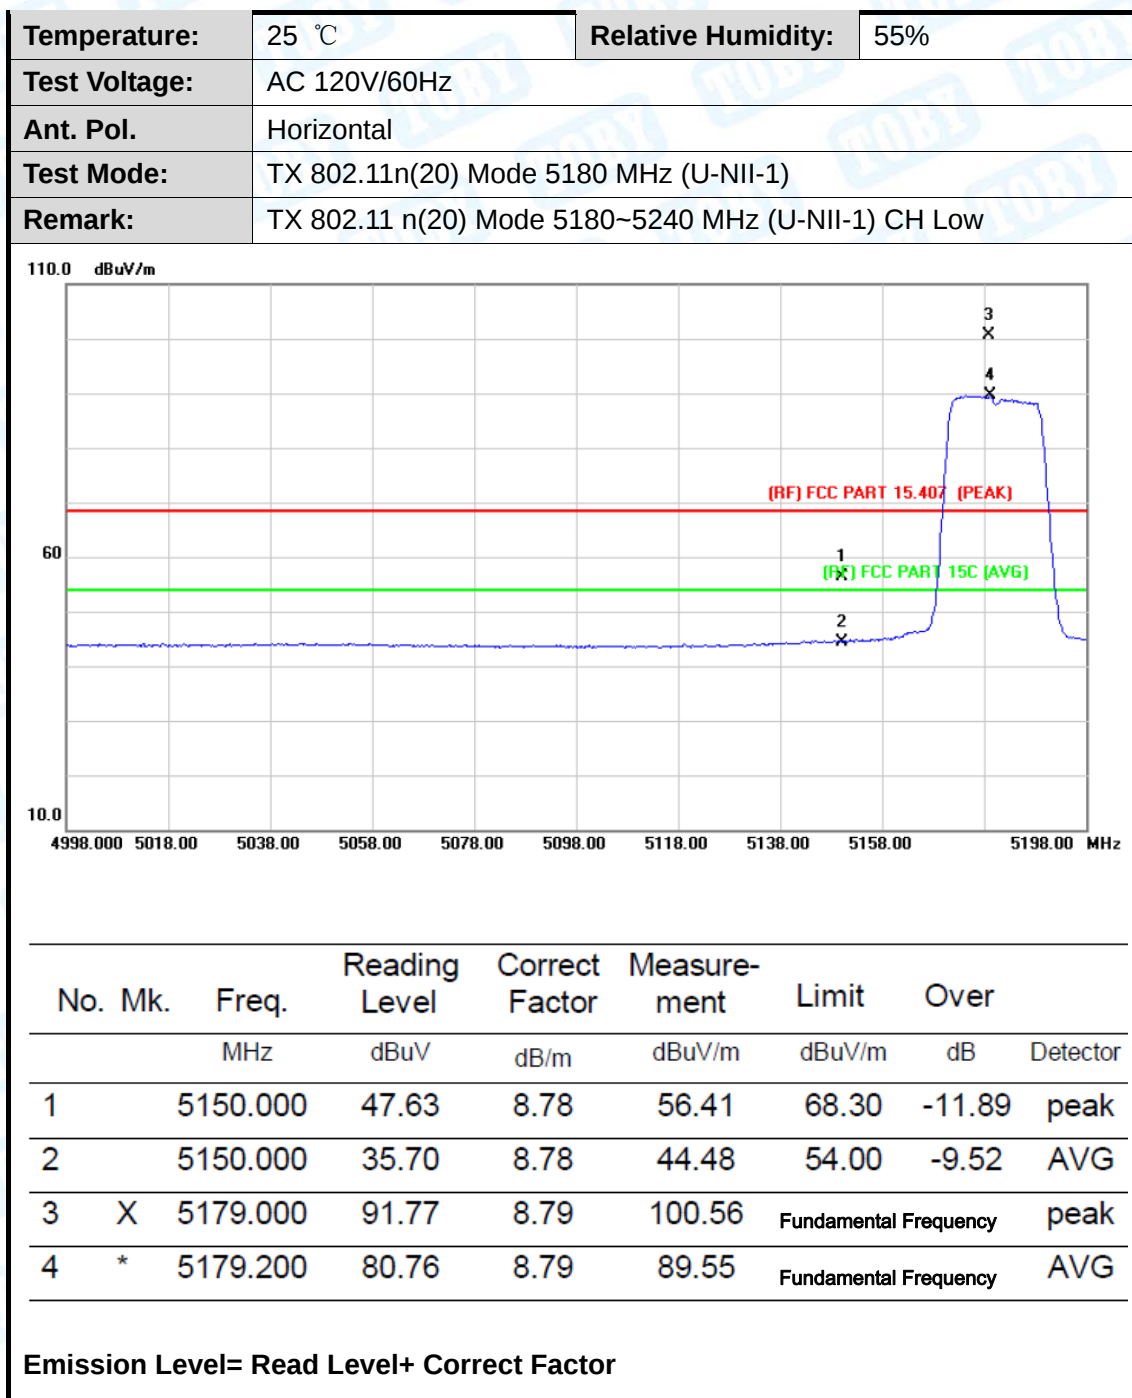

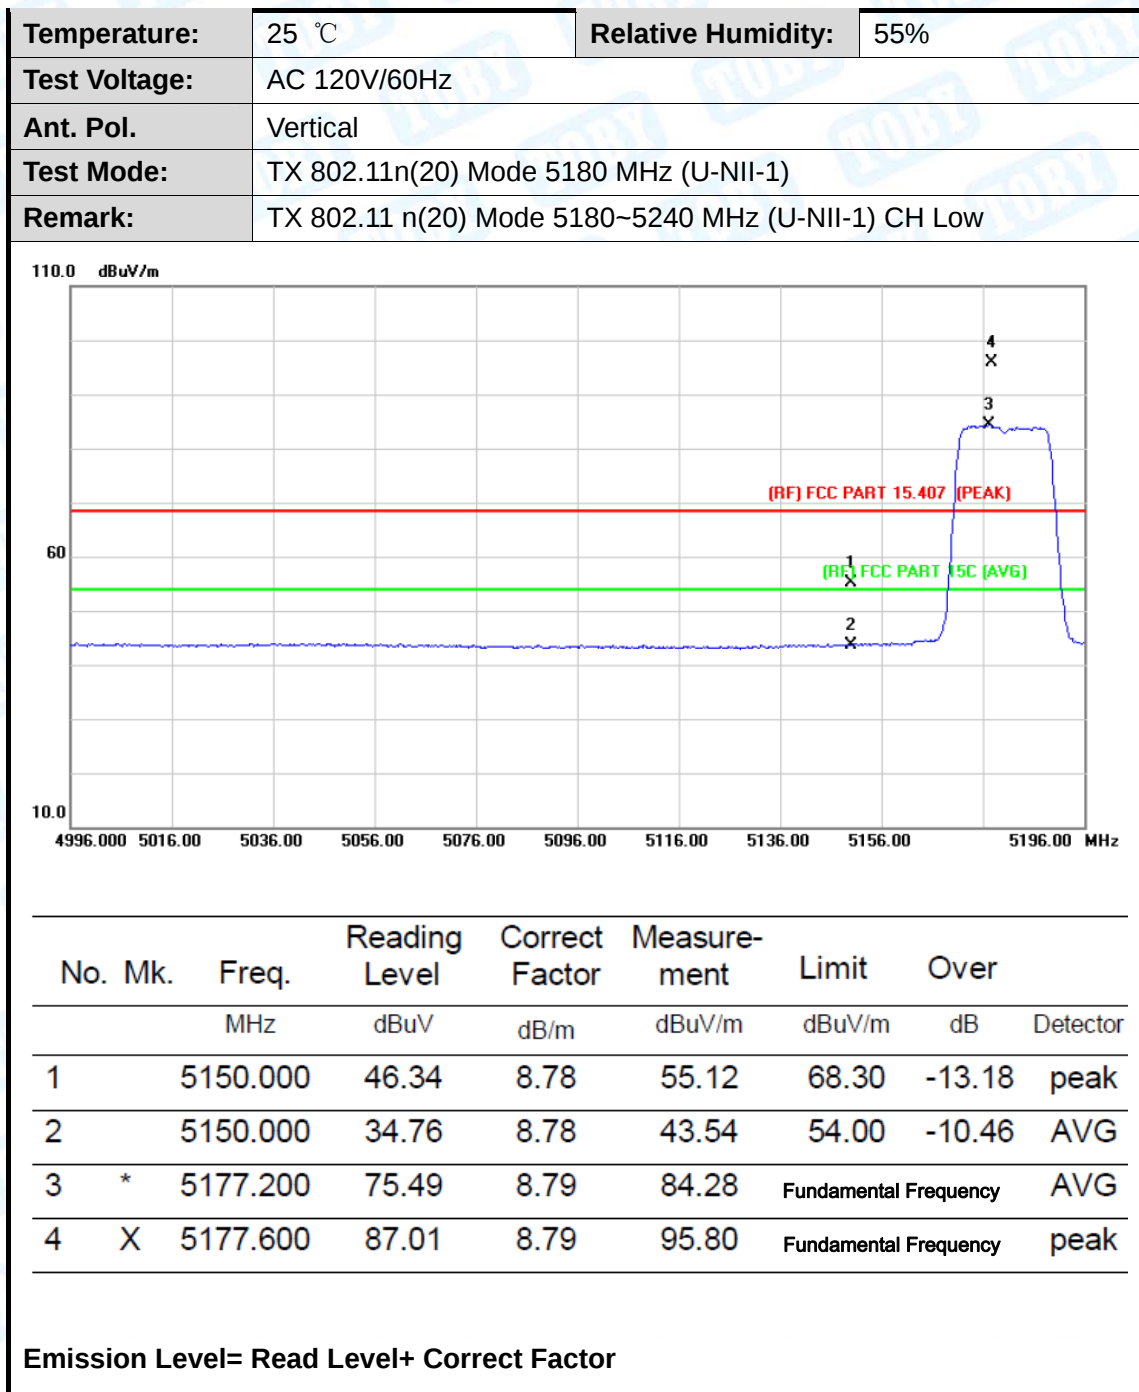

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5320 MHz (U-NII-2A)		
Remark:	TX 802.11 n(20) Mode 5260~5320 MHz (U-NII-2A) CH High		

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)


(RF) FCC PART 15C (AVG)

10.0


5298.000 5318.00 5338.00 5358.00 5378.00 5398.00 5418.00 5438.00 5458.00 5498.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5317.000	76.97	8.89	85.86	Fundamental Frequency		AVG
2	X	5317.400	87.97	8.89	96.86	Fundamental Frequency		peak
3		5350.000	48.27	8.91	57.18	68.30	-11.12	peak
4		5350.000	35.18	8.91	44.09	54.00	-9.91	AVG

Emission Level= Read Level+ Correct Factor

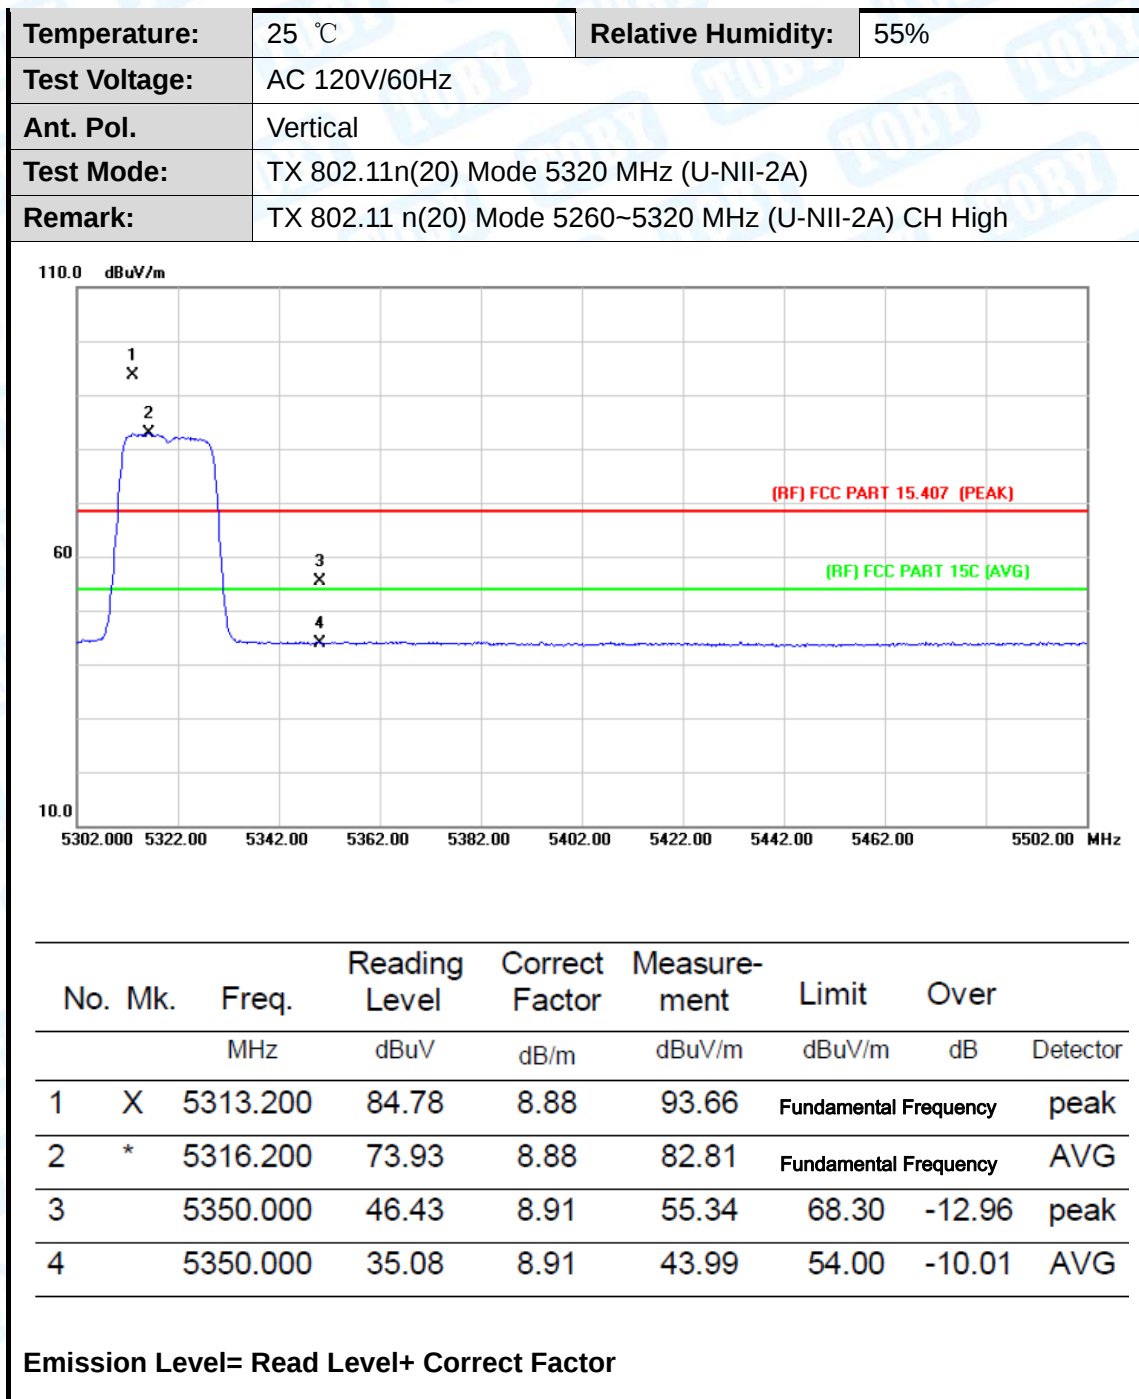


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11 ac(20) Mode 5180~5240 MHz (U-NII-1) CH Low		

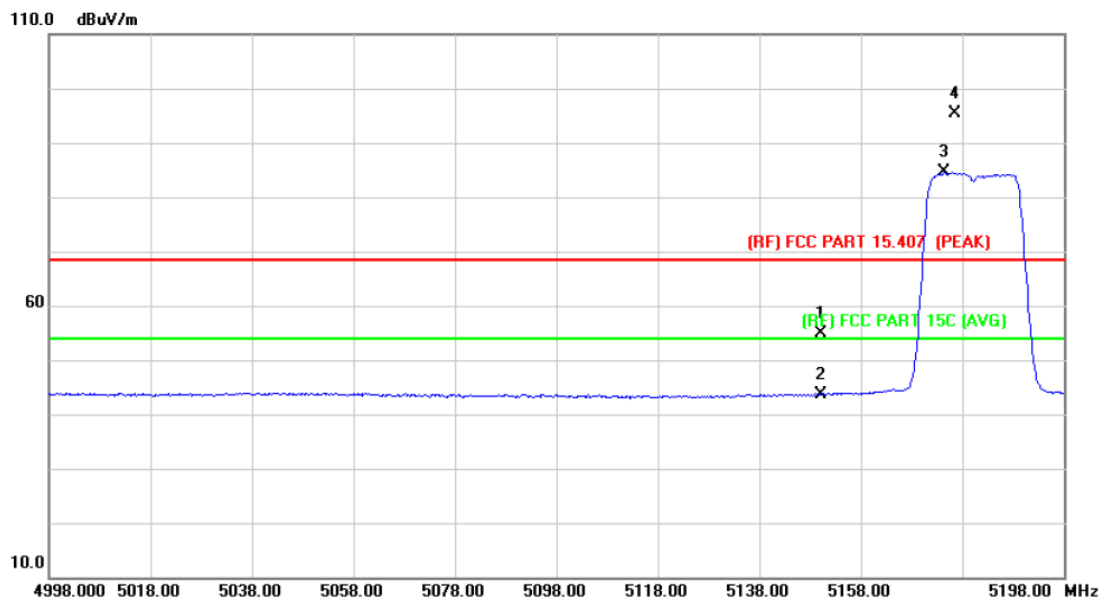

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.03	8.78	54.81	68.30	-13.49	peak
2		5150.000	34.92	8.78	43.70	54.00	-10.30	AVG
3	*	5174.400	75.76	8.79	84.55	Fundamental Frequency		AVG
4	X	5176.600	86.48	8.79	95.27	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5180 MHz (U-NII-1)		
Remark:	TX 802.11 ac(20) Mode 5180~5240 MHz (U-NII-1) CH Low		

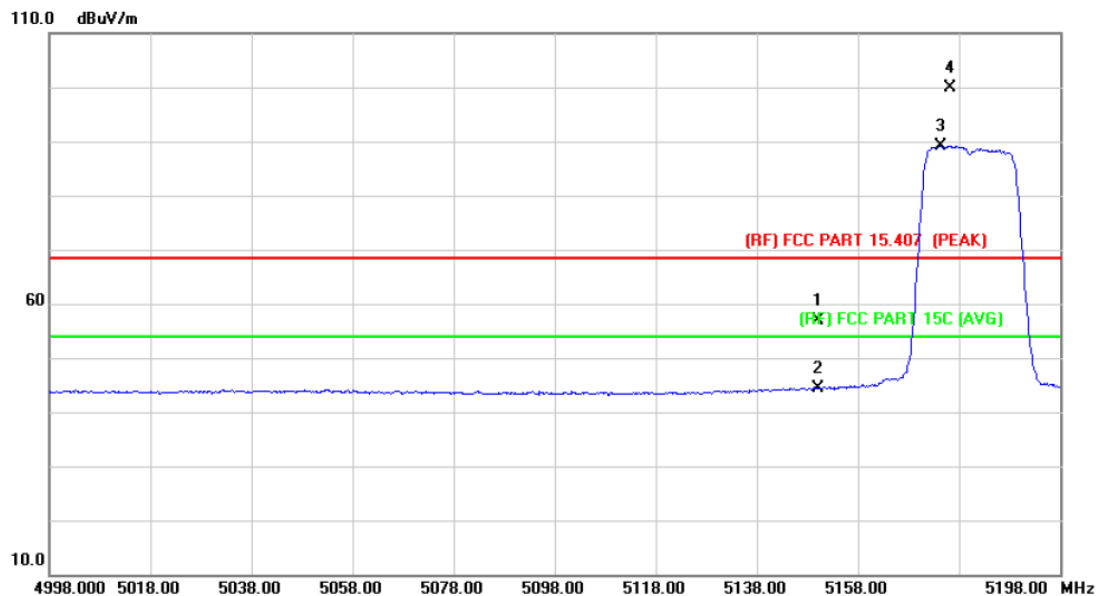

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	48.20	8.78	56.98	68.30	-11.32	peak
2		5150.000	35.56	8.78	44.34	54.00	-9.66	AVG
3	*	5174.400	80.38	8.79	89.17	Fundamental Frequency		AVG
4	X	5176.400	91.21	8.79	100.00	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5320 MHz (U-NII-2A)		
Remark:	TX 802.11 ac(20) Mode 5260~5320 MHz (U-NII-2A) CH High		

110.0 dBuV/m

60

3 X

4 X

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5300.000 5320.00 5340.00 5360.00 5380.00 5400.00 5420.00 5440.00 5460.00 5500.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5318.200	76.81	8.89	85.70	Fundamental Frequency		AVG
2	X	5319.000	87.68	8.89	96.57	Fundamental Frequency		peak
3		5350.000	46.44	8.91	55.35	68.30	-12.95	peak
4		5350.000	35.12	8.91	44.03	54.00	-9.97	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5320 MHz (U-NII-2A)		
Remark:	TX 802.11 ac(20) Mode 5260~5320 MHz (U-NII-2A) CH High		

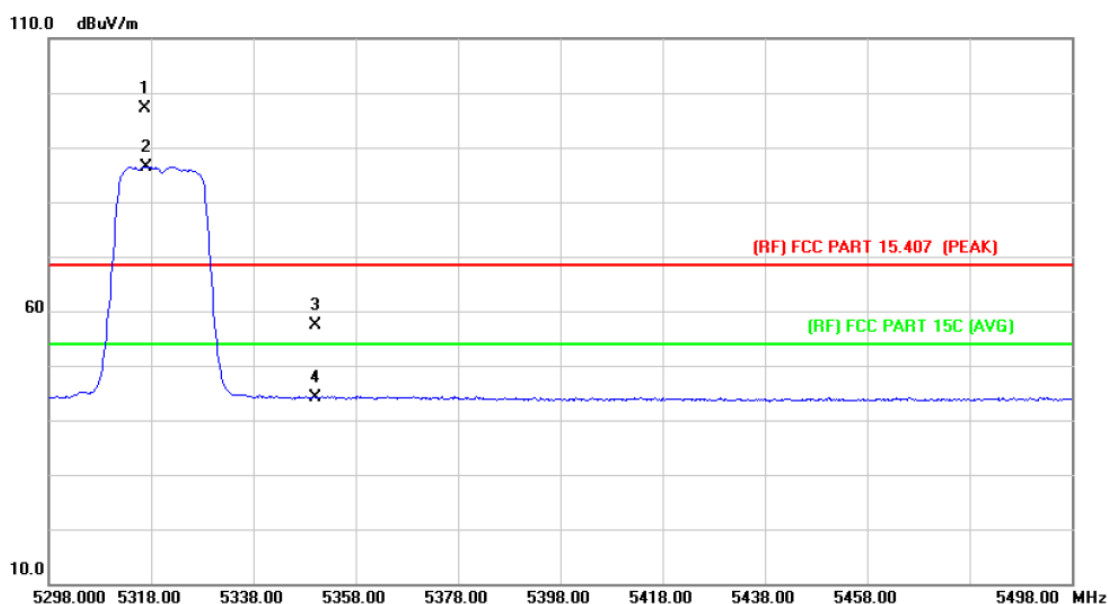

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5316.800	88.23	8.89	97.12	Fundamental Frequency		peak
2	*	5317.000	77.57	8.89	86.46	Fundamental Frequency		AVG
3		5350.000	48.38	8.91	57.29	68.30	-11.01	peak
4		5350.000	35.33	8.91	44.24	54.00	-9.76	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:	N/A		

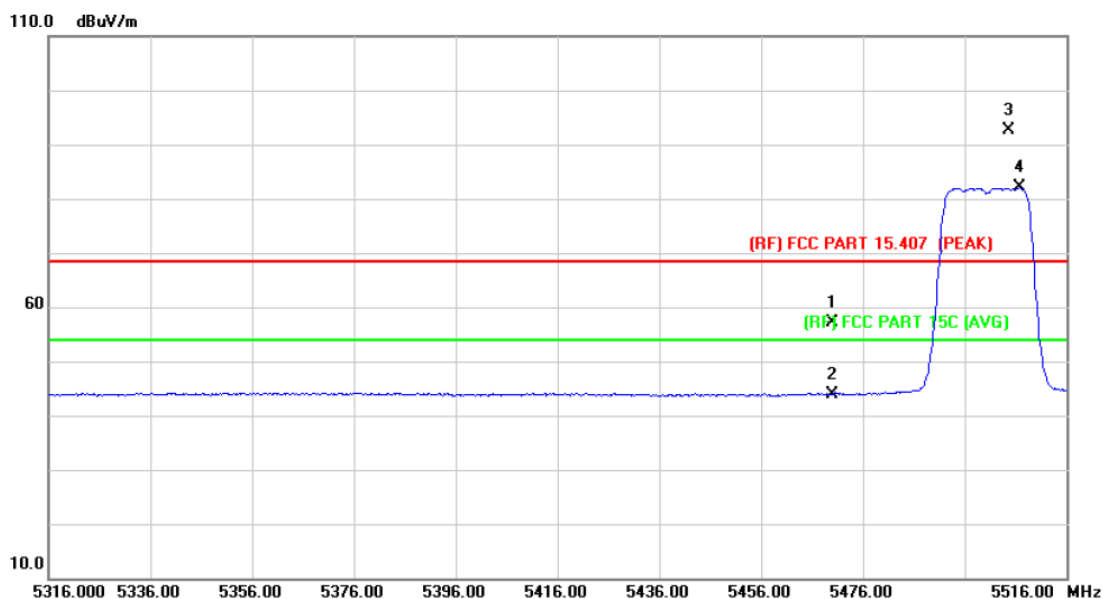

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	48.06	8.99	57.05	68.30	-11.25	peak
2		5470.000	34.87	8.99	43.86	54.00	-10.14	AVG
3	X	5504.600	83.58	9.01	92.59	Fundamental Frequency		peak
4	*	5506.800	72.99	9.02	82.01	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:	N/A		

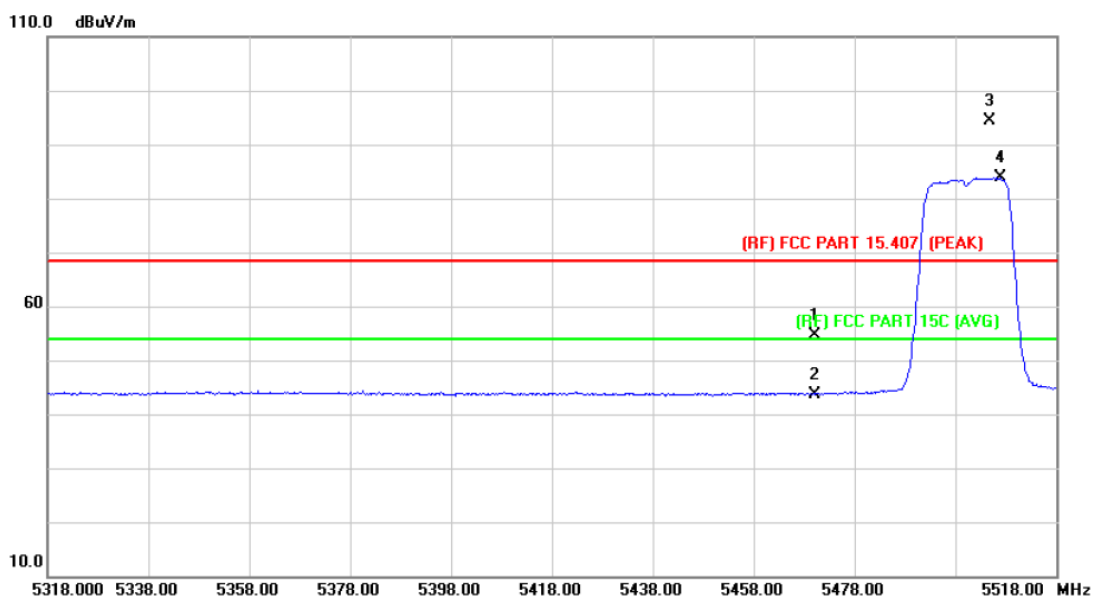

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	45.70	8.99	54.69	68.30	-13.61	peak
2		5470.000	34.75	8.99	43.74	54.00	-10.26	AVG
3	X	5504.800	85.46	9.01	94.47	Fundamental Frequency		peak
4	*	5507.000	74.88	9.02	83.90	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:	N/A		

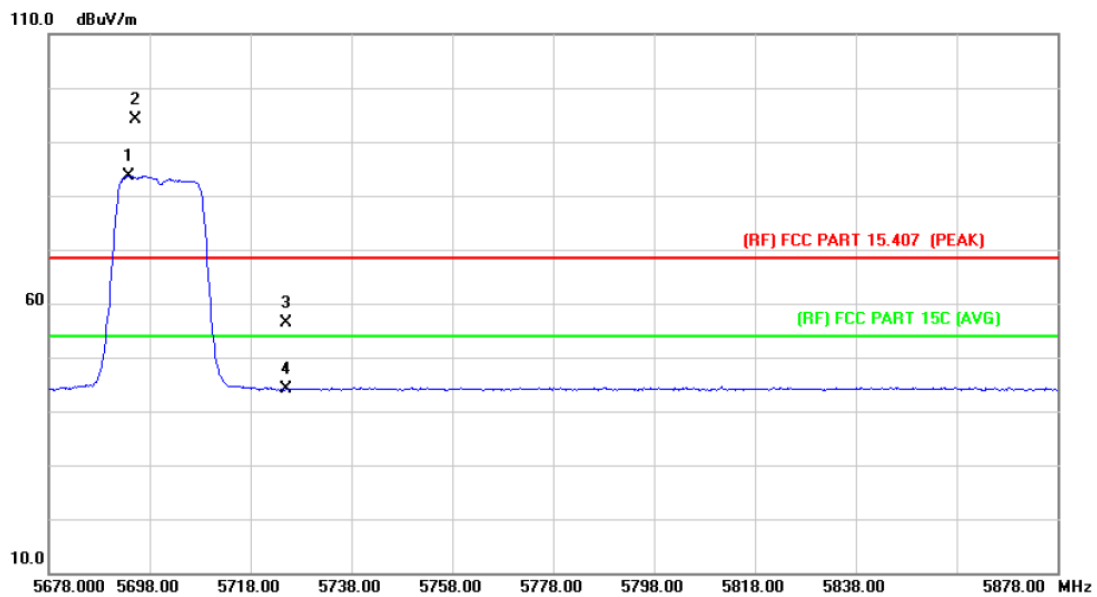

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5693.800	74.54	9.13	83.67	Fundamental Frequency		AVG
2	X	5695.200	85.07	9.14	94.21	Fundamental Frequency		peak
3		5725.000	47.23	9.15	56.38	68.30	-11.92	peak
4		5725.000	34.95	9.15	44.10	54.00	-9.90	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:	N/A		

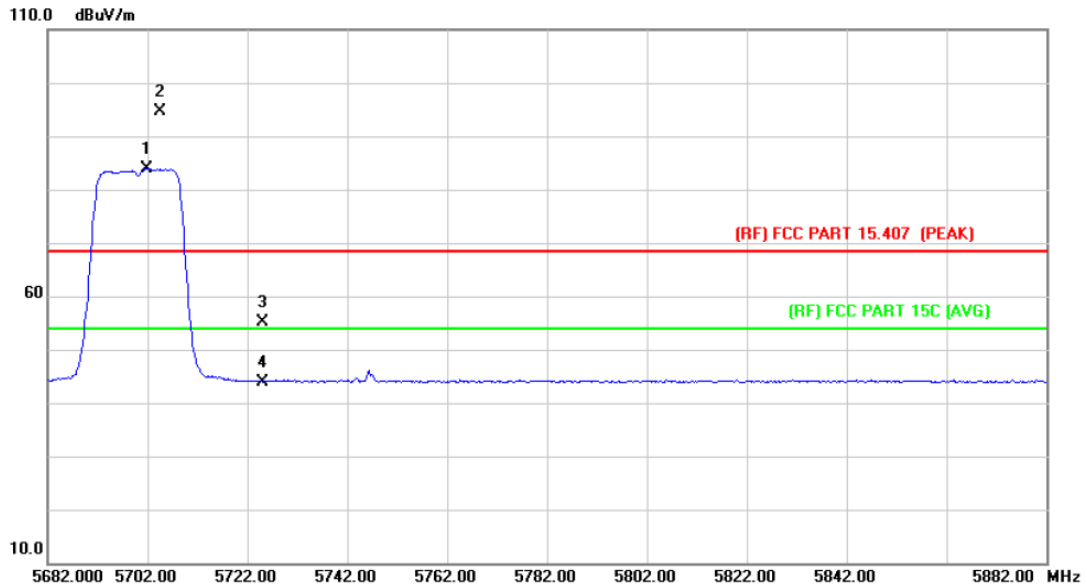

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5701.800	74.79	9.14	83.93	Fundamental Frequency		AVG
2	X	5704.600	85.43	9.14	94.57	Fundamental Frequency		peak
3		5725.000	45.98	9.15	55.13	68.30	-13.17	peak
4		5725.000	34.82	9.15	43.97	54.00	-10.03	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(20) Mode 5500 MHz (U-NII-2C)		
Remark:	N/A		

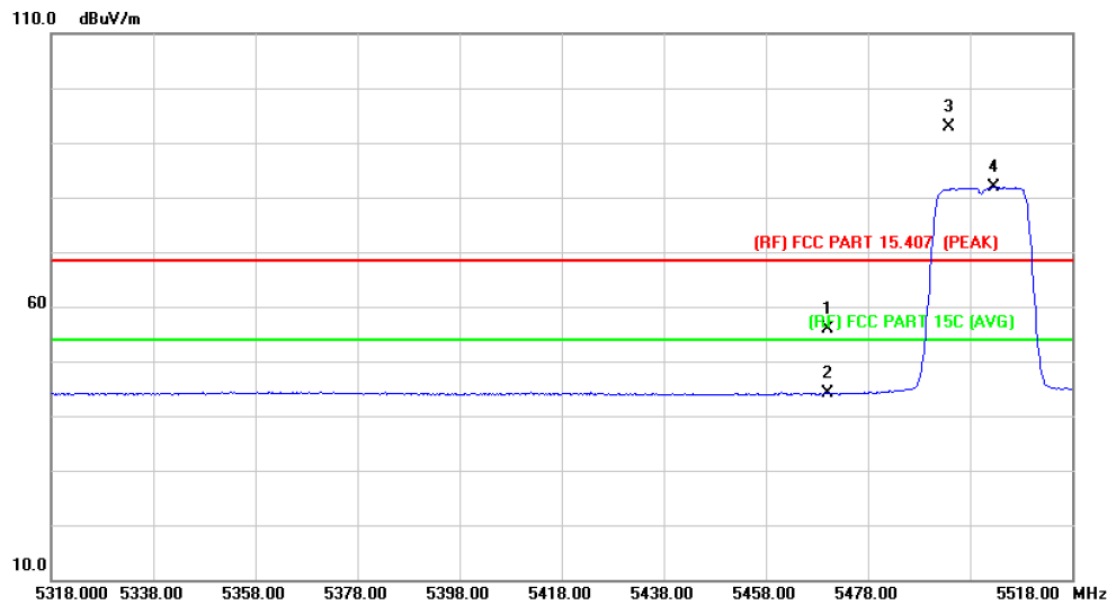

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	46.93	8.99	55.92	68.30	-12.38	peak
2		5470.000	35.11	8.99	44.10	54.00	-9.90	AVG
3	X	5493.800	83.77	9.00	92.77	Fundamental Frequency		peak
4	*	5502.600	72.87	9.01	81.88	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 n(20) Mode 5500 MHz (U-NII-2C)		
Remark:	N/A		

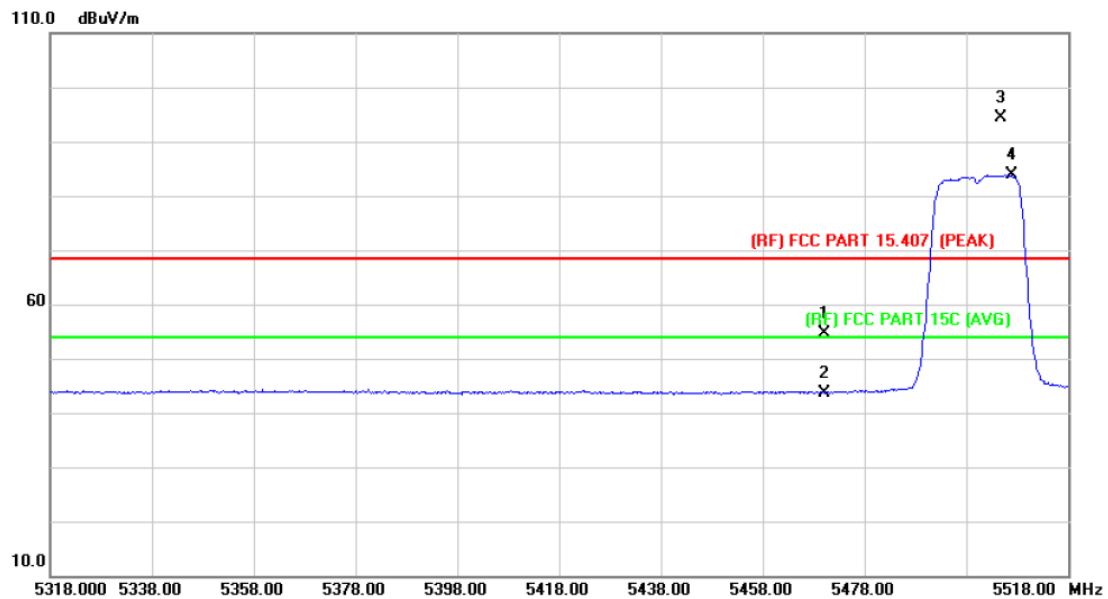

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	45.70	8.99	54.69	68.30	-13.61	peak
2		5470.000	34.75	8.99	43.74	54.00	-10.26	AVG
3	X	5504.800	85.46	9.01	94.47	Fundamental Frequency		peak
4	*	5507.000	74.88	9.02	83.90	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(20) Mode 5700 MHz (U-NII-2C)		
Remark:	N/A		

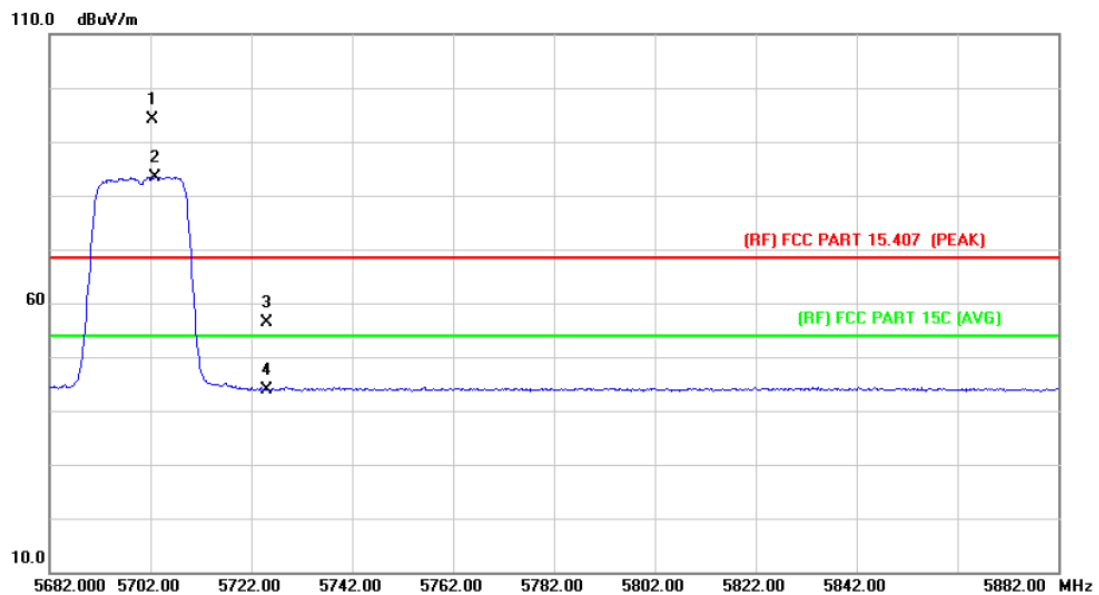

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5702.400	85.06	9.14	94.20	Fundamental Frequency		peak
2	*	5703.000	74.36	9.14	83.50	Fundamental Frequency		AVG
3		5725.000	47.25	9.15	56.40	68.30	-11.90	peak
4		5725.000	34.80	9.15	43.95	54.00	-10.05	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 n(20) Mode 5700 MHz (U-NII-2C)		
Remark:	N/A		

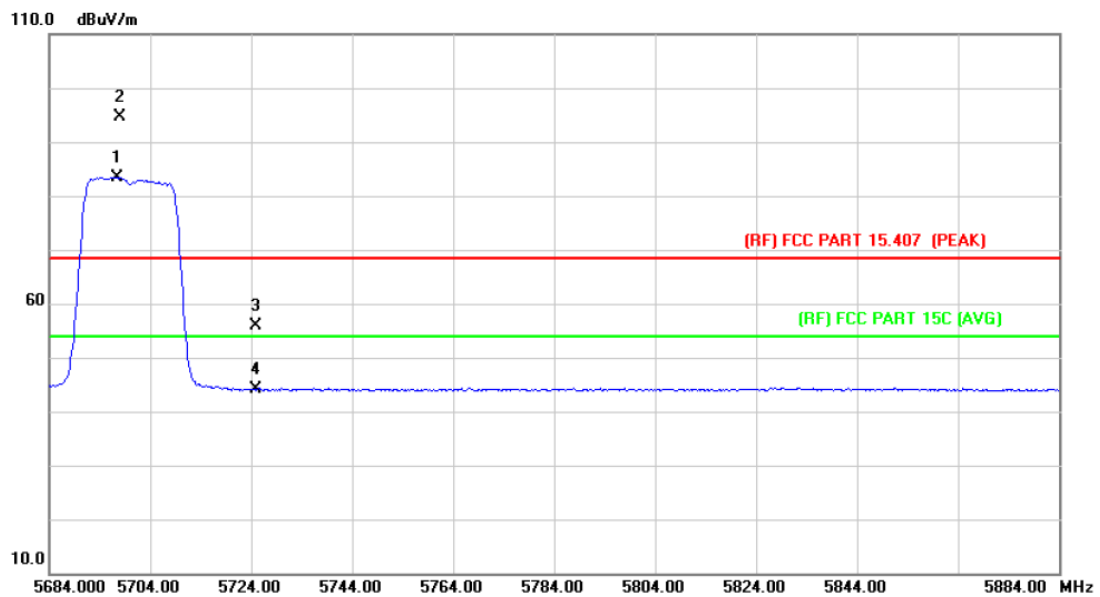

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5697.400	74.31	9.14	83.45	Fundamental Frequency		AVG
2	X	5698.000	85.40	9.14	94.54	Fundamental Frequency		peak
3		5725.000	46.84	9.15	55.99	68.30	-12.31	peak
4		5725.000	34.92	9.15	44.07	54.00	-9.93	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(20) Mode 5500 MHz (U-NII-2C)		
Remark:	N/A		

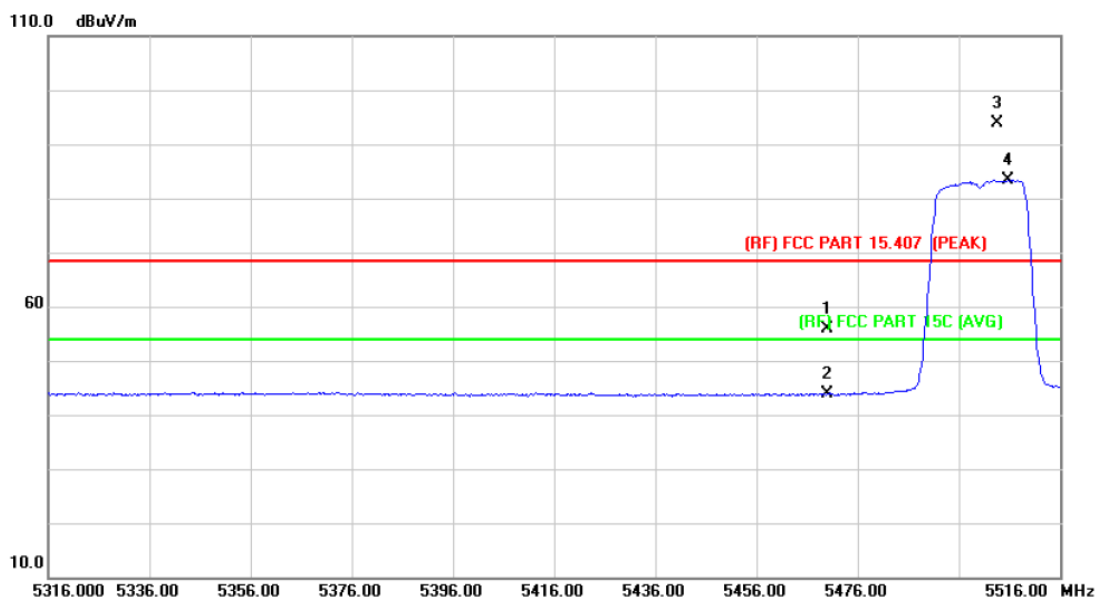

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	46.88	8.99	55.87	68.30	-12.43	peak
2		5470.000	34.93	8.99	43.92	54.00	-10.08	AVG
3	X	5503.600	84.89	9.01	93.90	Fundamental Frequency		peak
4	*	5505.800	74.34	9.02	83.36	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(20) Mode 5500 MHz (U-NII-2C)		
Remark:	N/A		

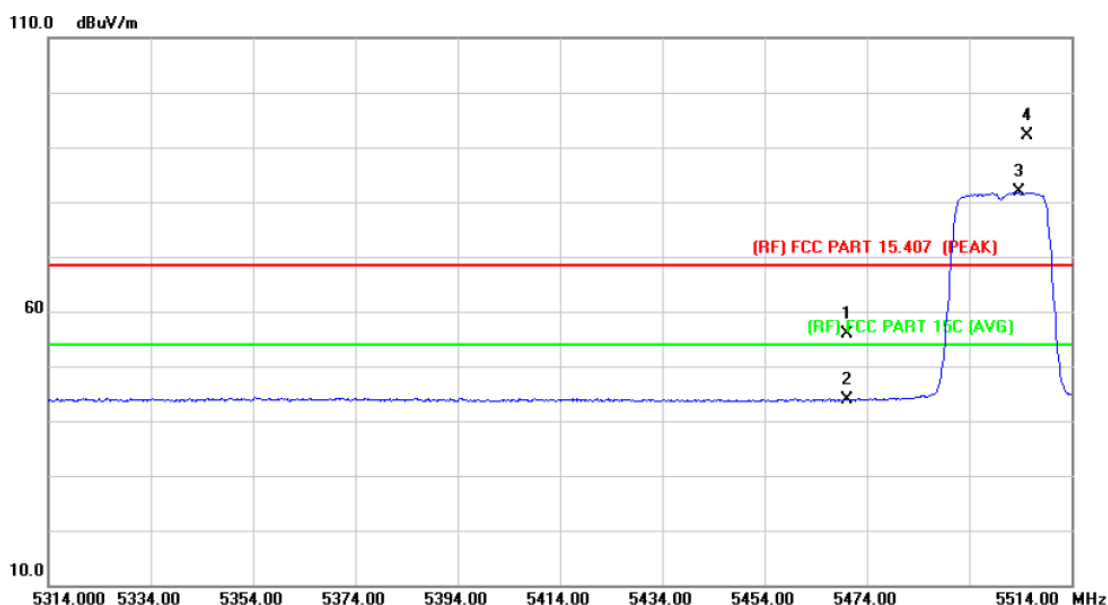

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5470.000	46.89	8.99	55.88	68.30	-12.42 peak
2		5470.000	34.85	8.99	43.84	54.00	-10.16 AVG
3	*	5503.600	72.90	9.01	81.91	Fundamental Frequency AVG	
4	X	5505.400	83.22	9.01	92.23	Fundamental Frequency peak	

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(20) Mode 5700 MHz (U-NII-2C)		
Remark:	N/A		

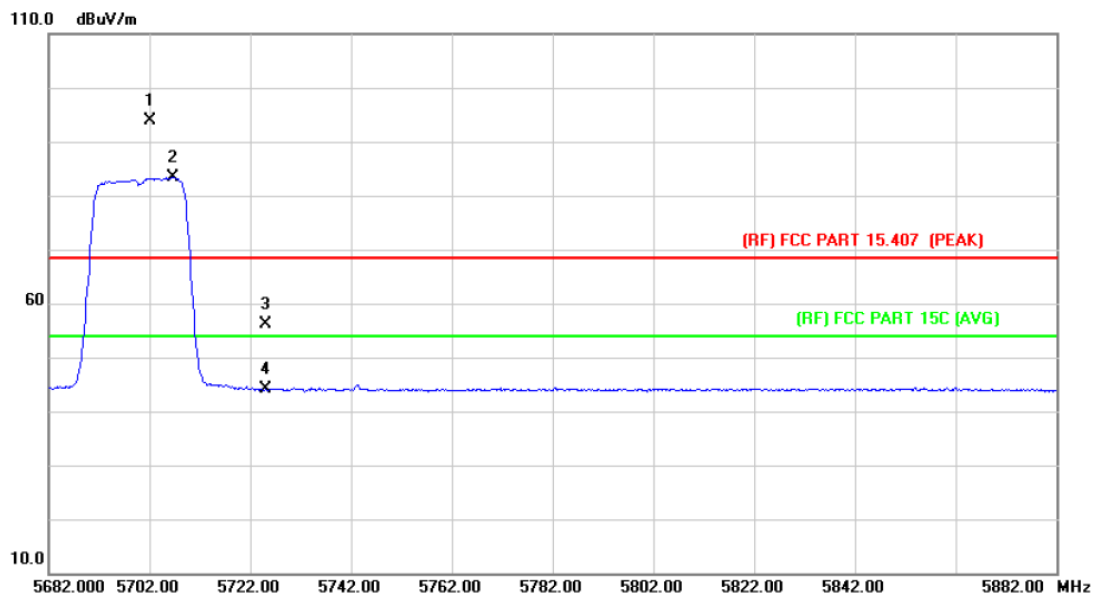

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5702.200	84.79	9.14	93.93	Fundamental Frequency		peak
2	*	5706.600	74.17	9.15	83.32	Fundamental Frequency		AVG
3		5725.000	46.99	9.15	56.14	68.30	-12.16	peak
4		5725.000	34.86	9.15	44.01	54.00	-9.99	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(20) Mode 5700 MHz (U-NII-2C)		
Remark:	N/A		

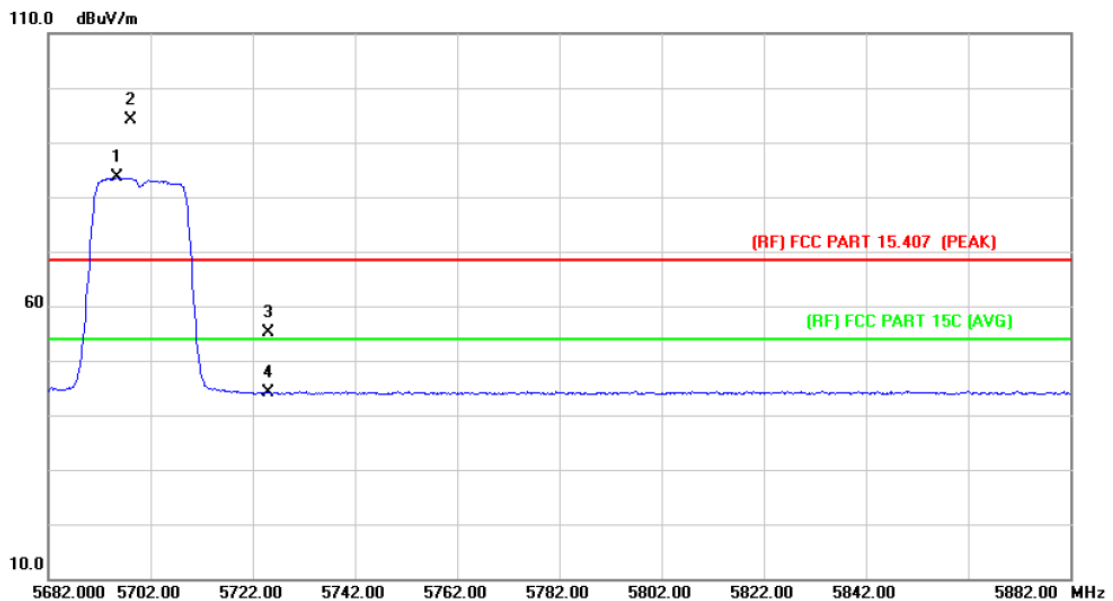

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5695.400	74.41	9.14	83.55	Fundamental Frequency		AVG
2	X	5698.000	85.09	9.14	94.23	Fundamental Frequency		peak
3		5725.000	46.05	9.15	55.20	68.30	-13.10	peak
4		5725.000	34.92	9.15	44.07	54.00	-9.93	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

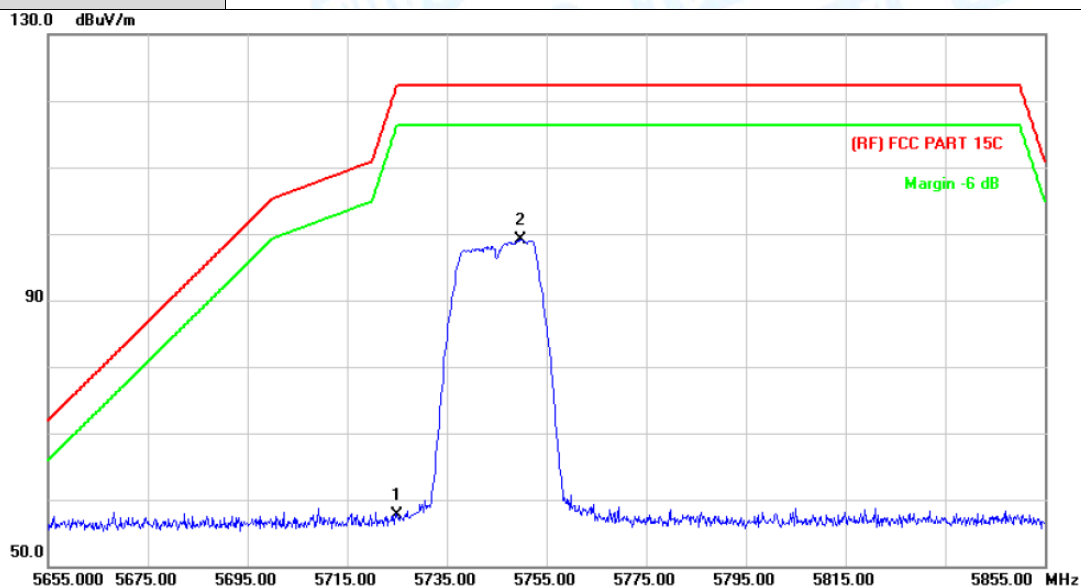

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.89	9.78	57.67	122.30	-64.63	peak
2	*	5749.800	89.27	9.84	99.11	122.30	-23.19	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

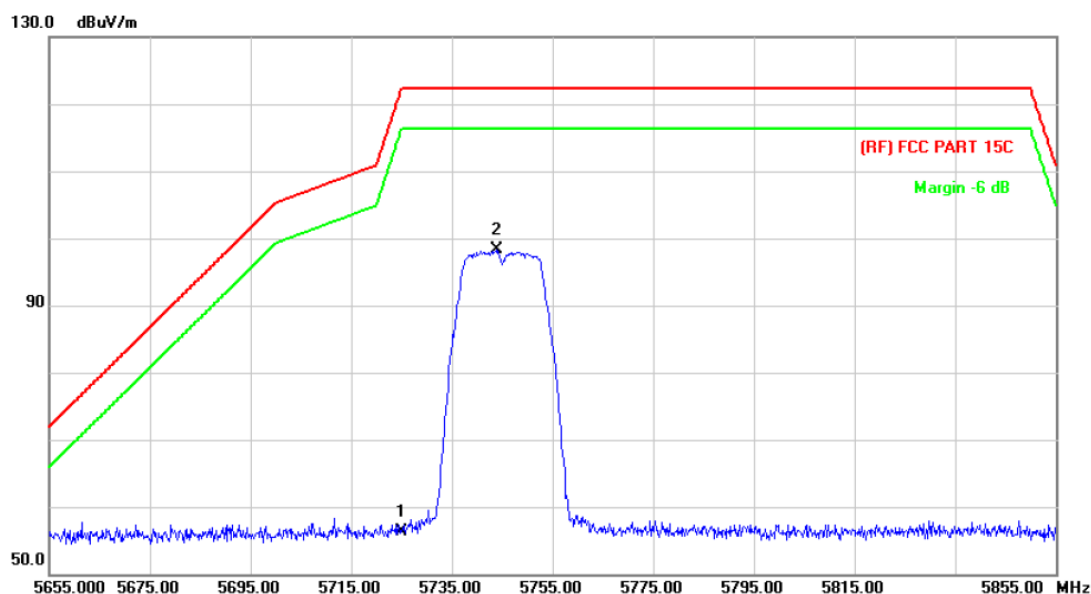

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.55	9.78	56.33	122.30	-65.97	peak
2	*	5744.000	88.45	9.83	98.28	122.30	-24.02	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

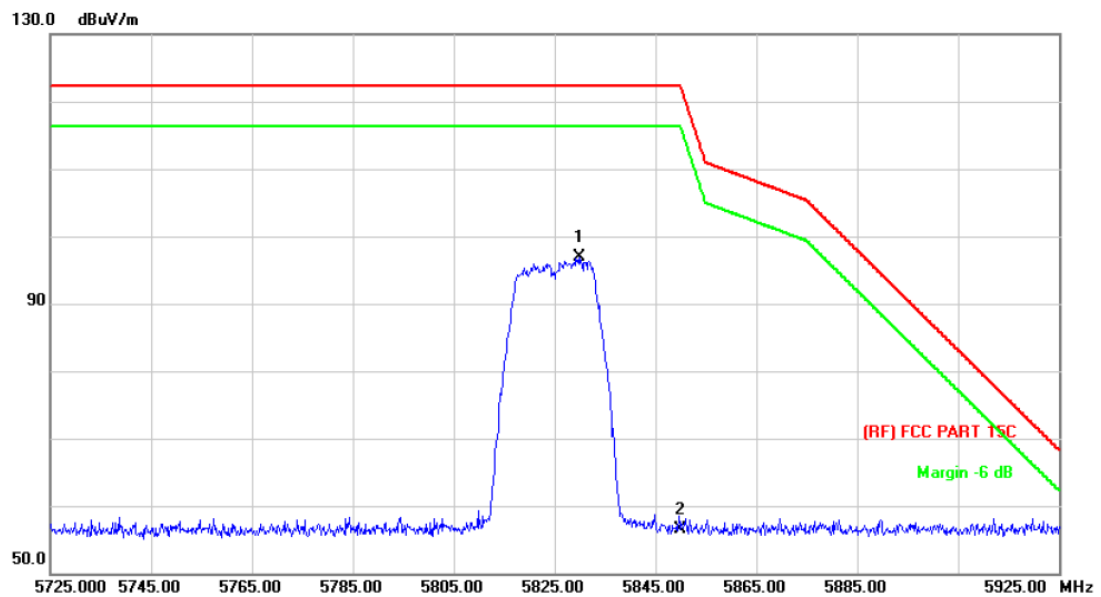

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5829.800	86.88	10.08	96.96	122.30	-25.34	peak
2		5850.000	46.31	10.13	56.44	122.30	-65.86	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

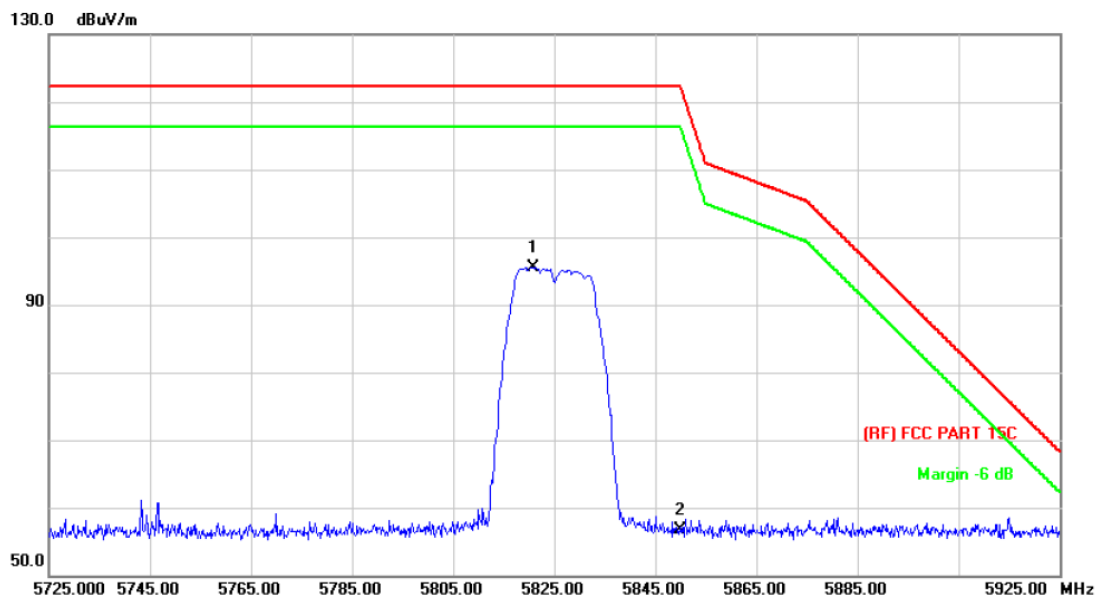

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5820.800	85.48	10.05	95.53	122.30	-26.77	peak
2		5850.000	46.58	10.13	56.71	122.30	-65.59	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

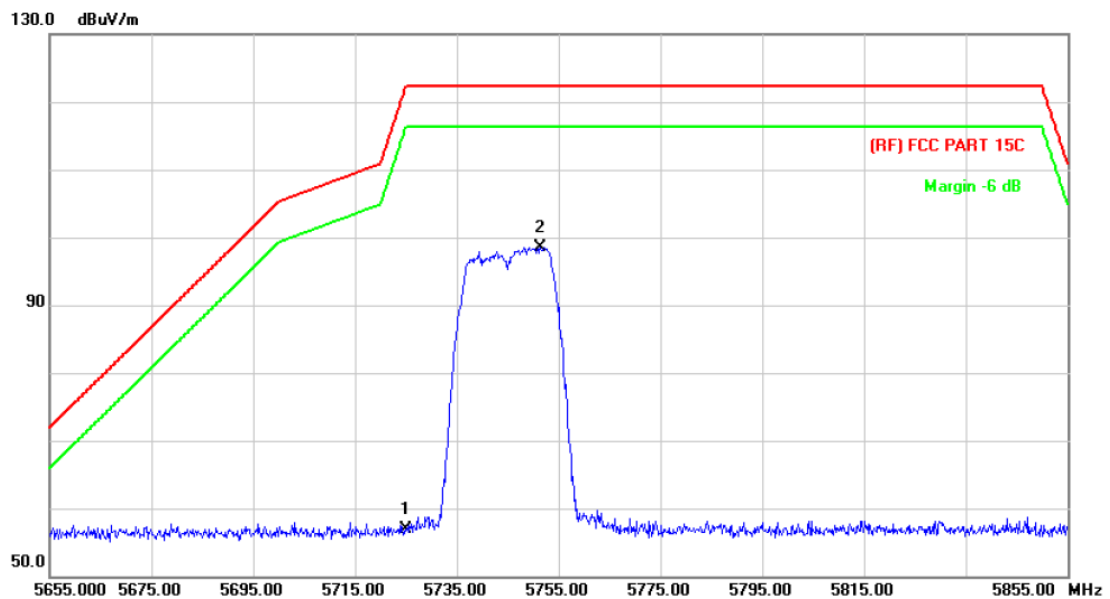

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.18	9.78	56.96	122.30	-65.34	peak
2	*	5751.400	88.68	9.85	98.53	122.30	-23.77	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

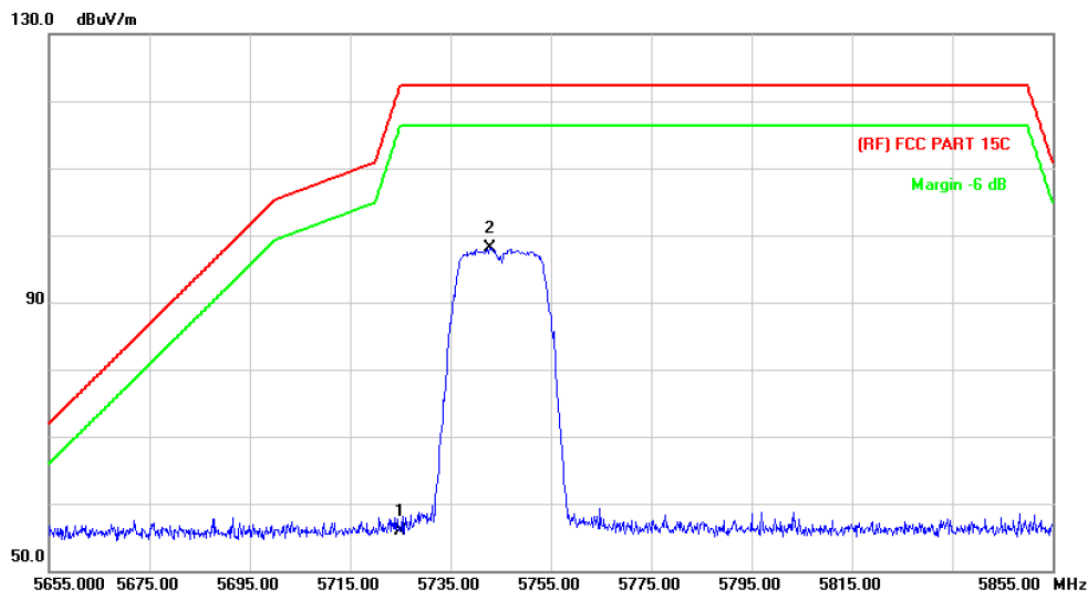

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.15	9.78	55.93	122.30	-66.37	peak
2	*	5742.800	88.32	9.83	98.15	122.30	-24.15	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

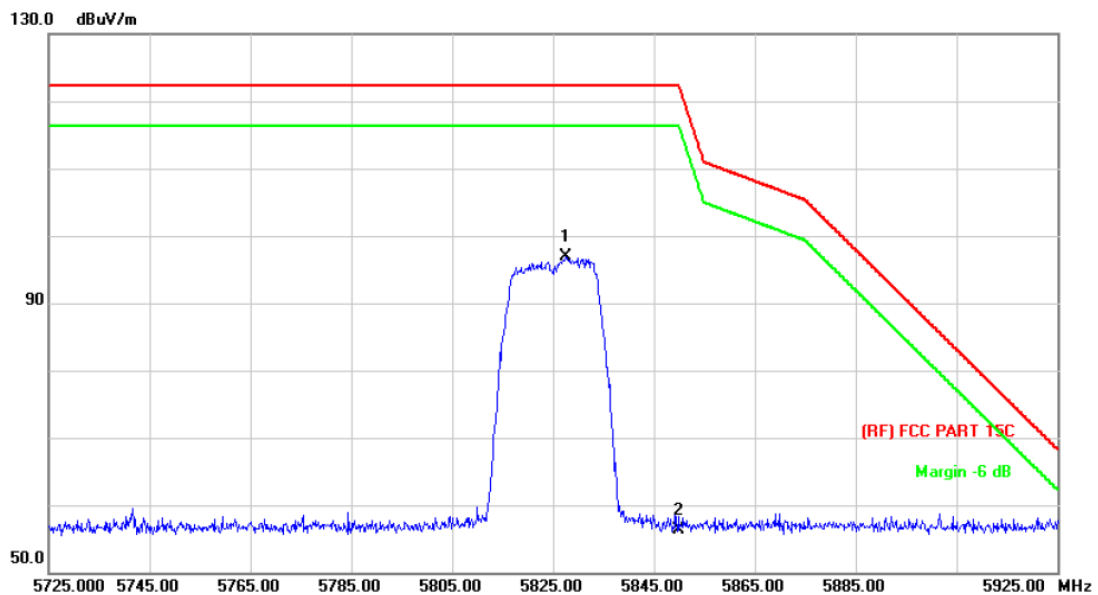

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5827.600	86.83	10.06	96.89	122.30	-25.41	peak
2		5850.000	46.12	10.13	56.25	122.30	-66.05	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

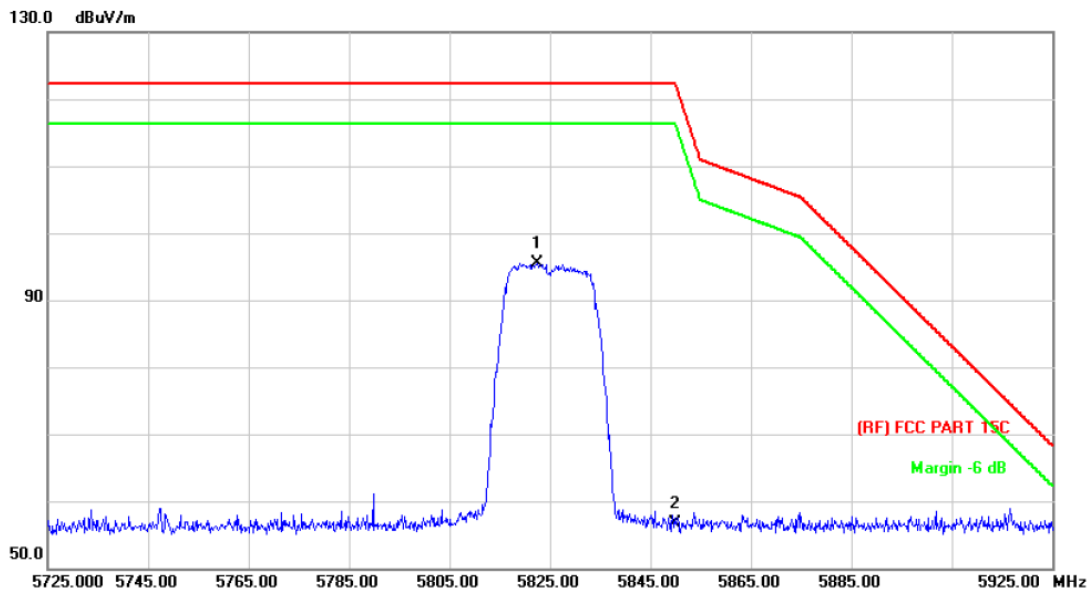

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5822.400	85.54	10.05	95.59	122.30	-26.71	peak
2		5850.000	46.57	10.13	56.70	122.30	-65.60	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

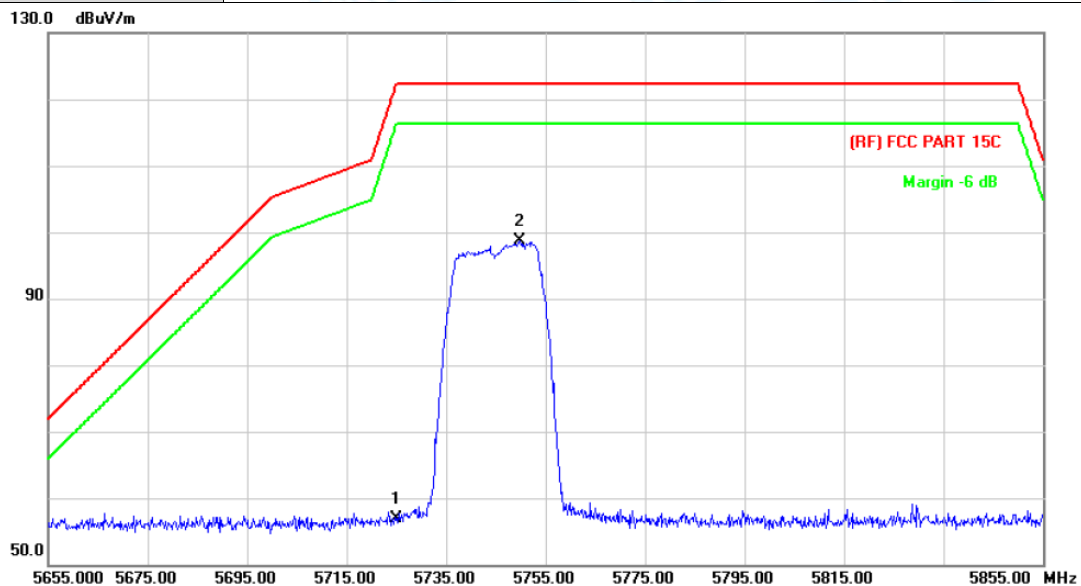

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.21	9.78	56.99	122.30	-65.31	peak
2	*	5749.800	88.84	9.84	98.68	122.30	-23.62	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5745 MHz (U-NII-3)		
Remark:	N/A		

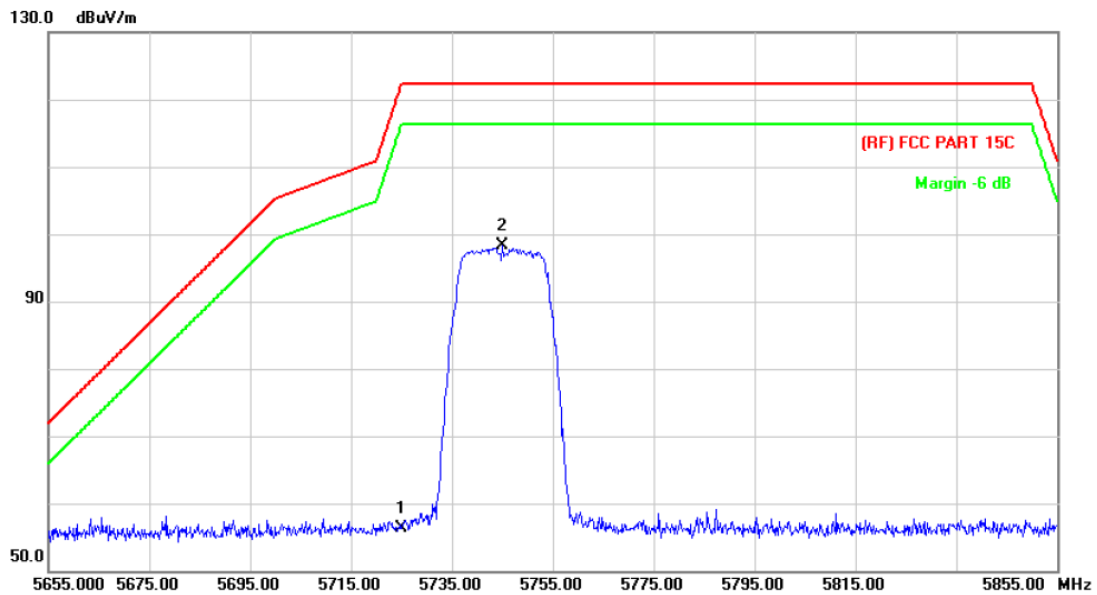

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	46.46	9.78	56.24	122.30	-66.06	peak
2	*	5745.000	88.45	9.83	98.28	122.30	-24.02	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

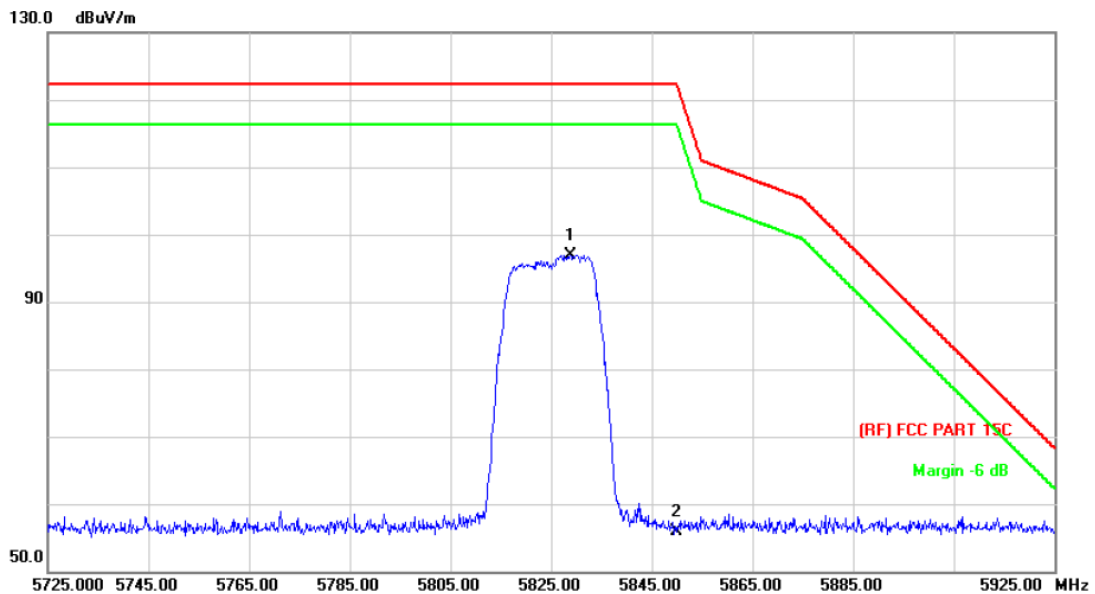

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5828.800	86.92	10.07	96.99	122.30	-25.31	peak
2		5850.000	45.68	10.13	55.81	122.30	-66.49	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5825 MHz (U-NII-3)		
Remark:	N/A		

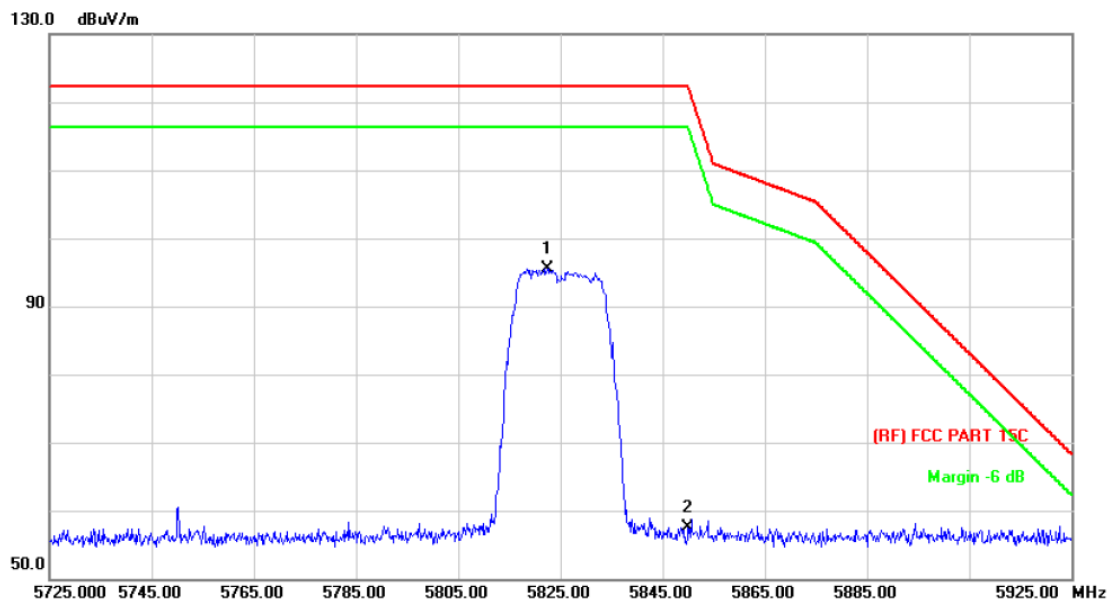


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5822.400	85.45	10.05	95.50	122.30	-26.80	peak
2		5850.000	47.43	10.13	57.56	122.30	-64.74	peak

Emission Level= Read Level+ Correct Factor

n(40)/ac(40)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11n (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

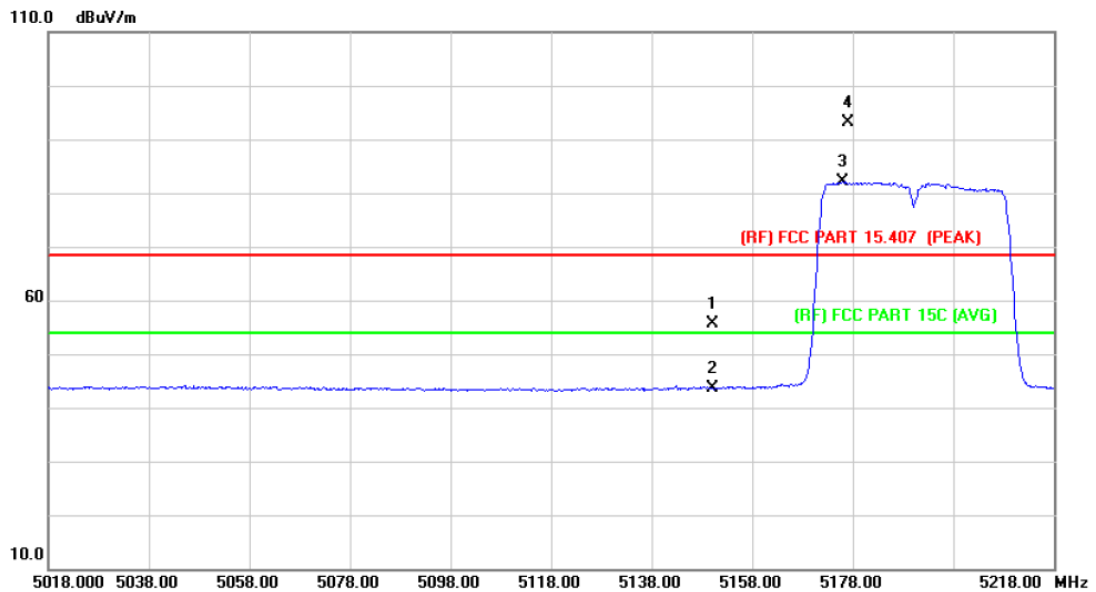

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.95	8.78	55.73	68.30	-12.57	peak
2		5150.000	34.89	8.78	43.67	54.00	-10.33	AVG
3	*	5176.000	73.25	8.79	82.04	Fundamental Frequency		AVG
4	X	5177.200	84.30	8.79	93.09	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11n (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

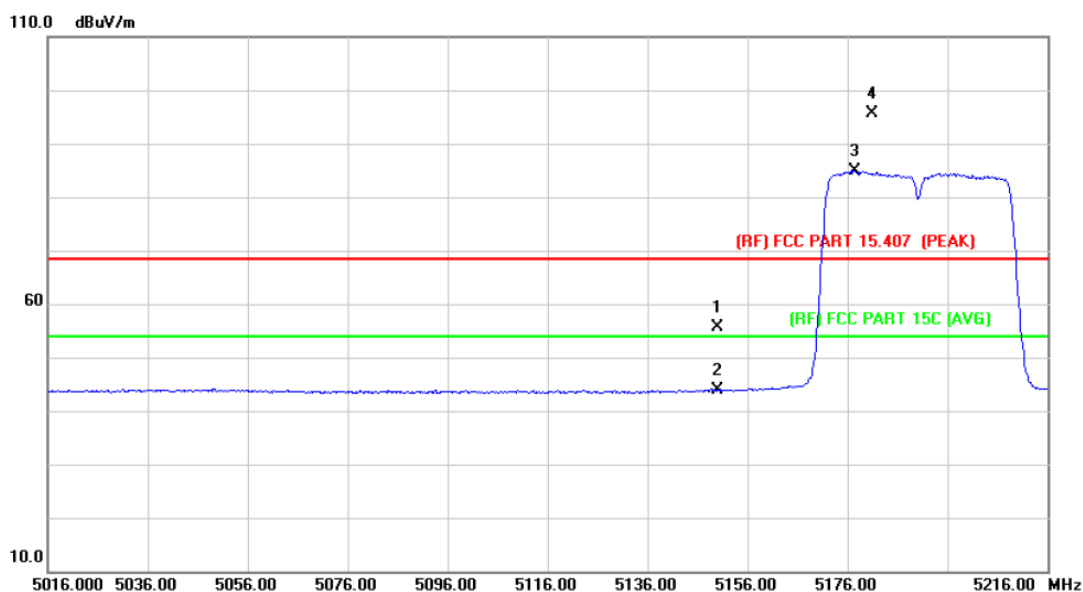

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.84	8.78	55.62	68.30	-12.68	peak
2		5150.000	35.04	8.78	43.82	54.00	-10.18	AVG
3	*	5177.400	76.12	8.79	84.91	Fundamental Frequency		AVG
4	X	5180.800	86.87	8.79	95.66	Fundamental Frequency		peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5310 MHz (U-NII-2A)		
Remark:	TX 802.11n (40) Mode 5270~5310 MHz (U-NII-2A) CH High		

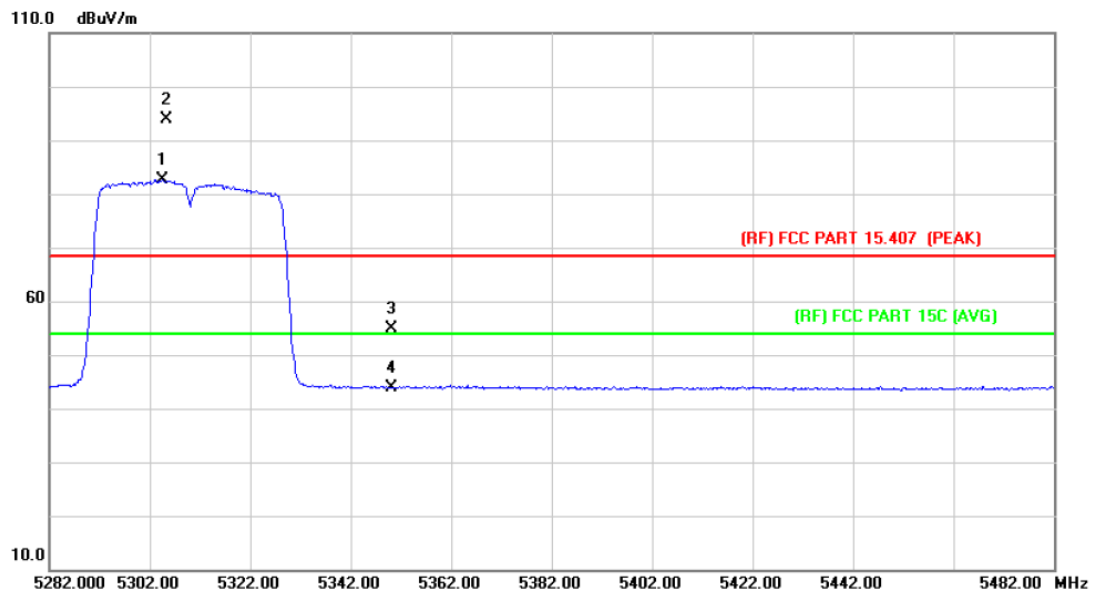


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5304.600	73.76	8.87	82.63	Fundamental Frequency		AVG
2	X	5305.400	84.93	8.87	93.80	Fundamental Frequency		peak
3		5350.000	45.85	8.91	54.76	68.30	-13.54	peak
4		5350.000	35.00	8.91	43.91	54.00	-10.09	AVG

Emission Level= Read Level+ Correct Factor

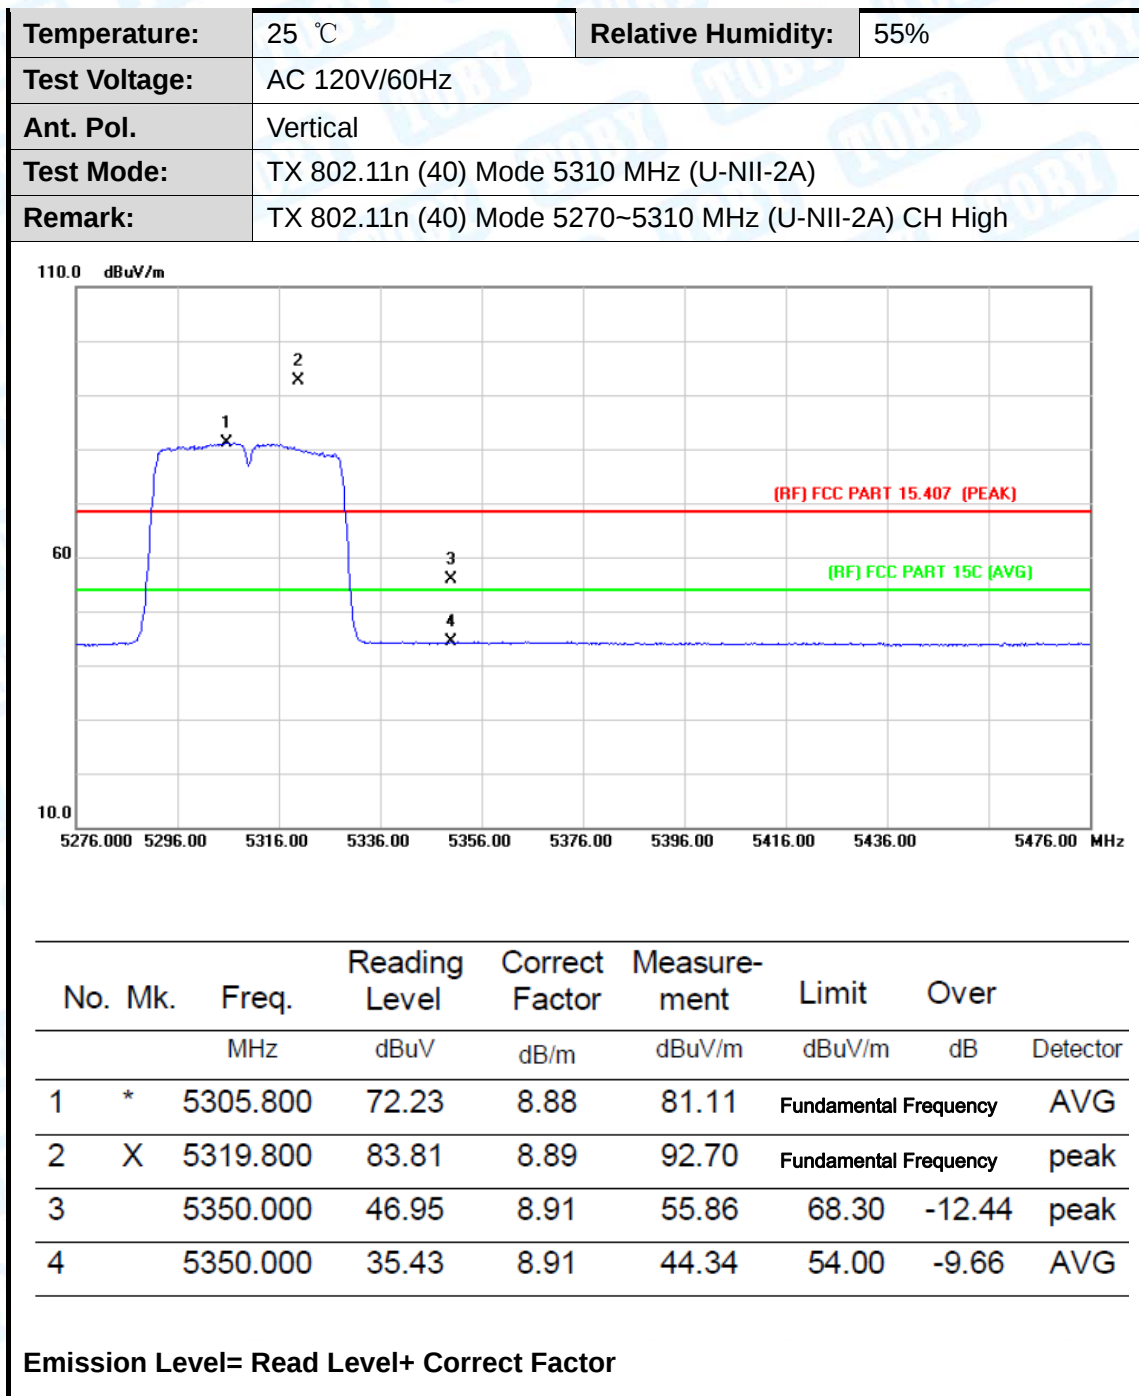

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11ac (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

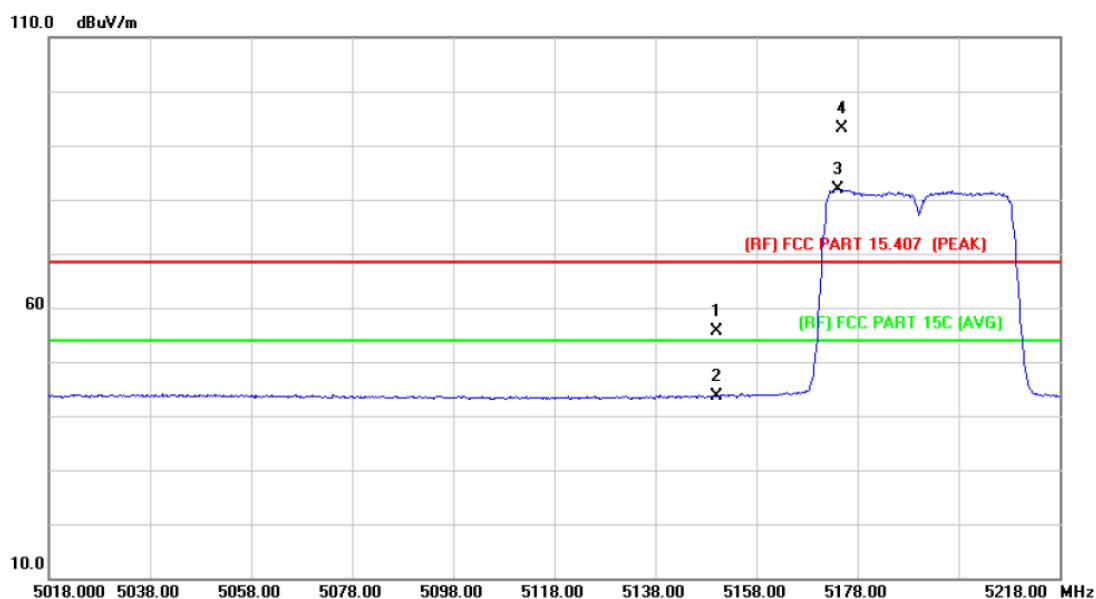

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	46.82	8.78	55.60	68.30	-12.70	peak
2		5150.000	34.89	8.78	43.67	54.00	-10.33	AVG
3	*	5174.000	73.06	8.79	81.85	Fundamental Frequency		AVG
4	X	5175.000	84.35	8.79	93.14	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5190 MHz (U-NII-1)		
Remark:	TX 802.11ac (40) Mode 5190~5230 MHz (U-NII-1) CH Low		

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5016.00 5036.00 5056.00 5076.00 5096.00 5116.00 5136.00 5156.00 5176.00 5216.00 MHz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	46.27	8.78	55.05	68.30	-13.25	peak
2		5150.000	35.03	8.78	43.81	54.00	-10.19	AVG
3	*	5176.600	75.93	8.79	84.72	Fundamental Frequency		AVG
4	X	5197.200	88.26	8.81	97.07	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5310 MHz (U-NII-2A)		
Remark:	TX 802.11ac (40) Mode 5270~5310 MHz (U-NII-2A) CH High		

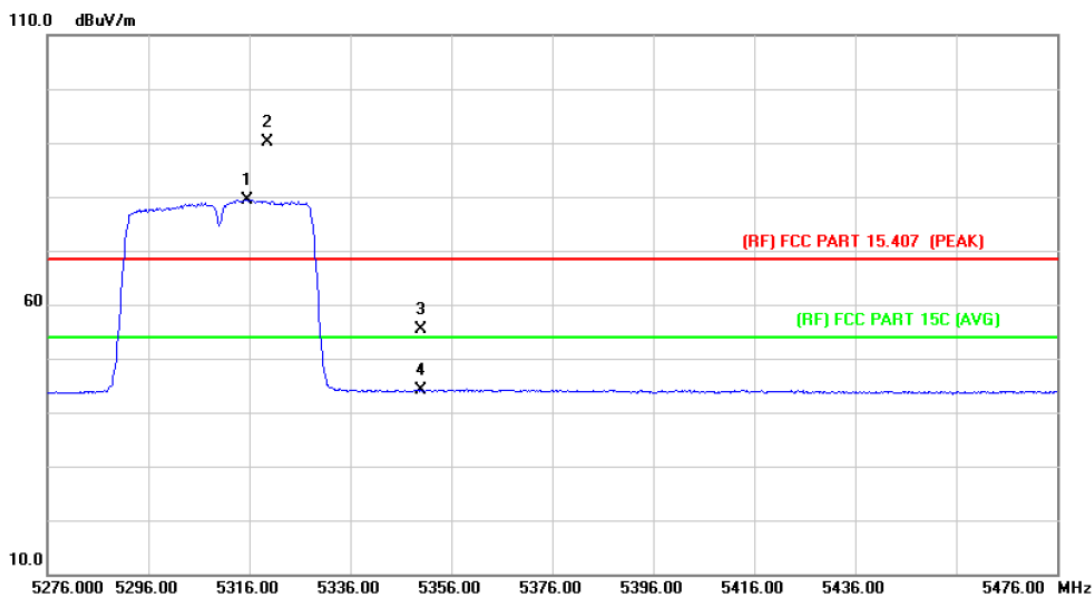

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5315.600	70.62	8.88	79.50	Fundamental Frequency		AVG
2	X	5319.600	81.14	8.89	90.03	Fundamental Frequency		peak
3		5350.000	46.51	8.91	55.42	68.30	-12.88	peak
4		5350.000	35.15	8.91	44.06	54.00	-9.94	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5310 MHz (U-NII-2A)		
Remark:	TX 802.11ac (40) Mode 5270~5310 MHz (U-NII-2A) CH High		

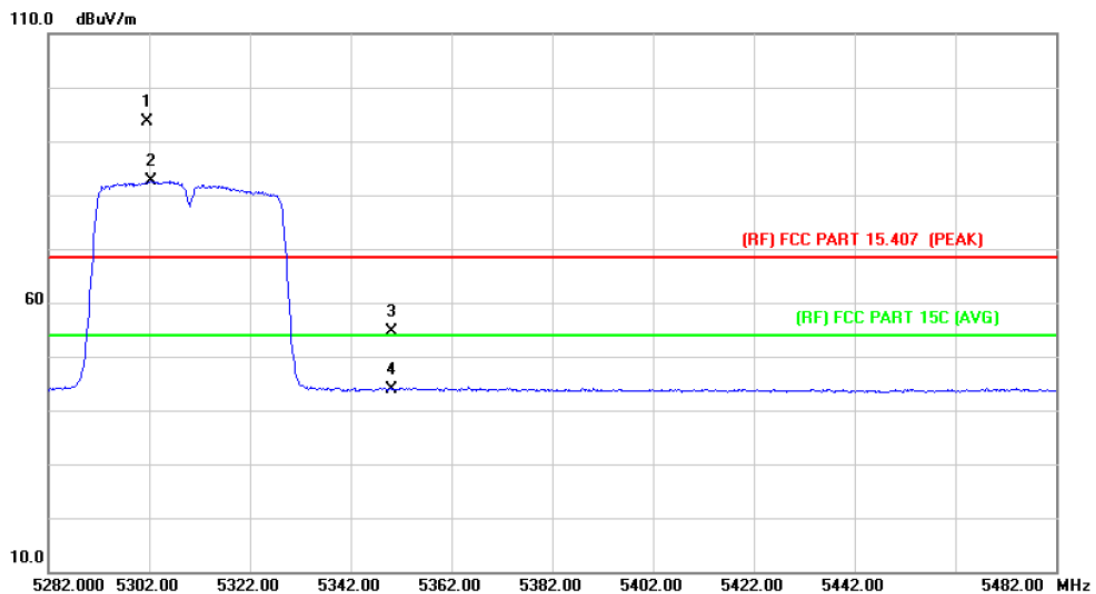

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5301.600	84.72	8.87	93.59	Fundamental Frequency		peak
2	*	5302.400	73.72	8.87	82.59	Fundamental Frequency		AVG
3		5350.000	45.76	8.91	54.67	68.30	-13.63	peak
4		5350.000	35.07	8.91	43.98	54.00	-10.02	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5510 MHz (U-NII-2C)		
Remark:	N/A		

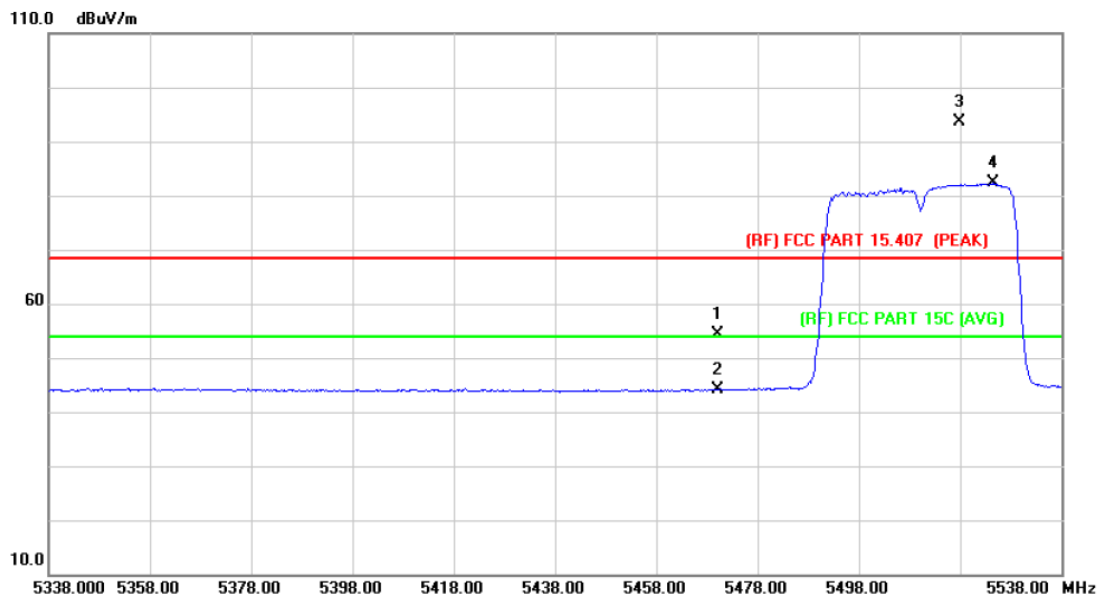


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	45.36	8.99	54.35	68.30	-13.95	peak
2		5470.000	35.12	8.99	44.11	54.00	-9.89	AVG
3	X	5517.800	84.54	9.03	93.57	Fundamental Frequency		peak
4	*	5524.600	73.24	9.02	82.26	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

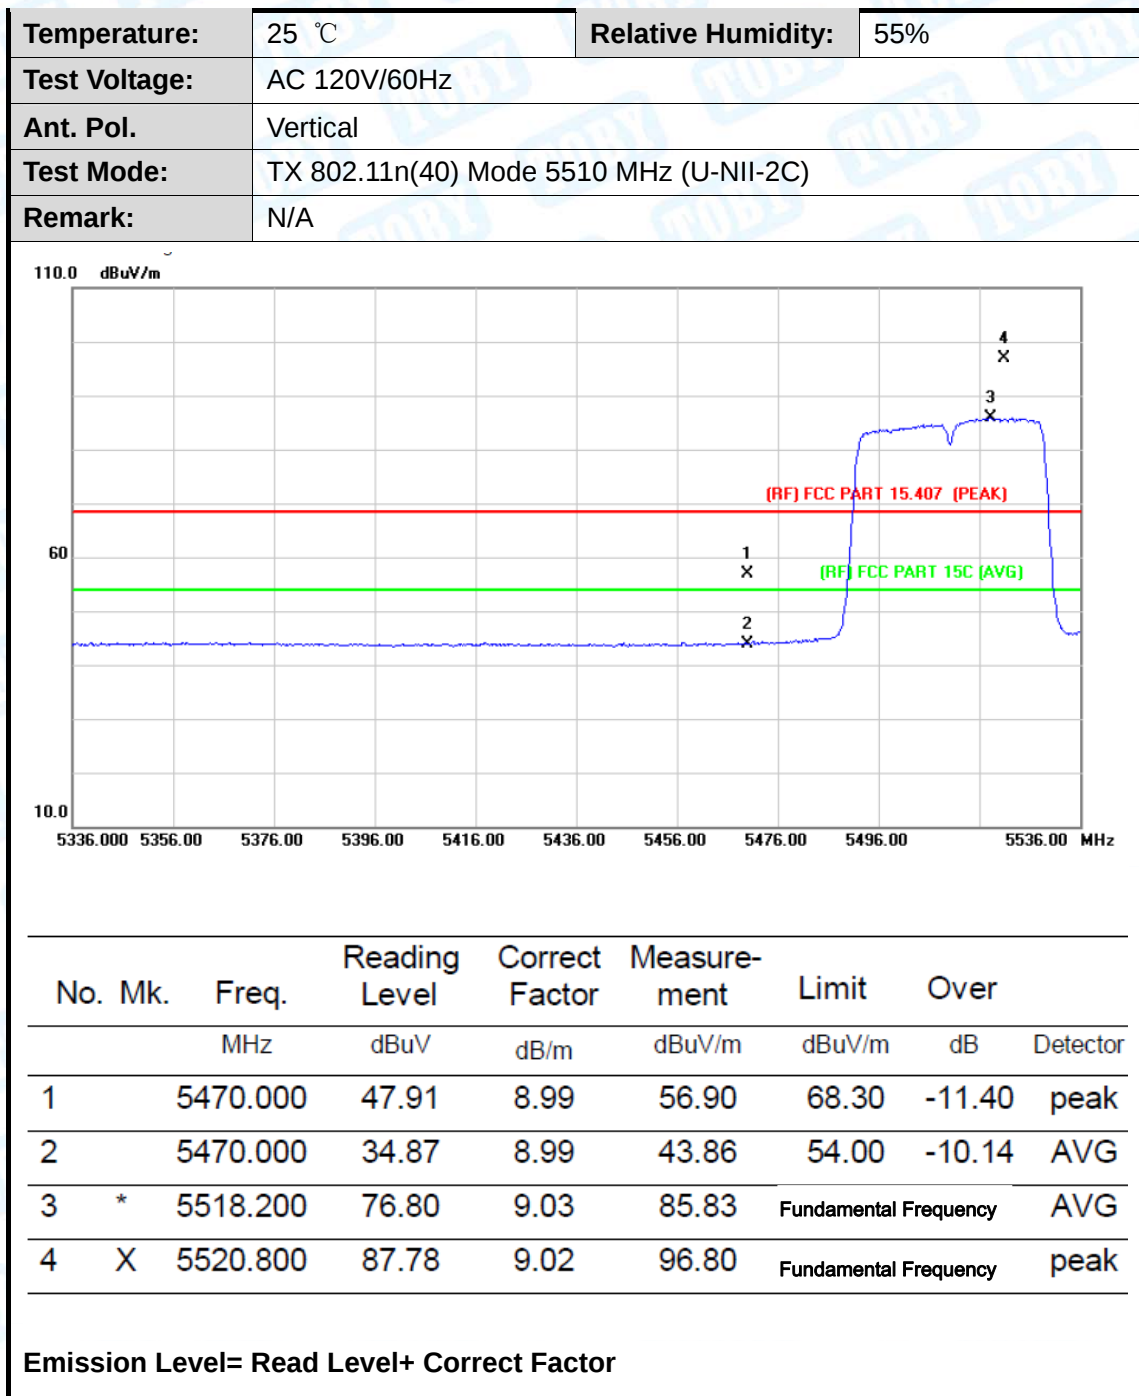


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5670 MHz (U-NII-2C)		
Remark:	N/A		

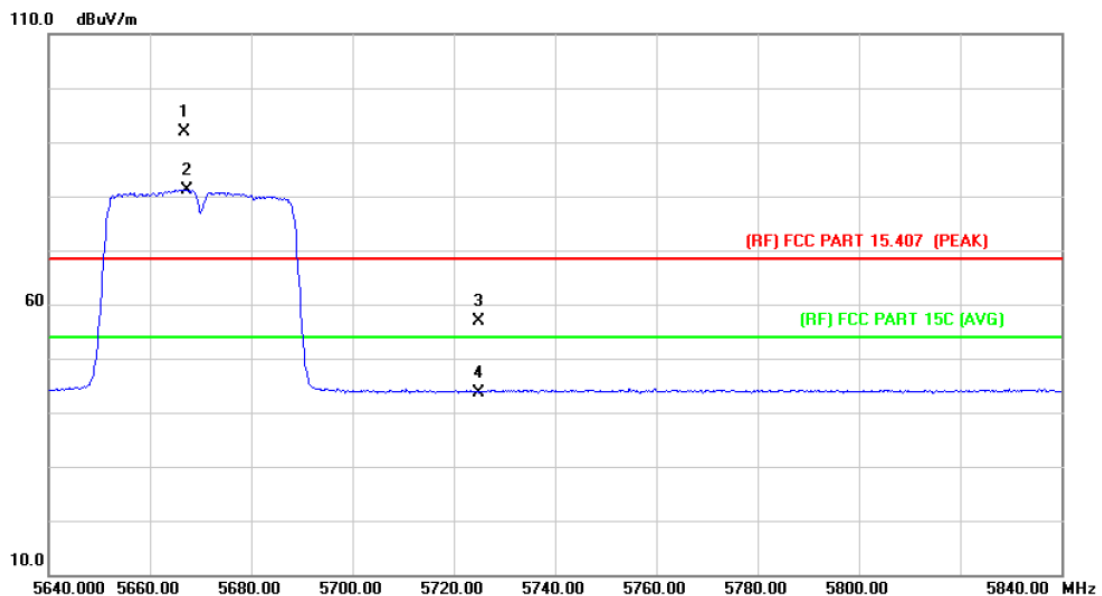

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5666.800	82.85	9.12	91.97	Fundamental Frequency		peak
2	*	5667.400	72.10	9.12	81.22	Fundamental Frequency		AVG
3		5725.000	47.76	9.15	56.91	68.30	-11.39	peak
4		5725.000	34.57	9.15	43.72	54.00	-10.28	AVG


Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5670 MHz (U-NII-2C)		
Remark:	N/A		

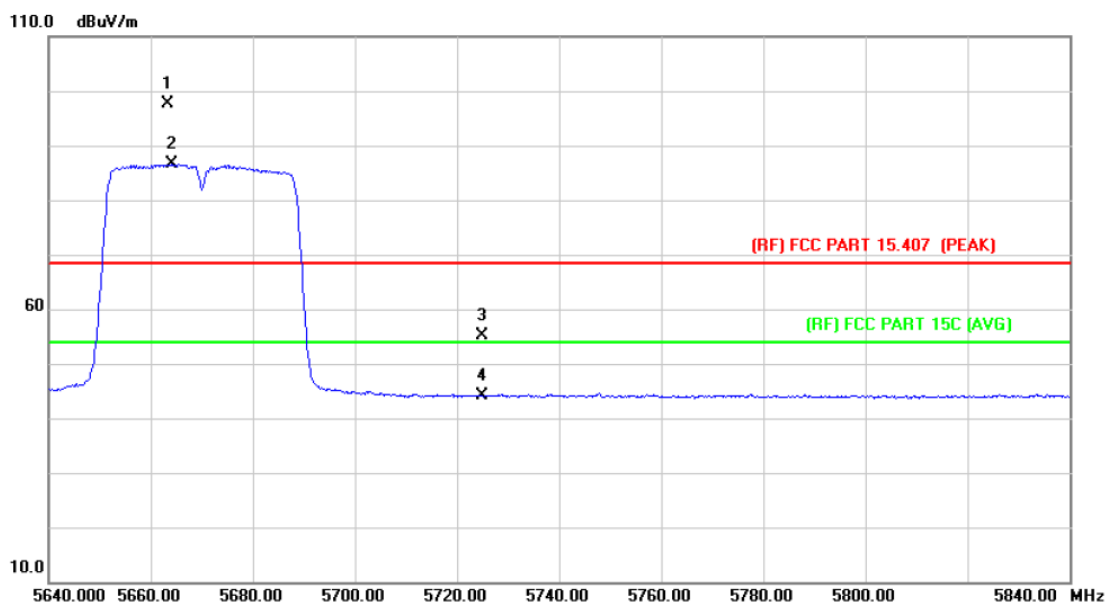


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5663.400	88.61	9.12	97.73	Fundamental Frequency		peak
2	*	5664.000	77.43	9.12	86.55	Fundamental Frequency		AVG
3		5725.000	45.93	9.15	55.08	68.30	-13.22	peak
4		5725.000	34.90	9.15	44.05	54.00	-9.95	AVG

Emission Level= Read Level+ Correct Factor

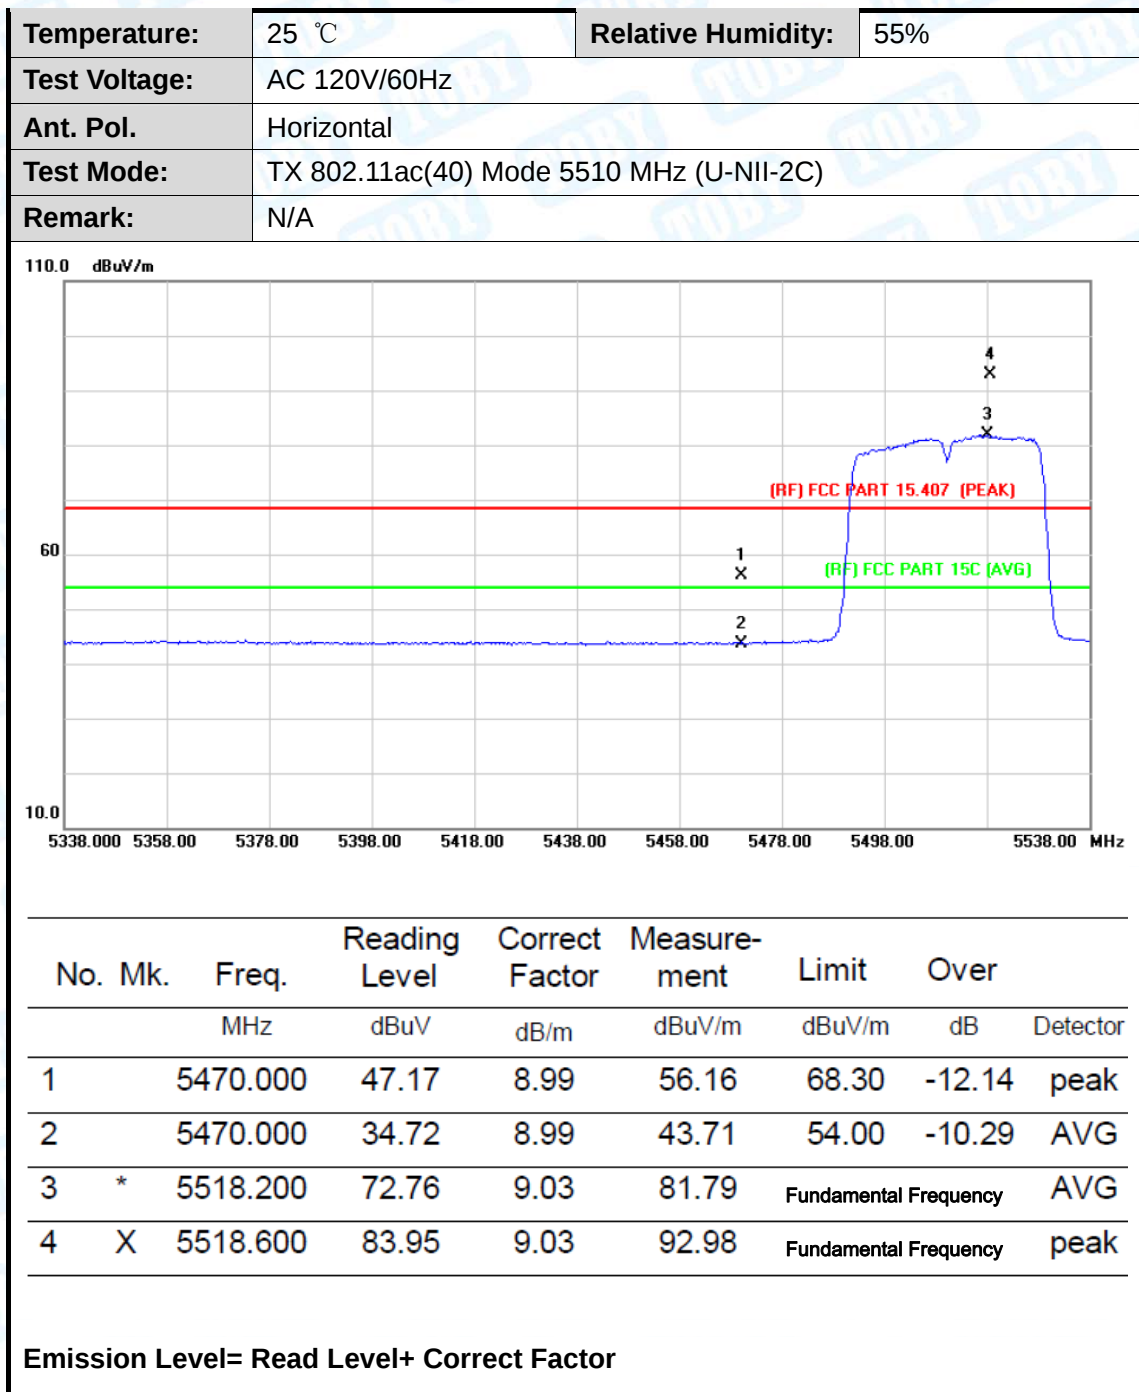

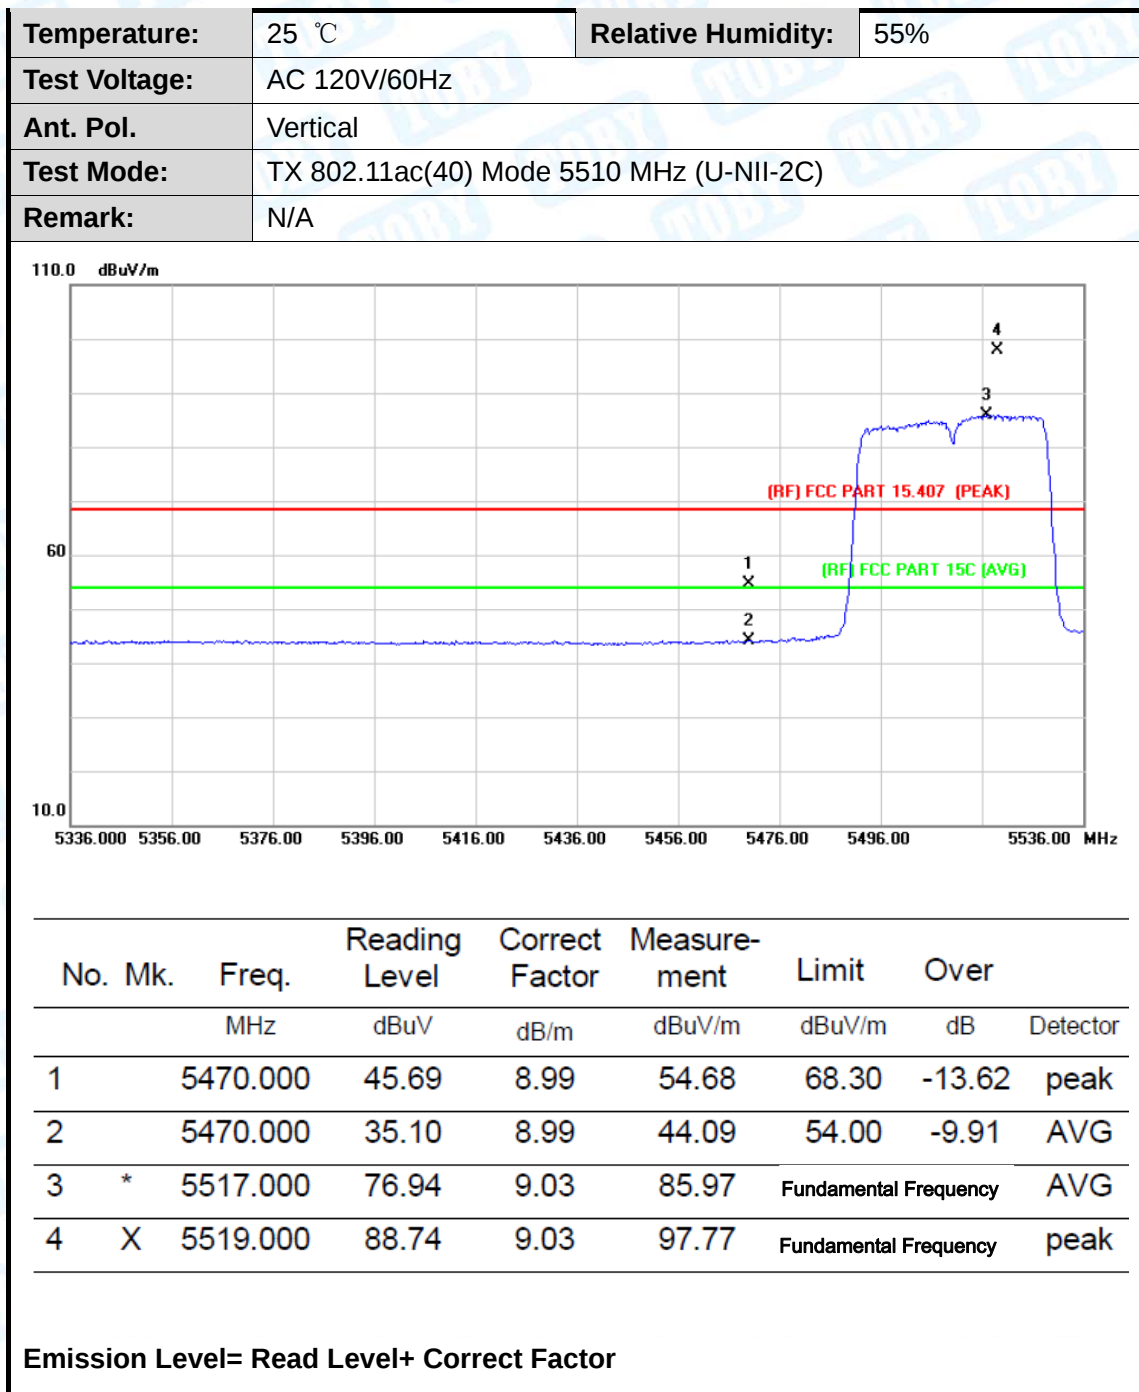


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5670 MHz (U-NII-2C)		
Remark:	N/A		

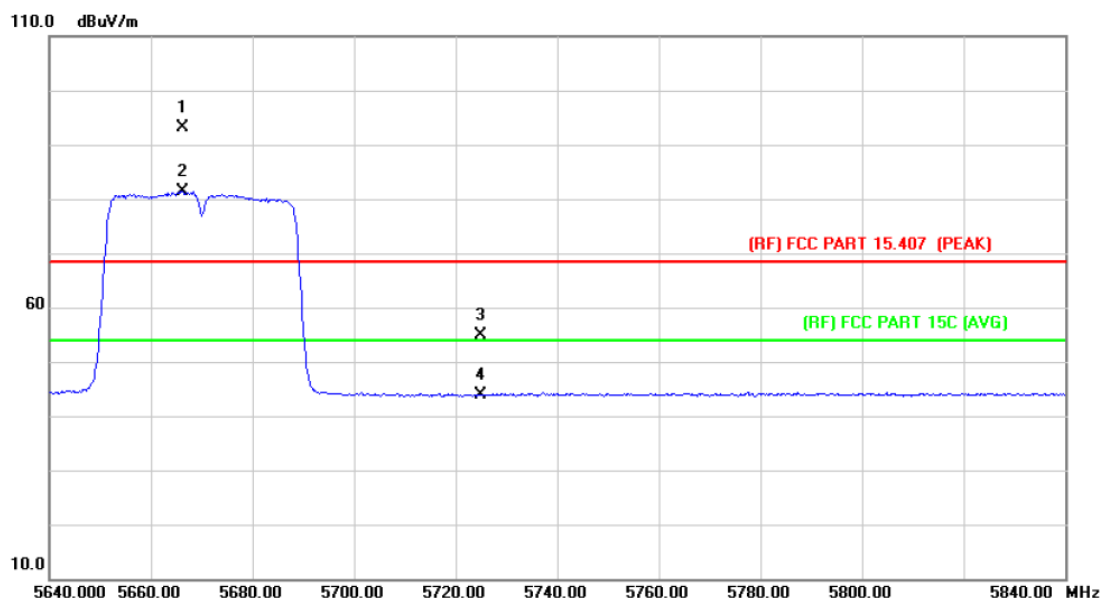


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5666.200	84.13	9.12	93.25	Fundamental Frequency		peak
2	*	5666.200	72.23	9.12	81.35	Fundamental Frequency		AVG
3		5725.000	45.70	9.15	54.85	68.30	-13.45	peak
4		5725.000	34.79	9.15	43.94	54.00	-10.06	AVG

Emission Level= Read Level+ Correct Factor

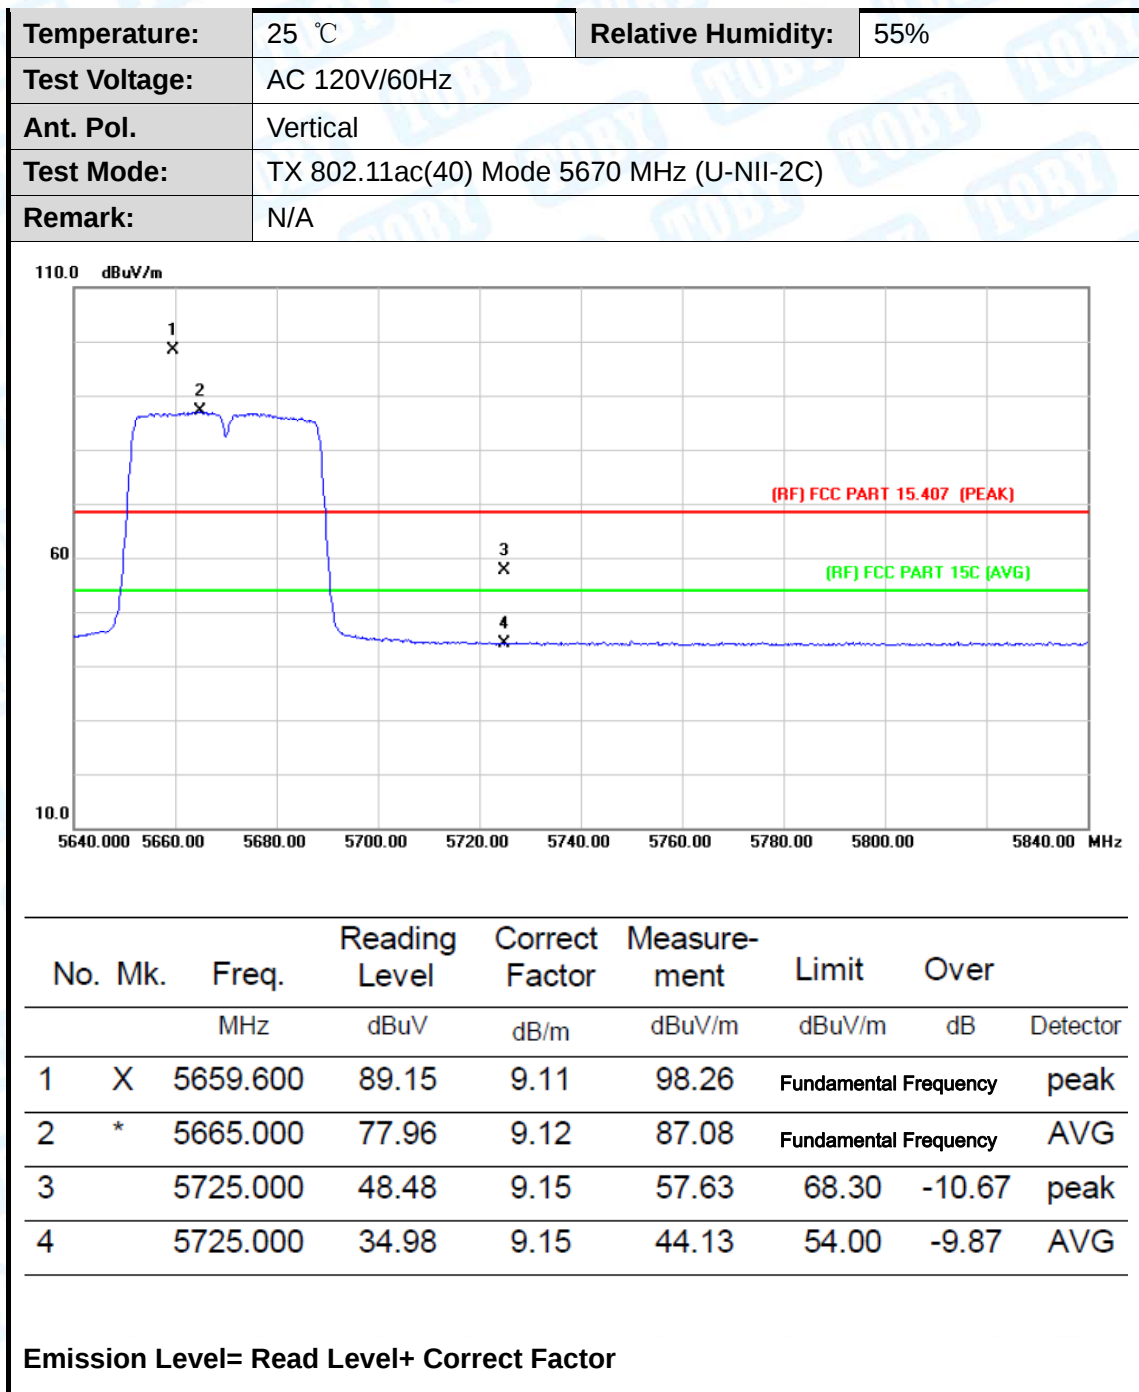


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	N/A		

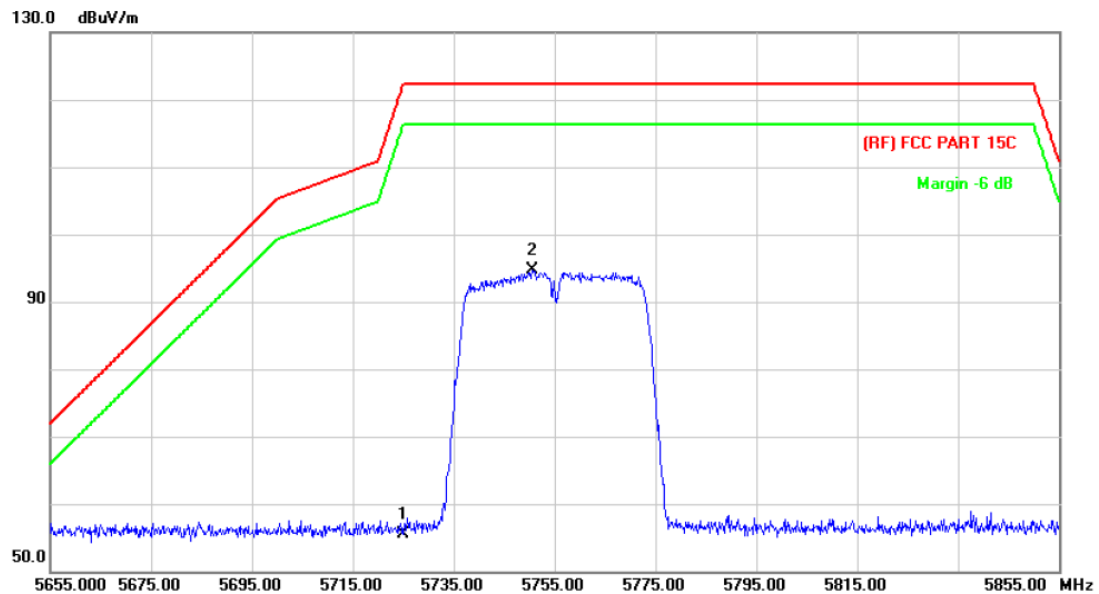

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	45.68	9.78	55.46	122.30	-66.84	peak
2	*	5750.600	84.78	9.85	94.63	122.30	-27.67	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	N/A		

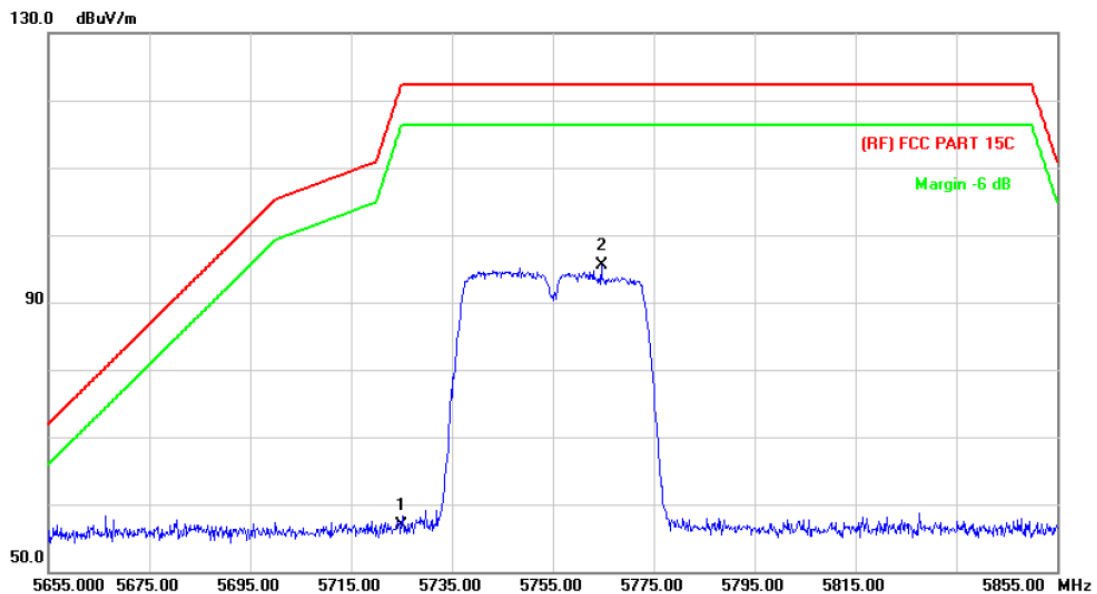

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.08	9.78	56.86	122.30	-65.44	peak
2	*	5764.600	85.54	9.89	95.43	122.30	-26.87	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

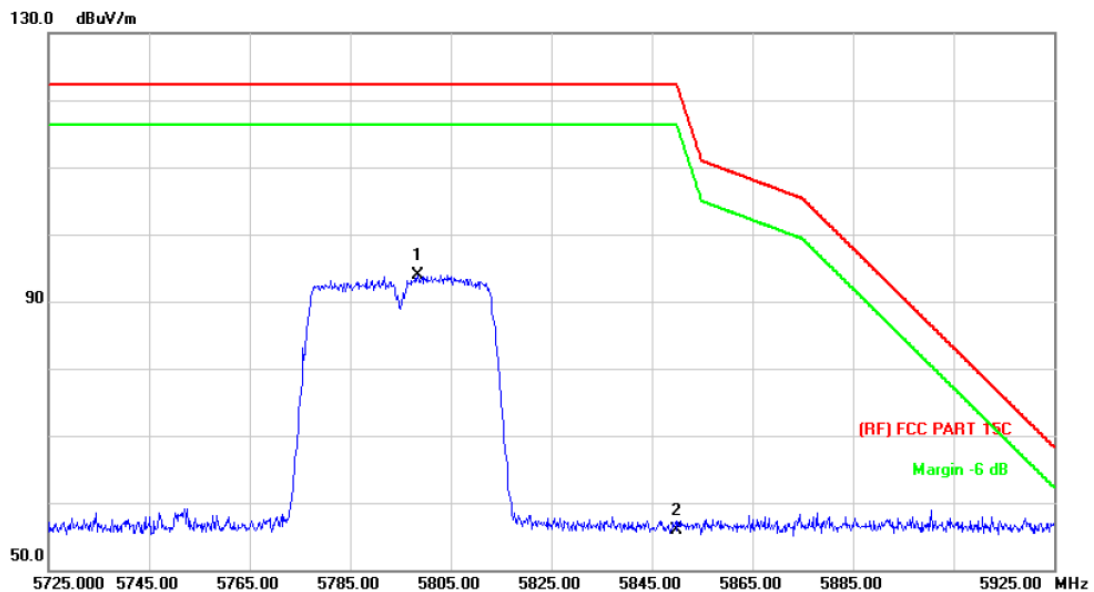

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5798.400	83.95	9.98	93.93	122.30	-28.37	peak
2		5850.000	45.87	10.13	56.00	122.30	-66.30	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

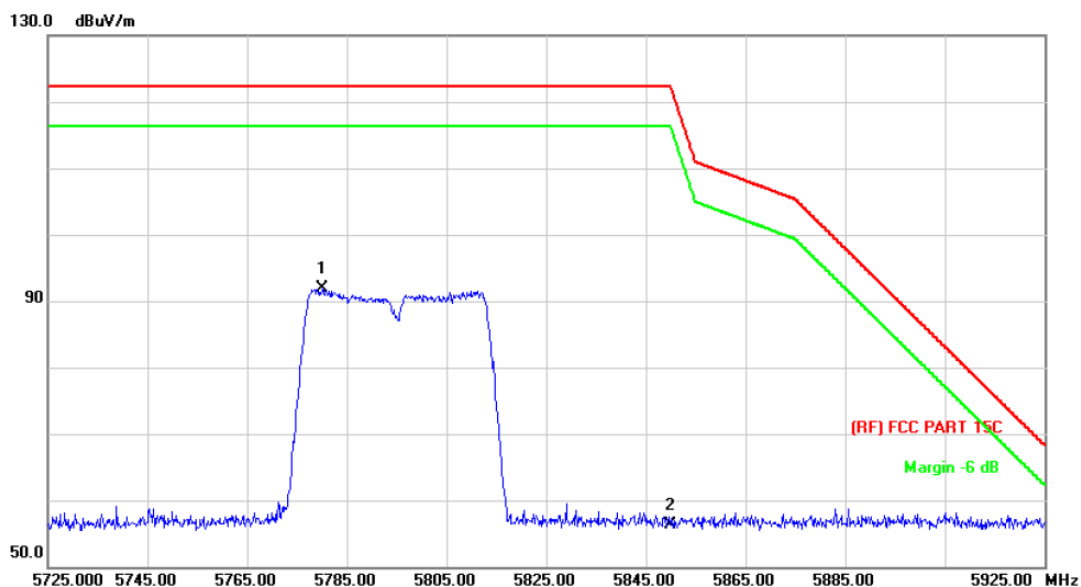

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5780.200	81.89	9.93	91.82	122.30	-30.48	peak
2		5850.000	46.27	10.13	56.40	122.30	-65.90	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5755 MHz (U-NII-3)		
Remark:	N/A		

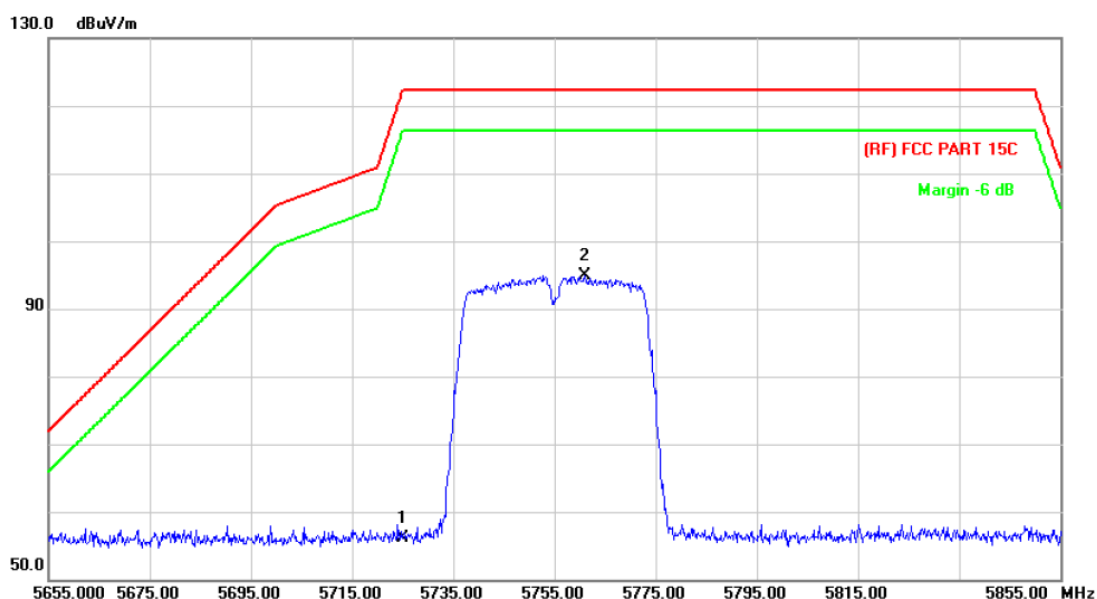

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	46.28	9.78	56.06	122.30	-66.24	peak
2	*	5761.000	85.11	9.87	94.98	122.30	-27.32	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5755 MHz (U-NII-3)		
Remark:	N/A		

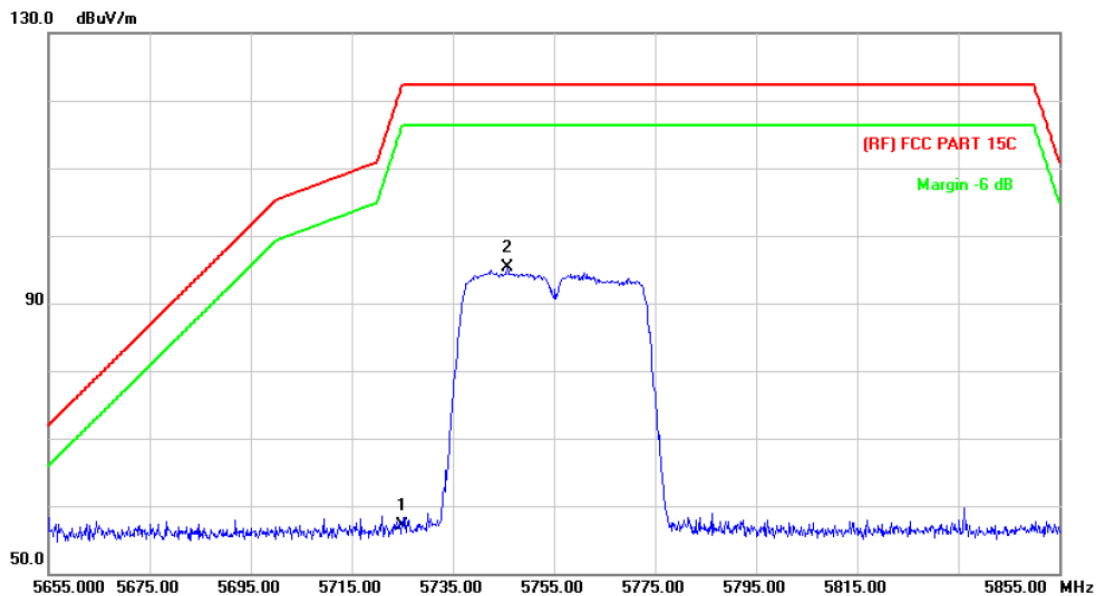

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.23	9.78	57.01	122.30	-65.29	peak
2	*	5745.800	85.43	9.83	95.26	122.30	-27.04	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

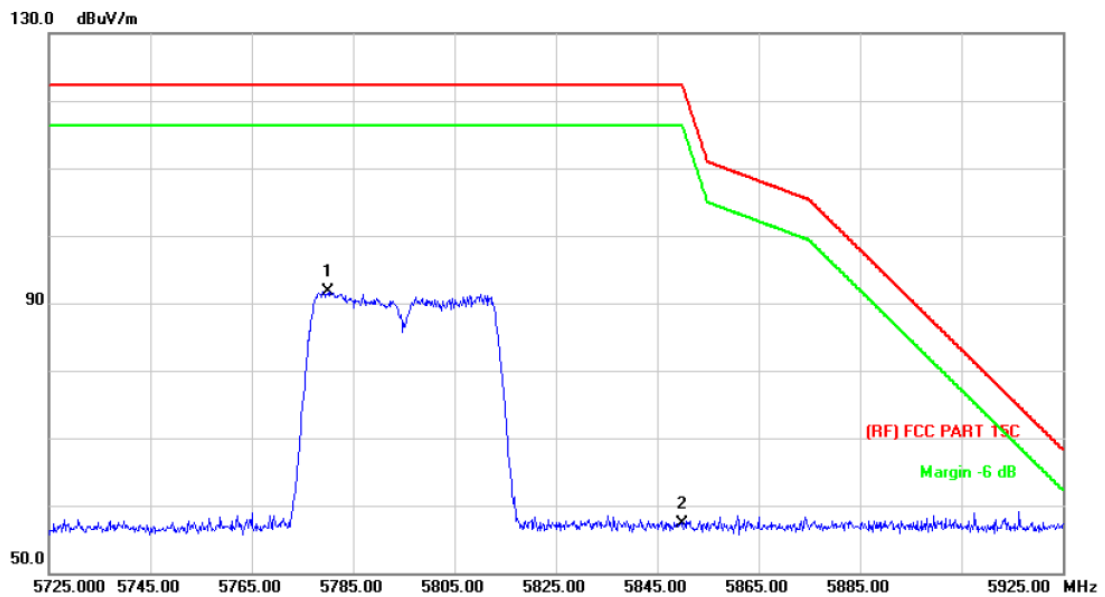

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5780.200	81.79	9.93	91.72	122.30	-30.58	peak
2		5850.000	47.20	10.13	57.33	122.30	-64.97	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5795 MHz (U-NII-3)		
Remark:	N/A		

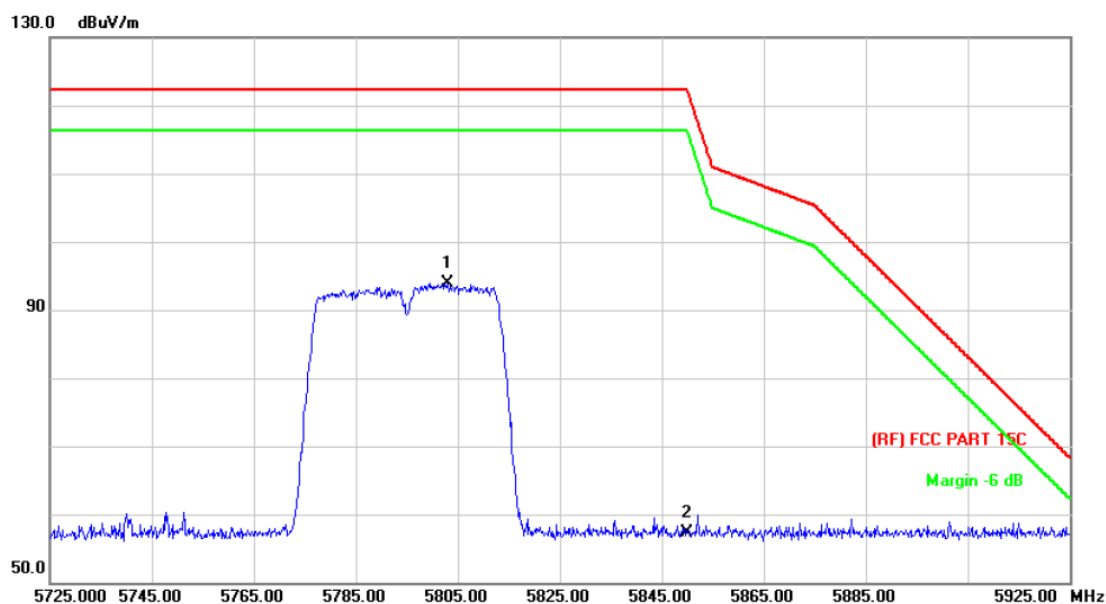


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5803.000	83.85	10.00	93.85	122.30	-28.45	peak
2		5850.000	47.11	10.13	57.24	122.30	-65.06	peak

Emission Level= Read Level+ Correct Factor

ac(80)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5210MHz (U-NII-1)		
Remark:	N/A		

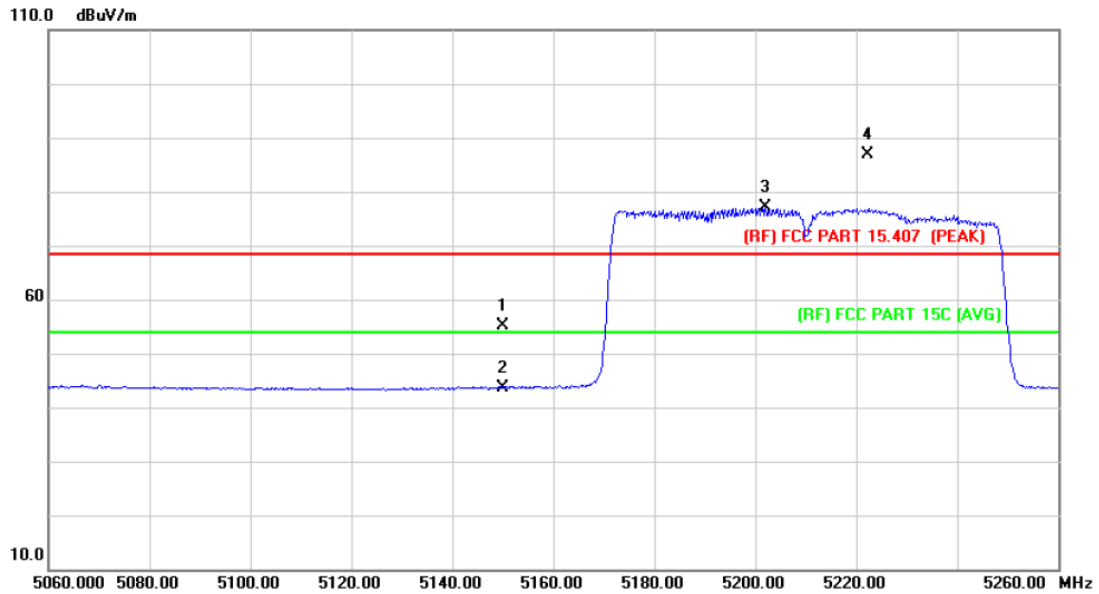

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	46.36	8.78	55.14	68.30	-13.16 peak
2		5150.000	34.94	8.78	43.72	54.00	-10.28 AVG
3	*	5202.000	68.31	8.81	77.12	Fundamental Frequency AVG	
4	X	5222.200	77.94	8.82	86.76	Fundamental Frequency peak	


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(80) Mode 5210MHz (U-NII-1)		
Remark:	N/A		

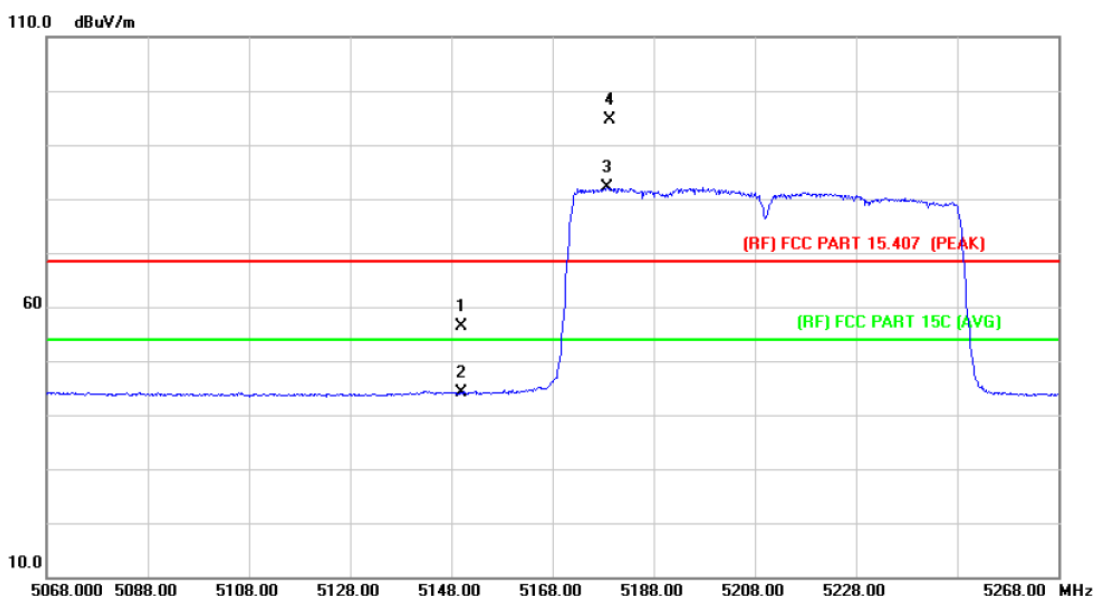


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	47.66	8.78	56.44	68.30	-11.86	peak
2		5150.000	35.28	8.78	44.06	54.00	-9.94	AVG
3	*	5178.800	73.32	8.79	82.11	Fundamental Frequency		AVG
4	X	5179.400	85.81	8.79	94.60	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

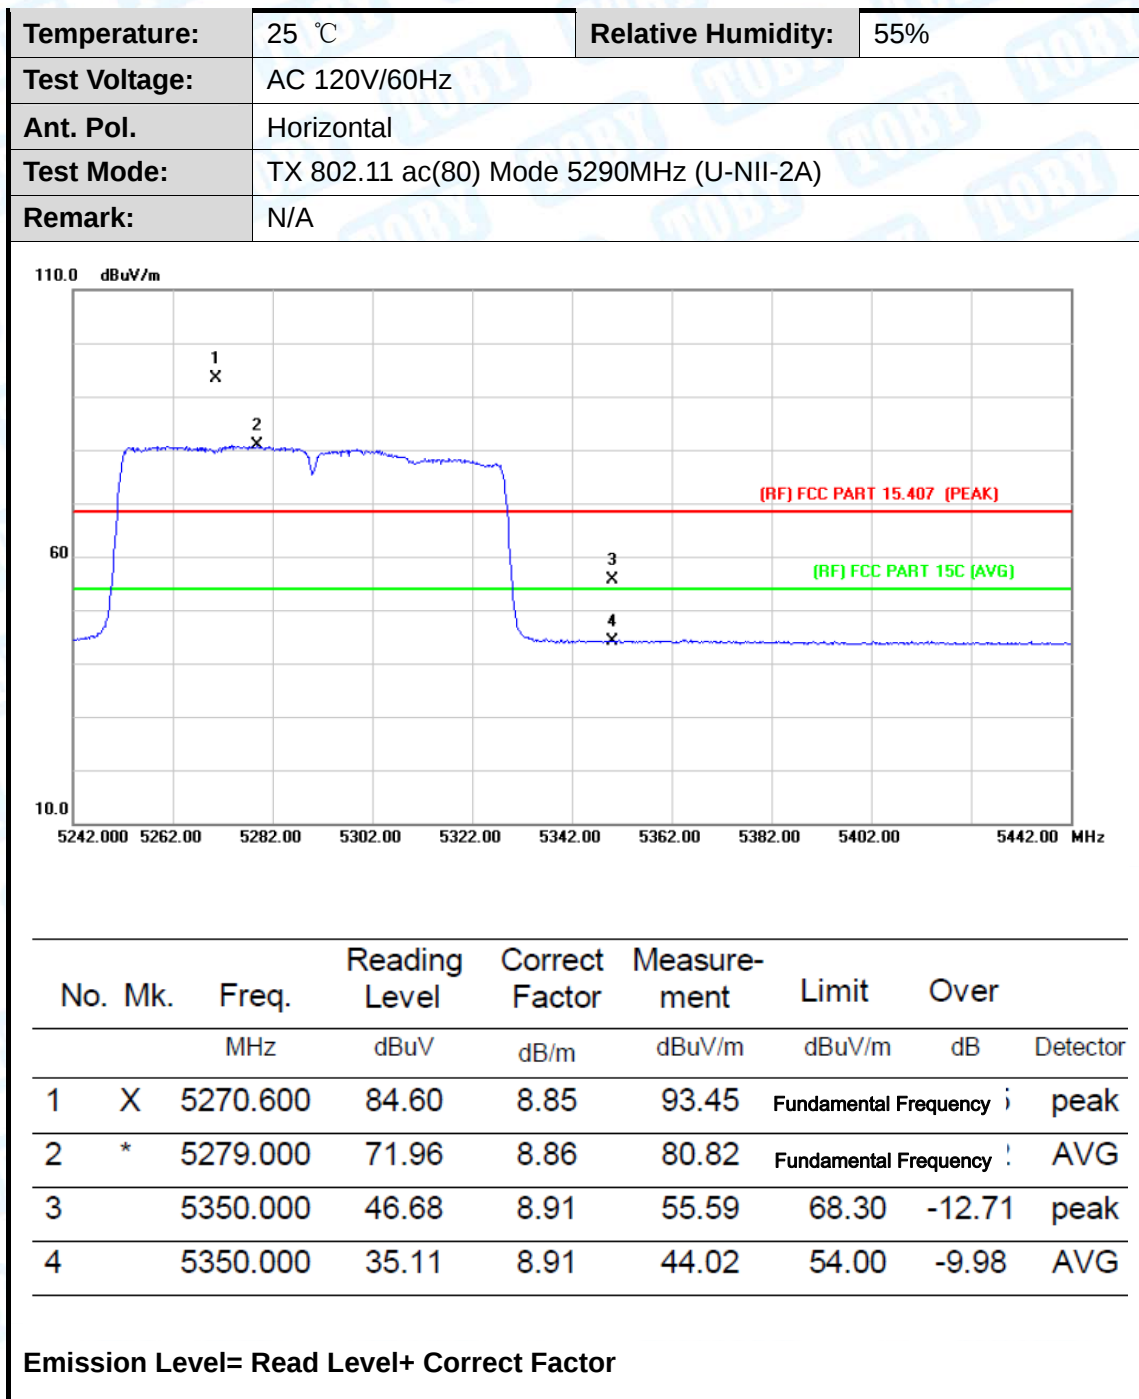


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(80) Mode 5290MHz (U-NII-2A)		
Remark:	N/A		

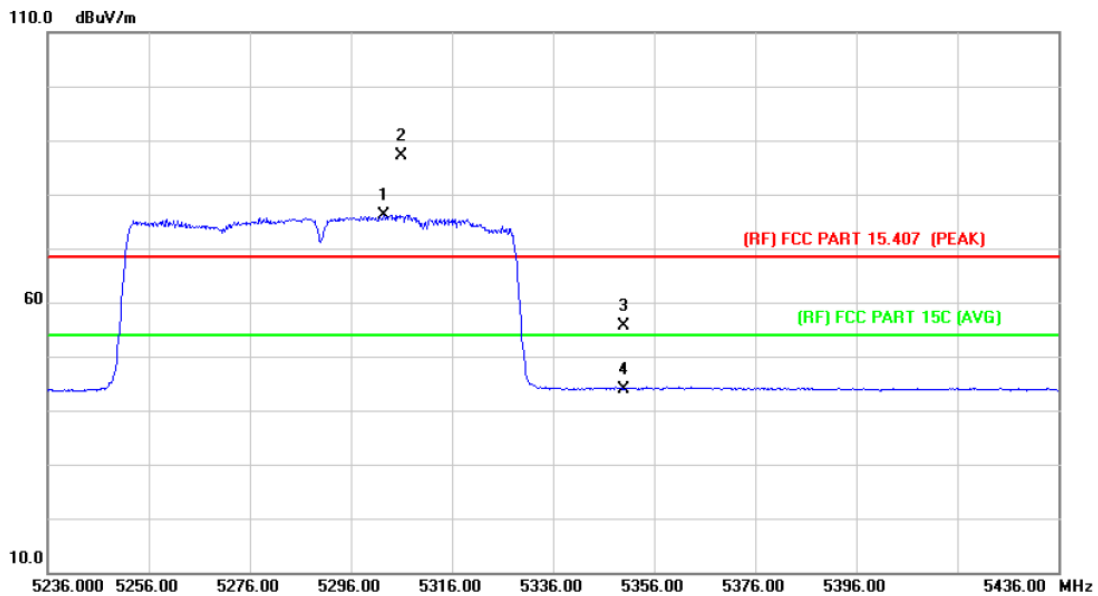

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5302.600	67.35	8.87	76.22	Fundamental Frequency		AVG
2	X	5306.000	78.20	8.88	87.08	Fundamental Frequency		peak
3		5350.000	46.78	8.91	55.69	68.30	-12.61	peak
4		5350.000	35.08	8.91	43.99	54.00	-10.01	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5530MHz (U-NII-2C)		
Remark:	N/A		

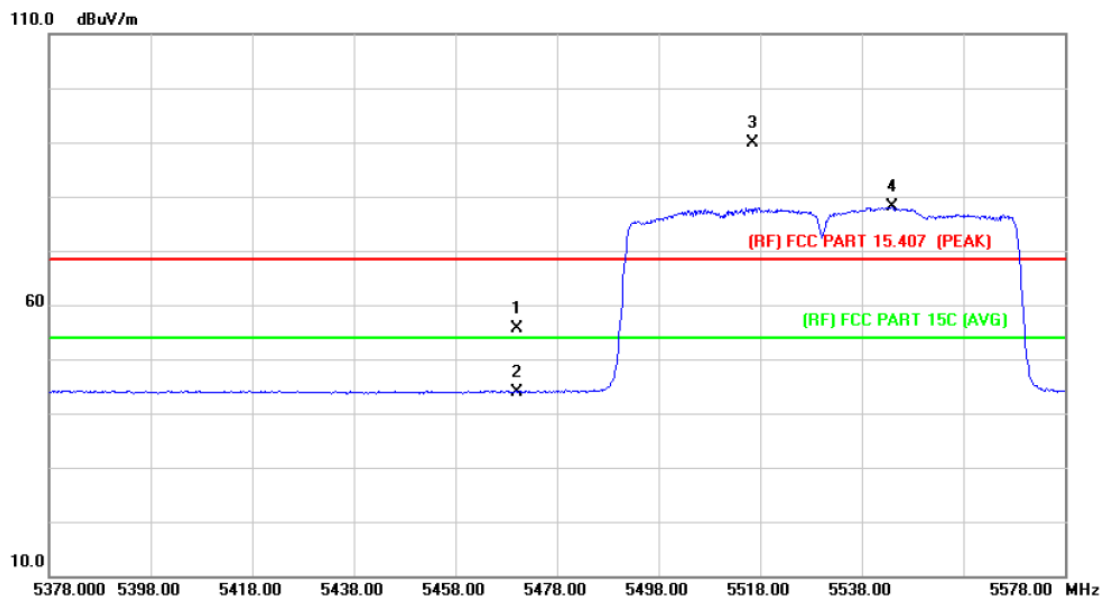


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	46.73	8.99	55.72	68.30	-12.58	peak
2		5470.000	35.00	8.99	43.99	54.00	-10.01	AVG
3	X	5516.600	80.81	9.02	89.83	Fundamental Frequency		peak
4	*	5544.000	69.01	9.04	78.05	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

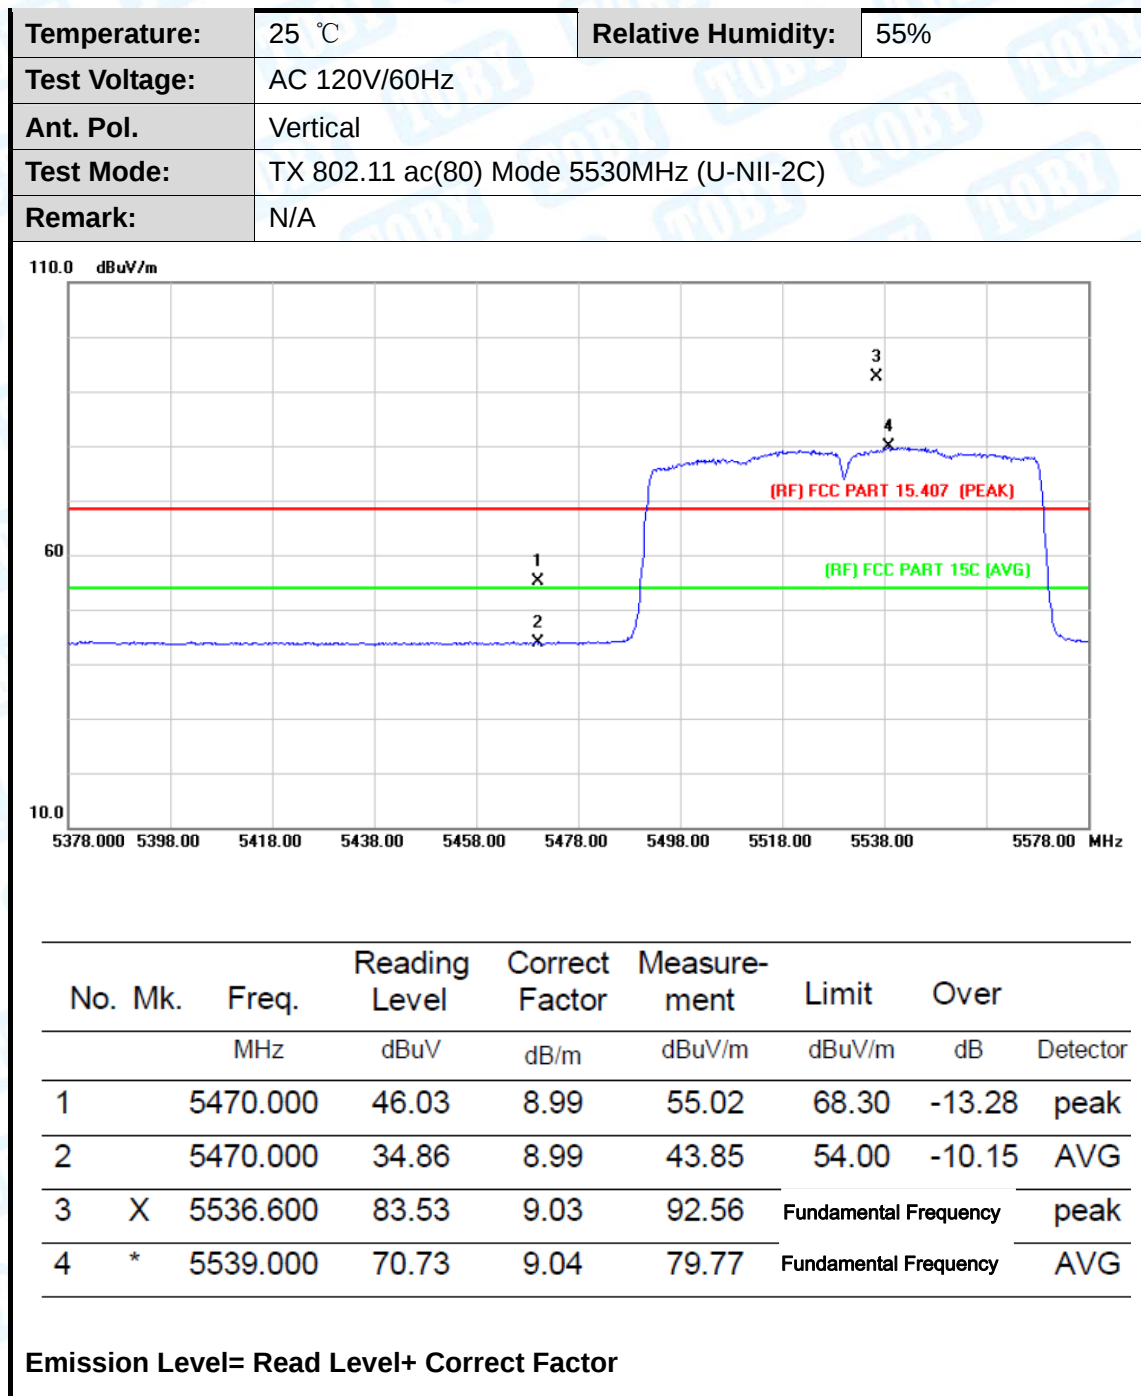


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3)		
Remark:	N/A		

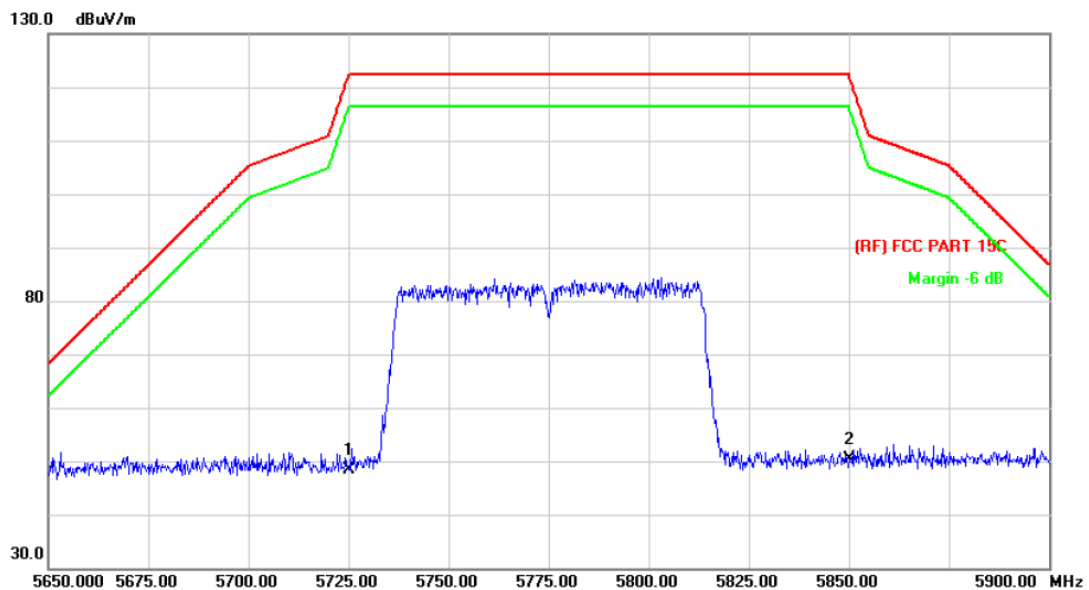

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	32.46	15.87	48.33	122.30	-73.97	peak
2	*	5850.000	33.66	16.83	50.49	122.30	-71.81	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3)		
Remark:	N/A		


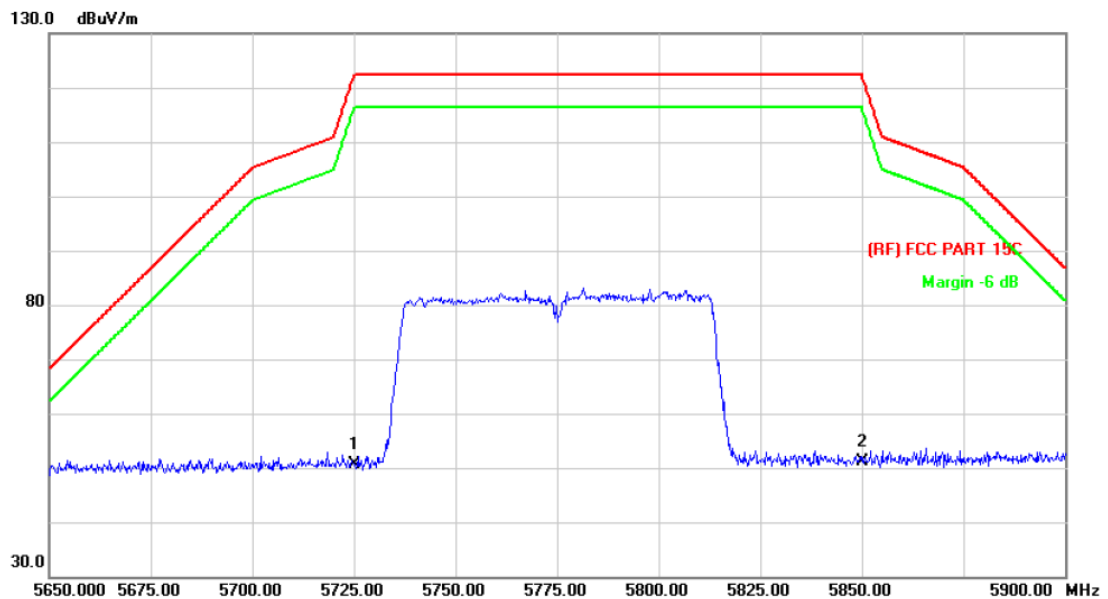


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	34.74	15.87	50.61	122.30	-71.69	peak
2	*	5850.000	34.22	16.83	51.05	122.30	-71.25	peak



Emission Level= Read Level+ Correct Factor

(2) Conducted Test



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a mode(U-NII-1) / 5180 ~ 5240MHz CH Low-5180MHz TX 802.11a mode(U-NII-2A) / 5260~ 5320MHz CH High-5320MHz		
Remark:	The EUT is programed in continuously transmitting mode		

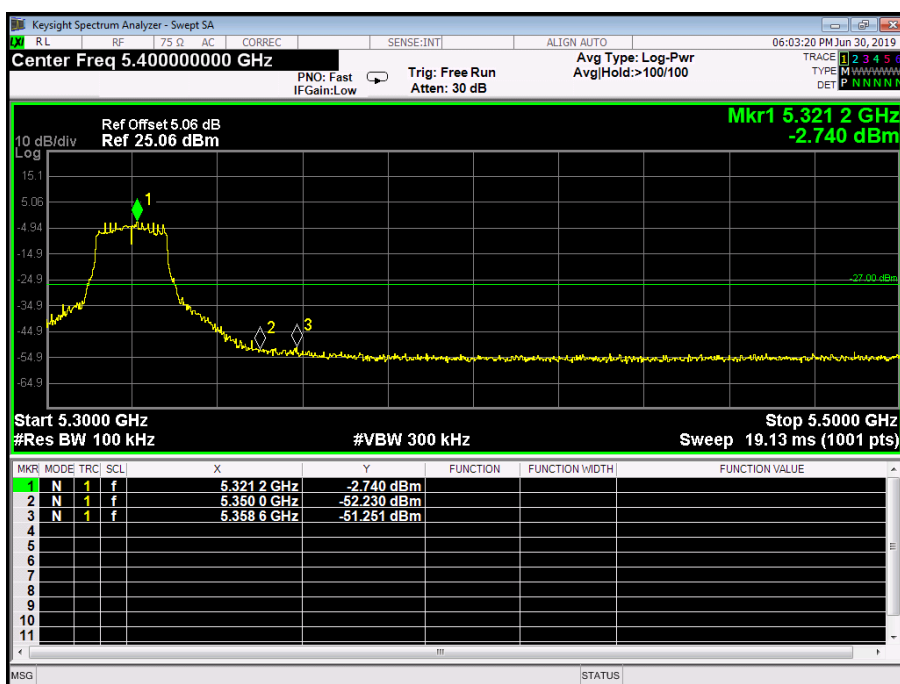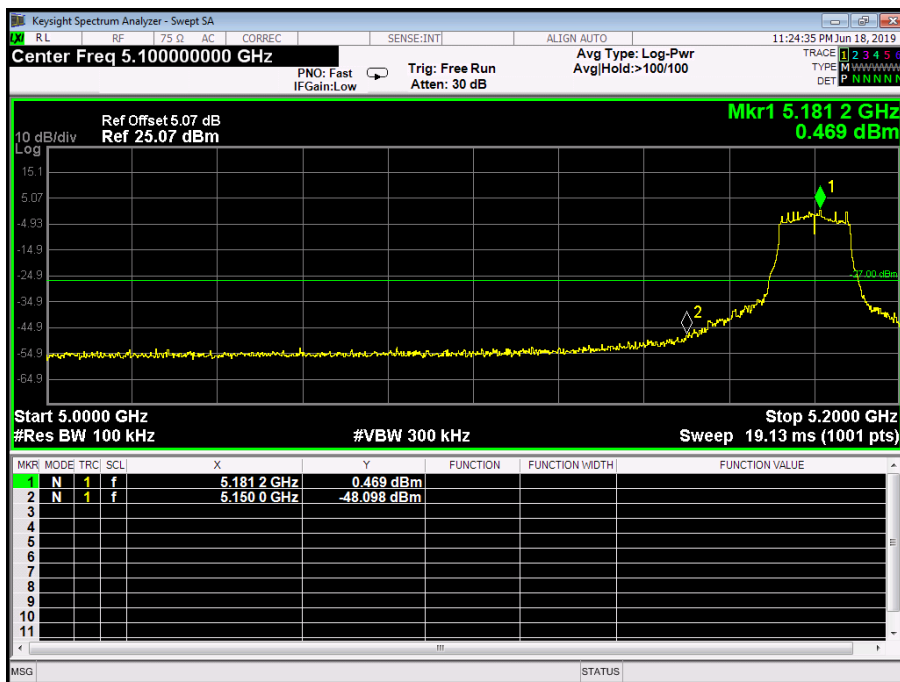



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(20) mode(U-NII-1) / 5180 ~ 5240MHz CH Low-5180MHz TX 802.11 n(20) mode(U-NII-2A) / 5260~ 5320MHz CH High-5320MHz		
Remark:	The EUT is programmed in continuously transmitting mode		

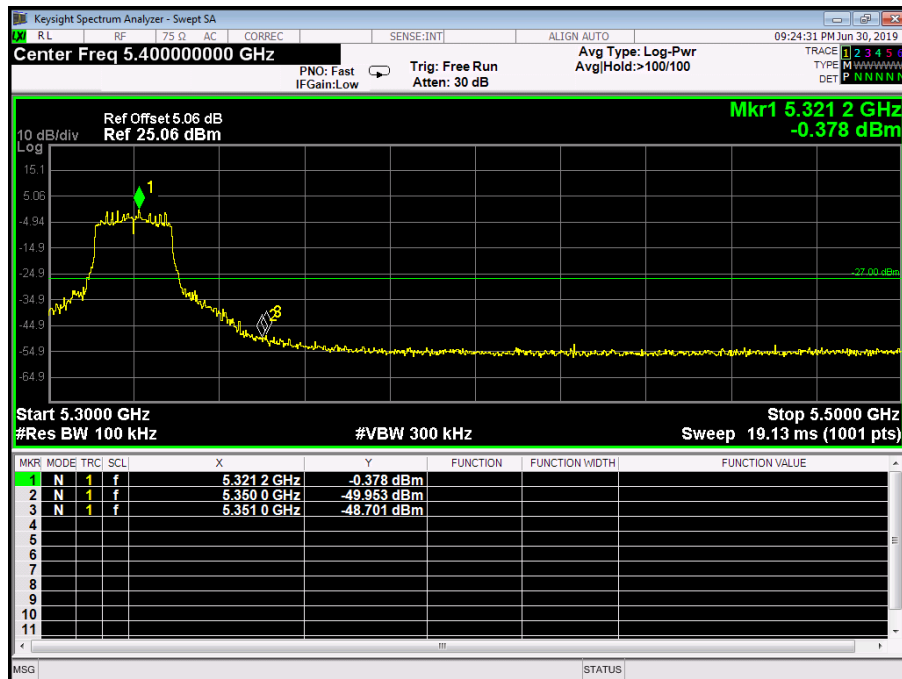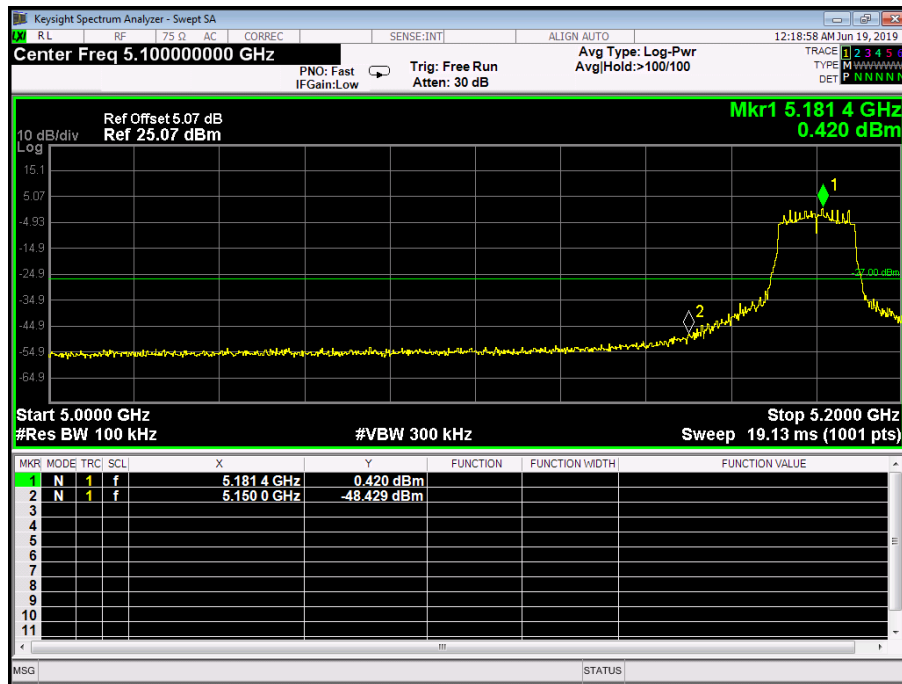



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(20) mode(U-NII-1) / 5180 ~ 5240MHz CH Low-5180MHz TX 802.11 ac(20) mode(U-NII-2A) / 5260~ 5320MHz CH High-5320MHz		
Remark:	The EUT is programed in continuously transmitting mode		

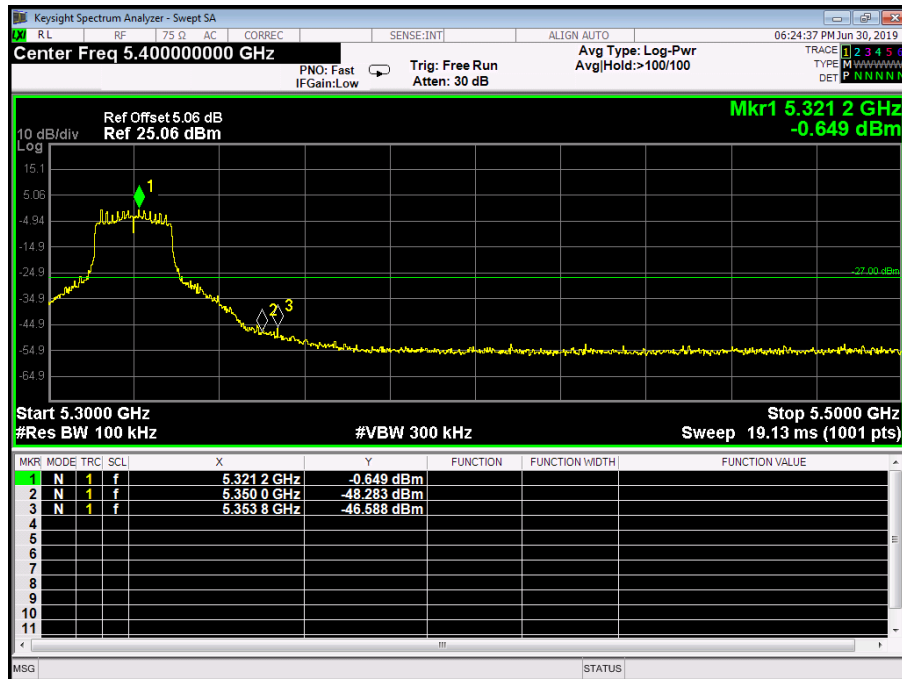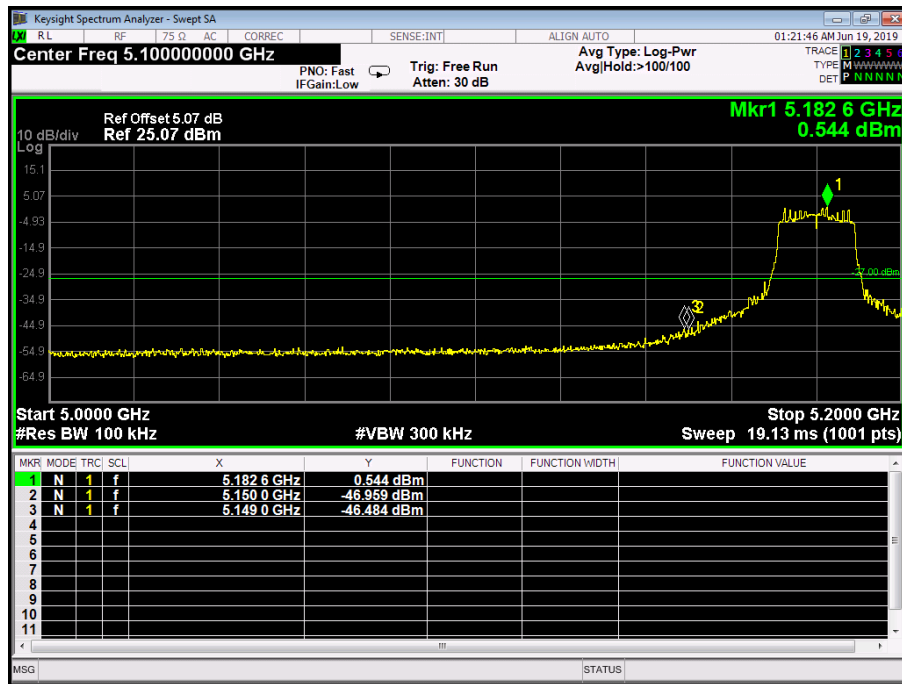



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5500MHz /5700MHz (U-NII-2C)		
Remark:	The EUT is programed in continuously transmitting mode		

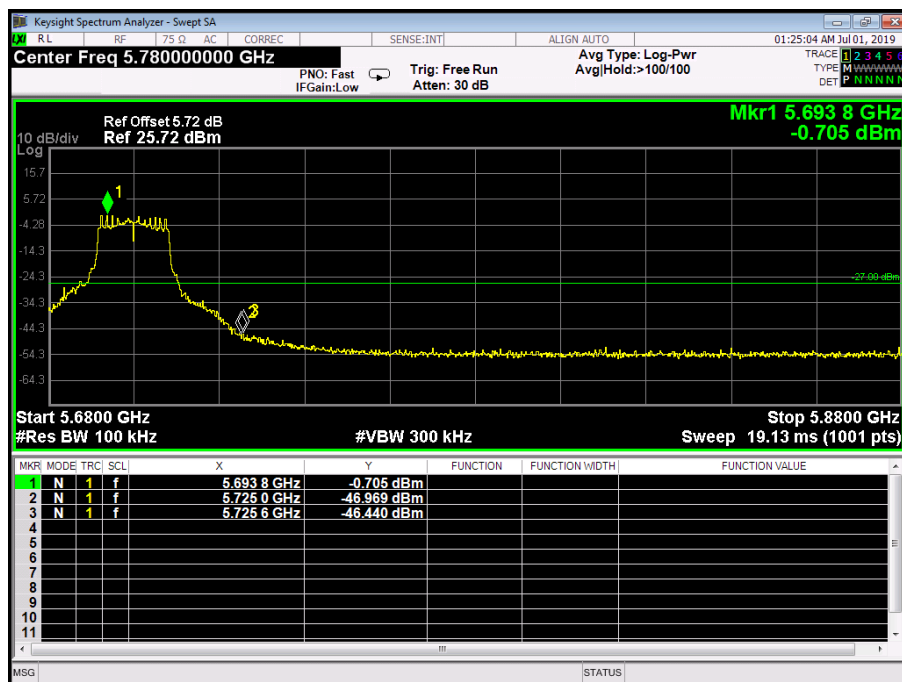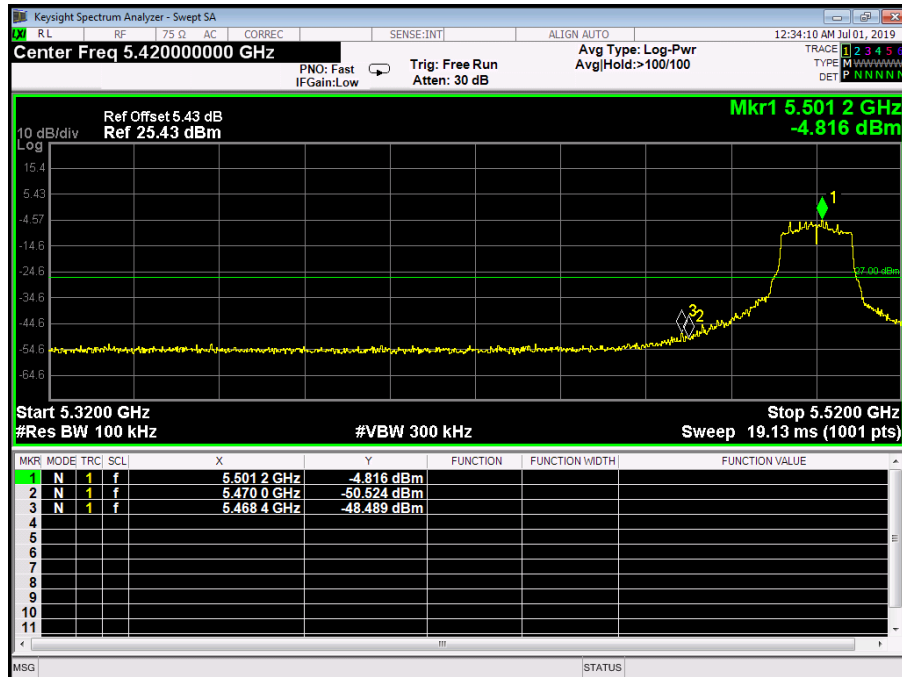



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(20) Mode 5500MHz /5700MHz (U-NII-2C)		
Remark:	The EUT is programed in continuously transmitting mode		

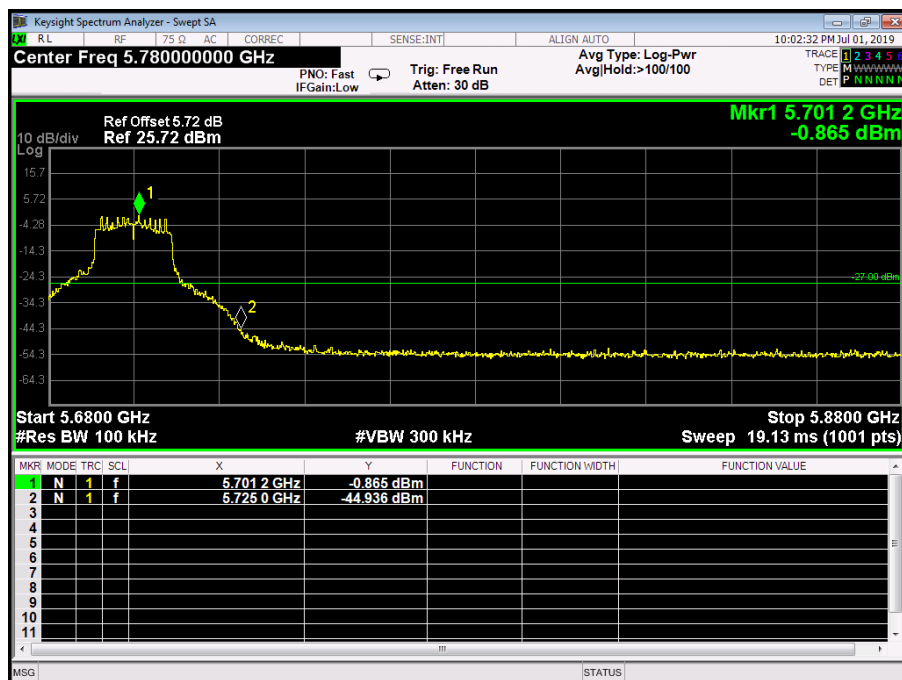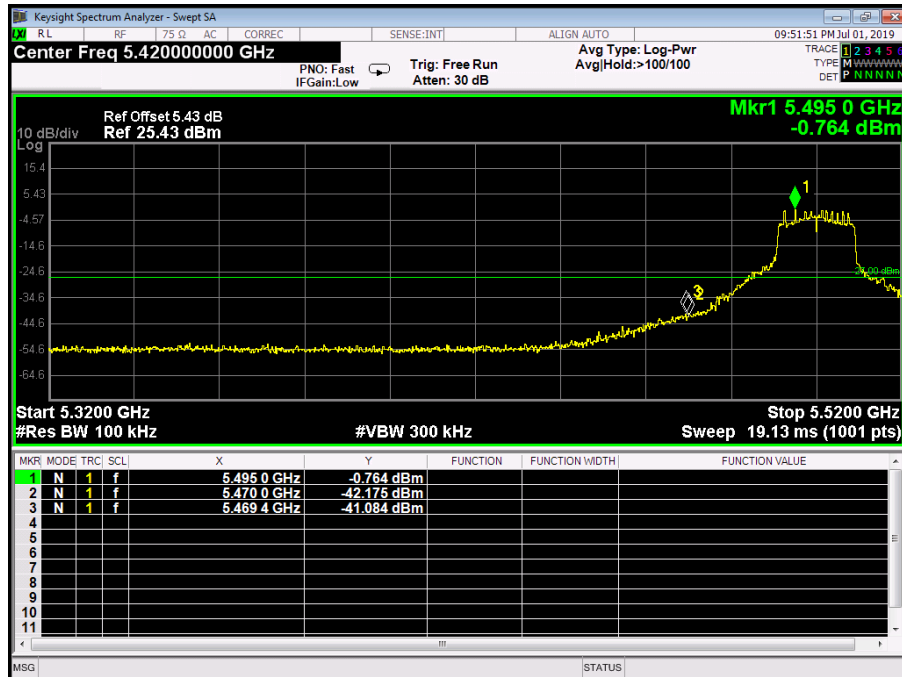



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(20) Mode 5500MHz /5700MHz (U-NII-2C)		
Remark:	The EUT is programed in continuously transmitting mode		

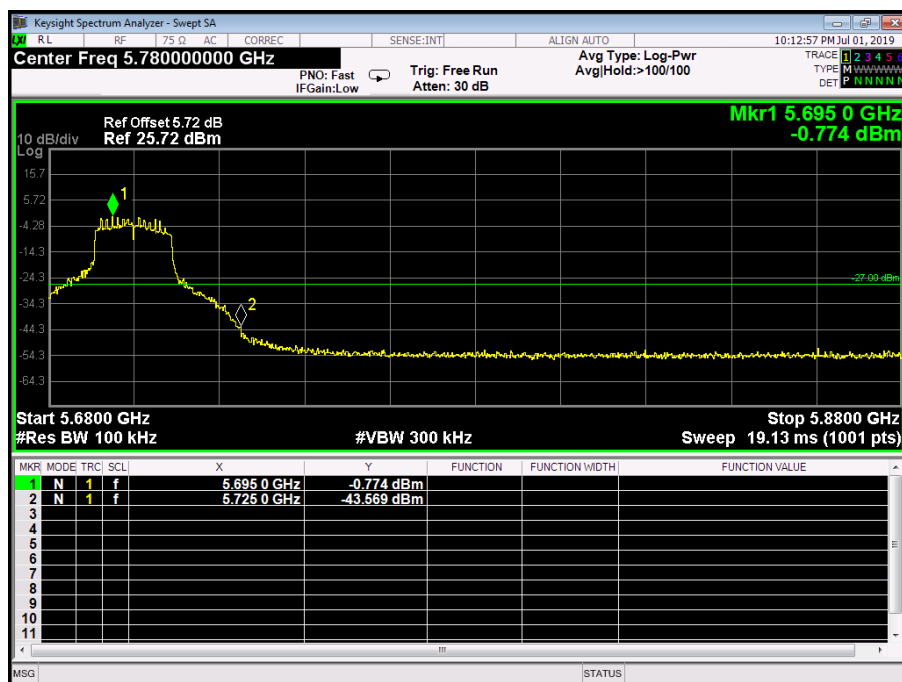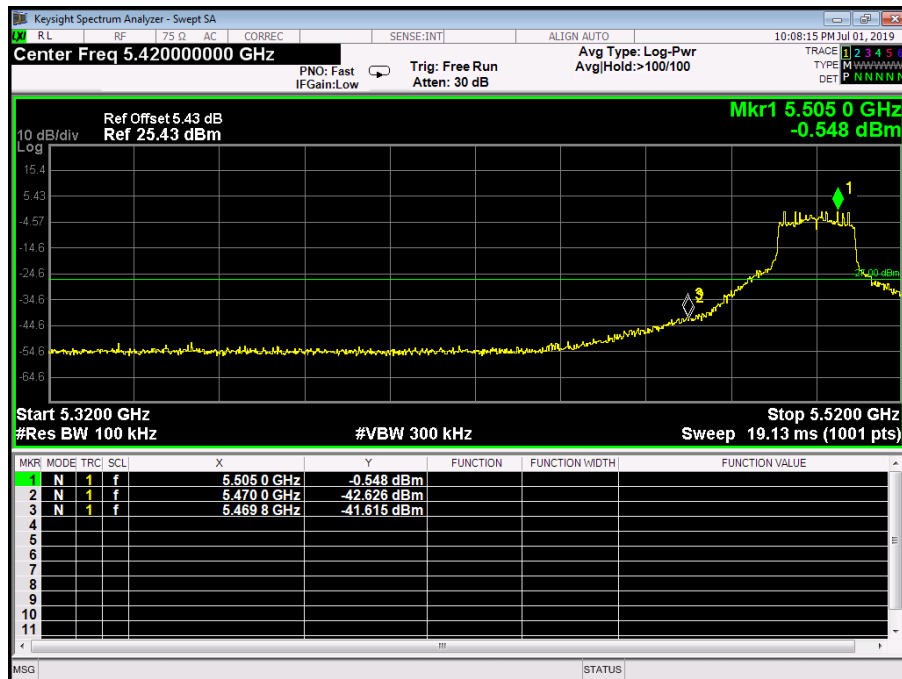



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

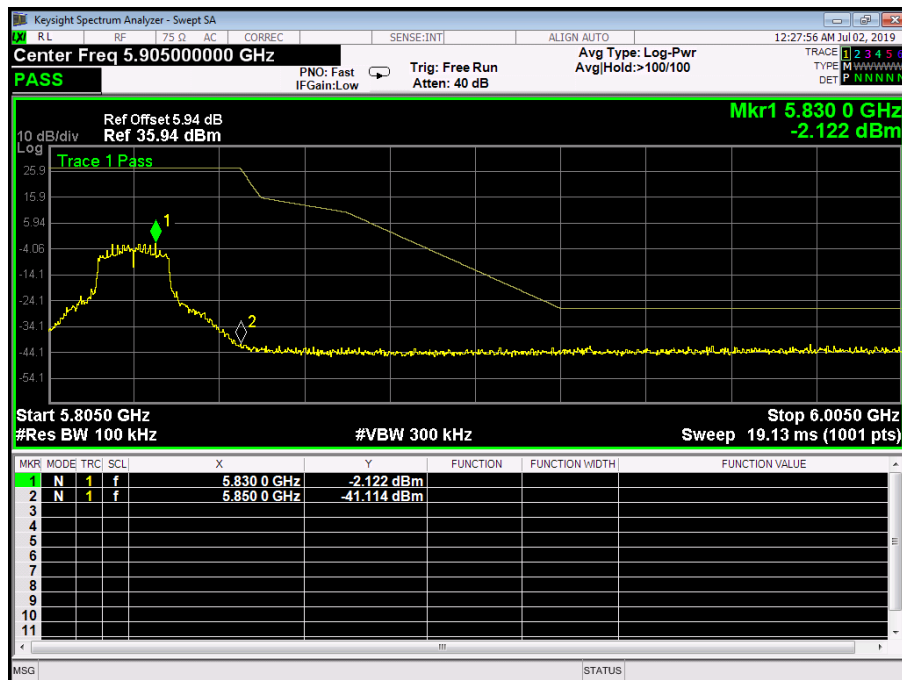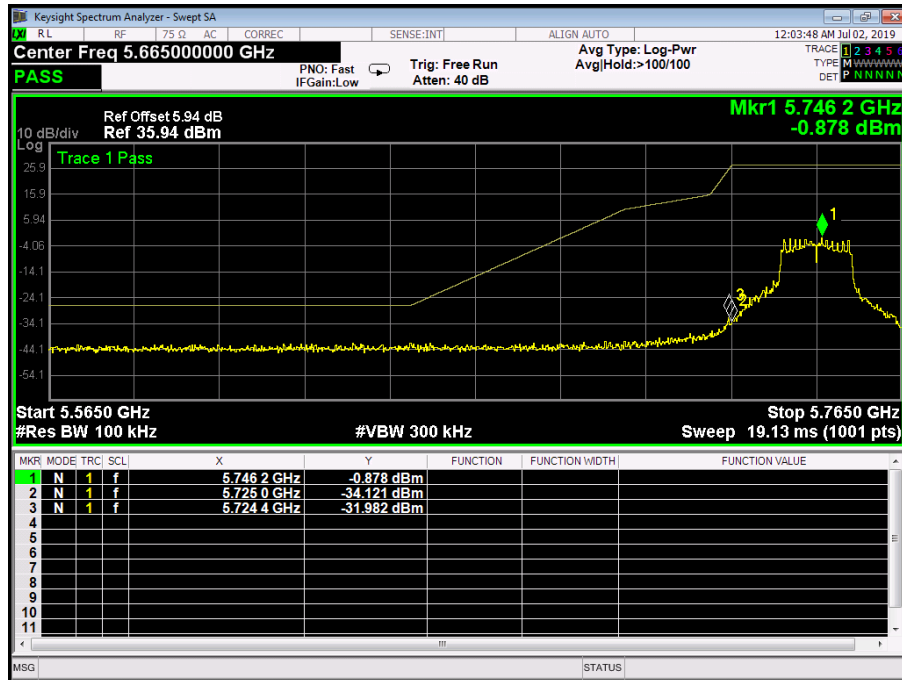



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(20) Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

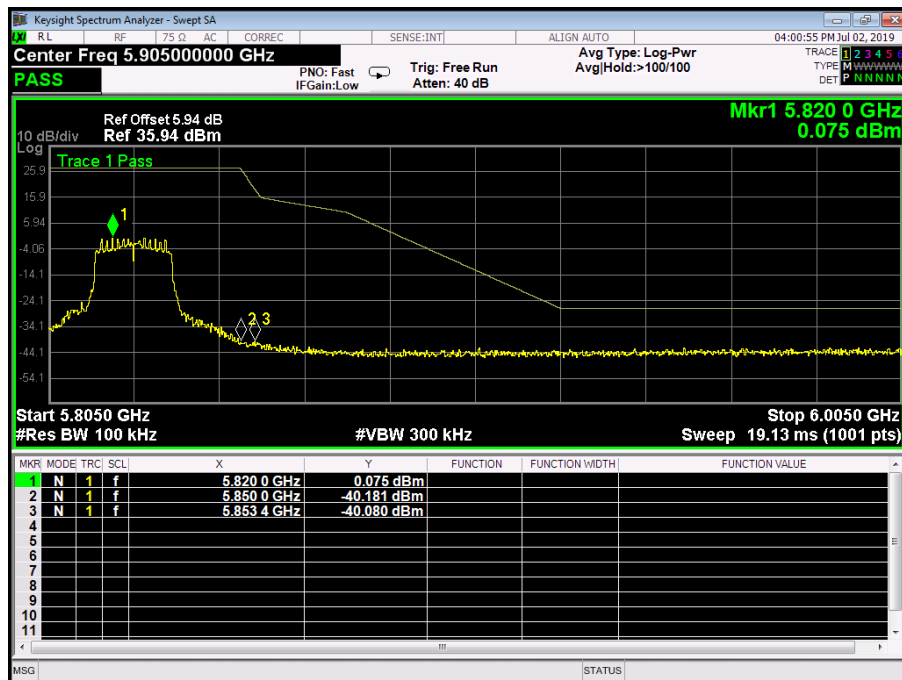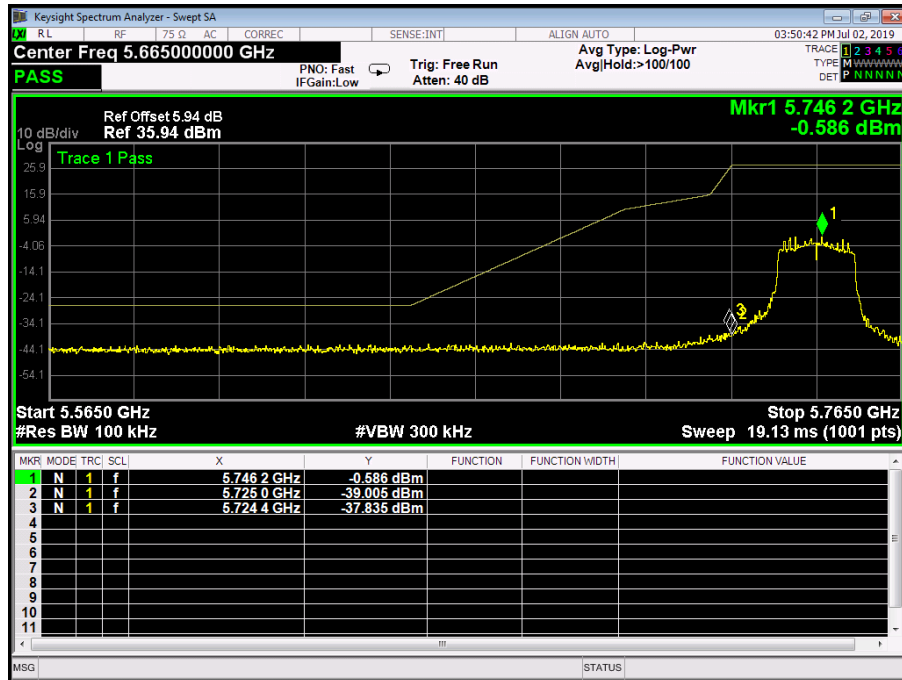


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(20) Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

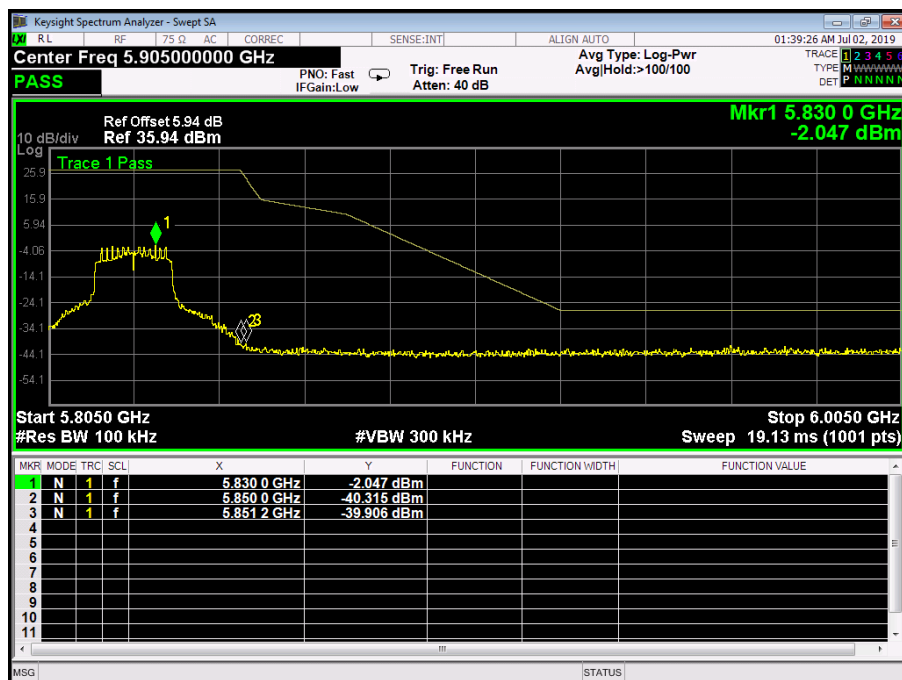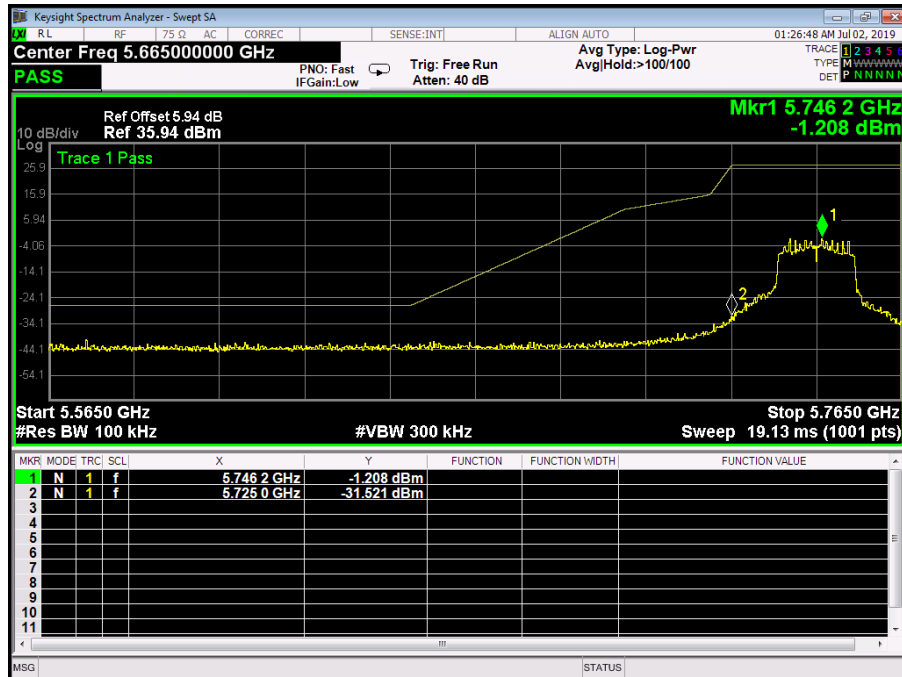



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(40) mode(U-NII-1) / 5190 ~ 5230MHz CH Low-5190MHz TX 802.11 n(40) mode(U-NII-2A) / 5270~ 5310MHz CH High-5320MHz		
Remark:	The EUT is programmed in continuously transmitting mode		

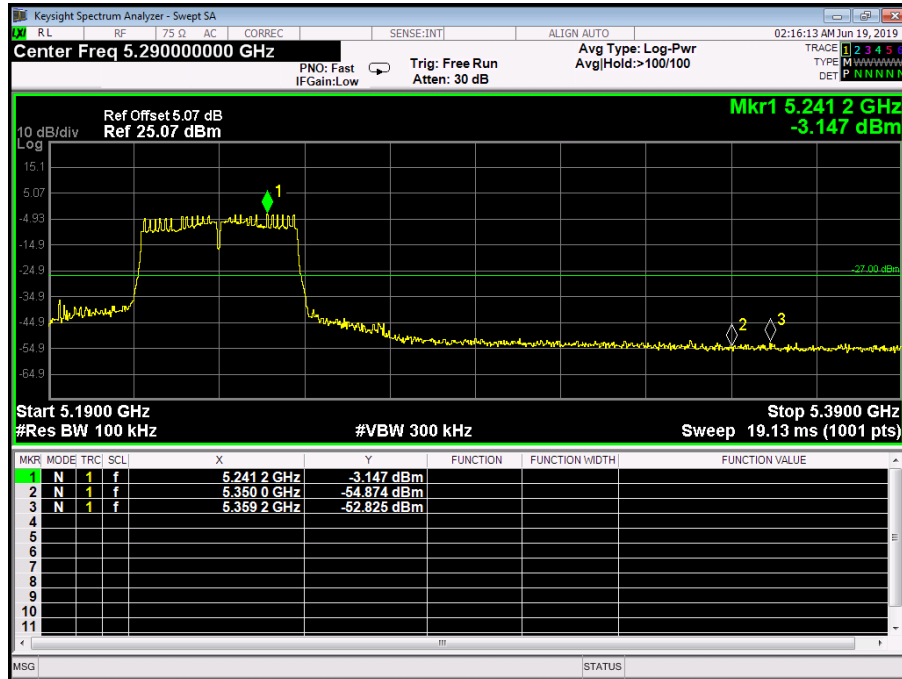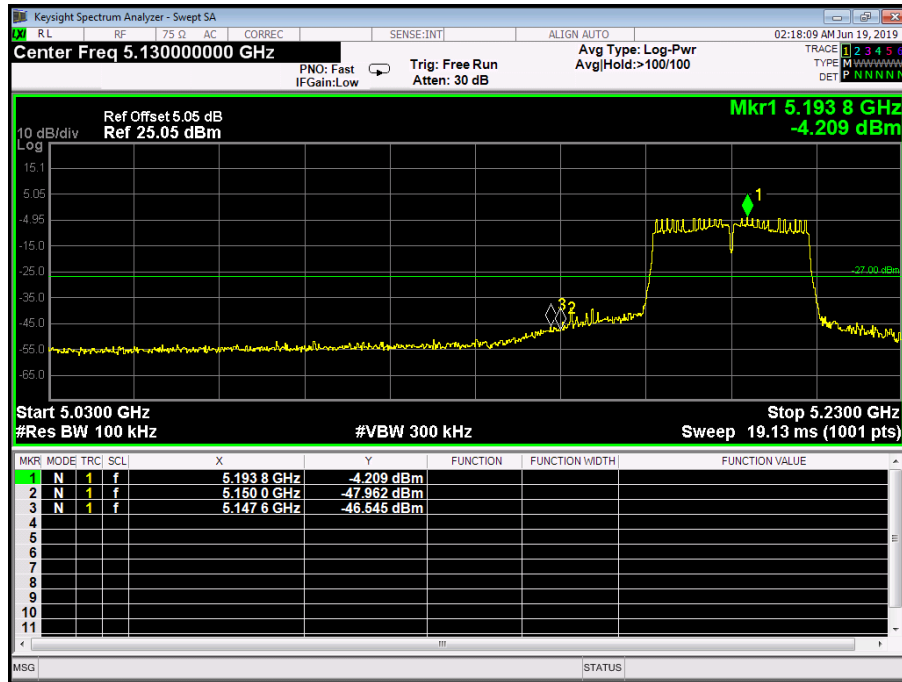

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(40) mode(U-NII-1) / 5190 ~ 5230MHz CH Low-5190MHz TX 802.11 ac(40) mode(U-NII-2A) / 5270~ 5310MHz CH High-5320MHz		
Remark:	The EUT is programed in continuously transmitting mode		

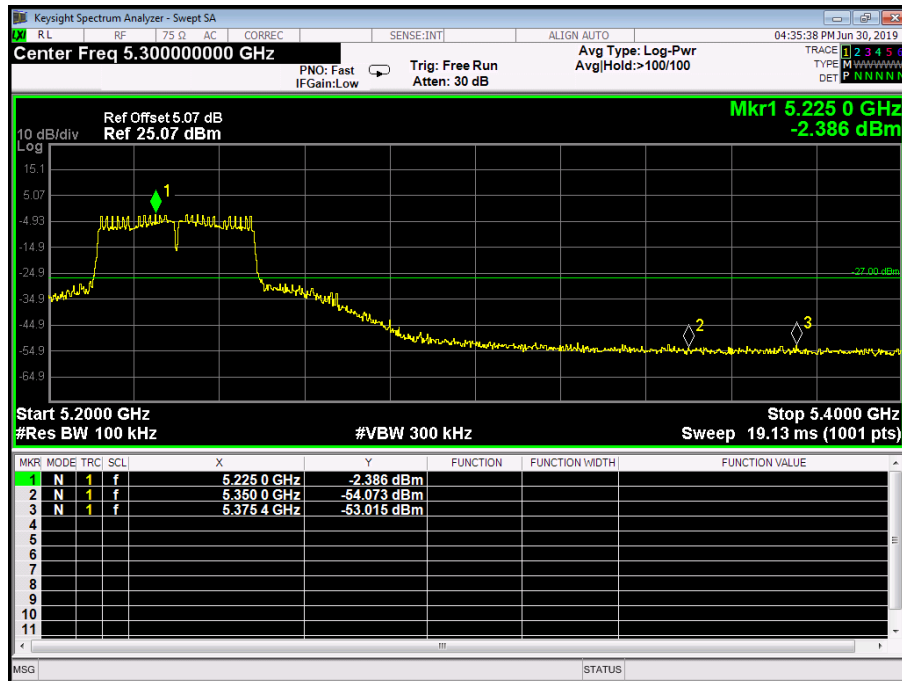



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(40) Mode 5510MHz/5670 (U-NII-2C)		
Remark:	The EUT is programed in continuously transmitting mode		

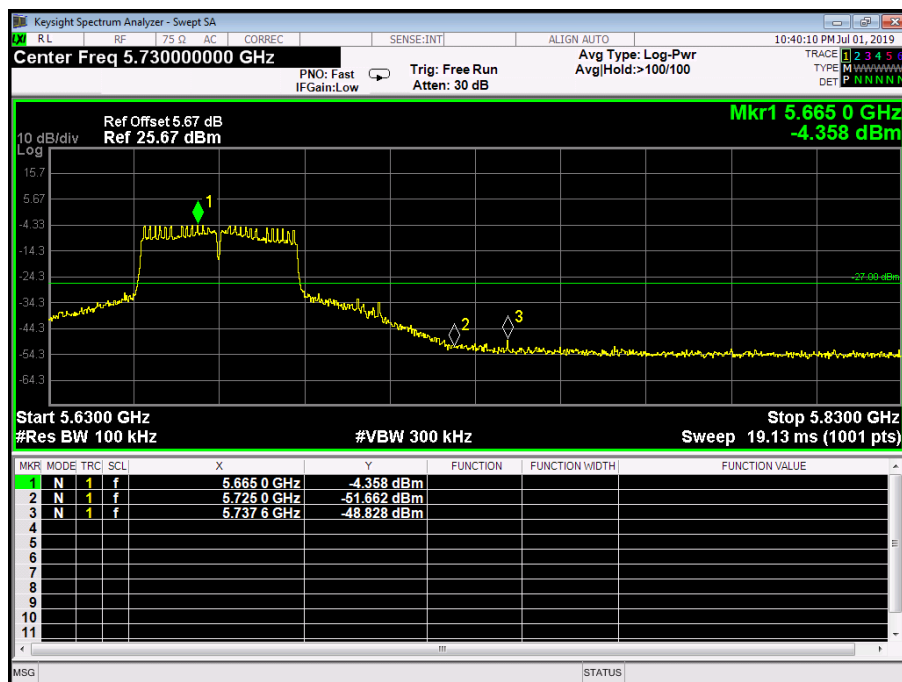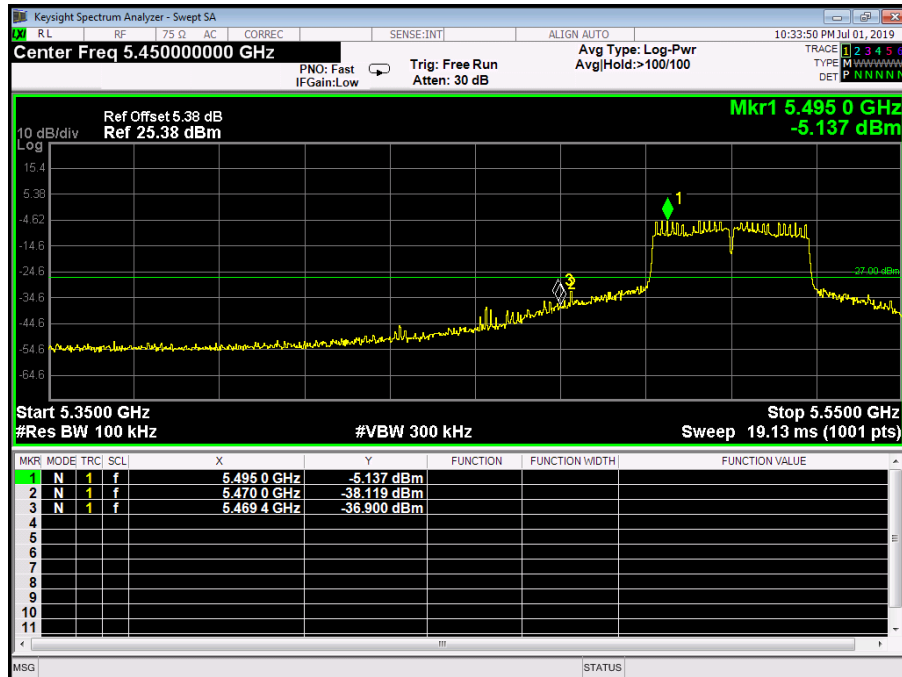


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(40) Mode 5510MHz/5670 (U-NII-2C)		
Remark:	The EUT is programed in continuously transmitting mode		





Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 n(40) Mode 5755MHz/5795 (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

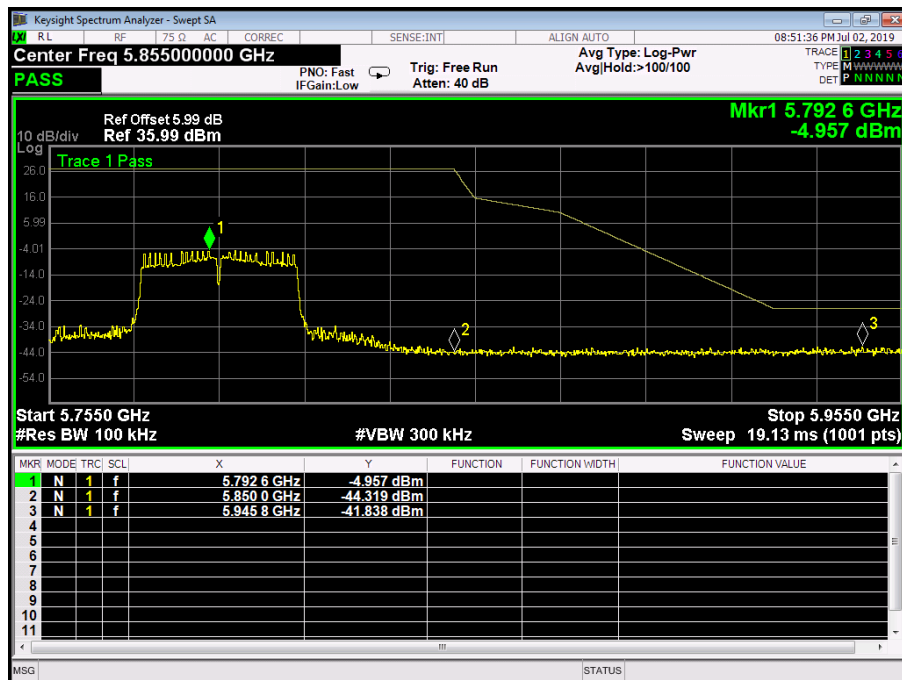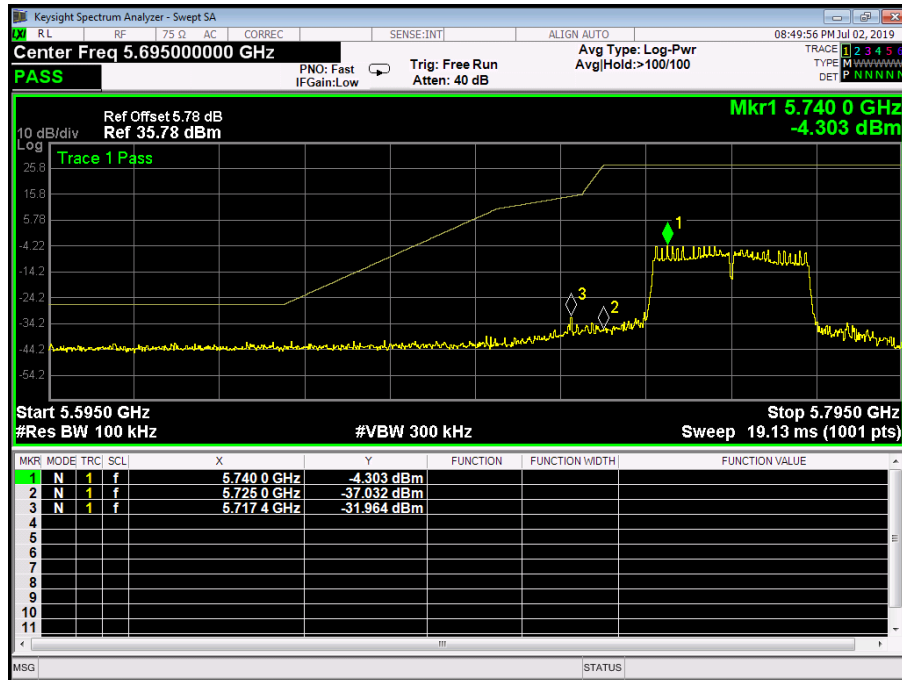



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(40) Mode 5755MHz/5795 (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

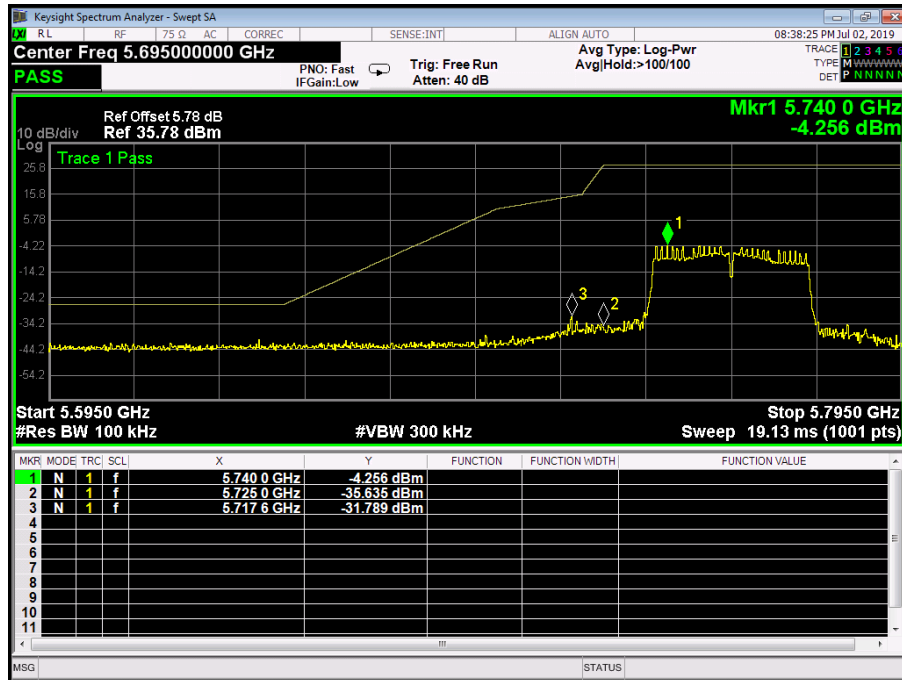


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5210MHz (U-NII-1) TX 802.11 ac(80) Mode 5290MHz (U-NII-2A)		
Remark:	The EUT is programed in continuously transmitting mode		

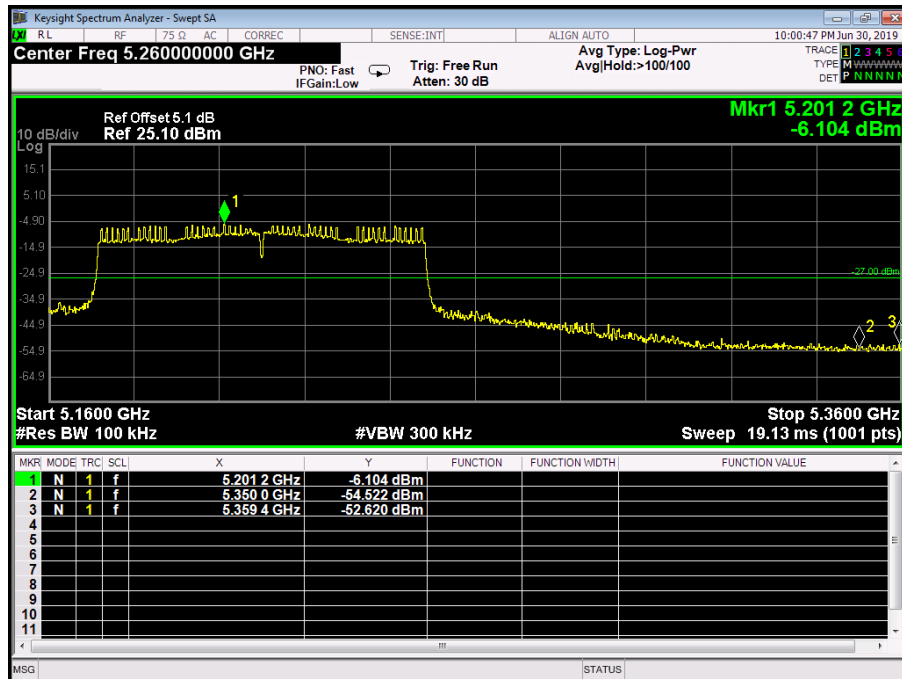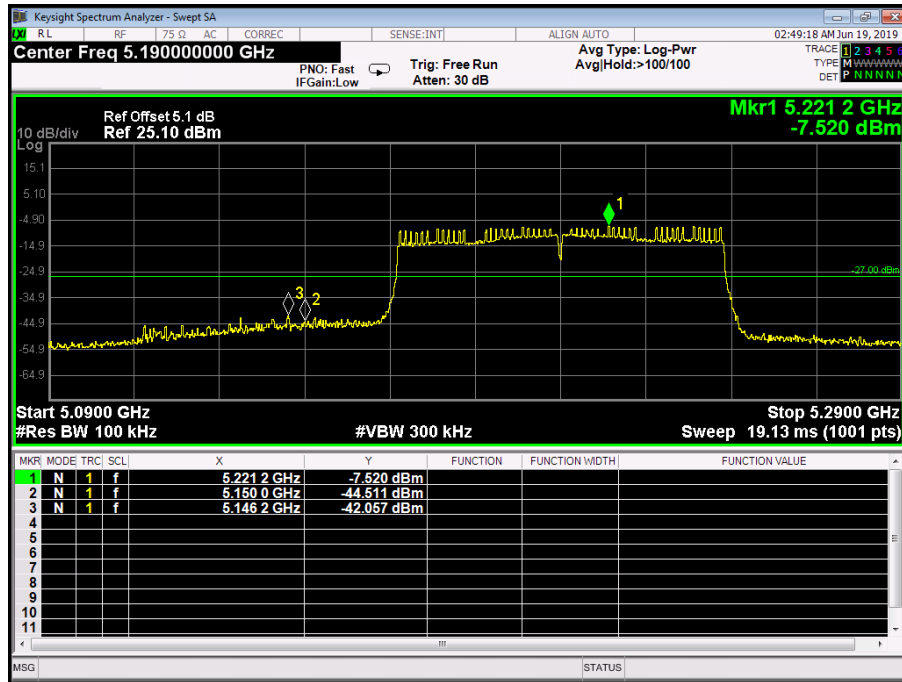

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5530MHz (U-NII-2C) TX 802.11 ac(80) Mode 5775MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

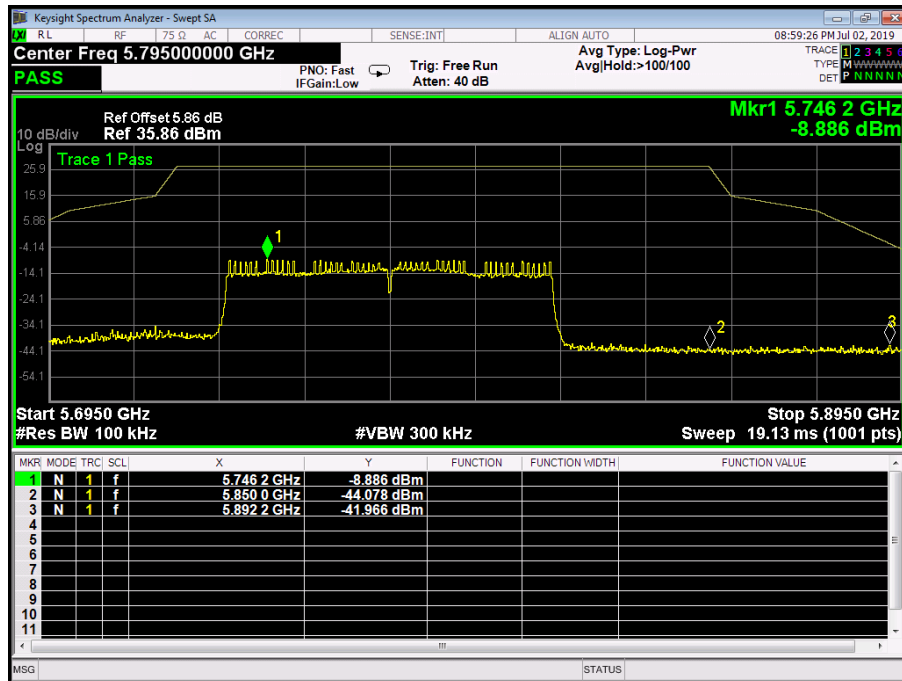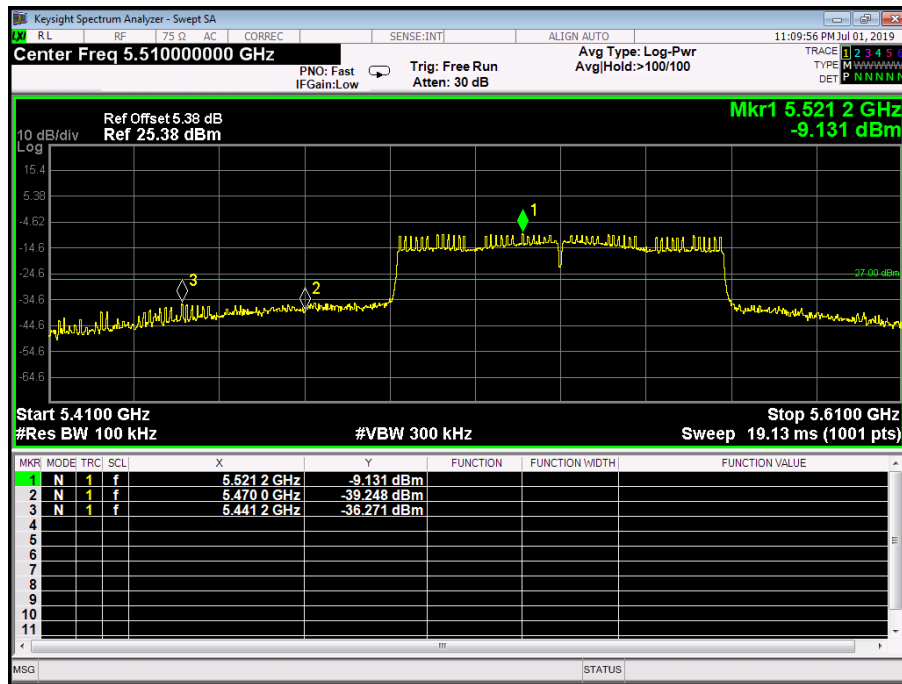


Attachment D-- Bandwidth Test Data

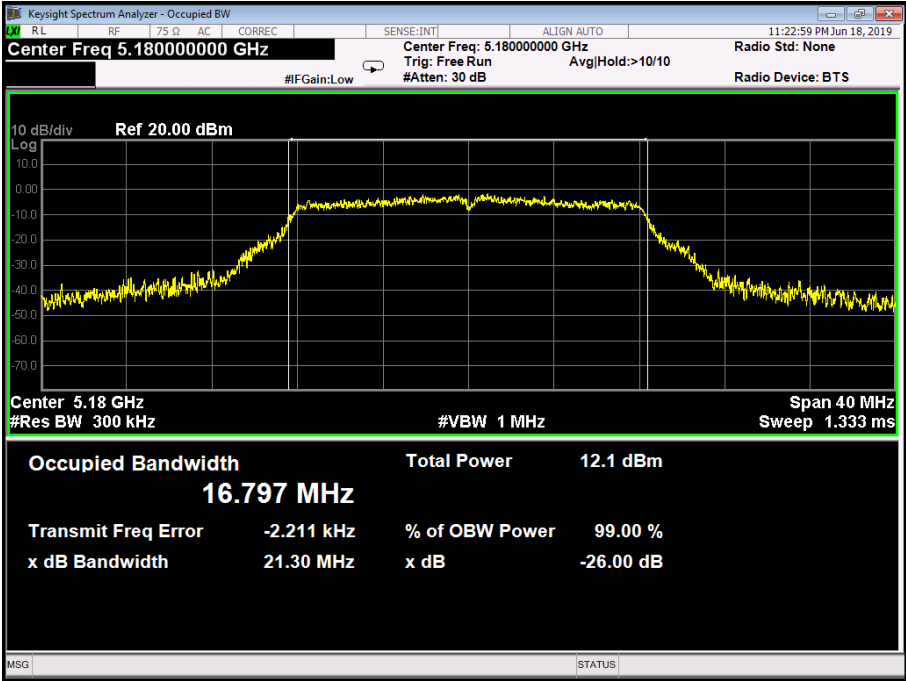Temperature:	25 °C	Relative Humidity:	55%																
Test Voltage:	AC 120V/60Hz																		
Test Mode:	TX 802.11a Mode (U-NII-1)																		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)																
36	5180	21.30	16.797																
40	5200	21.11	16.788																
48	5240	21.37	16.791																
802.11a Mode																			
5180 MHz																			
 <table border="1"> <thead> <tr> <th colspan="2">Occupied Bandwidth</th> <th>Total Power</th> <th>12.1 dBm</th> </tr> </thead> <tbody> <tr> <td colspan="2">16.797 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-2.211 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>21.30 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </tbody> </table>				Occupied Bandwidth		Total Power	12.1 dBm	16.797 MHz				Transmit Freq Error	-2.211 kHz	% of OBW Power	99.00 %	x dB Bandwidth	21.30 MHz	x dB	-26.00 dB
Occupied Bandwidth		Total Power	12.1 dBm																
16.797 MHz																			
Transmit Freq Error	-2.211 kHz	% of OBW Power	99.00 %																
x dB Bandwidth	21.30 MHz	x dB	-26.00 dB																


802.11a Mode


5200 MHz

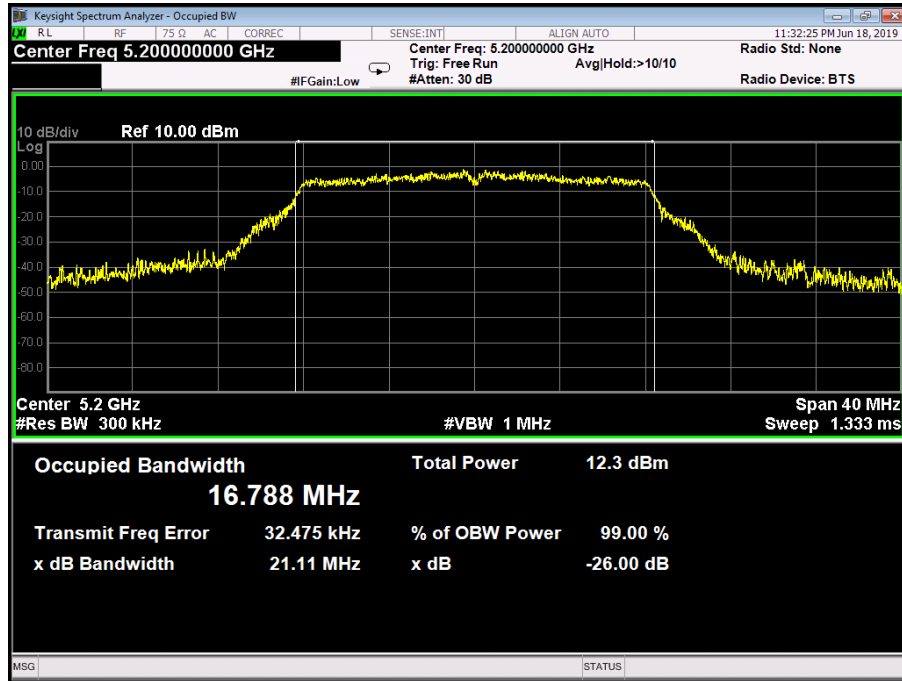

802.11a Mode


5240 MHz

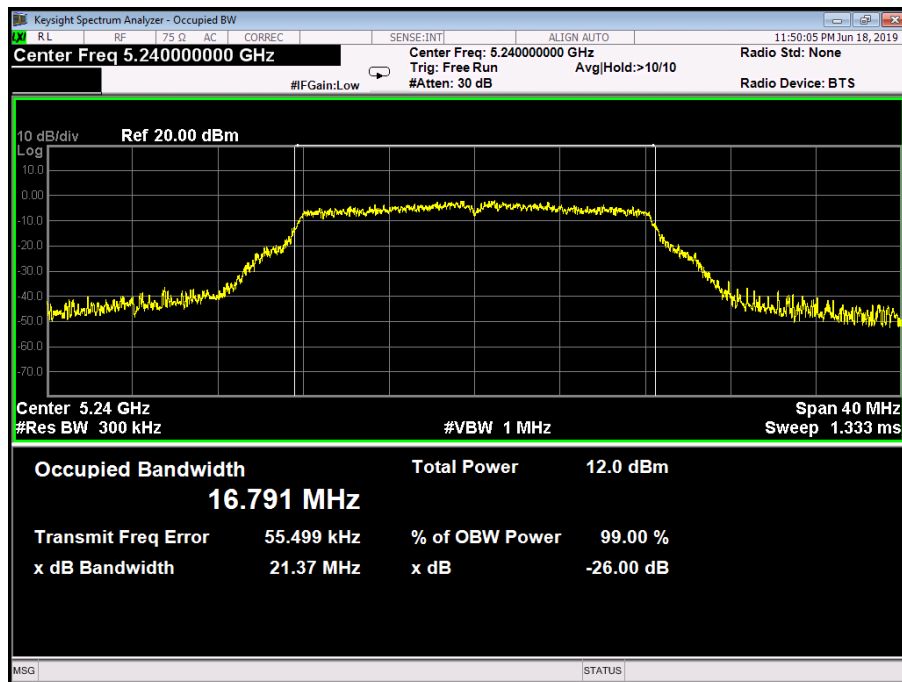

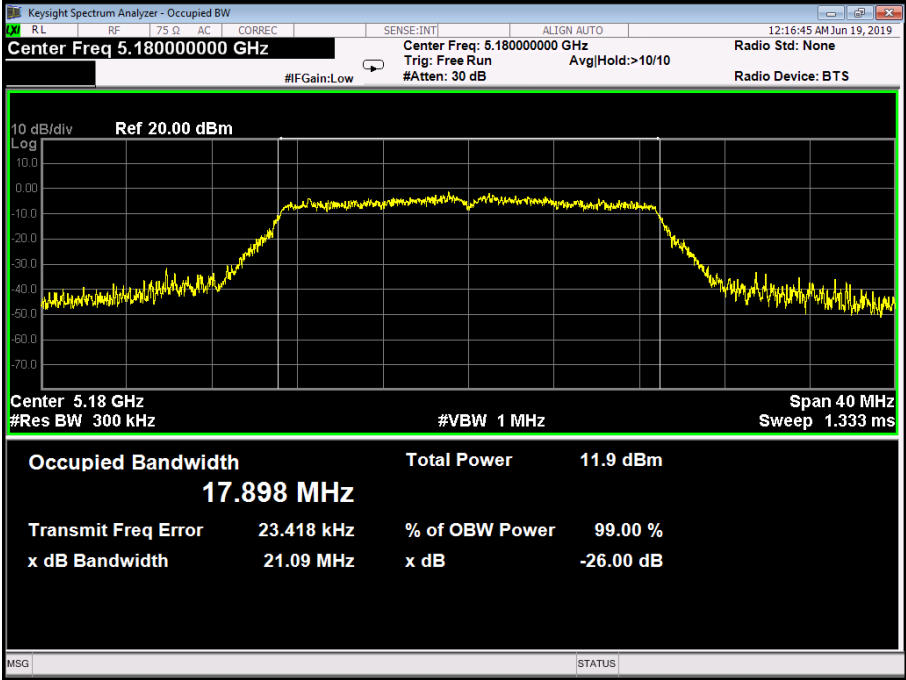Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	21.09	17.898
40	5200	21.27	17.926
48	5240	21.17	17.841
802.11n(HT20) Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.180000000 GHz Center Freq: 5.180000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.898 MHz Total Power 11.9 dBm Transmit Freq Error 23.418 kHz % of OBW Power 99.00 % x dB Bandwidth 21.09 MHz x dB -26.00 dB			


802.11n(HT20) Mode


5200 MHz

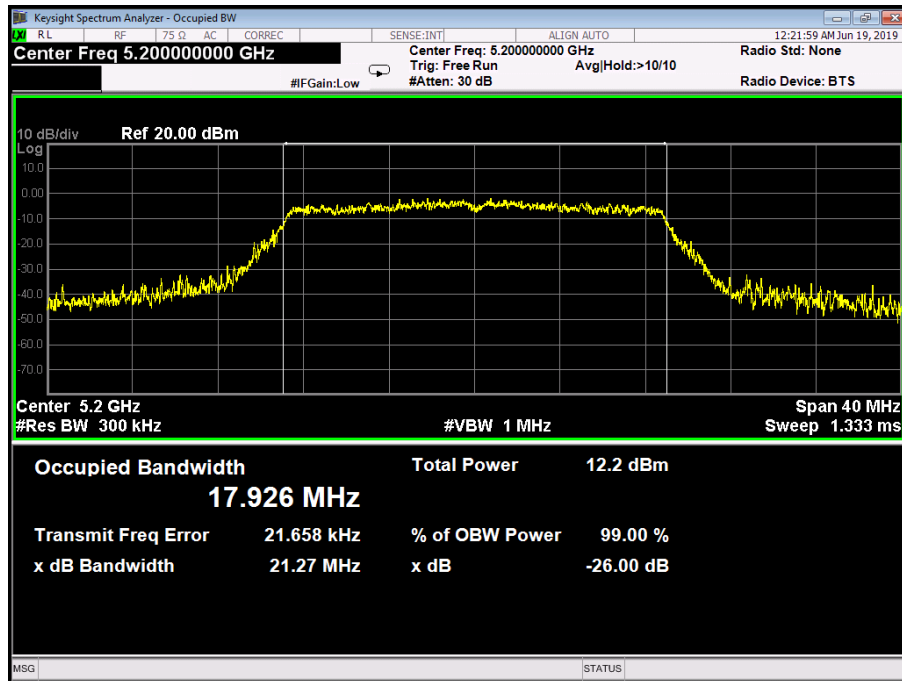

802.11n(HT20) Mode


5240 MHz

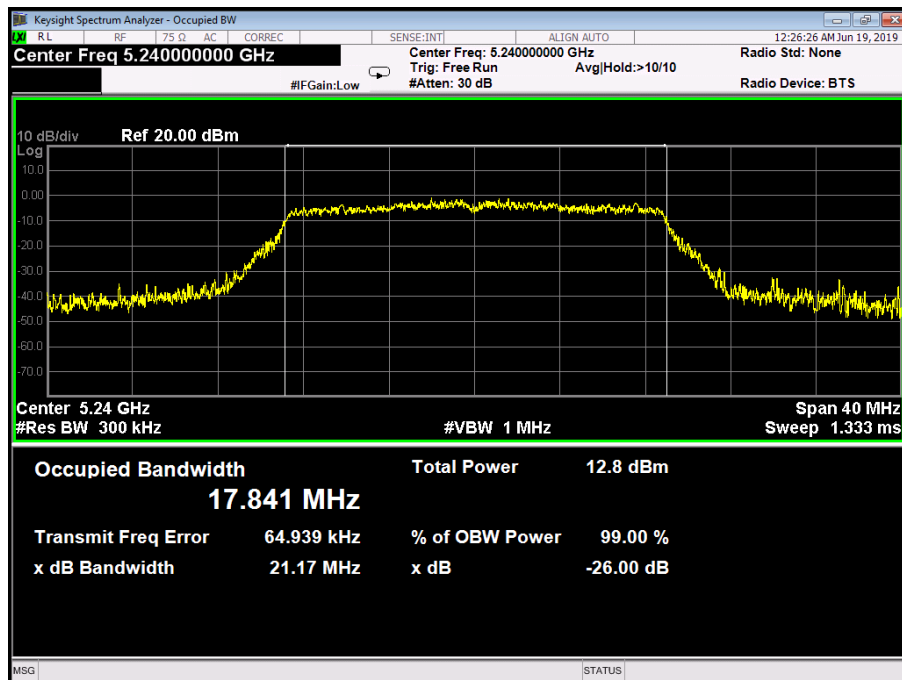

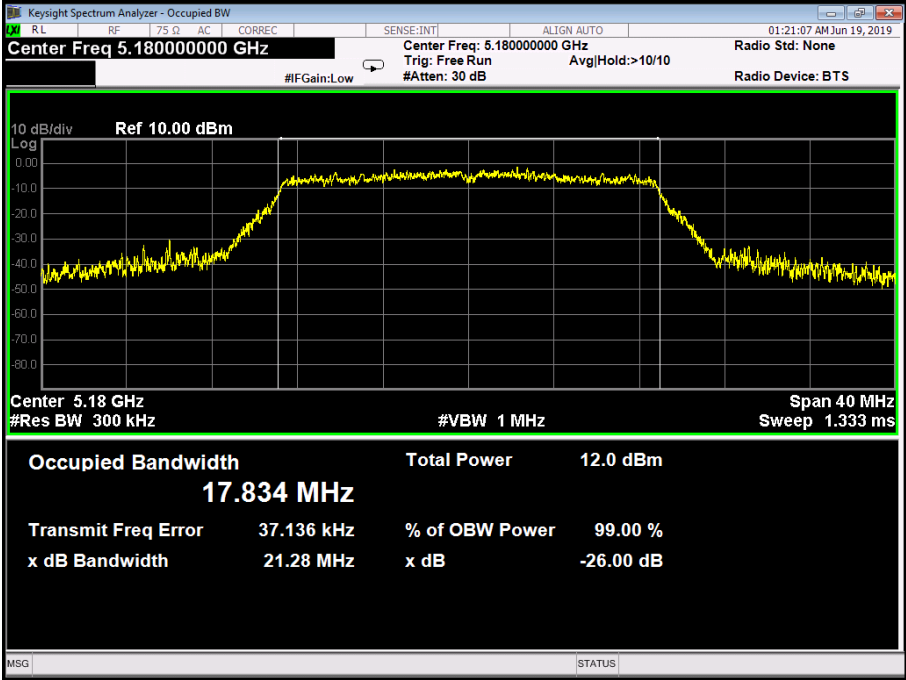Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	21.28	17.834
40	5200	21.40	17.926
48	5240	21.71	17.917
802.11ac(20) Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.18000000 GHz Center Freq: 5.18000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.834 MHz Total Power 12.0 dBm Transmit Freq Error 37.136 kHz % of OBW Power 99.00 % x dB Bandwidth 21.28 MHz x dB -26.00 dB MSG STATUS			


802.11ac(20) Mode


5200 MHz

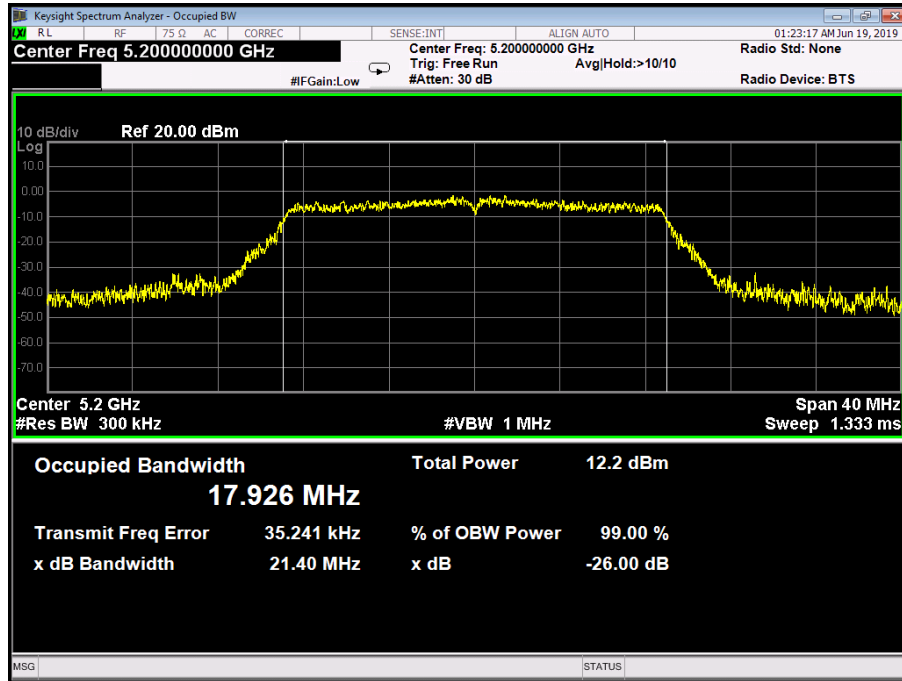


802.11ac(20) Mode

5240 MHz

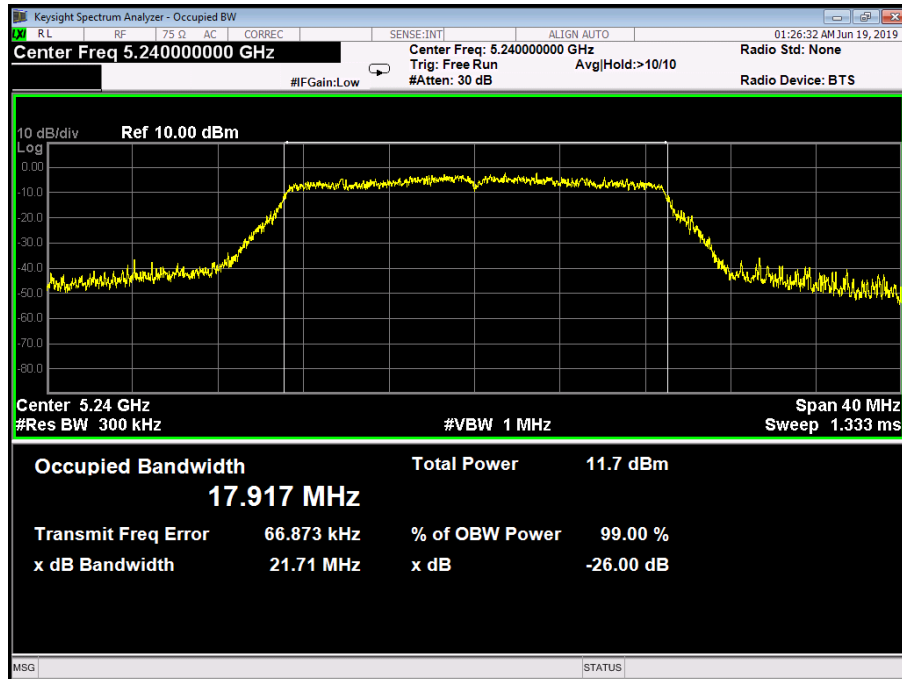

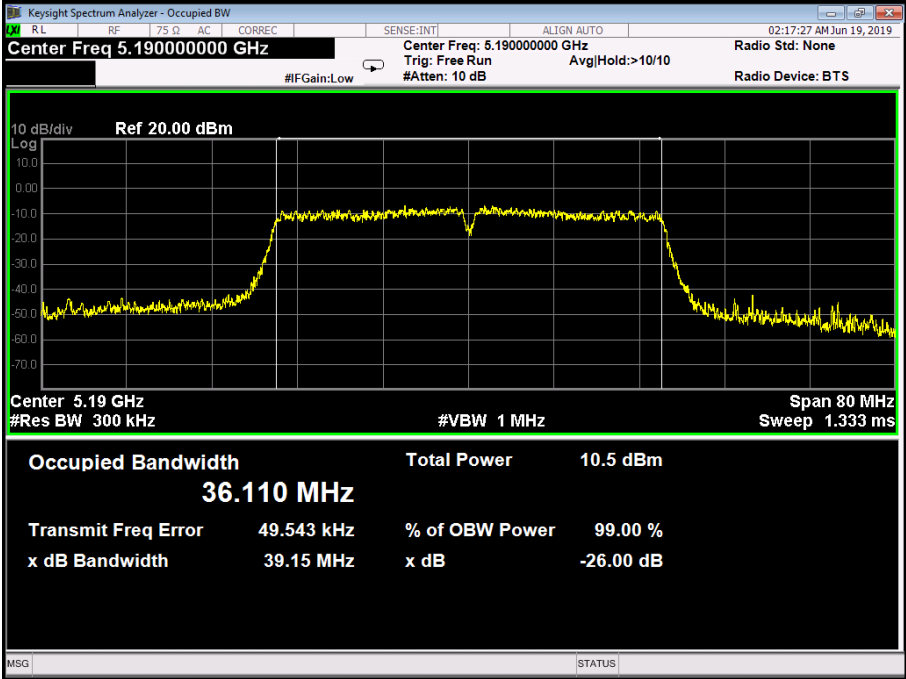Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11N(HT40) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	39.15	36.110
46	5230	39.06	36.091
802.11N(HT40) Mode			
5190 MHz			
 The screenshot shows a Keysight Spectrum Analyzer interface. The main display is a frequency plot with a yellow signal trace. The center frequency is 5.190000000 GHz. The reference level is 20.00 dBm. The plot shows a signal with a bandwidth of 36.110 MHz. The total power is 10.5 dBm. The transmit frequency error is 49.543 kHz. The x dB bandwidth is 39.15 MHz. The x dB power is -26.00 dB. The plot also shows the 99% bandwidth and the occupied bandwidth. The signal is centered at 5.19 GHz. The plot shows a signal with a bandwidth of 36.110 MHz. The total power is 10.5 dBm. The transmit frequency error is 49.543 kHz. The x dB bandwidth is 39.15 MHz. The x dB power is -26.00 dB. The plot also shows the 99% bandwidth and the occupied bandwidth.			

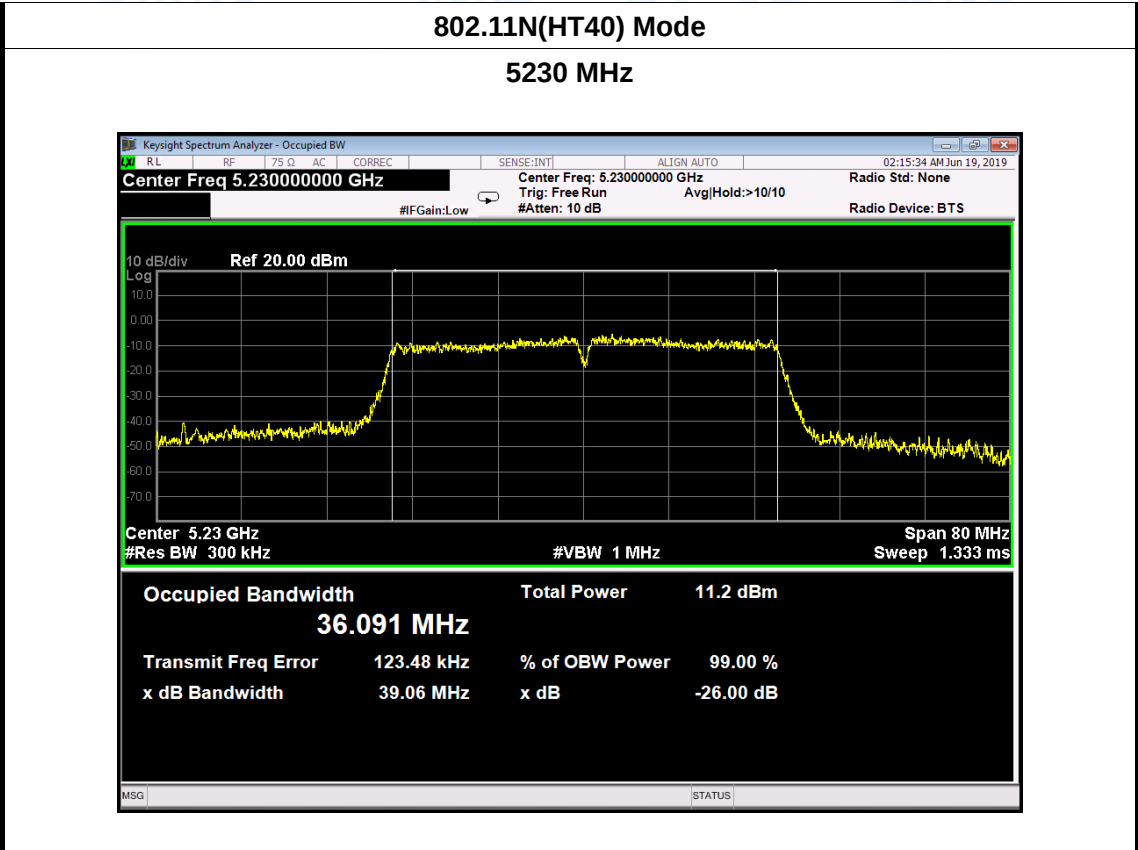

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(40) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	44.55	36.162
46	5230	43.55	36.165
802.11ac(40) Mode			
5190 MHz			
