



FCC RADIO TEST REPORT

FCC ID : 2ATUQ-6698
Equipment : Tablet
Model Name : K72LL4
Applicant : Mangled Horses LLC
225 Wilmington-West Chester Pike,
Suite 202, Chadds Ford, PA 19317
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 13, 2019 and testing was started from Nov. 16, 2019 and completed on Feb. 28, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 Test Result.....	11
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement	12
3.3 AC Conducted Emission Measurement.....	15
3.4 Antenna Requirements	17
4 List of Measuring Equipment	18
5 Uncertainty of Evaluation.....	19

Appendix A. Conducted Test Results**Appendix B. AC Conducted Emission Test Result****Appendix C. Radiated Spurious Emission****Appendix D. Radiated Spurious Emission Plots****Appendix E. Duty Cycle Plots**



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
-	15.247(a)(2)	6dB Bandwidth	Not Required
-	2.1049	99% Occupied Bandwidth	Not Required
3.1	15.247(b)(3)	Peak Output Power	Pass
-	15.247(e)	Power Spectral Density	Not Required
-	15.247(d)	Conducted Band Edges and Spurious Emission	Not Required
3.2	15.247(d)	Radiated Band Edges and Spurious Emission	Pass
3.3	15.207	AC Conducted Emission	Pass
3.4	15.203 & 15.247(b)	Antenna Requirement	Pass

Remark:

1. Not required means after assessing, test items are not necessary to carry out, which is covered by previous report.
2. This is a variant report by removing WPC function. All the test cases were performed on original report which can be referred to Sporton Report Number FR982217-01B. Based on the original report, the test cases were verified.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang**Report Producer: Celery Wei**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Model Name	K72LL4
FCC ID	2ATUQ-6699
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Antenna Type / Gain	<Ant. 1>: IFA Antenna with gain 2.8 dBi <Ant. 2>: Monopole Antenna with gain 2.8 dBi
Type of Modulation	Bluetooth LE : GFSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02

ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 4: Bluetooth Tx CH19_2440 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Play MPEG4 from SD Card + USB Cable (Charging from Adapter (AP16)) + Micro SD card
Remark:	
1. For Radiated Test Cases, the tests were performed with Adapter 1. 2. The AC Conducted Emission test case has leveraged from the worst mode of Part 15B AC Conducted Emission.	

2.3 Connection Diagram of Test System

<Bluetooth - LE Tx Mode >

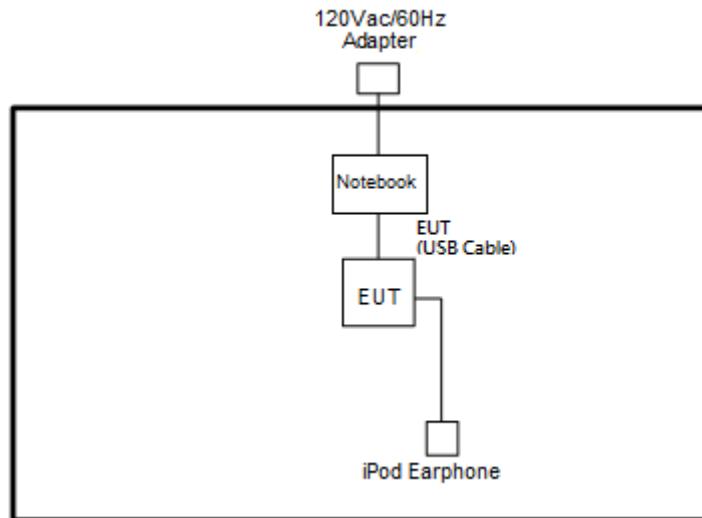

<AC Conducted Emission Mode>

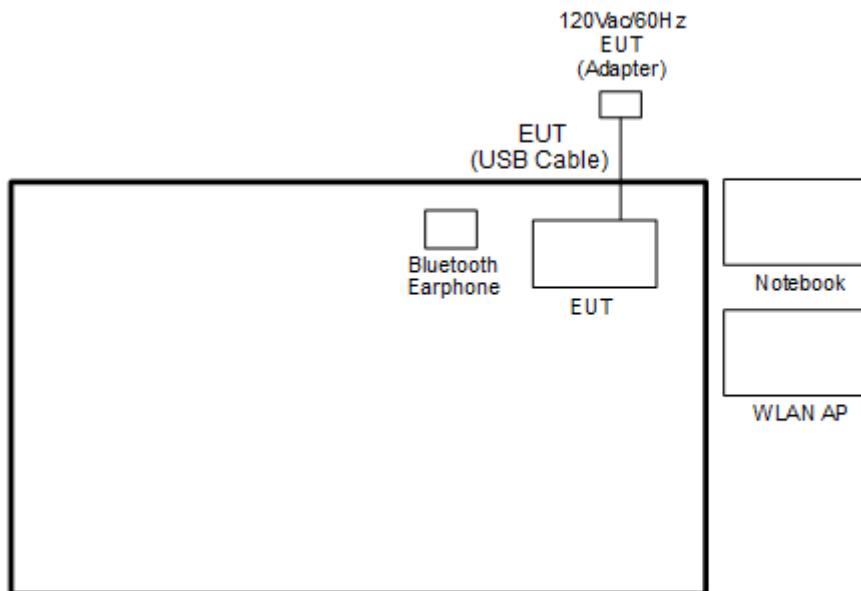



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
4.	Notebook	Lenovo	L570	N/A	N/A	N/A
5.	NOTE BOOK	Dell	Latitude E3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “CMD” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT was connected to the power meter by RF cable and attenuator.
4. The path loss was compensated to the results for each measurement.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup

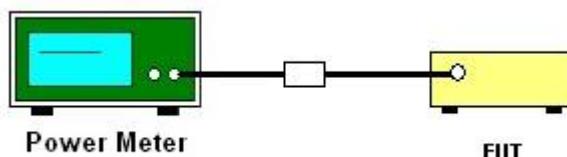

3.1.5 Test Result of Average Output Power

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.



3.2.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup

For radiated emissions above 1GHz

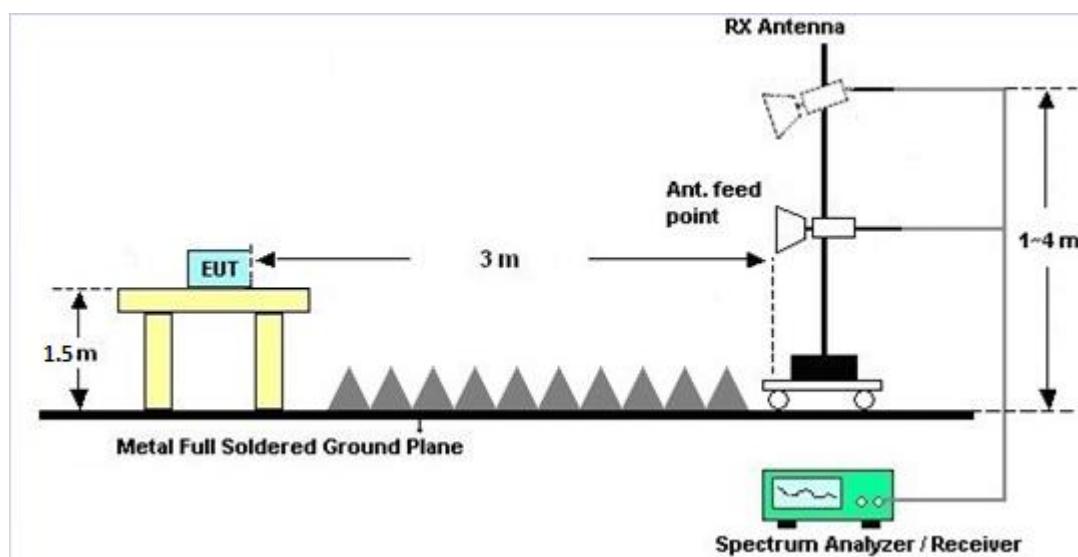

3.2.5 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.6 Duty Cycle

Please refer to Appendix E.

3.2.7 Test Result of Radiated Spurious Emission

Please refer to Appendix C and D.



3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

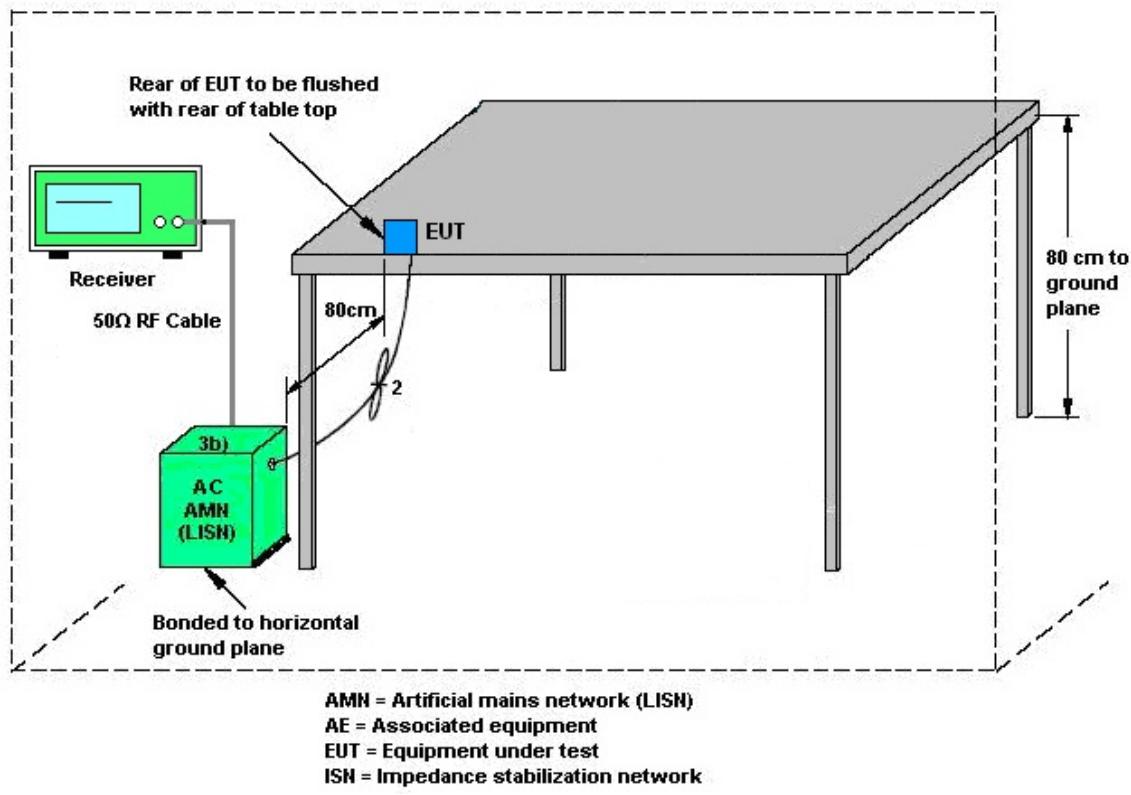

3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Nov. 26, 2019~Nov. 27, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Feb. 26, 2020	Dec. 12, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-2114	1-18GHz	Jul. 31, 2019	Nov. 26, 2019~Feb. 26, 2020	Jul. 30, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 05, 2018	Nov. 26, 2019~Nov. 27, 2019	Dec. 04, 2019	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 10, 2019	Feb. 26, 2020	Dec. 09, 2020	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-303	171000180 0055007	1GHz~18GHz	Apr. 01, 2019	Nov. 26, 2019~Feb. 26, 2020	May 31, 2020	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY532701 95	1GHz~26.5GHz	Aug. 23, 2019	Nov. 26, 2019~Feb. 26, 2020	Aug. 22, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY554201 70	20MHz~8.4GHz	Mar. 08, 2019	Nov. 26, 2019~Feb. 26, 2020	Mar. 07, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 27, 2018	Nov. 26, 2019~Nov. 27, 2019	Dec. 26, 2019	Radiation (03CH15-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Nov. 26, 2019~Nov. 27, 2019	N/A	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 26, 2019~Feb. 26, 2020	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 26, 2019~Feb. 26, 2020	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24 (k5)	RK-00045 1	N/A	N/A	Nov. 26, 2019~Feb. 26, 2020	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 15, 2019	Nov. 26, 2019~Feb. 26, 2020	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4 PE	30M-18G	Apr. 15, 2019	Nov. 26, 2019~Feb. 26, 2020	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY802430 /4	30M~18GHz	May 13, 2019	Nov. 26, 2019~Feb. 26, 2020	May 12, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz-40GHz	Feb. 26, 2019	Nov. 26, 2019~Nov. 27, 2019	Feb. 25, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz-40GHz	Feb. 26, 2019	Nov. 26, 2019~Nov. 27, 2019	Feb. 25, 2020	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60ST	SN2	3GHz High Pass Filter	Jul. 17, 2019	Nov. 26, 2019~Feb. 26, 2020	Jul. 14, 2020	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY501801 36	3Hz~44GHz	Apr. 29, 2019	Feb. 26, 2020	Apr. 28, 2020	Radiation (03CH15-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Jan. 16, 2020~Feb. 28, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	Jan. 16, 2020~Feb. 28, 2020	Dec. 22 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Jan. 16, 2020~Feb. 28, 2020	Jul. 14, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Jan. 16, 2020~Feb. 28, 2020	Mar. 26, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 07, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Jan. 07, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Jan. 07, 2020	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Jan. 07, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 07, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Jan. 07, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Jan. 07, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.0
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.4
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2020/1/16 ~ 2020/2/28	Relative Humidity:	51~54	%

<Ant.1>

<u>TEST RESULTS DATA</u>										
<u>Average Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-2.00	30.00	2.80	0.80	36.00	Pass

<u>TEST RESULTS DATA</u>										
<u>Average Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	0	2402	-2.20	30.00	2.80	0.60	36.00	Pass

<Ant.2>

<u>TEST RESULTS DATA</u>										
<u>Average Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-2.00	30.00	2.80	0.80	36.00	Pass

<u>TEST RESULTS DATA</u>										
<u>Average Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	19	2440	-1.80	30.00	2.80	1.00	36.00	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee and Howard Huang	Temperature :	22~25°C
		Relative Humidity :	45~53%

EUT Information

Report NO : 982217-02
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

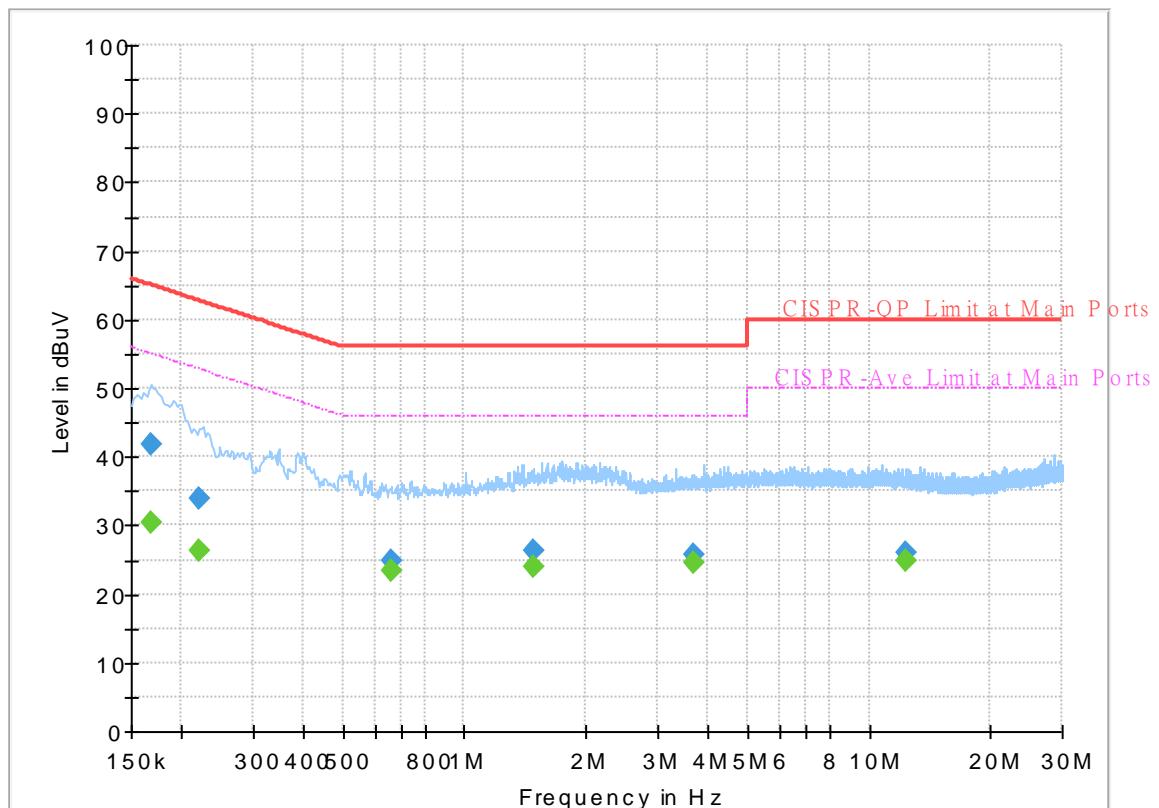


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.167550	---	30.50	55.08	24.58	L1	OFF	19.5
0.167550	41.71	---	65.08	23.37	L1	OFF	19.5
0.220290	---	26.26	52.81	26.55	L1	OFF	19.5
0.220290	33.85	---	62.81	28.96	L1	OFF	19.5
0.663000	---	23.28	46.00	22.72	L1	OFF	19.5
0.663000	24.98	---	56.00	31.02	L1	OFF	19.5
1.475250	---	23.83	46.00	22.17	L1	OFF	19.6
1.475250	26.17	---	56.00	29.83	L1	OFF	19.6
3.703290	---	24.59	46.00	21.41	L1	OFF	19.7
3.703290	25.78	---	56.00	30.22	L1	OFF	19.7
12.267780	---	24.94	50.00	25.06	L1	OFF	20.1
12.267780	25.98	---	60.00	34.02	L1	OFF	20.1

EUT Information

Report NO : 982217-02
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

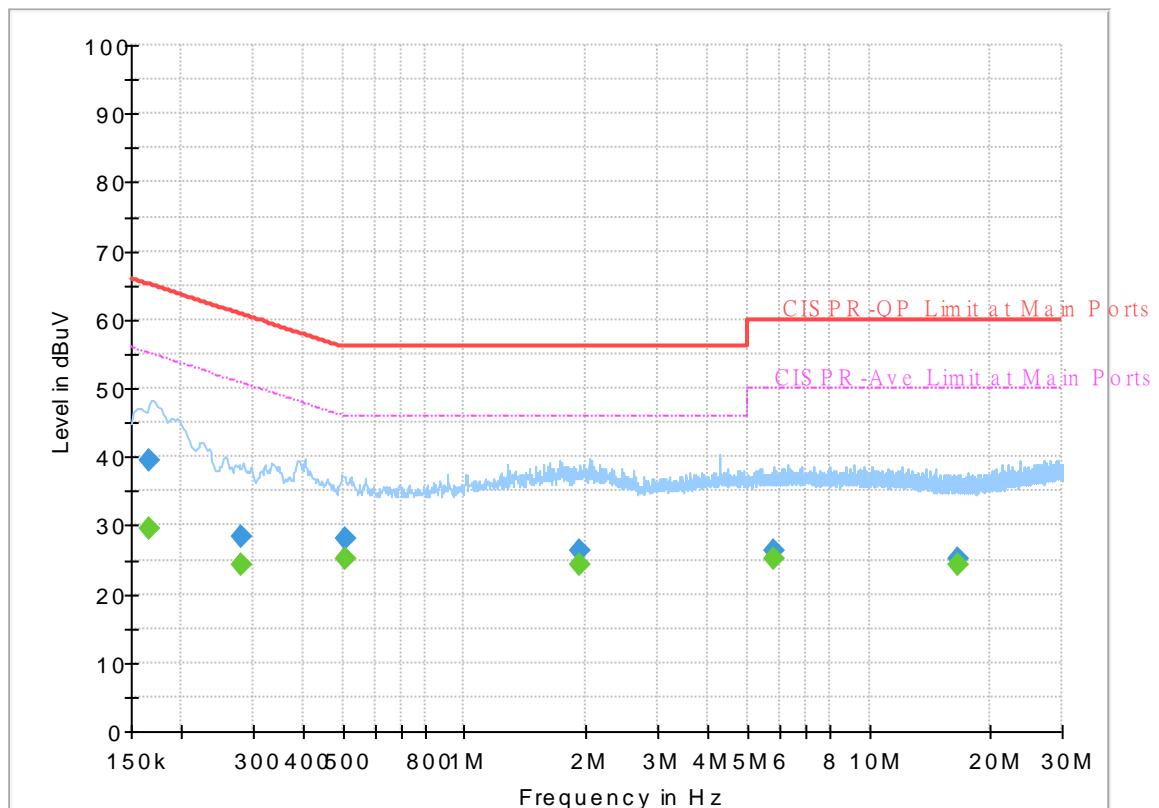

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.167100	---	29.44	55.10	25.66	N	OFF	19.6
0.167100	39.39	---	65.10	25.71	N	OFF	19.6
0.280500	---	24.17	50.80	26.63	N	OFF	19.6
0.280500	28.27	---	60.80	32.53	N	OFF	19.6
0.509280	---	25.15	46.00	20.85	N	OFF	19.6
0.509280	28.10	---	56.00	27.90	N	OFF	19.6
1.933710	---	24.14	46.00	21.86	N	OFF	19.6
1.933710	26.35	---	56.00	29.65	N	OFF	19.6
5.794710	---	25.16	50.00	24.84	N	OFF	19.8
5.794710	26.29	---	60.00	33.71	N	OFF	19.8
16.526850	---	24.25	50.00	25.75	N	OFF	20.2
16.526850	25.23	---	60.00	34.77	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Bigshow Wang	Temperature :		24.2~24.8°C	
		Relative Humidity :		55~64%	

< Ant.1 >

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2328.795	54.63	-19.37	74	41.83	27.9	16.08	31.18	100	72	P	H
		2358.825	45.23	-8.77	54	32.39	27.88	16.12	31.16	100	72	A	H
	*	2402	93.16	-	-	80.33	27.8	16.17	31.14	100	72	P	H
	*	2402	92.72	-	-	79.89	27.8	16.17	31.14	100	72	A	H
		2364.81	54.56	-19.44	74	41.73	27.87	16.12	31.16	383	62	P	V
		2370.27	45.3	-8.7	54	32.46	27.86	16.13	31.15	383	62	A	V
	*	2402	94.69	-	-	81.86	27.8	16.17	31.14	383	62	P	V
	*	2402	94.15	-	-	81.32	27.8	16.17	31.14	383	62	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4804	37.68	-36.32	74	55.9	31.32	9.62	59.16	100	0	P	H
		4804	38.25	-35.75	74	56.47	31.32	9.62	59.16	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2314.2	55.32	-18.68	74	42.37	28.07	16.06	31.18	151	80	P	H
		2343.285	44.5	-9.5	54	31.56	28.01	16.1	31.17	151	80	A	H
	*	2402	92.55	-	-	79.82	27.7	16.17	31.14	151	80	P	H
	*	2402	90.96	-	-	78.23	27.7	16.17	31.14	151	80	A	H
													H
													H
		2334.99	54.52	-19.48	74	41.57	28.03	16.09	31.17	385	57	P	V
		2312.625	44.41	-9.59	54	31.46	28.07	16.06	31.18	385	57	A	V
	*	2402	91.49	-	-	78.76	27.7	16.17	31.14	385	57	P	V
	*	2402	89.91	-	-	77.18	27.7	16.17	31.14	385	57	A	V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	35.56	-38.44	74	53.89	31.21	9.62	59.16	100	0	P	H
													H
													H
													H
		4804	35.9	-38.1	74	54.23	31.21	9.62	59.16	100	0	P	V
													V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



< Ant.2>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dB μ V/m)	(dB)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.
2					(dB μ V/m)	(dB μ V)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A) (H/V)
BLE CH 00 2402MHz		2361.87	54.59	-19.41	74	41.75	27.88	16.12	31.16	100	304	P	H
		2330.895	45.41	-8.59	54	32.6	27.9	16.08	31.17	100	304	A	H
	*	2402	92.95	-	-	80.12	27.8	16.17	31.14	100	304	P	H
	*	2402	92.32	-	-	79.49	27.8	16.17	31.14	100	304	A	H
		2385.18	55.3	-18.7	74	42.47	27.83	16.15	31.15	389	223	P	V
		2334.15	45.26	-8.74	54	32.45	27.9	16.08	31.17	389	223	A	V
	*	2402	92.73	-	-	79.9	27.8	16.17	31.14	389	223	P	V
	*	2402	92.24	-	-	79.41	27.8	16.17	31.14	389	223	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dB μ V/m)	(dB)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.
2					(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A) (H/V)
BLE CH 00 2402MHz		4804	37.94	-36.06	74	56.16	31.32	9.62	59.16	100	0	P	H
		4804	37.81	-36.19	74	56.03	31.32	9.62	59.16	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		2363.76	55.09	-18.91	74	42.21	27.92	16.12	31.16	100	299	P	H
		2338.8	44.61	-9.39	54	31.67	28.02	16.09	31.17	100	299	A	H
	*	2440	92.79	-	-	80.08	27.62	16.21	31.12	100	299	P	H
	*	2440	91.25	-	-	78.54	27.62	16.21	31.12	100	299	A	H
		2488.3	53.84	-20.16	74	41.16	27.52	16.26	31.1	100	299	P	H
		2483.62	44.19	-9.81	54	31.51	27.53	16.25	31.1	100	299	A	H
		2326.64	54.27	-19.73	74	41.33	28.05	16.07	31.18	372	219	P	V
		2315.28	44.61	-9.39	54	31.66	28.07	16.06	31.18	372	219	A	V
	*	2440	91.56	-	-	78.85	27.62	16.21	31.12	372	219	P	V
	*	2440	90.03	-	-	77.32	27.62	16.21	31.12	372	219	A	V
		2489.83	53.85	-20.15	74	41.17	27.52	16.26	31.1	372	219	P	V
		2484.97	44.15	-9.85	54	31.47	27.53	16.25	31.1	372	219	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	35.49	-38.51	74	53.8	31.24	9.63	59.18	100	0	P	H
		7320	41.7	-32.3	74	52.63	36.54	11.7	59.17	100	0	P	H
													H
													H
		4880	35.84	-38.16	74	54.15	31.24	9.63	59.18	100	0	P	V
		7320	42.06	-31.94	74	52.99	36.54	11.7	59.17	100	0	P	V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dB μ V/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB μ V) – 35.86 (dB)

= 55.45 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 55.45(dB μ V/m) – 74(dB μ V/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB μ V) – 35.86 (dB)

= 43.54 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 43.54(dB μ V/m) – 54(dB μ V/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Bigshow Wang	Temperature :	24.2~24.8°C
		Relative Humidity :	55~64%

Note symbol

-L	Low channel location
-R	High channel location





< Ant.1>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

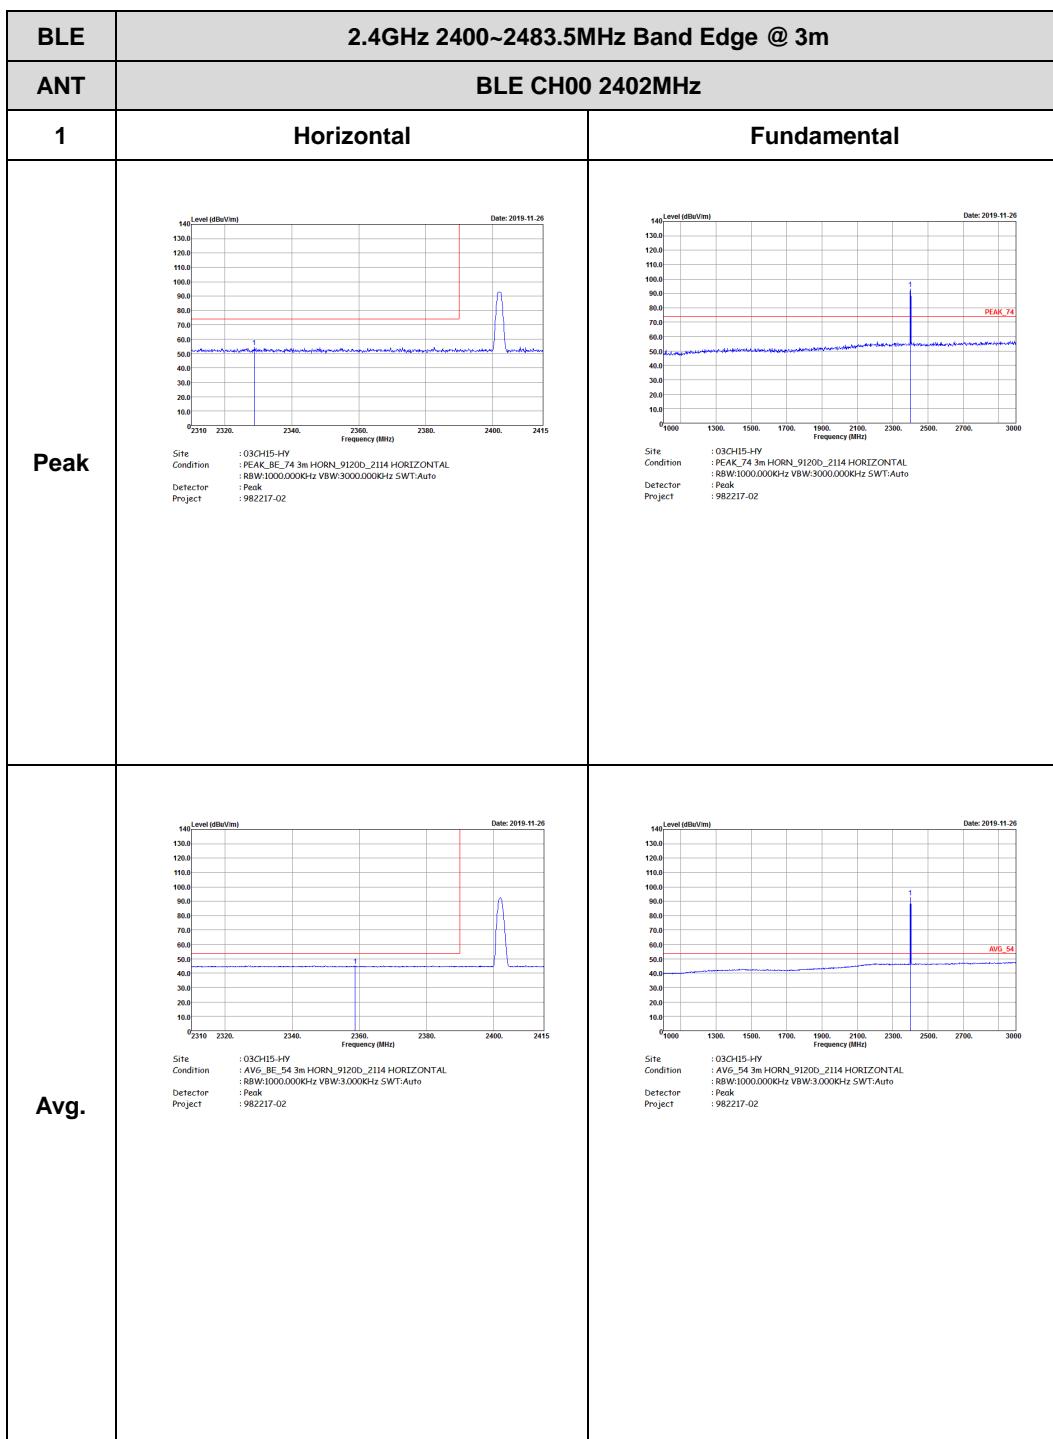


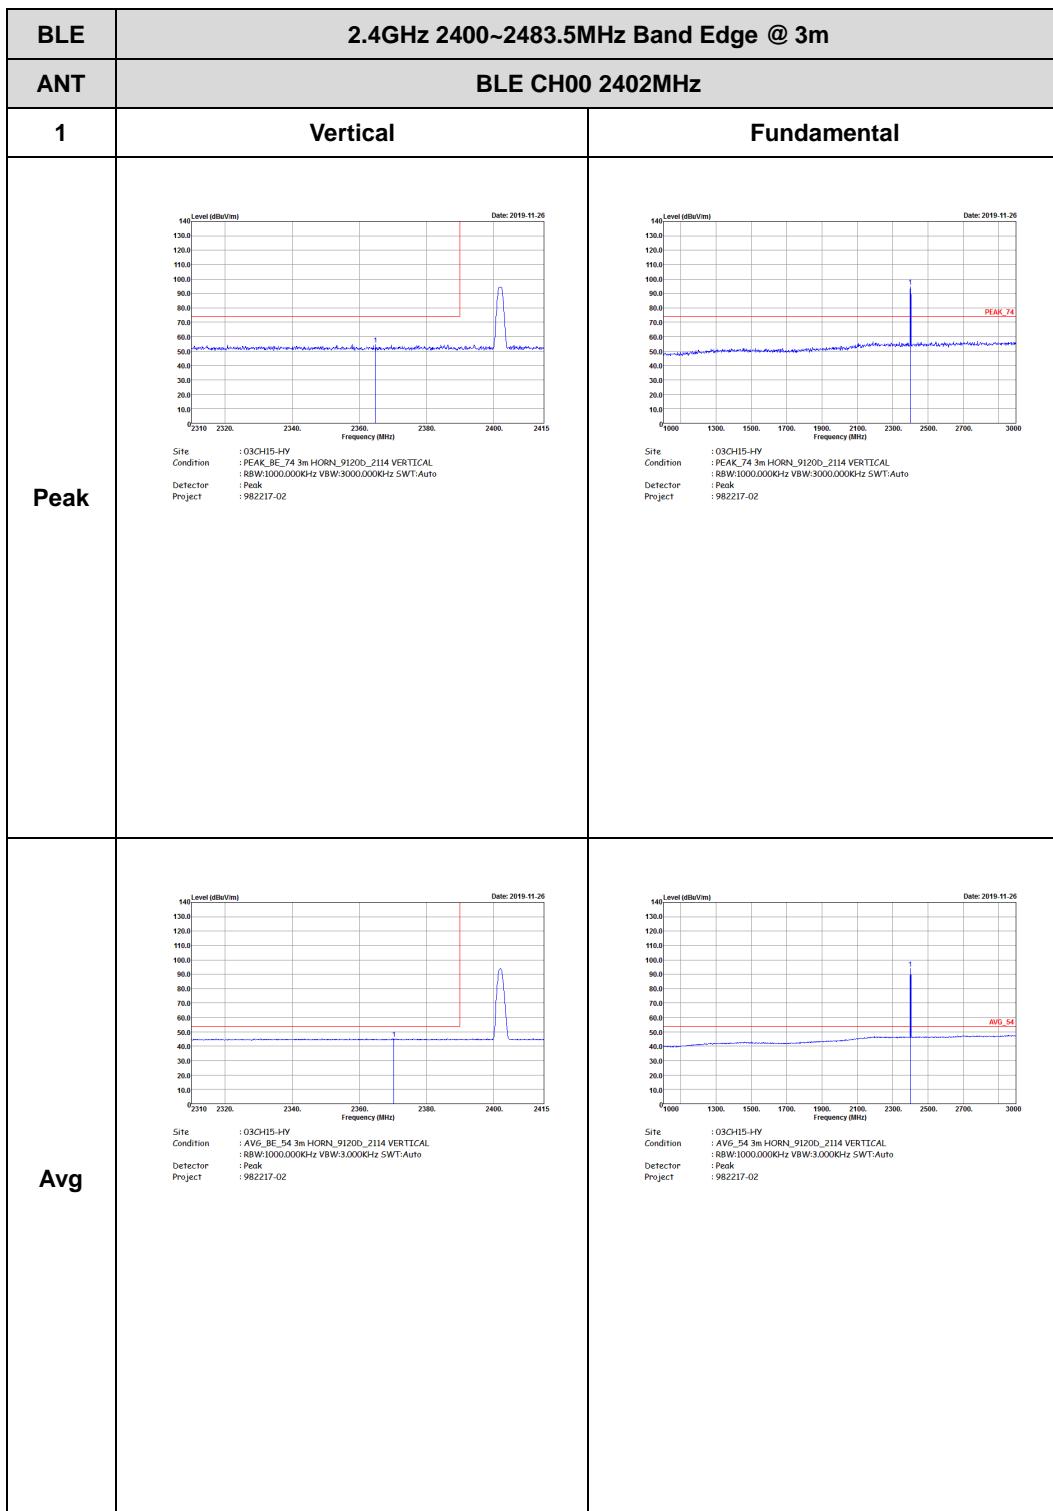



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)




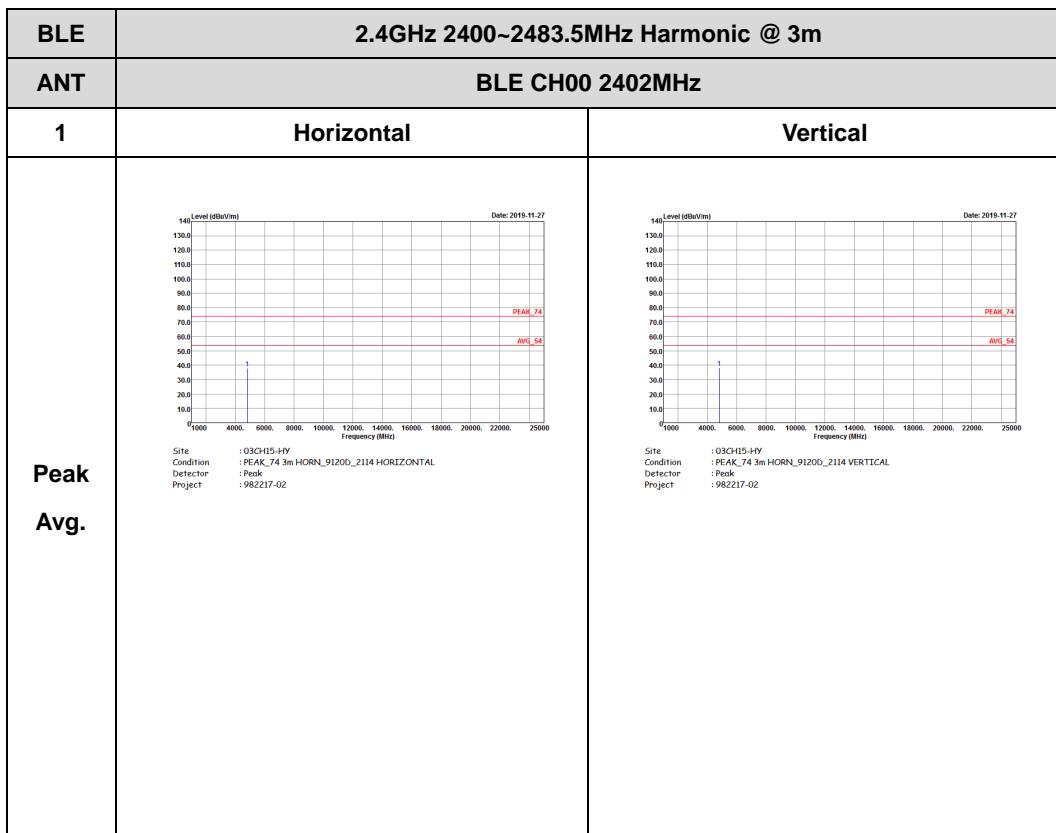





<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

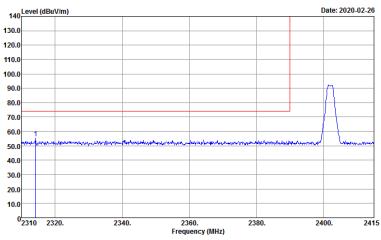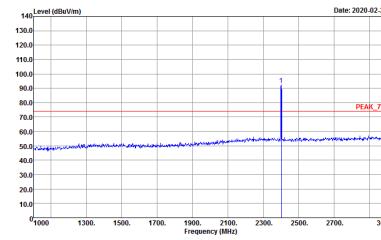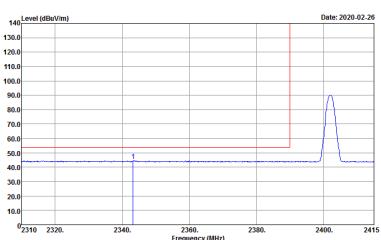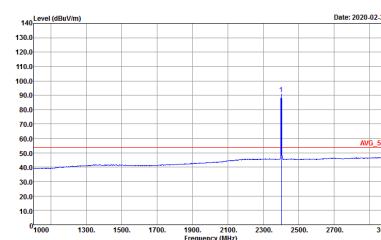
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>14 Level (dBuV/m) Date: 2020-02-26 2310 2320. 2340. 2360. 2380. 2400. 2415 Frequency (MHz) Site : 03CH15-HY Condition : PEAK_BE_74_3m 91200_15_1620 HORIZONTAL Detector : R8W:1000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 982217-02</p>	 <p>14 Level (dBuV/m) Date: 2020-02-26 1000 1300. 1500. 1700. 1900. 2100. 2300. 2500. 2700. 3000 Frequency (MHz) Site : 03CH15-HY Condition : PEAK_74_3m 91200_15_1620 HORIZONTAL Detector : R8W:1000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 982217-02</p>
Avg.	 <p>14 Level (dBuV/m) Date: 2020-02-26 2310 2320. 2340. 2360. 2380. 2400. 2415 Frequency (MHz) Site : 03CH15-HY Condition : AVG_BE_54_3m 91200_15_1620 HORIZONTAL Detector : R8W:1000.0000Hz VBW:1.0000Hz SWT:Auto Project : 982217-02</p>	 <p>14 Level (dBuV/m) Date: 2020-02-26 1000 1300. 1500. 1700. 1900. 2100. 2300. 2500. 2700. 3000 Frequency (MHz) Site : 03CH15-HY Condition : AVG_54_3m 91200_15_1620 HORIZONTAL Detector : R8W:1000.0000Hz VBW:1.0000Hz SWT:Auto Project : 982217-02</p>

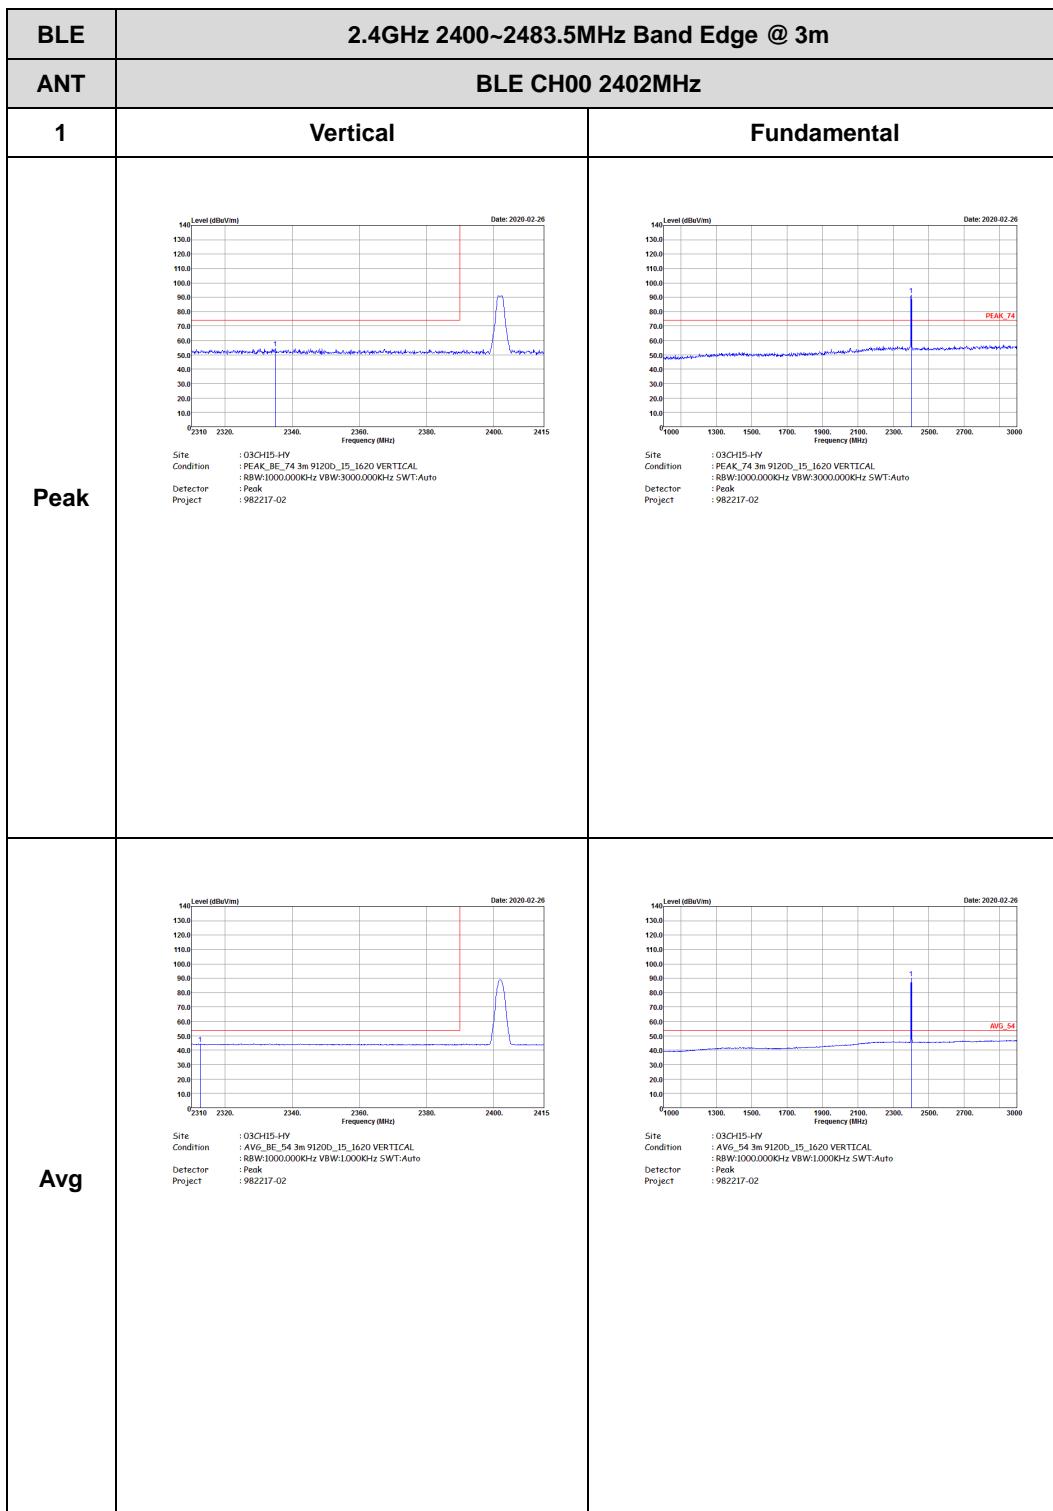



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)




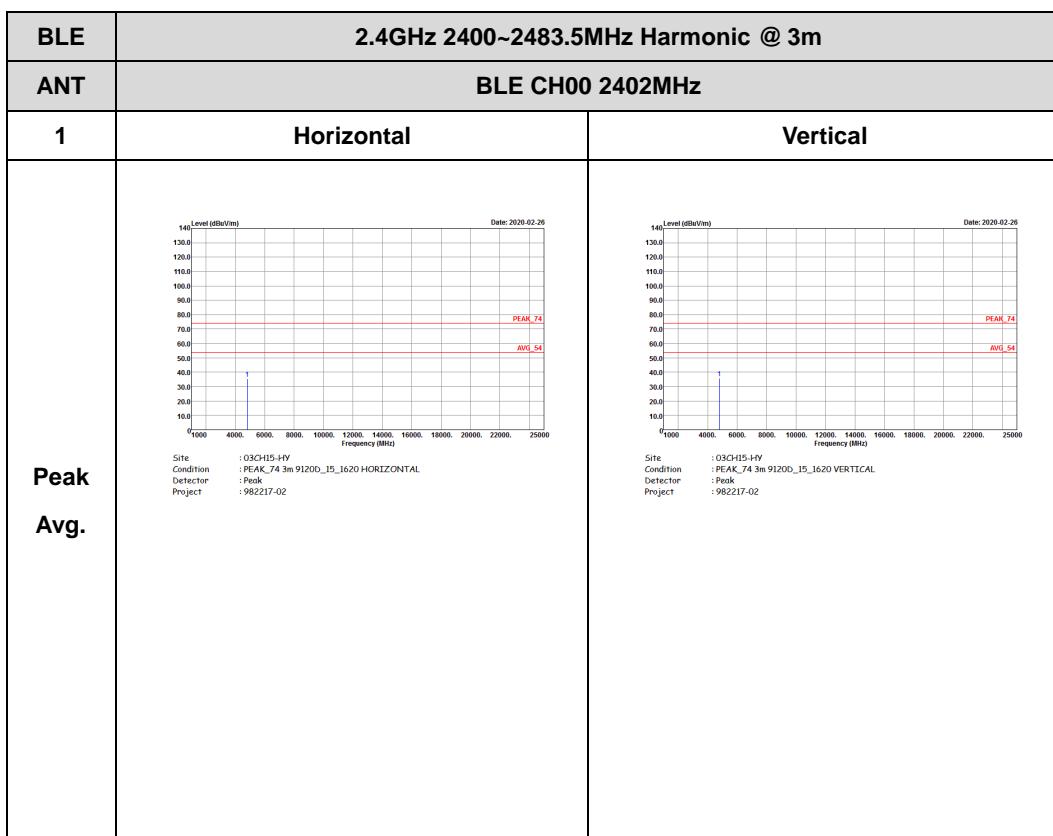








< Ant.2>

<1Mbps>

2.4GHz 2400~2483.5MHz**BLE (Band Edge @ 3m)**

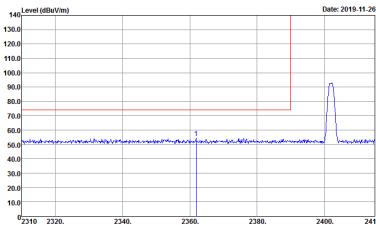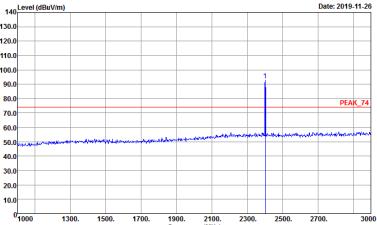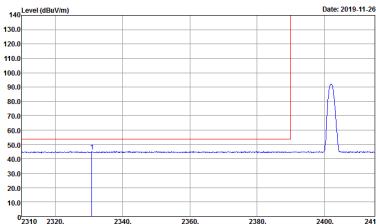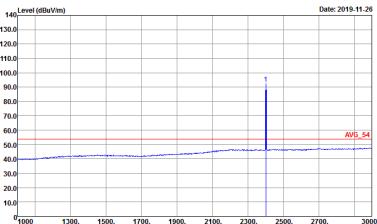BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Horizontal	Fundamental
Peak	 <p>Site : 030CH15-HY Condition : PEAK_BE_74 3m HORN_9120D_2114 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 982217-02</p>	 <p>Site : 030CH15-HY Condition : PEAK_74 3m HORN_9120D_2114 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 982217-02</p>
Avg.	 <p>Site : 030CH15-HY Condition : AVG_BE_54 3m HORN_9120D_2114 HORIZONTAL : RBW:1000.0000Hz VBW:3.0000Hz SWT:Auto Detector : Peak Project : 982217-02</p>	 <p>Site : 030CH15-HY Condition : AVG_54 3m HORN_9120D_2114 HORIZONTAL : RBW:1000.0000Hz VBW:3.0000Hz SWT:Auto Detector : Peak Project : 982217-02</p>

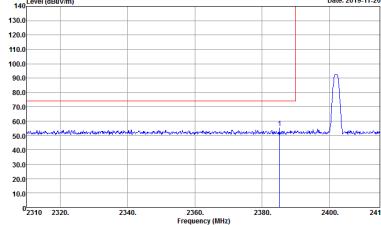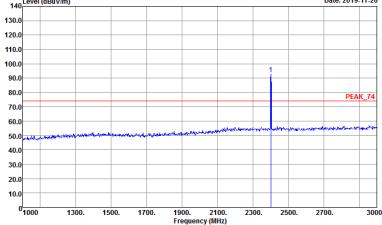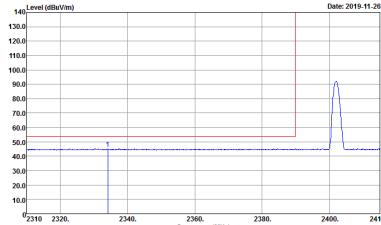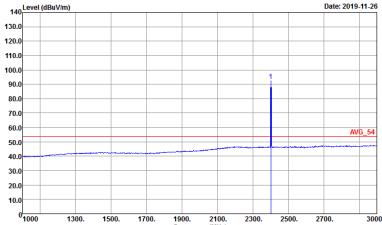


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_9120D_2114 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 982217-02</p>	 <p>Site : 03CH15-HY Condition : PEAK_74 3m HORN_9120D_2114 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 982217-02</p>
Avg	 <p>Site : 03CH15-HY Condition : AVG_BE_54 3m HORN_9120D_2114 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 982217-02</p>	 <p>Site : 03CH15-HY Condition : AVG_54 3m HORN_9120D_2114 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 982217-02</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

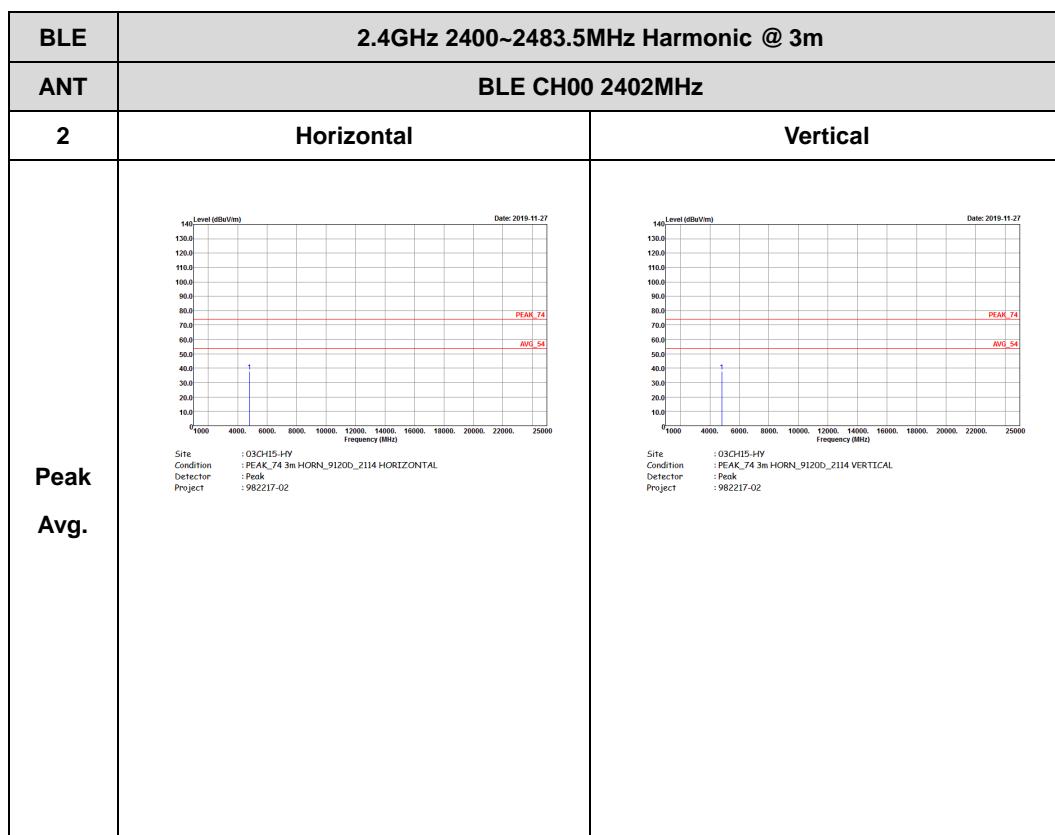






<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

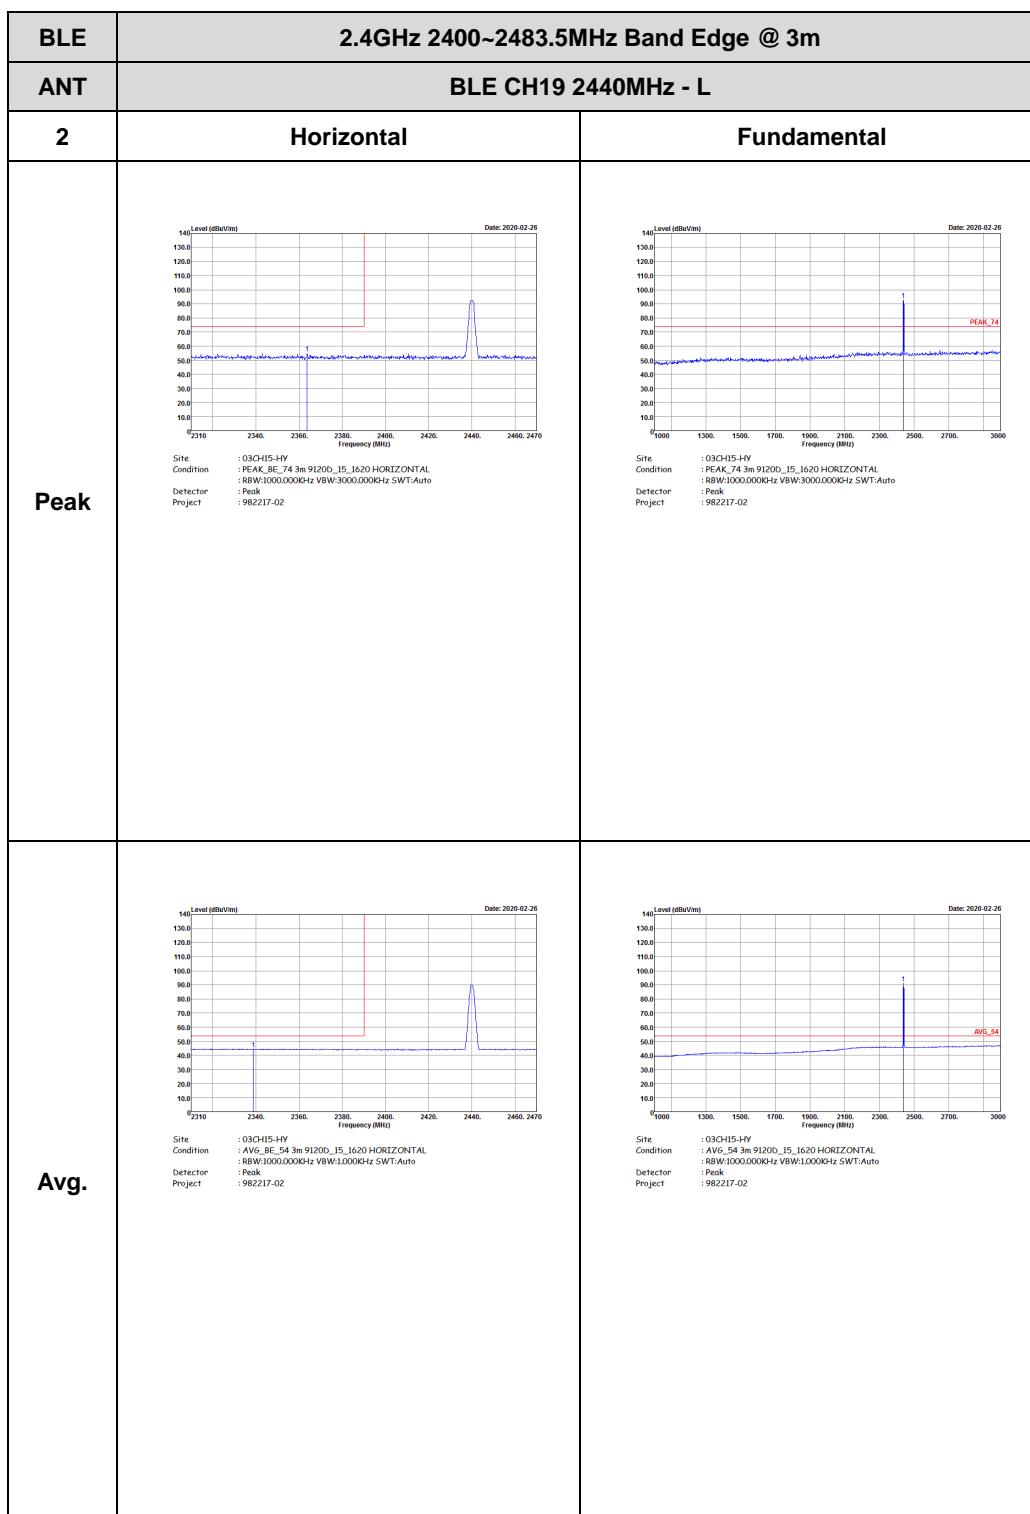

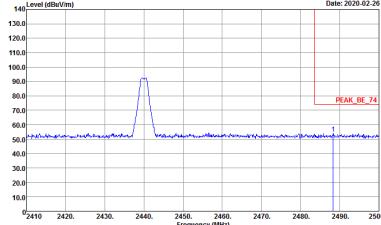
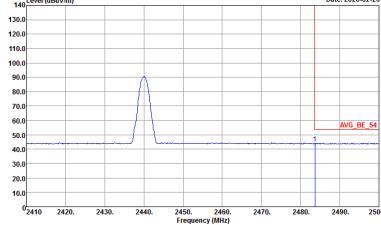


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
2	Horizontal	Fundamental
Peak	 <p>Level (dBmV/m)</p> <p>Date: 2020-02-26</p> <p>Frequency (MHz)</p> <p>Site : 03CH15-HY Condition : PCMK_BE_74 3m 91200_I5_1620 HORIZONTAL Detector : R8W1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak : 982217-02</p>	Left blank
Avg.	 <p>Level (dBmV/m)</p> <p>Date: 2020-02-26</p> <p>Frequency (MHz)</p> <p>Site : AVG_BE_54 3m 91200_I5_1620 HORIZONTAL Condition : R8W1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 982217-02</p>	Left blank

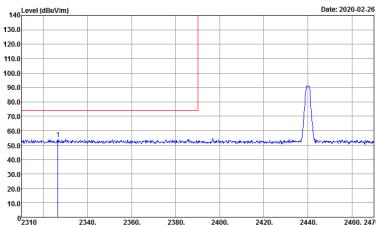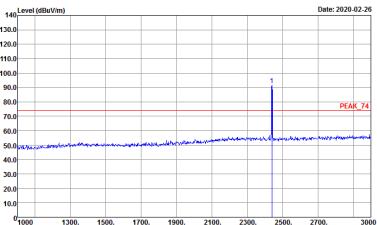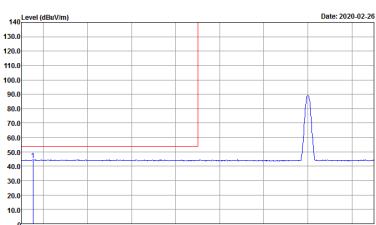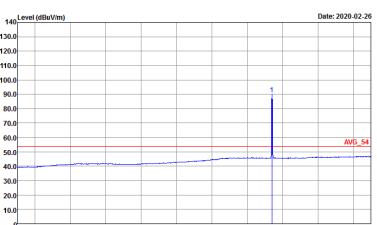

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_I5_1620 VERTICAL Detector : R8W:1000.000KHz VBW:3000.000Hz SWT:Auto Project : Peak : 982217-02	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_I5_1620 VERTICAL Detector : R8W:1000.000KHz VBW:3000.000Hz SWT:Auto Project : Peak : 982217-02
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_I5_1620 VERTICAL Detector : R8W:1000.000KHz VBW:1000Hz SWT:Auto Project : Avg : 982217-02	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_I5_1620 VERTICAL Detector : R8W:1000.000KHz VBW:1000Hz SWT:Auto Project : Avg : 982217-02

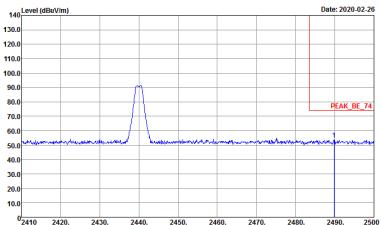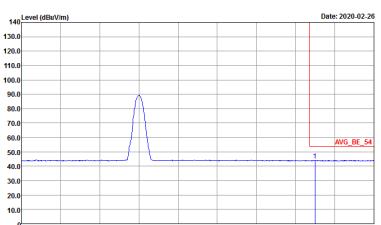


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
2	Vertical	Fundamental
Peak	 <p>Level (dBmV/m)</p> <p>Date: 2020-02-26</p> <p>2410 2420 2430 2440 2450 2460 2470 2480 2490 2500</p> <p>Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL Detector : R8W:1000.000KHz VBW:3000.000Hz SWT:Auto Project : 982217-02</p>	Left blank
Avg.	 <p>Level (dBmV/m)</p> <p>Date: 2020-02-26</p> <p>2410 2420 2430 2440 2450 2460 2470 2480 2490 2500</p> <p>Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL Detector : R8W:1000.000KHz VBW:1000.0Hz SWT:Auto Project : 982217-02</p>	Left blank



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

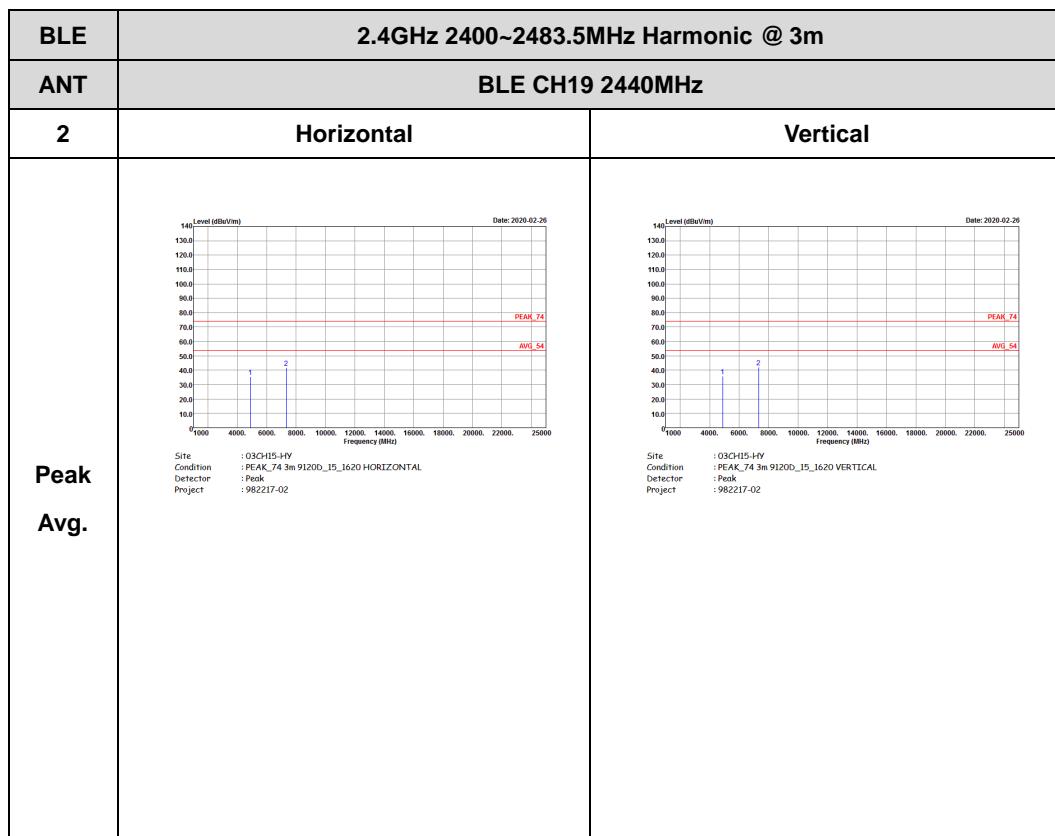



Appendix E. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1	Bluetooth -LE for 1Mbps	60.8	380	2.63	3kHz	2.16
1	Bluetooth -LE for 2Mbps	57.31	1070	0.93	1kHz	2.42
2	Bluetooth -LE for 1Mbps	60.8	380	2.63	3kHz	2.16
2	Bluetooth -LE for 2Mbps	57.31	1070	0.93	1kHz	2.42




<Ant. 1>

Bluetooth - LE

<1Mbps>

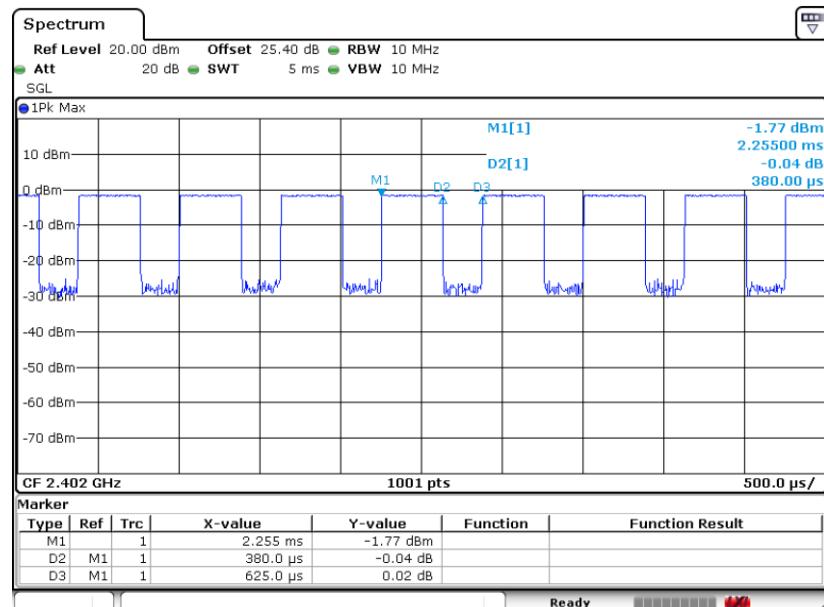


<2Mbps>

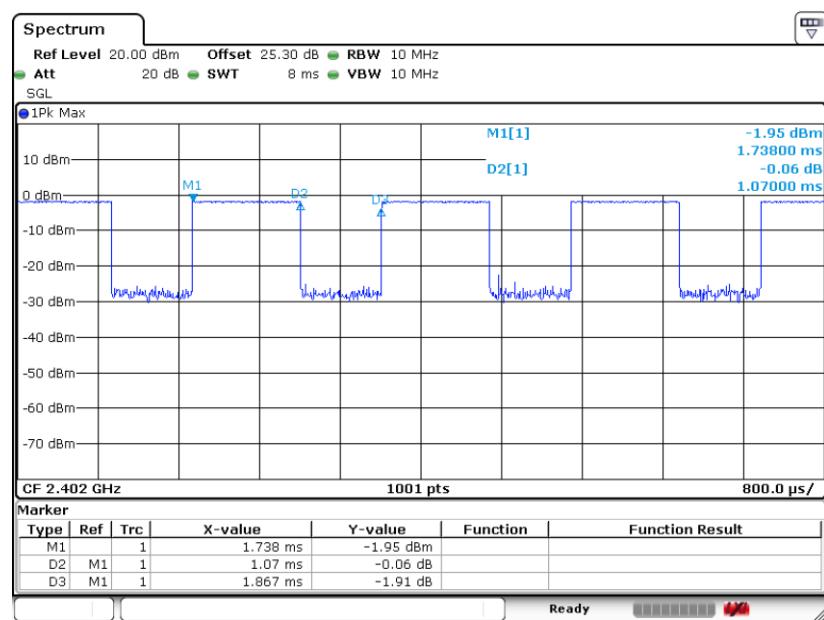




<Ant. 2>

<1Mbps>

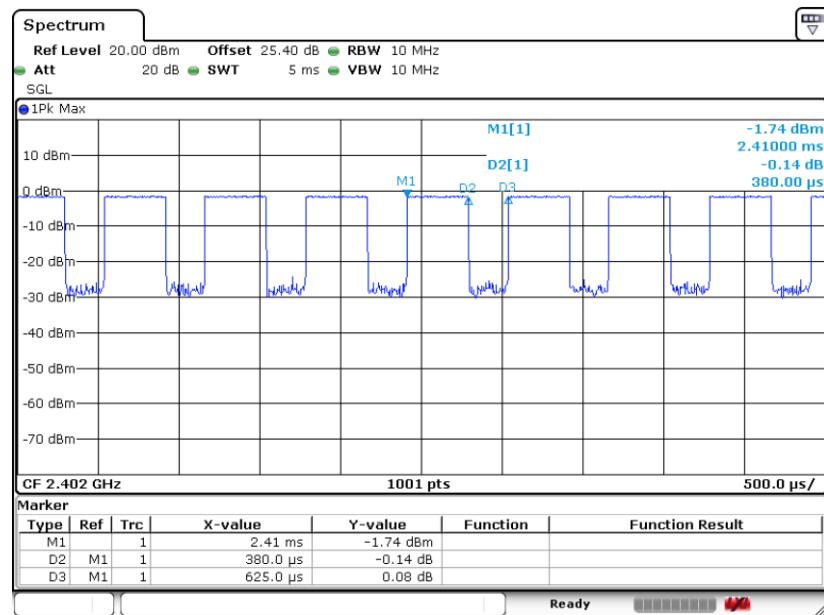

Date: 13.NOV.2019 19:52:12

<2Mbps>

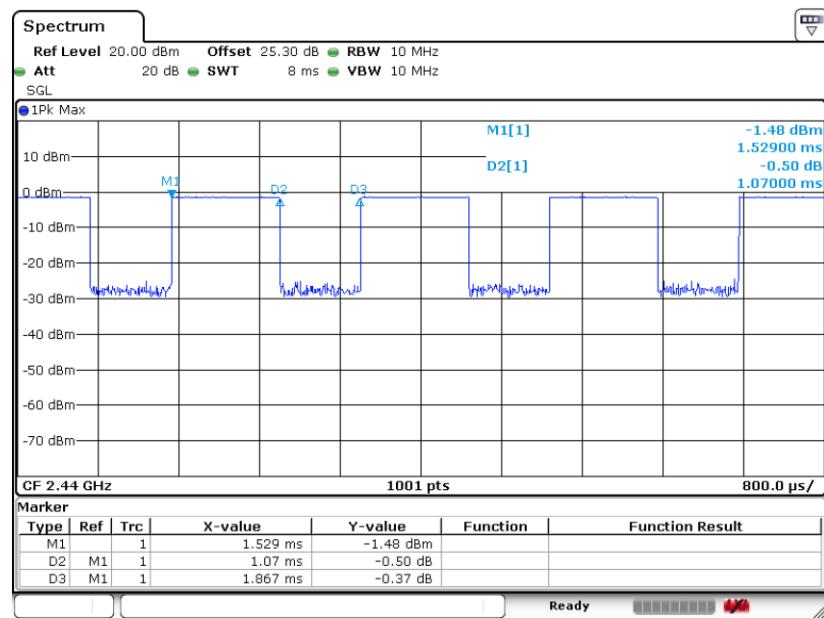

Date: 28.FEB.2020 19:28:19

—————THE END—————