





<3Mbps>

Hopping Mode Low Band Edge Plot

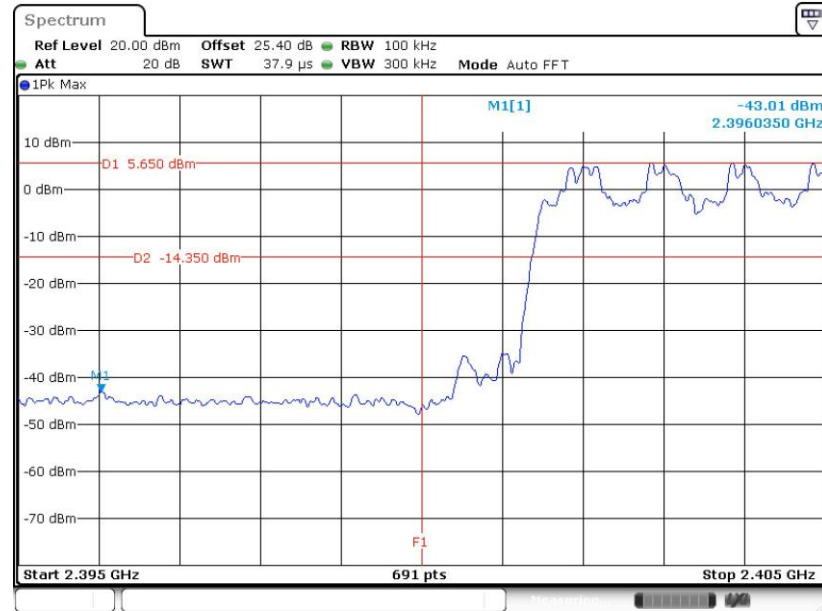


Hopping Mode High Band Edge Plot

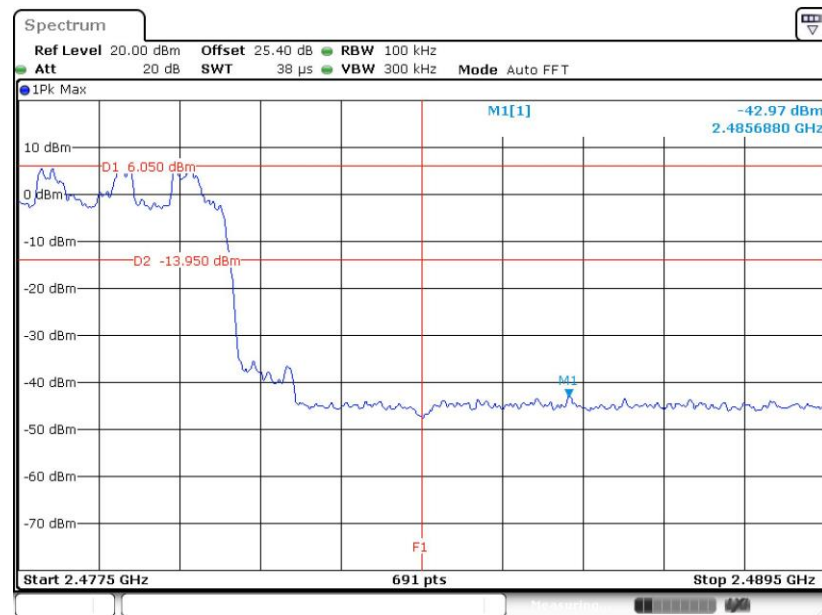

<Ant. 2>


<1Mbps>

Hopping Mode Low Band Edge Plot

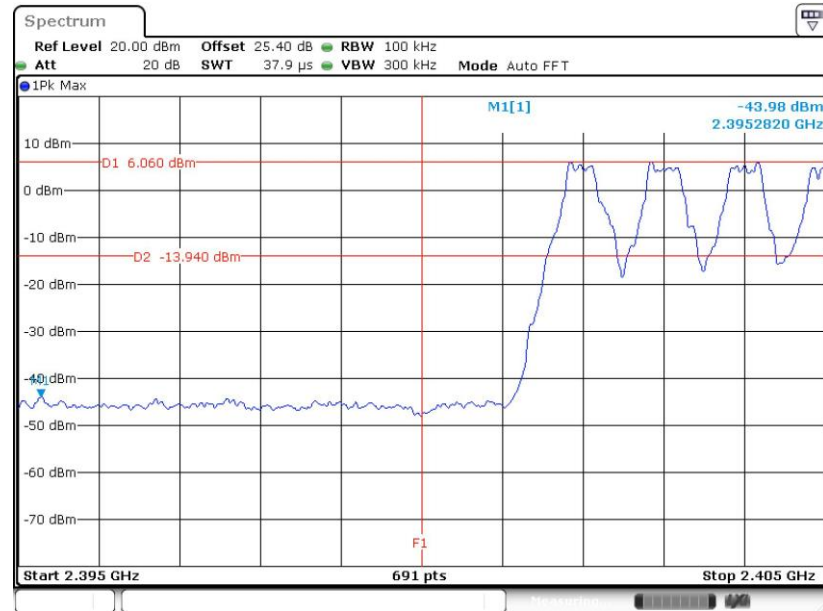

Date: 18.NOV.2019 13:24:56

Hopping Mode High Band Edge Plot

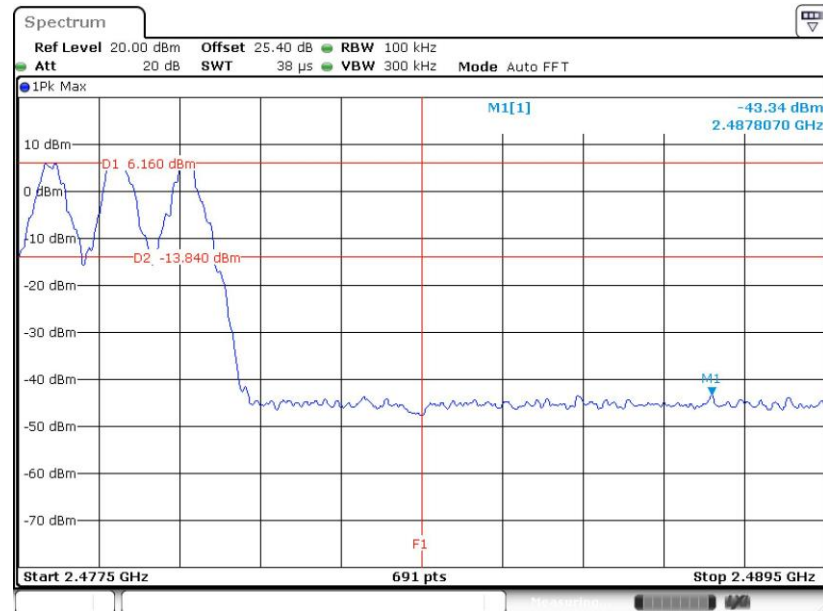


Date: 18.NOV.2019 13:25:13




<2Mbps>

Hopping Mode Low Band Edge Plot

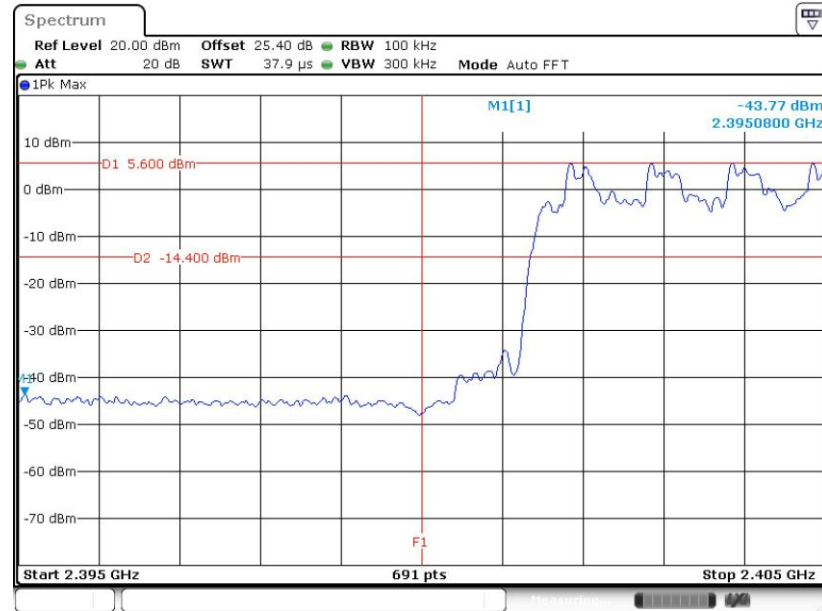

Date: 18.NOV.2019 13:26:01

Hopping Mode High Band Edge Plot

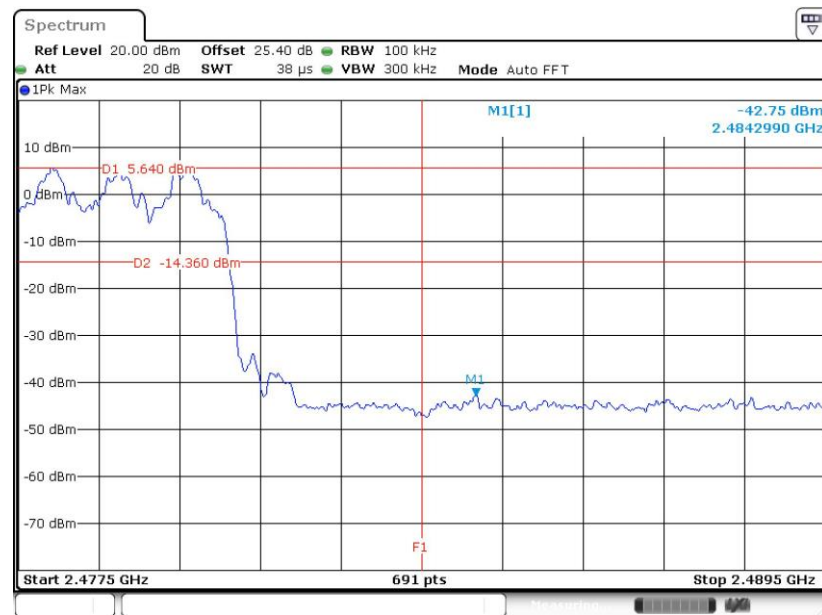


Date: 18.NOV.2019 13:26:28




<3Mbps>

Hopping Mode Low Band Edge Plot

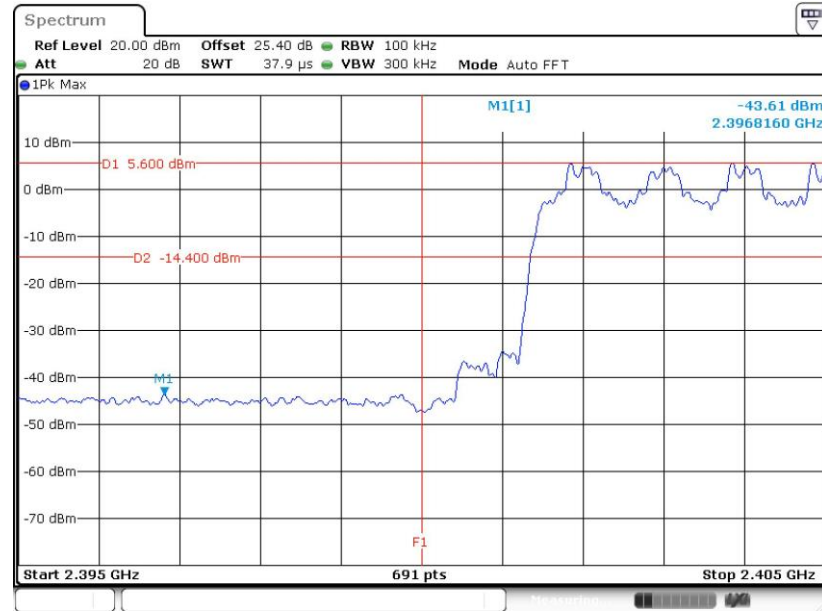

Date: 18.NOV.2019 13:27:26

Hopping Mode High Band Edge Plot

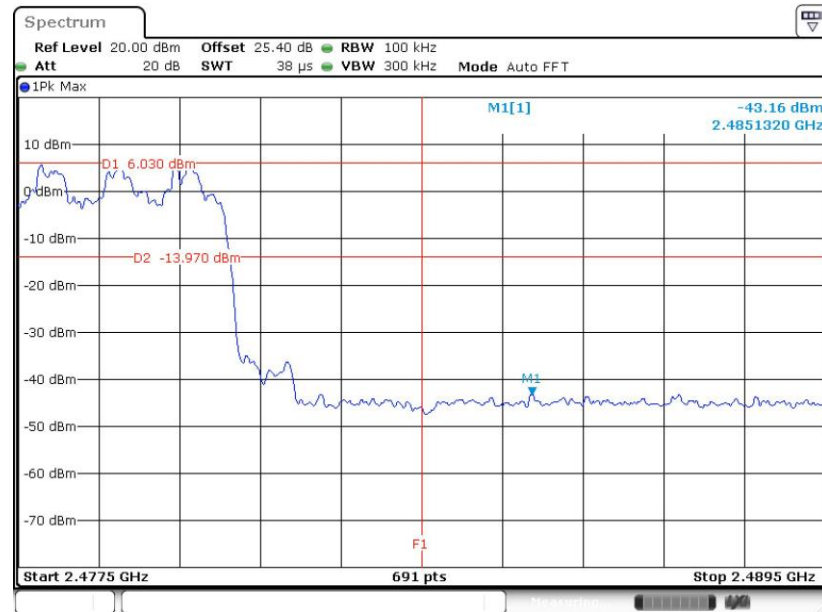

Date: 18.NOV.2019 13:27:55

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

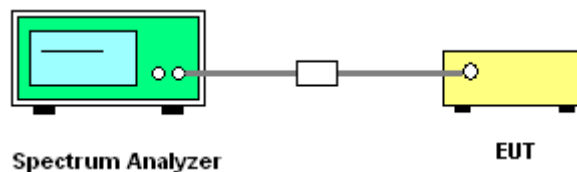


3.7.5 Test Result of Conducted Spurious Emission

<Ant.1>


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

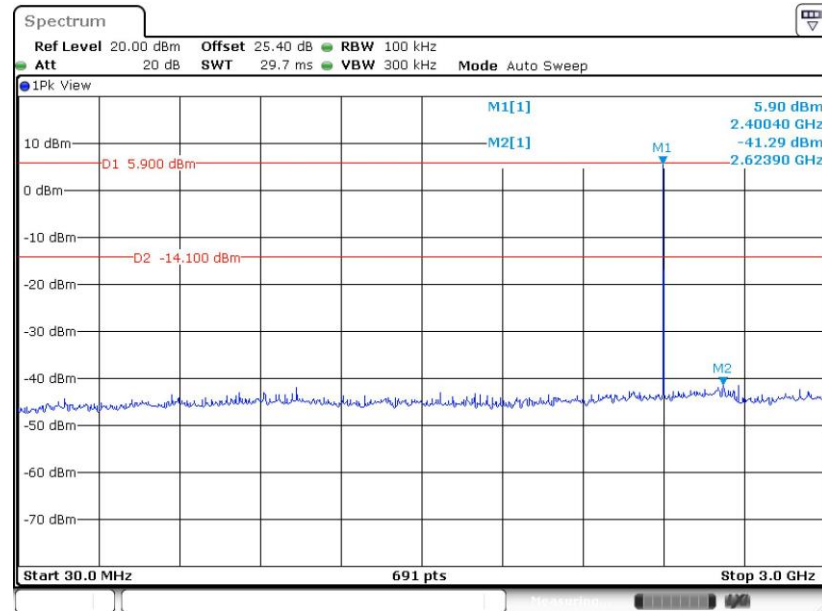


Date: 18.NOV.2019 12:18:52


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

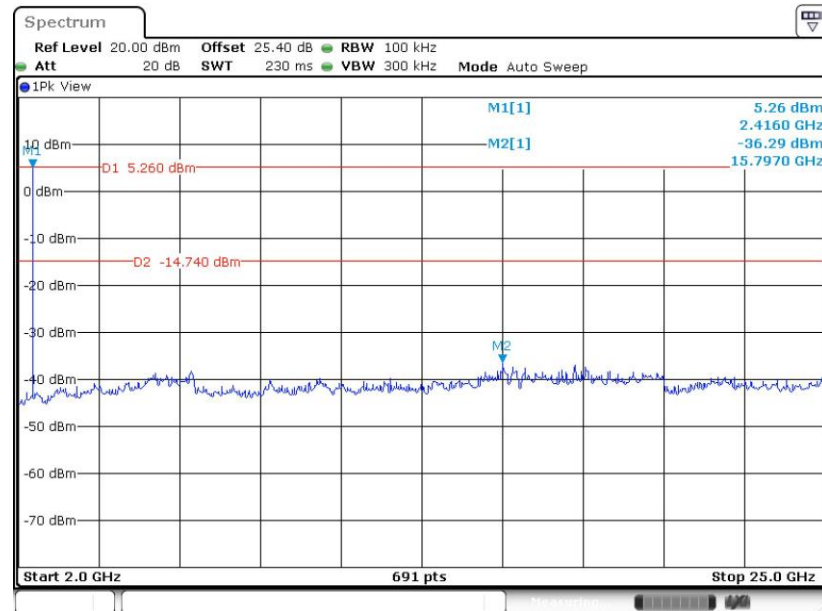


Date: 18.NOV.2019 12:19:19

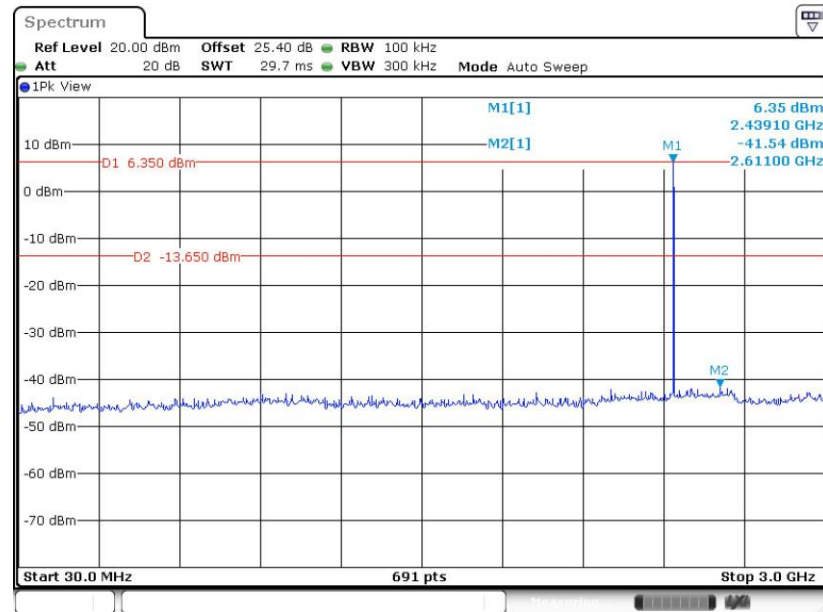CSE Plot on Ch 39 between 30MHz ~ 3 GHz


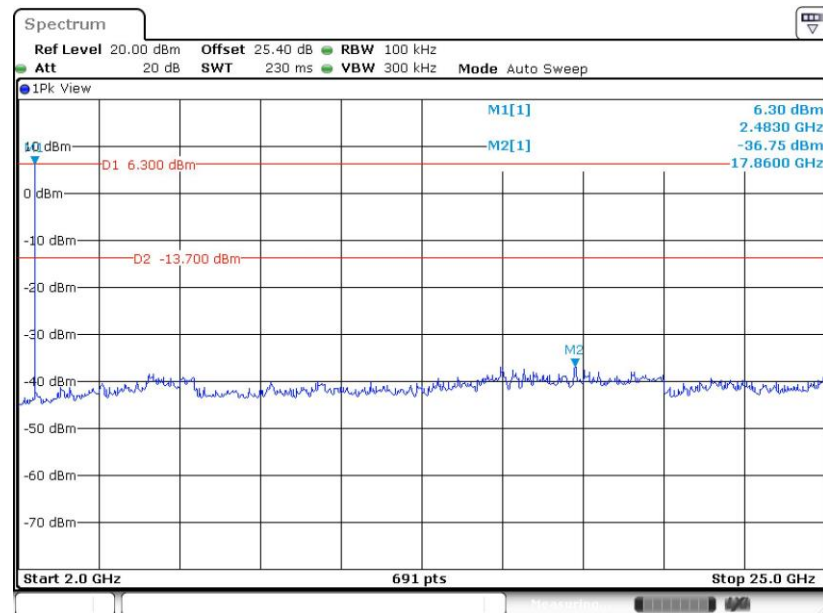
Date: 18.NOV.2019 12:22:15

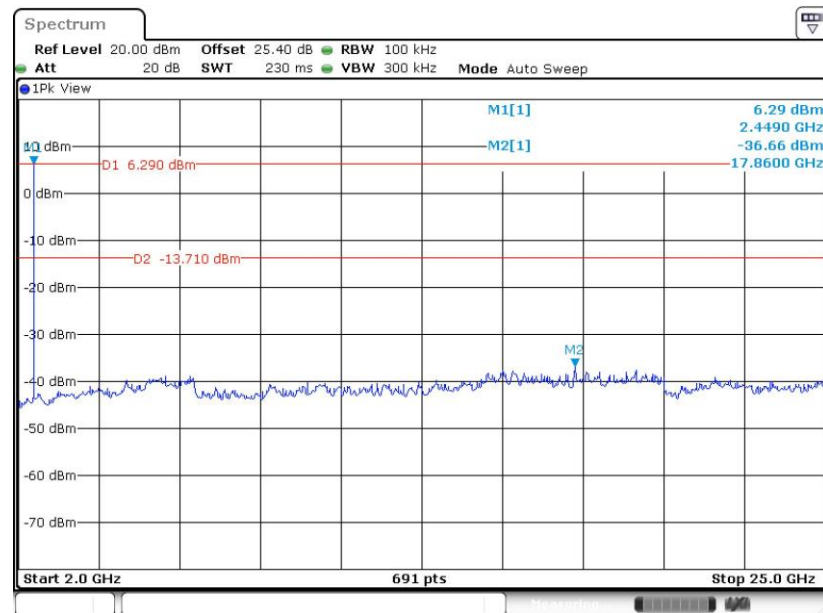CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 18.NOV.2019 12:22:42

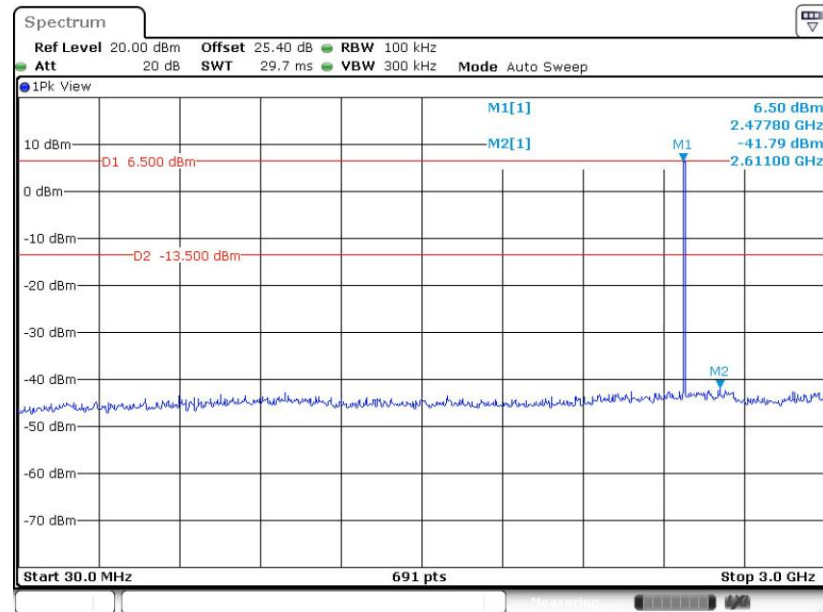CSE Plot on Ch 78 between 30MHz ~ 3 GHz


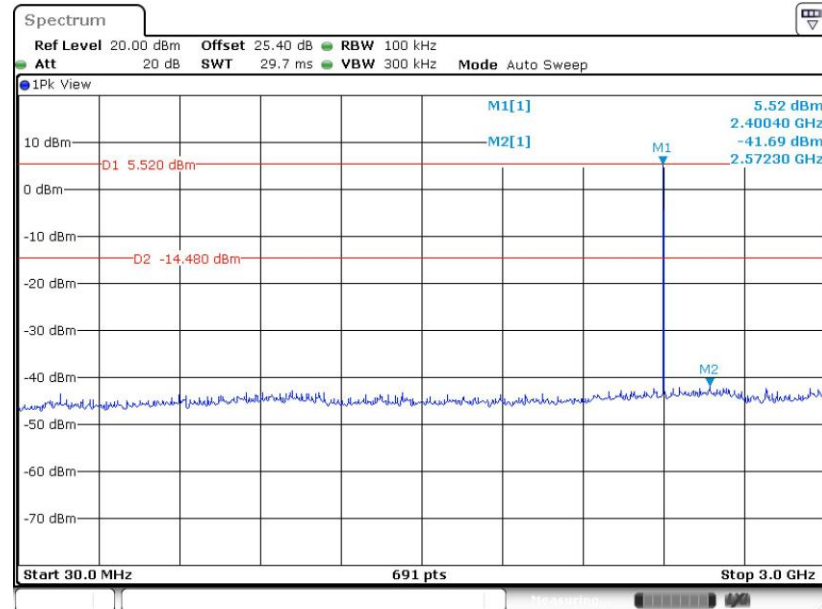
Date: 18.NOV.2019 12:26:42

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 18.NOV.2019 12:27:08


<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz





Date: 18.NOV.2019 12:32:40

CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

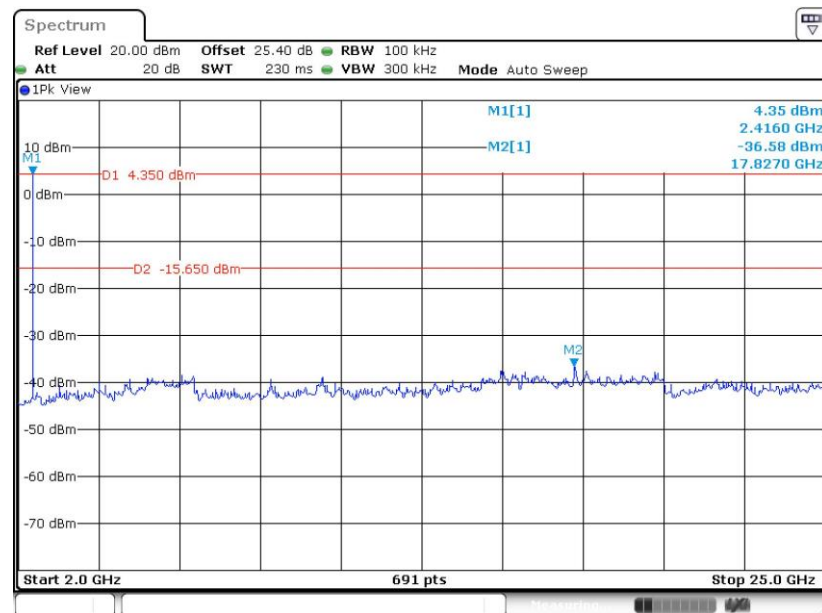


Date: 18.NOV.2019 12:33:18

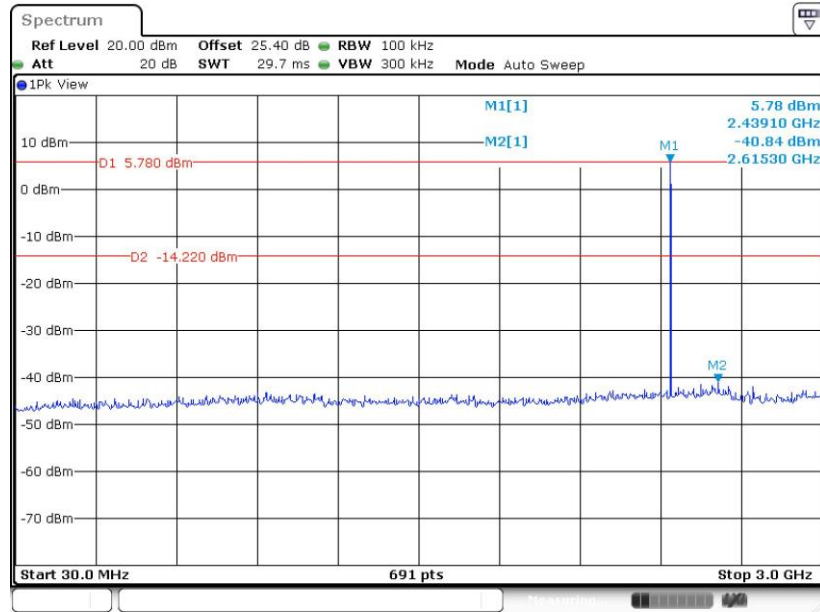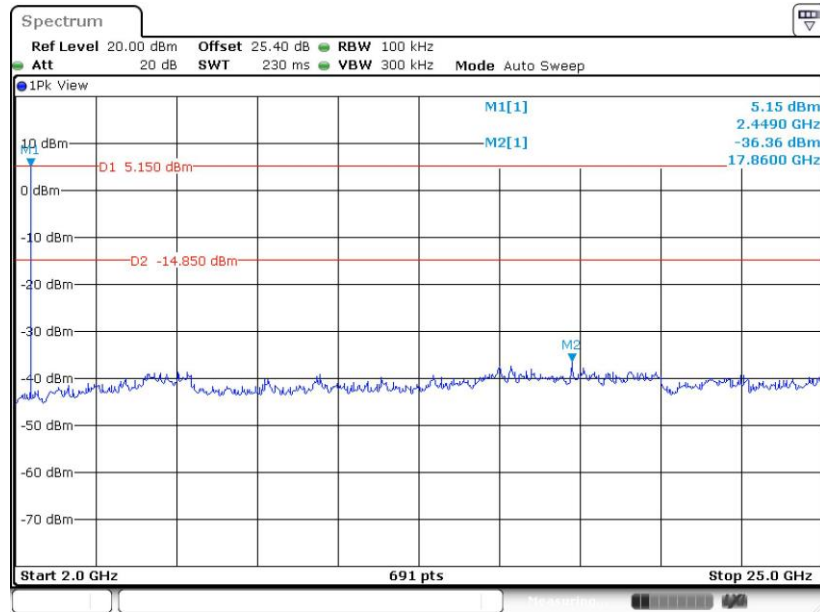**CSE Plot on Ch 39 between 30MHz ~ 3 GHz****CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

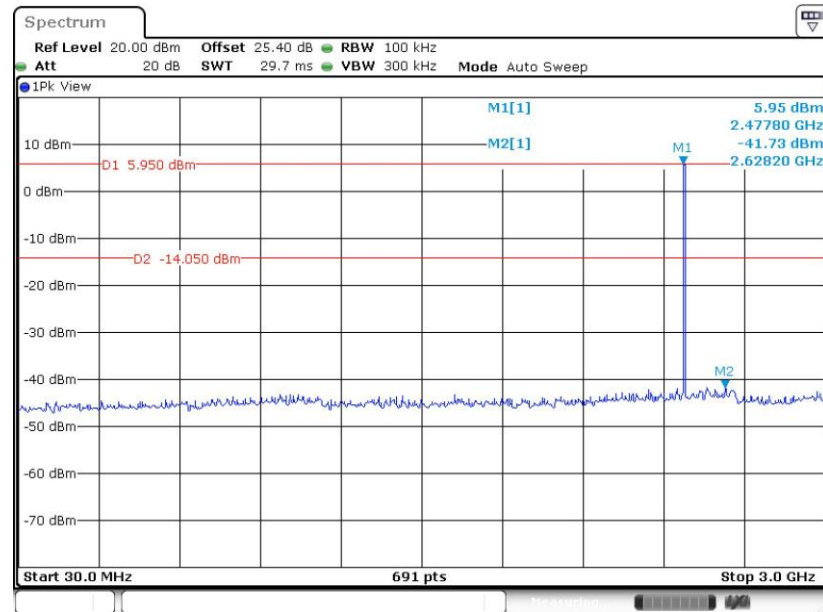

Date: 18.NOV.2019 12:43:20

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

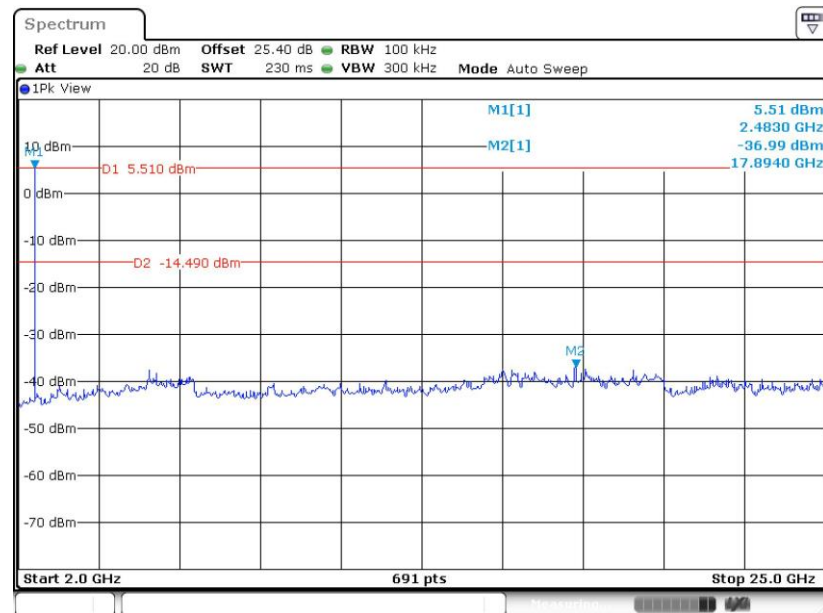


Date: 18.NOV.2019 12:43:47




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

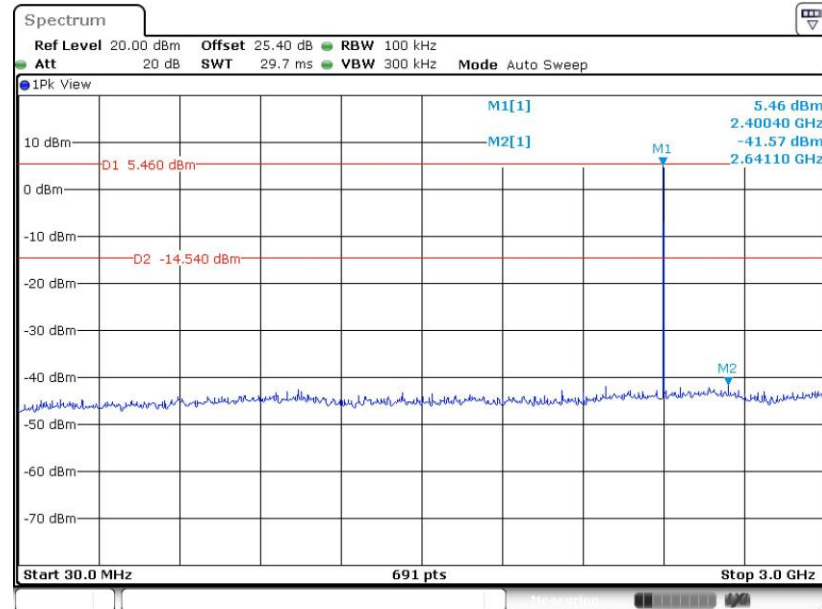


Date: 18.NOV.2019 12:47:09

CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

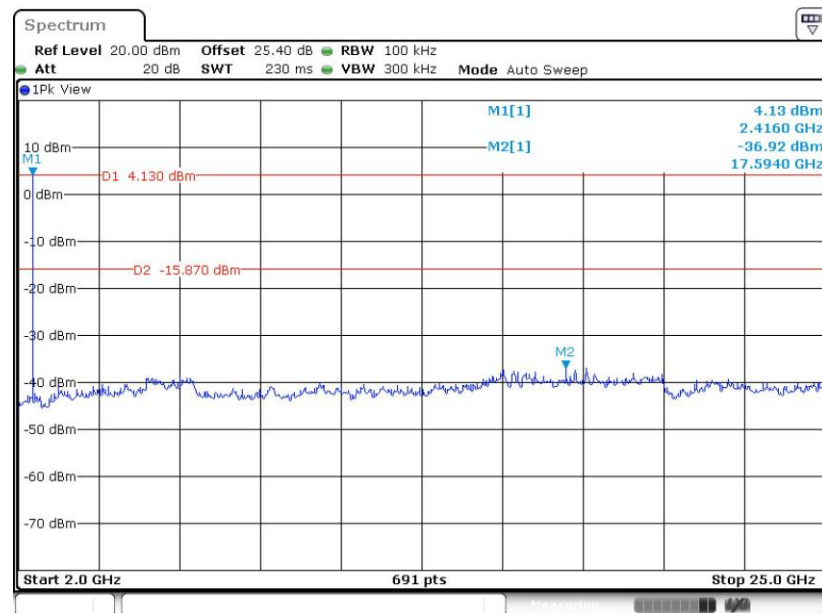




Date: 18.NOV.2019 12:47:37

CSE Plot on Ch 39 between 30MHz ~ 3 GHz

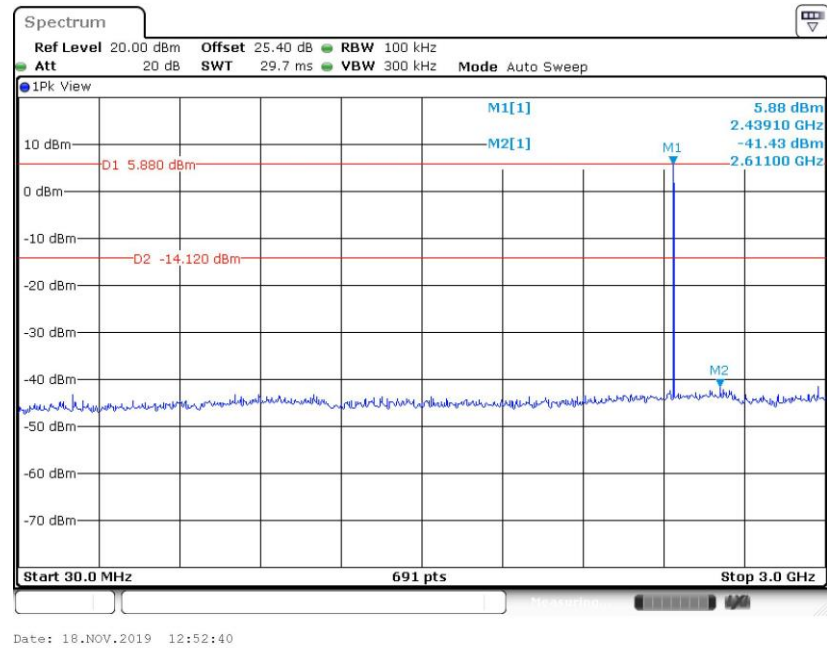

CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

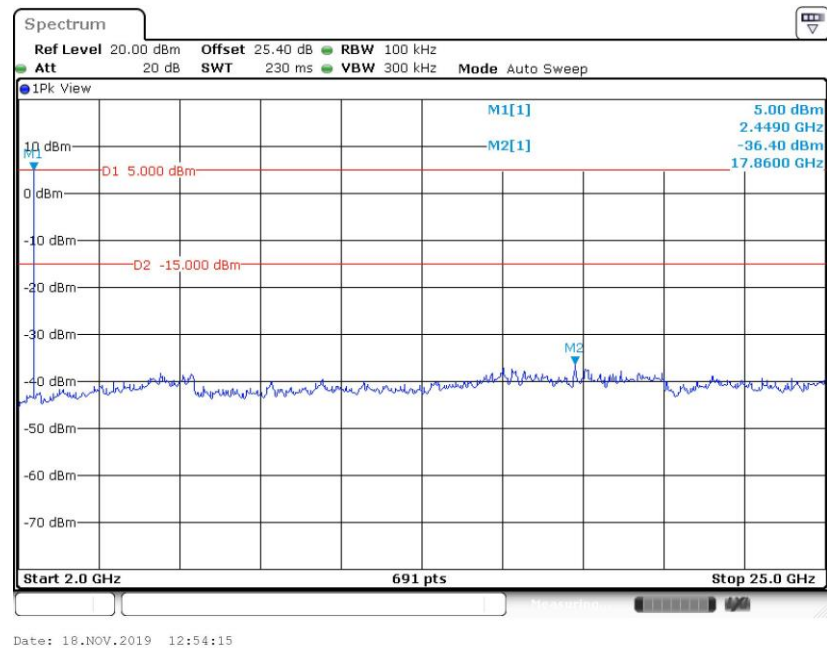


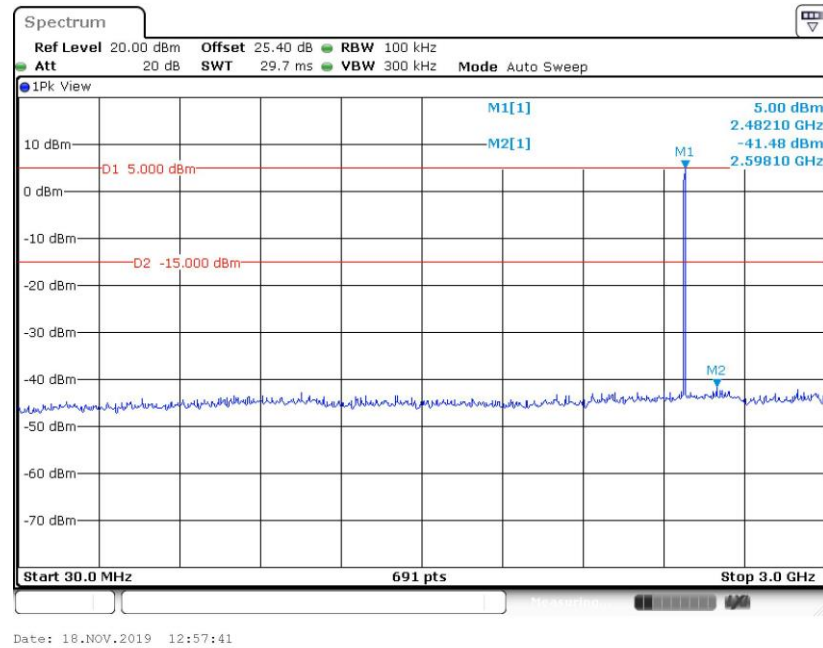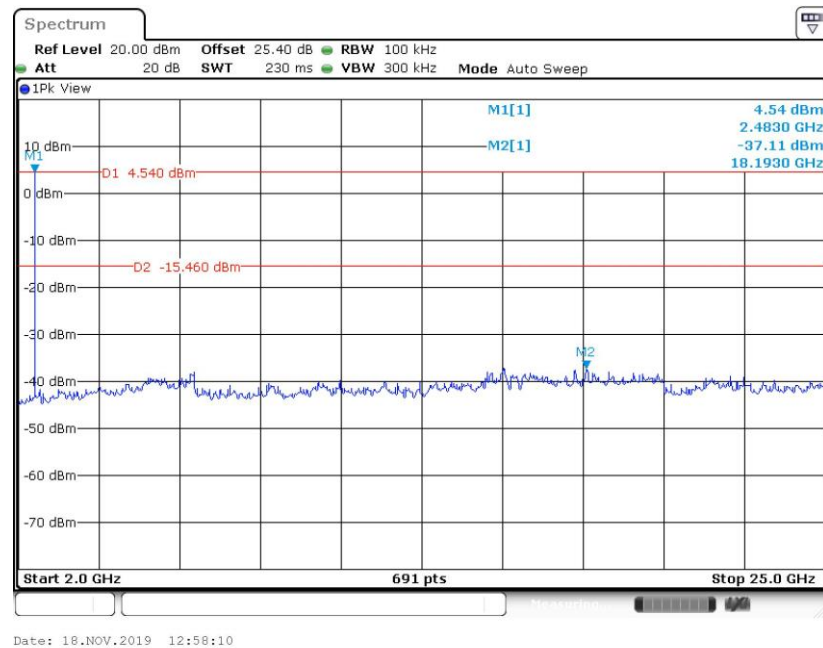CSE Plot on Ch 78 between 30MHz ~ 3 GHz

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


<Ant. 2>


<1Mbps>

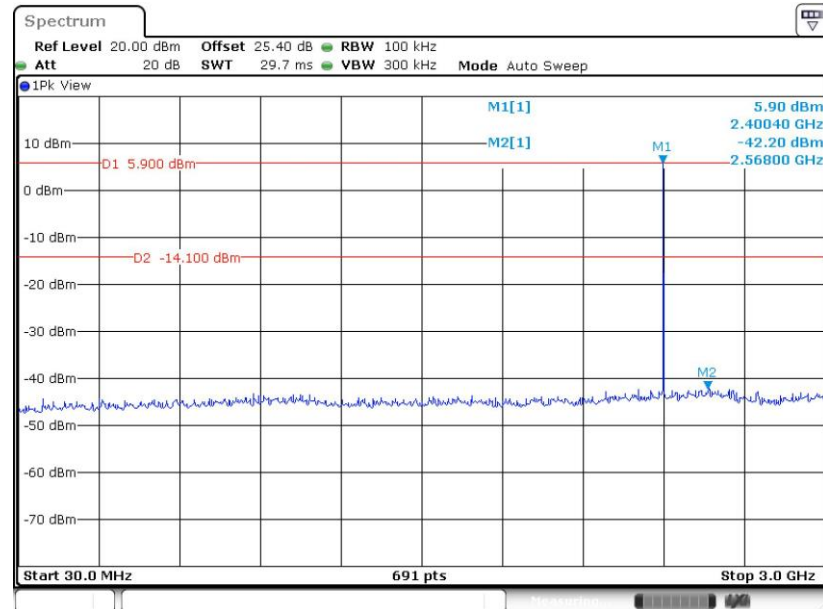CSE Plot on Ch 00 between 30MHz ~ 3 GHz




Date: 18.NOV.2019 13:30:32


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

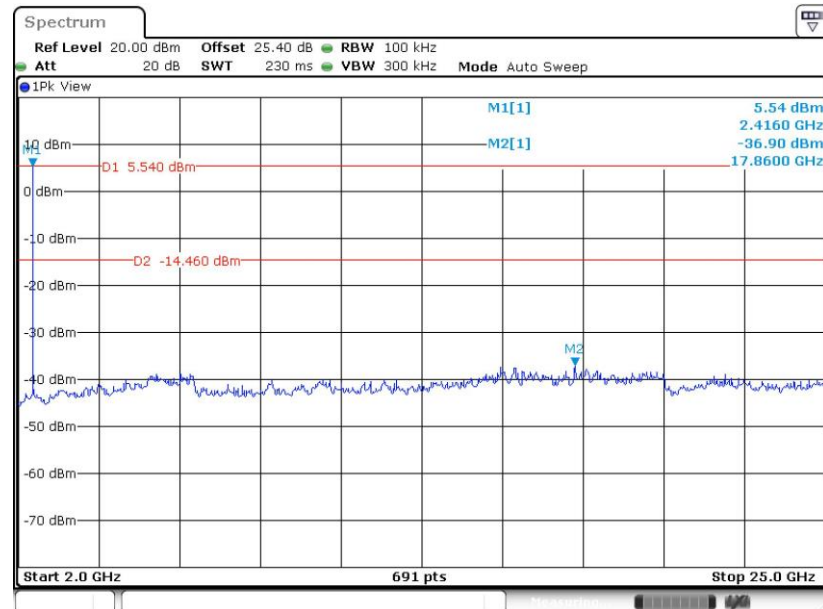



Date: 18.NOV.2019 13:31:00

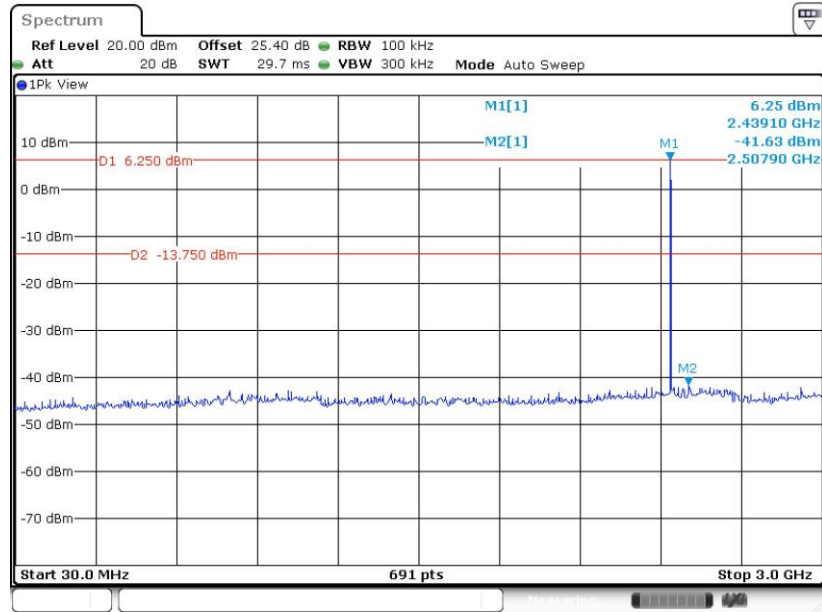**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**

Date: 18.NOV.2019 13:34:13

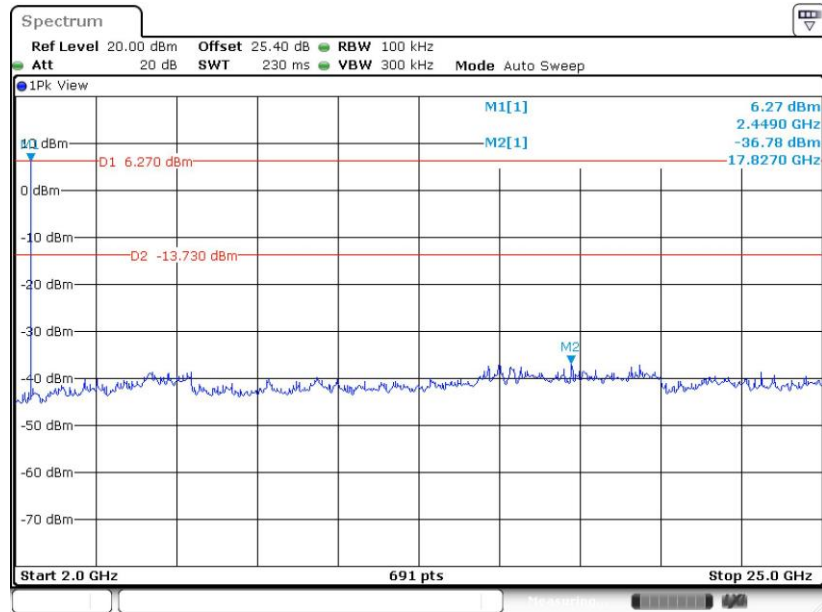
CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 18.NOV.2019 13:34:42

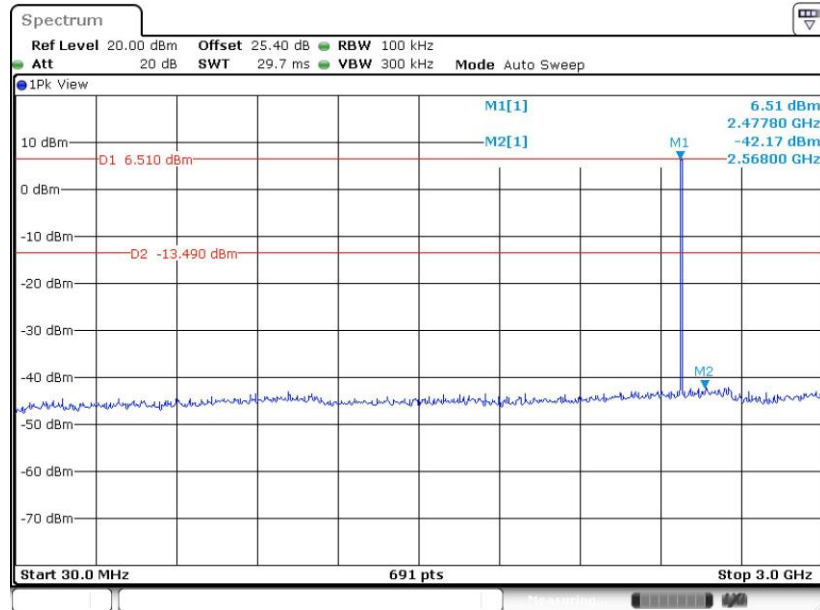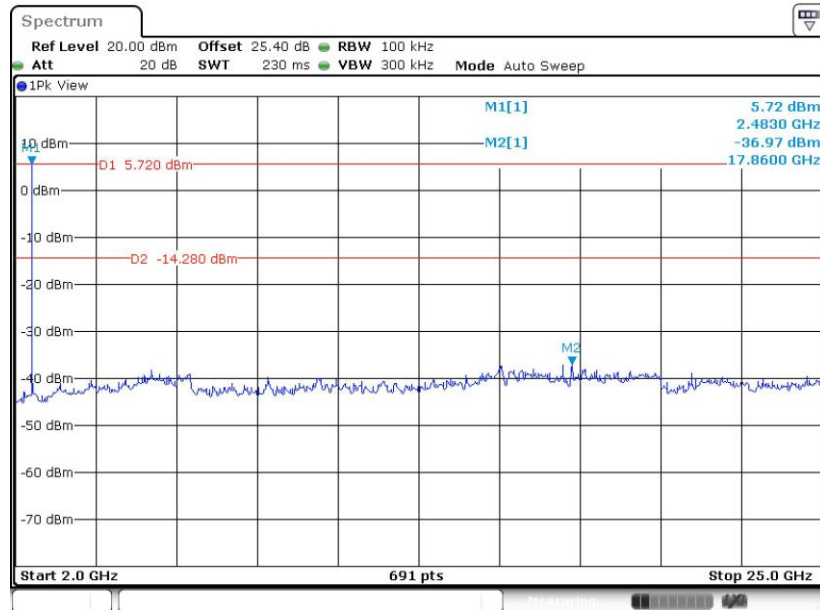**CSE Plot on Ch 78 between 30MHz ~ 3 GHz****CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**


<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

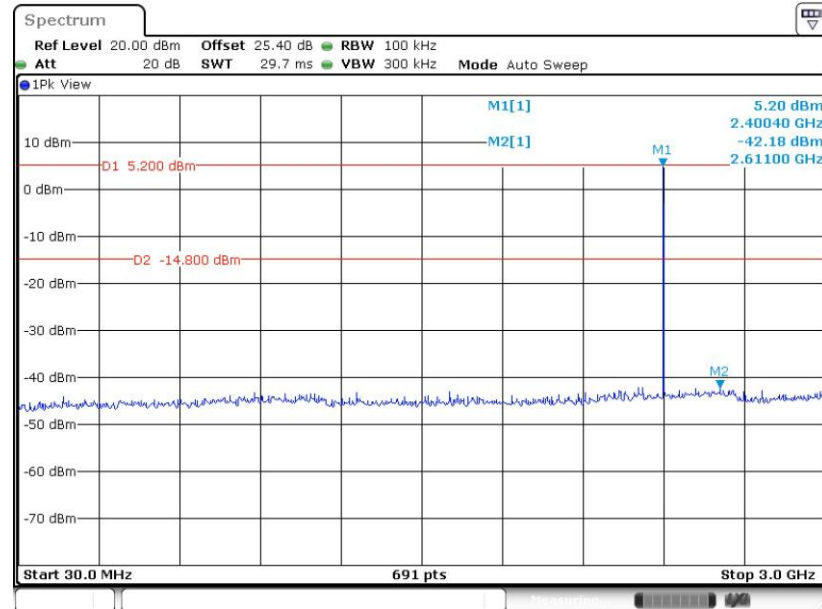

Date: 18.NOV.2019 13:43:09


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

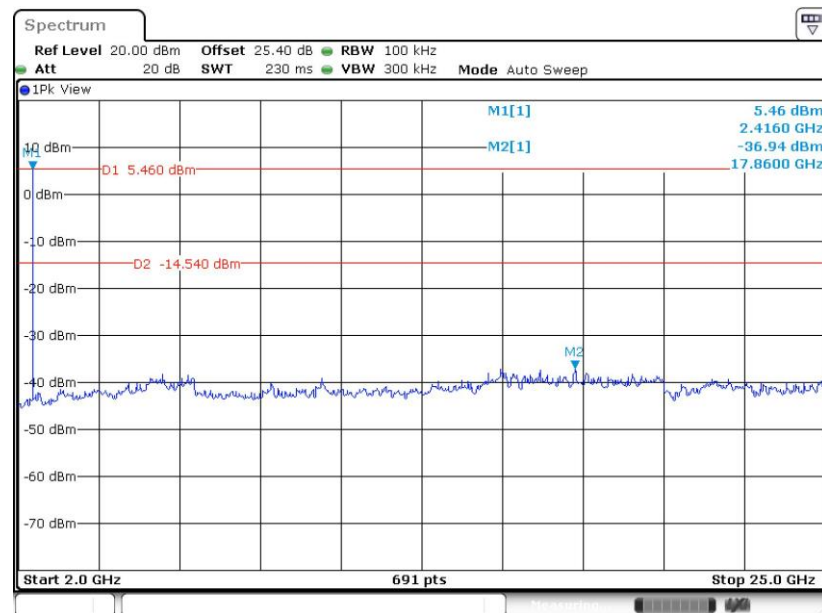


Date: 18.NOV.2019 13:43:36






CSE Plot on Ch 39 between 30MHz ~ 3 GHz

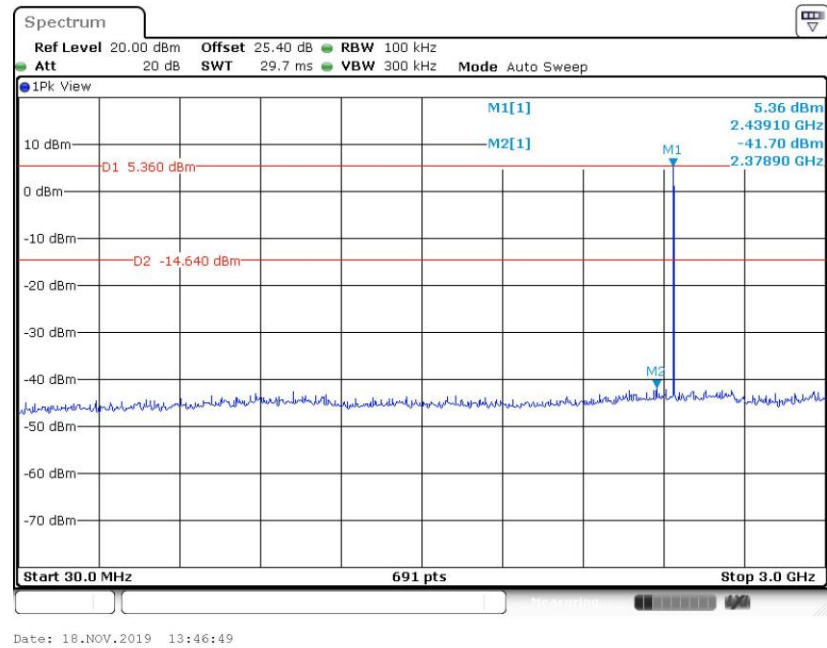


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

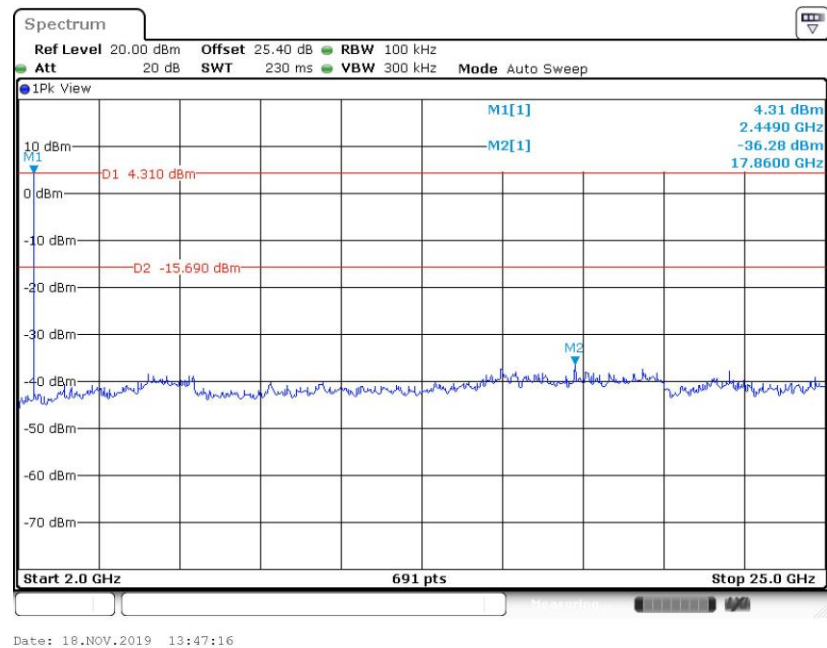

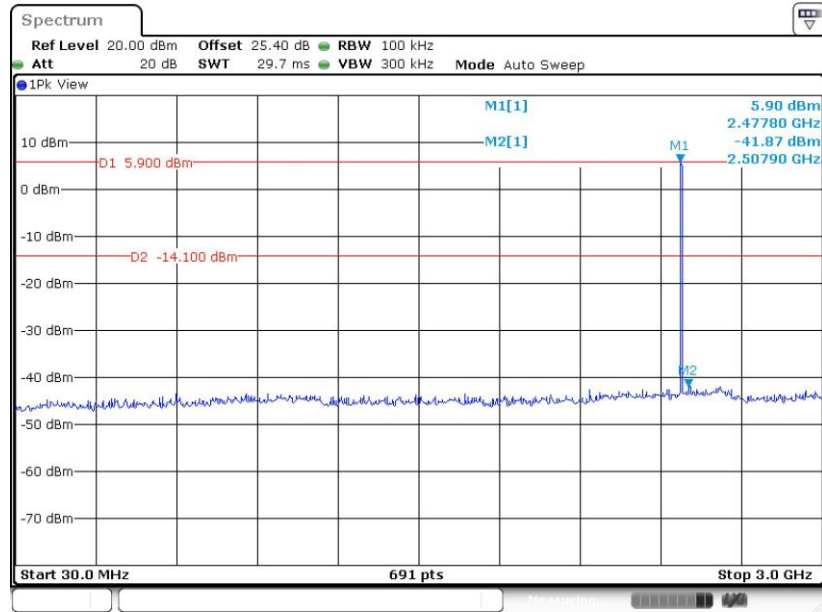
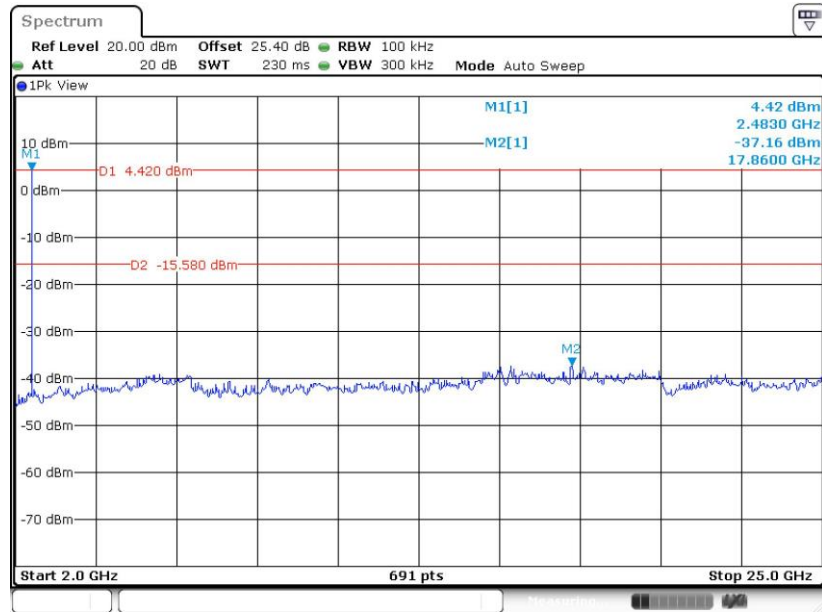
**CSE Plot on Ch 78 between 30MHz ~ 3 GHz****CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**


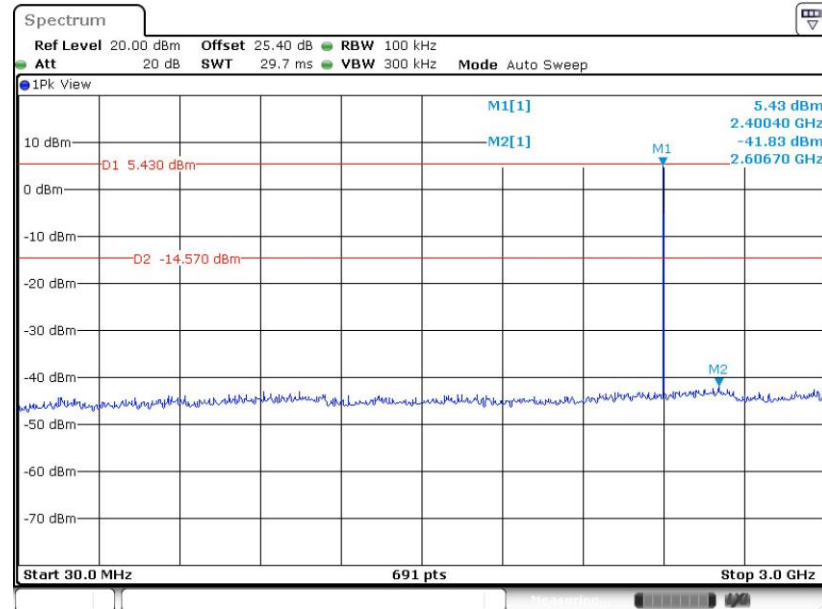
**<3Mbps>****CSE Plot on Ch 00 between 30MHz ~ 3 GHz**

Date: 18.NOV.2019 13:59:53

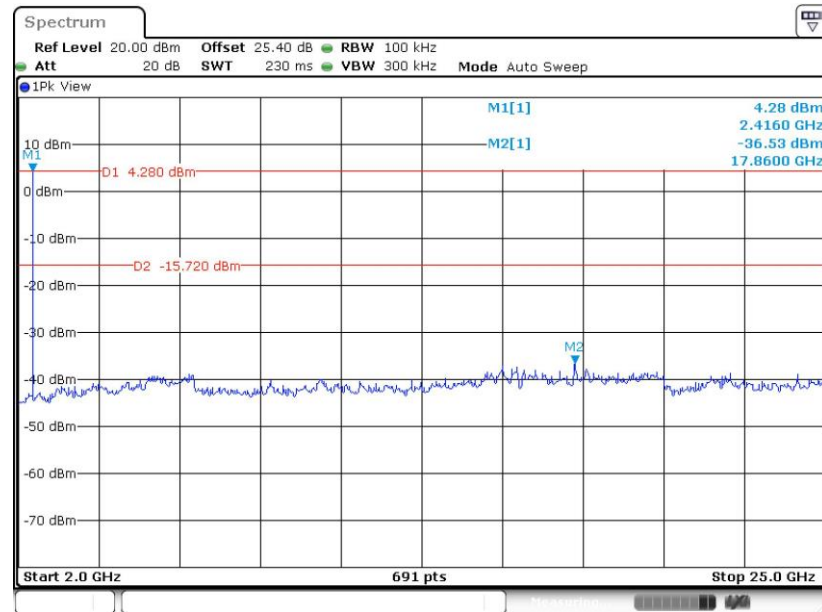CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

Date: 18.NOV.2019 14:00:21

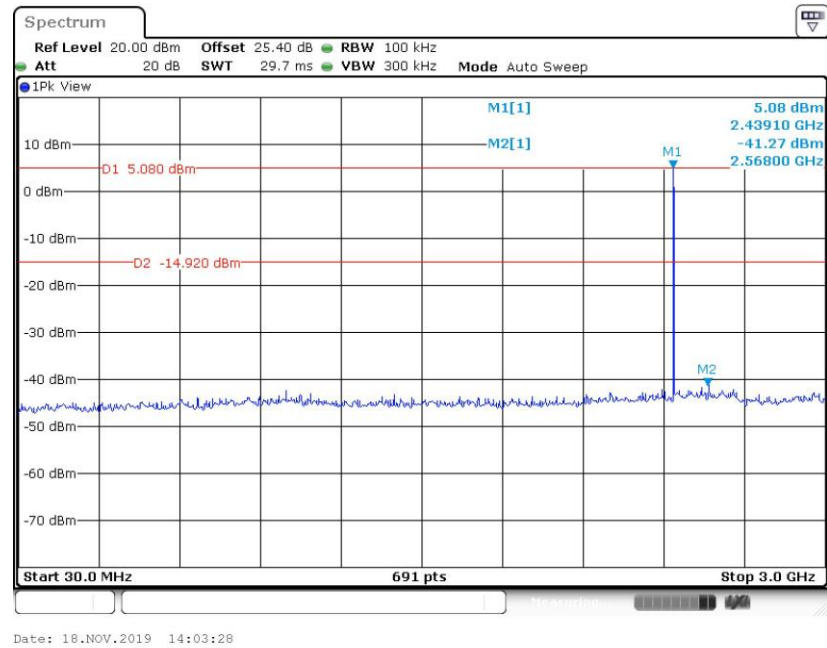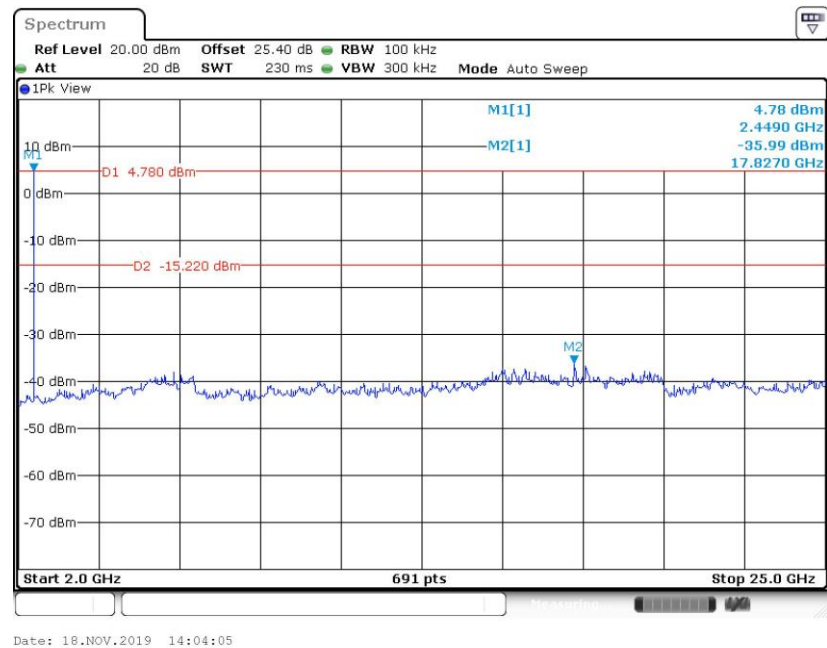**CSE Plot on Ch 39 between 30MHz ~ 3 GHz****CSE Plot on Ch 39 between 2 GHz ~ 25 GHz**

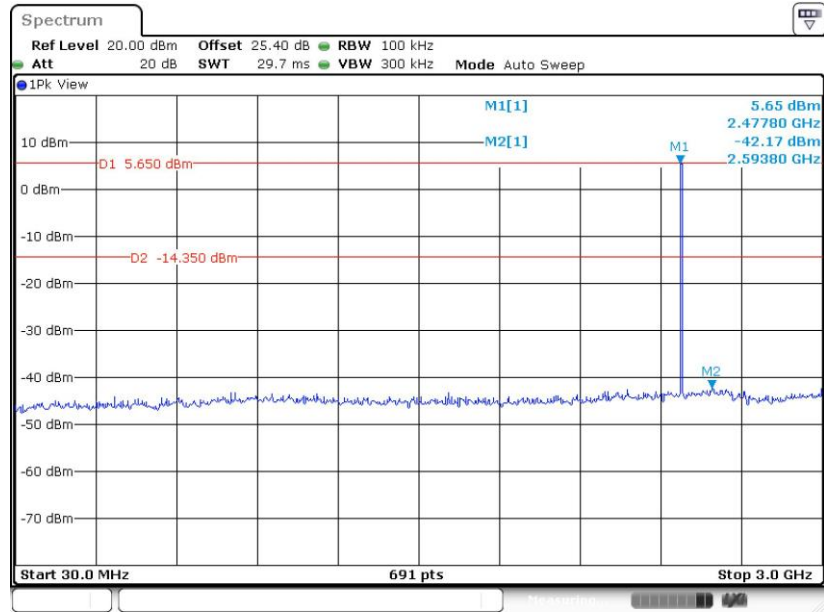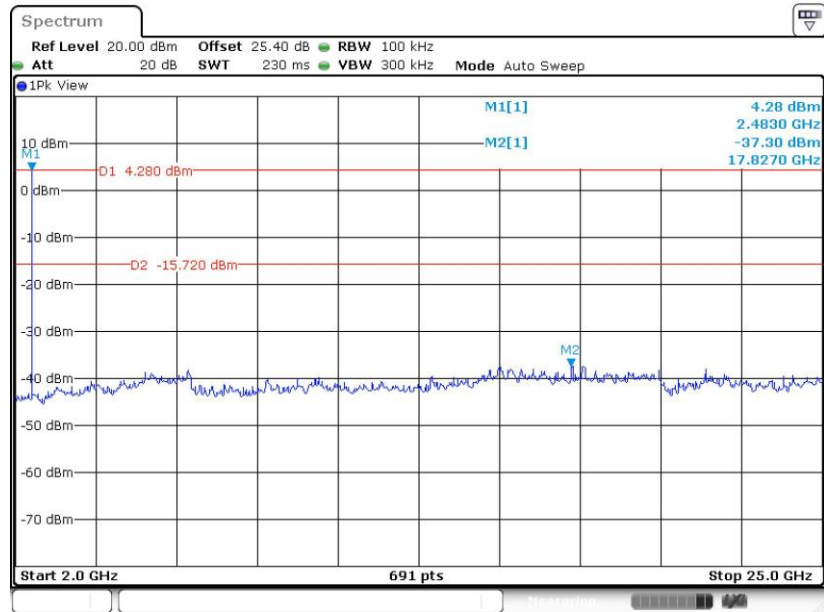**CSE Plot on Ch 78 between 30MHz ~ 3 GHz****CSE Plot on Ch 78 between 2 GHz ~ 25 GHz**

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

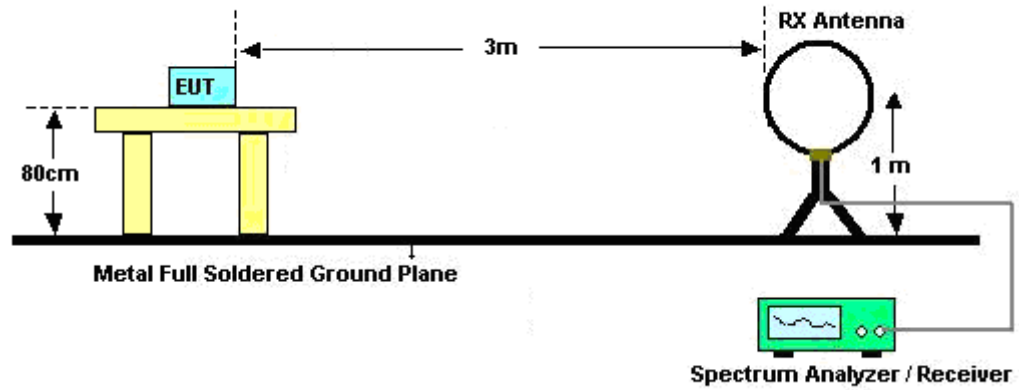

For radiated emissions from 30MHz to 1GHz

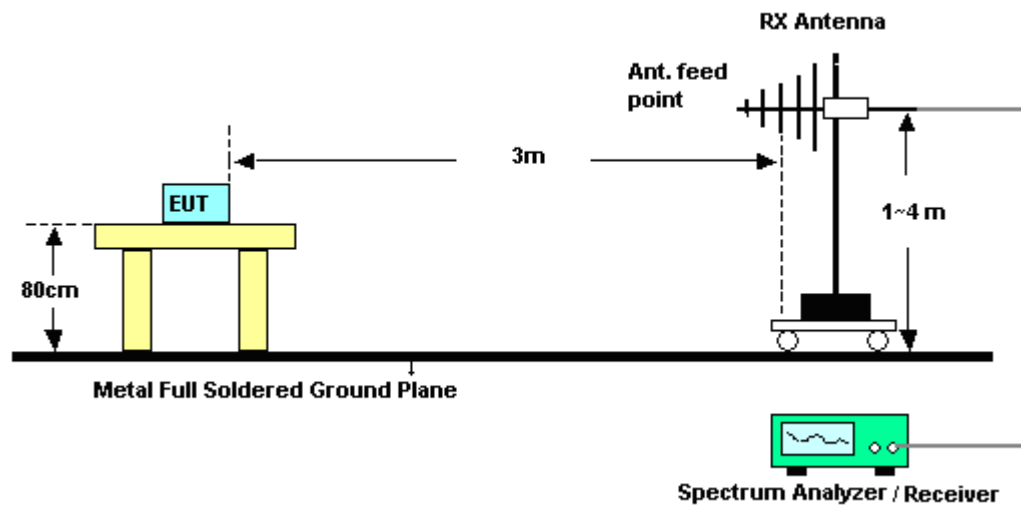

For radiated emissions above 1GHz

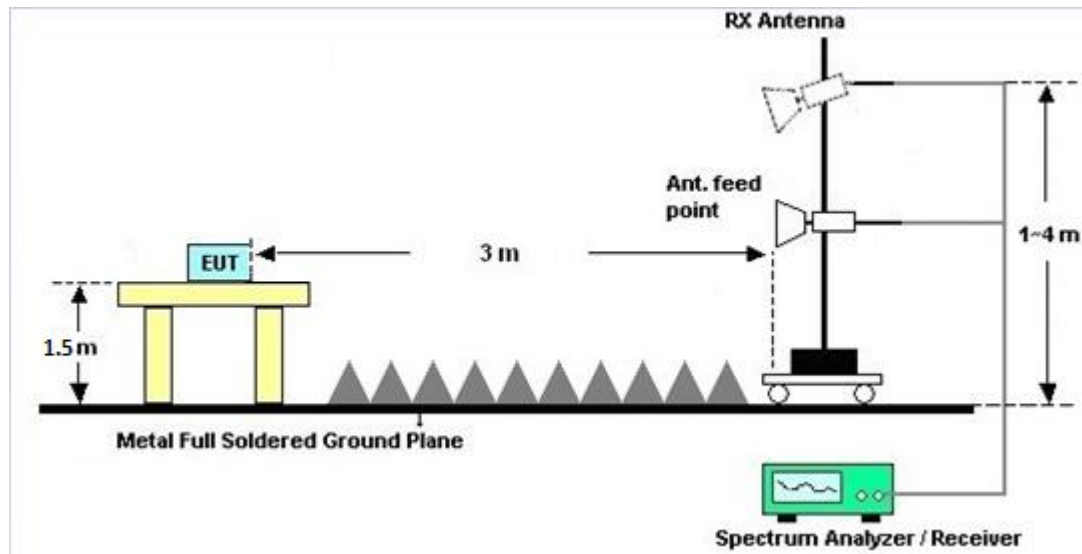

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.8.7 Duty Cycle

Please refer to Appendix E.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

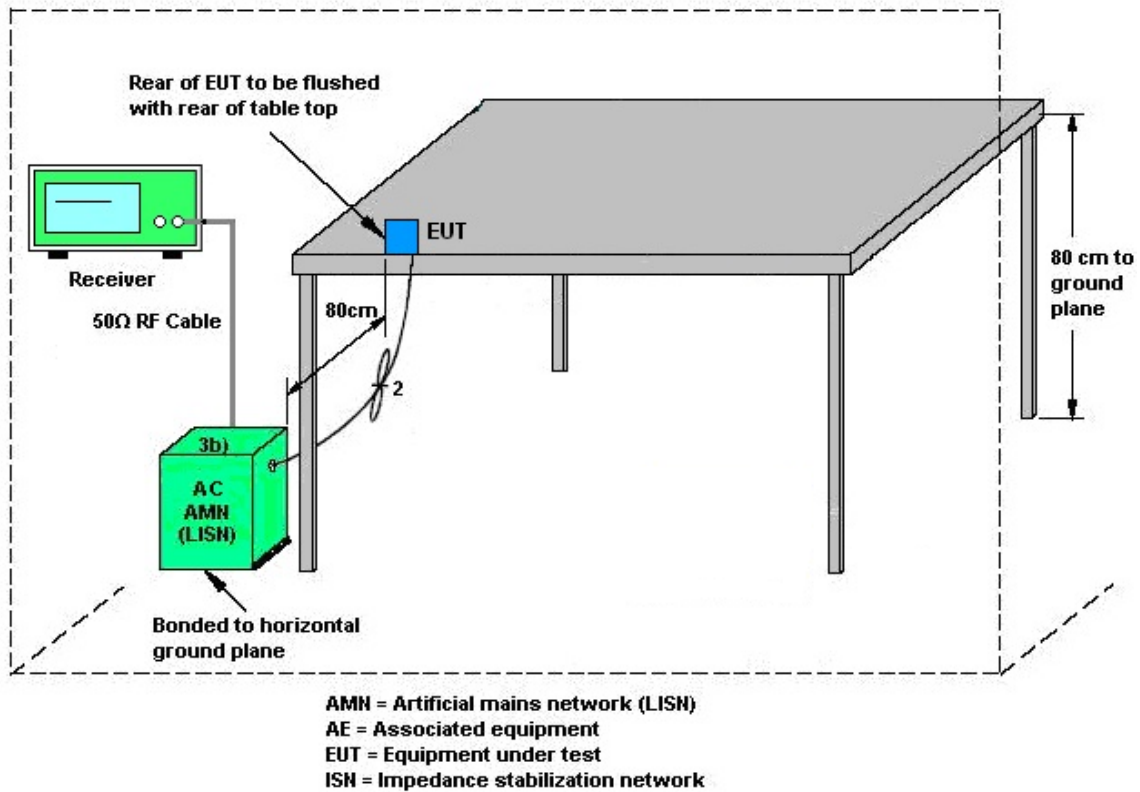

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Nov. 11, 2019~ Dec. 23, 2019	Jan. 06, 2020	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Nov. 11, 2019~ Dec. 03, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Preamplifier	EMEC INSTRUMENT S&PE	EMC184045B &PE7005-6	980192	18GHz ~ 40GHz	Aug. 01, 2019	Nov. 11, 2019~ Dec. 23, 2019	Jul. 31, 2020	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0800N1D01N- 06	41912&05	30MHz to 1GHz	Feb. 12, 2019	Nov. 11, 2019~ Dec. 23, 2019	Feb. 11, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-211 4	1-18GHz	Jul. 31, 2019	Nov. 11, 2019~ Dec. 23, 2019	Jul. 30, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 05, 2018	Nov. 11, 2019~ Dec. 03, 2019	Dec. 04, 2019	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz~40GHz	May 14, 2019	Nov. 11, 2019~ Dec. 23, 2019	May 13, 2020	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	Nov. 11, 2019~ Dec. 23, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	May 19, 2019	Nov. 11, 2019~ Dec. 23, 2019	May 18, 2020	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY532701 95	1GHz~26.5GHz	Aug. 23, 2019	Nov. 11, 2019~ Dec. 23, 2019	Aug. 22, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY541300 85	20MHz~8.4GHz	Nov. 01, 2019	Nov. 11, 2019~ Dec. 23, 2019	Oct. 31, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 27, 2018	Nov. 11, 2019~ Dec. 23, 2019	Dec. 26, 2019	Radiation (03CH15-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Nov. 11, 2019~ Dec. 23, 2019	N/A	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 11, 2019~ Dec. 23, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 11, 2019~ Dec. 23, 2019	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k 5)	RK-00045 1	N/A	N/A	Nov. 11, 2019~ Dec. 23, 2019	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/ 4	30M-18G	Apr. 15, 2019	Nov. 11, 2019~ Dec. 23, 2019	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4 PE	30M-18G	Apr. 15, 2019	Nov. 11, 2019~ Dec. 23, 2019	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY802430 /4	30M~18GHz	May 13, 2019	Nov. 11, 2019~ Dec. 23, 2019	May 12, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz-40GHz	Feb. 26, 2019	Nov. 11, 2019~ Dec. 23, 2019	Feb. 25, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz-40GHz	Feb. 26, 2019	Nov. 11, 2019~ Dec. 23, 2019	Feb. 25, 2020	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN4	1.53G Low Pass	Jul. 04, 2019	Nov. 11, 2019~ Dec. 23, 2019	Jul. 03, 2020	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60ST	SN2	3GHz High Pass Filter	Jul. 17, 2019	Nov. 11, 2019~ Dec. 23, 2019	Jul. 14, 2020	Radiation (03CH15-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 07, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Jan. 07, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Jan. 07, 2020	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Jan. 07, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 07, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Jan. 07, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Jan. 07, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Nov 13, 2019 ~ Nov 19, 2019	Jun. 16, 2020	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 27, 2018	Nov 13, 2019 ~ Nov 19, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 27, 2018	Nov 13, 2019 ~ Nov 19, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Nov 13, 2019 ~ Nov 19, 2019	Jul. 14, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Nov 13, 2019 ~ Nov 19, 2019	Mar. 26, 2020	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.0
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.4
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0
--	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2019/11/13~2019/11/19	Relative Humidity:	51~54	%

<Ant. 1>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.767	0.727	0.999	0.5113	Pass
DH	1Mbps	1	39	2441	0.767	0.724	0.999	0.5113	Pass
DH	1Mbps	1	78	2480	0.767	0.724	0.999	0.5113	Pass
2DH	2Mbps	1	0	2402	1.211	1.138	0.994	0.8075	Pass
2DH	2Mbps	1	39	2441	1.211	1.138	0.999	0.8075	Pass
2DH	2Mbps	1	78	2480	1.211	1.138	0.994	0.8075	Pass
3DH	3Mbps	1	0	2402	1.216	1.129	0.999	0.8104	Pass
3DH	3Mbps	1	39	2441	1.216	1.129	1.007	0.8104	Pass
3DH	3Mbps	1	78	2480	1.216	1.129	0.999	0.8104	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.88	0.31	0.4	Pass
AFH	20	53.33	2.88	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	7.20	20.97	Pass
	39	1	7.63	20.97	Pass
	78	1	7.75	20.97	Pass
2DH1	0	1	6.68	20.97	Pass
	39	1	6.99	20.97	Pass
	78	1	7.04	20.97	Pass
3DH1	0	1	6.72	20.97	Pass
	39	1	7.02	20.97	Pass
	78	1	7.12	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	6.49	5.22
	39	1	6.84	5.22
	78	1	6.98	5.22
2DH1	0	1	4.38	5.15
	39	1	4.73	5.15
	78	1	4.87	5.15
3DH1	0	1	4.37	5.12
	39	1	4.73	5.12
	78	1	4.88	5.12

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

<Ant. 2>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.767	0.727	0.994	0.5113	Pass
DH	1Mbps	1	39	2441	0.767	0.724	0.999	0.5113	Pass
DH	1Mbps	1	78	2480	0.767	0.724	0.999	0.5113	Pass
2DH	2Mbps	1	0	2402	1.211	1.138	0.999	0.8075	Pass
2DH	2Mbps	1	39	2441	1.211	1.138	0.994	0.8075	Pass
2DH	2Mbps	1	78	2480	1.211	1.138	0.999	0.8075	Pass
3DH	3Mbps	1	0	2402	1.216	1.129	0.999	0.8104	Pass
3DH	3Mbps	1	39	2441	1.216	1.129	0.999	0.8104	Pass
3DH	3Mbps	1	78	2480	1.216	1.129	0.999	0.8104	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	7.21	20.97	Pass
	39	1	7.58	20.97	Pass
	78	1	7.70	20.97	Pass
2DH1	0	1	6.50	20.97	Pass
	39	1	6.94	20.97	Pass
	78	1	7.02	20.97	Pass
3DH1	0	1	6.72	20.97	Pass
	39	1	7.02	20.97	Pass
	78	1	7.12	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	6.43	5.22
	39	1	6.87	5.22
	78	1	7.00	5.22
2DH1	0	1	4.32	5.15
	39	1	4.75	5.15
	78	1	4.91	5.15
3DH1	0	1	4.31	5.12
	39	1	4.74	5.12
	78	1	4.92	5.12

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	24~26℃
		Relative Humidity :	52~55%

EUT Information

Report NO : 982217-01
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

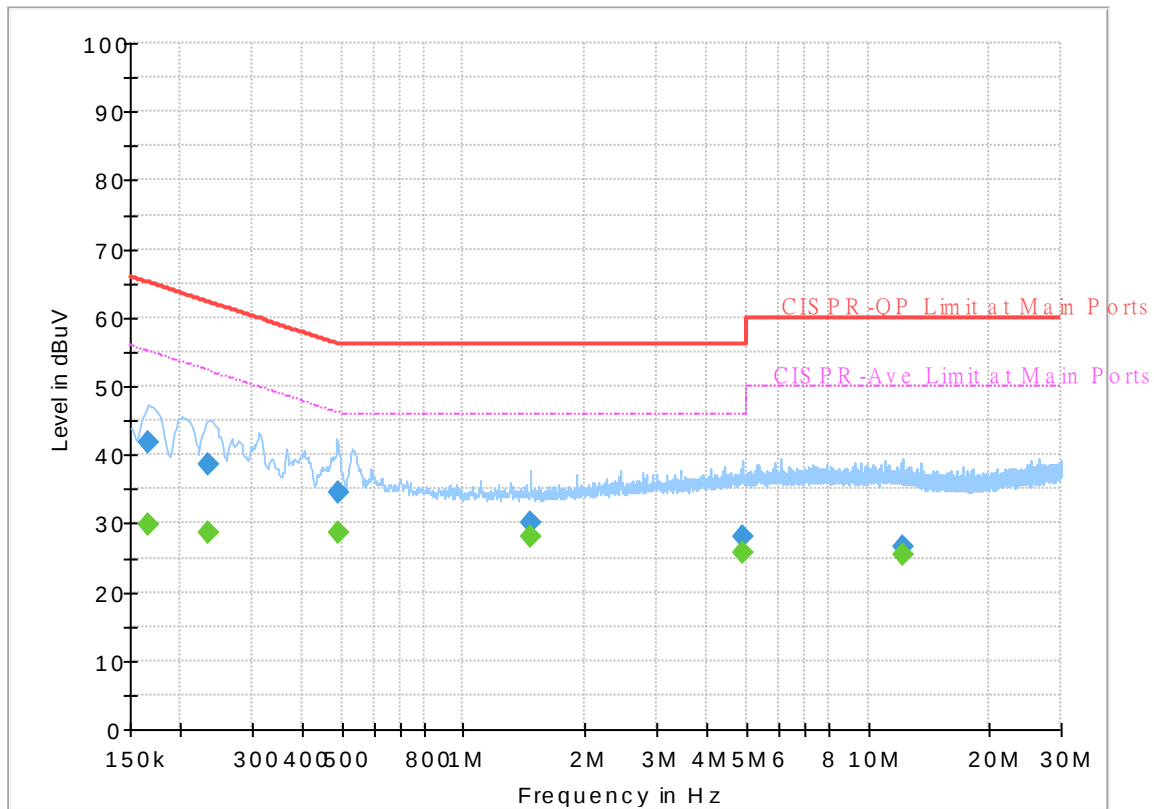


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.165750	---	29.86	55.17	25.31	L1	OFF	19.5
0.165750	41.89	---	65.17	23.28	L1	OFF	19.5
0.233430	---	28.61	52.33	23.72	L1	OFF	19.5
0.233430	38.71	---	62.33	23.62	L1	OFF	19.5
0.490290	---	28.79	46.16	17.37	L1	OFF	19.5
0.490290	34.55	---	56.16	21.61	L1	OFF	19.5
1.470120	---	27.95	46.00	18.05	L1	OFF	19.6
1.470120	30.06	---	56.00	25.94	L1	OFF	19.6
4.897410	---	25.85	46.00	20.15	L1	OFF	19.7
4.897410	27.97	---	56.00	28.03	L1	OFF	19.7
12.234750	---	25.33	50.00	24.67	L1	OFF	20.1
12.234750	26.67	---	60.00	33.33	L1	OFF	20.1

EUT Information

Report NO : 982217-01
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

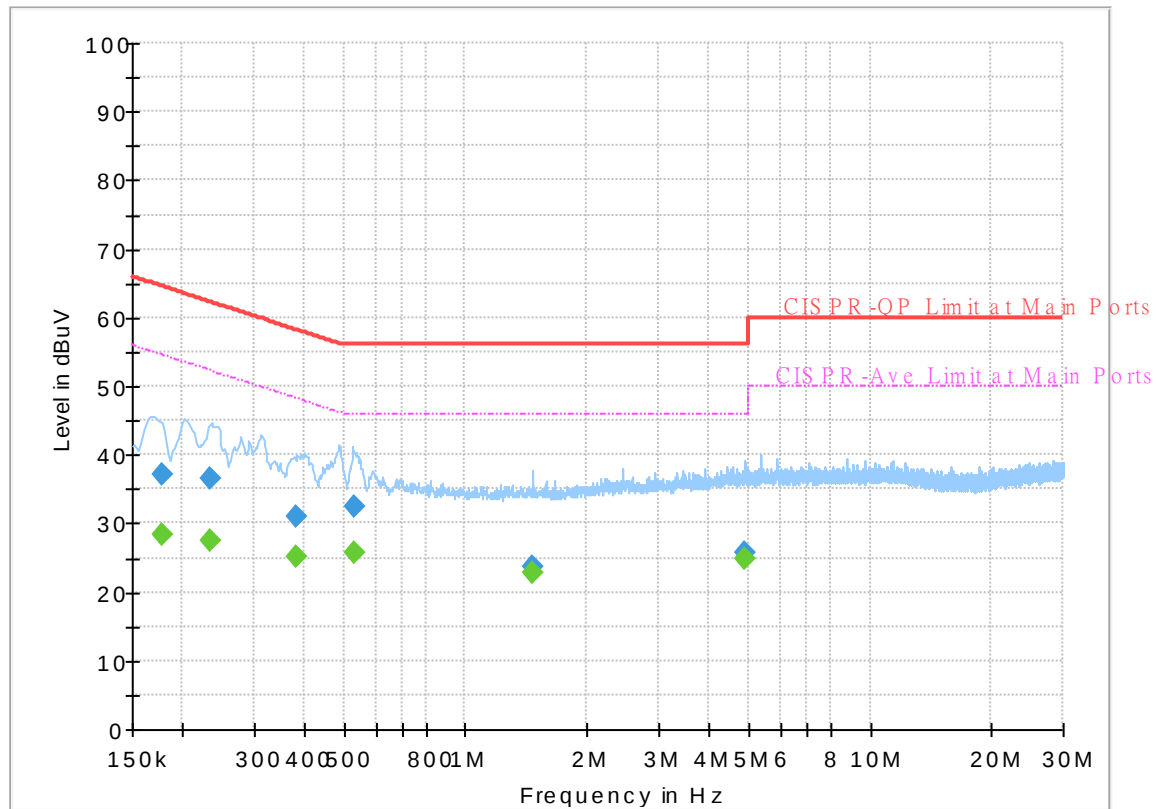

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.177000	---	28.36	54.63	26.27	N	OFF	19.6
0.177000	37.12	---	64.63	27.51	N	OFF	19.6
0.233250	---	27.63	52.33	24.70	N	OFF	19.6
0.233250	36.49	---	62.33	25.84	N	OFF	19.6
0.380670	---	25.26	48.27	23.01	N	OFF	19.6
0.380670	31.14	---	58.27	27.13	N	OFF	19.6
0.532500	---	25.66	46.00	20.34	N	OFF	19.6
0.532500	32.46	---	56.00	23.54	N	OFF	19.6
1.464000	---	22.74	46.00	23.26	N	OFF	19.6
1.464000	23.79	---	56.00	32.21	N	OFF	19.6
4.899750	---	24.77	46.00	21.23	N	OFF	19.8
4.899750	25.60	---	56.00	30.40	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Leo Li, Mancy Chou and Bigshow Wang	Temperature :	24.2~24.4°C
		Relative Humidity :	54~63%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2375.1	44.73	-29.27	74	41.81	27.85	6.22	31.15	128	83	P	H
		2375.1	19.94	-34.06	54	-	-	-	-	-	-	A	H
	*	2402	101.27	-	-	98.36	27.8	6.25	31.14	128	83	P	H
	*	2402	76.48	-	-	-	-	-	-	-	-	A	H
		2375.73	44.38	-29.62	74	41.46	27.85	6.22	31.15	395	69	P	V
		2375.73	19.59	-34.41	54	-	-	-	-	-	-	A	V
	*	2402	102.61	-	-	99.7	27.8	6.25	31.14	395	69	P	V
	*	2402	77.82	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2351.86	44.06	-29.94	74	41.13	27.9	6.19	31.16	100	119	P	H
		2351.86	19.27	-34.73	54	-	-	-	-	-	-	A	H
	*	2441	100.5	-	-	97.53	27.8	6.29	31.12	100	119	P	H
	*	2441	75.71	-	-	-	-	-	-	-	-	A	H
		2492.86	44.21	-29.79	74	41.25	27.71	6.34	31.09	100	119	P	H
		2492.86	19.42	-34.58	54	-	-	-	-	-	-	A	H
		2326.8	44.49	-29.51	74	41.62	27.9	6.15	31.18	382	46	P	V
		2326.8	19.7	-34.3	54	-	-	-	-	-	-	A	V
	*	2442	104.08	-	-	101.11	27.8	6.29	31.12	382	46	P	V
	*	2442	79.29	-	-	-	-	-	-	-	-	A	V
		2497.13	44.32	-29.68	74	41.35	27.71	6.35	31.09	382	46	P	V
		2497.13	19.53	-34.47	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	101.31	-	-	98.34	27.74	6.33	31.1	108	96	P	H
	*	2480	76.52	-	-	-	-	-	-	-	-	A	H
		2483.52	45.28	-28.72	74	42.32	27.73	6.33	31.1	108	96	P	H
		2483.52	20.49	-33.51	54	-	-	-	-	-	-	A	H
	*	2480	103.95	-	-	100.98	27.74	6.33	31.1	380	44	P	V
	*	2480	79.16	-	-	-	-	-	-	-	-	A	V
		2489.8	46.07	-27.93	74	43.11	27.72	6.34	31.1	380	44	P	V
		2489.8	21.28	-32.72	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	38.94	-35.06	74	56.11	31.32	9.62	58.11	100	0	P	H
		4804	14.15	-39.85	54	-	-	-	-	-	-	A	H
		4804	37.62	-36.38	74	54.79	31.32	9.62	58.11	100	0	P	V
		4804	12.83	-41.17	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	39.32	-34.68	74	56.38	31.44	9.63	58.13	100	0	P	H
		4882	14.53	-39.47	54	-	-	-	-	-	-	A	H
		7323	44.5	-29.5	74	53.54	36.75	11.7	57.49	100	0	P	H
		7323	19.71	-34.29	54	-	-	-	-	-	-	A	H
		4882	38.13	-35.87	74	55.19	31.44	9.63	58.13	100	0	P	V
		4882	13.34	-40.66	54	-	-	-	-	-	-	A	V
		7323	44.17	-29.83	74	53.21	36.75	11.7	57.49	100	0	P	V
		7323	19.38	-34.62	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	40.45	-33.55	74	57.52	31.42	9.65	58.14	100	0	P	H
		4960	15.66	-38.34	54	-	-	-	-	-	-	A	H
		7440	44.88	-29.12	74	53.77	36.68	11.76	57.33	100	0	P	H
		7440	20.09	-33.91	54	-	-	-	-	-	-	A	H
		4960	39.23	-34.77	74	56.3	31.42	9.65	58.14	100	0	P	V
		4960	14.44	-39.56	54	-	-	-	-	-	-	A	V
		7440	43.85	-30.15	74	52.74	36.68	11.76	57.33	100	0	P	V
		7440	19.06	-34.94	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Emission below 1GHz****2.4GHz BT (LF)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		48.43	26.97	-13.03	40	43.51	15.14	0.91	32.59	-	-	P	H
		143.49	28.59	-14.91	43.5	41.96	17.5	1.63	32.5	-	-	P	H
		239.52	30.87	-15.13	46	44.04	17.24	2.1	32.51	-	-	P	H
		329.73	29.71	-16.29	46	40.1	19.79	2.36	32.54	-	-	P	H
		388.9	26.94	-19.06	46	35.47	21.46	2.56	32.55	-	-	P	H
		824.43	34.44	-11.56	46	34.56	28.19	3.76	32.07	100	0	P	H
		48.43	25.72	-14.28	40	42.26	15.14	0.91	32.59	-	-	P	V
		145.43	20.66	-22.84	43.5	34.16	17.36	1.64	32.5	-	-	P	V
		167.74	25.3	-18.2	43.5	40.14	15.83	1.83	32.5	-	-	P	V
		375.32	24.49	-21.51	46	33.53	21.01	2.5	32.55	-	-	P	V
		634.31	28.6	-17.4	46	31.28	26.57	3.28	32.53	-	-	P	V
		896.21	37.72	-8.28	46	36.61	28.82	3.96	31.67	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2341.29	44.8	-29.2	74	41.9	27.9	6.17	31.17	100	307	P	H
		2341.29	20.01	-33.99	54	-	-	-	-	-	-	A	H
	*	2402	100.45	-	-	97.54	27.8	6.25	31.14	100	307	P	H
	*	2402	75.66	-	-	-	-	-	-	-	-	A	H
		2380.98	44.37	-29.63	74	41.45	27.84	6.23	31.15	400	230	P	V
		2380.98	19.58	-34.42	54	-	-	-	-	-	-	A	V
	*	2402	101.64	-	-	98.73	27.8	6.25	31.14	400	230	P	V
	*	2402	76.85	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2354.94	45	-29	74	42.08	27.89	6.19	31.16	165	299	P	H
		2354.94	20.21	-33.79	54	-	-	-	-	-	-	A	H
	*	2441	101.2	-	-	98.23	27.8	6.29	31.12	165	299	P	H
	*	2441	76.41	-	-	-	-	-	-	-	-	A	H
		2497.83	43.73	-30.27	74	40.77	27.7	6.35	31.09	165	299	P	H
		2497.83	18.94	-35.06	54	-	-	-	-	-	-	A	H
		2381.26	44.76	-29.24	74	41.84	27.84	6.23	31.15	385	228	P	V
		2381.26	19.97	-34.03	54	-	-	-	-	-	-	A	V
	*	2441	102.08	-	-	99.11	27.8	6.29	31.12	385	228	P	V
	*	2441	77.29	-	-	-	-	-	-	-	-	A	V
		2484.6	44.52	-29.48	74	41.56	27.73	6.33	31.1	385	228	P	V
		2484.6	19.73	-34.27	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	101.89	-	-	98.92	27.74	6.33	31.1	162	306	P	H
	*	2480	77.1	-	-	-	-	-	-	-	-	A	H
		2483.88	45.53	-28.47	74	42.57	27.73	6.33	31.1	162	306	P	H
		2483.88	20.74	-33.26	54	-	-	-	-	-	-	A	H
	*	2480	99.79	-	-	96.82	27.74	6.33	31.1	334	226	P	V
	*	2480	75	-	-	-	-	-	-	-	-	A	V
		2485.36	45.16	-28.84	74	42.19	27.73	6.34	31.1	334	226	P	V
		2485.36	20.37	-33.63	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	39.93	-34.07	74	57.1	31.32	9.62	58.11	100	0	P	H
		4804	15.14	-38.86	54	-	-	-	-	-	-	A	H
		4804	38.08	-35.92	74	55.25	31.32	9.62	58.11	100	0	P	V
		4804	13.29	-40.71	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	38.53	-35.47	74	55.59	31.44	9.63	58.13	100	0	P	H
		4882	13.74	-40.26	54	-	-	-	-	-	-	A	H
		7323	45.04	-28.96	74	54.08	36.75	11.7	57.49	100	0	P	H
		7323	20.25	-33.75	54	-	-	-	-	-	-	A	H
		4882	37.57	-36.43	74	54.63	31.44	9.63	58.13	100	0	P	V
		4882	12.78	-41.22	54	-	-	-	-	-	-	A	V
		7323	44.56	-29.44	74	53.6	36.75	11.7	57.49	100	0	P	V
		7323	19.77	-34.23	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	38.3	-35.7	74	55.37	31.42	9.65	58.14	100	0	P	H
		4960	13.51	-40.49	54	-	-	-	-	-	-	A	H
		7440	44.52	-29.48	74	53.41	36.68	11.76	57.33	100	0	P	H
		7440	19.73	-34.27	54	-	-	-	-	-	-	A	H
		4960	38.57	-35.43	74	55.64	31.42	9.65	58.14	100	0	P	V
		4960	13.78	-40.22	54	-	-	-	-	-	-	A	V
		7440	43.37	-30.63	74	52.26	36.68	11.76	57.33	100	0	P	V
		7440	18.58	-35.42	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		48.43	27.09	-12.91	40	43.63	15.14	0.91	32.59	-	-	P	H
		84.32	25.37	-14.63	40	42.62	14.03	1.26	32.54	-	-	P	H
		139.61	26.85	-16.65	43.5	40.16	17.6	1.59	32.5	-	-	P	H
		241.46	30.49	-15.51	46	43.41	17.48	2.11	32.51	-	-	P	H
		385.02	27.54	-18.46	46	36.25	21.3	2.54	32.55	-	-	P	H
		896.21	34.09	-11.91	46	32.98	28.82	3.96	31.67	100	0	P	H
		48.43	25.25	-14.75	40	41.79	15.14	0.91	32.59	100	0	P	V
		95.96	24.12	-19.38	43.5	39.91	15.4	1.33	32.52	-	-	P	V
		167.74	24.98	-18.52	43.5	39.82	15.83	1.83	32.5	-	-	P	V
		247.28	20.86	-25.14	46	33.02	18.22	2.13	32.51	-	-	P	V
		389.87	28.34	-17.66	46	36.84	21.49	2.56	32.55	-	-	P	V
		585.81	27.61	-18.39	46	31.02	25.98	3.21	32.6	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Leo Li, Mancy Chou and Bigshow Wang	Temperature :	24.2~24.4°C
		Relative Humidity :	54~63%



Note symbol

-L	Low channel location
-R	High channel location








2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

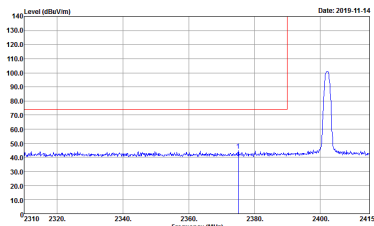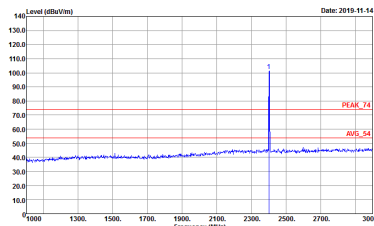BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HV Condition : PEAK_BE_74 3m HORN_9120D_2114 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 982217-01	 Site : 03CH15-HV Condition : PEAK_74 3m HORN_9120D_2114 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 982217-01

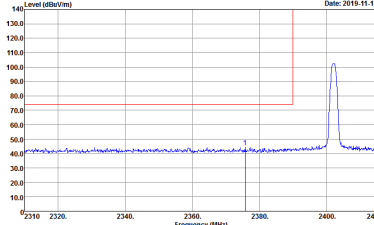
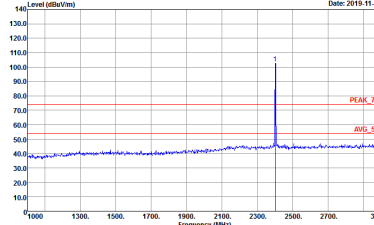


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01

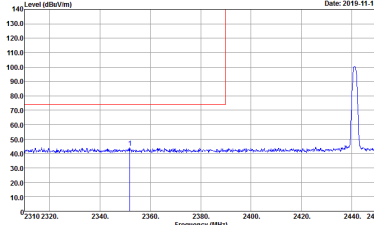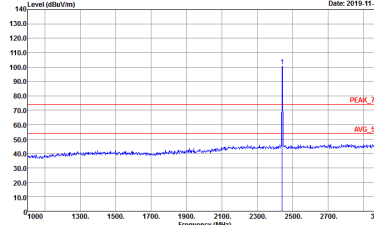
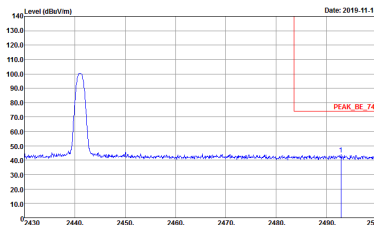
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01
	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	Left blank

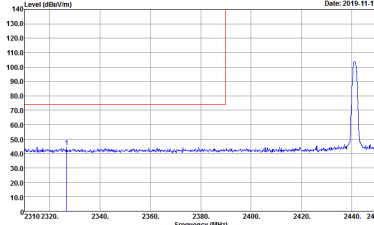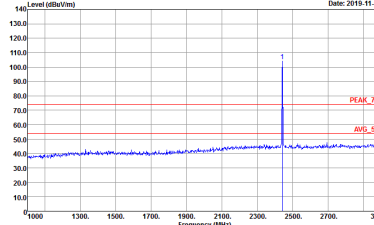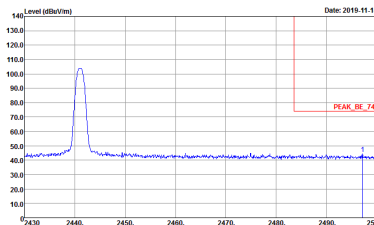BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01
	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	Left blank

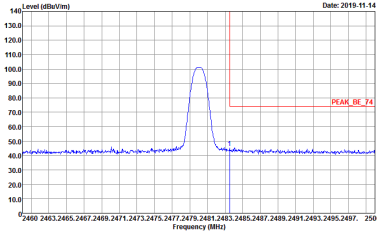
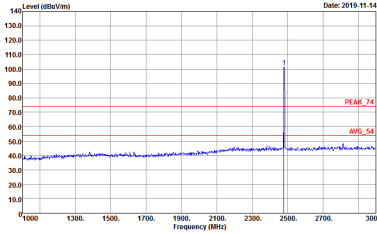


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH15-HV Condition : PEAK_BE_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01

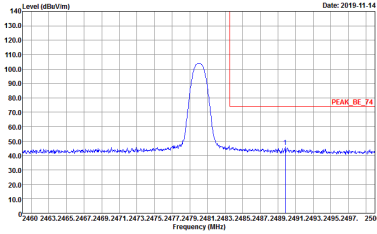
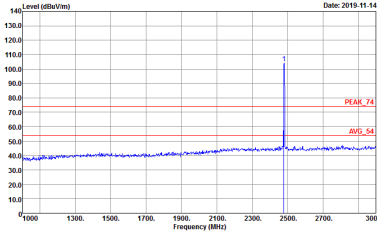


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH15-HV Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01

**2.4GHz 2400~2483.5MHz****BT (Harmonic @ 3m)**

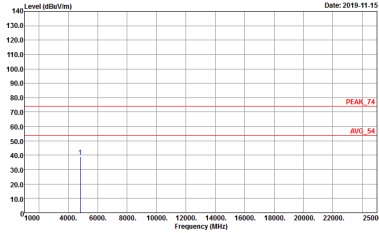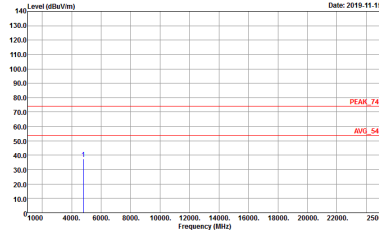BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 VERTICAL Detector : Peak Project : 982217-01

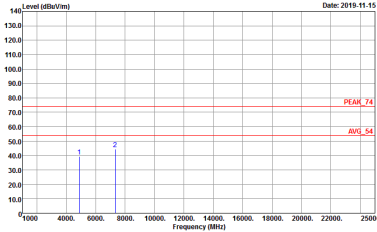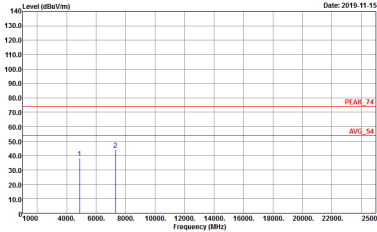

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH15-4V Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL Detector : Peak Project : 982217-01	 Site : 03CH15-4V Condition : PEAK_74 3m HORN_91200_2114 VERTICAL Detector : Peak Project : 982217-01





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL Detector : Peak Project : 982217-01	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 VERTICAL Detector : Peak Project : 982217-01





Emission below 1GHz



2.4GHz BT (LF)


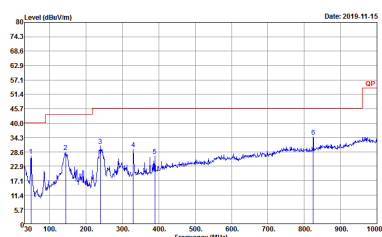
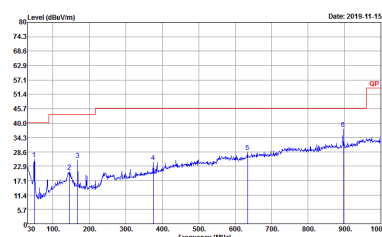
BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 HORIZONTAL Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 VERTICAL Detector : Peak Project : 982217-01

2.4GHz 2400~2483.5MHz
BT (Band Edge @ 3m)


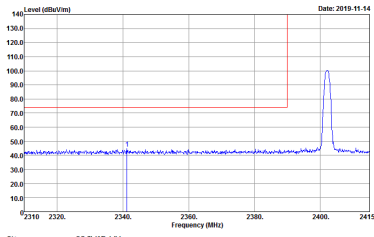
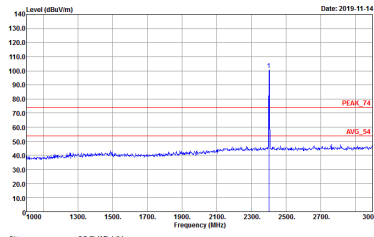
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH15-HV Condition : PEAK_BE_74 3m HORN_9120D_2114 HORIZONTAL Detector : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Deflector : Peak Project : 982217-01	 Site : 03CH15-HV Condition : PEAK_74 3m HORN_9120D_2114 HORIZONTAL Detector : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Deflector : Peak Project : 982217-01

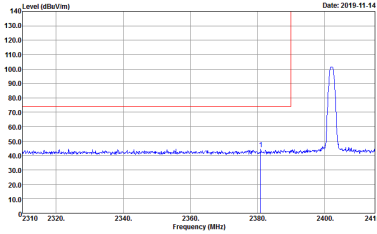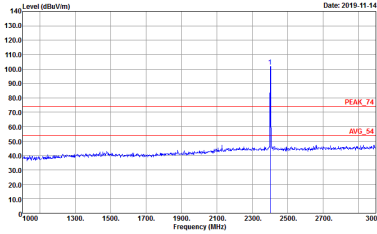

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH15-HV Condition : PEAK_8E_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01

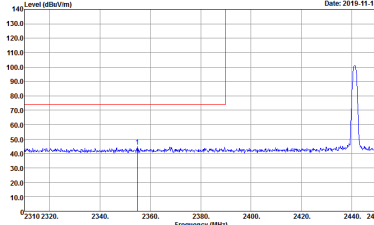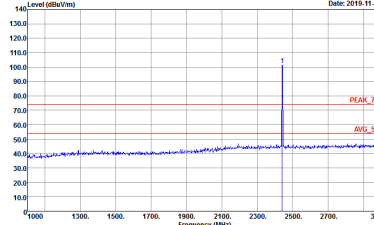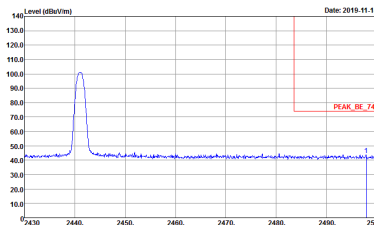BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01
	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	Left blank

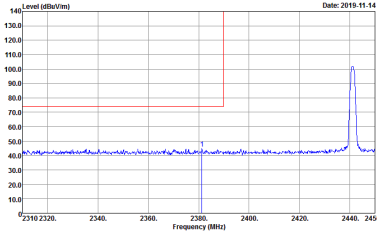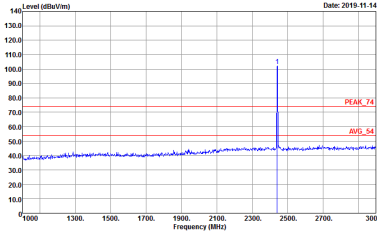
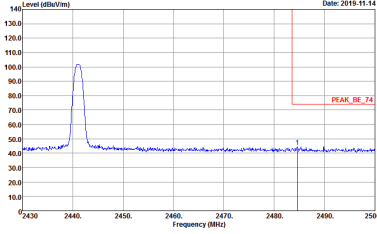


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01
	 Site : 03CH15-HY Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Fundamental
Peak	Site : 03CH15-HV Condition : PEAK_BE_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01

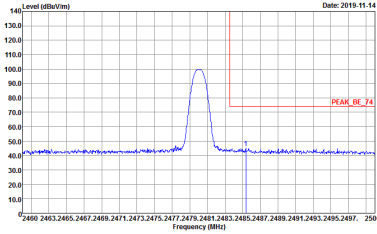
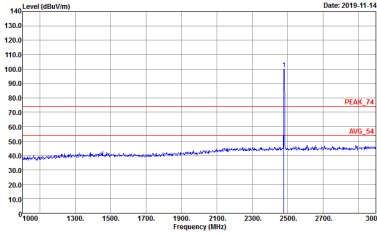


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH15-HV Condition : PEAK_BE_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01	 Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 982217-01



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

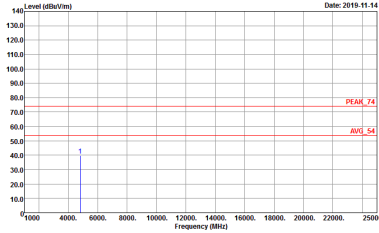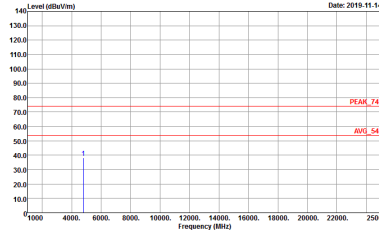BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Vertical
Peak Avg.	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : PEAK_74 3m HORN_91200_2114 VERTICAL Detector : Peak Project : 982217-01





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Vertical
Peak Avg.	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL Detector : Peak Project : 982217-01	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 VERTICAL Detector : Peak Project : 982217-01



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Vertical
Peak Avg.	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 HORIZONTAL Detector : Peak Project : 982217-01	Site : 03CH15-HV Condition : PEAK_74 3m HORN_91200_2114 VERTICAL Detector : Peak Project : 982217-01


Emission below 1GHz
2.4GHz BT (LF)

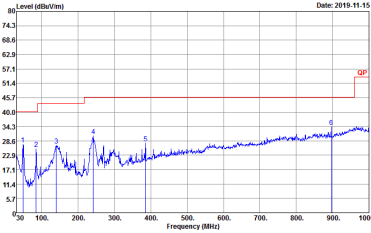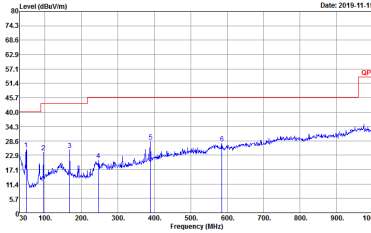BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
2	Horizontal	Vertical
QP / Peak	 Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 HORIZONTAL Detector : Peak Project : 982217-01	 Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 VERTICAL Detector : Peak Project : 982217-01


Appendix E. Duty Cycle Plots

<Ant. 1>

DH5 on time (One Pulse) Plot on Channel 39

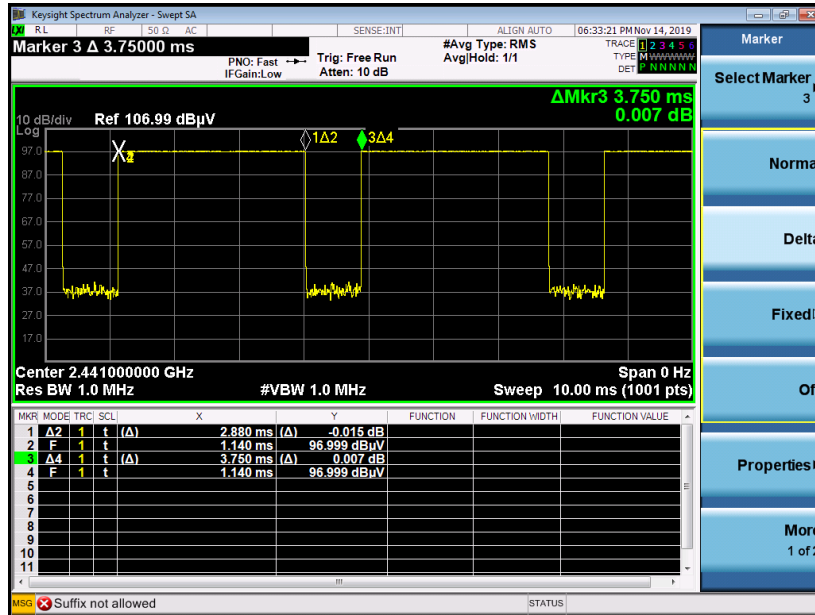

on time (Count Pulses) Plot on Channel 39

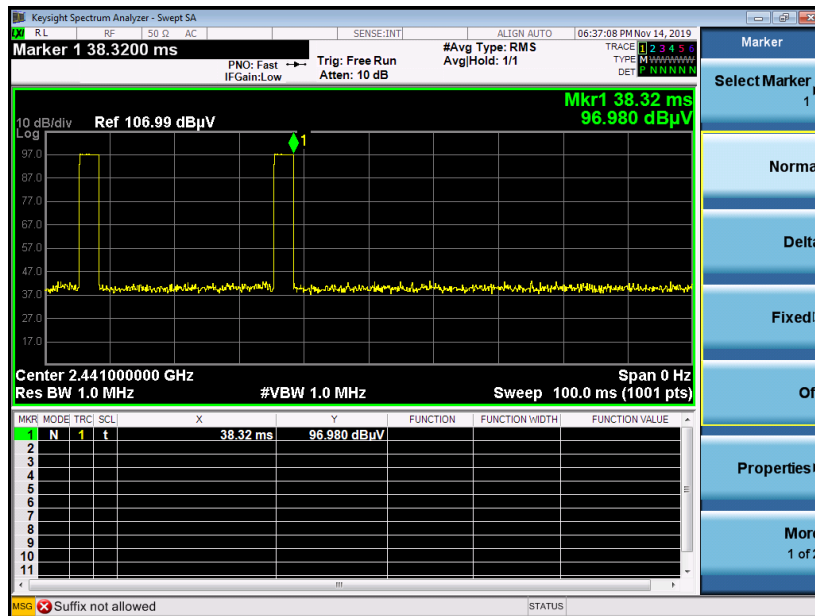


Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

<Ant. 2>

DH5 on time (One Pulse) Plot on Channel 39

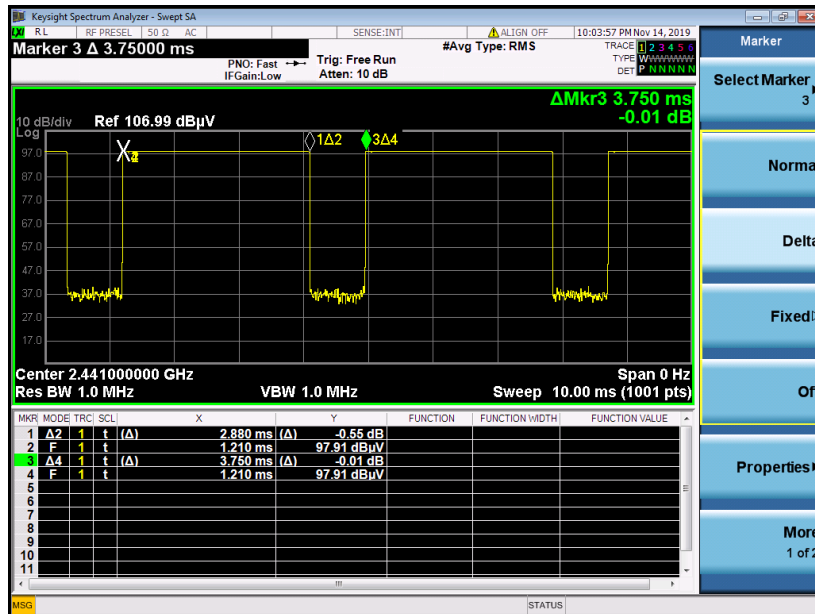

on time (Count Pulses) Plot on Channel 39

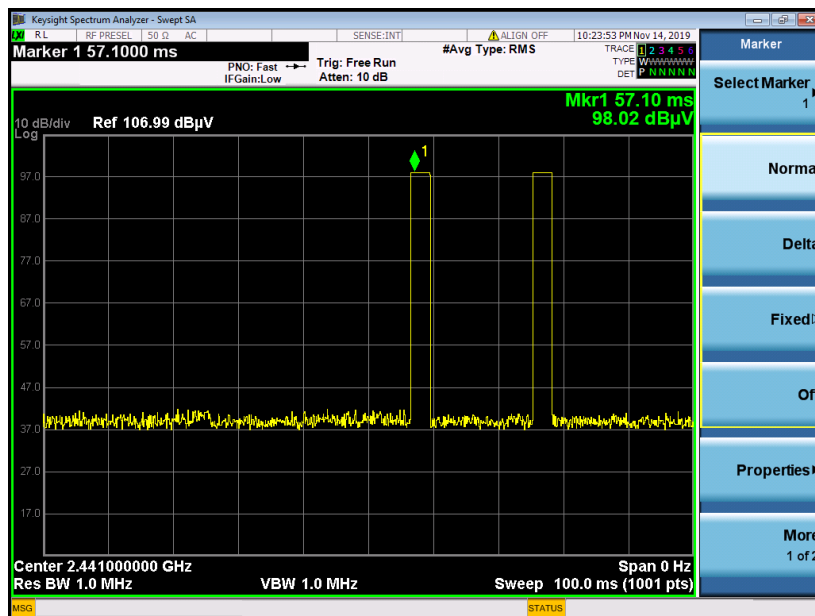

Note:

4. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
5. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
6. DH5 has the highest duty cycle worst case and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

————THE END————