



Report No.: FCC1907013 File reference No.: 2019-07-22

Applicant: Ipetwant Pet Product Co., Ltd.

Product: Remote Control for Dog Training Collar

Model No: V87

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.231

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.231 for the evaluation of electromagnetic

compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: July 22, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No: FCC1907013 Page 2 of 36

Date: 2019-07-22



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A-2

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A-2.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 36

Report No: FCC1907013

Date: 2019-07-22



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards.	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test	11
5.1	Test Method and Test Procedure.	11
5.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
5.4	Radiated Emission Limit	12
6.5	Test Result.	13
7.0	20dB Bandwidth Test.	19
8.0	Deactivate Test	21
9.0	Duty Cycle	23
10.0	Antenna Requirement	28
11.0	FCC Label	29
12.0	Photo of Testing	30

Report No: FCC1907013 Page 4 of 36

Date: 2019-07-22



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number:744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Ipetwant Pet Product Co., Ltd.

Address: Room 1303, #6 Building, No 9, Tongfu Industry Zone, Gankeng Community, Jihua Street,

Longgang District, Shenzhen, Guangdong, China

Telephone: -Fax: --

1.3 Description of EUT

Product: Remote Control for Dog Training Collar

Manufacturer: Ipetwant Pet Product Co., Ltd.

Address: Room 1303, #6 Building, No 9, Tongfu Industry Zone, Gankeng Community,

Jihua Street, Longgang District, Shenzhen, Guangdong, China

Brand Name: N/A
Model Number: V87
Additional Model Name N/A
Additional Trade Name N/A

Rating: Input: 3.7VDC, Built-in 3.7V 450mAh Li-ion battery

Operation Frequency: 433.92MHz

Modulation Type: ASK

Antenna Designation Integral Antenna with Gain 0dBi

1.4 Submitted Sample

2 Samples

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1907013 Page 5 of 36

Date: 2019-07-22



1.5 Test Duration

2017-07-01 to 2019-07-22

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 30MHz Uncertainty =4.3dB

Radiated Emissions 30MHz-1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2019-06-21	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2021-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-03-27	2020-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-05-23	2020-05-22
RF Cable	Zhengdi	7m		2019-05-23	2020-05-22
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No: FCC1907013 Page 6 of 36

Date: 2019-07-22



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna	PASS	Compliant
	requirements		
FCC Part 15, Paragraph 15.207	Conducted	PASS	Compliant
	Emission Test		
FCC Part 15, Paragraph 15.209	General	PASS	Compliant
rcc Part 13, Paragraph 13.209	Requirement	rass	Сопірпані
FCC Part 15, Paragraph 15.231 (b)	Radiated		
(e)	Emission Test	PASS	Compliant
FCC Part 15, Paragraph 15.231 (c)	20dB	PASS	Compliant
1 CC 1 art 13, 1 aragraph 13.231 (C)	Bandwidth	1 ASS	Сотрпан
	Testing		
ECC Post 15 Dorograph 15 221 (a)(1)	Deactivate	PASS	Compliant
FCC Part 15, Paragraph 15.231 (a)(1)		rass	Compliant
	Testing		

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.231, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No: FCC1907013

Date: 2019-07-22



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Block diagram of Test setup

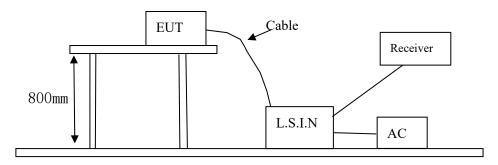

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Remote Control for	Instruent Det Duedwet Co. Ltd.	V87	2ATVB-V87
Dog Training Collar	Ipetwant Pet Product Co., Ltd.	V 0 /	2A1 VB-V87

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1907013 Page 8 of 36

Date: 2019-07-22



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class A Lim	uits (dB µ V)	Class B Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)

Date: 2019-07-22



A: Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Keep Transmitting

Results: pass

Please refer to following diagram for individual

80.0 dBuV

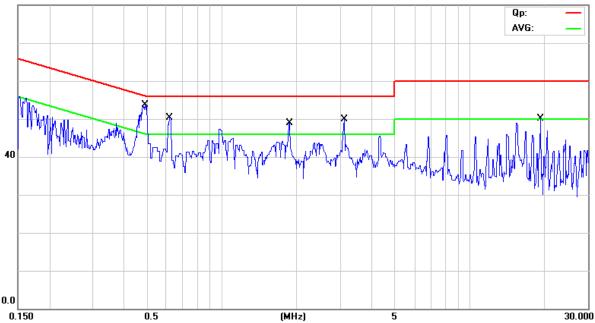

	50					(1-1112)				30.000
-	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
	1		0.4834	39.40	9.77	49.17	56.28	-7.11	QP	
-	2		0.4834	26.00	9.77	35.77	46.28	-10.51	AVG	
	3		0.6184	36.80	9.78	46.58	56.00	-9.42	QP	
	4	*	0.6184	30.60	9.78	40.38	46.00	-5.62	AVG	
-	5		1.8662	36.30	9.80	46.10	56.00	-9.90	QP	
-	6		1.8662	20.10	9.80	29.90	46.00	-16.10	AVG	
	7		3.1052	36.40	9.85	46.25	56.00	-9.75	QP	
	8		3.1052	27.10	9.85	36.95	46.00	-9.05	AVG	
-	9		19.2455	30.80	10.63	41.43	60.00	-18.57	QP	
-	10		19.2455	13.30	10.63	23.93	50.00	-26.07	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-07-22



B: Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Keep Transmitting

Results: pass

Please refer to following diagram for individual



No. M	lk. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∀	dB	dBu∀	dBu∨	dB	Detector	Comment
1	0.4876	32.20	9.77	41.97	56.21	-14.24	QP	
2	0.4876	13.50	9.77	23.27	46.21	-22.94	AVG	
3	0.6196	32.30	9.78	42.08	56.00	-13.92	QP	
4 *	0.6196	23.80	9.78	33.58	46.00	-12.42	AVG	
5	15.4704	26.40	10.41	36.81	60.00	-23.19	QP	
6	15.4704	14.10	10.41	24.51	50.00	-25.49	AVG	
7	0.1534	33.40	9.78	43.18	65.81	-22.63	QP	
8	0.1534	-0.90	9.78	8.88	55.81	-46.93	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1907013 Page 11 of 36

Date: 2019-07-22



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at TIMEWAY EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 6 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: FCC1907013 Page 12 of 36

Date: 2019-07-22



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.231(a) Limit

Fundamental Frequency (MHz)	Field Strength of		Field Strength of Spurious		
	Fundamental		Emission		
	uV/m dBuV/m u		uV/m	dBuV/m	
40.66-40.70	2250	67.04	225	47.04	
70-130	1250	61.94	125	41.94	
130-174	1250-3750	61.94-71.48	125-375	41.94-51.48	
174-260	3750	71.48	375	51.48	
260-470	3750-12500	71.48-81.94	375-1250	51.48-61.94	
Above 470	12500	81.94	1250	61.94	

Note: 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)

- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- 4. Linear interpolations for frequency ranges 130-174MHz and 260-470MHz
- 5.the above field strength limits are specified at a distance of 3-meters and the tighter limits apply at the band edges
- 6. New batteries were fully charged during the radiated emission testing.
- 7. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: FCC1907013 Page 13 of 36

Date: 2019-07-22



B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-5G, the final emission level got using PK detector. And Average = peak(dBuV/m) duty cycle(dB)

6.5 Test result

Report No: FCC1907013 Page 14 of 36

Date: 2019-07-22



Fundamental and Harmonics Radiated emission data

Product: Remote Control for Dog Training Collar			Test Mode:		Keep Transmitting	
Test Item:	Fundamental Radiated Emi	ssion and	Т		25°0	
	Spurious Emission Data		Temperatur	e:	25℃	
Test Voltage:	DC3.7V		Humidity	:	56%	
Test Result:	Pass					
Frequency	Emission PK/AV	Ho	riz /	Limi	its PK/AV	Margin
(MHz)	(dBuV/m)	Ve	ert	(d	BuV/m)	(dB)
433.92	86.92 (PK)/78.54(AV)	I	1	1	.00.8/80.8	-13.88(PK)/-2.26(AV)
433.92	86.84 (PK)/78.46(AV)	7	V	1	.00.8/80.8	-13.96(PK)/-2.34(AV)
867.84	52.85 (PK)	I	I	;	80.8/60.8	-7.95(AV)
867.84	49.62 (PK)	7	V	:	80.8/60.8	-11.18(AV)
1301.76		I	H	74/54		
1301.76		7	V		74/54	
1735.68	40.34 (PK)	I	H	-	80.8/60.8	-20.46(AV)
1735.68	38.91 (PK)	7	V		80.8/60.8	-21.89(AV)
2169.6	50.47 (PK)	I	1		80.8/60.8	-10.33(AV)
2169.6	40.97 (PK)	V	V	:	80.8/60.8	19.83(AV)
2603.52	52.28 (PK)	I	-I	:	80.8/60.8	-8.52(AV)
2603.52	46.80(PK)	Ţ	V	:	80.8/60.8	-14.00(AV)
3037.44	56.77 (PK)	I	-I	:	80.8/60.8	-4.03(AV)
3037.44	49.95(PK)	7	V	-	80.8/60.8	-10.85(AV)
3471.36	53.89 (PK)	I	· ·		80.8/60.8	-6.91(AV)
3471.36	50.73(PK)	7	V 8		80.8/60.8	-10.07(AV)
3905.28		H	/V	80.8/60.8		
4339.2		H	/V	80.8/60.8		

Note: 1. Average = peak (dBuV/m) + duty cycle factor (dB), H=Horizontal, V=Vertical

Report No: FCC1907013 Page 15 of 36

Date: 2019-07-22




A. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

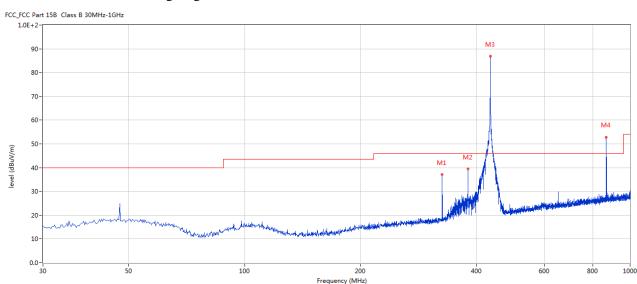

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	325.534	37.10	-10.37	46.0	-8.90	Peak	230.00	200	Н	Pass
2	379.598	39.43	-9.22	46.0	-6.57	Peak	198.00	100	Н	Pass
3	433.904	86.92	-8.03	46.0	40.92	Peak	360.00	200	Н	N/A
4	867.871	52.85	-2.31	46.0	6.85	Peak	259.00	100	Н	N/A

Report No: FCC1907013 Page 16 of 36

Date: 2019-07-22




B. General Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

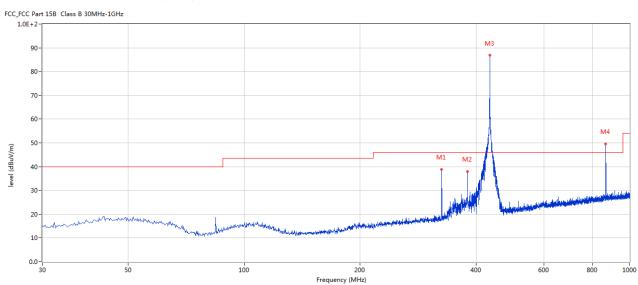

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	су	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
	(MHz)))	(dB)					
1	325.534	38.90	-10.37	46.0	-7.10	Peak	276.00	200	V	Pass
2	379.598	38.04	-9.22	46.0	-7.96	Peak	252.00	100	V	Pass
3	433.904	86.84	-8.03	46.0	40.84	Peak	21.00	200	V	N/A
4	867.871	49.62	-2.31	46.0	3.62	Peak	228.00	100	V	N/A


Report No: FCC1907013 Page 17 of 36

Date: 2019-07-22



Test Plot above 1G

Horizontal

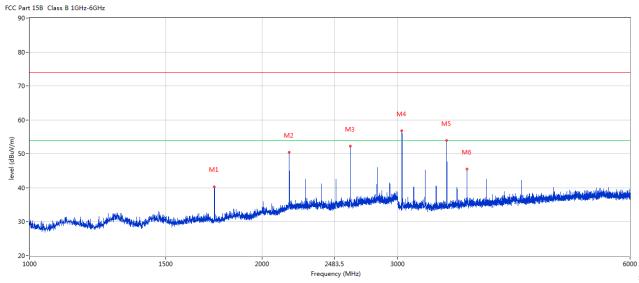


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1735.316	40.34	-7.29	74.0	-33.66	Peak	23.00	100	Н	Pass
2	2169.208	50.47	-3.55	74.0	-23.53	Peak	90.00	100	Н	Pass
3	2603.099	52.28	-3.31	74.0	-21.72	Peak	235.00	100	Н	Pass
4	3037.491	56.77	-2.47	74.0	-17.23	Peak	251.00	100	Н	Pass
5	3471.632	53.89	-1.28	74.0	-20.11	Peak	360.00	100	Н	Pass
6	3688.328	45.56	-0.27	74.0	-28.44	Peak	163.00	100	Н	Pass

Report No: FCC1907013 Page 18 of 36

Date: 2019-07-22



Vertical

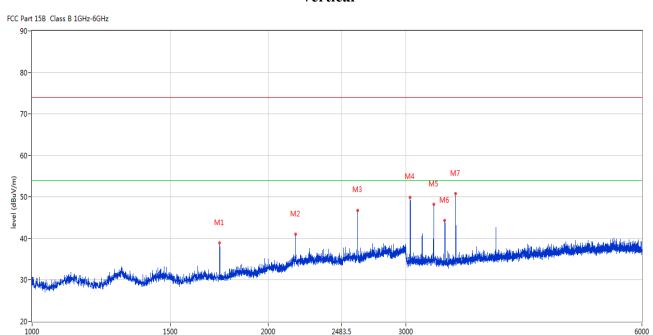

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	1735.316	38.91	-7.29	74.0	-35.09	Peak	310.00	100	V	Pass
2	2169.708	40.97	-3.55	74.0	-33.03	Peak	203.00	100	V	Pass
3	2603.599	46.80	-3.31	74.0	-27.20	Peak	310.00	100	V	Pass
4	3037.491	49.95	-2.47	74.0	-24.05	Peak	360.00	100	V	Pass
5	3254.186	48.21	-2.05	74.0	-25.79	Peak	360.00	100	V	Pass
6	3362.909	44.34	-1.91	74.0	-29.66	Peak	360.00	100	V	Pass
7	3471.632	50.73	-1.28	74.0	-23.27	Peak	193.00	100	V	Pass

Frequency (MHz)

#

Report No: FCC1907013 Page 19 of 36

Date: 2019-07-22



7.0 20dB Bandwidth Testing

7.1 Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

7.3 Test Data

Frequency (MHz)	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
433.92	163	1084.80	Pass

Limit=Frequency x 0.25%=433.92x 0.25%=1084.80kHz


Refer to attached plots:

Report No: FCC1907013 Page 20 of 36

Date: 2019-07-22



20dB Bandwidth

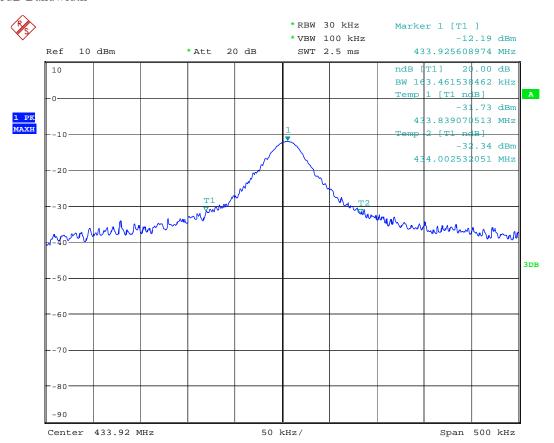

Date: 18.JUL.2019 09:45:59

Report No: FCC1907013 Page 21 of 36

Date: 2019-07-22




8.0 Deactivate Test

8.1 Requirement

Per 15.231(a) (1)

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

8. 2 Radiated Test Setup

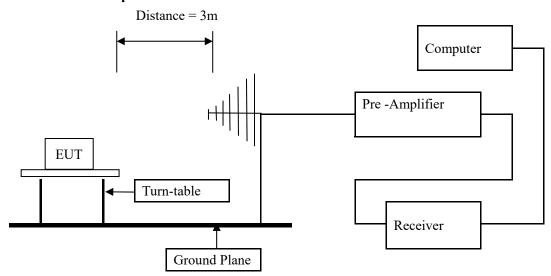

For the actual test configuration , please refer to the related items – Photos of Testing The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.231(e) limits.

8.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.


Page 22 of 36

Report No: FCC1907013

Date: 2019-07-22



8.4 Test Data Refer to attached plots:

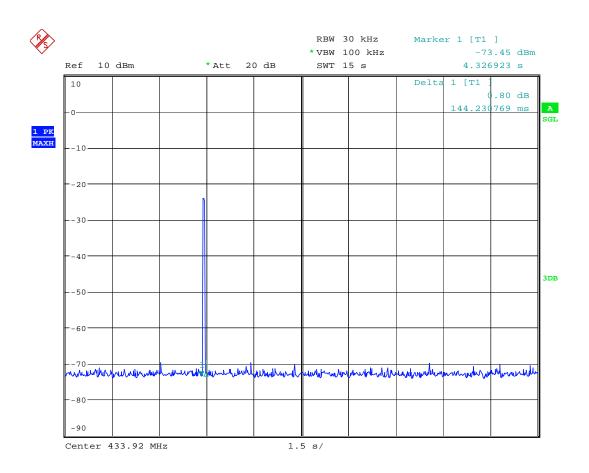

Date: 18.JUL.2019 10:08:01

8.5 Test result

Pass

Report No: FCC1907013 Page 23 of 36

Date: 2019-07-22



9.0 Duty Cycle

9.1 Limit

No dedicated limit specified in the Rules

9.2 Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=0Hz, Adjust Sweep=100ms.
- 5. Repeat above procedures until all frequency measured were complete.

9.3 Test Data

Base on the worst case

Tp = 42.885ms Ton1= 0.697*16 = 11.152(ms)Ton2 = 0.304*17=5.168(ms)

Duty cycle=Ton/Tp=16.32/42.885=0.381


Duty cycle factor = $20 * \log (\text{duty cycle}) = 20 * \log (0.381) = -8.38 \text{dB}$

Report No: FCC1907013 Page 24 of 36

Date: 2019-07-22



Testing Plots:

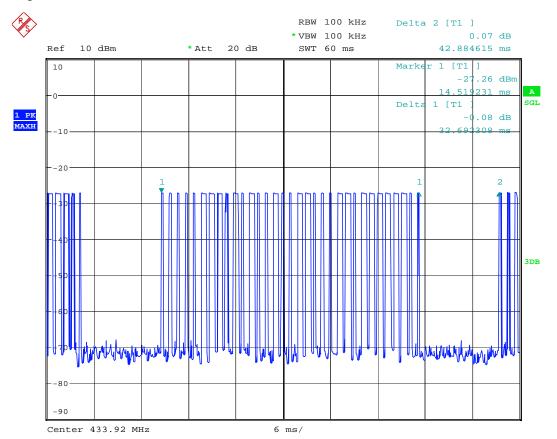


Date: 18.JUL.2019 10:13:37

Report No: FCC1907013 Page 25 of 36

Date: 2019-07-22



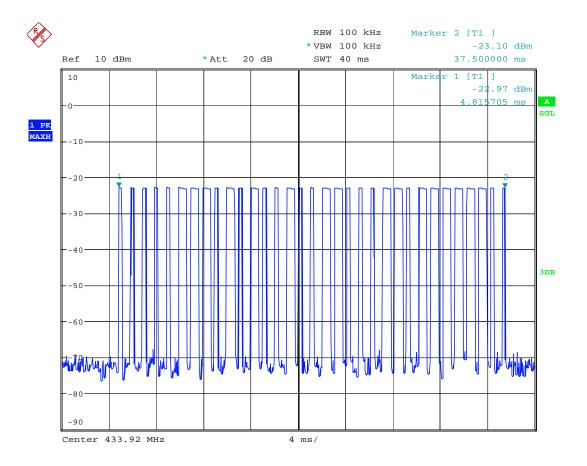


Date: 18.JUL.2019 10:28:44

Report No: FCC1907013 Page 26 of 36

Date: 2019-07-22



 $T_{on1} \\$

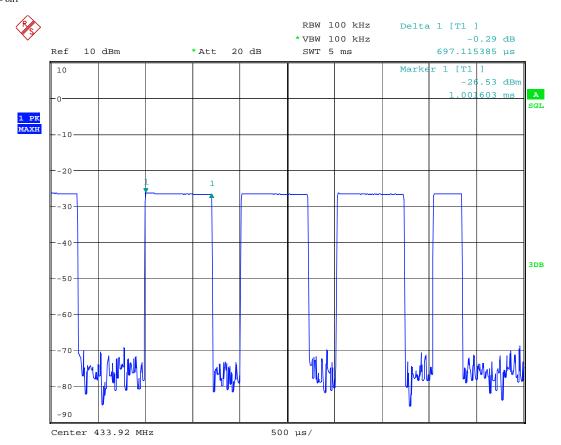


Date: 18.JUL.2019 10:25:48

Report No: FCC1907013 Page 27 of 36

Date: 2019-07-22



 T_{on2}

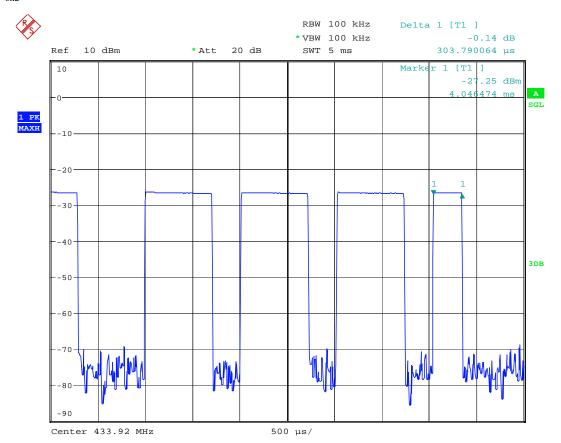

Date: 18.JUL.2019 10:27:15

Report No: FCC1907013 Page 28 of 36

Date: 2019-07-22



10.0 Antenna Requirement

10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.2 Antenna Connected constructions

The antenna is integral antenna which is built-in. The antenna gain is 0dBi. So it meets the requirement of 15.203

Report No: FCC1907013 Page 29 of 36

Date: 2019-07-22




11.0 FCC ID Label

FCC ID: 2ATVB-V87

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

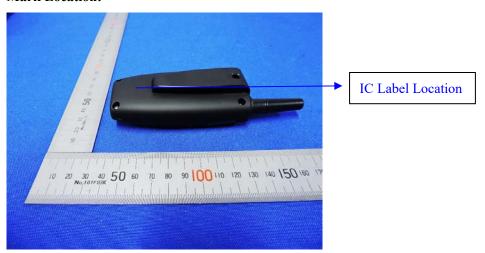


Report No: FCC1907013 Page 30 of 36

Date: 2019-07-22



12.0. Photo of testing

12.1 Conducted test View

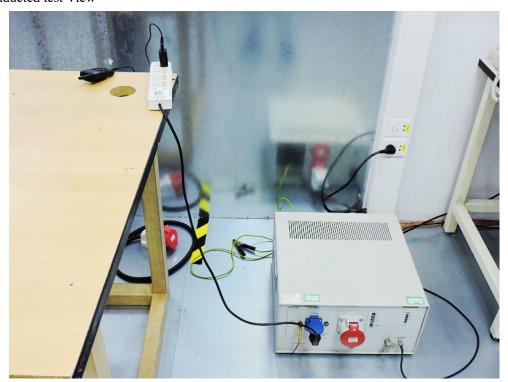



Report No: FCC1907013

Date: 2019-07-22



12.2 Radiated emission test view

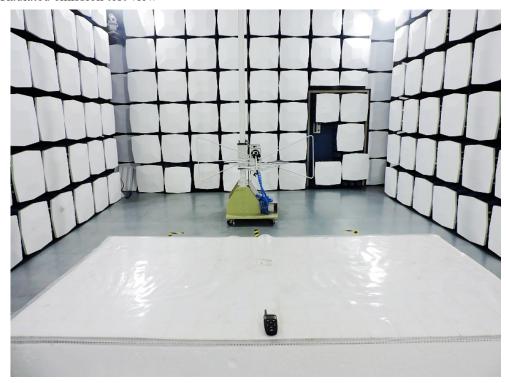

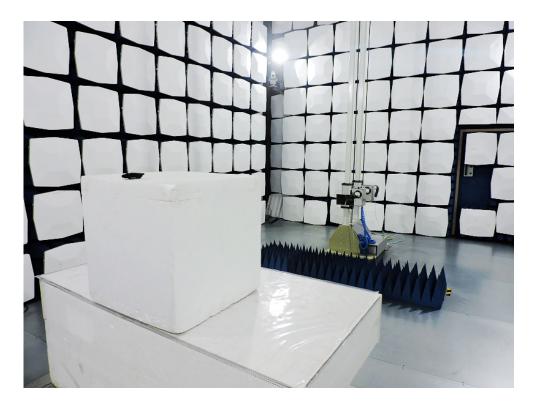

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 32 of 36

Report No: FCC1907013

Date: 2019-07-22



Photo for the EUT



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 33 of 36

Report No: FCC1907013

Date: 2019-07-22



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 34 of 36

Report No: FCC1907013

Date: 2019-07-22



Photo for the EUT





Page 35 of 36


Report No: FCC1907013

Date: 2019-07-22



Photo for the EUT



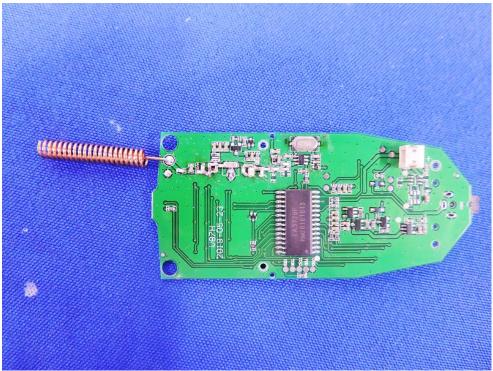

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 36 of 36

Report No: FCC1907013

Date: 2019-07-22



Photo for the EUT

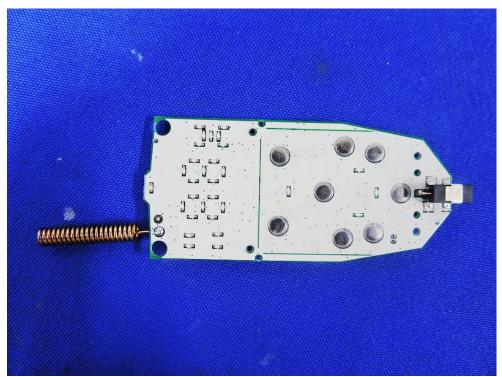



-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.