

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



东莞市金赞智能科技有限公司

产品规格书

PRODUCT SPECIFICATION

客 户: 吉成无线（深圳）有限公司
 CUSTOMER: _____
 客户料号: 01.03.01046
 CUST P/N: _____
 金赞料号: _____
 K C P/N: _____
 产品型号: 15*19.7*0.08*24P*11TS*40mm/20.5*36.5*0.08*24P*2P*10TS*40mm
 D E S E : _____
 日 期: 2024.2.27
 D A T E : _____
 版 本: A.0
 VERSION : _____

(客户承认受领印) ACCEPTANCE STAMP

We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
陈佳佳	蓝春林	李东生	

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114

Fax: 86-076986015646

Address: No. 2 Xisha Road, Shijie Town, Dongguan, China

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

15*19.7*0.08*24P*11TS*40mm/
20.5*36.5*0.08*24P*2P*10TS*40mm

工程专

李东生

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646
Address: No. 2 Xisha Road, Shijie Town, Dongguan, China
Http://www.jzcoil.com 文件编号 FilNo: KC-JZ-09-001

东莞市金赞智能科技有限公司


DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

01.03.01046

金赞型号:
KC DESE15*19.7*0.08*24P*11TS*40mm/
20.5*36.5*0.08*24P*2P*10TS*40mm

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

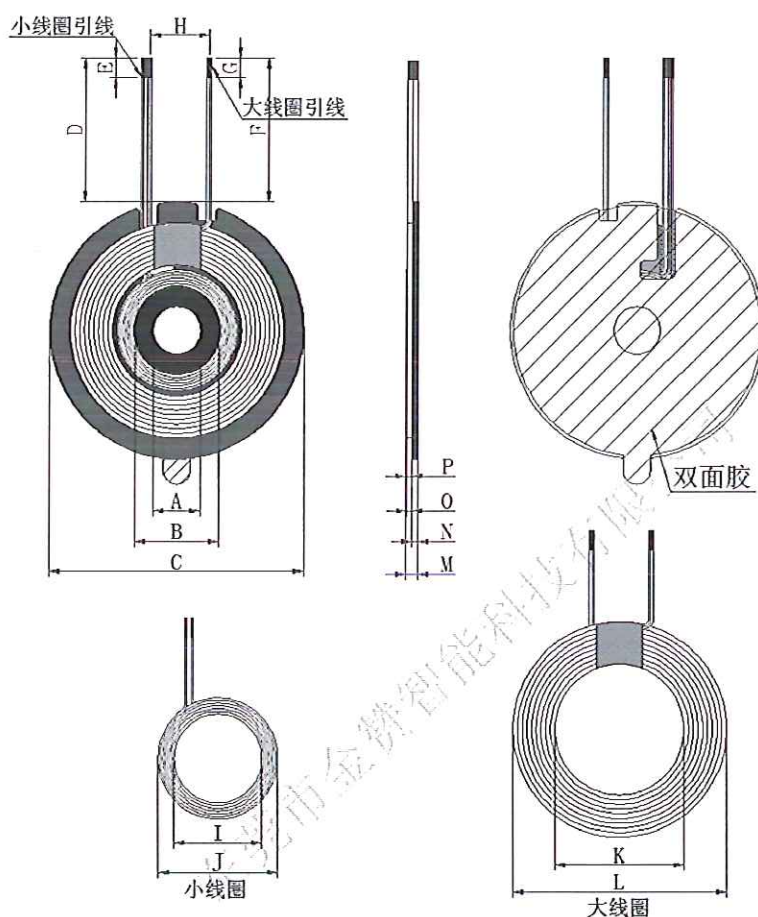

单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H
8±0.5	14.4±1	43.5±1	40±1	3±1	40±1	3±1	10±2
I	J	K	L	M	N	O	P
15±0.5	19.7±1	20.5±0.5	40±1	2.5MAX	0.8±0.1	0.8±0.05	1.04±0.05

PS: 1. D 为小线圈磁外引线长度, F 为大线圈磁外引线长度; 2. O、P 不包含进线; 3. M 不包含离型纸;

拟制
PREPARED BY

陈佳佳

工程审核
ENGINEER CHECKED BY

李东生

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114

Fax: 86-076986015646

Address: No. 2 Xisha Road, Shijie Town, Dongguan, China

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容 Specification			客户料号: CUST P/N	01.03.01046	
			金赞型号: KC DESE	15*19.7*0.08*24P*11TS*40mm/ 20.5*36.5*0.08*24P*2P*10TS*40mm	
圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
小线圈 11TS 大线圈 10TS	小线圈: 0.08*24P 热风绞线 大线圈: 0.08*24P*2P 热风绞线	密绕 (Close)	逆时针 (Anticlockwise)	小线圈不相交 (No) 大线圈相交 (Yes)	反贴 (Anti/-Paste)

所有材料要求合格 ROHS 标准

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: 25±10℃, 湿度 RELATIVE HUMIDITY: 65±10%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	小线圈加磁片: 6.8 uH±10% 大线圈加磁片: 7.1 uH±10%	100kHz/V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	线材	0.08*24P/0.08*24P*2P 热风绞线	JX-2U-F-0009	HY
2	铁氧体 (大)	G43.5*8*0.8H (带孔, 带双槽 L 槽)	GCP-T-00300	LX
3	铁氧体 (小)	14.4*8*1.0H (带孔)	GCP-T-00301	LX
4	背胶	42*0.08H (无孔, 带手撕)	SMJ-00055	HW
5	胶水	P28 黄胶	HJ-HZY-P28	HZY
6	金手指胶布	8mm	高温胶纸 8MM	JRM
7	锡条	环保无铅焊锡条	无铅高温锡条	XC

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
陈佳佳	李东生

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646
 Address: No. 2 Xisha Road, Shijie Town, Dongguan, China
 Http://www.jzcoil.com 文件编号 FilNo: KC-JZ-09-008