

### Sum of the SAR for GSM 850 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | GSM 850                            | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head (voice)           | Left Touch    | 0.612                              | 0.659                 |                       | 1.271                   | No             |
|                        | Left Tilt     | 0.271                              | 0.296                 |                       | 0.567                   | No             |
|                        | Right Touch   | 0.512                              | 0.341                 |                       | 0.853                   | No             |
|                        | Right Tilt    | 0.323                              | 0.286                 |                       | 0.609                   | No             |
| Head (voice)           | Left Touch    | 0.612                              |                       | 0.186                 | 0.798                   | No             |
|                        | Left Tilt     | 0.271                              |                       | 0.186                 | 0.457                   | No             |
|                        | Right Touch   | 0.512                              |                       | 0.186                 | 0.698                   | No             |
|                        | Right Tilt    | 0.323                              |                       | 0.186                 | 0.509                   | No             |
| Body-worn (voice)      | Rear          | 1.137                              | 0.203                 |                       | 1.340                   | No             |
|                        |               | 1.137                              |                       | 0.096                 | 1.233                   | No             |
|                        | Front         | 0.638                              | 0.177                 |                       | 0.815                   | No             |
|                        |               | 0.638                              |                       | 0.096                 | 0.734                   | No             |
| Body-worn (Data)       | Rear          | 1.131                              |                       | 0.096                 | 1.227                   | No             |
|                        |               | 1.131                              | 0.203                 |                       | 1.334                   | No             |
|                        | Front         | 0.708                              |                       | 0.096                 | 0.804                   | No             |
|                        |               | 0.708                              | 0.177                 |                       | 0.885                   | No             |
| Body-worn (Hotspot)    | Edge 2        | 0.974                              | 0.174                 |                       | 1.148                   | No             |
|                        | Edge 2        | 0.974                              |                       | 0.096                 | 1.070                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | GSM 850                            | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head (voice)           | Left Touch    | 0.612                              | 0.158                 |                       | 0.770                   | No             |
|                        | Left Tilt     | 0.271                              | 0.094                 |                       | 0.365                   | No             |
|                        | Right Touch   | 0.512                              | 0.054                 |                       | 0.566                   | No             |
|                        | Right Tilt    | 0.323                              | 0.066                 |                       | 0.389                   | No             |
| Head (voice)           | Left Touch    | 0.612                              |                       | 0.023                 | 0.635                   | No             |
|                        | Left Tilt     | 0.271                              |                       | 0.016                 | 0.287                   | No             |
|                        | Right Touch   | 0.512                              |                       | 0.053                 | 0.565                   | No             |
|                        | Right Tilt    | 0.323                              |                       | 0.050                 | 0.373                   | No             |
| Body-worn (voice)      | Rear          | 1.137                              | 0.295                 |                       | 1.432                   | No             |
|                        |               | 1.137                              |                       | 0.128                 | 1.265                   | No             |
|                        | Front         | 0.638                              | 0.028                 |                       | 0.666                   | No             |
|                        |               | 0.638                              |                       | 0.025                 | 0.663                   | No             |
| Body-worn (Data)       | Rear          | 1.131                              |                       | 0.128                 | 1.259                   | No             |
|                        |               | 1.131                              | 0.295                 |                       | 1.426                   | No             |
|                        | Front         | 0.708                              |                       | 0.025                 | 0.733                   | No             |
|                        |               | 0.708                              | 0.028                 |                       | 0.736                   | No             |
| Body-worn (Hotspot)    | Edge 2        | 0.974                              | 0.173                 |                       | 1.147                   | No             |
|                        | Edge 2        | 0.974                              |                       | 0.045                 | 1.019                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for GSM 1900 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | PCS 1900                           | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head (voice)           | Left Touch    | 0.164                              | 0.659                 |                       | 0.823                   | No             |
|                        | Left Tilt     | 0.041                              | 0.296                 |                       | 0.337                   | No             |
|                        | Right Touch   | 0.179                              | 0.341                 |                       | 0.520                   | No             |
|                        | Right Tilt    | 0.035                              | 0.286                 |                       | 0.321                   | No             |
| Head (voice)           | Left Touch    | 0.164                              |                       | 0.186                 | 0.350                   | No             |
|                        | Left Tilt     | 0.041                              |                       | 0.186                 | 0.227                   | No             |
|                        | Right Touch   | 0.179                              |                       | 0.186                 | 0.365                   | No             |
|                        | Right Tilt    | 0.035                              |                       | 0.186                 | 0.221                   | No             |
| Body-worn (voice)      | Rear          | 0.468                              | 0.203                 |                       | 0.671                   | No             |
|                        |               | 0.468                              |                       | 0.096                 | 0.564                   | No             |
|                        | Front         | 0.192                              | 0.177                 |                       | 0.369                   | No             |
|                        |               | 0.192                              |                       | 0.096                 | 0.288                   | No             |
| Body-worn (Data)       | Rear          | 0.474                              |                       | 0.096                 | 0.570                   | No             |
|                        |               | 0.474                              | 0.203                 |                       | 0.677                   | No             |
|                        | Front         | 0.217                              |                       | 0.096                 | 0.313                   | No             |
|                        |               | 0.217                              | 0.177                 |                       | 0.394                   | No             |
| Body-worn (Hotspot)    | Edge 2        | 0.056                              | 0.174                 |                       | 0.230                   | No             |
|                        | Edge 2        | 0.056                              |                       | 0.096                 | 0.152                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | PCS 1900                           | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head (voice)           | Left Touch    | 0.164                              | 0.158                 |                       | 0.322                   | No             |
|                        | Left Tilt     | 0.041                              | 0.094                 |                       | 0.135                   | No             |
|                        | Right Touch   | 0.179                              | 0.054                 |                       | 0.233                   | No             |
|                        | Right Tilt    | 0.035                              | 0.066                 |                       | 0.101                   | No             |
| Head (voice)           | Left Touch    | 0.164                              |                       | 0.023                 | 0.187                   | No             |
|                        | Left Tilt     | 0.041                              |                       | 0.016                 | 0.057                   | No             |
|                        | Right Touch   | 0.179                              |                       | 0.053                 | 0.232                   | No             |
|                        | Right Tilt    | 0.035                              |                       | 0.050                 | 0.085                   | No             |
| Body-worn (voice)      | Rear          | 0.468                              | 0.295                 |                       | 0.763                   | No             |
|                        |               | 0.468                              |                       | 0.128                 | 0.596                   | No             |
|                        | Front         | 0.192                              | 0.028                 |                       | 0.220                   | No             |
|                        |               | 0.192                              |                       | 0.025                 | 0.217                   | No             |
| Body-worn (Data)       | Rear          | 0.474                              |                       | 0.128                 | 0.602                   | No             |
|                        |               | 0.474                              | 0.295                 |                       | 0.769                   | No             |
|                        | Front         | 0.217                              |                       | 0.025                 | 0.242                   | No             |
|                        |               | 0.217                              | 0.028                 |                       | 0.245                   | No             |
| Body-worn (Hotspot)    | Edge 2        | 0.056                              | 0.173                 |                       | 0.229                   | No             |
|                        | Edge 2        | 0.056                              |                       | 0.045                 | 0.101                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for WCDMA Band II & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | WCDMA Band II                      | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.473                              | 0.659                 |                       | 1.132                   | No             |
|                        | Left Tilt     | 0.157                              | 0.296                 |                       | 0.453                   | No             |
|                        | Right Touch   | 0.420                              | 0.341                 |                       | 0.761                   | No             |
|                        | Right Tilt    | 0.097                              | 0.286                 |                       | 0.383                   | No             |
| Head                   | Left Touch    | 0.473                              |                       | 0.186                 | 0.659                   | No             |
|                        | Left Tilt     | 0.157                              |                       | 0.186                 | 0.343                   | No             |
|                        | Right Touch   | 0.420                              |                       | 0.186                 | 0.606                   | No             |
|                        | Right Tilt    | 0.097                              |                       | 0.186                 | 0.283                   | No             |
| Body-worn              | Rear          | 0.922                              | 0.203                 |                       | 1.125                   | No             |
|                        | Front         | 0.405                              | 0.177                 |                       | 0.582                   | No             |
|                        | Edge 2        | 0.146                              | 0.174                 |                       | 0.320                   | No             |
|                        | Rear          | 0.922                              |                       | 0.096                 | 1.018                   | No             |
|                        | Front         | 0.405                              |                       | 0.096                 | 0.501                   | No             |
|                        | Edge 2        | 0.146                              |                       | 0.096                 | 0.242                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | WCDMA Band II                      | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.473                              | 0.158                 |                       | 0.631                   | No             |
|                        | Left Tilt     | 0.157                              | 0.094                 |                       | 0.251                   | No             |
|                        | Right Touch   | 0.420                              | 0.054                 |                       | 0.474                   | No             |
|                        | Right Tilt    | 0.097                              | 0.066                 |                       | 0.163                   | No             |
| Head                   | Left Touch    | 0.473                              |                       | 0.023                 | 0.496                   | No             |
|                        | Left Tilt     | 0.157                              |                       | 0.016                 | 0.173                   | No             |
|                        | Right Touch   | 0.420                              |                       | 0.053                 | 0.473                   | No             |
|                        | Right Tilt    | 0.097                              |                       | 0.050                 | 0.147                   | No             |
| Body-worn              | Rear          | 0.922                              | 0.295                 |                       | 1.217                   | No             |
|                        | Front         | 0.405                              | 0.028                 |                       | 0.433                   | No             |
|                        | Edge 2        | 0.146                              | 0.173                 |                       | 0.319                   | No             |
|                        | Rear          | 0.922                              |                       | 0.025                 | 0.947                   | No             |
|                        | Front         | 0.405                              |                       | 0.128                 | 0.533                   | No             |
|                        | Edge 2        | 0.146                              |                       | 0.025                 | 0.171                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for WCDMA Band IV & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | Σ1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-----------------|----------------|
|                        |               | WCDMA Band IV                      | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                 |                |
| Head                   | Left Touch    | 0.308                              | 0.659                 |                       | 0.967           | No             |
|                        | Left Tilt     | 0.119                              | 0.296                 |                       | 0.415           | No             |
|                        | Right Touch   | 0.240                              | 0.341                 |                       | 0.581           | No             |
|                        | Right Tilt    | 0.080                              | 0.286                 |                       | 0.366           | No             |
| Head                   | Left Touch    | 0.308                              |                       | 0.186                 | 0.494           | No             |
|                        | Left Tilt     | 0.119                              |                       | 0.186                 | 0.305           | No             |
|                        | Right Touch   | 0.240                              |                       | 0.186                 | 0.426           | No             |
|                        | Right Tilt    | 0.080                              |                       | 0.186                 | 0.266           | No             |
| Body-worn              | Rear          | 0.949                              | 0.203                 |                       | 1.152           | No             |
|                        | Front         | 0.089                              | 0.177                 |                       | 0.266           | No             |
|                        | Edge 2        | 0.018                              | 0.174                 |                       | 0.192           | No             |
|                        | Rear          | 0.949                              |                       | 0.096                 | 1.045           | No             |
|                        | Front         | 0.089                              |                       | 0.096                 | 0.185           | No             |
|                        | Edge 2        | 0.018                              |                       | 0.096                 | 0.114           | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | Σ1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | WCDMA Band IV                      | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                 |                |
| Head                   | Left Touch    | 0.308                              | 0.158                 |                       | 0.466           | No             |
|                        | Left Tilt     | 0.119                              | 0.094                 |                       | 0.213           | No             |
|                        | Right Touch   | 0.240                              | 0.054                 |                       | 0.294           | No             |
|                        | Right Tilt    | 0.080                              | 0.066                 |                       | 0.146           | No             |
| Head                   | Left Touch    | 0.308                              |                       | 0.023                 | 0.331           | No             |
|                        | Left Tilt     | 0.119                              |                       | 0.016                 | 0.135           | No             |
|                        | Right Touch   | 0.240                              |                       | 0.053                 | 0.293           | No             |
|                        | Right Tilt    | 0.080                              |                       | 0.050                 | 0.130           | No             |
| Body-worn              | Rear          | 0.949                              | 0.295                 |                       | 1.244           | No             |
|                        | Front         | 0.089                              | 0.028                 |                       | 0.117           | No             |
|                        | Edge 2        | 0.018                              | 0.173                 |                       | 0.191           | No             |
|                        | Rear          | 0.949                              |                       | 0.025                 | 0.974           | No             |
|                        | Front         | 0.089                              |                       | 0.128                 | 0.217           | No             |
|                        | Edge 2        | 0.018                              |                       | 0.025                 | 0.043           | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for WCDMA Band V & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | Σ1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-----------------|----------------|
|                        |               | WCDMA Band V                       | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                 |                |
| Head                   | Left Touch    | 0.310                              | 0.659                 |                       | 0.969           | No             |
|                        | Left Tilt     | 0.236                              | 0.296                 |                       | 0.532           | No             |
|                        | Right Touch   | 0.336                              | 0.341                 |                       | 0.677           | No             |
|                        | Right Tilt    | 0.200                              | 0.286                 |                       | 0.486           | No             |
| Head                   | Left Touch    | 0.310                              |                       | 0.186                 | 0.496           | No             |
|                        | Left Tilt     | 0.236                              |                       | 0.186                 | 0.422           | No             |
|                        | Right Touch   | 0.336                              |                       | 0.186                 | 0.522           | No             |
|                        | Right Tilt    | 0.200                              |                       | 0.186                 | 0.386           | No             |
| Body-worn              | Rear          | 0.941                              | 0.203                 |                       | 1.144           | No             |
|                        | Front         | 0.644                              | 0.177                 |                       | 0.821           | No             |
|                        | Edge 2        | 0.418                              | 0.174                 |                       | 0.592           | No             |
|                        | Rear          | 0.941                              |                       | 0.096                 | 1.037           | No             |
|                        | Front         | 0.644                              |                       | 0.096                 | 0.740           | No             |
|                        | Edge 2        | 0.418                              |                       | 0.096                 | 0.514           | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | Σ1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | WCDMA Band V                       | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                 |                |
| Head                   | Left Touch    | 0.310                              | 0.158                 |                       | 0.468           | No             |
|                        | Left Tilt     | 0.236                              | 0.094                 |                       | 0.330           | No             |
|                        | Right Touch   | 0.336                              | 0.054                 |                       | 0.390           | No             |
|                        | Right Tilt    | 0.200                              | 0.066                 |                       | 0.266           | No             |
| Head                   | Left Touch    | 0.310                              |                       | 0.023                 | 0.333           | No             |
|                        | Left Tilt     | 0.236                              |                       | 0.016                 | 0.252           | No             |
|                        | Right Touch   | 0.336                              |                       | 0.053                 | 0.389           | No             |
|                        | Right Tilt    | 0.200                              |                       | 0.050                 | 0.250           | No             |
| Body-worn              | Rear          | 0.941                              | 0.295                 |                       | 1.236           | No             |
|                        | Front         | 0.644                              | 0.028                 |                       | 0.672           | No             |
|                        | Edge 2        | 0.418                              | 0.173                 |                       | 0.591           | No             |
|                        | Rear          | 0.941                              |                       | 0.025                 | 0.966           | No             |
|                        | Front         | 0.644                              |                       | 0.128                 | 0.772           | No             |
|                        | Edge 2        | 0.418                              |                       | 0.025                 | 0.443           | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 2 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 2                         | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.395                              | 0.659                 |                       | 1.054                   | No             |
|                        | Left Tilt     | 0.047                              | 0.296                 |                       | 0.343                   | No             |
|                        | Right Touch   | 0.364                              | 0.341                 |                       | 0.705                   | No             |
|                        | Right Tilt    | 0.076                              | 0.286                 |                       | 0.362                   | No             |
| Head                   | Left Touch    | 0.395                              |                       | 0.186                 | 0.581                   | No             |
|                        | Left Tilt     | 0.047                              |                       | 0.186                 | 0.233                   | No             |
|                        | Right Touch   | 0.364                              |                       | 0.186                 | 0.550                   | No             |
|                        | Right Tilt    | 0.076                              |                       | 0.186                 | 0.262                   | No             |
| Body-worn              | Rear          | 0.938                              | 0.203                 |                       | 1.141                   | No             |
|                        | Front         | 0.296                              | 0.177                 |                       | 0.473                   | No             |
|                        | Edge 2        | 0.125                              | 0.174                 |                       | 0.299                   | No             |
|                        | Rear          | 0.938                              |                       | 0.096                 | 1.034                   | No             |
|                        | Front         | 0.296                              |                       | 0.096                 | 0.392                   | No             |
|                        | Edge 2        | 0.125                              |                       | 0.096                 | 0.221                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 2                         | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.395                              | 0.158                 |                       | 0.553                   | No             |
|                        | Left Tilt     | 0.047                              | 0.094                 |                       | 0.141                   | No             |
|                        | Right Touch   | 0.364                              | 0.054                 |                       | 0.418                   | No             |
|                        | Right Tilt    | 0.076                              | 0.066                 |                       | 0.142                   | No             |
| Head                   | Left Touch    | 0.395                              |                       | 0.023                 | 0.418                   | No             |
|                        | Left Tilt     | 0.047                              |                       | 0.016                 | 0.063                   | No             |
|                        | Right Touch   | 0.364                              |                       | 0.053                 | 0.417                   | No             |
|                        | Right Tilt    | 0.076                              |                       | 0.050                 | 0.126                   | No             |
| Body-worn              | Rear          | 0.938                              | 0.295                 |                       | 1.233                   | No             |
|                        | Front         | 0.296                              | 0.028                 |                       | 0.324                   | No             |
|                        | Edge 2        | 0.125                              | 0.173                 |                       | 0.298                   | No             |
|                        | Rear          | 0.938                              |                       | 0.025                 | 0.963                   | No             |
|                        | Front         | 0.296                              |                       | 0.128                 | 0.424                   | No             |
|                        | Edge 2        | 0.125                              |                       | 0.025                 | 0.150                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 4 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 4                         | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.348                              | 0.659                 |                       | 1.007                   | No             |
|                        | Left Tilt     | 0.185                              | 0.296                 |                       | 0.481                   | No             |
|                        | Right Touch   | 0.237                              | 0.341                 |                       | 0.578                   | No             |
|                        | Right Tilt    | 0.130                              | 0.286                 |                       | 0.416                   | No             |
| Head                   | Left Touch    | 0.348                              |                       | 0.186                 | 0.534                   | No             |
|                        | Left Tilt     | 0.185                              |                       | 0.186                 | 0.371                   | No             |
|                        | Right Touch   | 0.237                              |                       | 0.186                 | 0.423                   | No             |
|                        | Right Tilt    | 0.130                              |                       | 0.186                 | 0.316                   | No             |
| Body-worn              | Rear          | 0.746                              | 0.203                 |                       | 0.949                   | No             |
|                        | Front         | 0.379                              | 0.177                 |                       | 0.556                   | No             |
|                        | Edge 2        | 0.124                              | 0.174                 |                       | 0.298                   | No             |
|                        | Rear          | 0.746                              |                       | 0.096                 | 0.842                   | No             |
|                        | Front         | 0.379                              |                       | 0.096                 | 0.475                   | No             |
|                        | Edge 2        | 0.124                              |                       | 0.096                 | 0.220                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 4                         | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.348                              | 0.158                 |                       | 0.506                   | No             |
|                        | Left Tilt     | 0.185                              | 0.094                 |                       | 0.279                   | No             |
|                        | Right Touch   | 0.237                              | 0.054                 |                       | 0.291                   | No             |
|                        | Right Tilt    | 0.130                              | 0.066                 |                       | 0.196                   | No             |
| Head                   | Left Touch    | 0.348                              |                       | 0.023                 | 0.371                   | No             |
|                        | Left Tilt     | 0.185                              |                       | 0.016                 | 0.201                   | No             |
|                        | Right Touch   | 0.237                              |                       | 0.053                 | 0.290                   | No             |
|                        | Right Tilt    | 0.130                              |                       | 0.050                 | 0.180                   | No             |
| Body-worn              | Rear          | 0.746                              | 0.295                 |                       | 1.041                   | No             |
|                        | Front         | 0.379                              | 0.028                 |                       | 0.407                   | No             |
|                        | Edge 2        | 0.124                              | 0.173                 |                       | 0.297                   | No             |
|                        | Rear          | 0.746                              |                       | 0.025                 | 0.771                   | No             |
|                        | Front         | 0.379                              |                       | 0.128                 | 0.507                   | No             |
|                        | Edge 2        | 0.124                              |                       | 0.025                 | 0.149                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 5 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 5                         | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.988                              | 0.659                 |                       | 1.647                   | No             |
|                        | Left Tilt     | 0.511                              | 0.296                 |                       | 0.807                   | No             |
|                        | Right Touch   | 0.962                              | 0.341                 |                       | 1.303                   | No             |
|                        | Right Tilt    | 0.571                              | 0.286                 |                       | 0.857                   | No             |
| Head                   | Left Touch    | 0.988                              |                       | 0.186                 | 1.174                   | No             |
|                        | Left Tilt     | 0.511                              |                       | 0.186                 | 0.697                   | No             |
|                        | Right Touch   | 0.962                              |                       | 0.186                 | 1.148                   | No             |
|                        | Right Tilt    | 0.571                              |                       | 0.186                 | 0.757                   | No             |
| Body-worn              | Rear          | 1.286                              | 0.203                 |                       | 1.489                   | No             |
|                        | Front         | 1.009                              | 0.177                 |                       | 1.186                   | No             |
|                        | Edge 2        | 0.804                              | 0.174                 |                       | 0.978                   | No             |
|                        | Rear          | 1.286                              |                       | 0.096                 | 1.382                   | No             |
|                        | Front         | 1.009                              |                       | 0.096                 | 1.105                   | No             |
|                        | Edge 2        | 0.804                              |                       | 0.096                 | 0.900                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 5                         | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.988                              | 0.158                 |                       | 1.146                   | No             |
|                        | Left Tilt     | 0.511                              | 0.094                 |                       | 0.605                   | No             |
|                        | Right Touch   | 0.962                              | 0.054                 |                       | 1.016                   | No             |
|                        | Right Tilt    | 0.571                              | 0.066                 |                       | 0.637                   | No             |
| Head                   | Left Touch    | 0.988                              |                       | 0.023                 | 1.011                   | No             |
|                        | Left Tilt     | 0.511                              |                       | 0.016                 | 0.527                   | No             |
|                        | Right Touch   | 0.962                              |                       | 0.053                 | 1.015                   | No             |
|                        | Right Tilt    | 0.571                              |                       | 0.050                 | 0.621                   | No             |
| Body-worn              | Rear          | 1.286                              | 0.295                 |                       | <b>1.581</b>            | No             |
|                        | Front         | 1.009                              | 0.028                 |                       | 1.037                   | No             |
|                        | Edge 2        | 0.804                              | 0.173                 |                       | 0.977                   | No             |
|                        | Rear          | 1.286                              |                       | 0.025                 | 1.311                   | No             |
|                        | Front         | 1.009                              |                       | 0.128                 | 1.137                   | No             |
|                        | Edge 2        | 0.804                              |                       | 0.025                 | 0.829                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 7 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 7                         | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.243                              | 0.659                 |                       | 0.902                   | No             |
|                        | Left Tilt     | 0.052                              | 0.296                 |                       | 0.348                   | No             |
|                        | Right Touch   | 0.232                              | 0.341                 |                       | 0.573                   | No             |
|                        | Right Tilt    | 0.063                              | 0.286                 |                       | 0.349                   | No             |
| Head                   | Left Touch    | 0.243                              |                       | 0.186                 | 0.429                   | No             |
|                        | Left Tilt     | 0.052                              |                       | 0.186                 | 0.238                   | No             |
|                        | Right Touch   | 0.232                              |                       | 0.186                 | 0.418                   | No             |
|                        | Right Tilt    | 0.063                              |                       | 0.186                 | 0.249                   | No             |
| Body-worn              | Rear          | 0.620                              | 0.203                 |                       | 0.823                   | No             |
|                        | Front         | 0.352                              | 0.177                 |                       | 0.529                   | No             |
|                        | Edge 2        | 0.066                              | 0.174                 |                       | 0.240                   | No             |
|                        | Rear          | 0.620                              |                       | 0.096                 | 0.716                   | No             |
|                        | Front         | 0.352                              |                       | 0.096                 | 0.448                   | No             |
|                        | Edge 2        | 0.066                              |                       | 0.096                 | 0.162                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 7                         | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.243                              | 0.158                 |                       | 0.401                   | No             |
|                        | Left Tilt     | 0.052                              | 0.094                 |                       | 0.146                   | No             |
|                        | Right Touch   | 0.232                              | 0.054                 |                       | 0.286                   | No             |
|                        | Right Tilt    | 0.063                              | 0.066                 |                       | 0.129                   | No             |
| Head                   | Left Touch    | 0.243                              |                       | 0.023                 | 0.266                   | No             |
|                        | Left Tilt     | 0.052                              |                       | 0.016                 | 0.068                   | No             |
|                        | Right Touch   | 0.232                              |                       | 0.053                 | 0.285                   | No             |
|                        | Right Tilt    | 0.063                              |                       | 0.050                 | 0.113                   | No             |
| Body-worn              | Rear          | 0.620                              | 0.295                 |                       | 0.915                   | No             |
|                        | Front         | 0.352                              | 0.028                 |                       | 0.380                   | No             |
|                        | Edge 2        | 0.066                              | 0.173                 |                       | 0.239                   | No             |
|                        | Rear          | 0.620                              |                       | 0.025                 | 0.645                   | No             |
|                        | Front         | 0.352                              |                       | 0.128                 | 0.480                   | No             |
|                        | Edge 2        | 0.066                              |                       | 0.025                 | 0.091                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 12 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 12                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.192                              | 0.659                 |                       | 0.851                   | No             |
|                        | Left Tilt     | 0.101                              | 0.296                 |                       | 0.397                   | No             |
|                        | Right Touch   | 0.548                              | 0.341                 |                       | 0.889                   | No             |
|                        | Right Tilt    | 0.228                              | 0.286                 |                       | 0.514                   | No             |
| Head                   | Left Touch    | 0.192                              |                       | 0.186                 | 0.378                   | No             |
|                        | Left Tilt     | 0.101                              |                       | 0.186                 | 0.287                   | No             |
|                        | Right Touch   | 0.548                              |                       | 0.186                 | 0.734                   | No             |
|                        | Right Tilt    | 0.228                              |                       | 0.186                 | 0.414                   | No             |
| Body-worn              | Rear          | 1.075                              | 0.203                 |                       | 1.278                   | No             |
|                        | Front         | 0.549                              | 0.177                 |                       | 0.726                   | No             |
|                        | Edge 2        | 0.664                              | 0.174                 |                       | 0.838                   | No             |
|                        | Rear          | 1.075                              |                       | 0.096                 | 1.171                   | No             |
|                        | Front         | 0.549                              |                       | 0.096                 | 0.645                   | No             |
|                        | Edge 2        | 0.664                              |                       | 0.096                 | 0.760                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 12                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.192                              | 0.158                 |                       | 0.350                   | No             |
|                        | Left Tilt     | 0.101                              | 0.094                 |                       | 0.195                   | No             |
|                        | Right Touch   | 0.548                              | 0.054                 |                       | 0.602                   | No             |
|                        | Right Tilt    | 0.228                              | 0.066                 |                       | 0.294                   | No             |
| Head                   | Left Touch    | 0.192                              |                       | 0.023                 | 0.215                   | No             |
|                        | Left Tilt     | 0.101                              |                       | 0.016                 | 0.117                   | No             |
|                        | Right Touch   | 0.548                              |                       | 0.053                 | 0.601                   | No             |
|                        | Right Tilt    | 0.228                              |                       | 0.050                 | 0.278                   | No             |
| Body-worn              | Rear          | 1.075                              | 0.295                 |                       | 1.370                   | No             |
|                        | Front         | 0.549                              | 0.028                 |                       | 0.577                   | No             |
|                        | Edge 2        | 0.664                              | 0.173                 |                       | 0.837                   | No             |
|                        | Rear          | 1.075                              |                       | 0.025                 | 1.100                   | No             |
|                        | Front         | 0.549                              |                       | 0.128                 | 0.677                   | No             |
|                        | Edge 2        | 0.664                              |                       | 0.025                 | 0.689                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 13 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 13                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.117                              | 0.659                 |                       | 0.776                   | No             |
|                        | Left Tilt     | 0.228                              | 0.296                 |                       | 0.524                   | No             |
|                        | Right Touch   | 0.320                              | 0.341                 |                       | 0.661                   | No             |
|                        | Right Tilt    | 0.176                              | 0.286                 |                       | 0.462                   | No             |
| Head                   | Left Touch    | 0.117                              |                       | 0.186                 | 0.303                   | No             |
|                        | Left Tilt     | 0.228                              |                       | 0.186                 | 0.414                   | No             |
|                        | Right Touch   | 0.320                              |                       | 0.186                 | 0.506                   | No             |
|                        | Right Tilt    | 0.176                              |                       | 0.186                 | 0.362                   | No             |
| Body-worn              | Rear          | 0.342                              | 0.203                 |                       | 0.545                   | No             |
|                        | Front         | 0.236                              | 0.177                 |                       | 0.413                   | No             |
|                        | Edge 2        | 0.276                              | 0.174                 |                       | 0.450                   | No             |
|                        | Rear          | 0.342                              |                       | 0.096                 | 0.438                   | No             |
|                        | Front         | 0.236                              |                       | 0.096                 | 0.332                   | No             |
|                        | Edge 2        | 0.276                              |                       | 0.096                 | 0.372                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 13                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.117                              | 0.158                 |                       | 0.275                   | No             |
|                        | Left Tilt     | 0.228                              | 0.094                 |                       | 0.322                   | No             |
|                        | Right Touch   | 0.320                              | 0.054                 |                       | 0.374                   | No             |
|                        | Right Tilt    | 0.176                              | 0.066                 |                       | 0.242                   | No             |
| Head                   | Left Touch    | 0.117                              |                       | 0.023                 | 0.140                   | No             |
|                        | Left Tilt     | 0.228                              |                       | 0.016                 | 0.244                   | No             |
|                        | Right Touch   | 0.320                              |                       | 0.053                 | 0.373                   | No             |
|                        | Right Tilt    | 0.176                              |                       | 0.050                 | 0.226                   | No             |
| Body-worn              | Rear          | 0.342                              | 0.295                 |                       | 0.637                   | No             |
|                        | Front         | 0.236                              | 0.028                 |                       | 0.264                   | No             |
|                        | Edge 2        | 0.276                              | 0.173                 |                       | 0.449                   | No             |
|                        | Rear          | 0.342                              |                       | 0.025                 | 0.367                   | No             |
|                        | Front         | 0.236                              |                       | 0.128                 | 0.364                   | No             |
|                        | Edge 2        | 0.276                              |                       | 0.025                 | 0.301                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 17 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 17                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.120                              | 0.659                 |                       | 0.779                   | No             |
|                        | Left Tilt     | 0.244                              | 0.296                 |                       | 0.540                   | No             |
|                        | Right Touch   | 0.322                              | 0.341                 |                       | 0.663                   | No             |
|                        | Right Tilt    | 0.180                              | 0.286                 |                       | 0.466                   | No             |
| Head                   | Left Touch    | 0.120                              |                       | 0.186                 | 0.306                   | No             |
|                        | Left Tilt     | 0.244                              |                       | 0.186                 | 0.430                   | No             |
|                        | Right Touch   | 0.322                              |                       | 0.186                 | 0.508                   | No             |
|                        | Right Tilt    | 0.180                              |                       | 0.186                 | 0.366                   | No             |
| Body-worn              | Rear          | 0.224                              | 0.203                 |                       | 0.427                   | No             |
|                        | Front         | 0.189                              | 0.177                 |                       | 0.366                   | No             |
|                        | Edge 2        | 0.254                              | 0.174                 |                       | 0.428                   | No             |
|                        | Rear          | 0.224                              |                       | 0.096                 | 0.320                   | No             |
|                        | Front         | 0.189                              |                       | 0.096                 | 0.285                   | No             |
|                        | Edge 2        | 0.254                              |                       | 0.096                 | 0.350                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 17                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.120                              | 0.158                 |                       | 0.278                   | No             |
|                        | Left Tilt     | 0.244                              | 0.094                 |                       | 0.338                   | No             |
|                        | Right Touch   | 0.322                              | 0.054                 |                       | 0.376                   | No             |
|                        | Right Tilt    | 0.180                              | 0.066                 |                       | 0.246                   | No             |
| Head                   | Left Touch    | 0.120                              |                       | 0.023                 | 0.143                   | No             |
|                        | Left Tilt     | 0.244                              |                       | 0.016                 | 0.260                   | No             |
|                        | Right Touch   | 0.322                              |                       | 0.053                 | 0.375                   | No             |
|                        | Right Tilt    | 0.180                              |                       | 0.050                 | 0.230                   | No             |
| Body-worn              | Rear          | 0.224                              | 0.295                 |                       | 0.519                   | No             |
|                        | Front         | 0.189                              | 0.028                 |                       | 0.217                   | No             |
|                        | Edge 2        | 0.254                              | 0.173                 |                       | 0.427                   | No             |
|                        | Rear          | 0.224                              |                       | 0.025                 | 0.249                   | No             |
|                        | Front         | 0.189                              |                       | 0.128                 | 0.317                   | No             |
|                        | Edge 2        | 0.254                              |                       | 0.025                 | 0.279                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 25 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 25                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.417                              | 0.659                 |                       | 1.076                   | No             |
|                        | Left Tilt     | 0.140                              | 0.296                 |                       | 0.436                   | No             |
|                        | Right Touch   | 0.409                              | 0.341                 |                       | 0.750                   | No             |
|                        | Right Tilt    | 0.101                              | 0.286                 |                       | 0.387                   | No             |
| Head                   | Left Touch    | 0.417                              |                       | 0.186                 | 0.603                   | No             |
|                        | Left Tilt     | 0.140                              |                       | 0.186                 | 0.326                   | No             |
|                        | Right Touch   | 0.409                              |                       | 0.186                 | 0.595                   | No             |
|                        | Right Tilt    | 0.101                              |                       | 0.186                 | 0.287                   | No             |
| Body-worn              | Rear          | 1.189                              | 0.203                 |                       | 1.392                   | No             |
|                        | Front         | 0.489                              | 0.177                 |                       | 0.666                   | No             |
|                        | Edge 2        | 0.110                              | 0.174                 |                       | 0.284                   | No             |
|                        | Rear          | 1.189                              |                       | 0.096                 | 1.285                   | No             |
|                        | Front         | 0.489                              |                       | 0.096                 | 0.585                   | No             |
|                        | Edge 2        | 0.110                              |                       | 0.096                 | 0.206                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 25                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.417                              | 0.158                 |                       | 0.575                   | No             |
|                        | Left Tilt     | 0.140                              | 0.094                 |                       | 0.234                   | No             |
|                        | Right Touch   | 0.409                              | 0.054                 |                       | 0.463                   | No             |
|                        | Right Tilt    | 0.101                              | 0.066                 |                       | 0.167                   | No             |
| Head                   | Left Touch    | 0.417                              |                       | 0.023                 | 0.440                   | No             |
|                        | Left Tilt     | 0.140                              |                       | 0.016                 | 0.156                   | No             |
|                        | Right Touch   | 0.409                              |                       | 0.053                 | 0.462                   | No             |
|                        | Right Tilt    | 0.101                              |                       | 0.050                 | 0.151                   | No             |
| Body-worn              | Rear          | 1.189                              | 0.295                 |                       | 1.484                   | No             |
|                        | Front         | 0.489                              | 0.028                 |                       | 0.517                   | No             |
|                        | Edge 2        | 0.110                              | 0.173                 |                       | 0.283                   | No             |
|                        | Rear          | 1.189                              |                       | 0.025                 | 1.214                   | No             |
|                        | Front         | 0.489                              |                       | 0.128                 | 0.617                   | No             |
|                        | Edge 2        | 0.110                              |                       | 0.025                 | 0.135                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 26B & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 26B                       | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.275                              | 0.659                 |                       | 0.934                   | No             |
|                        | Left Tilt     | 0.105                              | 0.296                 |                       | 0.401                   | No             |
|                        | Right Touch   | 0.346                              | 0.341                 |                       | 0.687                   | No             |
|                        | Right Tilt    | 0.150                              | 0.286                 |                       | 0.436                   | No             |
| Head                   | Left Touch    | 0.275                              |                       | 0.186                 | 0.461                   | No             |
|                        | Left Tilt     | 0.105                              |                       | 0.186                 | 0.291                   | No             |
|                        | Right Touch   | 0.346                              |                       | 0.186                 | 0.532                   | No             |
|                        | Right Tilt    | 0.150                              |                       | 0.186                 | 0.336                   | No             |
| Body-worn              | Rear          | 0.368                              | 0.203                 |                       | 0.571                   | No             |
|                        | Front         | 0.222                              | 0.177                 |                       | 0.399                   | No             |
|                        | Edge 2        | 0.263                              | 0.174                 |                       | 0.437                   | No             |
|                        | Rear          | 0.368                              |                       | 0.096                 | 0.464                   | No             |
|                        | Front         | 0.222                              |                       | 0.096                 | 0.318                   | No             |
|                        | Edge 2        | 0.263                              |                       | 0.096                 | 0.359                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 26B                       | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.275                              | 0.158                 |                       | 0.433                   | No             |
|                        | Left Tilt     | 0.105                              | 0.094                 |                       | 0.199                   | No             |
|                        | Right Touch   | 0.346                              | 0.054                 |                       | 0.400                   | No             |
|                        | Right Tilt    | 0.150                              | 0.066                 |                       | 0.216                   | No             |
| Head                   | Left Touch    | 0.275                              |                       | 0.023                 | 0.298                   | No             |
|                        | Left Tilt     | 0.105                              |                       | 0.016                 | 0.121                   | No             |
|                        | Right Touch   | 0.346                              |                       | 0.053                 | 0.399                   | No             |
|                        | Right Tilt    | 0.150                              |                       | 0.050                 | 0.200                   | No             |
| Body-worn              | Rear          | 0.368                              | 0.295                 |                       | 0.663                   | No             |
|                        | Front         | 0.222                              | 0.028                 |                       | 0.250                   | No             |
|                        | Edge 2        | 0.263                              | 0.173                 |                       | 0.436                   | No             |
|                        | Rear          | 0.368                              |                       | 0.025                 | 0.393                   | No             |
|                        | Front         | 0.222                              |                       | 0.128                 | 0.350                   | No             |
|                        | Edge 2        | 0.263                              |                       | 0.025                 | 0.288                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 38 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 38                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.413                              | 0.659                 |                       | 1.072                   | No             |
|                        | Left Tilt     | 0.102                              | 0.296                 |                       | 0.398                   | No             |
|                        | Right Touch   | 0.314                              | 0.341                 |                       | 0.655                   | No             |
|                        | Right Tilt    | 0.104                              | 0.286                 |                       | 0.390                   | No             |
| Head                   | Left Touch    | 0.413                              |                       | 0.186                 | 0.599                   | No             |
|                        | Left Tilt     | 0.102                              |                       | 0.186                 | 0.288                   | No             |
|                        | Right Touch   | 0.314                              |                       | 0.186                 | 0.500                   | No             |
|                        | Right Tilt    | 0.104                              |                       | 0.186                 | 0.290                   | No             |
| Body-worn              | Rear          | 0.950                              | 0.203                 |                       | 1.153                   | No             |
|                        | Front         | 0.319                              | 0.177                 |                       | 0.496                   | No             |
|                        | Edge 2        | 0.124                              | 0.174                 |                       | 0.298                   | No             |
|                        | Rear          | 0.950                              |                       | 0.096                 | 1.046                   | No             |
|                        | Front         | 0.319                              |                       | 0.096                 | 0.415                   | No             |
|                        | Edge 2        | 0.124                              |                       | 0.096                 | 0.220                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 38                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.413                              | 0.158                 |                       | 0.571                   | No             |
|                        | Left Tilt     | 0.102                              | 0.094                 |                       | 0.196                   | No             |
|                        | Right Touch   | 0.314                              | 0.054                 |                       | 0.368                   | No             |
|                        | Right Tilt    | 0.104                              | 0.066                 |                       | 0.170                   | No             |
| Head                   | Left Touch    | 0.413                              |                       | 0.023                 | 0.436                   | No             |
|                        | Left Tilt     | 0.102                              |                       | 0.016                 | 0.118                   | No             |
|                        | Right Touch   | 0.314                              |                       | 0.053                 | 0.367                   | No             |
|                        | Right Tilt    | 0.104                              |                       | 0.050                 | 0.154                   | No             |
| Body-worn              | Rear          | 0.950                              | 0.295                 |                       | 1.245                   | No             |
|                        | Front         | 0.319                              | 0.028                 |                       | 0.347                   | No             |
|                        | Edge 2        | 0.124                              | 0.173                 |                       | 0.297                   | No             |
|                        | Rear          | 0.950                              |                       | 0.025                 | 0.975                   | No             |
|                        | Front         | 0.319                              |                       | 0.128                 | 0.447                   | No             |
|                        | Edge 2        | 0.124                              |                       | 0.025                 | 0.149                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 40- Lower Side &Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 40-Lower Side             | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.234                              | 0.659                 |                       | 0.893                   | No             |
|                        | Left Tilt     | 0.066                              | 0.296                 |                       | 0.362                   | No             |
|                        | Right Touch   | 0.201                              | 0.341                 |                       | 0.542                   | No             |
|                        | Right Tilt    | 0.066                              | 0.286                 |                       | 0.352                   | No             |
| Head                   | Left Touch    | 0.234                              |                       | 0.186                 | 0.420                   | No             |
|                        | Left Tilt     | 0.066                              |                       | 0.186                 | 0.252                   | No             |
|                        | Right Touch   | 0.201                              |                       | 0.186                 | 0.387                   | No             |
|                        | Right Tilt    | 0.066                              |                       | 0.186                 | 0.252                   | No             |
| Body-worn              | Rear          | 0.762                              | 0.203                 |                       | 0.965                   | No             |
|                        | Front         | 0.167                              | 0.177                 |                       | 0.344                   | No             |
|                        | Edge 2        | 0.087                              | 0.174                 |                       | 0.261                   | No             |
|                        | Rear          | 0.762                              |                       | 0.096                 | 0.858                   | No             |
|                        | Front         | 0.167                              |                       | 0.096                 | 0.263                   | No             |
|                        | Edge 2        | 0.087                              |                       | 0.096                 | 0.183                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 40-Lower Side             | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.234                              | 0.158                 |                       | 0.392                   | No             |
|                        | Left Tilt     | 0.066                              | 0.094                 |                       | 0.160                   | No             |
|                        | Right Touch   | 0.201                              | 0.054                 |                       | 0.255                   | No             |
|                        | Right Tilt    | 0.066                              | 0.066                 |                       | 0.132                   | No             |
| Head                   | Left Touch    | 0.234                              |                       | 0.023                 | 0.257                   | No             |
|                        | Left Tilt     | 0.066                              |                       | 0.016                 | 0.082                   | No             |
|                        | Right Touch   | 0.201                              |                       | 0.053                 | 0.254                   | No             |
|                        | Right Tilt    | 0.066                              |                       | 0.050                 | 0.116                   | No             |
| Body-worn              | Rear          | 0.762                              | 0.295                 |                       | 1.057                   | No             |
|                        | Front         | 0.167                              | 0.028                 |                       | 0.195                   | No             |
|                        | Edge 2        | 0.087                              | 0.173                 |                       | 0.260                   | No             |
|                        | Rear          | 0.762                              |                       | 0.025                 | 0.787                   | No             |
|                        | Front         | 0.167                              |                       | 0.128                 | 0.295                   | No             |
|                        | Edge 2        | 0.087                              |                       | 0.025                 | 0.112                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Sum of the SAR for LTE Band 40- Upper Side & Wi-Fi & BT:**

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 40- Upper Side            | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.207                              | 0.659                 |                       | 0.866                   | No             |
|                        | Left Tilt     | 0.084                              | 0.296                 |                       | 0.380                   | No             |
|                        | Right Touch   | 0.169                              | 0.341                 |                       | 0.510                   | No             |
|                        | Right Tilt    | 0.050                              | 0.286                 |                       | 0.336                   | No             |
| Head                   | Left Touch    | 0.207                              |                       | 0.186                 | 0.393                   | No             |
|                        | Left Tilt     | 0.084                              |                       | 0.186                 | 0.270                   | No             |
|                        | Right Touch   | 0.169                              |                       | 0.186                 | 0.355                   | No             |
|                        | Right Tilt    | 0.050                              |                       | 0.186                 | 0.236                   | No             |
| Body-worn              | Rear          | 0.686                              | 0.203                 |                       | 0.889                   | No             |
|                        | Front         | 0.189                              | 0.177                 |                       | 0.366                   | No             |
|                        | Edge 2        | 0.065                              | 0.174                 |                       | 0.239                   | No             |
|                        | Rear          | 0.686                              |                       | 0.096                 | 0.782                   | No             |
|                        | Front         | 0.189                              |                       | 0.096                 | 0.285                   | No             |
|                        | Edge 2        | 0.065                              |                       | 0.096                 | 0.161                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 40- Upper Side            | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.207                              | 0.158                 |                       | 0.365                   | No             |
|                        | Left Tilt     | 0.084                              | 0.094                 |                       | 0.178                   | No             |
|                        | Right Touch   | 0.169                              | 0.054                 |                       | 0.223                   | No             |
|                        | Right Tilt    | 0.050                              | 0.066                 |                       | 0.116                   | No             |
| Head                   | Left Touch    | 0.207                              |                       | 0.023                 | 0.230                   | No             |
|                        | Left Tilt     | 0.084                              |                       | 0.016                 | 0.100                   | No             |
|                        | Right Touch   | 0.169                              |                       | 0.053                 | 0.222                   | No             |
|                        | Right Tilt    | 0.050                              |                       | 0.050                 | 0.100                   | No             |
| Body-worn              | Rear          | 0.686                              | 0.295                 |                       | 0.981                   | No             |
|                        | Front         | 0.189                              | 0.028                 |                       | 0.217                   | No             |
|                        | Edge 2        | 0.065                              | 0.173                 |                       | 0.238                   | No             |
|                        | Rear          | 0.686                              |                       | 0.025                 | 0.711                   | No             |
|                        | Front         | 0.189                              |                       | 0.128                 | 0.317                   | No             |
|                        | Edge 2        | 0.065                              |                       | 0.025                 | 0.090                   | No             |

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 41 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 41                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.331                              | 0.659                 |                       | 0.990                   | No             |
|                        | Left Tilt     | 0.069                              | 0.296                 |                       | 0.365                   | No             |
|                        | Right Touch   | 0.390                              | 0.341                 |                       | 0.731                   | No             |
|                        | Right Tilt    | 0.109                              | 0.286                 |                       | 0.395                   | No             |
| Head                   | Left Touch    | 0.331                              |                       | 0.186                 | 0.517                   | No             |
|                        | Left Tilt     | 0.069                              |                       | 0.186                 | 0.255                   | No             |
|                        | Right Touch   | 0.390                              |                       | 0.186                 | 0.576                   | No             |
|                        | Right Tilt    | 0.109                              |                       | 0.186                 | 0.295                   | No             |
| Body-worn              | Rear          | 1.167                              | 0.203                 |                       | 1.370                   | No             |
|                        | Front         | 0.275                              | 0.177                 |                       | 0.452                   | No             |
|                        | Edge 2        | 0.147                              | 0.174                 |                       | 0.321                   | No             |
|                        | Rear          | 1.167                              |                       | 0.096                 | 1.263                   | No             |
|                        | Front         | 0.275                              |                       | 0.096                 | 0.371                   | No             |
|                        | Edge 2        | 0.147                              |                       | 0.096                 | 0.243                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 41                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.331                              | 0.158                 |                       | 0.489                   | No             |
|                        | Left Tilt     | 0.069                              | 0.094                 |                       | 0.163                   | No             |
|                        | Right Touch   | 0.390                              | 0.054                 |                       | 0.444                   | No             |
|                        | Right Tilt    | 0.109                              | 0.066                 |                       | 0.175                   | No             |
| Head                   | Left Touch    | 0.331                              |                       | 0.023                 | 0.354                   | No             |
|                        | Left Tilt     | 0.069                              |                       | 0.016                 | 0.085                   | No             |
|                        | Right Touch   | 0.390                              |                       | 0.053                 | 0.443                   | No             |
|                        | Right Tilt    | 0.109                              |                       | 0.050                 | 0.159                   | No             |
| Body-worn              | Rear          | 1.167                              | 0.295                 |                       | 1.462                   | No             |
|                        | Front         | 0.275                              | 0.028                 |                       | 0.303                   | No             |
|                        | Edge 2        | 0.147                              | 0.173                 |                       | 0.320                   | No             |
|                        | Rear          | 1.167                              |                       | 0.025                 | 1.192                   | No             |
|                        | Front         | 0.275                              |                       | 0.128                 | 0.403                   | No             |
|                        | Edge 2        | 0.147                              |                       | 0.025                 | 0.172                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 66 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 66                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.488                              | 0.659                 |                       | 1.147                   | No             |
|                        | Left Tilt     | 0.169                              | 0.296                 |                       | 0.465                   | No             |
|                        | Right Touch   | 0.265                              | 0.341                 |                       | 0.606                   | No             |
|                        | Right Tilt    | 0.154                              | 0.286                 |                       | 0.440                   | No             |
| Head                   | Left Touch    | 0.488                              |                       | 0.186                 | 0.674                   | No             |
|                        | Left Tilt     | 0.169                              |                       | 0.186                 | 0.355                   | No             |
|                        | Right Touch   | 0.265                              |                       | 0.186                 | 0.451                   | No             |
|                        | Right Tilt    | 0.154                              |                       | 0.186                 | 0.340                   | No             |
| Body-worn              | Rear          | 1.054                              | 0.203                 |                       | 1.257                   | No             |
|                        | Front         | 0.551                              | 0.177                 |                       | 0.728                   | No             |
|                        | Edge 2        | 0.104                              | 0.174                 |                       | 0.278                   | No             |
|                        | Rear          | 1.054                              |                       | 0.096                 | 1.150                   | No             |
|                        | Front         | 0.551                              |                       | 0.096                 | 0.647                   | No             |
|                        | Edge 2        | 0.104                              |                       | 0.096                 | 0.200                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 66                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.488                              | 0.158                 |                       | 0.646                   | No             |
|                        | Left Tilt     | 0.169                              | 0.094                 |                       | 0.263                   | No             |
|                        | Right Touch   | 0.265                              | 0.054                 |                       | 0.319                   | No             |
|                        | Right Tilt    | 0.154                              | 0.066                 |                       | 0.220                   | No             |
| Head                   | Left Touch    | 0.488                              |                       | 0.023                 | 0.511                   | No             |
|                        | Left Tilt     | 0.169                              |                       | 0.016                 | 0.185                   | No             |
|                        | Right Touch   | 0.265                              |                       | 0.053                 | 0.318                   | No             |
|                        | Right Tilt    | 0.154                              |                       | 0.050                 | 0.204                   | No             |
| Body-worn              | Rear          | 1.054                              | 0.295                 |                       | 1.349                   | No             |
|                        | Front         | 0.551                              | 0.028                 |                       | 0.579                   | No             |
|                        | Edge 2        | 0.104                              | 0.173                 |                       | 0.277                   | No             |
|                        | Rear          | 1.054                              |                       | 0.025                 | 1.079                   | No             |
|                        | Front         | 0.551                              |                       | 0.128                 | 0.679                   | No             |
|                        | Edge 2        | 0.104                              |                       | 0.025                 | 0.129                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



### Sum of the SAR for LTE Band 71 & Wi-Fi & BT:

| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|------------------------|---------------|------------------------------------|-----------------------|-----------------------|-------------------------|----------------|
|                        |               | LTE Band 71                        | 2.4GHz Wi-Fi DTS Band | Bluetooth             |                         |                |
| Head                   | Left Touch    | 0.097                              | 0.659                 |                       | 0.756                   | No             |
|                        | Left Tilt     | 0.049                              | 0.296                 |                       | 0.345                   | No             |
|                        | Right Touch   | 0.106                              | 0.341                 |                       | 0.447                   | No             |
|                        | Right Tilt    | 0.059                              | 0.286                 |                       | 0.345                   | No             |
| Head                   | Left Touch    | 0.097                              |                       | 0.186                 | 0.283                   | No             |
|                        | Left Tilt     | 0.049                              |                       | 0.186                 | 0.235                   | No             |
|                        | Right Touch   | 0.106                              |                       | 0.186                 | 0.292                   | No             |
|                        | Right Tilt    | 0.059                              |                       | 0.186                 | 0.245                   | No             |
| Body-worn              | Rear          | 0.183                              | 0.203                 |                       | 0.386                   | No             |
|                        | Front         | 0.086                              | 0.177                 |                       | 0.263                   | No             |
|                        | Edge 2        | 0.114                              | 0.174                 |                       | 0.288                   | No             |
|                        | Rear          | 0.183                              |                       | 0.096                 | 0.279                   | No             |
|                        | Front         | 0.086                              |                       | 0.096                 | 0.182                   | No             |
|                        | Edge 2        | 0.114                              |                       | 0.096                 | 0.210                   | No             |
| RF Exposure Conditions | Test Position | Simultaneous Transmission Scenario |                       |                       | $\Sigma$ 1-g SAR (W/kg) | SPLSR (Yes/No) |
|                        |               | LTE Band 71                        | 5.2GHz Wi-Fi DTS Band | 5.8GHz Wi-Fi DTS Band |                         |                |
| Head                   | Left Touch    | 0.097                              | 0.158                 |                       | 0.255                   | No             |
|                        | Left Tilt     | 0.049                              | 0.094                 |                       | 0.143                   | No             |
|                        | Right Touch   | 0.106                              | 0.054                 |                       | 0.160                   | No             |
|                        | Right Tilt    | 0.059                              | 0.066                 |                       | 0.125                   | No             |
| Head                   | Left Touch    | 0.097                              |                       | 0.023                 | 0.120                   | No             |
|                        | Left Tilt     | 0.049                              |                       | 0.016                 | 0.065                   | No             |
|                        | Right Touch   | 0.106                              |                       | 0.053                 | 0.159                   | No             |
|                        | Right Tilt    | 0.059                              |                       | 0.050                 | 0.109                   | No             |
| Body-worn              | Rear          | 0.183                              | 0.295                 |                       | 0.478                   | No             |
|                        | Front         | 0.086                              | 0.028                 |                       | 0.114                   | No             |
|                        | Edge 2        | 0.114                              | 0.173                 |                       | 0.287                   | No             |
|                        | Rear          | 0.183                              |                       | 0.025                 | 0.208                   | No             |
|                        | Front         | 0.086                              |                       | 0.128                 | 0.214                   | No             |
|                        | Edge 2        | 0.114                              |                       | 0.025                 | 0.139                   | No             |

### Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



## APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab  
System Check Head 750MHz  
DUT: Dipole 750 MHz Type: SID 750

Date: Jul. 11, 2021

Communication System: CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1;  
Frequency: 750 MHz; Medium parameters used:  $f = 750\text{MHz}$ ;  $\sigma = 0.88\text{ mho/m}$ ;  $\epsilon_r = 41.52$ ;  $\rho = 1000\text{ kg/m}^3$ ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

### DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29, 2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17, 2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 750MHz/Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.560 W/kg


**Configuration/System Check 750MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.346 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.798 W/kg

**SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.336 W/kg**

Maximum value of SAR (measured) = 0.598 W/kg

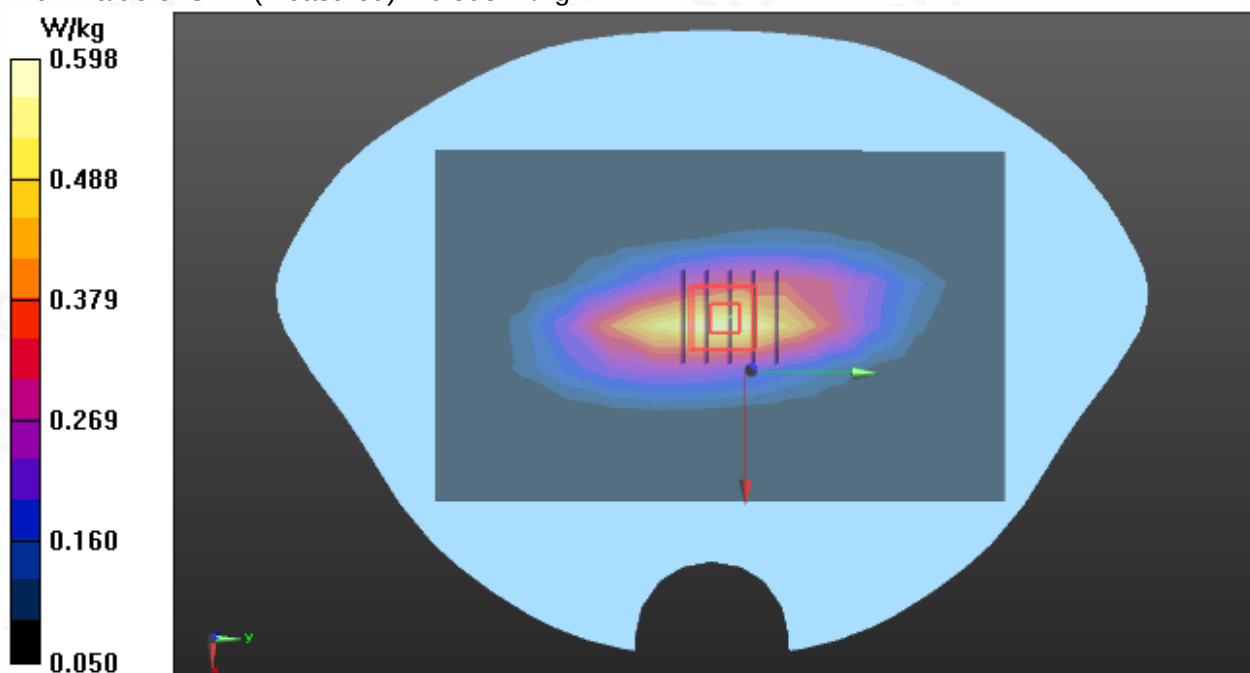

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 750MHz**  
**DUT: Dipole 750 MHz Type: SID 750**

**Date: Jul. 12,2021**

Communication System: CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1;  
Frequency: 750 MHz; Medium parameters used:  $f = 750\text{MHz}$ ;  $\sigma = 0.88 \text{ mho/m}$ ;  $\epsilon_r = 44.28$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 21.7, Liquid temperature ( $^{\circ}\text{C}$ ): 21.5

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 750MHz/Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.621 W/kg


**Configuration/System Check 750MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  
 $dz=5\text{mm}$

Reference Value = 24.053 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.843 W/kg

**SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.331 W/kg**

Maximum value of SAR (measured) = 0.630 W/kg

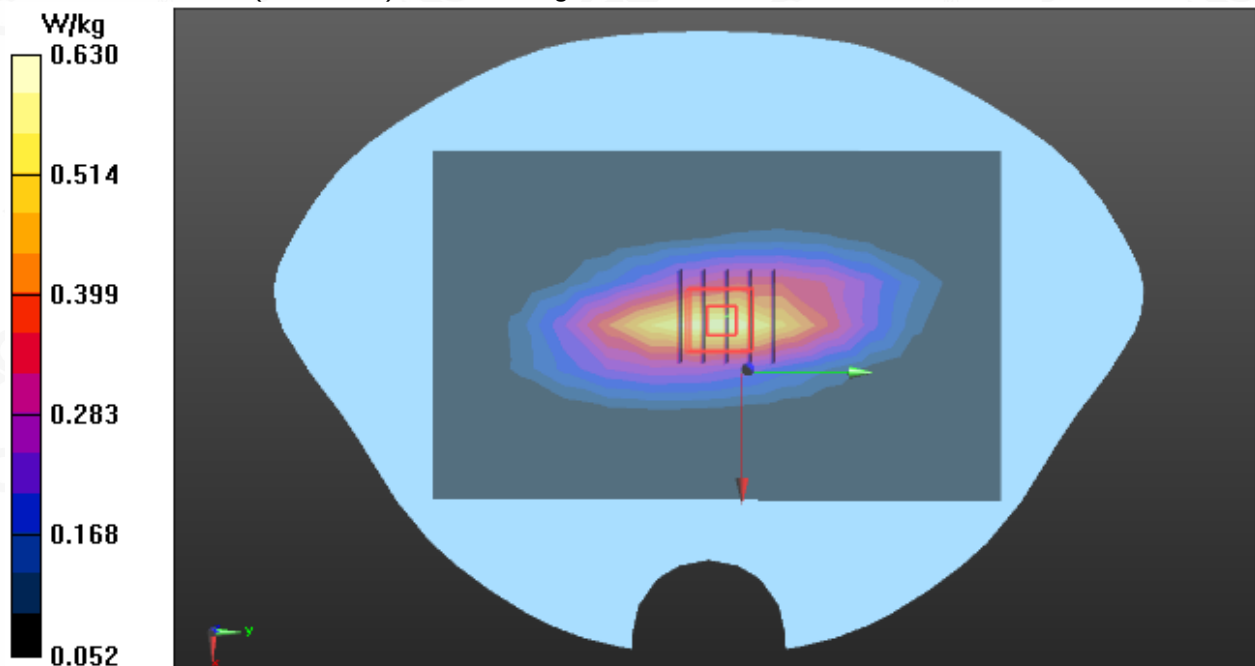

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**  
**DUT: Dipole 835 MHz    Type: SID 835**

**Date: Jul. 14,2021**

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1;  
Frequency: 835 MHz; Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 42.07$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ):22.2, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 835MHz/Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.760 W/kg


**Configuration/System Check 835MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  
 $dz=5\text{mm}$

Reference Value = 29.423 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.384 W/kg**

Maximum value of SAR (measured) = 0.791 W/kg

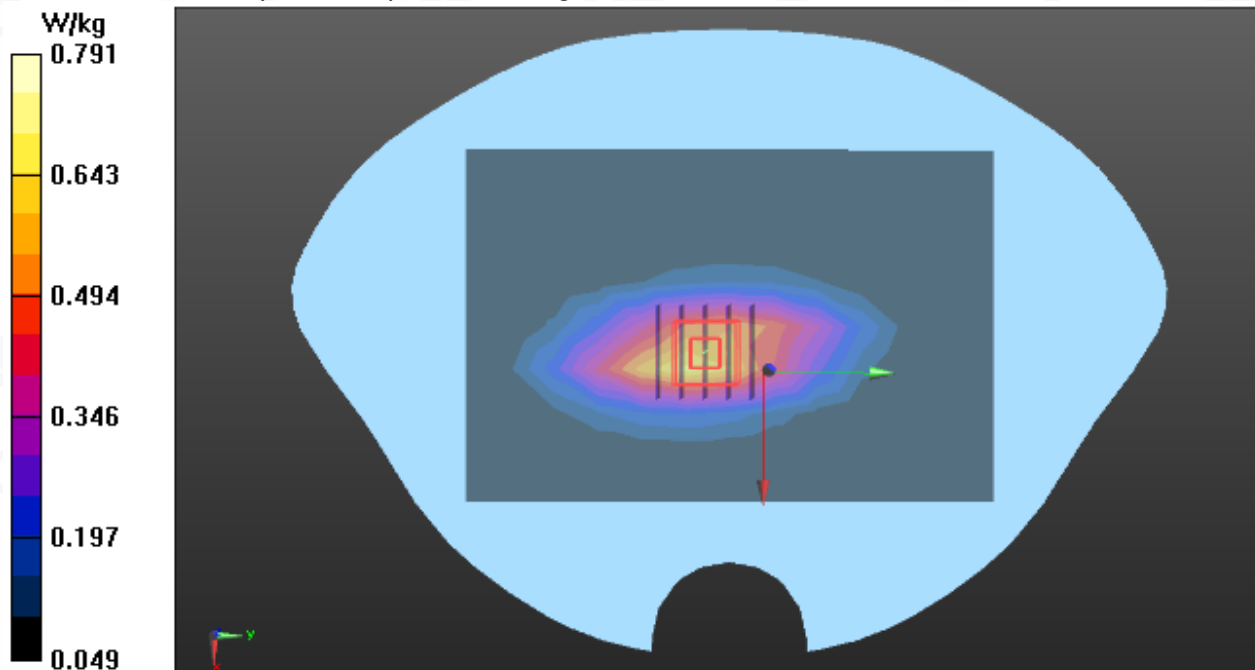

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**  
**DUT: Dipole 835 MHz Type: SID 835**

**Date: Jul. 09,2021**

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1;  
Frequency: 835 MHz; Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.92 \text{ mho/m}$ ;  $\epsilon_r = 41.81$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 21.8, Liquid temperature ( $^{\circ}\text{C}$ ): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 835MHz/Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.810 W/kg


**Configuration/System Check 835MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 28.187 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.386 W/kg**

Maximum value of SAR (measured) = 0.814 W/kg

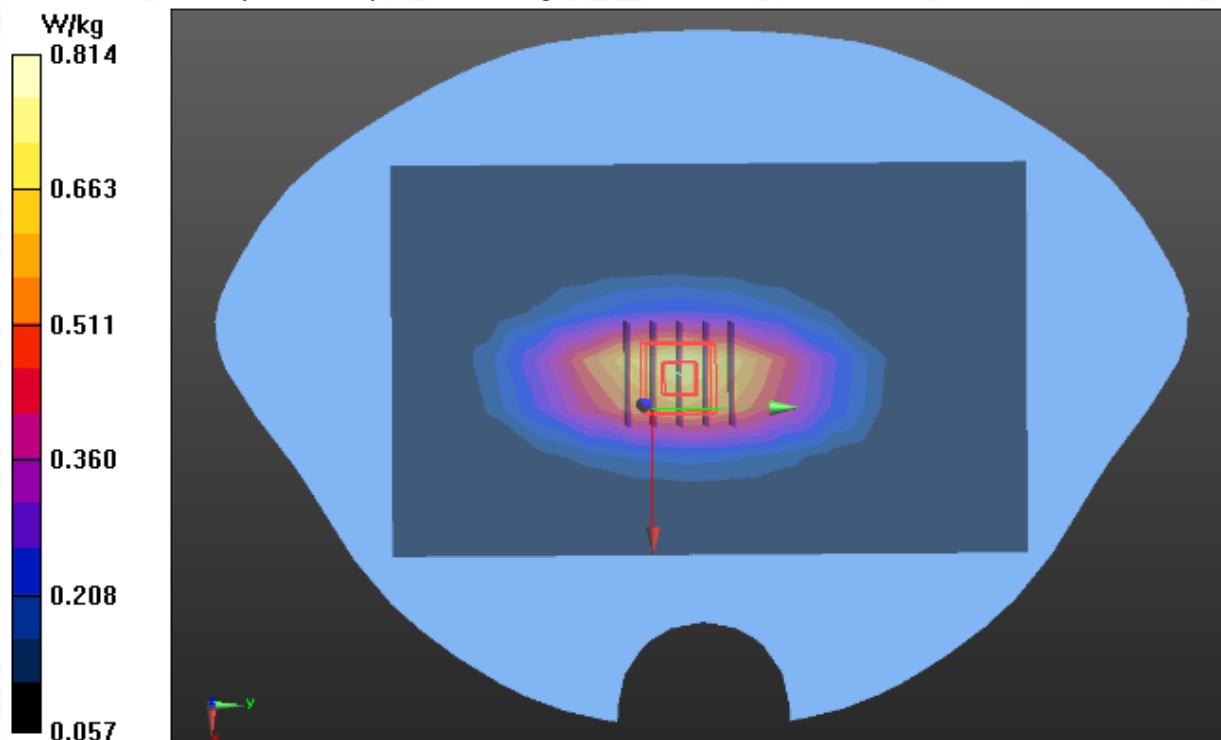

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1750MHz**  
**DUT: Dipole 1800 MHz; Type: SID 1800**

**Date: Jul. 22,2021**

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle: 1:1;  
Frequency: 1750 MHz; Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.81$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.4

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.61, 8.61, 8.61); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check Head 1750MHz/Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 2.91 W/kg


**Configuration/System Check Head 1750MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.682 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.37 W/kg

**SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.19 W/kg**

Maximum value of SAR (measured) = 3.07 W/kg

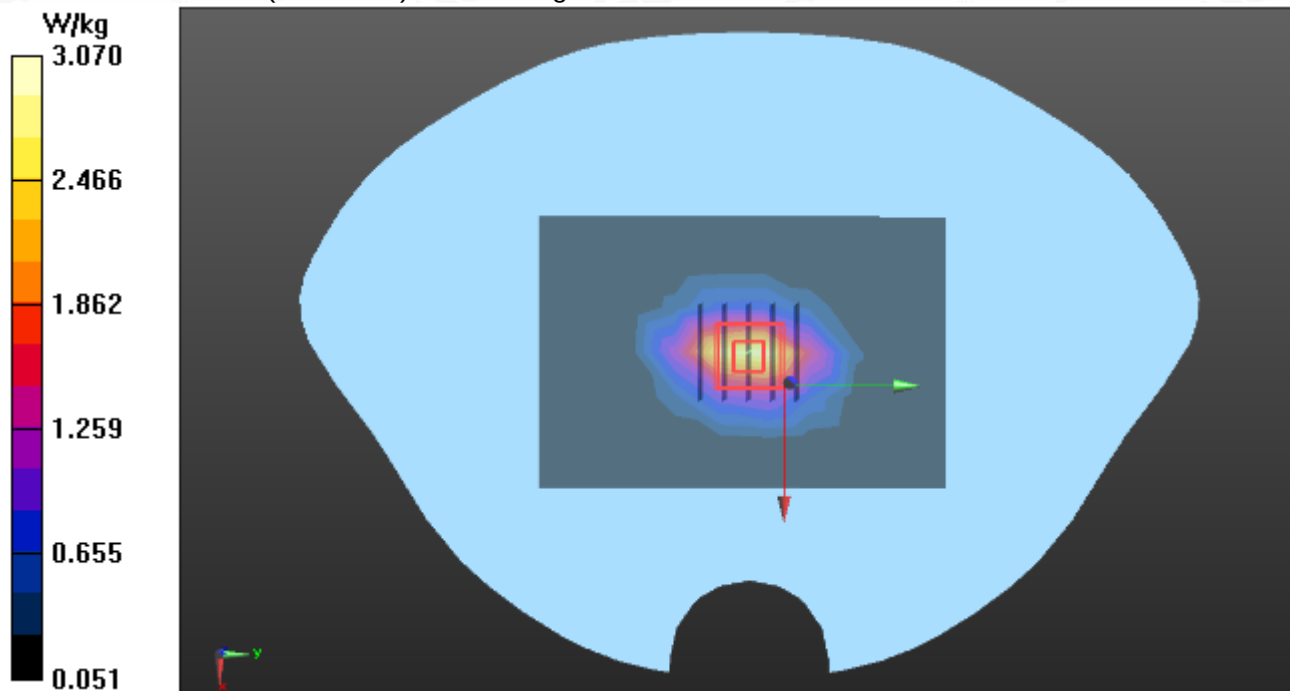

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**System Check Head 1750MHz**  
**DUT: Dipole 1800 MHz; Type: SID 1800**

**Date: Jul. 08,2021**

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle: 1:1;  
Frequency: 1750 MHz; Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.28$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.61, 8.61, 8.61); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0$ , 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check Head 1750MHz/Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 2.93 W/kg


**Configuration/System Check Head 1750MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.918 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 4.59 W/kg

**SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.25 W/kg**

Maximum value of SAR (measured) = 3.14 W/kg

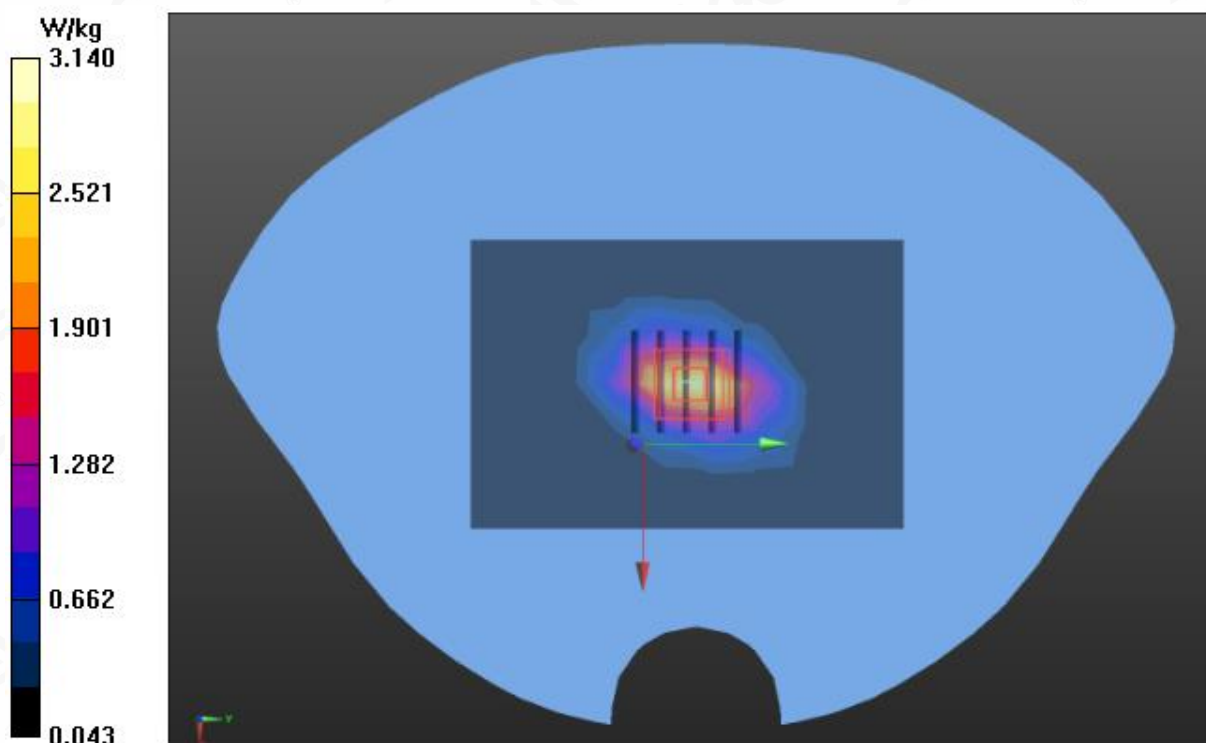

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**  
**DUT: Dipole 1900 MHz; Type: SID 1900**

**Date: Jul. 13,2021**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1;  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 39.57$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check Head 1900MHz/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 2.91 W/kg


**Configuration/System Check Head 1900MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.601 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 5.26 W/kg

**SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 3.51 W/kg

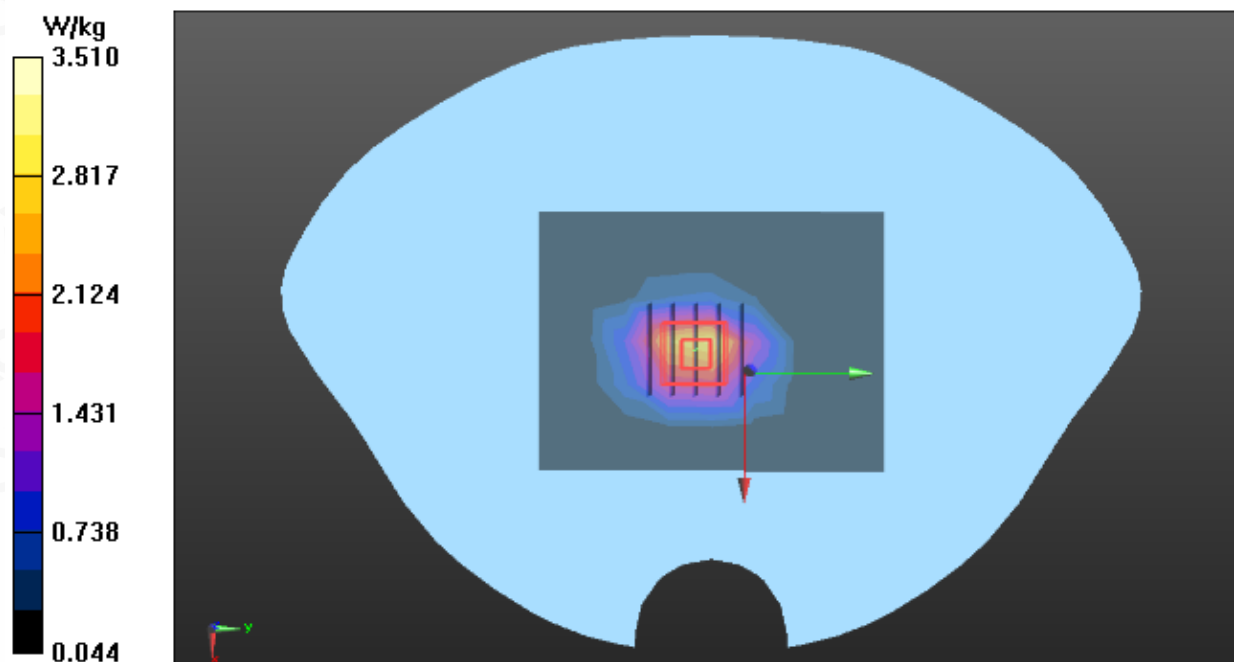

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**  
**DUT: Dipole 1900 MHz; Type: SID 1900**

**Date: Jul. 10,2021**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1;  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.42 \text{ mho/m}$ ;  $\epsilon_r = 39.61$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.8

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check Head 1900MHz/Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 2.79 W/kg


**Configuration/System Check Head 1900MHz/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 47.257 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 4.25 W/kg

**SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.29 W/kg**

Maximum value of SAR (measured) = 2.98 W/kg

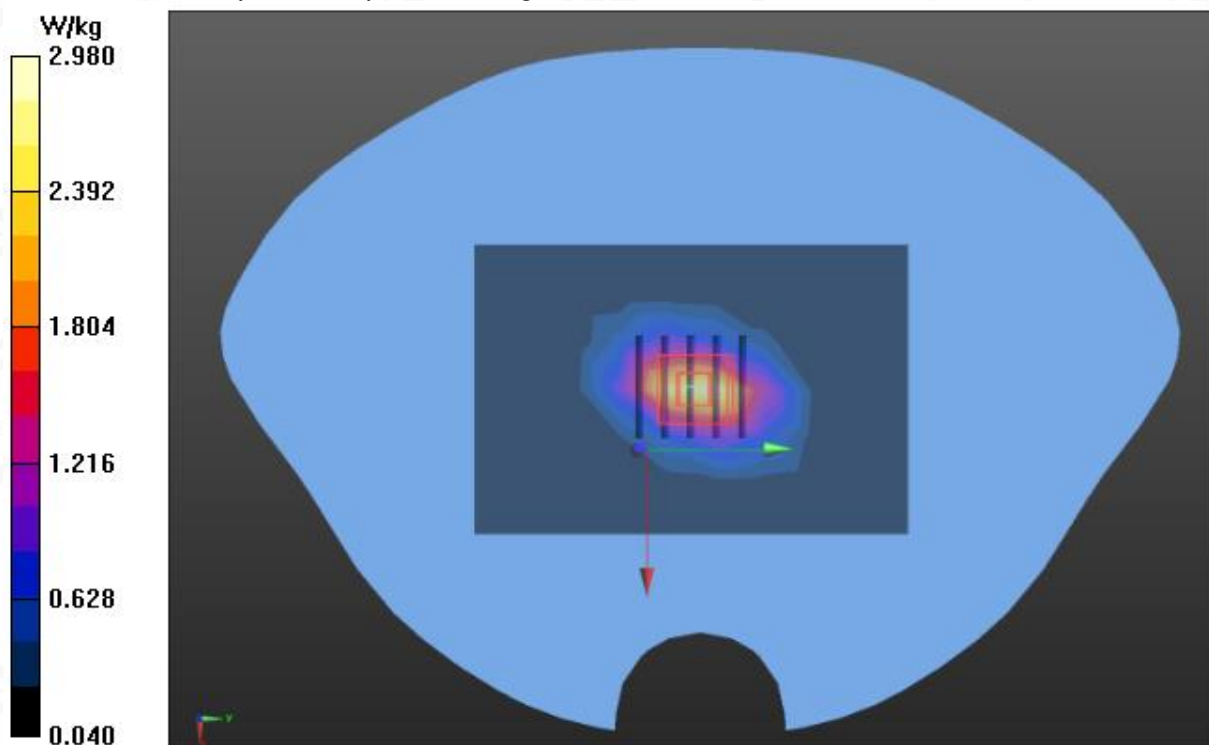

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 2300 MHz**  
**DUT: Dipole 2300 MHz    Type: SID 2300**

**Date: Jul. 15,2021**

Communication System CW; Communication System Band: D2300 (2300.0 MHz); Duty Cycle: 1:1;  
Frequency: 2300 MHz; Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.66$  mho/m;  $\epsilon_r = 39.27$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(7.85, 7.85, 7.85); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 2300MHz Head/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 4.08 W/kg


**Configuration/System Check 2300MHz Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.424 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 6.24 W/kg

**SAR(1 g) = 3.07 W/kg; SAR(10 g) = 1.49 W/kg**

Maximum value of SAR (measured) = 4.50 W/kg

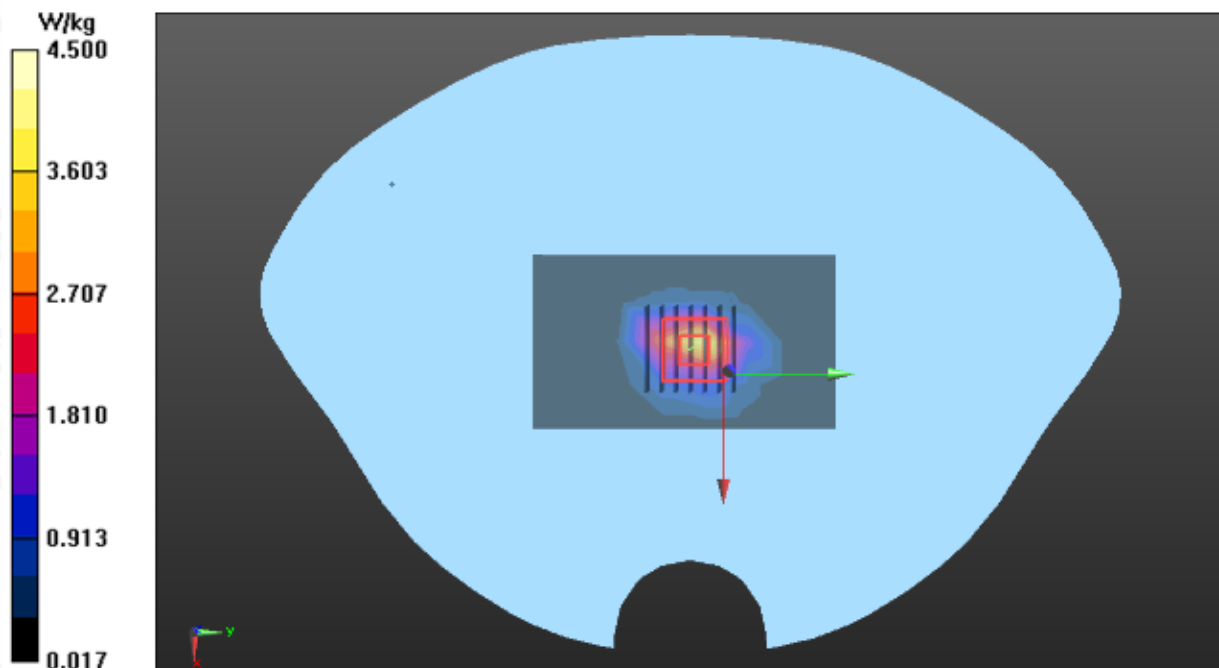

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**System Check Head 2450 MHz**  
**DUT: Dipole 2450 MHz    Type: D2450V2**

**Date: Jul. 18,2021**

Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1;  
Frequency: 2450 MHz; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.79$  mho/m;  $\epsilon_r = 38.43$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.5

**DASY Configuration:**

- Probe: EX3DV4 – SN:3953; ConvF(7.66, 7.66, 7.66); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check Head 2450Hz/Area Scan (5x8x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 4.45 W/kg



**Configuration/System Check Head 2450Hz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 51.170 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 7.22 W/kg

**SAR(1 g) = 3.19 W/kg; SAR(10 g) = 1.48 W/kg**

Maximum value of SAR (measured) = 5.06 W/kg

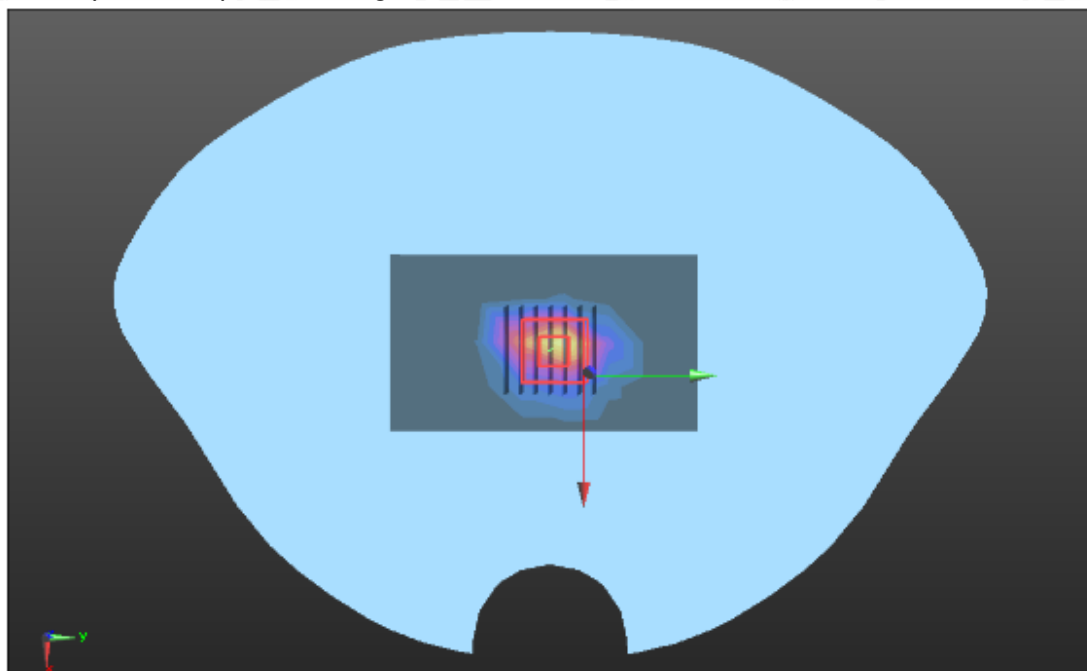

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**System Check Head 2600 MHz**  
**DUT: Dipole 2600 MHz; Type: SID 2600**

**Date: Jul. 19,2021**

Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1;  
Frequency: 2600 MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.92$  mho/m;  $\epsilon_r = 38.54$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(7.45, 7.45, 7.45); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0$ , 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check Head 2600Hz/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 4.43 W/kg


**Configuration/System Check Head 2600Hz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.208 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 7.16 W/kg

**SAR(1 g) = 3.37 W/kg; SAR(10 g) = 1.53 W/kg**

Maximum value of SAR (measured) = 5.02 W/kg

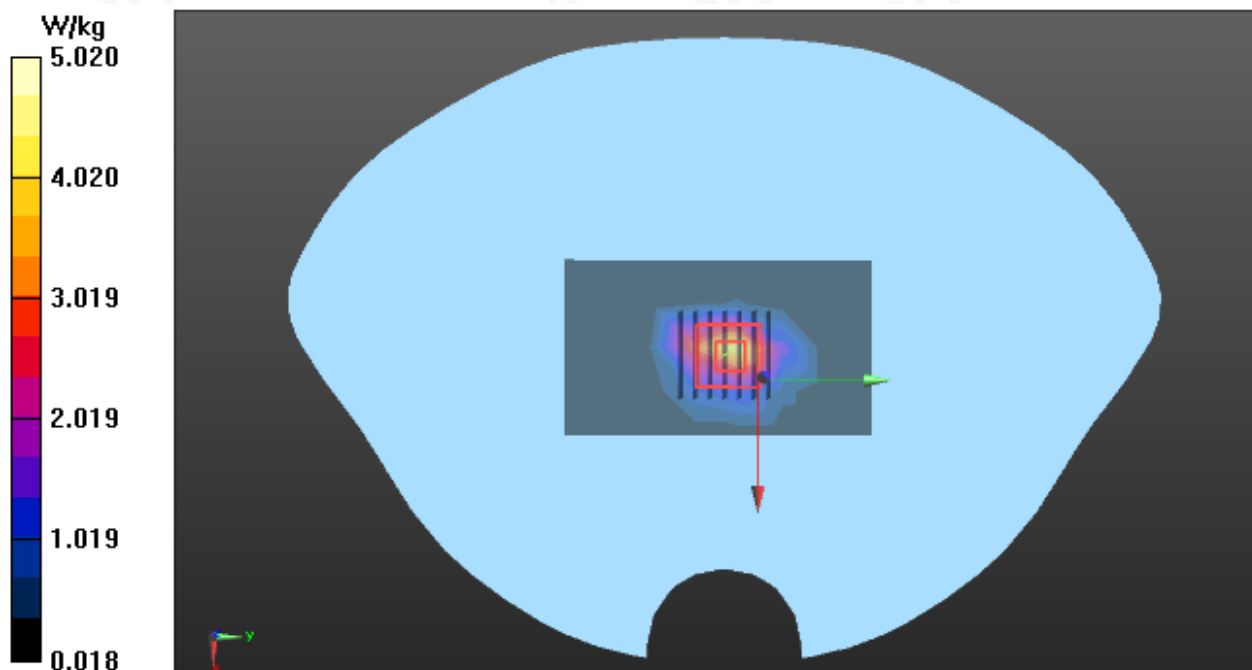

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**System Check Head 5200 MHz**  
**DUT: Dipole 5000MHz Type: SWG5500**

**Date: Jul. 20,2021**

Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;  
Frequency: 5200 MHz; Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.61$  mho/m;  $\epsilon_r = 35.81$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=15dBm  
Ambient temperature (°C): 21.9, Liquid temperature (°C): 21.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(5.53, 5.53, 5.53); Calibrated: Jul. 29,2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0$ , 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 5200MHz Head/Area Scan (10x13x1):**Measurement grid:dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 9.11 W/kg


**Configuration/System Check 5200MHz Head/Zoom Scan (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 27.115 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 4.92 W/kg; SAR(10 g) = 1.74 W/kg**

Maximum value of SAR (measured) = 9.33 W/kg

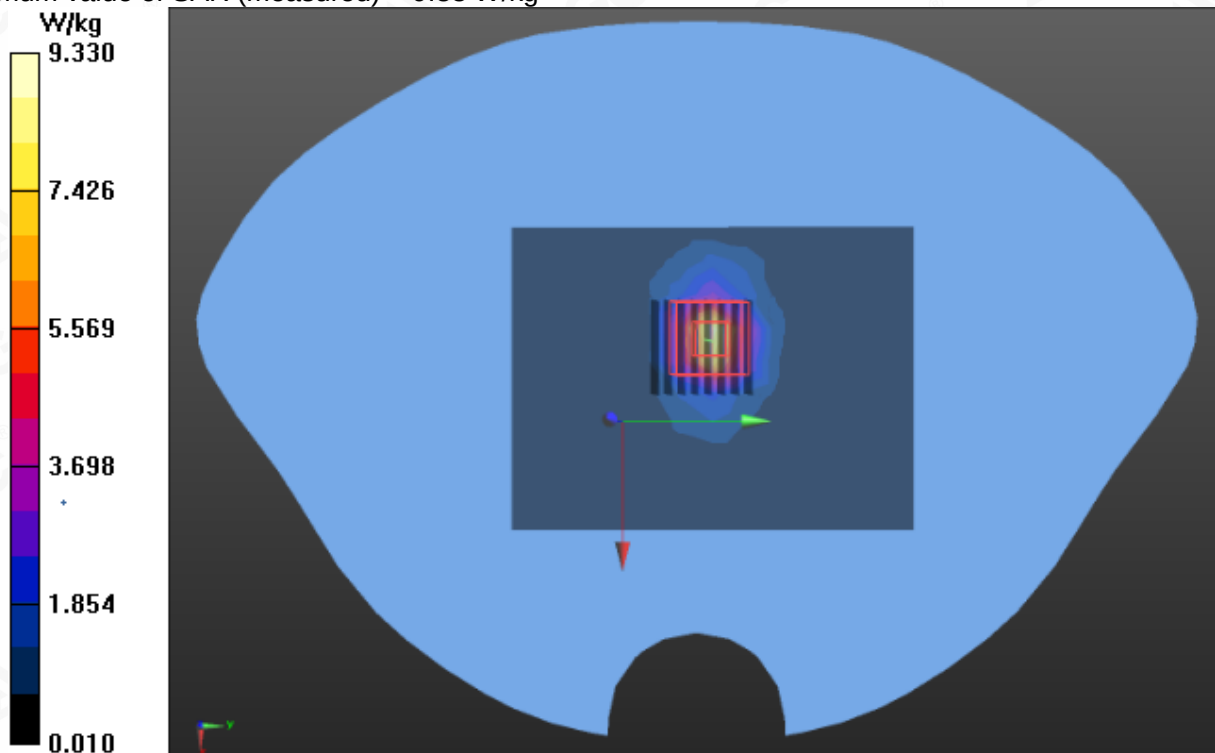

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**System Check Head 5800 MHz**  
**DUT: Dipole 5000MHz Type: SWG5500**

**Date: Jul. 24,2021**

Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1;  
Frequency: 5800 MHz; Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.36$  mho/m;  $\epsilon_r = 36.07$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=15dBm  
Ambient temperature (°C): 21.9 Liquid temperature (°C): 21.7

DASY Configuration:

- Probe: EX3DV4 – SN3953; ConvF(4.99, 4.99, 4.99); Calibrated: Jul. 29,2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0$ , 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Configuration/System Check 5800MHz Head/Area Scan (10x13x1):**Measurement grid:dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 9.88 W/kg


**Configuration/System Check 5800MHz Head/Zoom Scan (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 28.156 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 5.91 W/kg; SAR(10 g) = 1.93 W/kg**

Maximum value of SAR (measured) = 10.8 W/kg

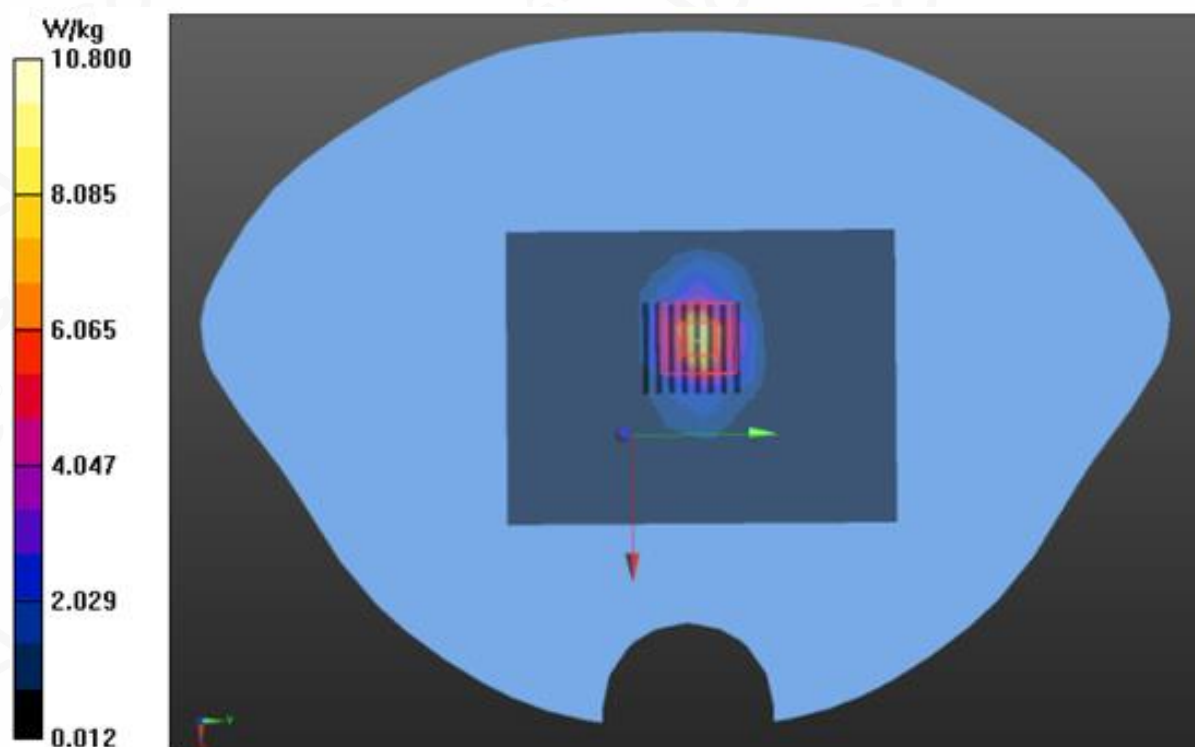

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



## APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab  
GSM 850 Mid-Touch-Left <SIM 1>  
DUT: Smartphone; Type: BS-02

Date: Jul. 14,2021


Communication System: Generic GSM; Communication System Band: GSM 850;Duty Cycle: 1:8.3;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 41.22$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C):22.2, Liquid temperature (°C): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.630 W/kg

**LEFT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.750 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 0.747 W/kg  
**SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.436 W/kg**  
Maximum value of SAR (measured) = 0.652 W/kg

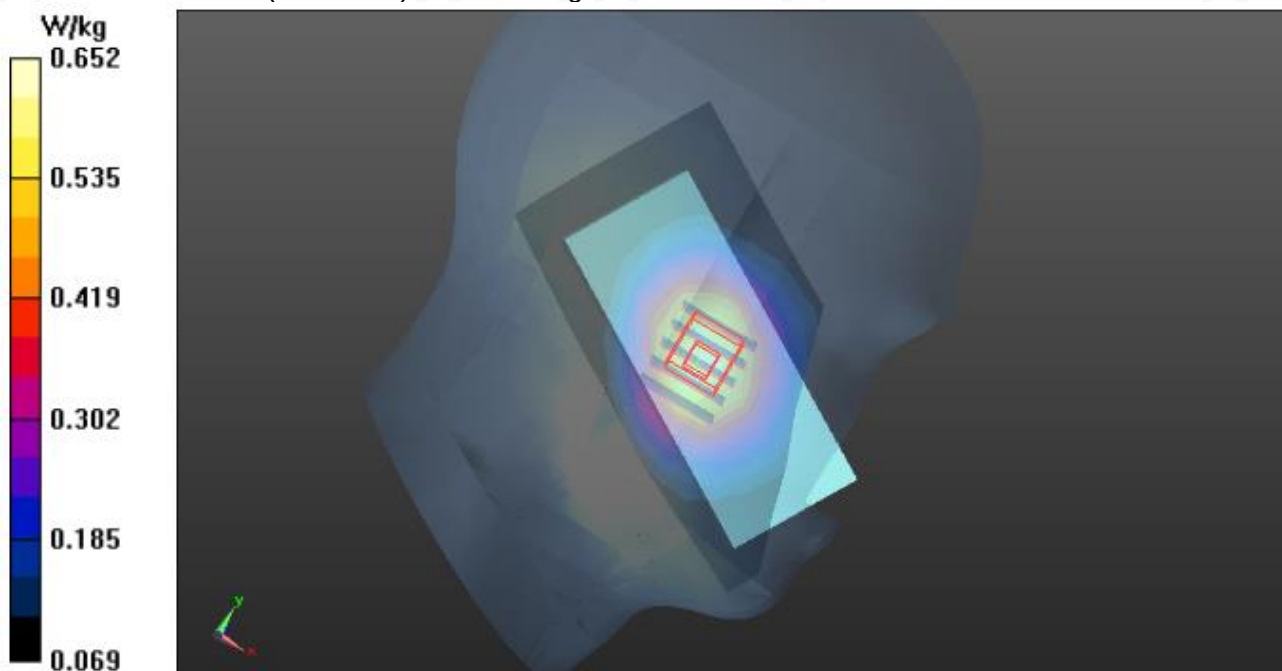

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**GSM 850 High- Body- Back(MS)<SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 14,2021**


Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;  
Frequency: 848.8 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.96$  mho/m;  $\epsilon_r = 40.25$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C):22.2, Liquid temperature (°C): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QDOVA002AA;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK-HIGH/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 1.14 W/kg

**BODY/BACK-HIGH/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 34.479 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.40 W/kg  
**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.771 W/kg**  
Maximum value of SAR (measured) = 1.19 W/kg

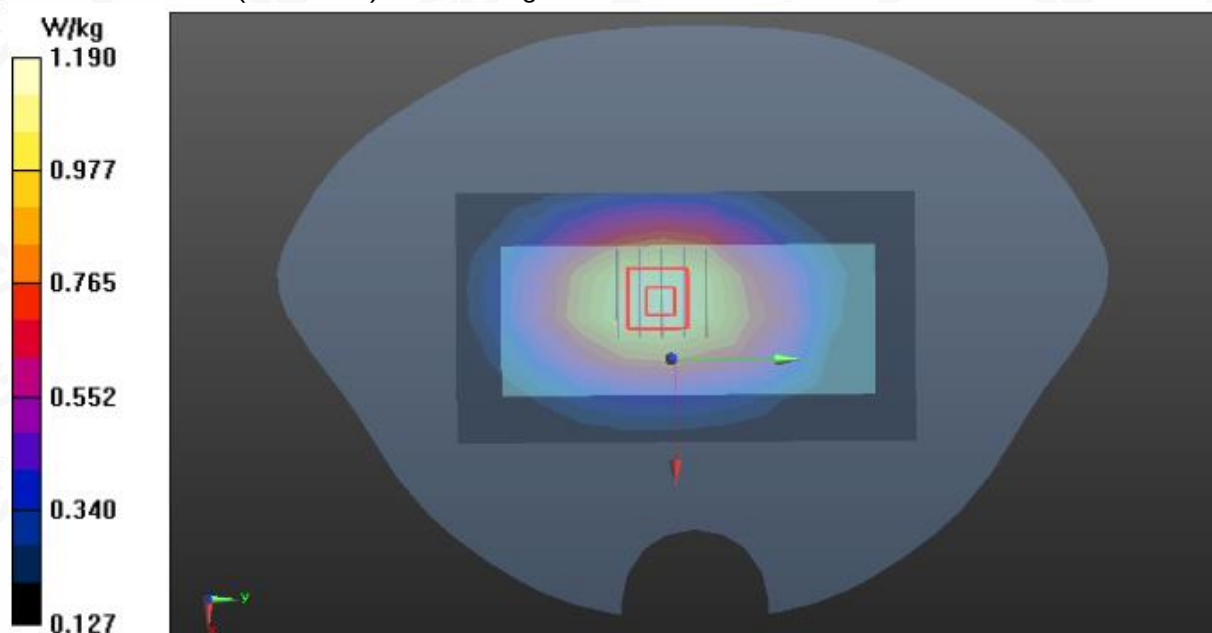

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**GPRS 850 High- Body- Back (2up) < SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 14,2021**


Communication System: GPRS-2 Slot; Communication System Band: GSM 850; Duty Cycle: 1:4.2;  
Frequency: 848.8MHz; Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 40.25$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ):22.2, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QDOVA002AA;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/2ST-BACK-H/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.21 W/kg


**BODY/2ST-BACK-H/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 37.188 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 2.29 W/kg  
**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.793 W/kg**  
Maximum value of SAR (measured) = 1.24 W/kg

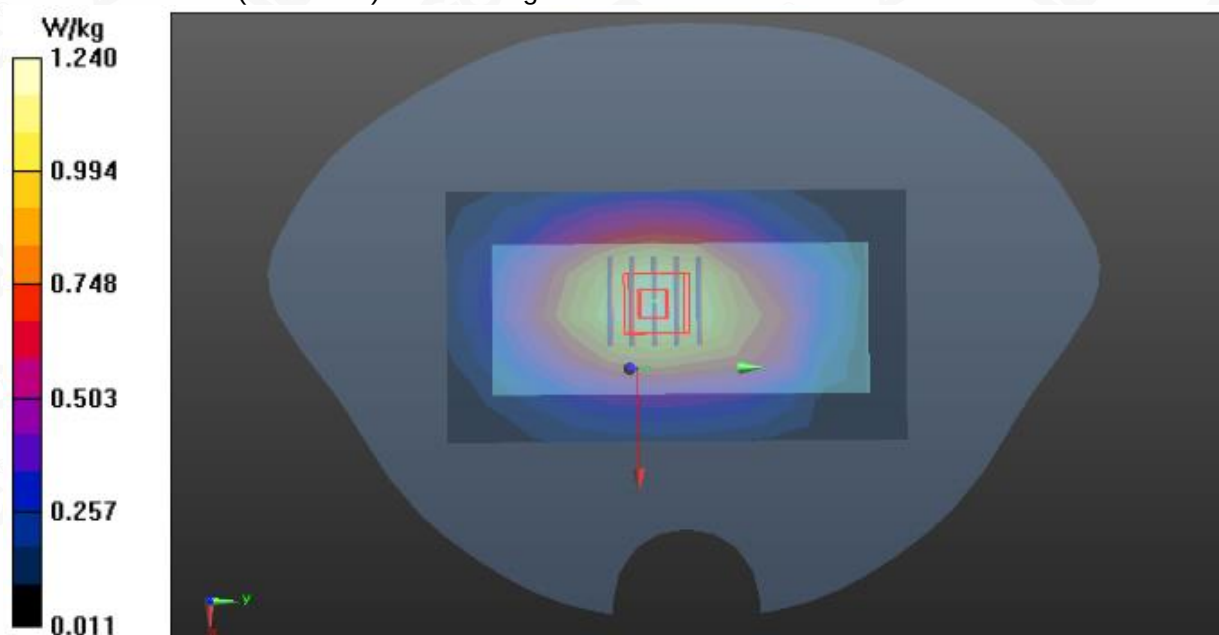

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



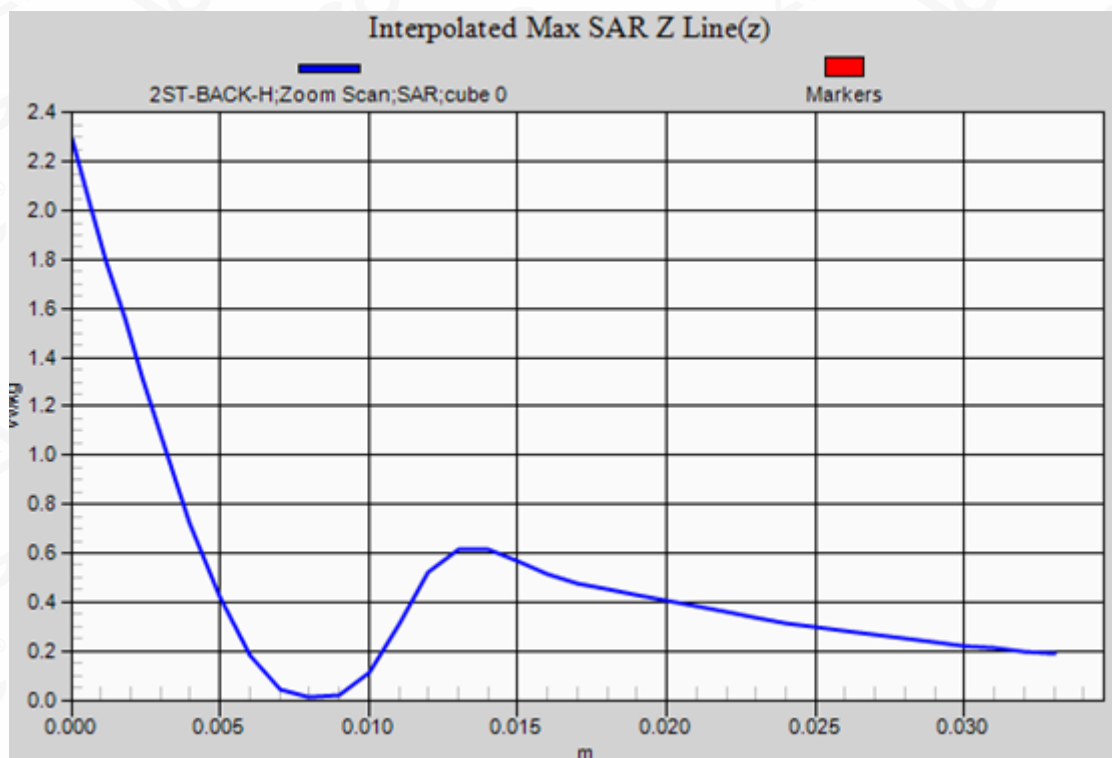

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**PCS 1900 Mid-Touch-Right <SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 13,2021**


Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.35$  mho/m;  $\epsilon_r = 40.28$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**RIGHT HEAD/R-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.185 W/kg

**RIGHT HEAD/R-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 1.051 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 0.284 W/kg  
**SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.099 W/kg**  
Maximum value of SAR (measured) = 0.198 W/kg

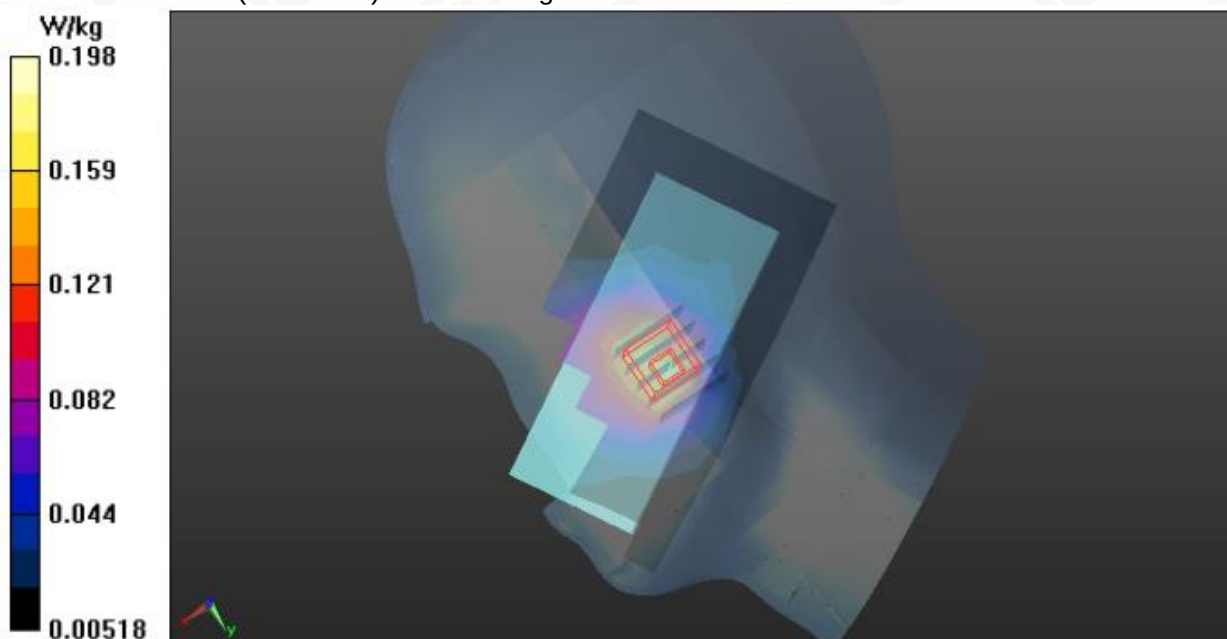

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**PCS 1900 Mid-Body- Back(MS)<SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 13,2021**


Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.35$  mho/m;  $\epsilon_r = 40.28$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.515 W/kg

**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 15.041 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 0.854 W/kg  
**SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.229 W/kg**  
Maximum value of SAR (measured) = 0.522 W/kg

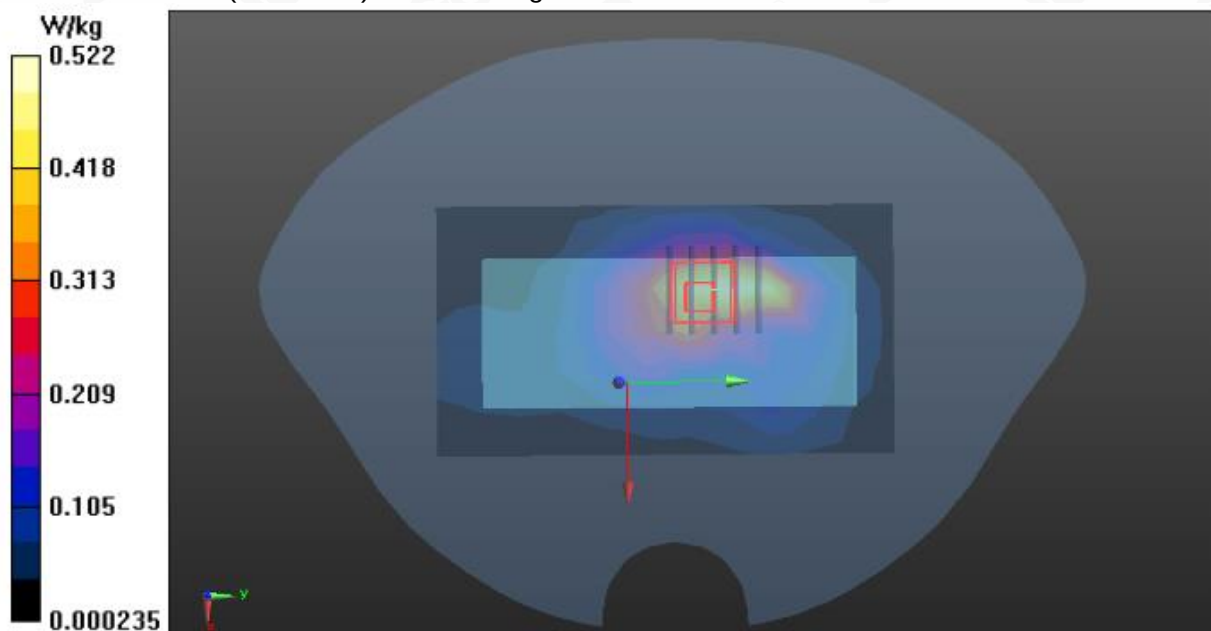

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**GPRS 1900 Mid-Body- Back (4up) < SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 13,2021**


Communication System: GPRS-4 Slot; Communication System Band: PCS 1900; Duty Cycle: 1:2.1;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.35$  mho/m;  $\epsilon_r = 40.28$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/4ST-BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.522 W/kg


**BODY/4ST-BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 16.439 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.817 W/kg  
**SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.240 W/kg**  
Maximum value of SAR (measured) = 0.543 W/kg

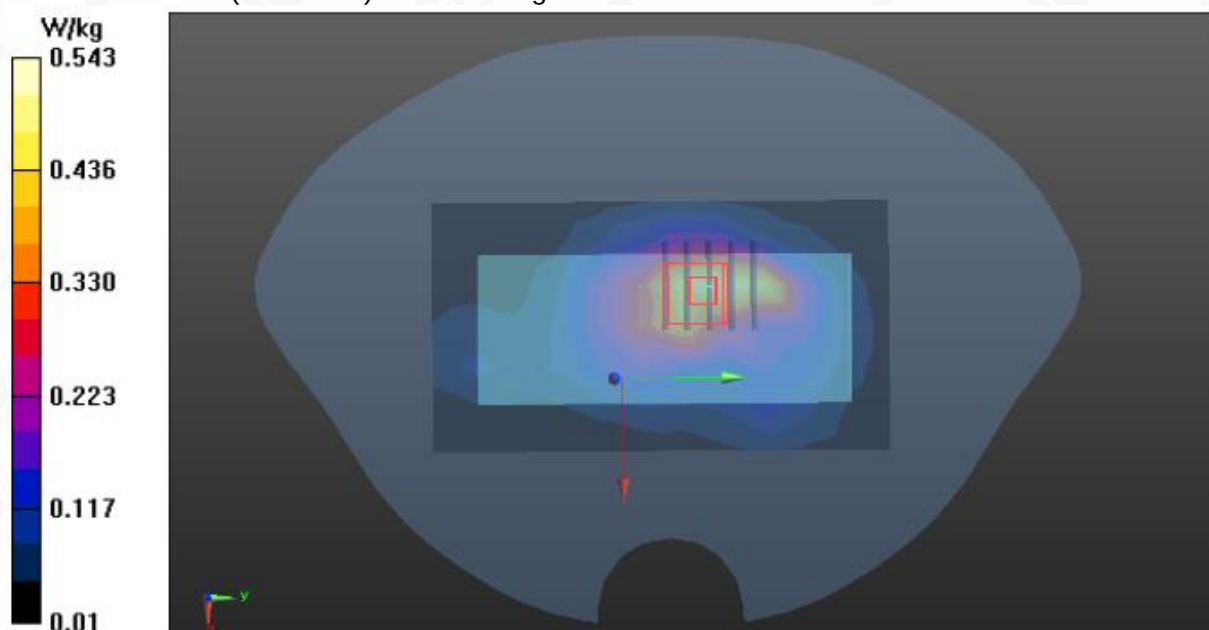

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



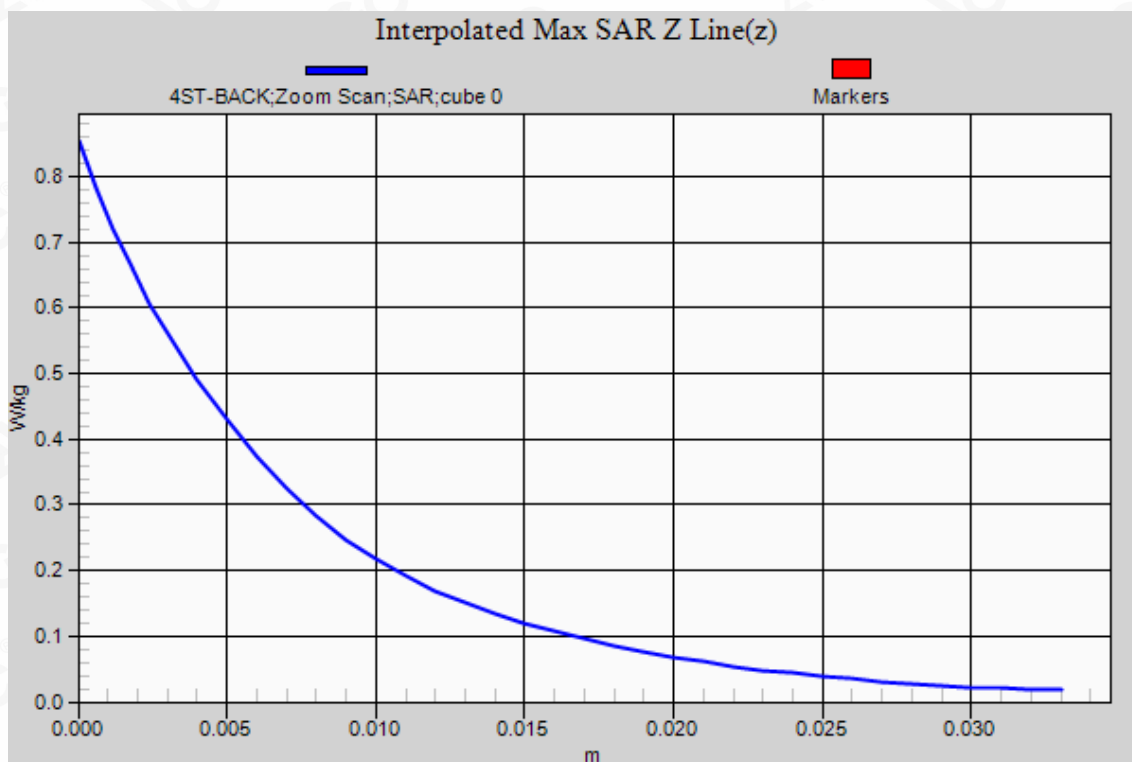

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**WCDMA Band II Mid-Touch-Left**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 13,2021**


Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Frequency: 1880 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.35$  mho/m;  $\epsilon_r = 40.28$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C):21.6, Liquid temperature (°C): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.484 W/kg

**LEFT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 8.025 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 0.687 W/kg  
**SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.289 W/kg**  
Maximum value of SAR (measured) = 0.527 W/kg

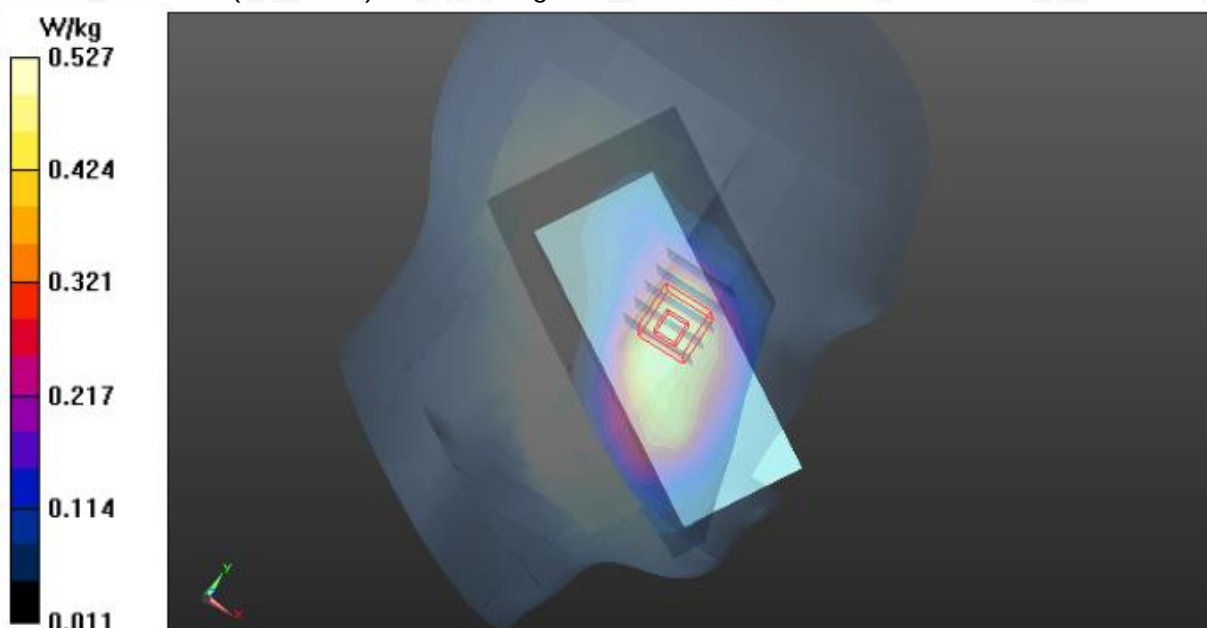

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**WCDMA Band II Mid -Body-Towards Grounds**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 13,2021**


Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Frequency: 1880 MHz; Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.35 \text{ mho/m}$ ;  $\epsilon_r = 40.28$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ):21.6, Liquid temperature ( $^{\circ}\text{C}$ ): 21.3

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.02 W/kg


**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 18.830 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 1.68 W/kg  
**SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.473 W/kg**  
Maximum value of SAR (measured) = 1.12 W/kg

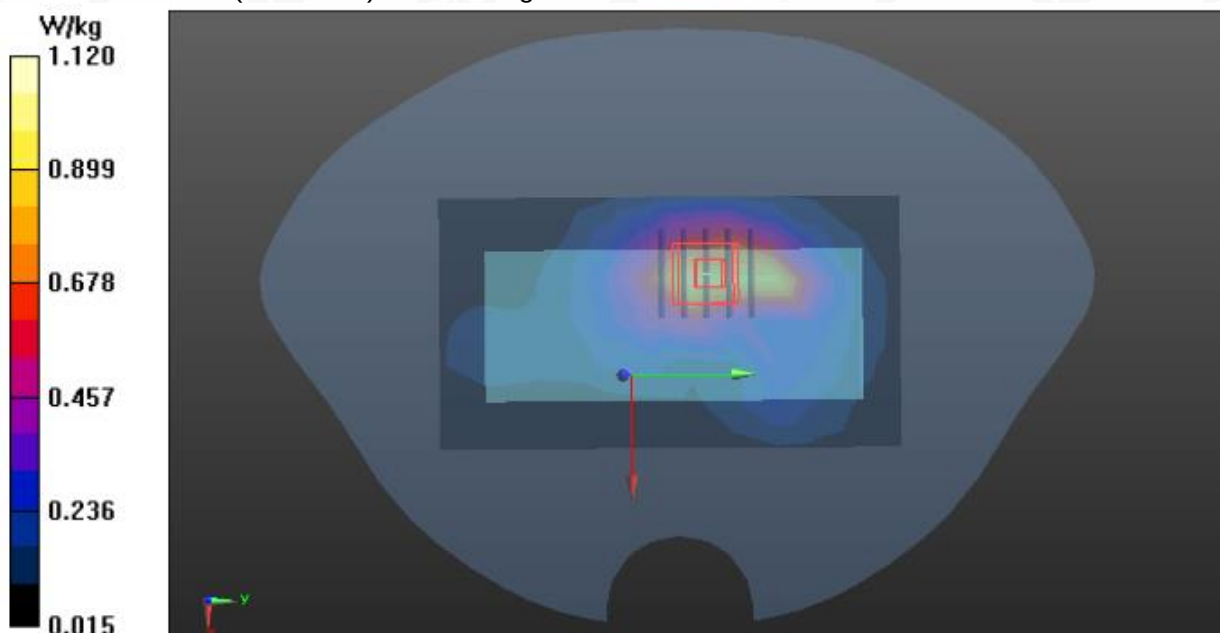

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



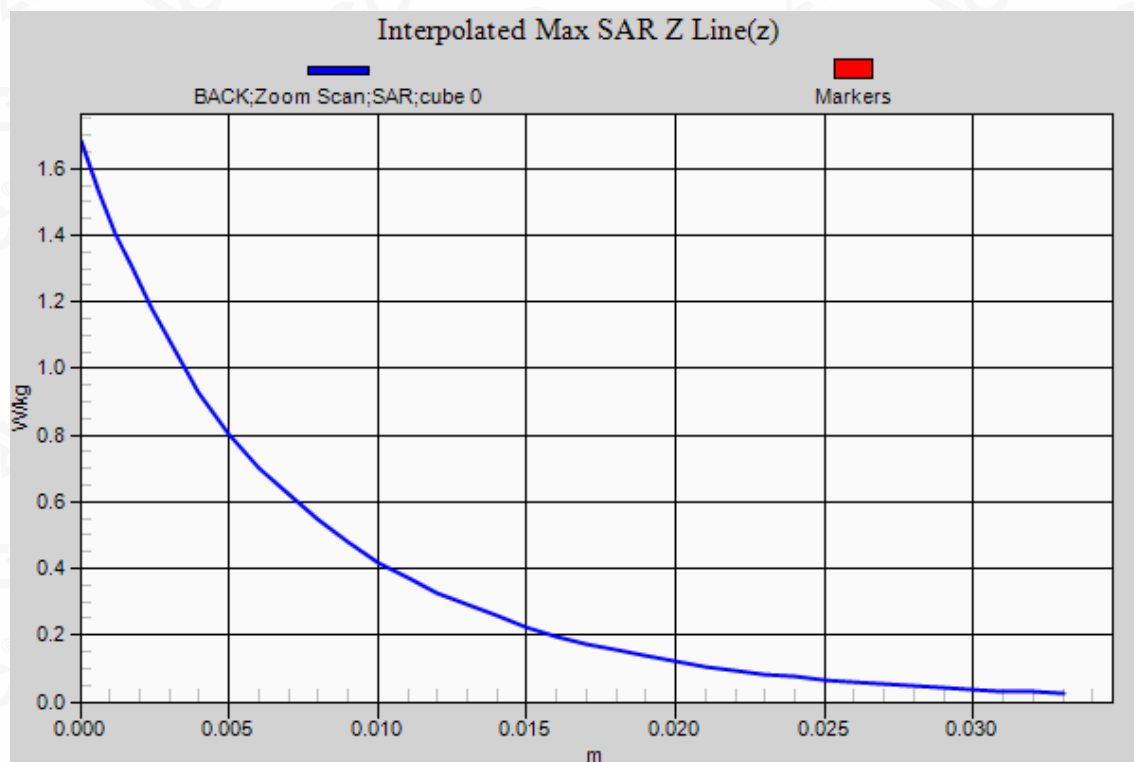

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**WCDMA Band IV Mid-Touch-Left**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 22,2021**

Communication System: UMTS; Communication System Band: BAND IV UTRA/FDD;Duty Cycle:1:1;  
Frequency: 1732.4 MHz; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 40.19$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.4

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.61, 8.61, 8.61); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.352 W/kg



**LEFT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.028 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.473 W/kg

**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.200 W/kg**

Maximum value of SAR (measured) = 0.350 W/kg

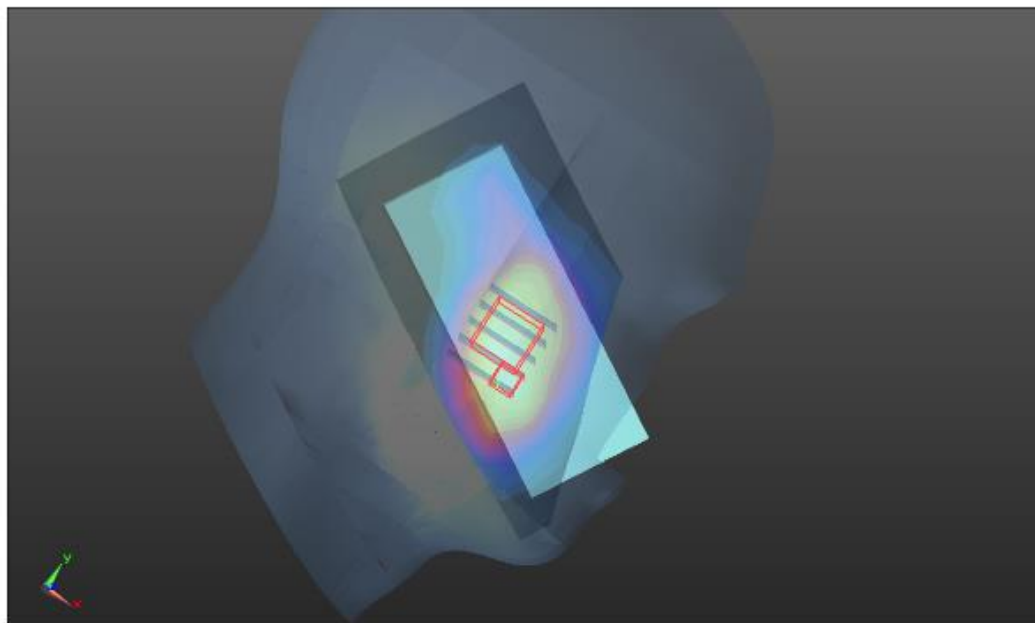

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**WCDMA Band IV Mid-Body-Towards Grounds**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 22,2021**

Communication System: UMTS; Communication System Band: BAND IV UTRA/FDD;Duty Cycle:1:1;  
Frequency: 1732.4 MHz; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 40.19$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.4

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.61, 8.61, 8.61); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 1.03 W/kg


**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 23.795 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.558 W/kg**

Maximum value of SAR (measured) = 1.12 W/kg

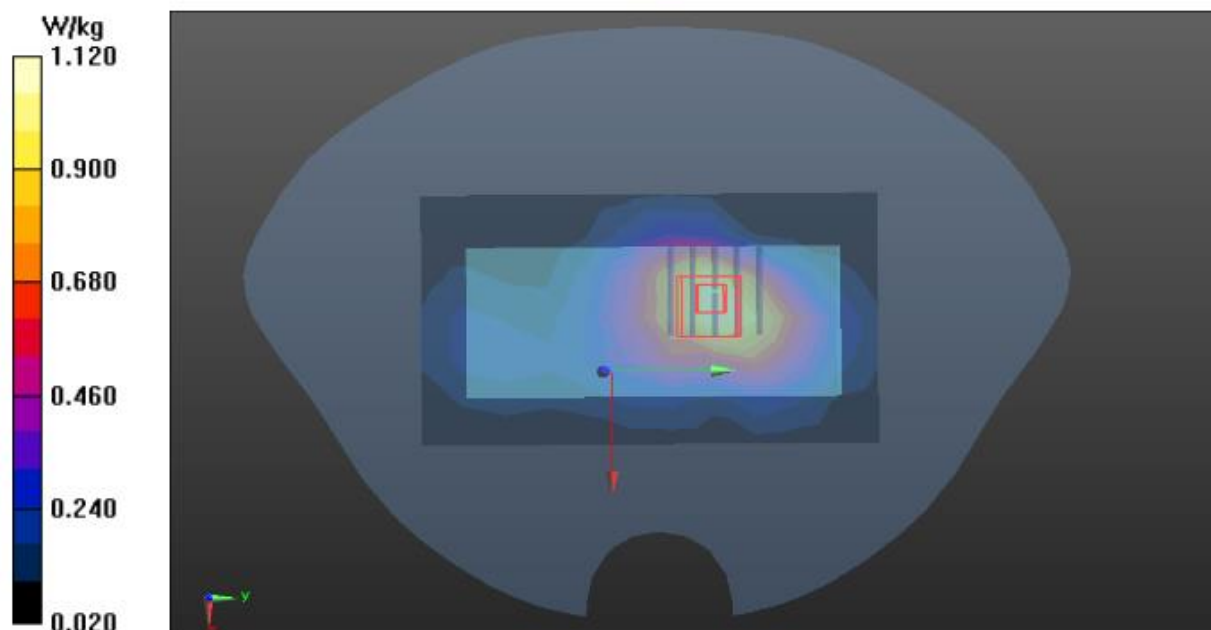


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



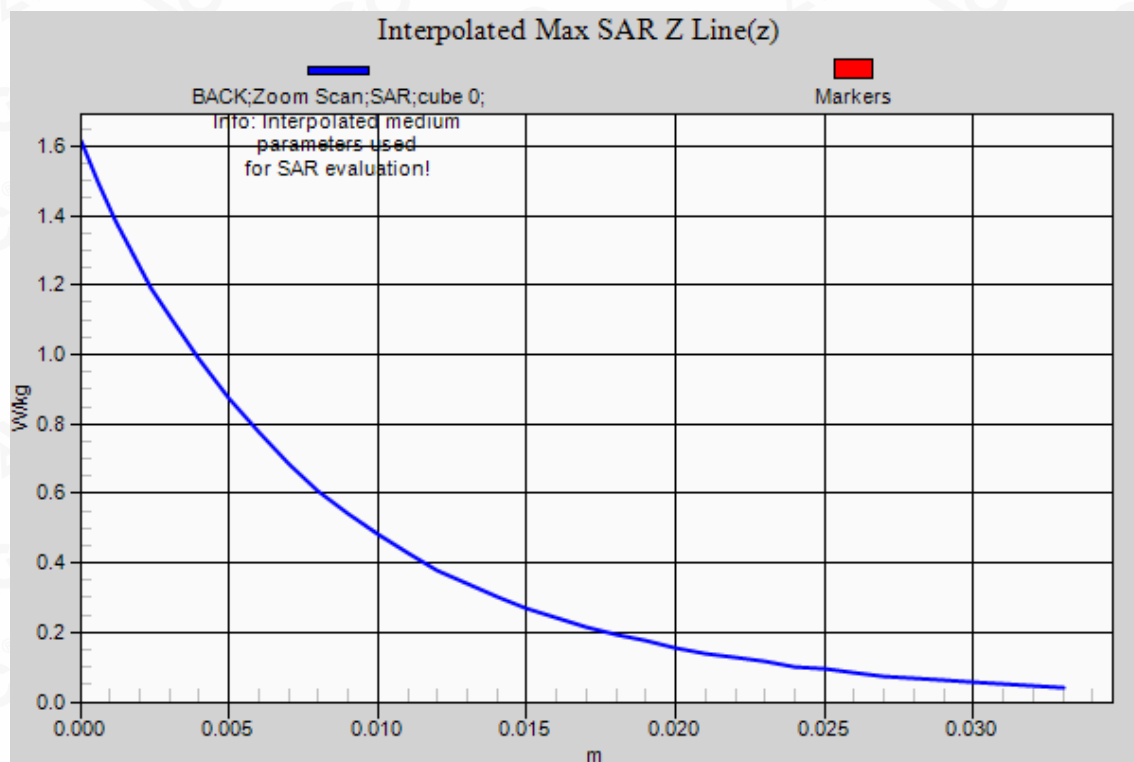

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**WCDMA Band V Mid- Touch-Right**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 14,2021**


Communication System: UMTS; Communication System Band: BAND V UTRA/FDD;Duty Cycle:1:1;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 41.22$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C):22.2, Liquid temperature (°C): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**RIGHT HEAD/R-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.366 W/kg

**RIGHT HEAD/R-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 6.514 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.407 W/kg  
**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.255 W/kg**  
Maximum value of SAR (measured) = 0.365 W/kg

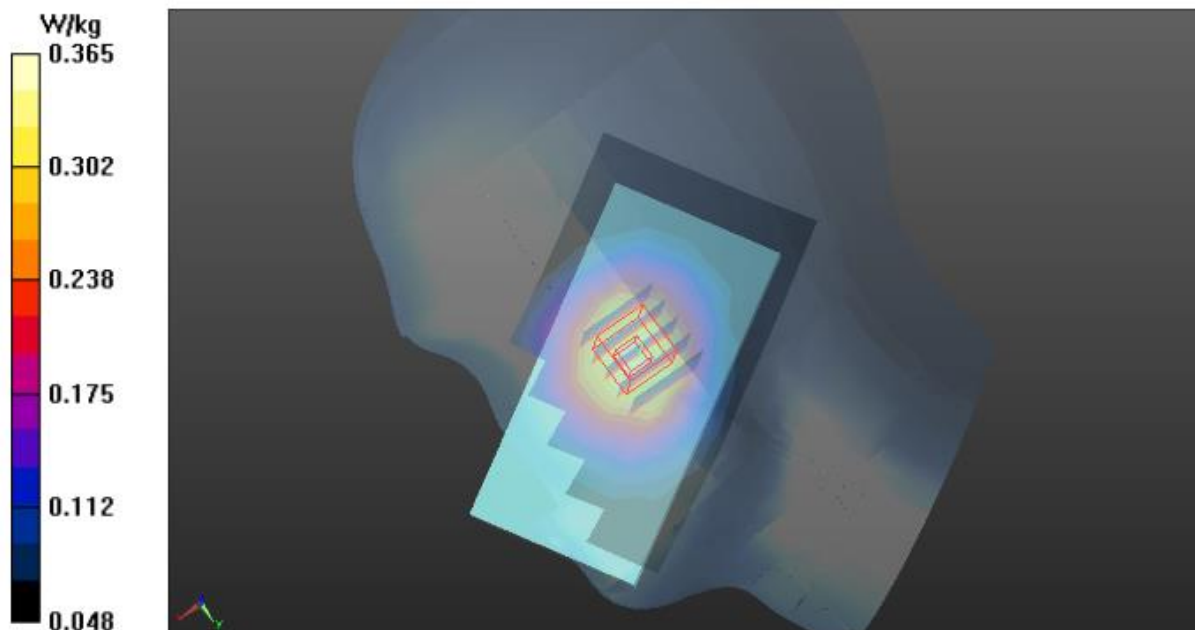

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**WCDMA Band V Mid-Body-Towards Grounds**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 14,2021**


Communication System: UMTS; Communication System Band: BAND V UTRA/FDD;Duty Cycle:1:1;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.93 \text{ mho/m}$ ;  $\epsilon_r = 41.22$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ):22.2, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (6x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.28 W/kg


**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 26.864 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 2.16 W/kg  
**SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.463 W/kg**  
Maximum value of SAR (measured) = 1.33 W/kg

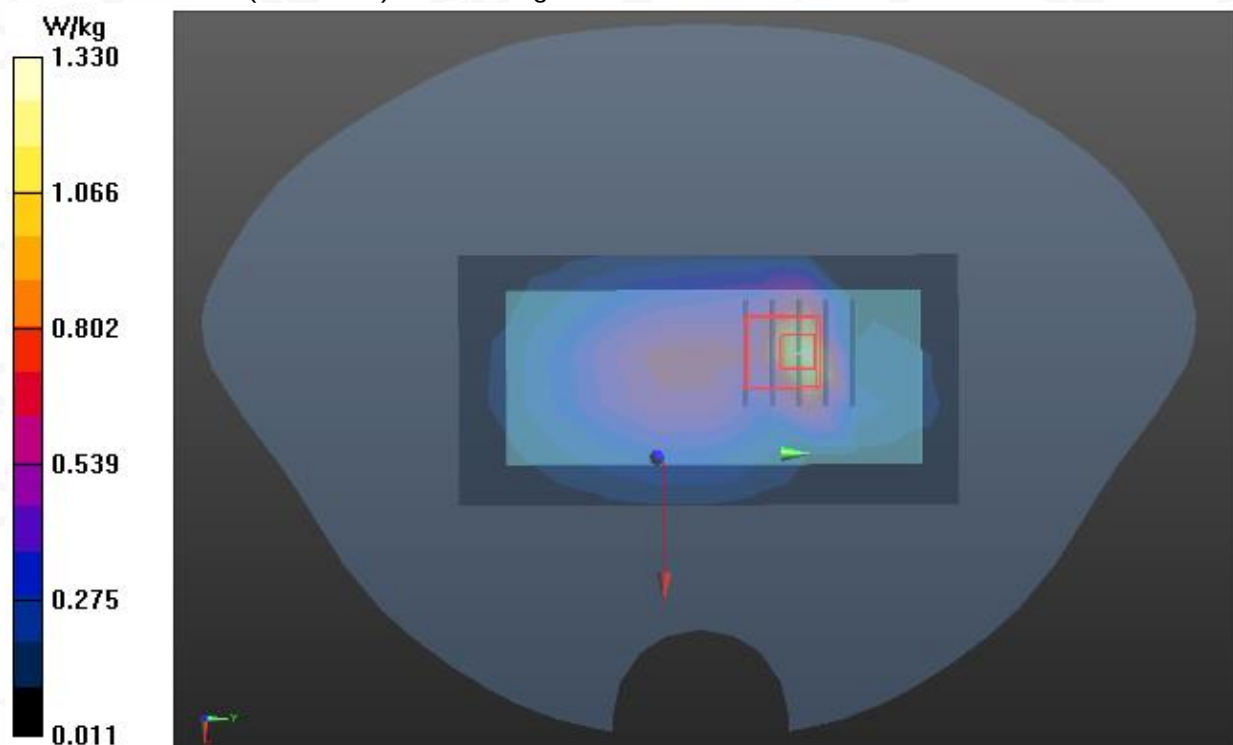

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



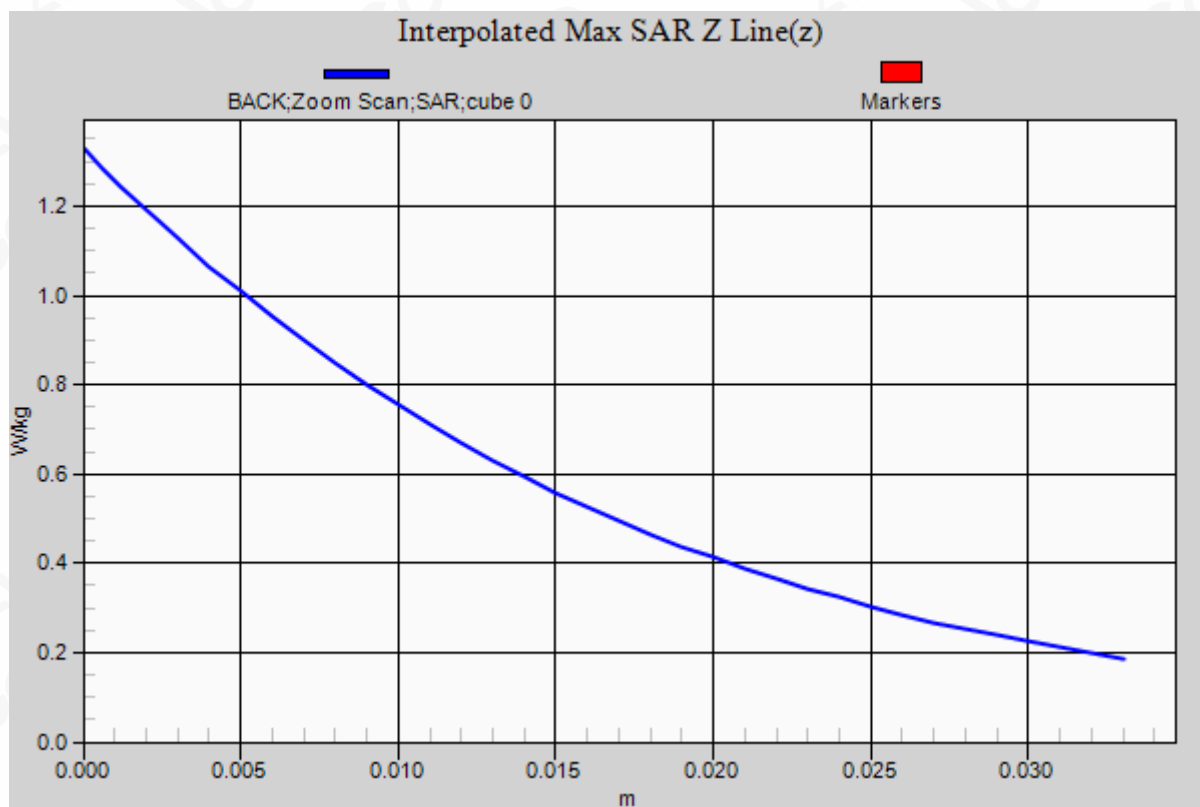

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 2 Mid-Touch-Left <SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 10,2021**


Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle: 1:1;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 41.25$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0$ , 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.394 W/kg

**LEFT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 5.114 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 0.531 W/kg  
**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.226 W/kg**  
Maximum value of SAR (measured) = 0.402 W/kg

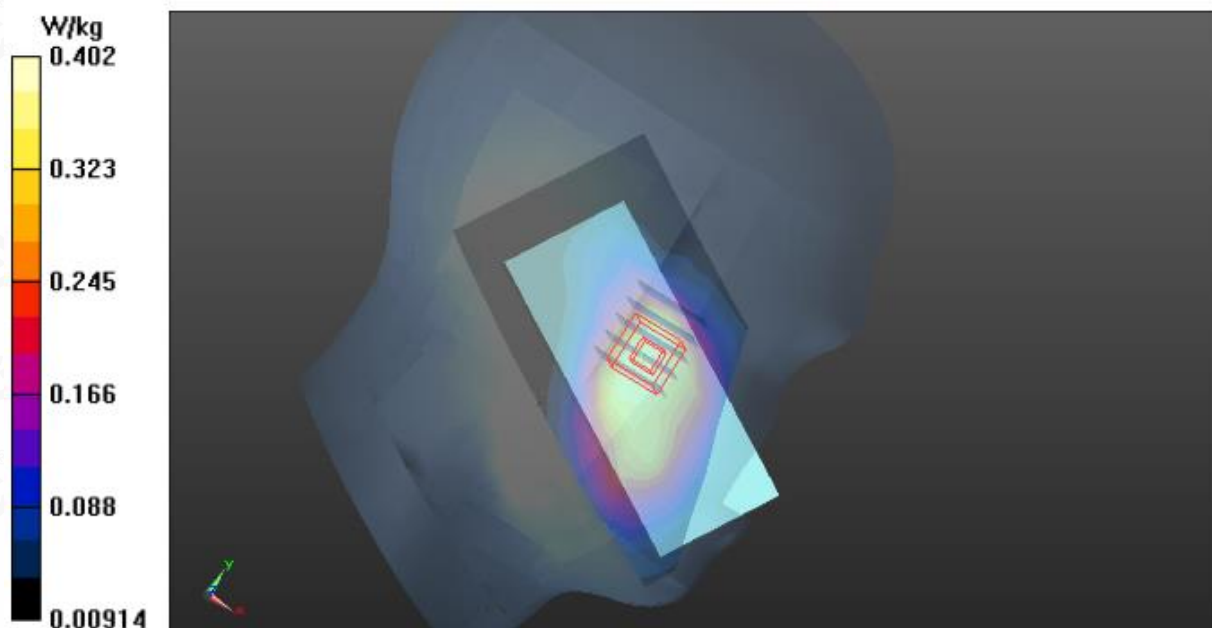

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



**Test Laboratory: AGC Lab**  
**LTE Band 2 High-Body- Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 10,2021**

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle: 1:1;  
Frequency: 1900 MHz; Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.37 \text{ mho/m}$ ;  $\epsilon_r = 39.57$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.8

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK-H/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.02 W/kg


**BODY/BACK-H/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.421 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.450 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

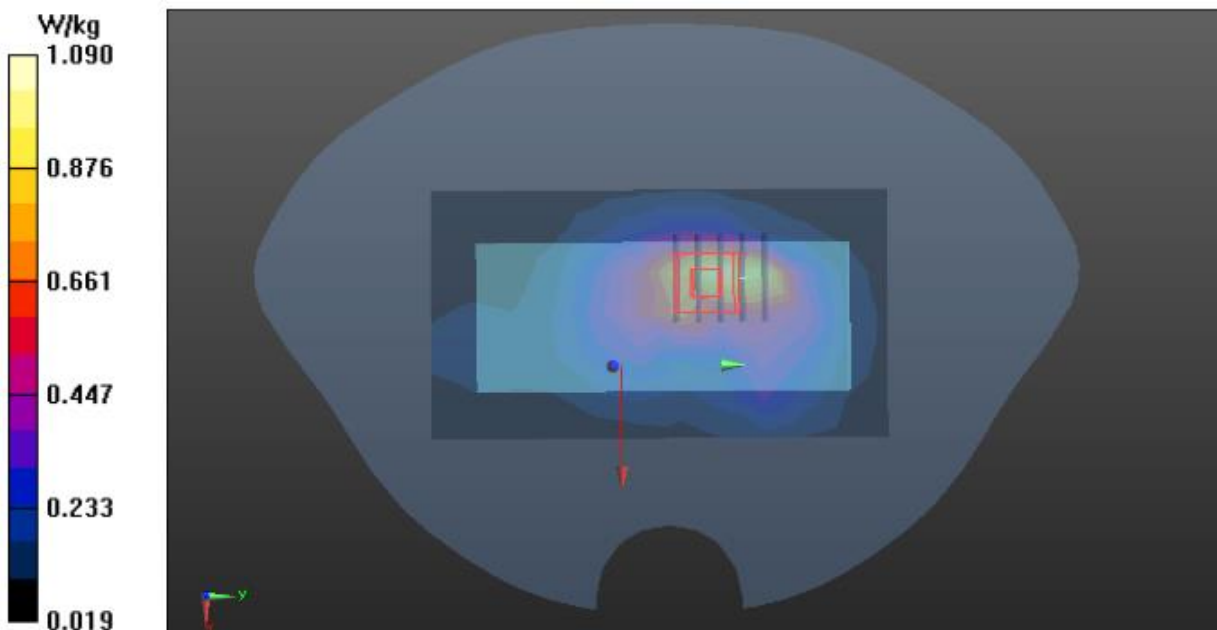


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



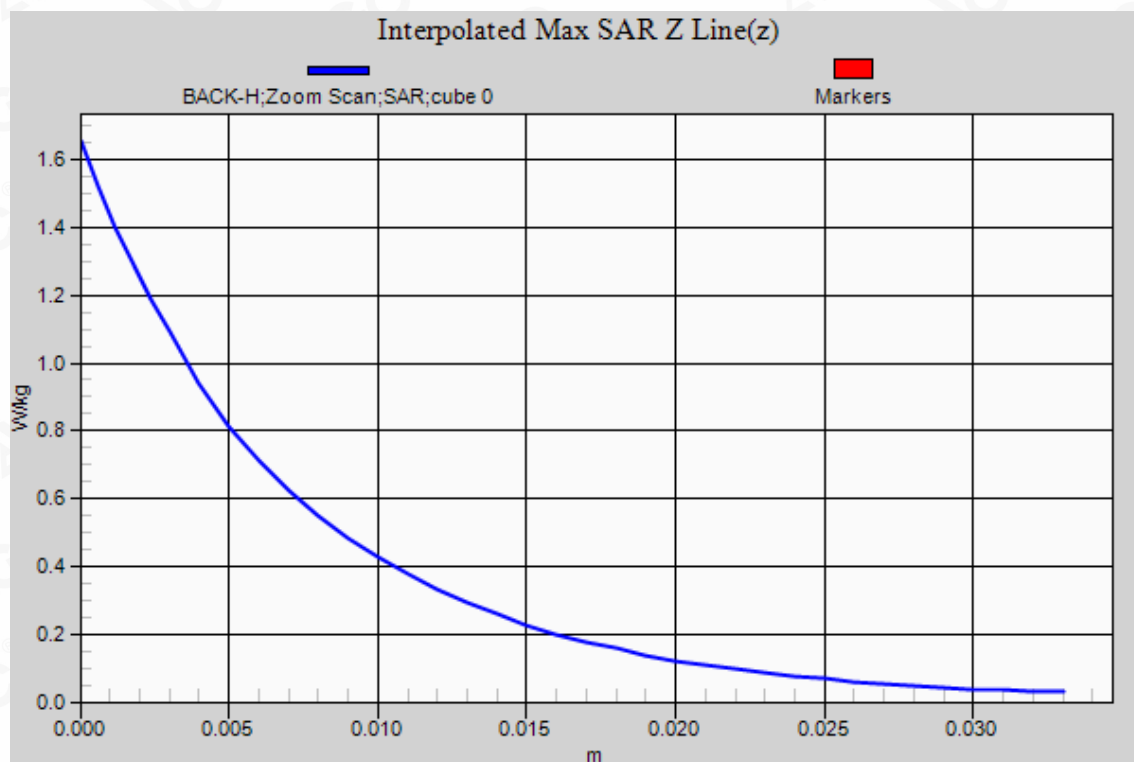

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 4 Mid-Touch-Left (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 22,2021**


Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1;  
Frequency:1732.5 MHz; Medium parameters used:  $f=1750$  MHz;  $\sigma=1.36$  mho/m;  $\epsilon_r=40.19$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.4

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.61, 8.61, 8.61); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z=1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.314 W/kg

**LEFT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 5.713 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 0.422 W/kg  
**SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.178 W/kg**  
Maximum value of SAR (measured) = 0.316 W/kg

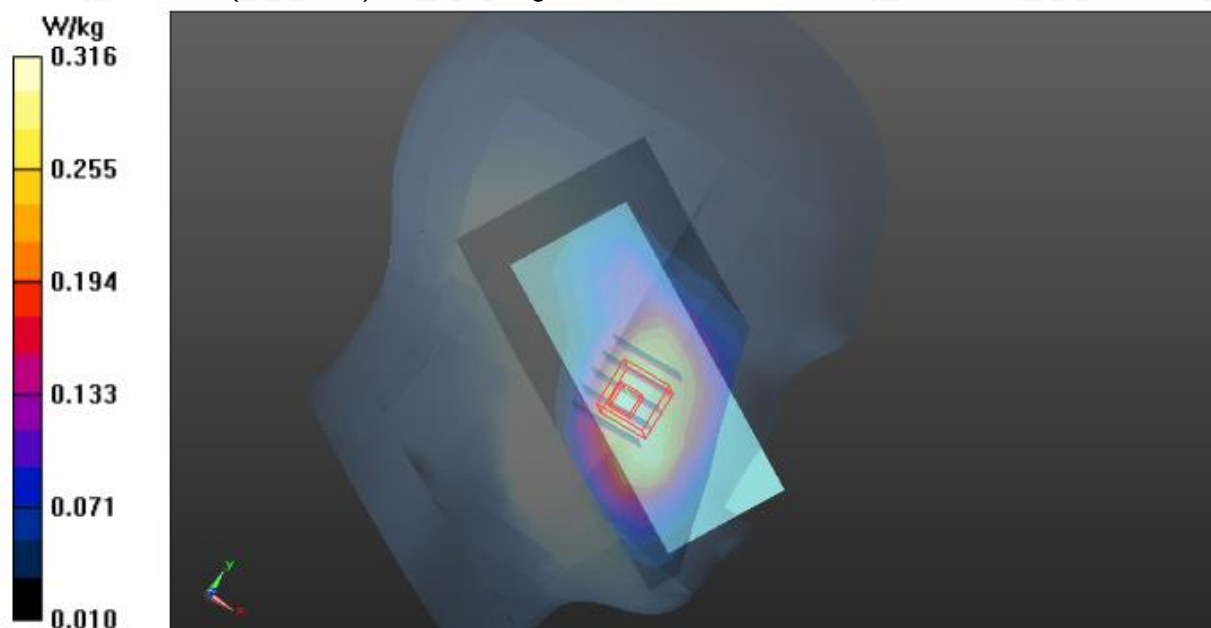

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 4 Mid-Body-Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 22,2021**

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1;  
Frequency:1732.5 MHz; Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 40.19$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.4

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.61, 8.61, 8.61); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.709 W/kg


**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 22.166 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.356 W/kg**

Maximum value of SAR (measured) = 0.701 W/kg

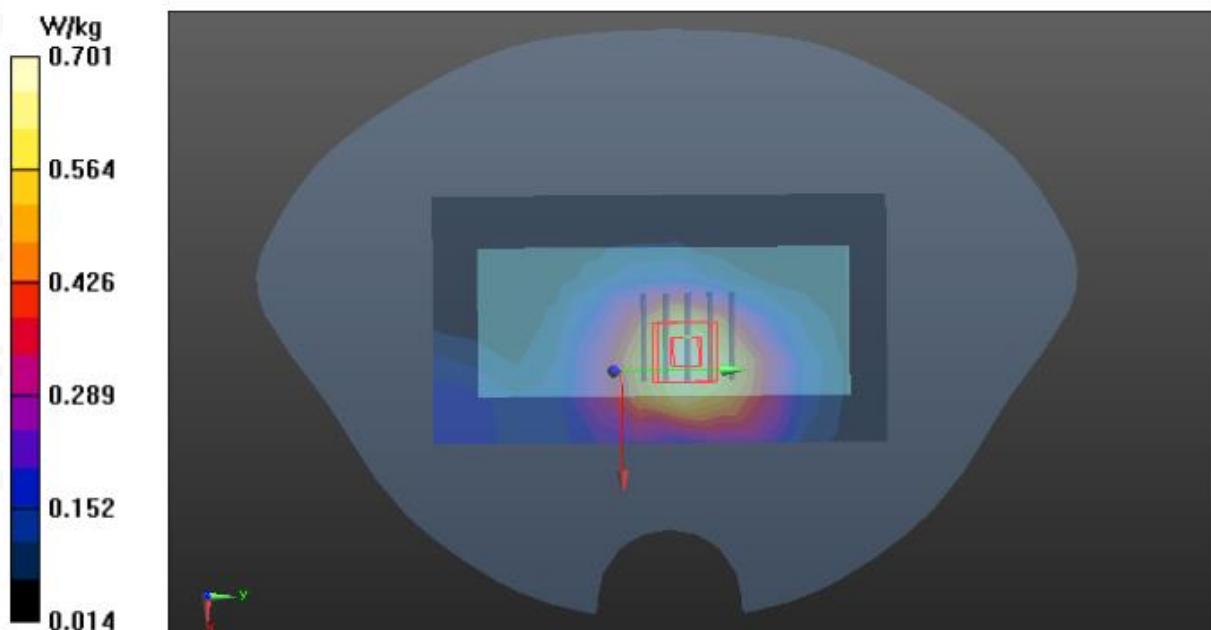


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



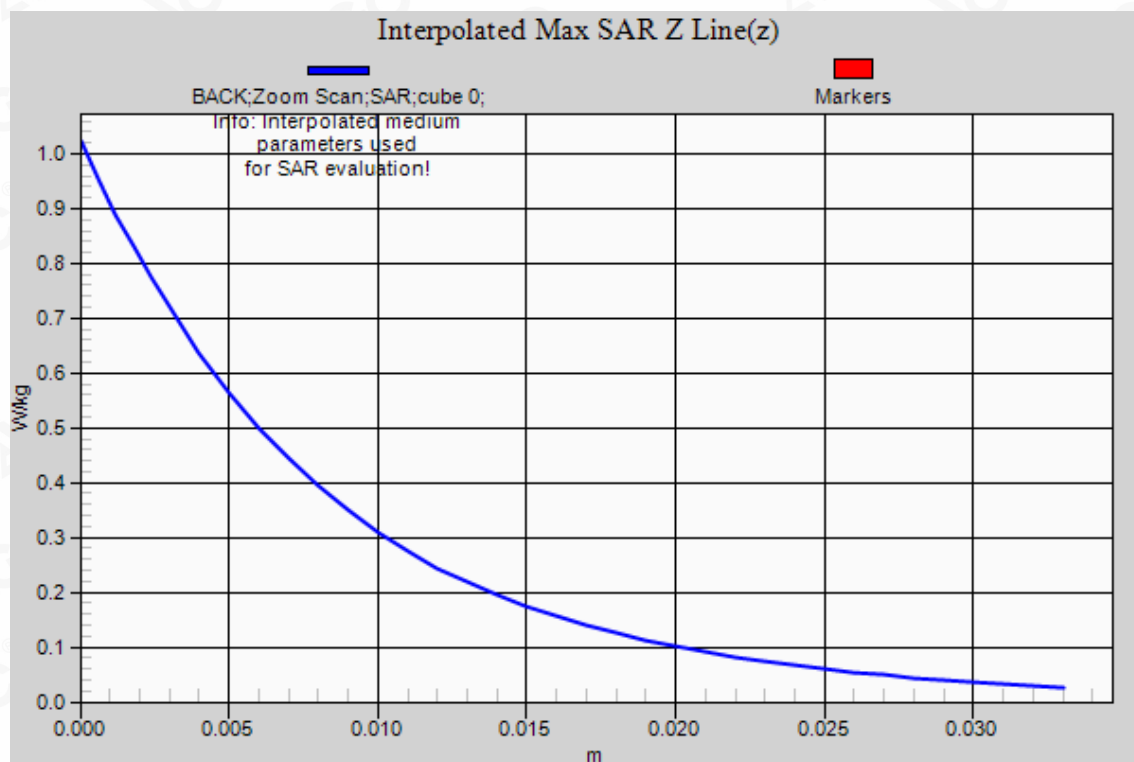

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 5 High-Touch-Left (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 09,2021**


Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1;  
Frequency: 844 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.96$  mho/m;  $\epsilon_r = 39.56$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C HIGH/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.931 W/kg

**LEFT HEAD/L-C HIGH/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 10.197 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 1.07 W/kg  
**SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.637 W/kg**  
Maximum value of SAR (measured) = 0.947 W/kg

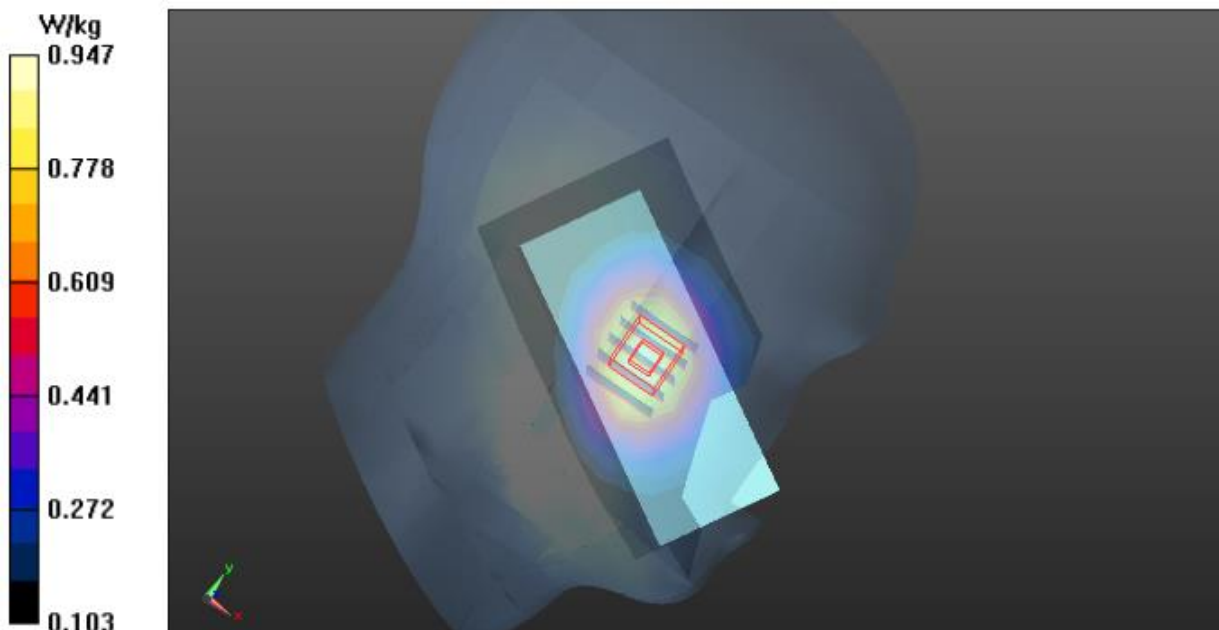

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 5 Low-Body-Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 09,2021**

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1;  
Frequency: 829 MHz; Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.85 \text{ mho/m}$ ;  $\epsilon_r = 43.29$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 21.8, Liquid temperature ( $^{\circ}\text{C}$ ): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK-L/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.29 W/kg


**BODY/BACK-L/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 39.574 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.823 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

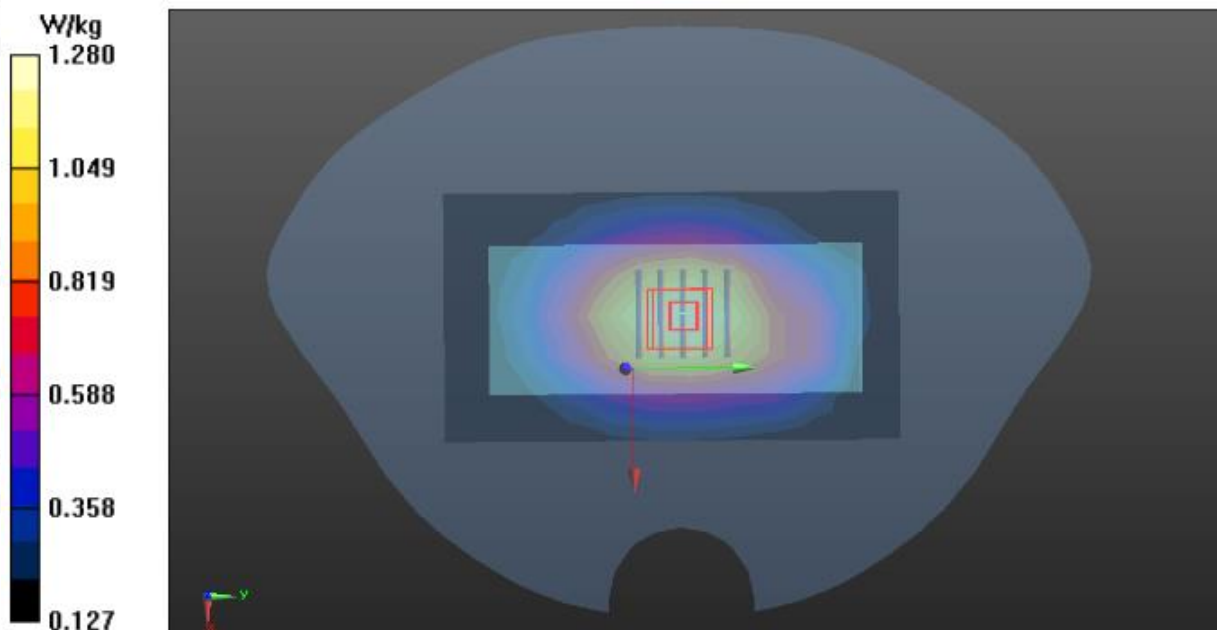


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



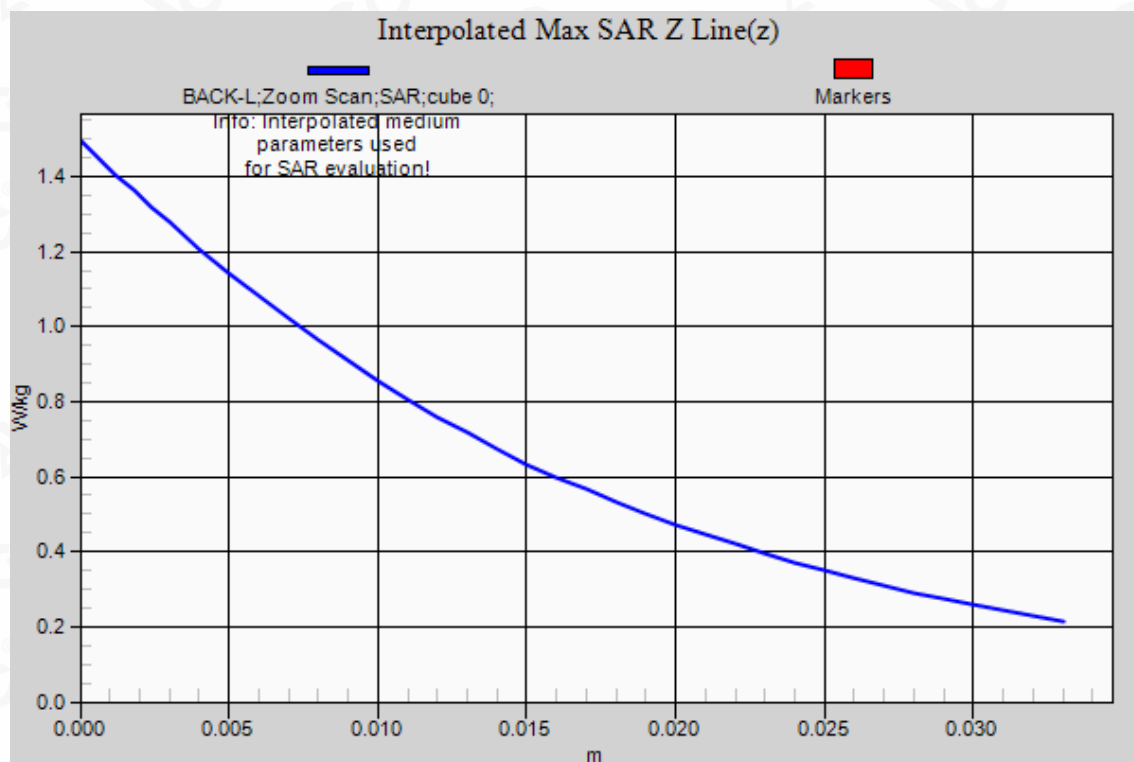

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 7 Mid-Touch-Left (1RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 19,2021**

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1;  
Frequency: 2535MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.80$  mho/m;  $\epsilon_r = 40.97$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(7.45, 7.45, 7.45); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.276 W/kg


**LEFT HEAD/L-C/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.195 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.595 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.296 W/kg

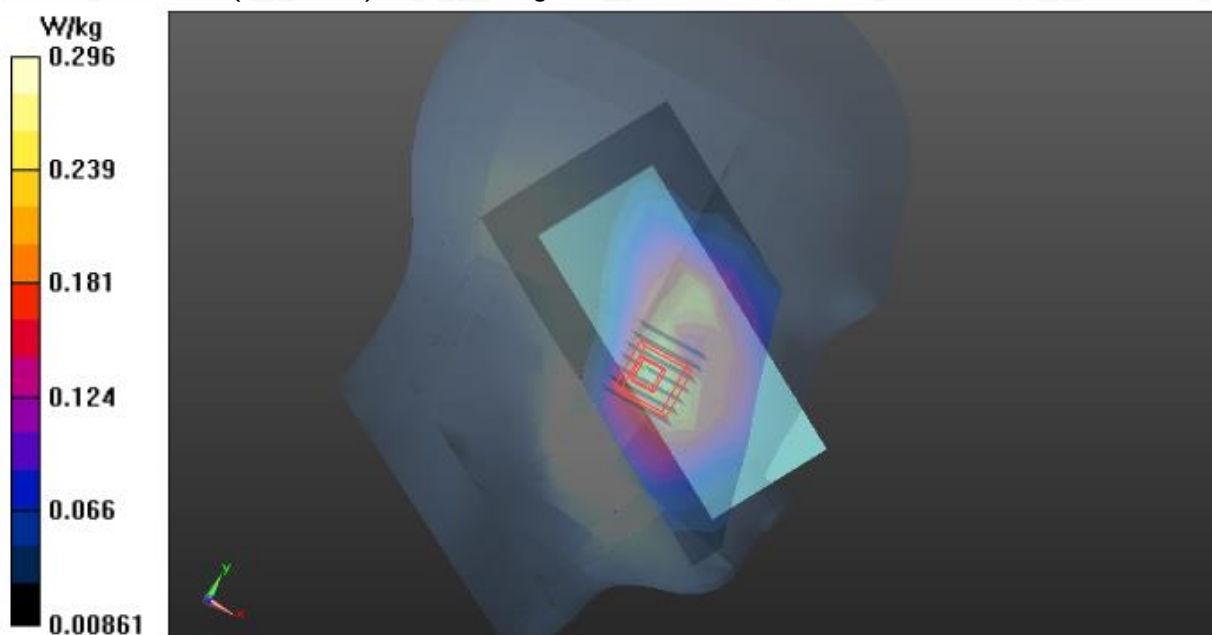

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 7 Mid-Body-Back (1RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 19,2021**

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1;  
Frequency: 2535MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.80$  mho/m;  $\epsilon_r = 40.97$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(7.45, 7.45, 7.45); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.583 W/kg


**BODY/BACK/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 14.553 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.782 W/kg

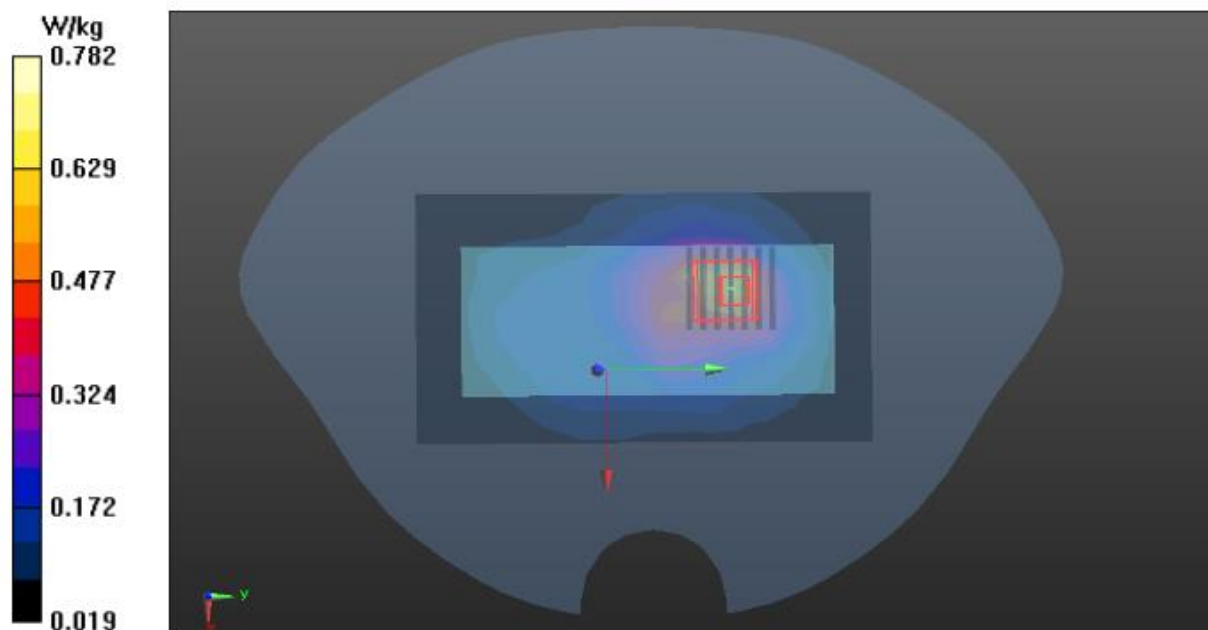


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



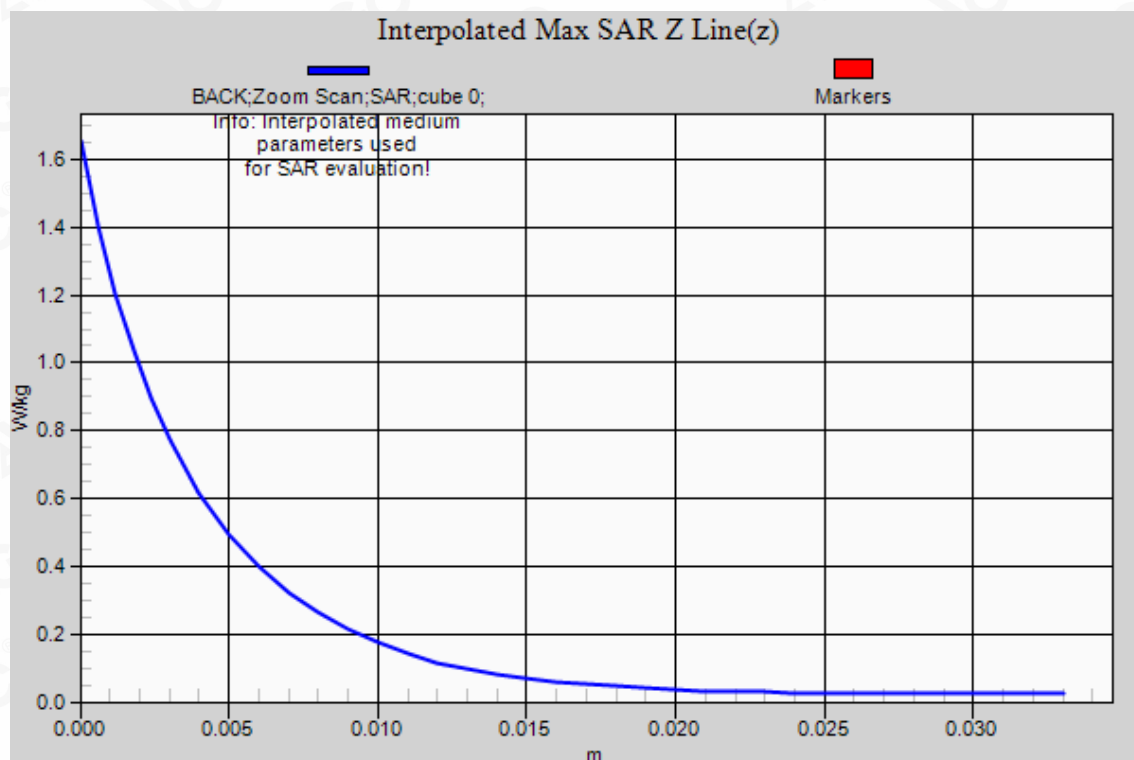

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 12 Mid-Touch-Right (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 11,2021**

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1;  
Frequency: 707.5 MHz; Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.83$  mho/m;  $\epsilon_r = 44.03$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**RIGHT HEAD/R-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.535 W/kg


**RIGHT HEAD/R-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.205 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.609 W/kg

**SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.372 W/kg**

Maximum value of SAR (measured) = 0.542 W/kg

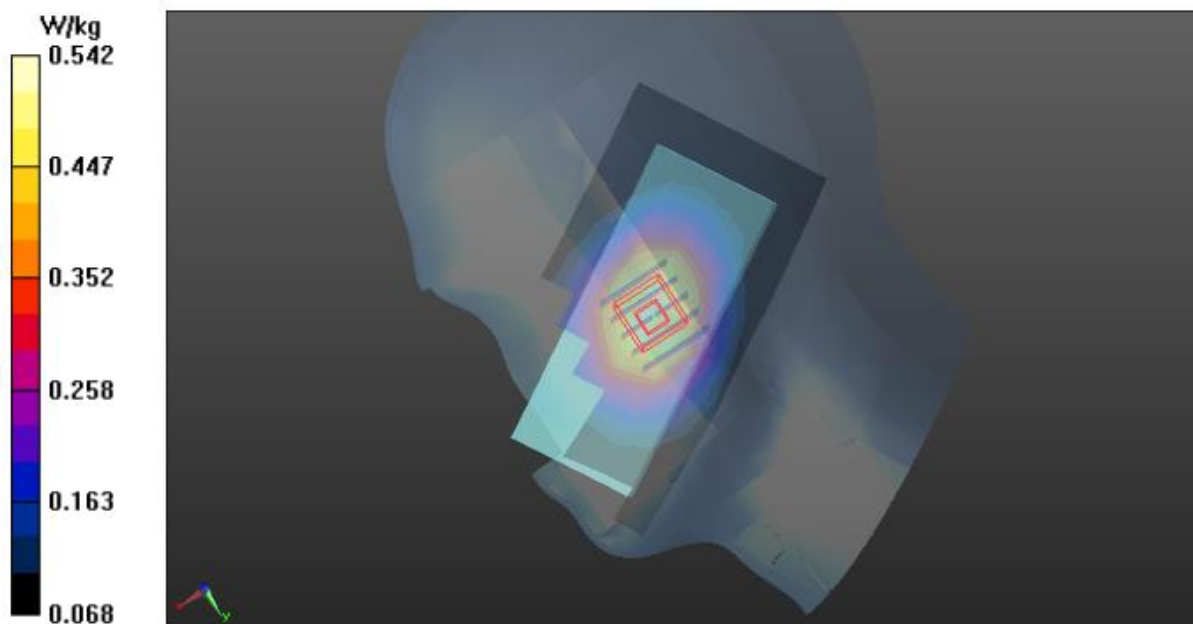

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 12 High-Body-Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 11,2021**

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1;  
Frequency: 711 MHz; Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 42.35$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK-H/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.891 W/kg


**BODY/BACK-H/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 29.050 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.608 W/kg**

Maximum value of SAR (measured) = 0.933 W/kg

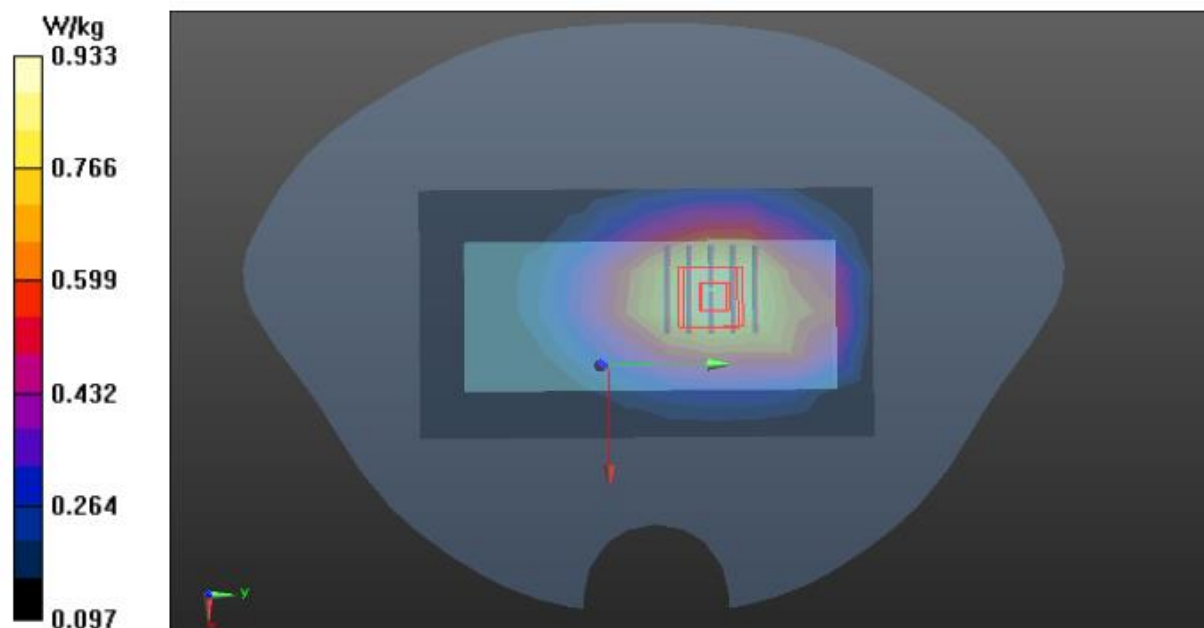


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



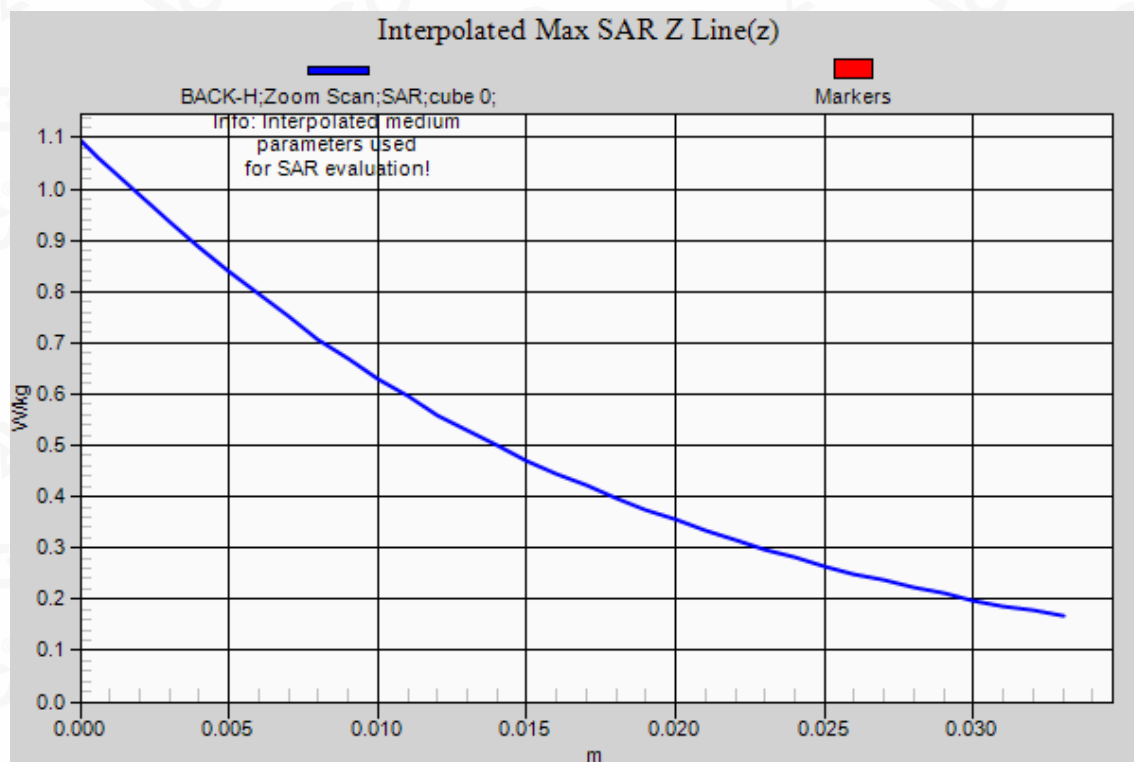

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 13 Mid-Touch-Right (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 11,2021**


Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1;  
Frequency: 782 MHz; Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 40.66$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**RIGHT HEAD/R-C/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.347 W/kg

**RIGHT HEAD/R-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 6.604 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.385 W/kg  
**SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.240 W/kg**  
Maximum value of SAR (measured) = 0.344 W/kg

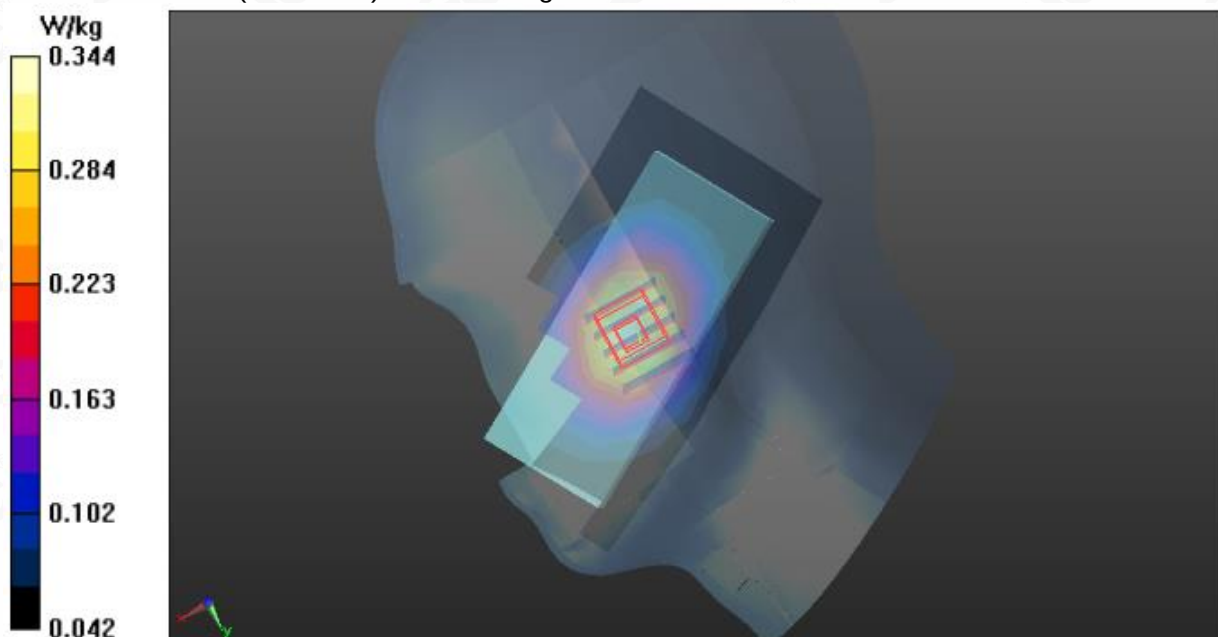

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 13 Mid-Body-Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 11,2021**


Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1;  
Frequency: 782 MHz; Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 40.66$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.377 W/kg


**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 20.354 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.430 W/kg  
**SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.251 W/kg**  
Maximum value of SAR (measured) = 0.376 W/kg

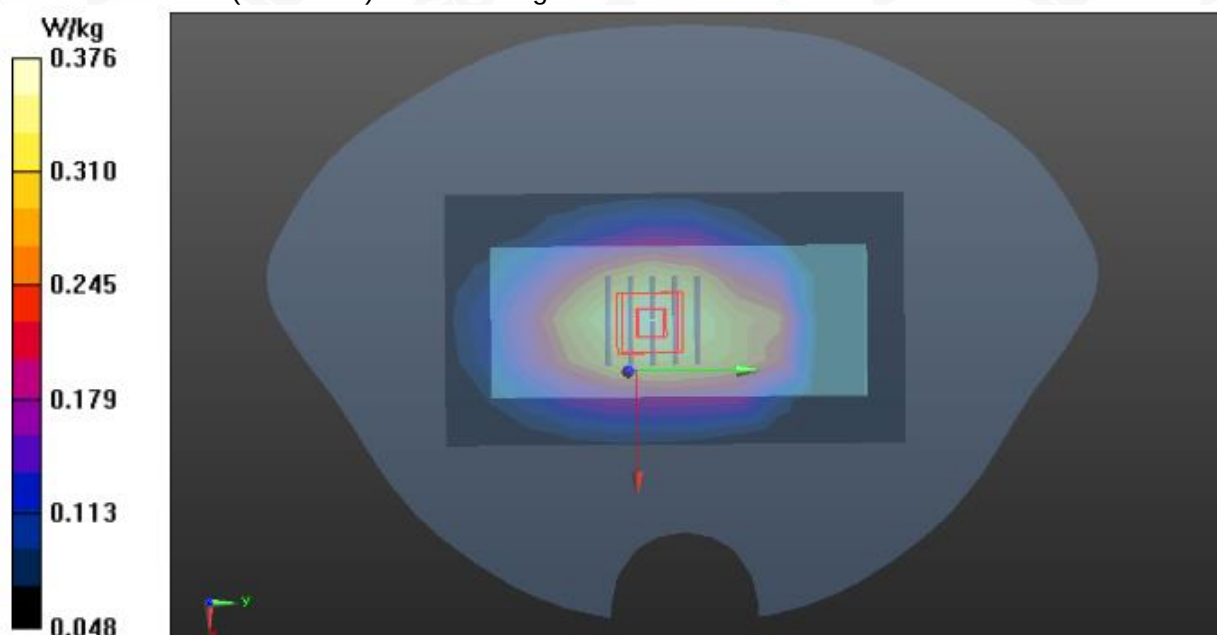

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



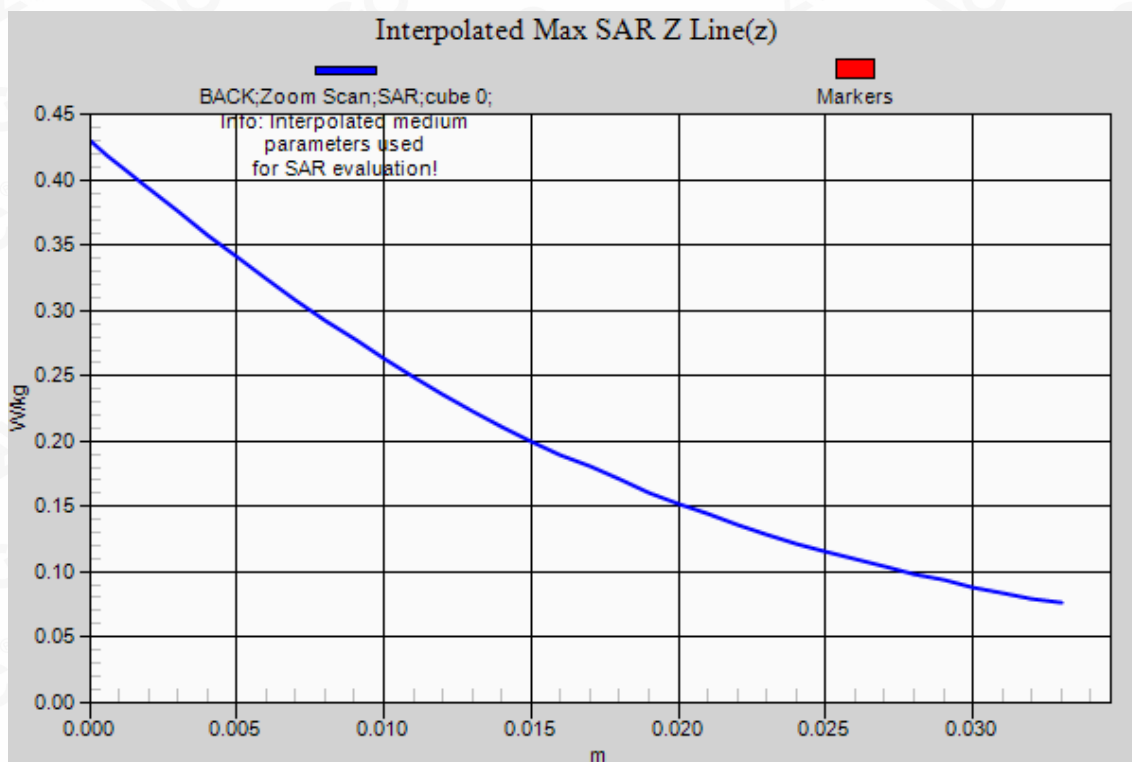

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 17 Mid-Touch- Right (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 11,2021**


Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1;  
Frequency: 710 MHz; Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.85 \text{ mho/m}$ ;  $\epsilon_r = 43.76$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**RIGHT HEAD/R-C/Area Scan (7x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.298 W/kg


**RIGHT HEAD/R-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 5.569 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 0.327 W/kg  
**SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.211 W/kg**

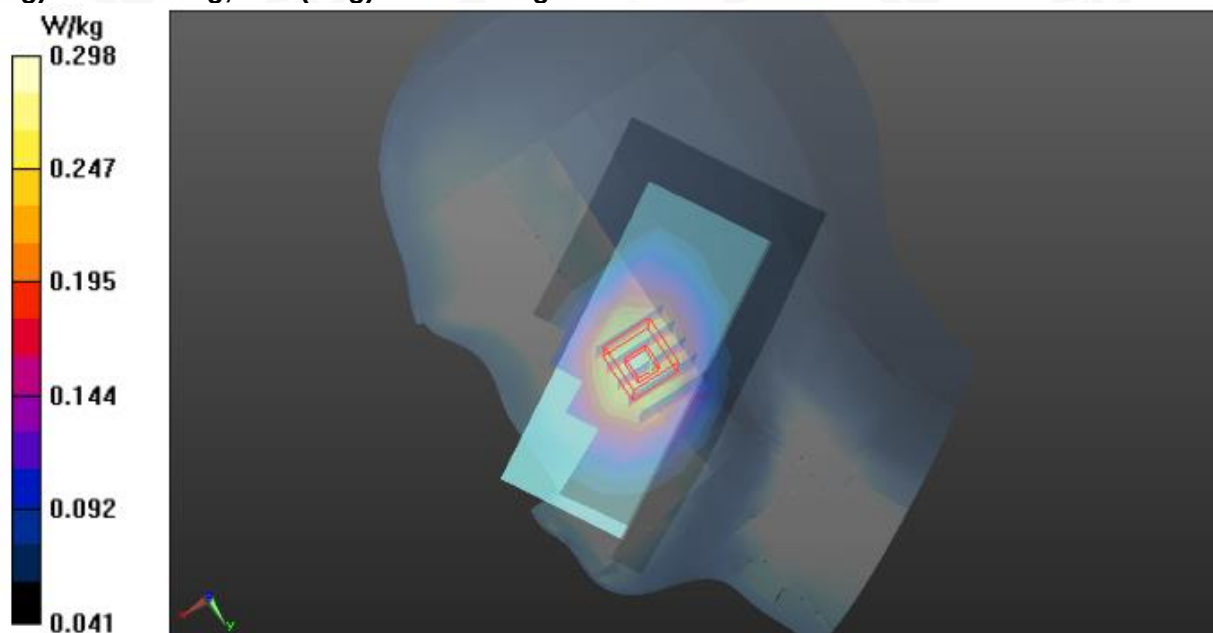

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



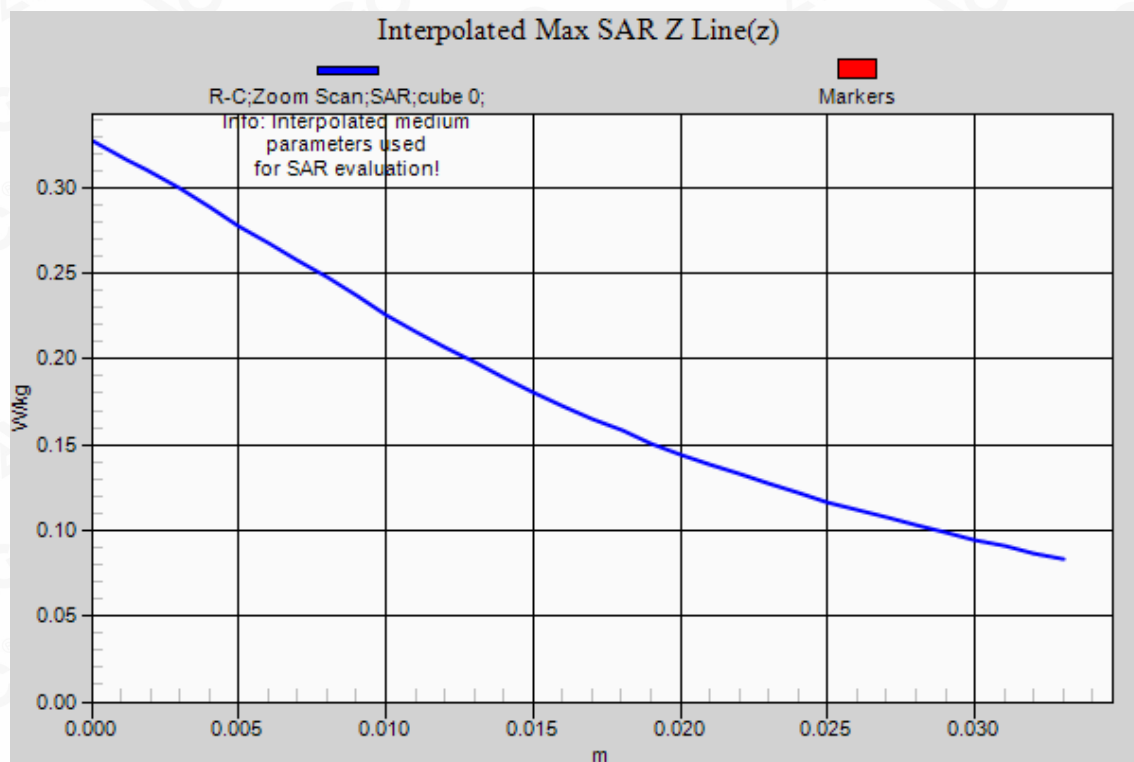

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 17 Mid-Body- Edge 2(Right) (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 11,2021**


Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1;  
Frequency: 710 MHz; Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.85 \text{ mho/m}$ ;  $\epsilon_r = 43.76$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 22.1, Liquid temperature ( $^{\circ}\text{C}$ ): 21.9

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.53, 10.53, 10.53); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/2/Area Scan (6x12x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.244 W/kg

**BODY/2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 13.065 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.290 W/kg  
**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.158 W/kg**

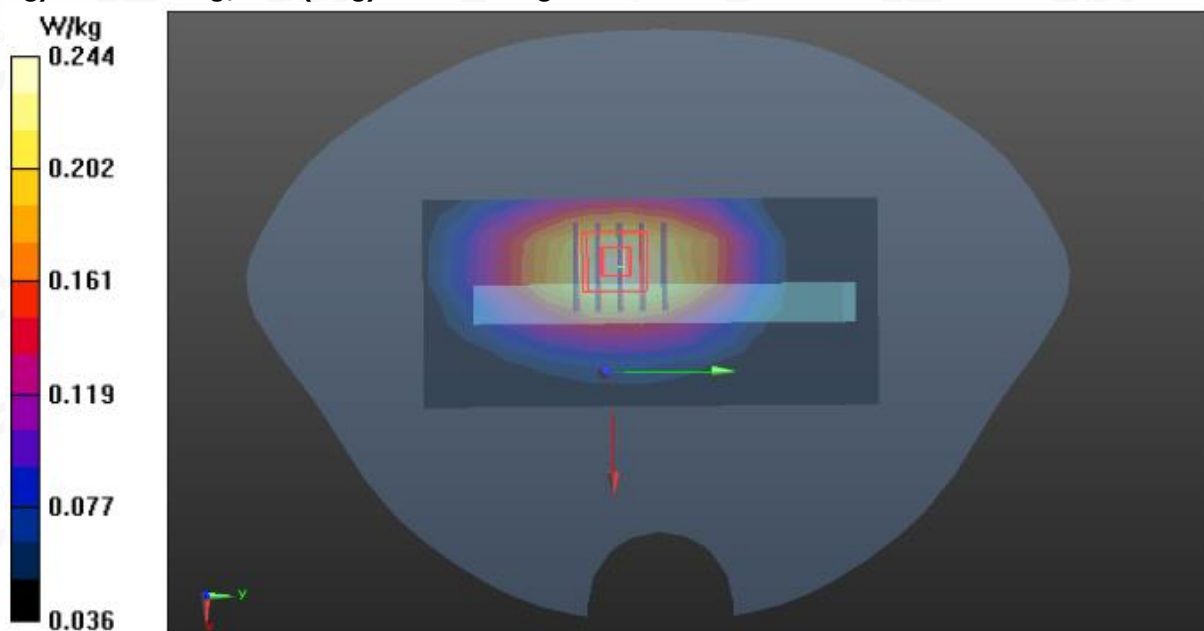

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 25 Mid-Touch-Left <SIM 1>**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 10,2021**

Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle: 1:1;  
Frequency: 1882.5 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.59$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.408 W/kg


**LEFT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.827 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.568 W/kg

**SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.226 W/kg**

Maximum value of SAR (measured) = 0.415 W/kg

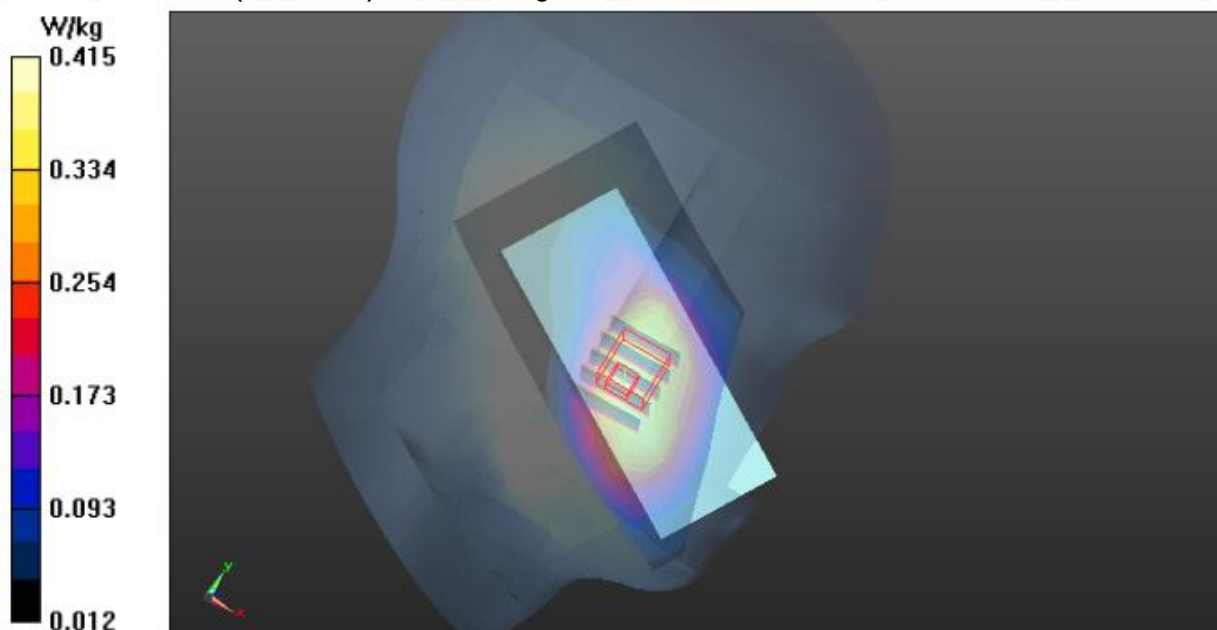

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 25 Mid-Body- Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 10,2021**


Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle: 1:1;  
Frequency: 1882.5 MHz; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.59$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(8.32, 8.32, 8.32); Calibrated: Jul. 29,2020;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 1.26 W/kg


**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 24.007 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 1.94 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.545 W/kg**  
Maximum value of SAR (measured) = 1.28 W/kg

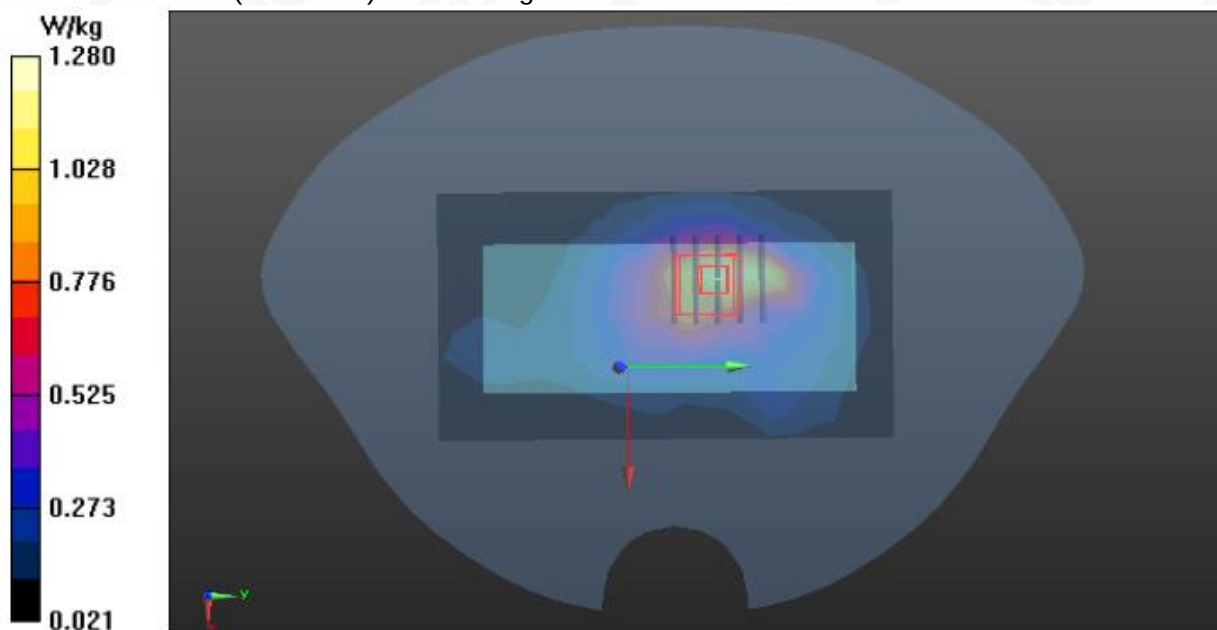

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



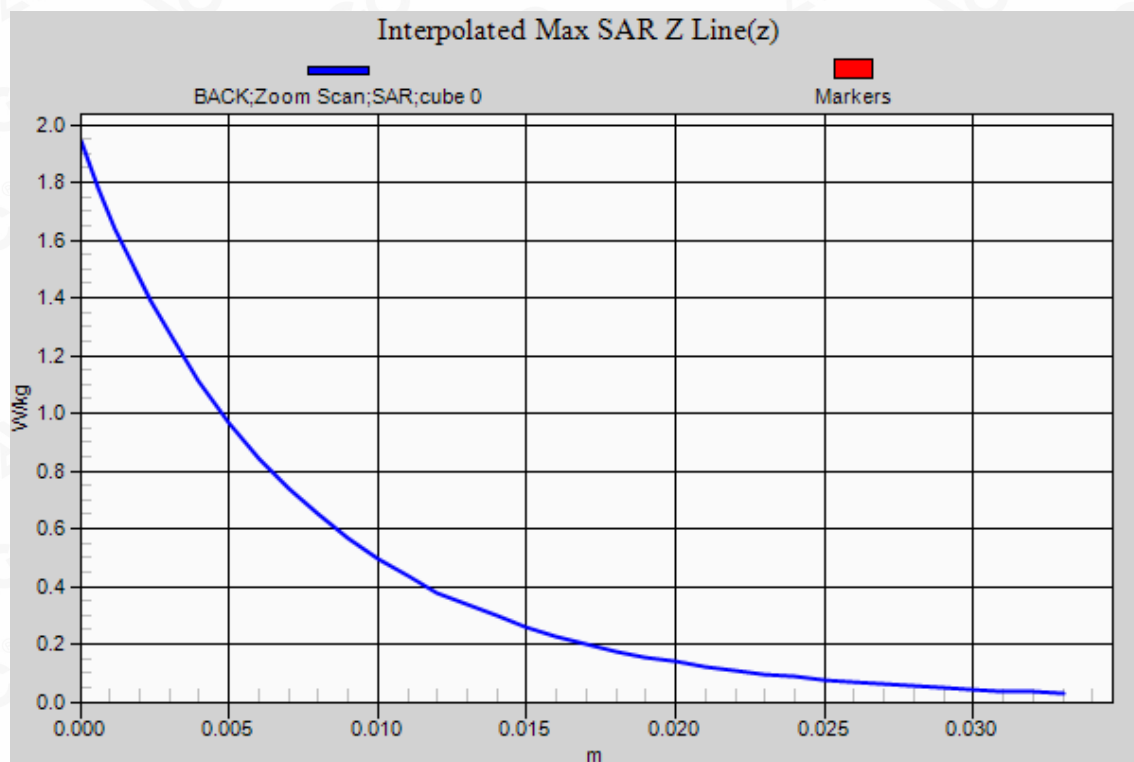

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 26 Mid-Touch-Right (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 09,2021**

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1;  
Frequency: 831.5 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.83$  mho/m;  $\epsilon_r = 44.38$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**RIGHT HEAD/R-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.362 W/kg



**RIGHT HEAD/R-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.894 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.409 W/kg

**SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.254 W/kg**

Maximum value of SAR (measured) = 0.368 W/kg

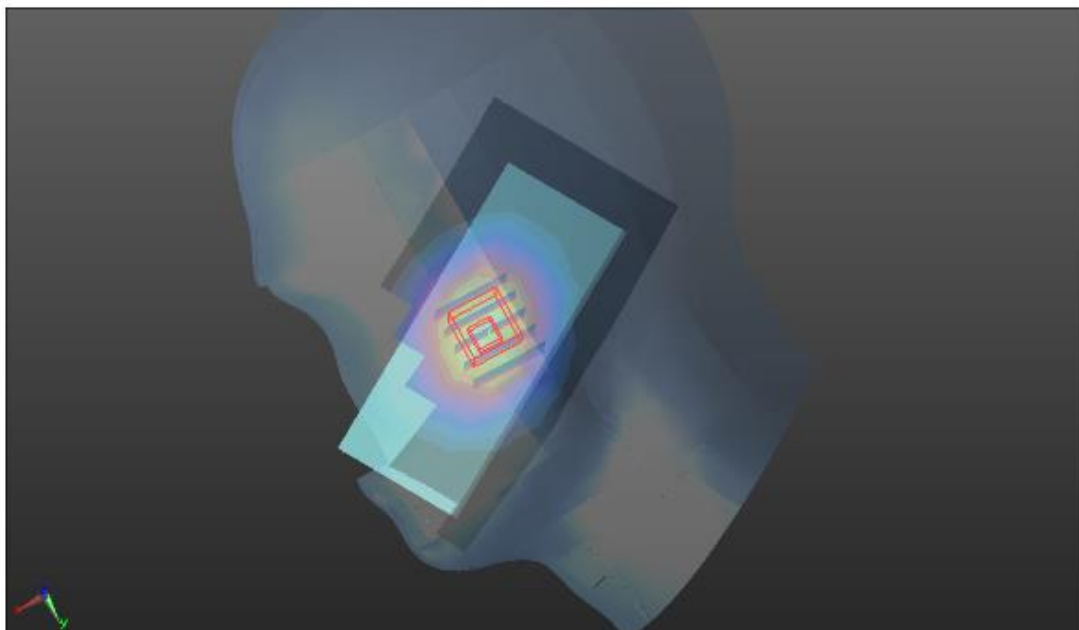

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 26 Mid-Body-Back (1 RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 09,2021**

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1;  
Frequency: 821.5 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.83$  mho/m;  $\epsilon_r = 44.38$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(10.13, 10.13, 10.13); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.383 W/kg



**BODY/BACK/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 20.552 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.264 W/kg**

Maximum value of SAR (measured) = 0.397 W/kg

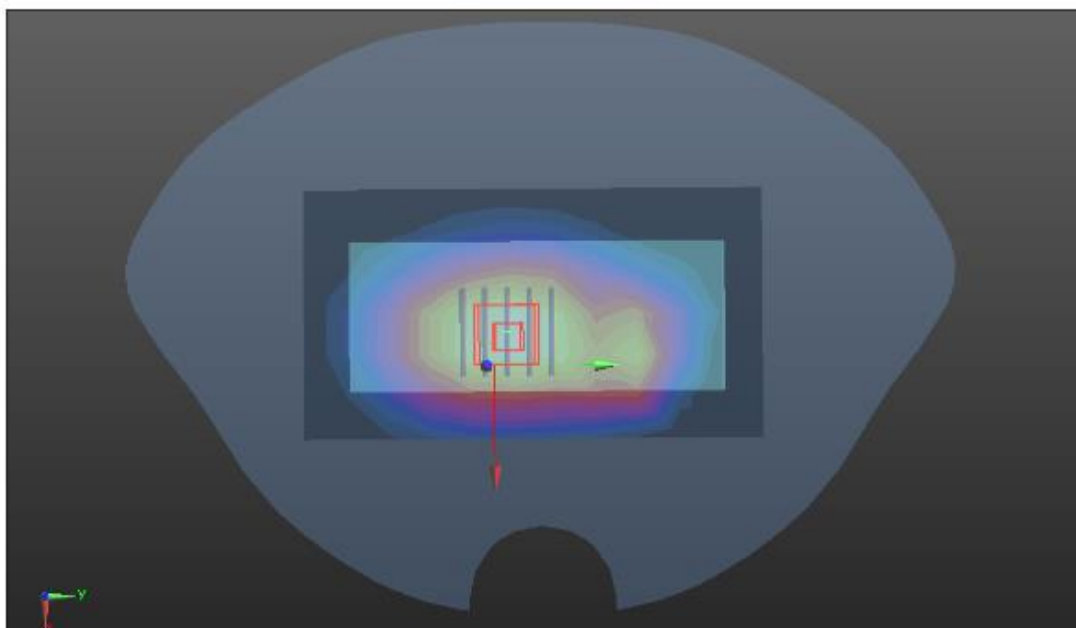


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>



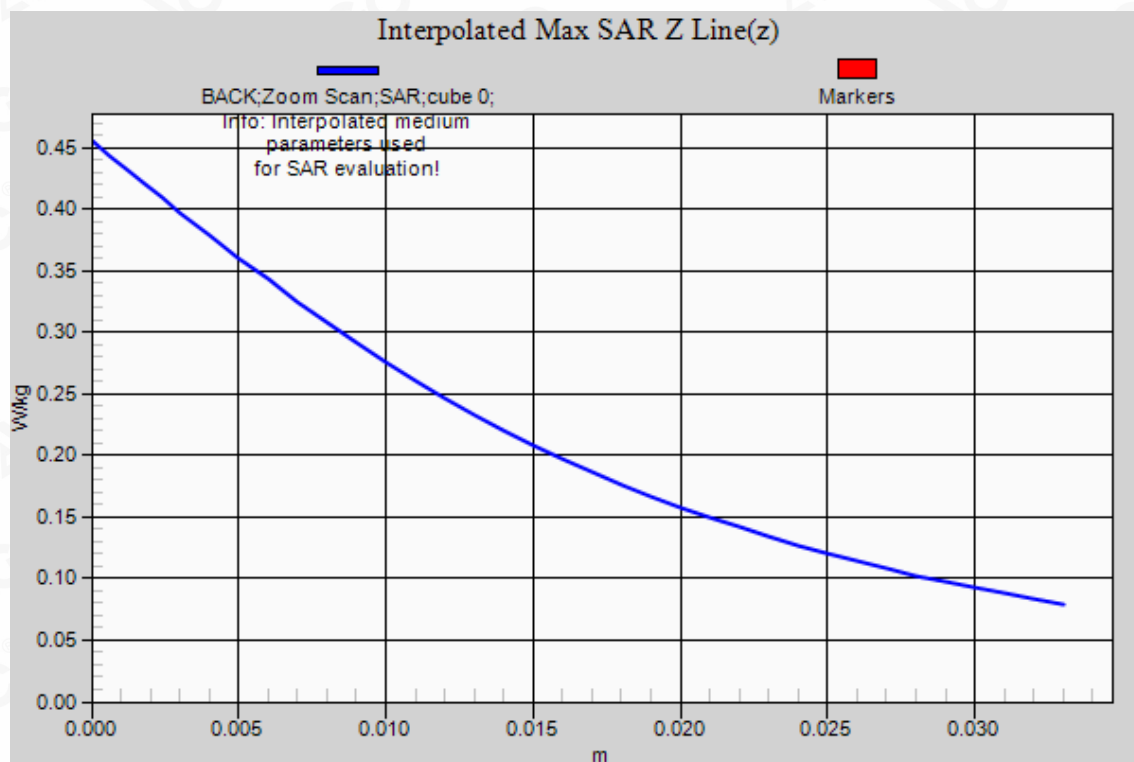

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 38 Mid-Touch-Left (1RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 19,2021**

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58;  
Frequency: 2595MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.90$  mho/m;  $\epsilon_r = 39.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(7.45, 7.45, 7.45); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**LEFT HEAD/L-C/Area Scan (7x12x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.424 W/kg


**LEFT HEAD/L-C/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.795 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.707 W/kg

**SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.193 W/kg**

Maximum value of SAR (measured) = 0.453 W/kg

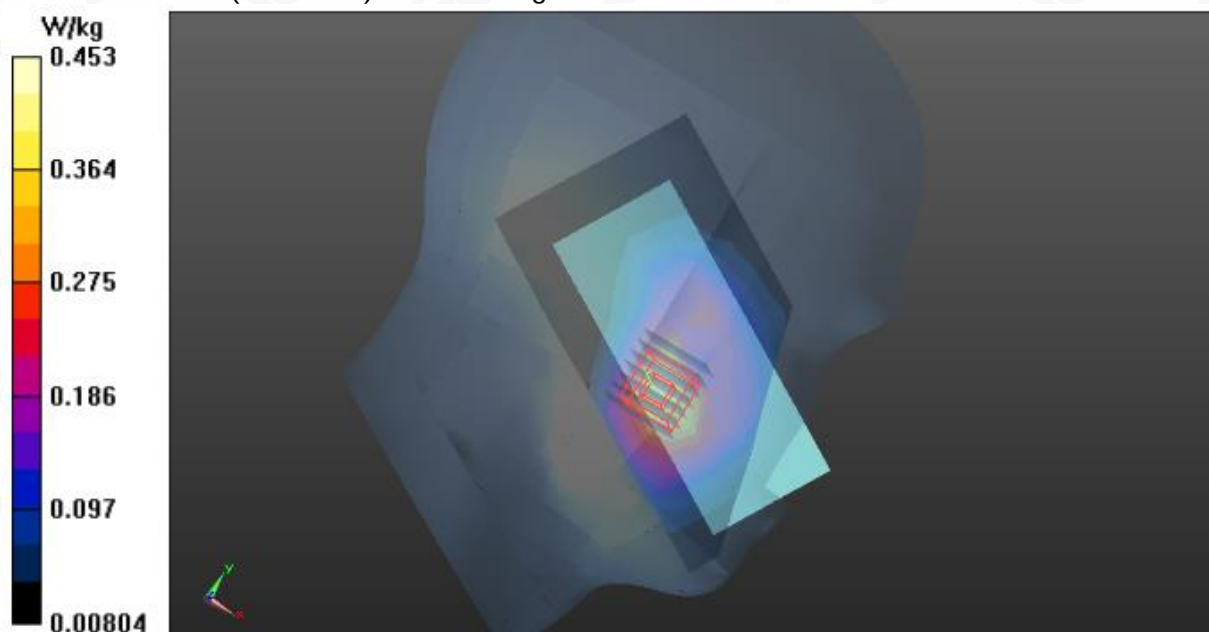

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



**Test Laboratory: AGC Lab**  
**LTE Band 38 High-Body-Back (1RB#0)**  
**DUT: Smartphone; Type: BS-02**

**Date: Jul. 19,2021**

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58;  
Frequency: 2610MHz; Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 37.68$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.8, Liquid temperature (°C): 21.6

DASY Configuration:

- Probe: EX3DV4 – SN:3953; ConvF(7.45, 7.45, 7.45); Calibrated: Jul. 29,2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 SN1398; Calibrated: May 17,2021
- Phantom: SAM (20deg probe tilt) with CRP v5.0; Type: QD000P40CD;
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**BODY/BACK-H/Area Scan (7x12x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.07 W/kg


**BODY/BACK-H/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.103 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.401 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

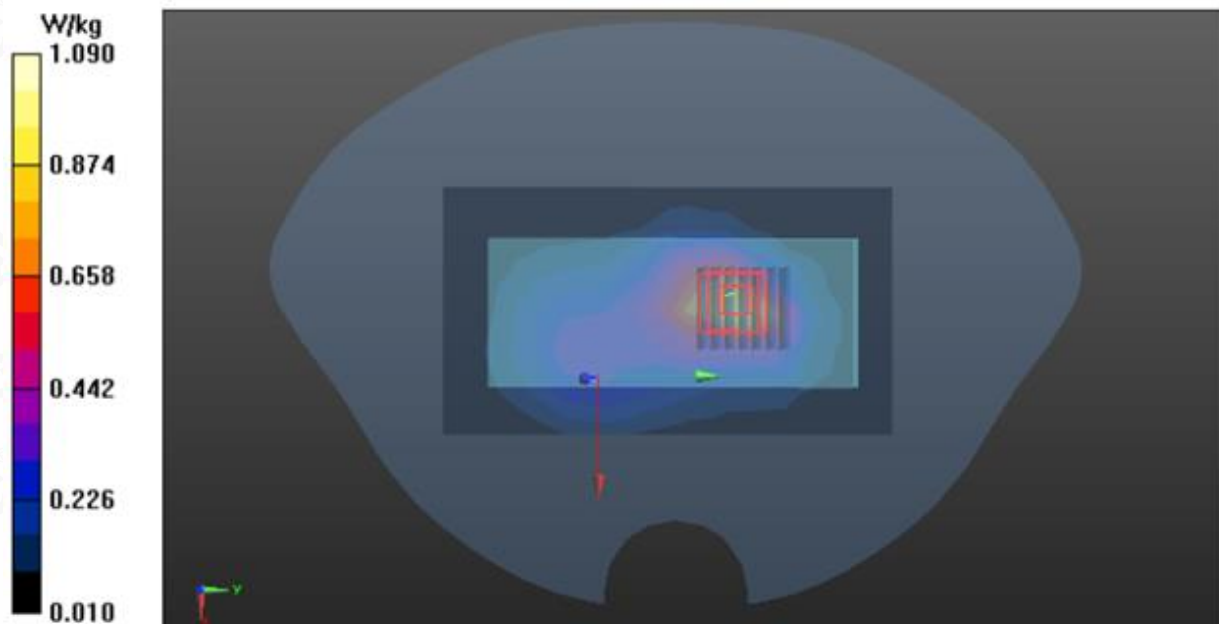


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



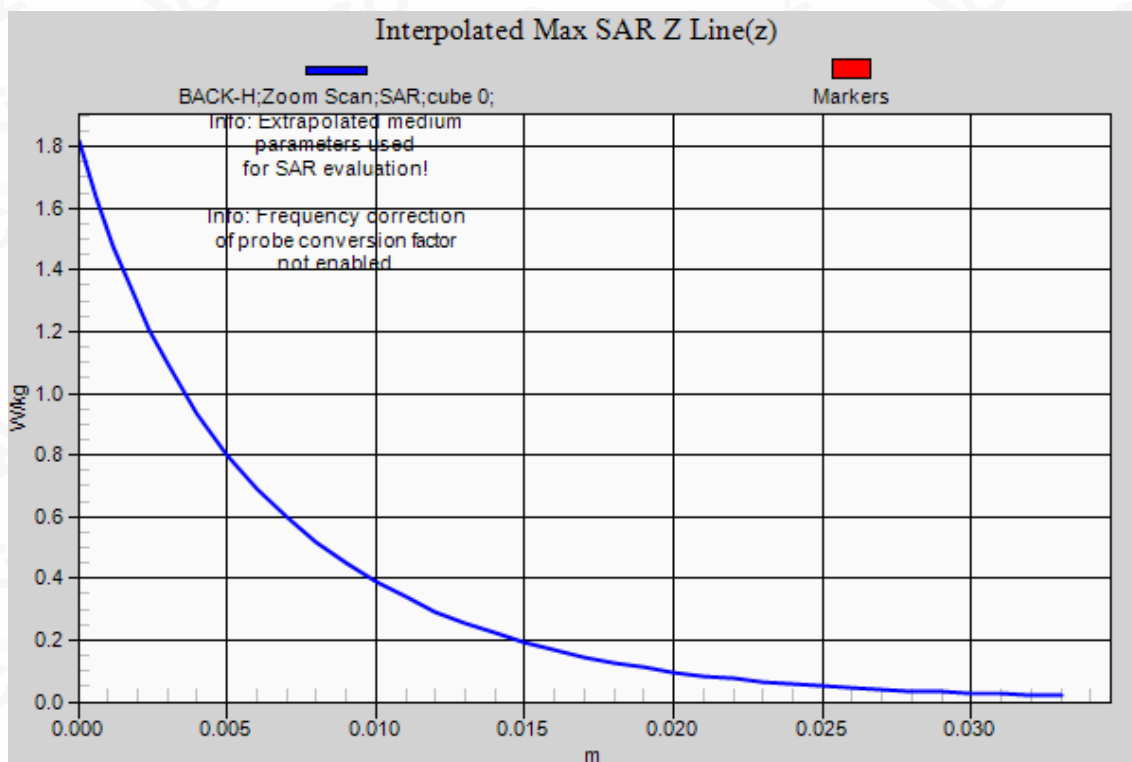

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc@agc-cert.com](mailto:agc@agc-cert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agc-cert.com](mailto:agc@agc-cert.com) Web: <http://cn.agc-cert.com/>

