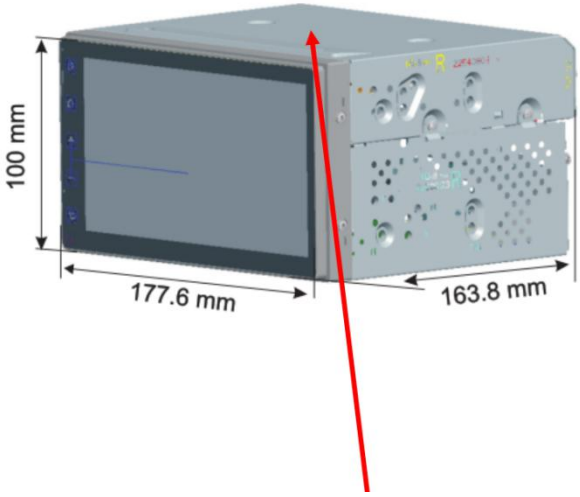
100 mm
177.6 mm
163.8 mm

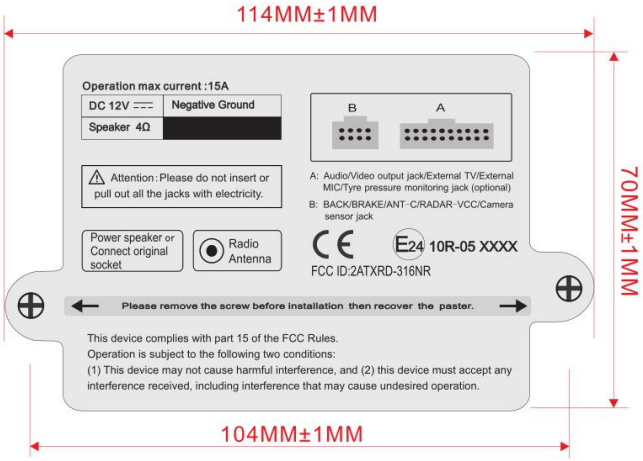
114MM±1MM
70MM±1MM
104MM±1MM
Operation max current :15A
DC 12V ⎓
Negative Ground
Speaker 4Ω
Attention: Please do not insert or pull out all the jacks with electricity.
Power speaker or Connect original socket
Radio Antenna
B
A
A: Audio/Video output jack/External TV/External MIC/Tyre pressure monitoring jack (optional)
B: BACK/BRAKE/ANT-C/RADAR-VCC/Camera sensor jack
E24 10R-05 XXXX
FCC ID:2ATXRD-316NR
Please remove the screw before installation then recover the paster.
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.