

Product Name: Notebook Computer	Report No: ITEZA2-202400111RF4
Product Model: IPASON P3 EyeSafe	Security Classification: Open
Version: V1.0	Total Page: 174

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
			

FCC Radio Test Report

FCC ID: 2ATY8-IPASONP3ES

This report concerns:Original Grant

Applicant:	Wuhan Ipason Technology Co., Ltd.
Address:	5th Floor, Multifunctional Building, No. 1, Ipason Avenue, Shekou Street, Huangpi District, Wuhan City, Hubei Province, China
Manufacturer:	Wuhan Ipason Technology Co., Ltd.
Address:	5th Floor, Multifunctional Building, No. 1, Ipason Avenue, Shekou Street, Huangpi District, Wuhan City, Hubei Province, China
Sample No:	1000032122
Product Name:	Notebook Computer
Brand Name:	IPASON
Model No.:	IPASON P3 EyeSafe
Test No.:	IPASON P3 EyeSafe

Date of Receipt:	2024/04/24
Date of Test:	2024/04/24~2024/07/09
Issued Date:	2024/07/10
Testing Lab:	TIRT

Note: This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen.

Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents

	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	12
2.3 DUTY CYCLE	14
2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	17
2.5 SUPPORT UNITS	17
3 .AC POWER LINE CONDUCTED EMISSIONS	18
3.1 LIMIT	18
3.2 TEST PROCEDURE	18
3.3 DEVIATIONFROMTESTSTANDARD	18
3.4 TESTSETUP	19
3.5 EUT OPERATION CONDITIONS	19
3.6 TEST RESULTS	19
4 . RADIATED EMISSIONS	20
4.1 LIMIT	20
4.2 TEST PROCEDURE	20
4.3 DEVIATIONFROMTESTSTANDARD	22
4.4 TESTSETUP	22
4.5 EUT OPERATION CONDITIONS	23
4.6 TEST RESULTS - 9 KHZTO 30MHZ	23
4.7 TEST RESULTS - 30 MHZTO 1000 MHZ	23
4.8 TEST RESULTS - ABOVE1000 MHZ	23
5 .BANDWIDTH	24
5.1 LIMIT	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM STANDARD	24
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS	25

Table of Contents	Page
6 .MAXIMUM OUTPUT POWER	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
7 .POWER SPECTRAL DENSITY	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 .FREQUENCY STABILITY	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . MEASUREMENT INSTRUMENTS LIST	30
10 .EUT TEST PHOTOS and EUT PHOTOS	31
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	41
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	43
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	44
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	46
APPENDIX E -BANDWIDTH	70
APPENDIX F -MAXIMUM OUTPUT POWER	97
APPENDIX G - POWER SPECTRAL DENSITY	128
APPENDIX H - Frequency Stability	159

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
ITEZA2-202400111RF4	V1.0	OriginalReport.	2024.07.10	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	NOTE (5)
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device
- (5) The manufacturer states that the frequency sability is in compliance with 15.407(g).

1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7°C
Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	DC 20V from AC/DC ADAPTER	Stone Tang
Radiated Emissions-9kHz to 30MHz	24.5°C	50%	DC 7.6V from battery or DC 20V from AC/DC ADAPTER	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	DC 7.6V from battery or DC 20V from AC/DC ADAPTER	Stone Tang
Radiated Emissions-Above 1000 MHz	26.0°C	53%	DC 7.6V from battery or DC 20V from AC/DC ADAPTER	Stone Tang
Bandwidth	25.0°C	56%	AC 120V/60Hz from AC/DC ADAPTER	Stone Tang
Maximum Output Power	24.9°C	54%	DC 7.6V from battery or DC 20V from AC/DC ADAPTER	Stone Tang
Power Spectral Density	25.1°C	62%	DC 7.6V from battery or DC 20V from AC/DC ADAPTER	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook Computer
Brand Name	IPASON
Test Model	IPASON P3 EyeSafe
Series Model	IPASON P3 EyeSafe
Model Difference(s)	N/A
Software Version	22h2
Hardware Version	P3ADL08
Power Rating	DC 7.6V from battery or DC 20V from adapter
Operation FrequencyBand(s)	UNII-1: 5180 MHz~5240 MHz UNII-2A: 5260 MHz ~ 5320 MHz UNII-2C: 5500 MHz ~ 5700 MHz UNII-3: 5745 MHz~5825MHz
Modulation Type	IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK) IEEE802.11ax:OFDMA(64QAM,16QAM,QPSK,BPSK,256QAM,1024QAM)
Maximum Output Power _UNII-1	IEEE 802.11ax20: 12.50dBm(0.017783W)
Maximum Output Power _UNII-2A	IEEE 802.11ac20: 14.41dBm(0.027606W)
Maximum Output Power _UNII-2C	IEEE 802.11ac20: 12.51dBm(0.017824W)
Maximum Output Power _UNII-3	IEEE 802.11n20: 12.17dBm(0.016482W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a	IEEE 802.11n40	IEEE 802.11ac80			
IEEE 802.11n20	IEEE 802.11ac40	IEEE 802.11ax80			
IEEE 802.11ac20					
IEEE 802.11ax20					
UNII-1					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a	IEEE 802.11n40	IEEE 802.11ac80			
IEEE 802.11n20	IEEE 802.11ac40	IEEE 802.11ax80			
IEEE 802.11ac20					
IEEE 802.11ax20					
UNII-2A					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a	IEEE 802.11n40	IEEE 802.11ac80			
IEEE 802.11n20	IEEE 802.11ac40	IEEE 802.11ax80			
IEEE 802.11ac20					
IEEE 802.11ax20					
UNII-2C					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
116	5580	110	5550		
136	5680				
140	5700				

IEEE 802.11a	IEEE 802.11n40	IEEE 802.11ac80			
IEEE 802.11n20	IEEE 802.11ac40	IEEE 802.11ax80			
IEEE 802.11ac20					
IEEE 802.11ax20					
UNII-3					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	Shen Zhen Xing Yuan Chuang Technology Co., Ltd	AL1621-YD	PIFA	N/A	3.29

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) The antenna is for testing and fixation purposes.

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1)
Mode 2	TX N20 ModeChannel 36/40/48 (UNII-1)
Mode 3	TX N40 Mode Channel 38/46 (UNII-1)
Mode 4	TX AC20 ModeChannel 36/40/48 (UNII-1)
Mode 5	TX AC40 ModeChannel 38/46 (UNII-1)
Mode 6	TX AC80 Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N40 Mode Channel 151/159 (UNII-3)
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC40 Mode Channel 151/159 (UNII-3)
Mode 12	TX AC80 Mode Channel 155 (UNII-3)
Mode 13	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX N20 Mode Channel 52/60/64 (UNII-2A)
Mode 15	TX N40 Mode Channel 54/62 (UNII-2A)
Mode 16	TX AC20 Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AC40 Mode Channel 54/62 (UNII-2A)
Mode 18	TX AC80 Mode Channel 58 (UNII-2A)
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 20	TX N20 Mode Channel 100/116/140 (UNII-2C)
Mode 21	TX N40 Mode Channel 102/110/134 (UNII-2C)
Mode 22	TX AC20 Mode Channel 100/116/140 (UNII-2C)
Mode 23	TX AC40 Mode Channel 102/110/134 (UNII-2C)
Mode 24	TX AC80 Mode Channel 106/122 (UNII-2C)
Mode 25	TX ax20 ModeChannel 36/40/48 (UNII-1)
Mode 26	TX ax40 ModeChannel 38/46 (UNII-1)
Mode 27	TX ax80 Mode Channel 42 (UNII-1)
Mode 28	TX ax20 Mode Channel 52/60/64 (UNII-2A)
Mode 29	TX ax40 Mode Channel 54/62 (UNII-2A)
Mode 30	TX ax80 Mode Channel 52/60/64 (UNII-2A)
Mode 31	TX ax20 Mode Channel 100/116/140 (UNII-2C)
Mode 32	TX ax40 Mode Channel 102/110/134 (UNII-2C)
Mode 33	TX ax80 Mode Channel 106/122 (UNII-2C)
Mode 34	TX ax20 Mode Channel 149/157/165 (UNII-3)
Mode 35	TX ax40 Mode Channel 151/159 (UNII-3)
Mode 36	TX ax80 Mode Channel 155 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test

Final Test Mode	Description
Mode 24	TX AC80 Mode Channel 155 (UNII-3)

Radiated Emissions Test - Below 1GHz

Final Test Mode	Description
Mode 24	TX AC80 Mode Channel 155 (UNII-3)

Radiated Emissions Test - Above 1GHz

Final Test Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1)
Mode 2	TX N20 Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N40 Mode Channel 38/46 (UNII-1)
Mode 6	TX AC80 Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N40 Mode Channel 151/159 (UNII-3)
Mode 10	TX AC80 Mode Channel 155 (UNII-3)

Conducted Test

Final Test Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1)
Mode 2	TX N20 Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N40 Mode Channel 38/46 (UNII-1)
Mode 4	TX AC20 Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC40 Mode Channel 38/46 (UNII-1)
Mode 6	TX AC80 Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N40 Mode Channel 151/159 (UNII-3)
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC40 Mode Channel 151/159 (UNII-3)
Mode 12	TX AC80 Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC80 Mode Channel 155 (UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11n20 mode, IEEE 802.11n40 mode, IEEE 802.11ac80 mode, only the worst cases are

documented for other test items.

2.3DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	1.40	1.43	97.90
		5200	1.39	1.42	97.89
		5240	1.39	1.43	97.20
		5260	1.40	1.43	97.90
		5280	1.39	1.43	97.20
		5320	1.39	1.43	97.20
		5500	1.39	1.43	97.20
		5580	1.39	1.43	97.20
		5700	1.40	1.43	97.90
		5745	1.39	1.42	97.89
		5785	1.39	1.43	97.20
		5825	1.39	1.43	97.20
		5180	1.30	1.34	97.01
		5200	1.30	1.34	97.01
11N20SISO	Ant1	5240	1.31	1.34	97.76
		5260	1.30	1.33	97.74
		5280	1.30	1.33	97.74
		5320	1.30	1.33	97.74
		5500	1.29	1.33	96.99
		5580	1.29	1.33	96.99
		5700	1.29	1.33	96.99
		5745	1.31	1.34	97.76
		5785	1.30	1.34	97.01
		5825	1.30	1.34	97.01
		5190	0.65	0.69	94.20
		5230	0.65	0.68	95.59
		5270	0.65	0.68	95.59
		5310	0.65	0.68	95.59
11N40SISO	Ant1	5510	0.65	0.68	95.59
		5550	0.65	0.68	95.59
		5670	0.65	0.68	95.59
		5755	0.65	0.68	95.59
		5795	0.65	0.68	95.59
		5180	1.31	1.35	97.04
		5200	1.32	1.35	97.78
		5240	1.31	1.35	97.04
		5260	1.32	1.35	97.78
		5280	1.29	1.33	96.99
		5320	1.29	1.33	96.99
		5500	1.29	1.33	96.99
		5580	1.28	1.32	96.97
		5700	1.29	1.33	96.99
11AC20SISO	Ant1	5745	1.31	1.34	97.76
		5785	1.31	1.35	97.04
		5825	1.32	1.35	97.78
		5190	0.64	0.67	95.52
		5230	0.63	0.67	94.03
		5270	0.63	0.67	94.03
		5310	0.64	0.67	95.52
		5510	0.64	0.67	95.52
		5550	0.64	0.67	95.52
		5670	0.63	0.67	94.03
		5755	0.65	0.69	94.20
		5795	0.66	0.69	95.65
		5210	0.33	0.36	91.67
		5290	0.33	0.36	91.67
11AC40SISO	Ant1	5530	0.32	0.36	88.89
		5610	0.32	0.36	88.89
		5775	0.32	0.36	88.89
		5180	1.31	1.35	97.04
		5200	1.31	1.34	97.76
11AC80SISO	Ant1	5240	1.30	1.35	96.30
		5260	1.30	1.35	96.30
		5280	1.31	1.35	97.04
		5210	0.33	0.36	91.67
		5290	0.33	0.36	91.67
11AX20SISO	Ant1	5530	0.32	0.36	88.89
		5610	0.32	0.36	88.89
		5775	0.32	0.36	88.89
		5180	1.31	1.35	97.04
		5200	1.31	1.34	97.76

		5320	1.31	1.34	97.76
		5500	1.31	1.35	97.04
		5580	1.31	1.35	97.04
		5700	1.31	1.35	97.04
		5745	1.31	1.35	97.04
		5785	1.31	1.35	97.04
		5825	1.31	1.35	97.04
11AX40SISO	Ant1	5190	0.66	0.69	95.65
		5230	0.65	0.69	94.20
		5270	0.65	0.69	94.20
		5310	0.65	0.69	94.20
		5510	0.65	0.69	94.20
		5550	0.65	0.69	94.20
		5670	0.65	0.69	94.20
		5755	0.65	0.68	95.59
		5795	0.66	0.69	95.65
		5210	0.33	0.36	91.67
11AX80SISO	Ant1	5290	0.33	0.36	91.67
		5530	0.32	0.36	88.89
		5610	0.33	0.36	91.67
		5775	0.32	0.36	88.89

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11n20:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11n40:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac20:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac40:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac80:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ax20:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ax40:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ax80:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set $VBW > 1/T$, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED EUT**2.5 SUPPORT UNITS**

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/

3.AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TESTSETUP

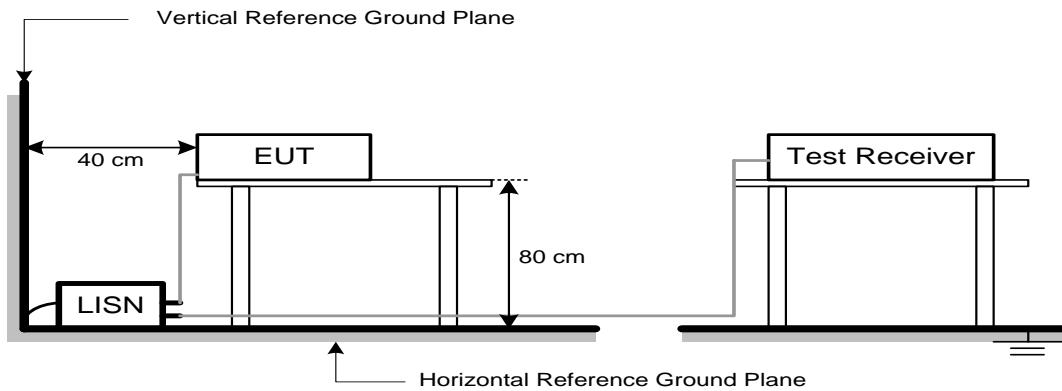

The LISN edge is arranged parallel to the edge of the test table

The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
	-27	68.2
5725-5850	10	105.2
NOTE (2)	15.6	110.8
	27	122.2

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)

h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)

i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for PK value 1MHz / 1/THz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector
Start ~ Stop Frequency	1 GHz~40GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

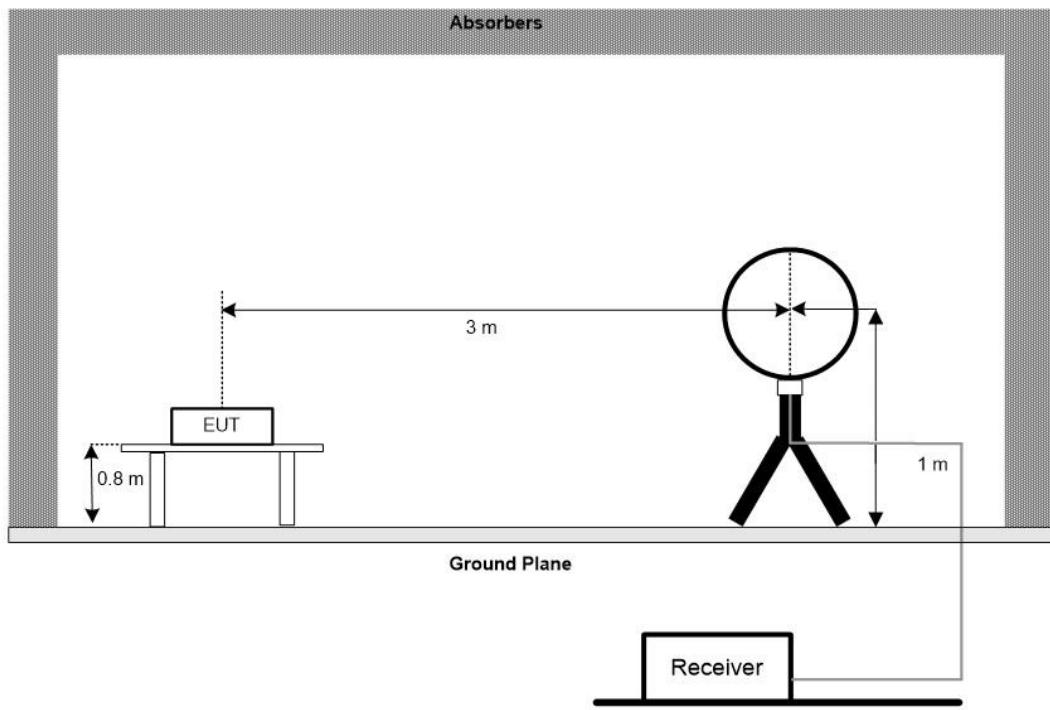

30 MHz to 1 GHz

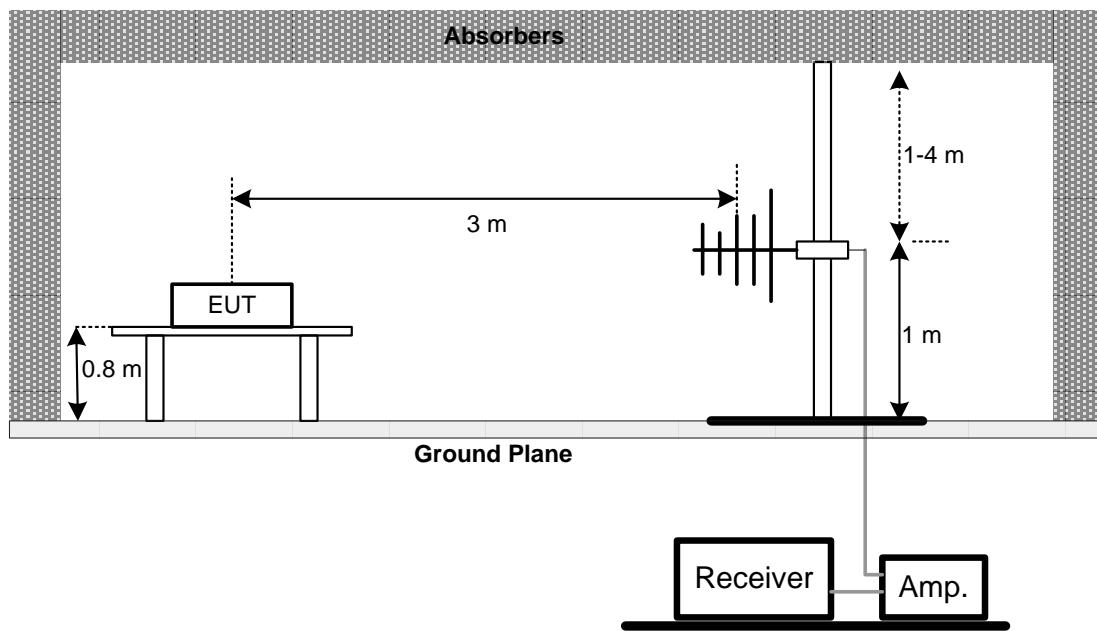

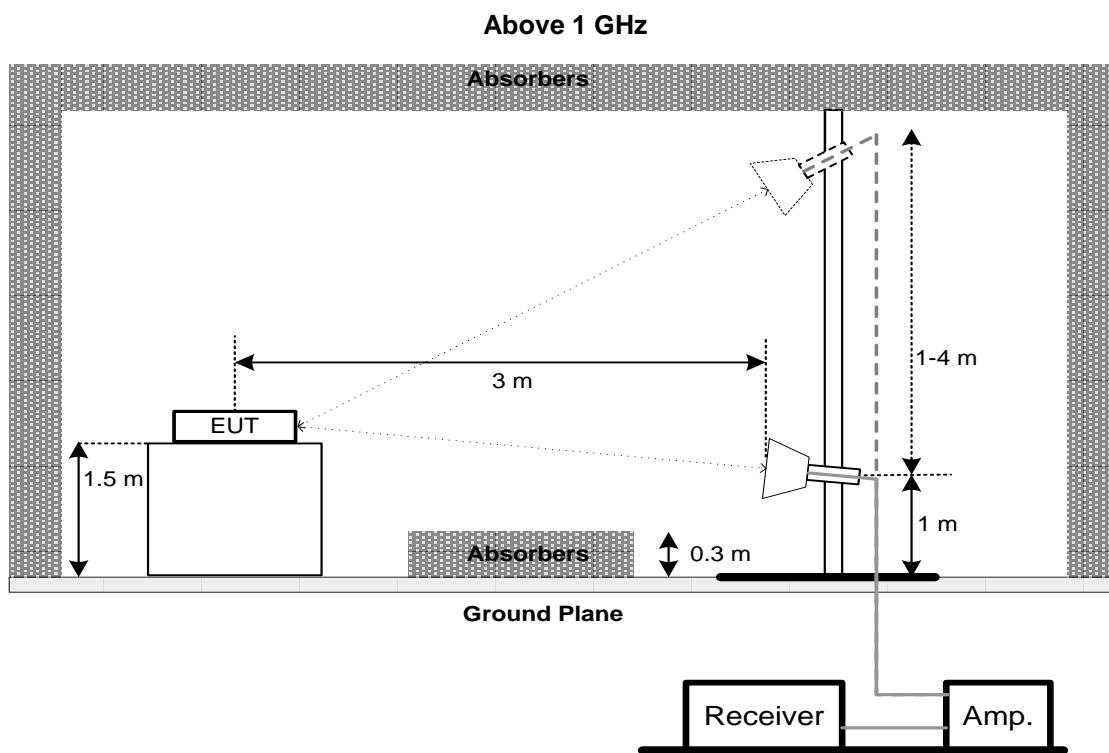

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZTO 30MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZTO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5.BANDWIDTH

5.1LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6dB Bandwidth	Minimum 500 kHz	5725-5850

5.2TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:

For UNII-1, UNII-2C, UNII-2C

Spectrum Parameter	Setting
Span Frequency	> 26dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26dB / 6dB below carrier.

5.3DEVIATION FROM STANDARD

No deviation.

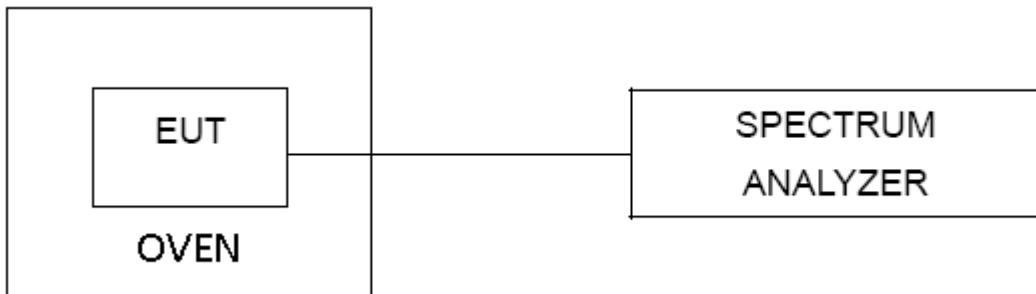5.4 TEST SETUP**5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6.MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	MaximumOutput Power	AP device:1 Watt (30dBm)	5150-5250
		Client device: 250mW (23.98dBm)	
		250mW (23.98dBm)	5250-5350
		250mW (23.98dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

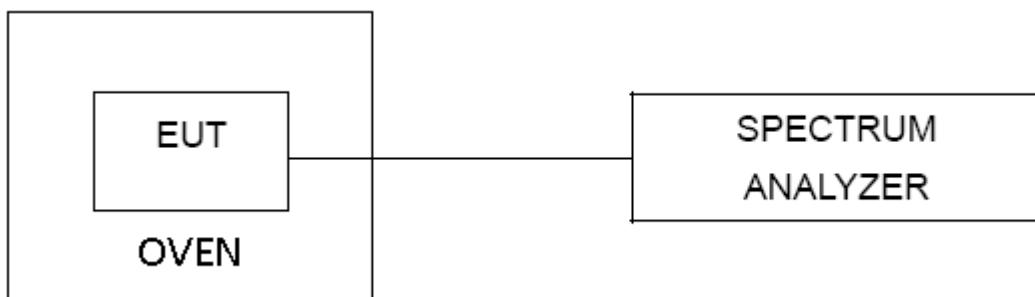

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device:17dBm/MHz	5150-5250
		Client device:11dBm/MHz	
		11dBm/MHz	5250-5350
		11dBm/MHz	5470-5725
		30dBm/500kHz	5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
For UNII-1


Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz.
VBW	3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	500KHz.
VBW	2MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

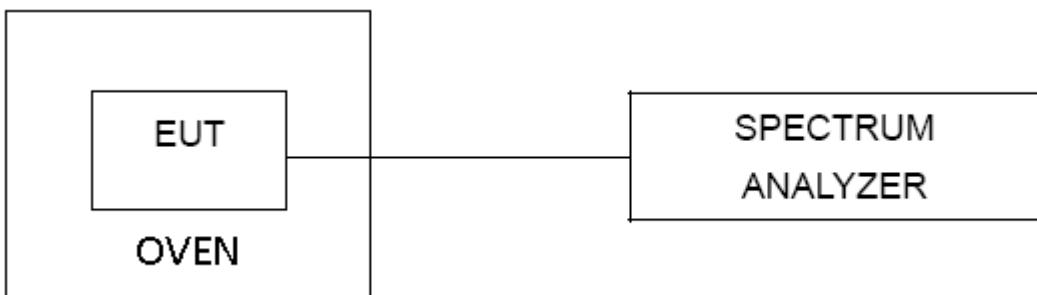7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIXG.

8.FREQUENCY STABILITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

8.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissionsbandwidth
RBW	10 kHz
VBW	10kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is -30°C~75°C.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

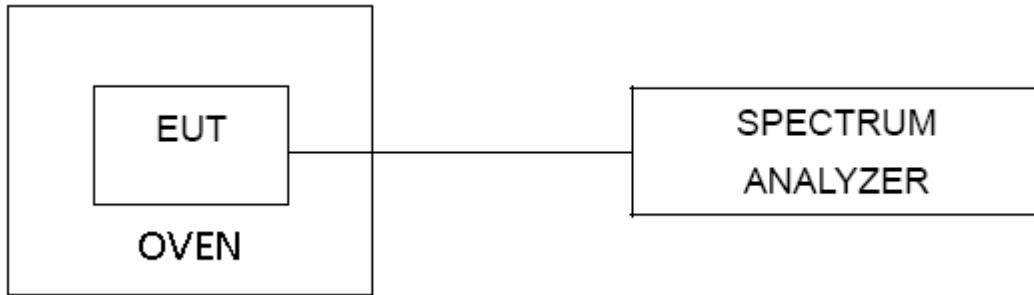

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

N/A.

9. MEASUREMENT INSTRUMENTS LIST

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2024/01/05	2025/01/04
Integral Antenna	Schwarzbeck	VULB 9163	01314	2022.12.11	2024.12.10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2022.12.11	2024.12.10
Preamplifier	Emtrace	RP01A	'02017	2024/01/05	2025/01/04
Preamplifier	Schwarzbeck	BBV9744	00143	2024/01/05	2025/01/04
Loop Antenna	ZHINAN	ZN30900A	12024	2024/01/05	2025/01/04
Horn Antenna	Schwarzbeck	BBHA9170	00956	2024/01/05	2025/01/04
RF Cable	/	LMR400UF-NMNM-7.0M	/	2024/01/05	2025/01/04
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2024/01/05	2025/01/04
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-102611-mk	2023/11/02	2024/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-102915-Bp	2023/11/02	2024/11/01
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2024/01/05	2025/01/04
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2024/01/05	2025/01/04

10. EUT TEST PHOTOS and EUT PHOTOS**AC Power Line Conducted Emissions Test Photos****Conducted RF Test Photos**

Radiated Emissions Test Photos**30 MHz to 1 GHz****Radiated Emissions Test Photos****Above 1 GHz**

EUT PHOTOS

