

# FCC SAR Measurement and Test Report

For

**Kano Computing Limited**

**3 Finsbury Ave London EC2M 2PA, London, United Kingdom**

**FCC ID: 2ATYD-1101**

**Test Standards:** FCC Part 2.1093,  
ANSI / IEEE C95.1 :2005+A1:2010  
ANSI / IEEE C95.3 :2002(R2008)

**Product Description:** Kano PC

**Tested Model:** 1101

**Report No.:** WTX19X12089947W

**Sample Received Date:** 2019-12-24

**Tested Date:** 2019-12-24 to 2020-01-02

**Issued Date:** 2020-01-03

**Tested By:** Ruler Liu / Engineer

**Reviewed By:** Silin Chen / EMC Manager

**Approved & Authorized By:** Jandy So / PSQ Manager

**Prepared By:**

*Ruler Liu*

*Silin chen*

*Jandyso*



**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1. General Information .....</b>                               | <b>3</b>  |
| 1.1 Product Description for Equipment Under Test (EUT).....       | 3         |
| 1.2 Test Standards .....                                          | 5         |
| 1.3 Test Methodology .....                                        | 5         |
| 1.4 Test Facility .....                                           | 5         |
| <b>2. Summary of Test Results .....</b>                           | <b>6</b>  |
| <b>3. Specific Absorption Rate (SAR).....</b>                     | <b>7</b>  |
| 3.1 Introduction.....                                             | 7         |
| 3.2 SAR Definition .....                                          | 7         |
| <b>4. SAR Measurement System.....</b>                             | <b>8</b>  |
| 4.1 The Measurement System .....                                  | 8         |
| 4.2 Probe .....                                                   | 8         |
| 4.3 Probe Calibration Process.....                                | 10        |
| 4.4 Phantom .....                                                 | 11        |
| 4.5 Device Holder.....                                            | 11        |
| 4.6 Test Equipment List.....                                      | 12        |
| <b>5. Tissue Simulating Liquids .....</b>                         | <b>13</b> |
| 5.1 Composition of Tissue Simulating Liquid.....                  | 13        |
| 5.2 Tissue Dielectric Parameters for Head and Body Phantoms ..... | 14        |
| 5.3 Tissue Calibration Result.....                                | 15        |
| <b>6. SAR Measurement Evaluation .....</b>                        | <b>16</b> |
| 6.1 Purpose of System Performance Check.....                      | 16        |
| 6.2 System Setup .....                                            | 16        |
| 6.3 Validation Results.....                                       | 17        |
| <b>7. EUT Testing Position .....</b>                              | <b>18</b> |
| 7.1 EUT Antenna Position .....                                    | 18        |
| 7.2 EUT Testing Position.....                                     | 19        |
| <b>8. SAR Measurement Procedures .....</b>                        | <b>20</b> |
| 8.1 Measurement Procedures .....                                  | 20        |
| 8.2 Spatial Peak SAR Evaluation .....                             | 20        |
| 8.3 Area & Zoom Scan Procedures .....                             | 21        |
| 8.4 Volume Scan Procedures .....                                  | 21        |
| 8.5 SAR Averaged Methods .....                                    | 21        |
| 8.6 Power Drift Monitoring .....                                  | 21        |
| <b>9. SAR Test Result .....</b>                                   | <b>22</b> |
| 9.1 Conducted RF Output Power .....                               | 22        |
| 9.2 Test Results for Standalone SAR Test.....                     | 29        |
| 9.3 Simultaneous Multi-band Transmission SAR Analysis .....       | 31        |
| <b>10. Measurement Uncertainty .....</b>                          | <b>34</b> |
| 10.1 Uncertainty for EUT SAR Test.....                            | 34        |
| 10.2 Uncertainty for System Performance Check.....                | 35        |
| <b>Annex A. Plots of System Performance Check .....</b>           | <b>37</b> |
| <b>Annex B. Plots of SAR Measurement .....</b>                    | <b>45</b> |
| <b>Annex C. EUT Photos .....</b>                                  | <b>62</b> |
| <b>Annex D. Test Setup Photos .....</b>                           | <b>64</b> |
| <b>Annex E. Calibration Certificate.....</b>                      | <b>66</b> |

## 1. General Information

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Kano Computing Limited  
Address of applicant: 3 Finsbury Ave London EC2M 2PA, London, United Kingdom

Manufacturer: Kano Computing Limited  
Address of manufacturer: 3 Finsbury Ave London EC2M 2PA, London, United Kingdom

| General Description of EUT:                                                                                                                                                                                                                                                              |                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Product Name:                                                                                                                                                                                                                                                                            | Kano PC                                                                                          |
| Trade Name:                                                                                                                                                                                                                                                                              | Kano                                                                                             |
| Model No.:                                                                                                                                                                                                                                                                               | 1101                                                                                             |
| Adding Model:                                                                                                                                                                                                                                                                            | 1101-01, 1101-02, 1101B-02, 1101-03, 1101-04, 1110-01, 1110-02, 1110B-02, 1110-03, 1110-04, 1110 |
| Rated Voltage:                                                                                                                                                                                                                                                                           | DC 12V                                                                                           |
| Battery capacity:                                                                                                                                                                                                                                                                        | /                                                                                                |
| Software Version:                                                                                                                                                                                                                                                                        | /                                                                                                |
| Hardware Version:                                                                                                                                                                                                                                                                        | /                                                                                                |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model 1101, but the circuit and the electronic construction do not change, declared by the manufacturer.</i> |                                                                                                  |

| <b>Technical Characteristics of EUT:</b> |                                                                                         |
|------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Wi-Fi(5G)</b>                         |                                                                                         |
| Support Standards:                       | 802.11a, 802.11n(HT20/40), 802.11ac(HT20/40/80)                                         |
| Frequency Range:                         | Band 1: 5180-5240MHz,Band 2: 5260-5320MHz,<br>Band 3: 5500-5700MHz,Band 4: 5745-5825MHz |
| RF Output Power:                         | 15.23dBm (Conducted)                                                                    |
| Type of Modulation:                      | BPSK, QPSK, 16-QAM, 64-QAM                                                              |
| Type of Antenna:                         | Integral Antenna                                                                        |
| Antenna Gain:                            | 1.6dBi                                                                                  |
| <b>WIFI(2.4G)</b>                        |                                                                                         |
| Support Standards:                       | 802.11b, 802.11g, 802.11n                                                               |
| Frequency Range:                         | 2412-2462MHz for 11b/g/n(HT20)<br>2422-2452MHz for 11n(HT40)                            |
| RF Output Power:                         | 15.43dBm (Conducted)                                                                    |
| Type of Modulation:                      | CCK, QPSK, BPSK, 16QAM, 64QAM                                                           |
| Data Rate:                               | 1-11Mbps, 6-54Mbps, up to 150Mbps                                                       |
| Quantity of Channels:                    | 11/7                                                                                    |
| Channel Separation:                      | 5MHz                                                                                    |
| Antenna Type:                            | Integral Antenna                                                                        |
| Antenna Gain:                            | 1.6dBi                                                                                  |
| <b>Bluetooth</b>                         |                                                                                         |
| Bluetooth Version:                       | V5.0                                                                                    |
| Frequency Range:                         | 2402-2480MHz                                                                            |
| RF Output Power:                         | 8.96dBm (Conducted)                                                                     |
| Data Rate:                               | 1Mbps, 2Mbps, 3Mbps                                                                     |
| Modulation:                              | GFSK, Pi/4 QDPSK, 8DPSK                                                                 |
| Quantity of Channels:                    | 79/40                                                                                   |
| Channel Separation:                      | 1MHz/2MHz                                                                               |
| Antenna Type:                            | Integral Antenna                                                                        |
| Antenna Gain:                            | 1.6dBi                                                                                  |

## 1.2 Test Standards

The following report is prepared on behalf of the Kano Computing Limited in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-2005+A1:2010, ANSI / IEEE C95.3 :2002(R2008), IEEE 1528-2013, and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02 and KDB 616217 D04 v01r02 and 248227 D01 802 11 Wi-Fi SAR v02r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

## 1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

| Frequency Band            | Body<br>(0mm Gap)                   | SAR <sub>lg</sub><br>Limit<br>(W/kg) |
|---------------------------|-------------------------------------|--------------------------------------|
|                           | Maximum SAR <sub>lg</sub><br>(W/kg) |                                      |
| WLAN 2.4GHz               | 0.730                               | 1.6                                  |
| WLAN 5.3GHz               | <b>0.837</b>                        | 1.6                                  |
| WLAN 5.6GHz               | 0.700                               | 1.6                                  |
| WLAN 5.8GHz               | 0.717                               | 1.6                                  |
| Simultaneous Transmission | <b>1.168</b>                        | 1.6                                  |

**Remark:**

*The highest reported SAR values for body and simultaneous transmission conditions are **0.837W/kg** and **1.168W/kg** respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005+A1:2010, and had been tested in accordance with the measurement methods and procedure specified in KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

### 3. Specific Absorption Rate (SAR)

---

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4. SAR Measurement System

---

### 4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


### 4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm

- Probe linearity: <0.25 dB
  - Axial Isotropy: <0.25 dB
  - Spherical Isotropy: <0.50 dB
  - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

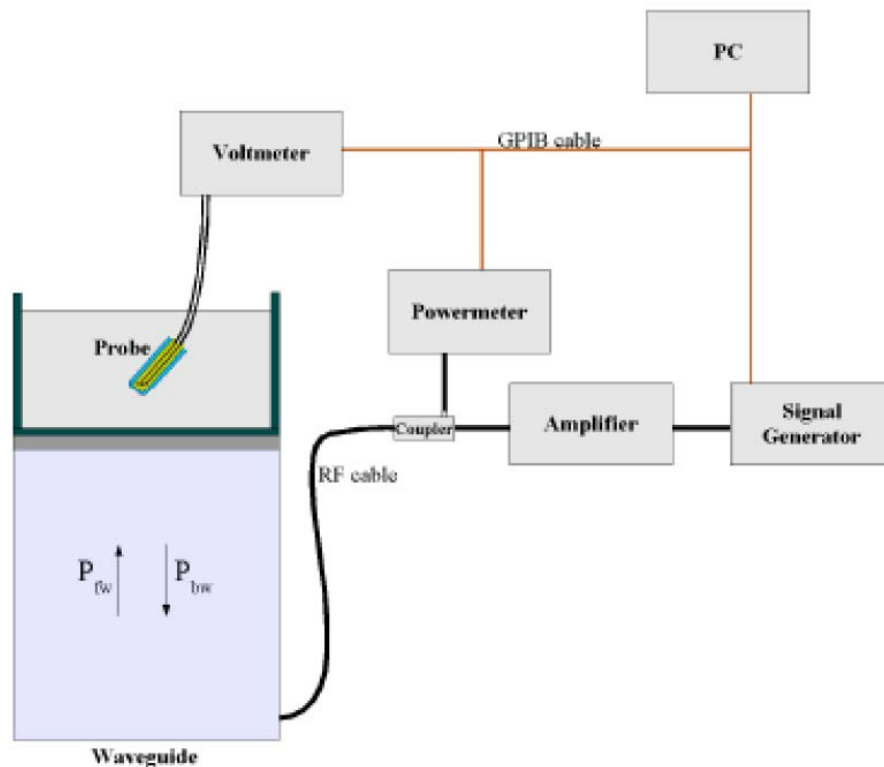

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P<sub>fw</sub> = Forward Power

P<sub>bw</sub> = Backward Power

a and b = Waveguide dimensions

l = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 4.3 Probe Calibration Process

#### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

#### Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

#### 4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

#### 4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

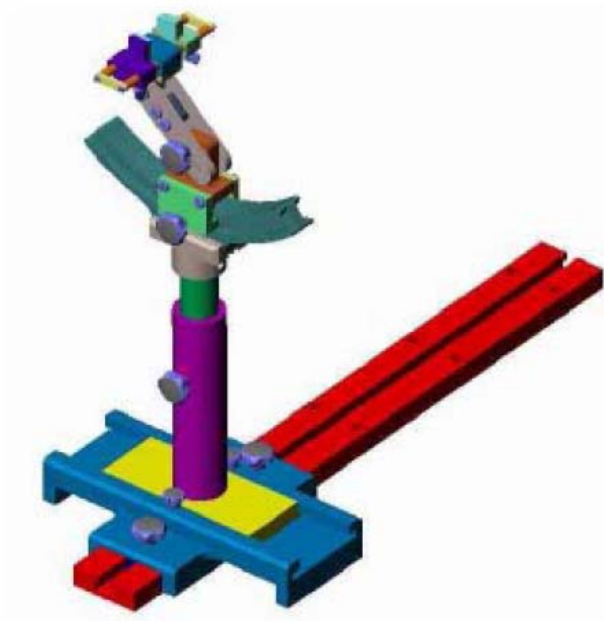

| System Material | Permittivity | Loss Tangent |
|-----------------|--------------|--------------|
| Delrin          | 3.7          | 0.005        |

#### 4.6 Test Equipment List

| Description          | Manufacturer    | Model         | Serial Number          | Cal. Date  | Due. Date  |
|----------------------|-----------------|---------------|------------------------|------------|------------|
| E-Field Probe        | MVG             | SSE5          | SN 09/13 EP168         | 2019-05-22 | 2020-05-21 |
| E-Field Probe        | MVG             | SSE2          | SN 45/15 EPGO280       | 2019-07-08 | 2020-07-07 |
| 2450MHz Dipole       | MVG             | SID2450       | SN 13/15 DIP 2G450-364 | 2019-03-16 | 2020-03-15 |
| 5 GHz Waveguide      | MVG             | SWG5500       | SN 49/16 WGA45         | 2019-07-15 | 2020-07-14 |
| Dielectric Probe Kit | SATIMO          | SCLMP         | SN 47/12 OCPG49        | 2019-03-16 | 2020-03-15 |
| SAM Phantom          | SATIMO          | SAM           | SN/ 47/12 SAM95        | N/A        | N/A        |
| MULTIMETER           | KEITHLEY        | Keithley 2000 | 4006367                | 2019-04-30 | 2020-04-29 |
| Power meter          | Keithley        | 3500          | JC-2017-09-001         | 2019-04-30 | 2020-04-29 |
| Power meter          | Keithley        | 3500          | JC-2017-09-001         | 2019-04-30 | 2020-04-29 |
| Power Sensor         | Agilent         | 11636B        | JC-2017-10-002         | 2019-04-30 | 2020-04-29 |
| Signal Generator     | Rohde & Schwarz | SMR20         | 100047                 | 2019-04-30 | 2020-04-29 |
| Spectrum Analyzer    | Agilent         | E4407B        | MY41440400             | 2019-04-30 | 2020-04-29 |
| Universal Tester     | Rohde & Schwarz | CMU200        | 112012                 | 2019-04-30 | 2020-04-29 |
| Network Analyzer     | HP              | 8753C         | SEMT-1064              | 2019-04-30 | 2020-04-29 |
| Directional Couplers | Agilent         | 778D          | 20160                  | 2019-04-30 | 2020-04-29 |

## 5. Tissue Simulating Liquids

### 5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



**Liquid Height for Body SAR**

#### The Composition of Tissue Simulating Liquid

| Frequency<br>(MHz) | Water<br>(%) | Salt<br>(%) | Sugar<br>(%) | HEC<br>(%) | Preventol<br>(%) | DGBE<br>(%) |
|--------------------|--------------|-------------|--------------|------------|------------------|-------------|
| <b>Body</b>        |              |             |              |            |                  |             |
| 2450               | 68.6         | 0.1         | 0            | 0          | 0                | 31.3        |

| Frequency<br>(MHz) | Water<br>(%) | Hexyl Carbitol<br>(%) | Triton X-100<br>(%) |
|--------------------|--------------|-----------------------|---------------------|
| <b>Body</b>        |              |                       |                     |
| 5200-5800          | 78.6         | 10.7                  | 10.7                |

## 5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

| Target Frequency<br>(MHz) | Head                         |                                  | Body                         |                                  |
|---------------------------|------------------------------|----------------------------------|------------------------------|----------------------------------|
|                           | Conductivity<br>( $\sigma$ ) | Permittivity<br>( $\epsilon_r$ ) | Conductivity<br>( $\sigma$ ) | Permittivity<br>( $\epsilon_r$ ) |
| 150                       | 0.76                         | 52.3                             | 0.80                         | 61.9                             |
| 300                       | 0.87                         | 45.3                             | 0.92                         | 58.2                             |
| 450                       | 0.87                         | 43.5                             | 0.94                         | 56.7                             |
| 750                       | 0.89                         | 41.9                             | 0.96                         | 55.5                             |
| 835                       | 0.90                         | 41.5                             | 0.97                         | 55.2                             |
| 900                       | 0.97                         | 41.5                             | 1.05                         | 55.0                             |
| 915                       | 0.98                         | 41.5                             | 1.06                         | 55.0                             |
| 1450                      | 1.20                         | 40.5                             | 1.30                         | 54.0                             |
| 1610                      | 1.29                         | 40.3                             | 1.40                         | 53.8                             |
| 1800-2000                 | 1.40                         | 40.0                             | 1.52                         | 53.3                             |
| <b>2450</b>               | 1.80                         | 39.2                             | <b>1.95</b>                  | <b>52.7</b>                      |
| 3000                      | 2.40                         | 38.5                             | 2.73                         | 52.0                             |
| 5200                      | 4.66                         | 36.0                             | 5.30                         | 49.0                             |
| <b>5300</b>               | <b>35.9</b>                  | <b>4.76</b>                      | <b>5.42</b>                  | <b>48.9</b>                      |
| <b>5600</b>               | 5.07                         | 35.5                             | <b>5.77</b>                  | <b>48.5</b>                      |
| <b>5800</b>               | 5.27                         | 35.3                             | <b>6.00</b>                  | <b>48.2</b>                      |

### 5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

#### Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

| Body Tissue Simulating Liquid |               |                         |                        |              |                             |                            |              |              |            |
|-------------------------------|---------------|-------------------------|------------------------|--------------|-----------------------------|----------------------------|--------------|--------------|------------|
| Freq.<br>MHz.                 | Temp.<br>(°C) | Conductivity            |                        |              | Permittivity                |                            |              | Limit<br>(%) | Date       |
|                               |               | Reading<br>( $\sigma$ ) | Target<br>( $\sigma$ ) | Delta<br>(%) | Reading<br>( $\epsilon_r$ ) | Target<br>( $\epsilon_r$ ) | Delta<br>(%) |              |            |
| 2450                          | 21.3          | 1.91                    | 1.95                   | -2.05        | 52.01                       | 52.70                      | -1.31        | $\pm 5$      | 2019-12-30 |
| 5400                          | 21.3          | 5.26                    | 5.42                   | -2.95        | 48.50                       | 48.9                       | -0.82        | $\pm 5$      | 2019-12-31 |
| 5600                          | 21.3          | 5.52                    | 5.77                   | -4.33        | 48.30                       | 48.5                       | -0.41        | $\pm 5$      | 2019-12-31 |
| 5800                          | 21.3          | 5.76                    | 6.00                   | -4.00        | 48.10                       | 48.2                       | -0.21        | $\pm 5$      | 2019-12-31 |


## 6. SAR Measurement Evaluation

### 6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 2450MHz and 5000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

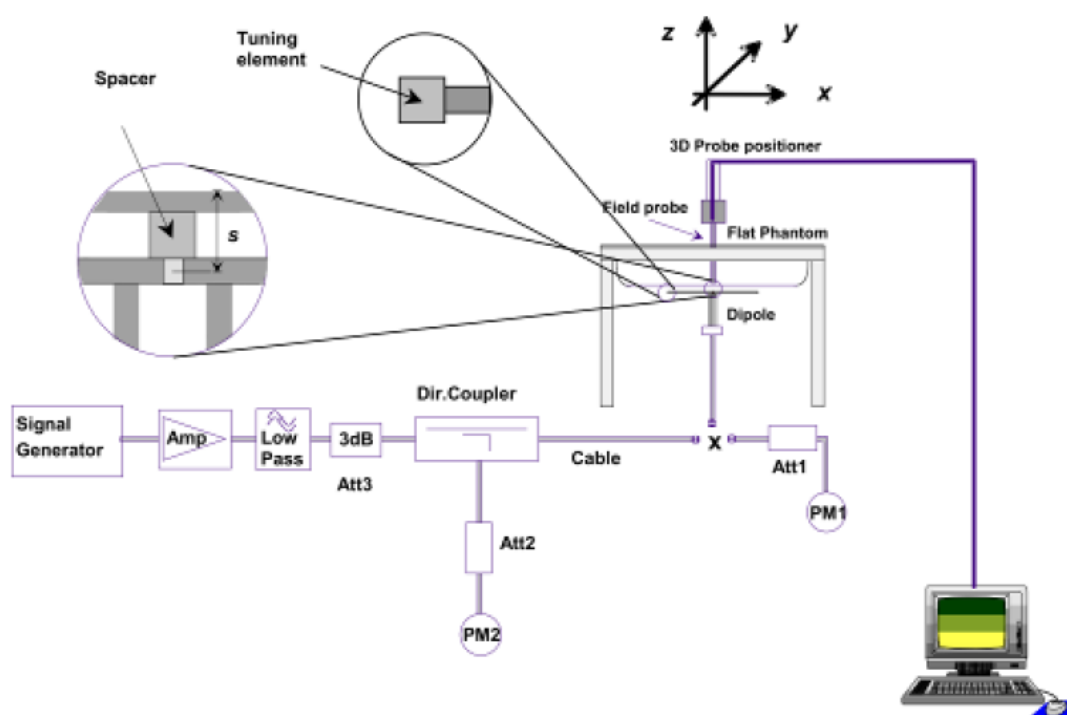

System Verification Setup Block Diagram



**Setup Photo of Dipole Antenna**

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.  
The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

### 6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

| Frequency | Targeted SAR <sub>1g</sub> | Measured SAR <sub>1g</sub> | Normalized SAR <sub>1g</sub> | Tolerance |
|-----------|----------------------------|----------------------------|------------------------------|-----------|
| MHz       | (W/kg)                     | (W/kg)                     | (W/kg)                       | (%)       |
| Body      |                            |                            |                              |           |
| 2450      | 50.41                      | 12.59                      | 50.36                        | -0.10     |


| Frequency | Liquid | Power (mw) | Targeted SAR <sub>1g</sub> | Measured SAR <sub>1g</sub> | Normalized SAR <sub>1g</sub> | Tolerance |
|-----------|--------|------------|----------------------------|----------------------------|------------------------------|-----------|
| 5400      | Body   | 100        | 163.31                     | 17.330                     | 173.3                        | 6.12      |
| 5600      | Body   | 100        | 165.72                     | 17.111                     | 171.11                       | 3.25      |
| 5800      | Body   | 100        | 170.71                     | 16.946                     | 169.46                       | -0.73     |

**Targeted and Measurement SAR**

**Please refer to Annex A for the plots of system performance check.**

## 7. EUT Testing Position

### 7.1 EUT Antenna Position

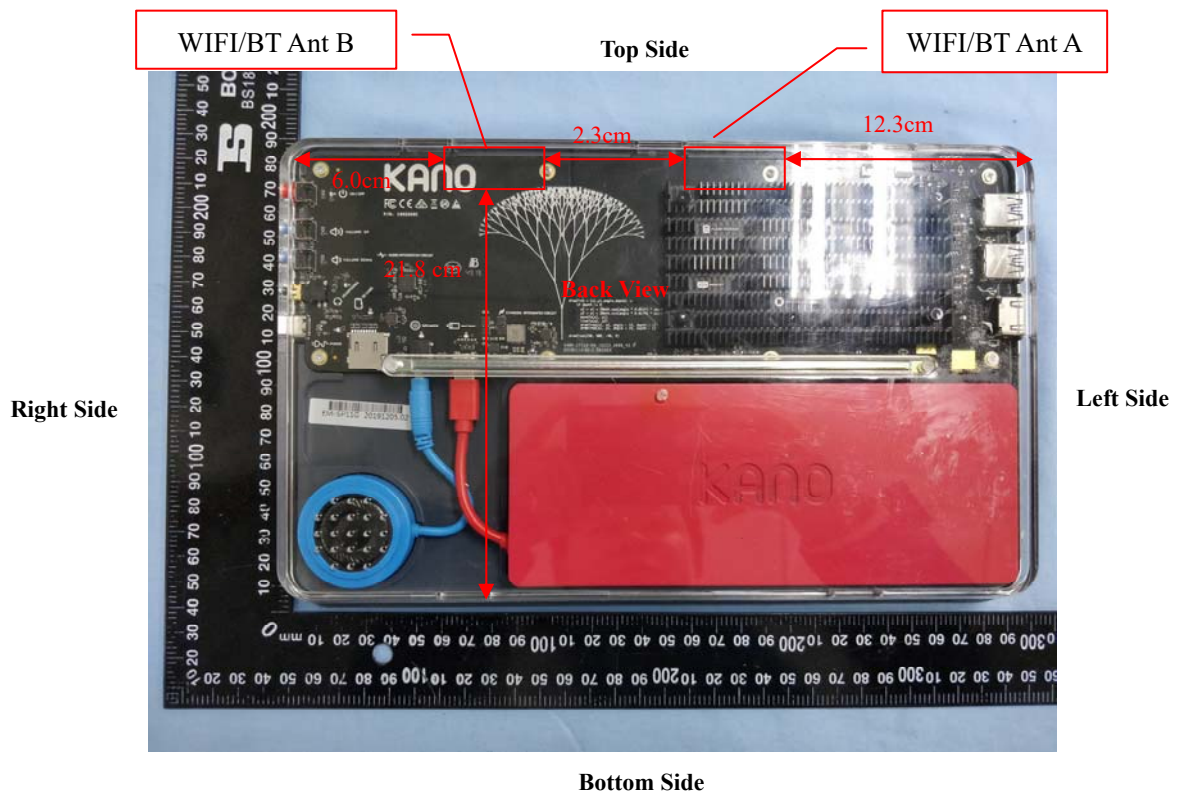

**Block Diagram for EUT Antenna Position**

## 7.2 EUT Testing Position

| Exclusion Distance Calculation                       |         |                       |               |                    |
|------------------------------------------------------|---------|-----------------------|---------------|--------------------|
| Frequency Bands                                      | Service | Maximum Tune-up Power | Average Power | Exclusion Distance |
| WLAN(2.4G)                                           | 802.11b | 15.5dBm               | 15.5dBm       | 20mm               |
| WLAN(5.3G)                                           | 802.11n | 15.5dBm               | 15.5dBm       | 30mm               |
| WLAN(5.6G)                                           | 802.11n | 15.0dBm               | 15.0dBm       | 30mm               |
| WLAN(5.8G)                                           | 802.11a | 10.5dBm               | 10.5dBm       | 10mm               |
| Note: Refer to Chapter 9.1 Conducted RF Output Power |         |                       |               |                    |

**Remark:**

- Referring to KDB 447498 D01v06, the distance of the antennas to all adjacent edges SAR test exclusion for adjacent edges.

Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

| Body SAR tests, Test distance: 0mm |       |      |            |           |          |        |
|------------------------------------|-------|------|------------|-----------|----------|--------|
| Antennas                           | Front | Back | Right Side | Left Side | Top Side | Bottom |
| WLAN(2.4G)                         | Yes   | Yes  | No         | No        | Yes      | No     |
| WLAN(5.3G)                         | Yes   | Yes  | No         | No        | Yes      | No     |
| WLAN(5.6G)                         | Yes   | Yes  | No         | No        | Yes      | No     |
| WLAN(5.8G)                         | Yes   | Yes  | No         | No        | Yes      | No     |

**Remark:**

- Referring to KDB 616217 D04 v01r02, KDB 248227 D01 v02r02 and KDB 447498 D01 v06, this device is overall diagonal dimension(>20cm) tablet, tested in direct contact (no gap) with flat phantom.
- Referring to KDB 616217 D04 v01r02, Exposures from antennas through the front (top) surface of the display section of a full-size tablet, away from the edges, are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary.

**Please refer to Annex D for the EUT test setup photos.**

## 8. SAR Measurement Procedures

---

### 8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### 8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 9. SAR Test Result

### 9.1 Conducted RF Output Power

| WLAN - Maximum Average Power Ant A |           |         |                 |                     |                     |
|------------------------------------|-----------|---------|-----------------|---------------------|---------------------|
| Test Mode                          | Data Rate | Channel | Frequency (MHz) | Average Power (dBm) | Tune-up power (dBm) |
| 802.11b                            | 1Mbps     | CH 01   | 2412            | 15.43               | 15.5                |
|                                    |           | CH 06   | 2437            | 15.15               | 15.5                |
|                                    |           | CH 11   | 2462            | 15.14               | 15.5                |
| 802.11g                            | 6Mbps     | CH 01   | 2412            | 14.38               | 14.5                |
|                                    |           | CH 06   | 2437            | 14.23               | 14.5                |
|                                    |           | CH 11   | 2462            | 14.31               | 14.5                |
| 802.11n (20MHz)                    | MCS0      | CH 01   | 2412            | 14.35               | 14.5                |
|                                    |           | CH 06   | 2437            | 14.24               | 14.5                |
|                                    |           | CH 11   | 2462            | 14.30               | 14.5                |
| 802.11n (40MHz)                    | MCS0      | CH 03   | 2422            | 13.29               | 13.5                |
|                                    |           | CH 06   | 2437            | 13.25               | 13.5                |
|                                    |           | CH 09   | 2452            | 13.22               | 13.5                |

| WLAN - Maximum Average Power Ant A |           |         |                 |                     |                     |
|------------------------------------|-----------|---------|-----------------|---------------------|---------------------|
| Test Mode                          | Data Rate | Channel | Frequency (MHz) | Average Power (dBm) | Tune-up power (dBm) |
| 802.11b                            | 1Mbps     | CH 01   | 2412            | 15.37               | 15.5                |
|                                    |           | CH 06   | 2437            | 15.11               | 15.5                |
|                                    |           | CH 11   | 2462            | 15.09               | 15.5                |
| 802.11g                            | 6Mbps     | CH 01   | 2412            | 14.32               | 14.5                |
|                                    |           | CH 06   | 2437            | 14.17               | 14.5                |
|                                    |           | CH 11   | 2462            | 14.29               | 14.5                |
| 802.11n (20MHz)                    | MCS0      | CH 01   | 2412            | 14.30               | 14.5                |
|                                    |           | CH 06   | 2437            | 14.21               | 14.5                |
|                                    |           | CH 11   | 2462            | 14.24               | 14.5                |
| 802.11n (40MHz)                    | MCS0      | CH 03   | 2422            | 13.18               | 13.5                |
|                                    |           | CH 06   | 2437            | 13.16               | 13.5                |
|                                    |           | CH 09   | 2452            | 13.07               | 13.5                |

**Remark:**

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is  $> 0.8$  W/kg, SAR is required for

that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is <= 1.2W/kg.

| WLAN(5.2G) - Maximum Average Power Ant A |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 36   | 5180      | 15.19         | 15.5          |
|                                          | CH 40   | 5200      | 15.23         | 15.5          |
|                                          | CH 48   | 5240      | 15.06         | 15.5          |
| 802.11n (20MHz)                          | CH 36   | 5180      | 14.74         | 15.0          |
|                                          | CH 40   | 5200      | 14.58         | 15.0          |
|                                          | CH 48   | 5240      | 14.61         | 15.0          |
| 802.11n (40MHz)                          | CH 38   | 5190      | 14.52         | 15.0          |
|                                          | CH 46   | 5230      | 14.76         | 15.0          |
| 802.11ac (20MHz)                         | CH 36   | 5180      | 14.70         | 15.0          |
|                                          | CH 40   | 5200      | 14.55         | 15.0          |
|                                          | CH 48   | 5240      | 14.56         | 15.0          |
| 802.11ac (40MHz)                         | CH 38   | 5190      | 14.50         | 15.0          |
|                                          | CH 46   | 5230      | 14.71         | 15.0          |
| 802.11ac (80MHz)                         | CH 42   | 5210      | 13.24         | 13.5          |

| WLAN(5.3G) - Maximum Average Power Ant A |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 52   | 5260      | 14.97         | 15.5          |
|                                          | CH 56   | 5280      | 14.94         | 15.5          |
|                                          | CH 64   | 5320      | 15.10         | 15.5          |
| 802.11n (20MHz)                          | CH 52   | 5260      | 13.86         | 14.5          |
|                                          | CH 56   | 5280      | 14.12         | 14.5          |
|                                          | CH 64   | 5320      | 14.07         | 14.5          |
| 802.11n (40MHz)                          | CH 54   | 5270      | 14.62         | 15.0          |
|                                          | CH 62   | 5310      | 14.27         | 15.0          |
| 802.11ac (20MHz)                         | CH 52   | 5260      | 13.78         | 14.5          |
|                                          | CH 56   | 5280      | 14.11         | 14.5          |
|                                          | CH 64   | 5320      | 14.04         | 14.5          |
| 802.11ac (40MHz)                         | CH 54   | 5270      | 14.57         | 15.0          |
|                                          | CH 62   | 5310      | 14.24         | 15.0          |
| 802.11ac (80MHz)                         | CH58    | 5290      | 13.36         | 13.5          |

| WLAN(5.6G) - Maximum Average Power Ant A |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 100  | 5500      | 14.67         | 15.0          |
|                                          | CH 120  | 5600      | 14.78         | 15.0          |
|                                          | CH 140  | 5700      | 14.56         | 15.0          |
| 802.11n (20MHz)                          | CH 100  | 5500      | 13.94         | 14.0          |
|                                          | CH 120  | 5600      | 13.86         | 14.0          |
|                                          | CH 140  | 5700      | 13.75         | 14.0          |
| 802.11n (40MHz)                          | CH 102  | 5510      | 14.19         | 14.5          |
|                                          | CH118   | 5590      | 14.16         | 14.5          |
|                                          | CH134   | 5670      | 14.25         | 14.5          |
| 802.11ac (20MHz)                         | CH 100  | 5500      | 13.92         | 14.0          |
|                                          | CH 120  | 5600      | 13.81         | 14.0          |
|                                          | CH 140  | 5700      | 13.73         | 14.0          |
| 802.11ac (40MHz)                         | CH 102  | 5510      | 14.15         | 14.5          |
|                                          | CH 118  | 5590      | 14.12         | 14.5          |
|                                          | CH 134  | 5670      | 14.18         | 14.5          |
| 802.11ac (80MHz)                         | CH106   | 5530      | 13.18         | 13.5          |
|                                          | CH122   | 5610      | 13.25         | 13.5          |

| WLAN(5.8G) - Maximum Average Power Ant A |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 149  | 5745      | 10.34         | 10.5          |
|                                          | CH 157  | 5785      | 10.30         | 10.5          |
|                                          | CH 165  | 5825      | 10.23         | 10.5          |
| 802.11n (20MHz)                          | CH 149  | 5745      | 10.14         | 10.5          |
|                                          | CH 157  | 5785      | 10.11         | 10.5          |
|                                          | CH 165  | 5825      | 10.09         | 10.5          |
| 802.11n (40MHz)                          | CH 151  | 5755      | 10.13         | 10.5          |
|                                          | CH 159  | 5795      | 10.10         | 10.5          |
| 802.11ac (20MHz)                         | CH 149  | 5745      | 10.09         | 10.5          |
|                                          | CH 157  | 5785      | 10.06         | 10.5          |
|                                          | CH 165  | 5825      | 10.09         | 10.5          |
| 802.11ac (40MHz)                         | CH 151  | 5755      | 10.12         | 10.5          |
|                                          | CH 159  | 5795      | 10.07         | 10.5          |
| 802.11ac (80MHz)                         | CH155   | 5775      | 9.98          | 10.0          |

Ant B

| WLAN(5.2G) - Maximum Average Power Ant B |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 36   | 5180      | 15.15         | 15.5          |
|                                          | CH 40   | 5200      | 15.21         | 15.5          |
|                                          | CH 48   | 5240      | 15.03         | 15.5          |
| 802.11n (20MHz)                          | CH 36   | 5180      | 14.65         | 15.0          |
|                                          | CH 40   | 5200      | 14.47         | 15.0          |
|                                          | CH 48   | 5240      | 14.56         | 15.0          |
| 802.11n (40MHz)                          | CH 38   | 5190      | 14.48         | 15.0          |
|                                          | CH 46   | 5230      | 14.72         | 15.0          |
| 802.11ac (20MHz)                         | CH 36   | 5180      | 14.61         | 15.0          |
|                                          | CH 40   | 5200      | 14.48         | 15.0          |
|                                          | CH 48   | 5240      | 14.49         | 15.0          |
| 802.11ac (40MHz)                         | CH 38   | 5190      | 14.45         | 15.0          |
|                                          | CH 46   | 5230      | 14.64         | 15.0          |
| 802.11ac (80MHz)                         | CH 42   | 5210      | 13.20         | 13.5          |

| WLAN(5.3G) - Maximum Average Power Ant B |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 52   | 5260      | 14.94         | 15.5          |
|                                          | CH 56   | 5280      | 14.91         | 15.5          |
|                                          | CH 64   | 5320      | 15.08         | 15.5          |
| 802.11n (20MHz)                          | CH 52   | 5260      | 13.81         | 14.5          |
|                                          | CH 56   | 5280      | 14.08         | 14.5          |
|                                          | CH 64   | 5320      | 14.00         | 14.5          |
| 802.11n (40MHz)                          | CH 54   | 5270      | 14.54         | 15.0          |
|                                          | CH 62   | 5310      | 14.19         | 15.0          |
| 802.11ac (20MHz)                         | CH 52   | 5260      | 13.65         | 14.5          |
|                                          | CH 56   | 5280      | 14.05         | 14.5          |
|                                          | CH 64   | 5320      | 14.01         | 14.5          |
| 802.11ac (40MHz)                         | CH 54   | 5270      | 14.53         | 15.0          |
|                                          | CH 62   | 5310      | 14.17         | 15.0          |
| 802.11ac (80MHz)                         | CH58    | 5290      | 13.33         | 13.5          |

| WLAN(5.6G) - Maximum Average Power Ant B |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 100  | 5500      | 14.59         | 15.0          |
|                                          | CH 120  | 5600      | 14.73         | 15.0          |
|                                          | CH 140  | 5700      | 14.48         | 15.0          |
| 802.11n (20MHz)                          | CH 100  | 5500      | 13.89         | 14.0          |
|                                          | CH 120  | 5600      | 13.75         | 14.0          |
|                                          | CH 140  | 5700      | 13.68         | 14.0          |
| 802.11n (40MHz)                          | CH 102  | 5510      | 14.13         | 14.5          |
|                                          | CH 118  | 5590      | 14.11         | 14.5          |
|                                          | CH134   | 5670      | 14.22         | 14.5          |
| 802.11ac (20MHz)                         | CH 100  | 5500      | 13.87         | 14.0          |
|                                          | CH 120  | 5600      | 13.79         | 14.0          |
|                                          | CH 140  | 5700      | 13.73         | 14.0          |
| 802.11ac (40MHz)                         | CH 102  | 5510      | 14.12         | 14.5          |
|                                          | CH 118  | 5590      | 14.08         | 14.5          |
|                                          | CH 134  | 5670      | 14.13         | 14.5          |
| 802.11ac (80MHz)                         | CH106   | 5530      | 13.14         | 13.5          |
|                                          | CH122   | 5610      | 13.19         | 13.5          |

| WLAN(5.8G) - Maximum Average Power Ant B |         |           |               |               |
|------------------------------------------|---------|-----------|---------------|---------------|
| Test Mode                                | Channel | Frequency | Average Power | Tune-up power |
|                                          |         | (MHz)     | (dBm)         | (dBm)         |
| 802.11a                                  | CH 149  | 5745      | 10.26         | 10.5          |
|                                          | CH 157  | 5785      | 10.24         | 10.5          |
|                                          | CH 165  | 5825      | 10.18         | 10.5          |
| 802.11n (20MHz)                          | CH 149  | 5745      | 10.07         | 10.5          |
|                                          | CH 157  | 5785      | 10.05         | 10.5          |
|                                          | CH 165  | 5825      | 10.04         | 10.5          |
| 802.11n (40MHz)                          | CH 151  | 5755      | 10.08         | 10.5          |
|                                          | CH 159  | 5795      | 10.09         | 10.5          |
| 802.11ac (20MHz)                         | CH 149  | 5745      | 10.00         | 10.5          |
|                                          | CH 157  | 5785      | 9.96          | 10.5          |
|                                          | CH 165  | 5825      | 10.02         | 10.5          |
| 802.11ac (40MHz)                         | CH 151  | 5755      | 10.06         | 10.5          |
|                                          | CH 159  | 5795      | 10.04         | 10.5          |
| 802.11ac (80MHz)                         | CH155   | 5775      | 9.95          | 10.0          |

**Remark:**

1. Per KDB 248227 D01 v02r02, SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.

a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

2. When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

| Bluetooth - Maximum Average Power |           |                    |                     |
|-----------------------------------|-----------|--------------------|---------------------|
| Test Mode                         | Data Rate | Average Power(dBm) | Tune-up power (dBm) |
| GFSK                              | 1Mbps     | 8.96               | 9.0                 |
| 4* $\pi$ 4DQPSK                   | 2Mbps     | 6.70               | 9.0                 |
| 8DPSK                             | 3Mbps     | 7.22               | 9.0                 |

| Bluetooth - Maximum Average Power |           |         |                 |                     |                     |
|-----------------------------------|-----------|---------|-----------------|---------------------|---------------------|
| Test Mode                         | Data Rate | Channel | Frequency (MHz) | Average Power (dBm) | Tune-up power (dBm) |
| BLE                               | 1Mbps     | CH 00   | 2402            | 3.97                | 5.5                 |
|                                   |           | CH 19   | 2440            | 4.71                | 5.5                 |
|                                   |           | CH 39   | 2480            | 5.15                | 5.5                 |

**Remark:**

Bluetooth maximum output power is 4.20dBm, and Maximum Tune-Up output power is 9.0dBm. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, } 4.87\text{mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f}(\text{GHz})] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, 16 where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation<sup>17</sup>
- The result is rounded to one decimal place for comparison

| Tune-Up Power (dBm) | Max. Power (mW) | Distance (mm) | Frequency (GHz) | Result | Limit |
|---------------------|-----------------|---------------|-----------------|--------|-------|
| 9.0                 | 7.94            | 5             | 2.441           | 2.481  | 3     |

The exclusion thresholds is  $2.481 < 3$ , therefore, the RF exposure evaluation is not required.

## 9.2 Test Results for Standalone SAR Test

### Body SAR

| WLAN 2.4GHz –Body SAR Test Ant A |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 1.                               | 802.11b | Back Side          | 01        | 2412 | 15.43              | 15.5              | 1.016          | 0.639        | 0.649               |
| 2.                               | 802.11b | Front Side         | 01        | 2412 | 15.43              | 15.5              | 1.016          | 0.266        | 0.270               |
| 3.                               | 802.11b | Top Side           | 01        | 2412 | 15.43              | 15.5              | 1.016          | 0.515        | 0.523               |

| WLAN 2.4GHz –Body SAR Test Ant B |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 4.                               | 802.11b | Back Side          | 01        | 2412 | 15.37              | 15.5              | 1.030          | 0.708        | 0.730               |
| 5.                               | 802.11b | Front Side         | 01        | 2412 | 15.37              | 15.5              | 1.030          | 0.203        | 0.209               |
| 6.                               | 802.11b | Top Side           | 01        | 2412 | 15.37              | 15.5              | 1.030          | 0.371        | 0.382               |

| WLAN 5.3GHz– Body SAR Test Ant A |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 7.                               | 802.11a | Back Side          | 64        | 5320 | 15.10              | 15.5              | 1.096          | 0.763        | 0.837               |
| 8.                               | 802.11a | Front Side         | 64        | 5320 | 15.10              | 15.5              | 1.096          | 0.238        | 0.261               |
| 9.                               | 802.11a | Top Side           | 64        | 5320 | 15.10              | 15.5              | 1.096          | 0.645        | 0.707               |
| 10.                              | 802.11a | Back Side          | 52        | 5260 | 14.94              | 15.5              | 1.1376         | 0.662        | 0.7531              |
| 11.                              | 802.11a | Back Side          | 56        | 5280 | 14.91              | 15.5              | 1.1455         | 0.625        | 0.7159              |

| WLAN 5.6GHz– Body SAR Test Ant A |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 12.                              | 802.11a | Back Side          | 120       | 5600 | 14.78              | 15.0              | 1.052          | 0.665        | 0.700               |
| 13.                              | 802.11a | Front Side         | 120       | 5600 | 14.78              | 15.0              | 1.052          | 0.293        | 0.308               |
| 14.                              | 802.11a | Top Side           | 120       | 5600 | 14.78              | 15.0              | 1.052          | 0.557        | 0.586               |

| WLAN 5.8GHz– Body SAR Test Ant A |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 15.                              | 802.11a | Back Side          | 149       | 5745 | 10.34              | 10.5              | 1.038          | 0.607        | 0.630               |
| 16.                              | 802.11a | Front Side         | 149       | 5745 | 10.34              | 10.5              | 1.038          | 0.270        | 0.280               |
| 17.                              | 802.11a | Top Side           | 149       | 5745 | 10.34              | 10.5              | 1.038          | 0.628        | 0.652               |

| WLAN 5.3GHz– Body SAR Test Ant B |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 18.                              | 802.11a | Back Side          | 64        | 5320 | 15.08              | 15.5              | 1.102          | 0.510        | 0.562               |
| 19.                              | 802.11a | Front Side         | 64        | 5320 | 15.08              | 15.5              | 1.102          | 0.299        | 0.329               |
| 20.                              | 802.11a | Top Side           | 64        | 5320 | 15.08              | 15.5              | 1.102          | 0.719        | 0.792               |

| WLAN 5.6GHz– Body SAR Test Ant B |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 21.                              | 802.11a | Back Side          | 120       | 5600 | 14.73              | 15.0              | 1.064          | 0.586        | 0.624               |
| 22.                              | 802.11a | Front Side         | 120       | 5600 | 14.73              | 15.0              | 1.064          | 0.311        | 0.331               |
| 23.                              | 802.11a | Top Side           | 120       | 5600 | 14.73              | 15.0              | 1.064          | 0.537        | 0.571               |

| WLAN 5.8GHz– Body SAR Test Ant B |         |                    |           |      |                    |                   |                |              |                     |
|----------------------------------|---------|--------------------|-----------|------|--------------------|-------------------|----------------|--------------|---------------------|
| Plot No.                         | Mode    | Test Position Body | Frequency |      | Output Power (dBm) | Rated Limit (dBm) | Scaling Factor | SAR1g (W/kg) | Scaled SAR1g (W/kg) |
|                                  |         |                    | CH.       | MHz  |                    |                   |                |              |                     |
| 24.                              | 802.11a | Back Side          | 149       | 5745 | 10.26              | 10.5              | 1.057          | 0.678        | 0.717               |
| 25.                              | 802.11a | Front Side         | 149       | 5745 | 10.26              | 10.5              | 1.057          | 0.242        | 0.256               |
| 26.                              | 802.11a | Top Side           | 149       | 5745 | 10.26              | 10.5              | 1.057          | 0.600        | 0.634               |

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

### 9.3 Simultaneous Multi-band Transmission SAR Analysis

#### List of Mode for Simultaneous Multi-band Transmission

| No. | Configurations               | Body SAR |
|-----|------------------------------|----------|
| 1   | WLAN(Data) + Bluetooth(Data) | Yes      |

#### Remark:

1. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$  W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

For simultaneous transmission analysis, SAR is estimated per KDB 447498 D01 v06 as below:

#### Bluetooth:

| Tune-Up Power (dBm) | Max. Power (mW) | Distance (mm) | Frequency (GHz) | X   | SAR(1g) 5mm |
|---------------------|-----------------|---------------|-----------------|-----|-------------|
| 9.0                 | 7.94            | 5             | 2.441           | 7.5 | 0.331       |

2. The maximum SAR summation is calculated based on the same configuration and test position.

**Body SAR**
**WLAN(Ant A) and Bluetooth**

|                 | <b>WLAN(2.4G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.649                        | 0.331                        | <b>0.980</b>                 |
| Front           | 0.270                        | 0.331                        | 0.601                        |
| Top side        | 0.523                        | 0.331                        | 0.854                        |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

|                 | <b>WLAN(5.3G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.837                        | 0.331                        | <b>1.168</b>                 |
| Front           | 0.261                        | 0.331                        | 0.592                        |
| Top side        | 0.707                        | 0.331                        | 1.038                        |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

|                 | <b>WLAN(5.6G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.700                        | 0.331                        | <b>1.031</b>                 |
| Front           | 0.308                        | 0.331                        | 0.639                        |
| Top side        | 0.586                        | 0.331                        | 0.917                        |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

|                 | <b>WLAN(5.8G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.630                        | 0.331                        | 0.961                        |
| Front           | 0.280                        | 0.331                        | 0.611                        |
| Top side        | 0.652                        | 0.331                        | <b>0.983</b>                 |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

**WLAN(Ant B) and Bluetooth**

|                 | <b>WLAN(2.4G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.730                        | 0.331                        | <b>1.061</b>                 |
| Front           | 0.209                        | 0.331                        | 0.540                        |
| Top side        | 0.382                        | 0.331                        | 0.713                        |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

|                 | <b>WLAN(5.3G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.562                        | 0.331                        | 0.893                        |
| Front           | 0.329                        | 0.331                        | 0.660                        |
| Top side        | 0.792                        | 0.331                        | <b>1.123</b>                 |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

|                 | <b>WLAN(5.6G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.624                        | 0.331                        | <b>0.955</b>                 |
| Front           | 0.331                        | 0.331                        | 0.662                        |
| Top side        | 0.571                        | 0.331                        | 0.902                        |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

|                 | <b>WLAN(5.8G)</b>            | <b>Bluetooth</b>             | <b>Summed SAR<br/>(W/kg)</b> |
|-----------------|------------------------------|------------------------------|------------------------------|
| <b>Position</b> | <b>Scaled SAR<br/>(W/kg)</b> | <b>Scaled SAR<br/>(W/kg)</b> |                              |
| Back            | 0.717                        | 0.331                        | <b>1.048</b>                 |
| Front           | 0.256                        | 0.331                        | 0.587                        |
| Top side        | 0.634                        | 0.331                        | 0.965                        |
| Bottom side     | --                           | 0.331                        | 0.331                        |
| Right side      | --                           | 0.331                        | 0.331                        |
| Left side       | --                           | 0.331                        | 0.331                        |

## 10. Measurement Uncertainty

### 10.1 Uncertainty for EUT SAR Test

| a                                                                               | b     | c              | d              | e= f(d,k)  | f                | g                | h= c*f/e       | i= c*g/e        | k        |
|---------------------------------------------------------------------------------|-------|----------------|----------------|------------|------------------|------------------|----------------|-----------------|----------|
| Uncertainty Component                                                           | Sec.  | Tol<br>(+ - %) | Prob.<br>Dist. | Div.       | Ci (1g)          | Ci (10g)         | 1g Ui<br>(+-%) | 10g Ui<br>(+-%) | Vi       |
| <b>Measurement System</b>                                                       |       |                |                |            |                  |                  |                |                 |          |
| Probe calibration                                                               | E.2.1 | 7.0            | N              | 1          | 1                | 1                | 7.00           | 7.00            | $\infty$ |
| Axial Isotropy                                                                  | E.2.2 | 2.5            | R              | $\sqrt{3}$ | $(1_{Cp})^{1/2}$ | $(1_{Cp})^{1/2}$ | 1.02           | 1.02            | $\infty$ |
| Hemispherical Isotropy                                                          | E.2.2 | 4.0            | R              | $\sqrt{3}$ | $(Cp)^{1/2}$     | $(Cp)^{1/2}$     | 1.63           | 1.63            | $\infty$ |
| Boundary effect                                                                 | E.2.3 | 1.0            | R              | $\sqrt{3}$ | 1                | 1                | 0.58           | 0.58            | $\infty$ |
| Linearity                                                                       | E.2.4 | 5.0            | R              | $\sqrt{3}$ | 1                | 1                | 2.89           | 2.89            | $\infty$ |
| System detection limits                                                         | E.2.5 | 1.0            | R              | $\sqrt{3}$ | 1                | 1                | 0.58           | 0.58            | $\infty$ |
| Readout Electronics                                                             | E.2.6 | 0.02           | N              | 1          | 1                | 1                | 0.02           | 0.02            | $\infty$ |
| Reponse Time                                                                    | E.2.7 | 3.0            | R              | $\sqrt{3}$ | 1                | 1                | 1.73           | 1.73            | $\infty$ |
| Integration Time                                                                | E.2.8 | 2.0            | R              | $\sqrt{3}$ | 1                | 1                | 1.15           | 1.15            | $\infty$ |
| RF ambient Conditions – Noise                                                   | E.6.1 | 3.0            | R              | $\sqrt{3}$ | 1                | 1                | 1.73           | 1.73            | $\infty$ |
| RF ambient Conditions - Reflections                                             | E.6.1 | 3.0            | R              | $\sqrt{3}$ | 1                | 1                | 1.73           | 1.73            | $\infty$ |
| Probe positioner Mechanical Tolerance                                           | E.6.2 | 2.0            | R              | $\sqrt{3}$ | 1                | 1                | 1.15           | 1.15            | $\infty$ |
| Probe positioning with respect to Phantom Shell                                 | E.6.3 | 0.05           | R              | $\sqrt{3}$ | 1                | 1                | 0.03           | 0.03            | $\infty$ |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | E.5   | 5.0            | R              | $\sqrt{3}$ | 1                | 1                | 2.89           | 2.89            | $\infty$ |
| <b>Test Sample Related</b>                                                      |       |                |                |            |                  |                  |                |                 |          |
| Test sample positioning                                                         | E.4.2 | 0.03           | N              | 1          | 1                | 1                | 0.03           | 0.03            | N-1      |
| Device Holder Uncertainty                                                       | E.4.1 | 5.00           | N              | 1          | 1                | 1                | 5.00           | 5.00            |          |
| Output power Variation - SAR drift measurement                                  | E.2.9 | 12.02          | R              | $\sqrt{3}$ | 1                | 1                | 6.94           | 6.94            | $\infty$ |
| SAR scaling                                                                     | E6.5  | 0.0            | R              | $\sqrt{3}$ | 1                | 1                | 0.0            | 0.0             | $\infty$ |
| <b>Phantom and Tissue Parameters</b>                                            |       |                |                |            |                  |                  |                |                 |          |
| Phantom Uncertainty (Shape and thickness tolerances)                            | E.3.1 | 0.05           | R              | $\sqrt{3}$ | 1                | 1                | 0.03           | 0.03            | $\infty$ |
| Uncertainty in SAR correction for deviations in permittivity and conductivity   | E3.2  | 1.9            | R              | $\sqrt{3}$ | 1                | 0.84             | 1.10           | 0.90            | $\infty$ |
| Liquid conductivity - deviation                                                 | E.3.2 | 5.00           | R              | $\sqrt{3}$ | 0.64             | 0.43             | 1.85           | 1.24            | $\infty$ |

|                                                   |       |       |     |            |      |      |       |       |          |
|---------------------------------------------------|-------|-------|-----|------------|------|------|-------|-------|----------|
| from target value                                 |       |       |     |            |      |      |       |       |          |
| Liquid conductivity - measurement uncertainty     | E.3.3 | 5.00  | N   | 1          | 0.64 | 0.43 | 3.20  | 2.15  | $\infty$ |
| Liquid permittivity - deviation from target value | E.3.2 | 0.37  | R   | $\sqrt{3}$ | 0.6  | 0.49 | 0.13  | 0.10  | $\infty$ |
| Liquid permittivity - measurement uncertainty     | E.3.3 | 10.00 | N   | 1          | 0.6  | 0.49 | 6.00  | 4.90  | $\infty$ |
| Combined Standard Uncertainty                     |       |       | RSS |            |      |      | 12.98 | 12.53 |          |
| Expanded Uncertainty (95% Confidence interval)    |       |       | K=2 |            |      |      | 25.32 | 24.43 |          |

## 10.2 Uncertainty for System Performance Check

| a                                                                | b     | c              | d              | e= f(d,k)  | f               | g               | h= c*f/e         | i= c*g/e          | k        |
|------------------------------------------------------------------|-------|----------------|----------------|------------|-----------------|-----------------|------------------|-------------------|----------|
| Uncertainty Component                                            | Sec.  | Tol<br>(+ - %) | Prob.<br>Dist. | Div.       | Ci (1g)         | Ci (10g)        | 1g Ui<br>(+ - %) | 10g Ui<br>(+ - %) | Vi       |
| <b>Measurement System</b>                                        |       |                |                |            |                 |                 |                  |                   |          |
| Probe calibration                                                | E.2.1 | 7.0            | N              | 1          | 1               | 1               | 7.00             | 7.00              | $\infty$ |
| Axial Isotropy                                                   | E.2.2 | 2.5            | R              | $\sqrt{3}$ | $(1\_Cp)^{1/2}$ | $(1\_Cp)^{1/2}$ | 1.02             | 1.02              | $\infty$ |
| Hemispherical Isotropy                                           | E.2.2 | 4.0            | R              | $\sqrt{3}$ | $(Cp)^{1/2}$    | $(Cp)^{1/2}$    | 1.63             | 1.63              | $\infty$ |
| Boundary effect                                                  | E.2.3 | 1.0            | R              | $\sqrt{3}$ | 1               | 1               | 0.58             | 0.58              | $\infty$ |
| Linearity                                                        | E.2.4 | 5.0            | R              | $\sqrt{3}$ | 1               | 1               | 2.89             | 2.89              | $\infty$ |
| System detection limits                                          | E.2.5 | 1.0            | R              | $\sqrt{3}$ | 1               | 1               | 0.58             | 0.58              | $\infty$ |
| Modulation response                                              | E.2.5 | 0              | R              | $\sqrt{3}$ | 0               | 0               | 0.0              | 0.0               | $\infty$ |
| Readout Electronics                                              | E.2.6 | 0.02           | N              | 1          | 1               | 1               | 0.02             | 0.02              | $\infty$ |
| Reponse Time                                                     | E.2.7 | 3.0            | R              | $\sqrt{3}$ | 1               | 1               | 1.73             | 1.73              | $\infty$ |
| Integration Time                                                 | E.2.8 | 2.0            | R              | $\sqrt{3}$ | 1               | 1               | 1.15             | 1.15              | $\infty$ |
| RF ambient Conditions – Noise                                    | E.6.1 | 3.0            | R              | $\sqrt{3}$ | 1               | 1               | 1.73             | 1.73              | $\infty$ |
| RF ambient Conditions - Reflections                              | E.6.1 | 3.0            | R              | $\sqrt{3}$ | 1               | 1               | 1.73             | 1.73              | $\infty$ |
| Probe positioner Mechanical Tolerance                            | E.6.2 | 2.0            | R              | $\sqrt{3}$ | 1               | 1               | 1.15             | 1.15              | $\infty$ |
| Probe positioning with respect to Phantom Shell                  | E.6.3 | 0.05           | R              | $\sqrt{3}$ | 1               | 1               | 0.03             | 0.03              | $\infty$ |
| Extrapolation, interpolation and integration Algorithms for Max. | E.5.2 | 5.0            | R              | $\sqrt{3}$ | 1               | 1               | 2.89             | 2.89              | $\infty$ |

|                                                                               |         |       |     |            |      |      |       |       |          |
|-------------------------------------------------------------------------------|---------|-------|-----|------------|------|------|-------|-------|----------|
| SAR Evaluation                                                                |         |       |     |            |      |      |       |       |          |
| <b>Dipole</b>                                                                 |         |       |     |            |      |      |       |       |          |
| Dipole axis to liquid Distance                                                | 8,E.4.2 | 1.00  | N   | $\sqrt{3}$ | 1    | 1    | 0.58  | 0.58  | N-1      |
| Input power and SAR drift measurement                                         | 8,6.6.2 | 12.02 | R   | $\sqrt{3}$ | 1    | 1    | 6.94  | 6.94  | $\infty$ |
| Deviation of experimental dipole from numerical dipole                        | E.6.4   | 5.5   | R   | $\sqrt{3}$ | 1    | 1    | 3.20  | 3.20  | $\infty$ |
| <b>Phantom and Tissue Parameters</b>                                          |         |       |     |            |      |      |       |       |          |
| Phantom Uncertainty (Shape and thickness tolerances)                          | E.3.1   | 0.05  | R   | $\sqrt{3}$ | 1    | 1    | 0.03  | 0.03  | $\infty$ |
| Uncertainty in SAR correction for deviations in permittivity and conductivity | E.3.2   | 2.0   | R   | $\sqrt{3}$ | 1    | 0.84 | 1.10  | 1.10  | $\infty$ |
| Liquid conductivity - deviation from target value                             | E.3.2   | 5.00  | R   | $\sqrt{3}$ | 0.64 | 0.43 | 1.85  | 1.24  |          |
| Liquid conductivity - measurement uncertainty                                 | E.3.3   | 5.00  | N   | 1          | 0.64 | 0.43 | 3.20  | 2.15  |          |
| Liquid permittivity - deviation from target value                             | E.3.2   | 0.37  | R   | $\sqrt{3}$ | 0.6  | 0.49 | 0.13  | 0.10  |          |
| Liquid permittivity - measurement uncertainty                                 | E.3.3   | 10.00 | N   | 1          | 0.6  | 0.49 | 6.00  | 4.90  | M        |
| Combined Standard Uncertainty                                                 |         |       | RSS |            |      |      | 12.00 | 11.50 |          |
| Expanded Uncertainty (95% Confidence interval)                                |         |       | K=2 |            |      |      | 23.39 | 22.43 |          |

## Annex A. Plots of System Performance Check

### MEASUREMENT 1

#### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/30/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

#### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=8mm dy=8mm dz=5mm |
| Phantom         | Validation plane     |
| Device Position | Dipole               |
| Band            | CW2450               |
| Signal          | Duty Cycle 1:1       |

#### B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2450.000000 |
| Relative Permittivity (real part) | 52.010212   |
| Conductivity (S/m)                | 1.910255    |
| Power Variation (%)               | 1.369745    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

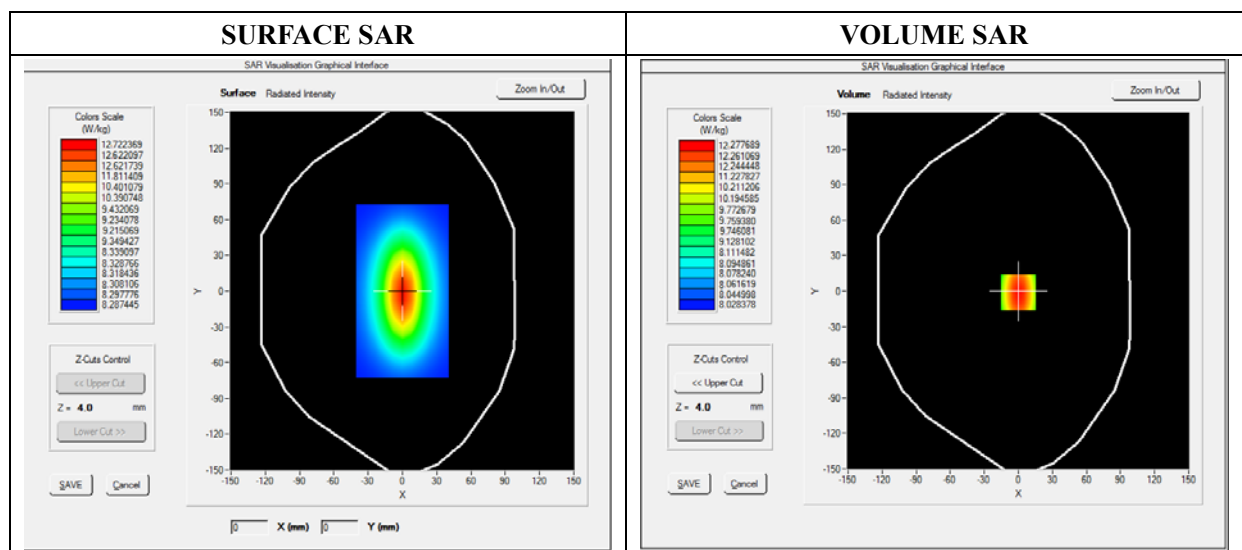




**Maximum location: X=0.00, Y=0.00**

|                       |                  |
|-----------------------|------------------|
| <b>SAR 10g (W/Kg)</b> | <b>6.119522</b>  |
| <b>SAR 1g (W/Kg)</b>  | <b>12.592360</b> |

**Z Axis Scan**

| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>    | <b>9.00</b>    | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
|-------------------|---------------|----------------|----------------|---------------|---------------|---------------|---------------|
| <b>SAR (W/Kg)</b> | <b>0.0000</b> | <b>13.1911</b> | <b>11.7951</b> | <b>9.2945</b> | <b>8.5400</b> | <b>6.3712</b> | <b>4.6225</b> |

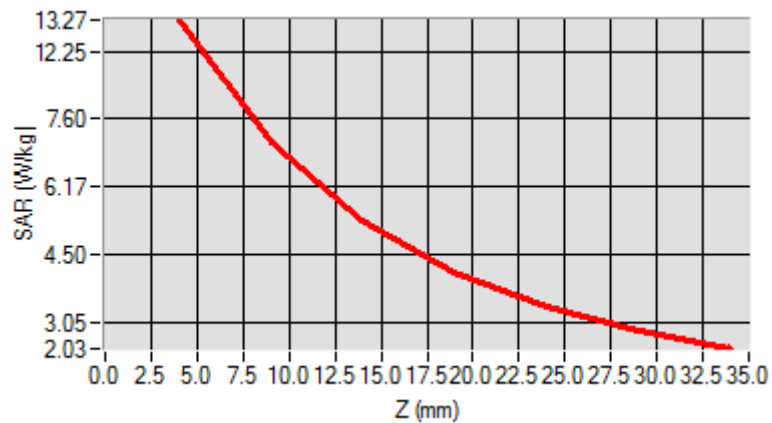
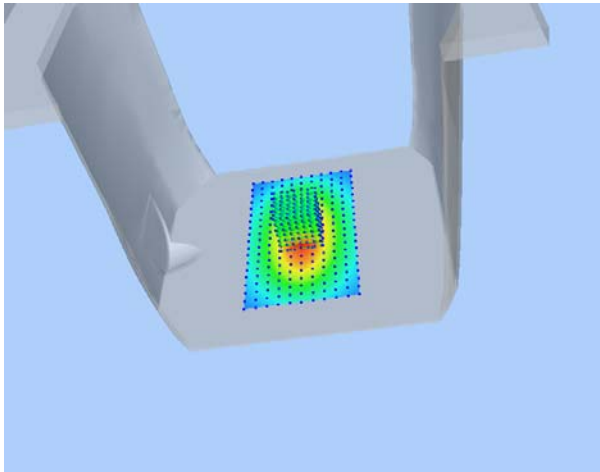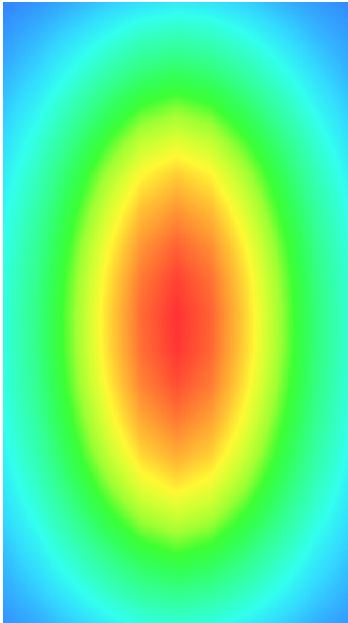
| <b>3D screen shot</b>                                                               | <b>Hot spot position</b>                                                             |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

## MEASUREMENT 2

### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.77; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                        |
|-----------------|------------------------|
| Area Scan       | dx=8mm dy=8mm          |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm   |
| Phantom         | Validation plane       |
| Device Position | Dipole                 |
| Band            | CW5400                 |
| Signal          | CW (Crest factor: 1.0) |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5400.000000 |
| Relative Permittivity (real part) | 48.502911   |
| Conductivity (S/m)                | 5.261483    |
| Power Variation (%)               | 0.943782    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

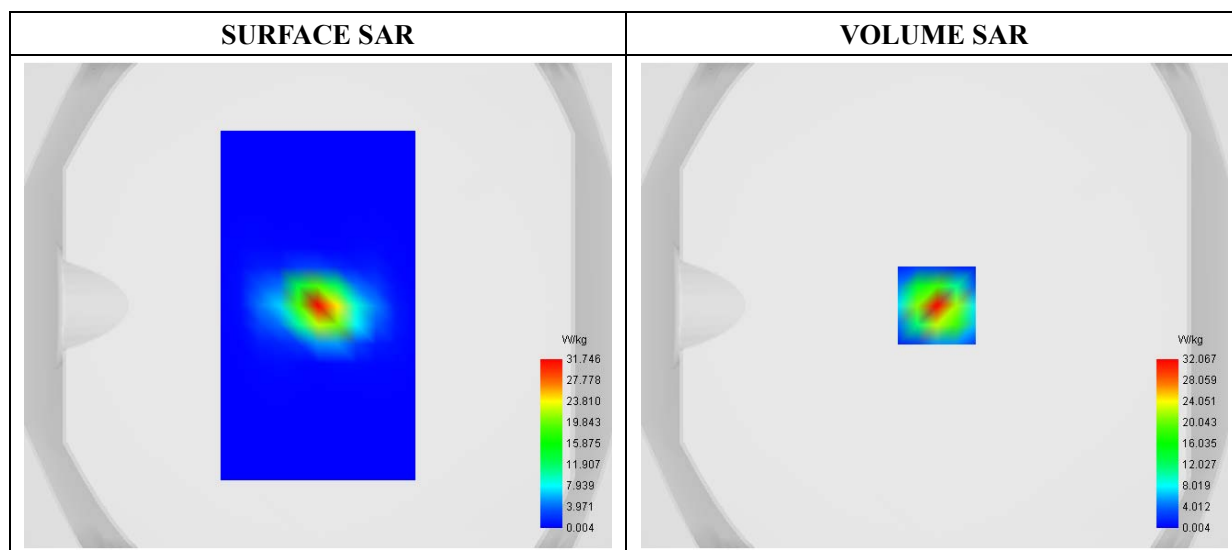

Maximum location: X=1.00, Y=0.00

|                |           |
|----------------|-----------|
| SAR 10g (W/Kg) | 5.947588  |
| SAR 1g (W/Kg)  | 16.681175 |

| Z (mm)     | 0.00    | 2.00    | 7.00   | 12.00  | 17.00  | 22.00  | 27.00  |
|------------|---------|---------|--------|--------|--------|--------|--------|
| SAR (W/Kg) | 49.8193 | 32.0669 | 7.0244 | 1.5969 | 0.3410 | 0.0635 | 0.0070 |

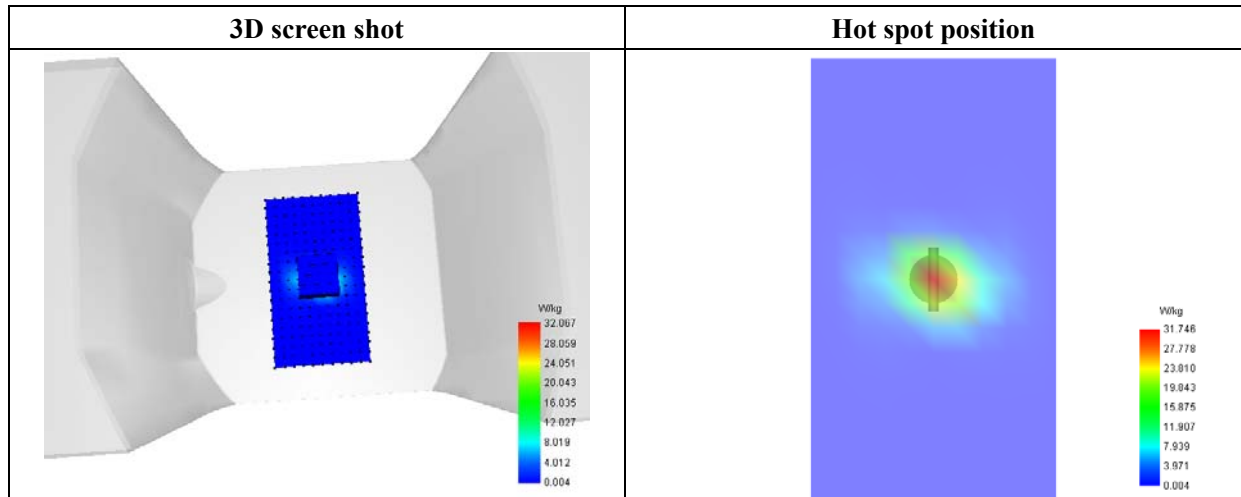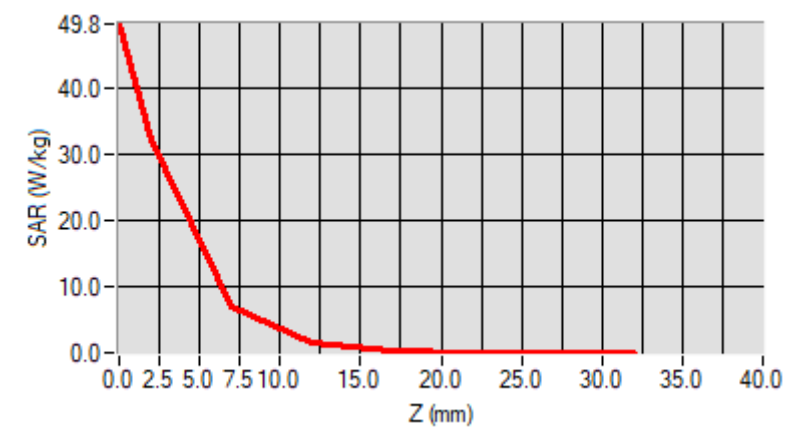

## MEASUREMENT 3

### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.80; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Validation plane     |
| Device Position | Dipole               |
| Band            | CW5600               |
| Signal          | Duty Cycle 1:1       |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5600.000000 |
| Relative Permittivity (real part) | 48.302143   |
| Conductivity (S/m)                | 5.521688    |
| Power Variation (%)               | 0.749201    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

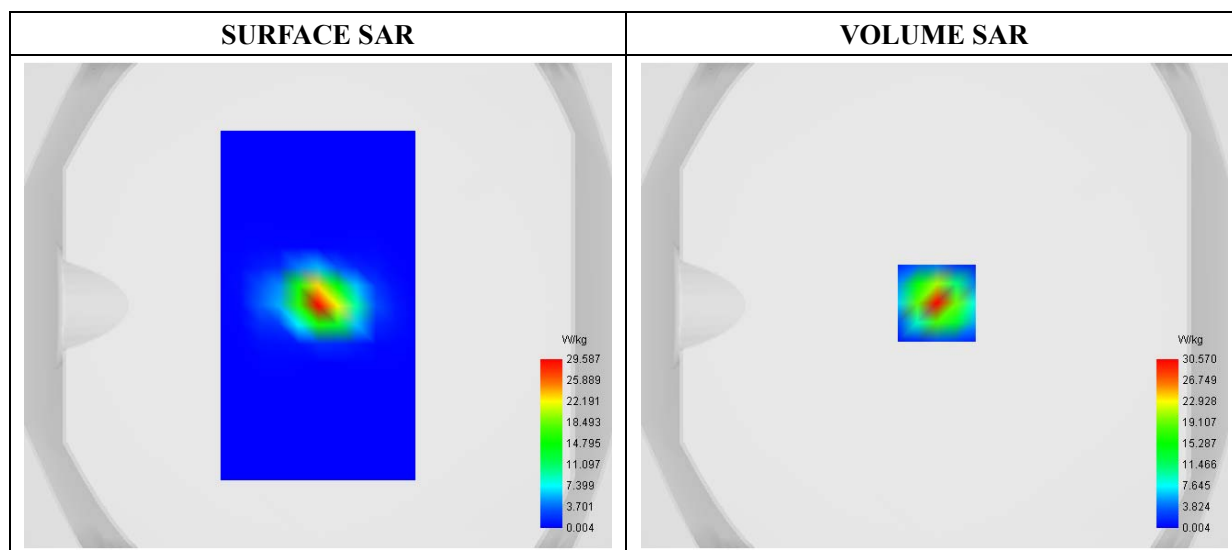

**Maximum location: X=1.00, Y=1.00**

|                       |                  |
|-----------------------|------------------|
| <b>SAR 10g (W/Kg)</b> | <b>5.912341</b>  |
| <b>SAR 1g (W/Kg)</b>  | <b>17.110732</b> |

|                   |                |                |               |               |               |               |               |
|-------------------|----------------|----------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>    | <b>2.00</b>    | <b>7.00</b>   | <b>12.00</b>  | <b>17.00</b>  | <b>22.00</b>  | <b>27.00</b>  |
| <b>SAR (W/Kg)</b> | <b>48.4695</b> | <b>30.5699</b> | <b>5.7100</b> | <b>1.0698</b> | <b>0.1906</b> | <b>0.0364</b> | <b>0.0052</b> |

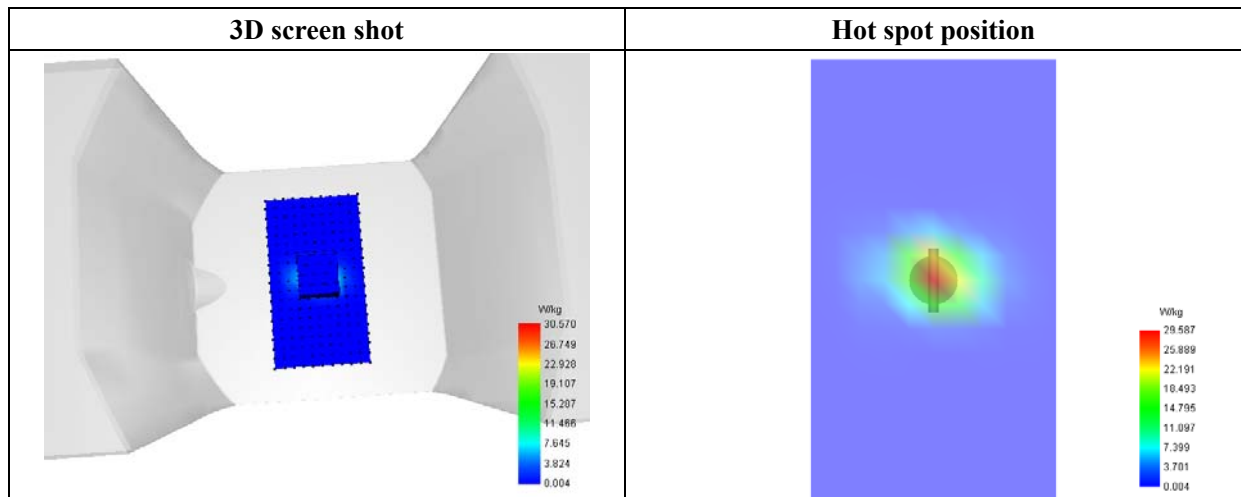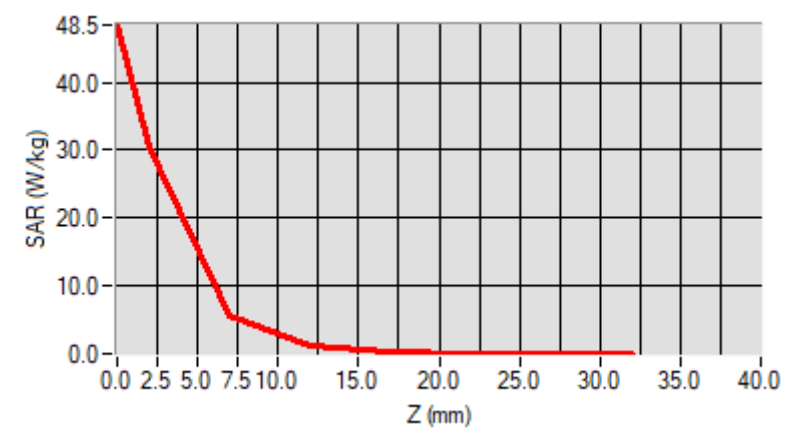

## MEASUREMENT 4

### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.58; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Validation plane     |
| Device Position | Dipole               |
| Band            | CW5800               |
| Signal          | Duty Cycle 1:1       |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5800.000000 |
| Relative Permittivity (real part) | 48.101939   |
| Conductivity (S/m)                | 5.761487    |
| Power Variation (%)               | 0.836292    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

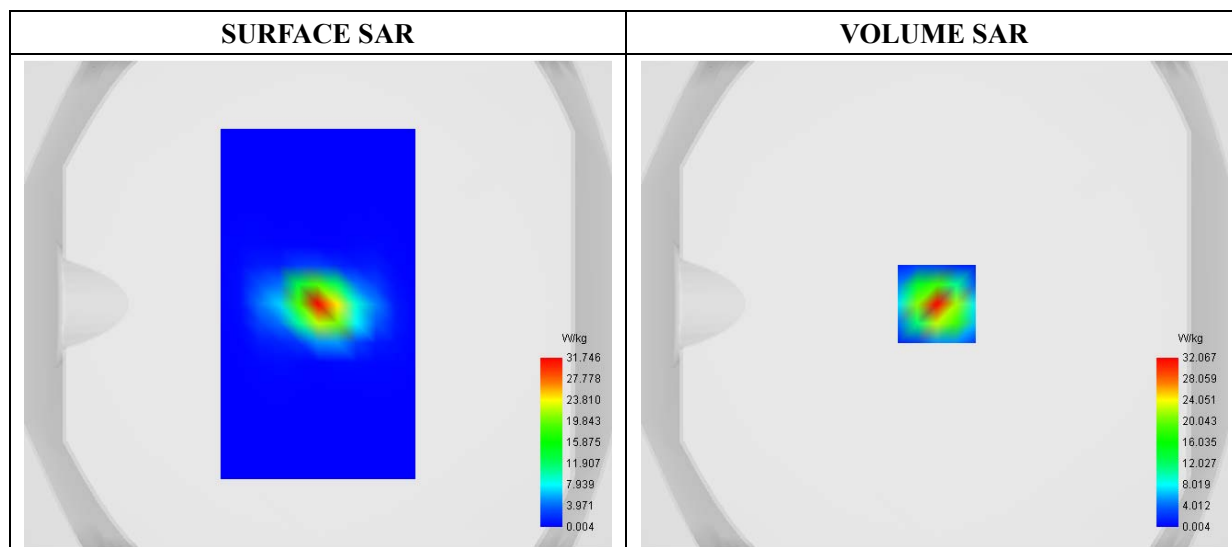

**Maximum location: X=1.00, Y=0.00**

|                       |                  |
|-----------------------|------------------|
| <b>SAR 10g (W/Kg)</b> | <b>6.047588</b>  |
| <b>SAR 1g (W/Kg)</b>  | <b>16.946175</b> |

|                   |                |                |               |               |               |               |               |
|-------------------|----------------|----------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>    | <b>2.00</b>    | <b>7.00</b>   | <b>12.00</b>  | <b>17.00</b>  | <b>22.00</b>  | <b>27.00</b>  |
| <b>SAR (W/Kg)</b> | <b>49.8193</b> | <b>32.0669</b> | <b>7.0244</b> | <b>1.5969</b> | <b>0.3410</b> | <b>0.0635</b> | <b>0.0070</b> |

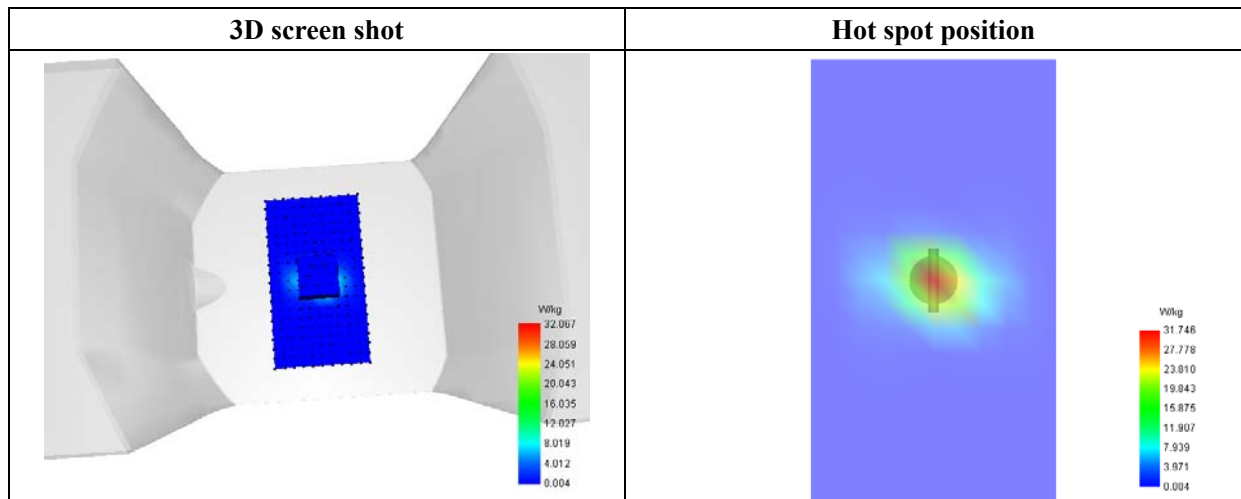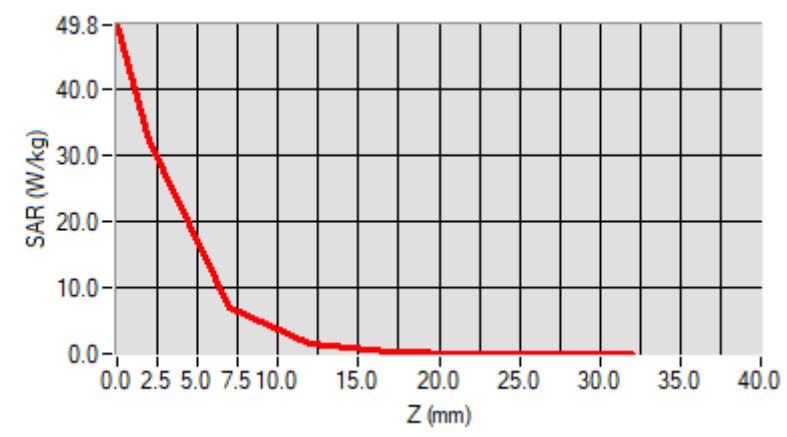

## Annex B. Plots of SAR Measurement

| <b><u>TYPE</u></b>                                                                                                                       | <b><u>BAND</u></b>   | <b><u>PARAMETERS</u></b>                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------|
| Tablet                                                                                                                                   | WiFi(2.4G)_11b_Ant A | <u>Measurement 1:</u> Flat Plane with Back side device position on Low Channel in 802.11b mode     |
| Tablet                                                                                                                                   | WiFi(2.4G)_11b_Ant B | <u>Measurement 4:</u> Flat Plane with Back side device position on Low Channel in 802.11b mode     |
| Tablet                                                                                                                                   | WiFi(5.3G)_11a_Ant A | <u>Measurement 7:</u> Flat Plane with Back side device position on High Channel in 802.11a mode    |
| Tablet                                                                                                                                   | WiFi(5.6G)_11a_Ant A | <u>Measurement 12:</u> Flat Plane with Back side device position on Middle Channel in 802.11a mode |
| Tablet                                                                                                                                   | WiFi(5.8G)_11a_Ant A | <u>Measurement 17:</u> Flat Plane with Top side device position on Low Channel in 802.11a mode     |
| Tablet                                                                                                                                   | WiFi(5.3G)_11a_Ant B | <u>Measurement 20:</u> Flat Plane with Top side device position on High Channel in 802.11a mode    |
| Tablet                                                                                                                                   | WiFi(5.6G)_11a_Ant B | <u>Measurement 21:</u> Flat Plane with Back side device position on Middle Channel in 802.11a mode |
| Tablet                                                                                                                                   | WiFi(5.8G)_11a_Ant B | <u>Measurement 24:</u> Flat Plane with Back side device position on Low Channel in 802.11a mode    |
| <i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i> |                      |                                                                                                    |

# MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 12/30/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

## A. Experimental conditions

|                        |                      |
|------------------------|----------------------|
| <b>Area Scan</b>       | dx=8mm dy=8mm        |
| <b>Zoom Scan</b>       | dx=8mm dy=8mm dz=5mm |
| <b>Phantom</b>         | Flat Plane           |
| <b>Device Position</b> | Back Ant A           |
| <b>Band</b>            | WiFi_802.11b         |
| <b>Channels</b>        | Low                  |
| <b>Signal</b>          | Duty Cycle 1:1       |

## B. SAR Measurement Results

|                                          |             |
|------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                   | 2412.000000 |
| <b>Relative Permittivity (real part)</b> | 52.010212   |
| <b>Conductivity (S/m)</b>                | 1.910255    |
| <b>Power Variation (%)</b>               | 2.492743    |
| <b>Ambient Temperature</b>               | 21.1        |
| <b>Liquid Temperature</b>                | 21.2        |

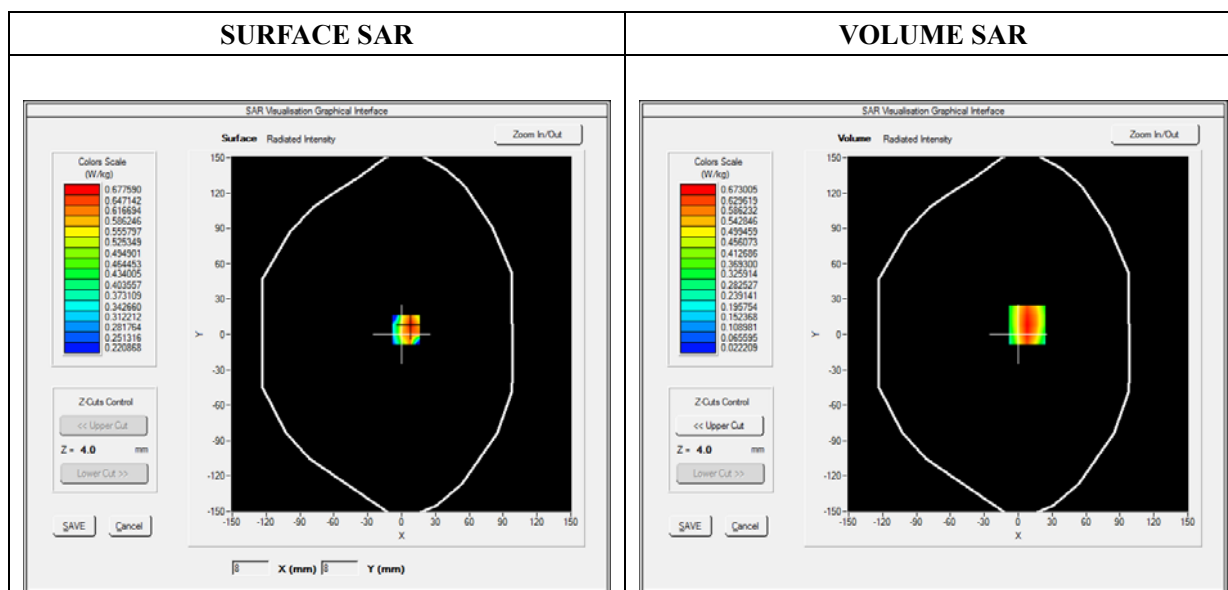




**Maximum location: X=8.00, Y=8.00**

**SAR Peak: 1.14 W/kg**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.347959</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.639112</b> |

|                   |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.1383</b> | <b>0.6730</b> | <b>0.3363</b> | <b>0.1725</b> | <b>0.0998</b> |

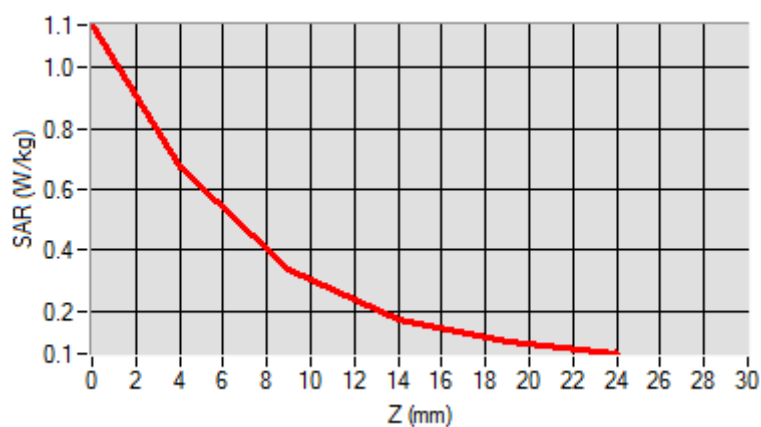
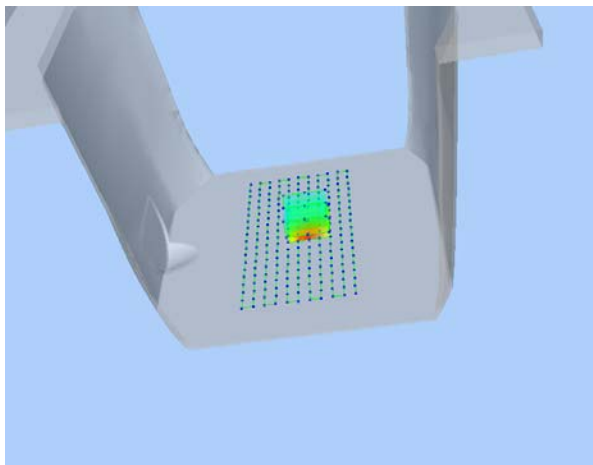
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>3D screen shot</b>                                                               | <b>Hot spot position</b>                                                              |
|  |  |

## MEASUREMENT 4

Type: Phone measurement (Complete)

Date of measurement: 12/30/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=8mm dy=8mm dz=5mm |
| Phantom         | Flat Plane           |
| Device Position | Back Ant B           |
| Band            | WiFi_802.11b         |
| Channels        | Low                  |
| Signal          | Duty Cycle 1:1       |

### B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2412.000000 |
| Relative Permittivity (real part) | 52.010212   |
| Conductivity (S/m)                | 1.910255    |
| Power Variation (%)               | 2.492743    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

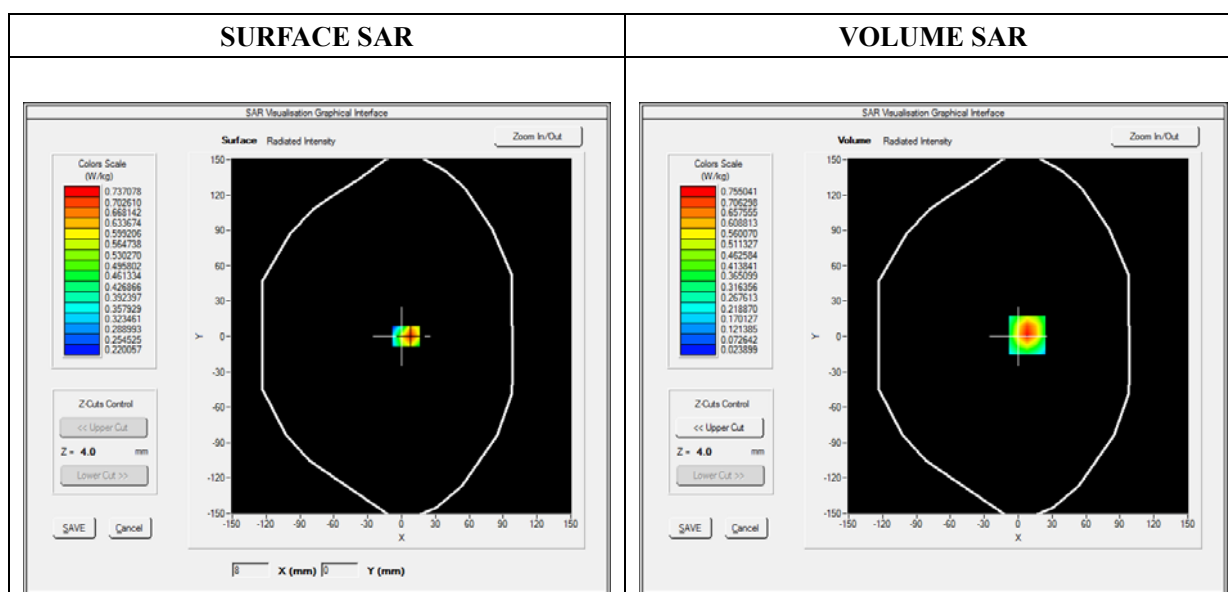



**Maximum location: X=8.00, Y=1.00**

**SAR Peak: 1.27 W/kg**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.358501</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.708476</b> |

|                   |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.2539</b> | <b>0.7550</b> | <b>0.3851</b> | <b>0.1976</b> | <b>0.1091</b> |

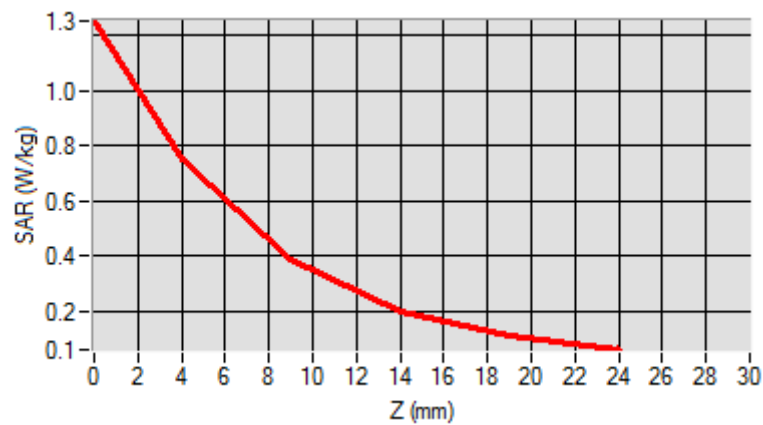
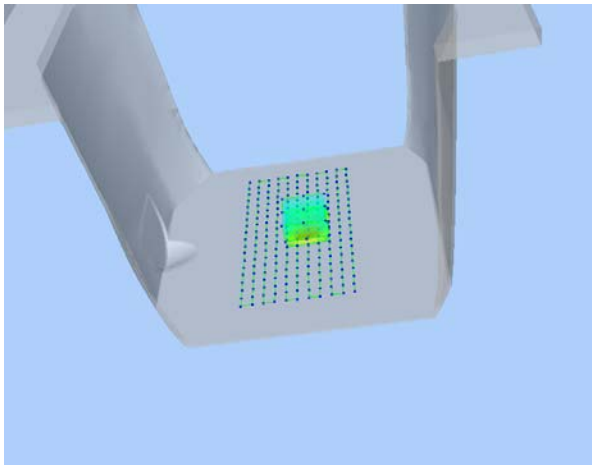
|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>3D screen shot</b>                                                               | <b>Hot spot position</b>                                                              |
|  |  |

## MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.77; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back Ant A           |
| Band            | WiFi(5.3G)_802.11a   |
| Channels        | High                 |
| Signal          | Duty Cycle: 1:1      |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5320.000000 |
| Relative Permittivity (real part) | 48.502911   |
| Conductivity (S/m)                | 5.261483    |
| Power Variation (%)               | 0.943782    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

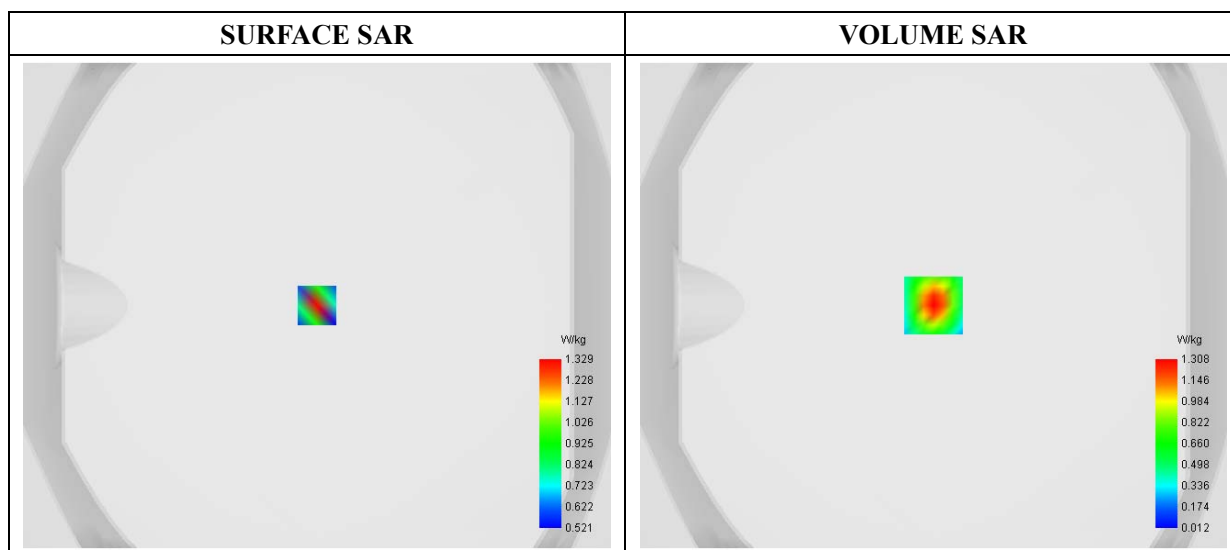

**Maximum location: X=0.00, Y=0.00**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.239453</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.763383</b> |

|                   |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.00</b>  | <b>12.00</b>  | <b>14.00</b>  | <b>16.00</b>  |
| <b>SAR (W/Kg)</b> | <b>2.4733</b> | <b>1.3079</b> | <b>0.6124</b> | <b>0.2537</b> | <b>0.0974</b> | <b>0.0372</b> | <b>0.0174</b> | <b>0.0131</b> | <b>0.0159</b> |

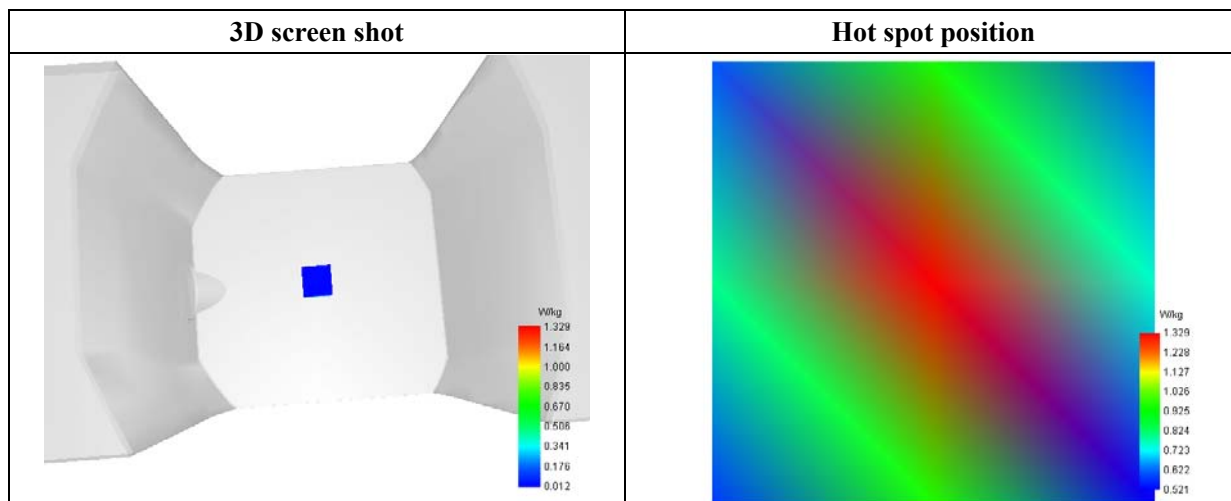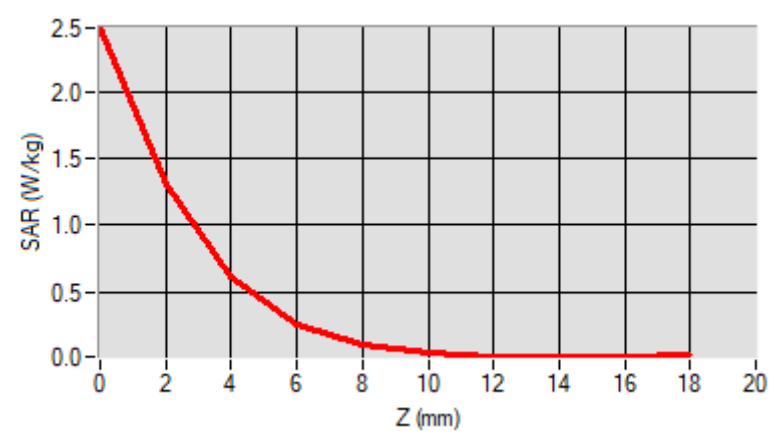

## MEASUREMENT 12

Type: Phone measurement (Complete)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.80; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back Ant A           |
| Band            | WiFi(5.6G)_802.11a   |
| Channels        | Middle               |
| Signal          | Duty Cycle: 1:1      |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5600.000000 |
| Relative Permittivity (real part) | 48.302143   |
| Conductivity (S/m)                | 5.521688    |
| Power Variation (%)               | 1.083921    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

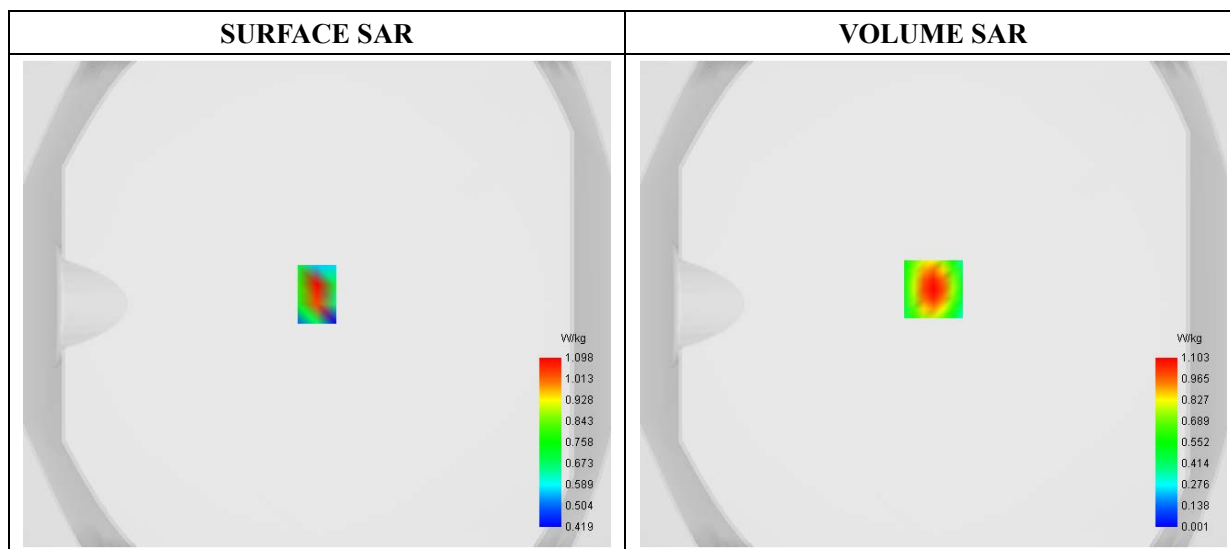

**Maximum location: X=0.00, Y=6.00**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.234971</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.664940</b> |

|                   |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.00</b>  | <b>12.00</b>  | <b>14.00</b>  | <b>16.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.9446</b> | <b>1.1026</b> | <b>0.5792</b> | <b>0.2853</b> | <b>0.1392</b> | <b>0.0711</b> | <b>0.0417</b> | <b>0.0305</b> | <b>0.0279</b> |

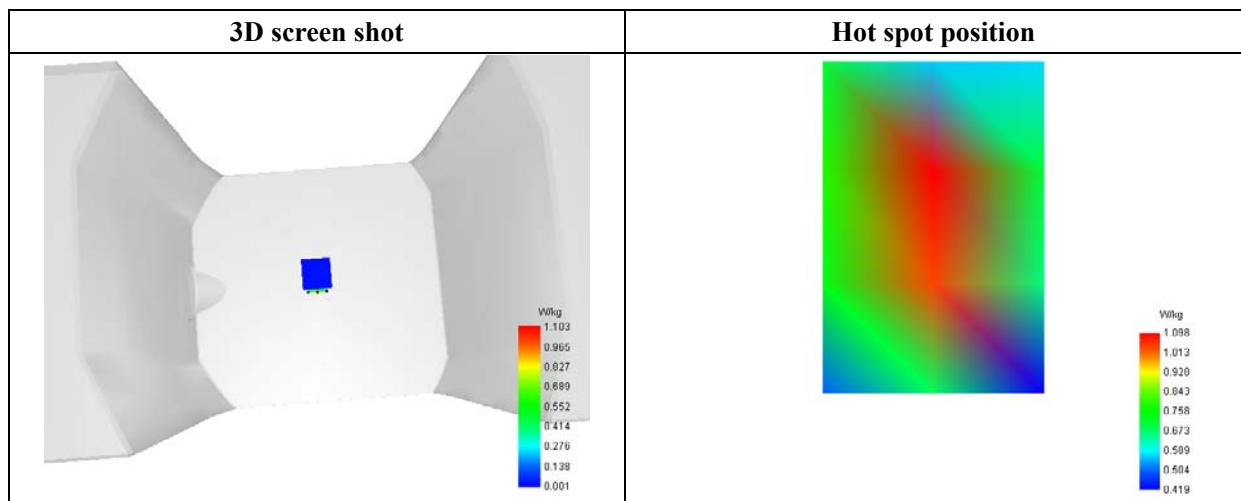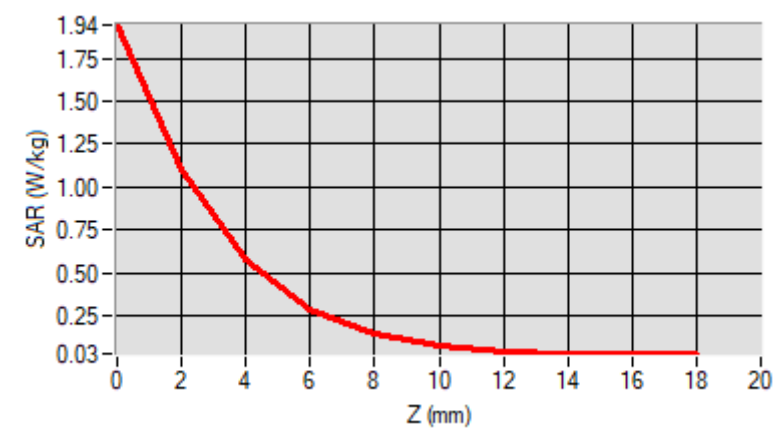

## MEASUREMENT 17

Type: Phone measurement (Complete)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.58; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Top Ant A            |
| Band            | WiFi(5.8G)_802.11a   |
| Channels        | Low                  |
| Signal          | Duty Cycle: 1:1      |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5745.000000 |
| Relative Permittivity (real part) | 48.101939   |
| Conductivity (S/m)                | 5.761487    |
| Power Variation (%)               | 1.155771    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

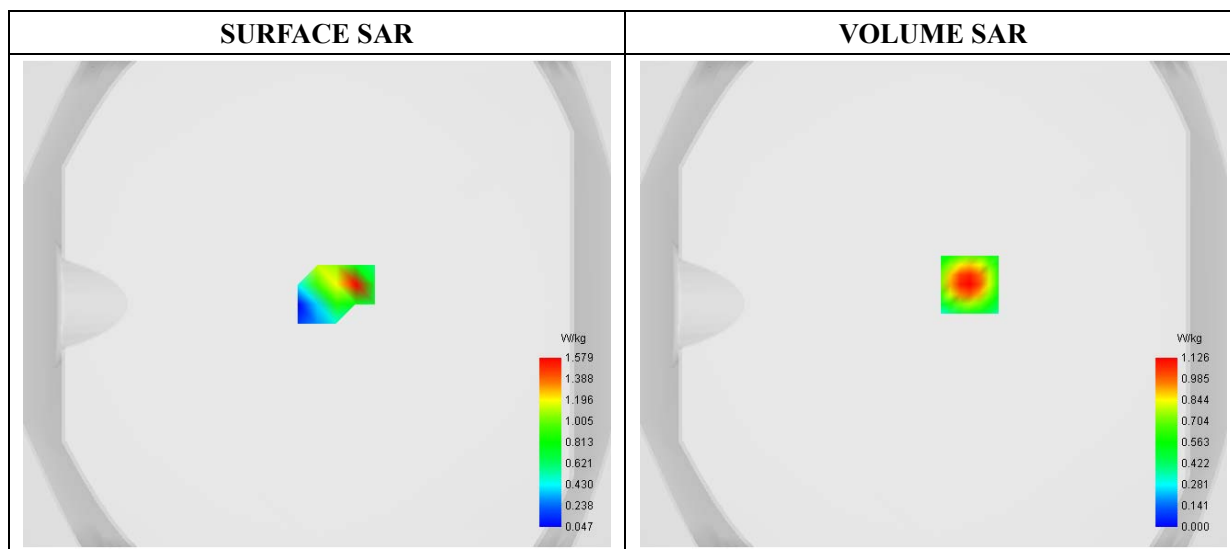

**Maximum location: X=15.00, Y=8.00**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.234274</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.628076</b> |

|                   |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.00</b>  | <b>12.00</b>  | <b>14.00</b>  | <b>16.00</b>  |
| <b>SAR (W/Kg)</b> | <b>2.0413</b> | <b>1.1259</b> | <b>0.5911</b> | <b>0.2919</b> | <b>0.1669</b> | <b>0.0631</b> | <b>0.0640</b> | <b>0.0456</b> | <b>0.0276</b> |

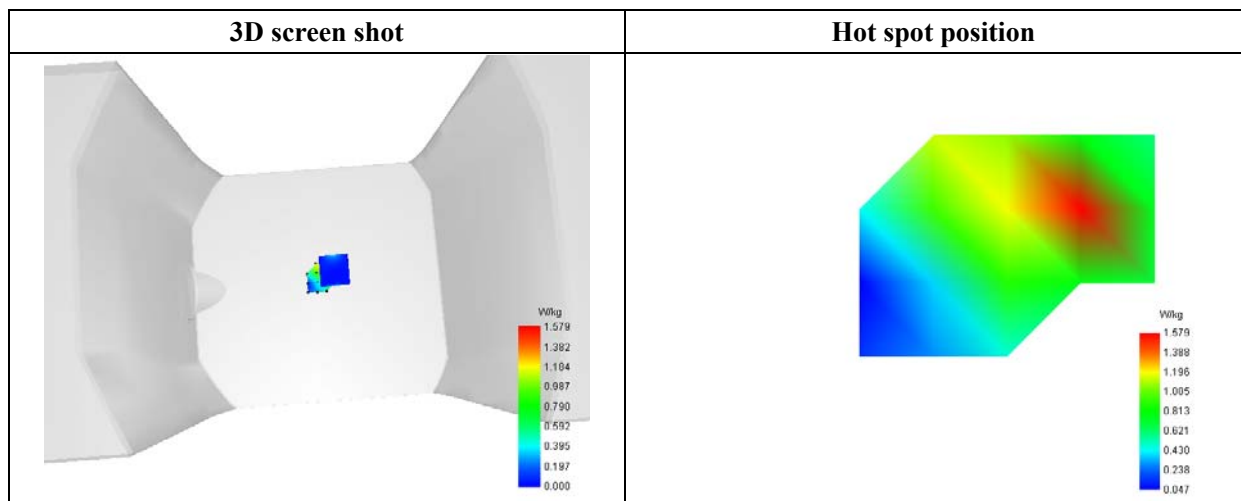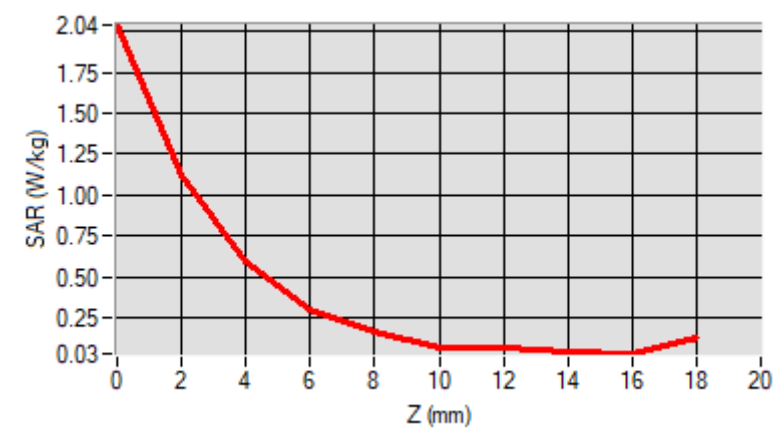

## MEASUREMENT 20

Type: Phone measurement (Complete)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.77; Calibrated: 2019/07/08

### A. Experimental conditions

|                        |                      |
|------------------------|----------------------|
| <b>Area Scan</b>       | dx=8mm dy=8mm        |
| <b>Zoom Scan</b>       | dx=4mm dy=4mm dz=2mm |
| <b>Phantom</b>         | Flat Plane           |
| <b>Device Position</b> | Top Ant B            |
| <b>Band</b>            | WiFi(5.3G)_802.11a   |
| <b>Channels</b>        | High                 |
| <b>Signal</b>          | Duty Cycle: 1:1      |

### B. SAR Measurement Results



|                                          |             |
|------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                   | 5320.000000 |
| <b>Relative Permittivity (real part)</b> | 48.502911   |
| <b>Conductivity (S/m)</b>                | 5.261483    |
| <b>Power Variation (%)</b>               | 0.943782    |
| <b>Ambient Temperature</b>               | 21.1        |
| <b>Liquid Temperature</b>                | 21.2        |

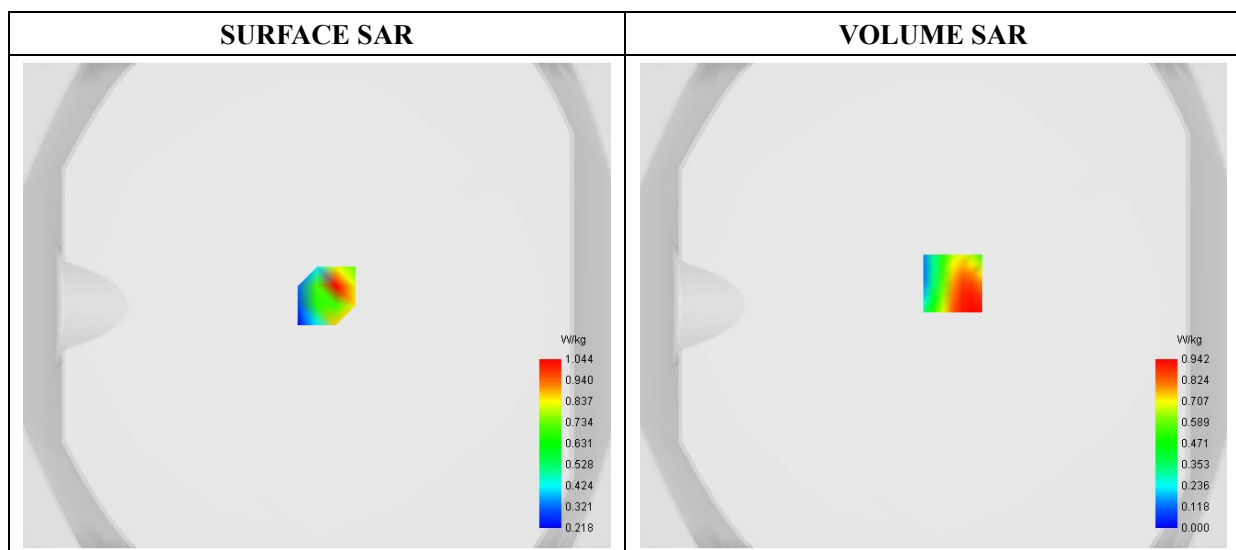

**Maximum location: X=8.00, Y=9.00**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.262641</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.718509</b> |

|                   |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.00</b>  | <b>12.00</b>  | <b>14.00</b>  | <b>16.00</b>  |
| <b>SAR (W/Kg)</b> | <b>2.2104</b> | <b>0.9419</b> | <b>0.1982</b> | <b>0.1592</b> | <b>0.0808</b> | <b>0.0305</b> | <b>0.0447</b> | <b>0.0382</b> | <b>0.0275</b> |

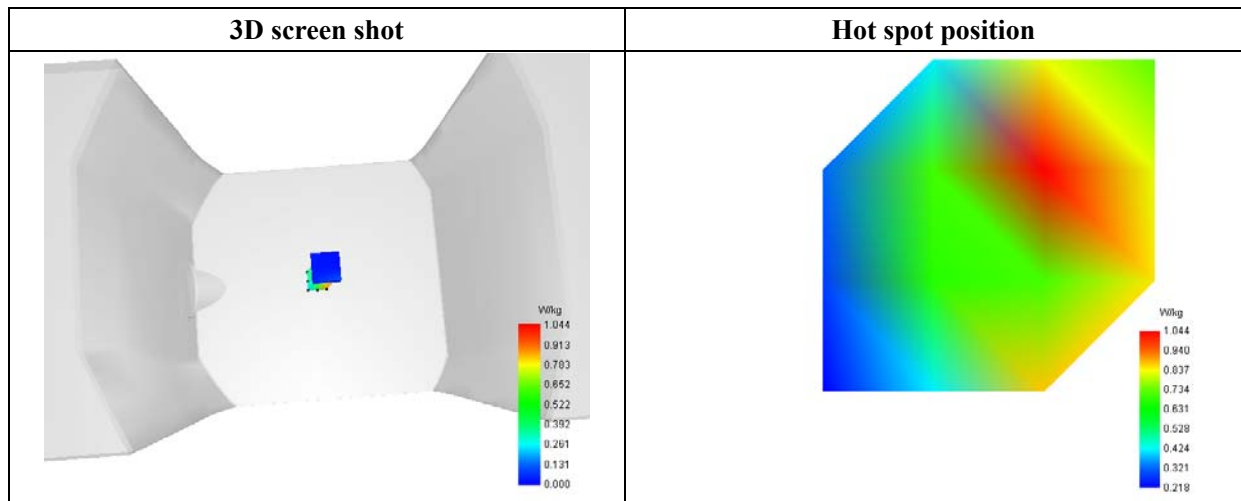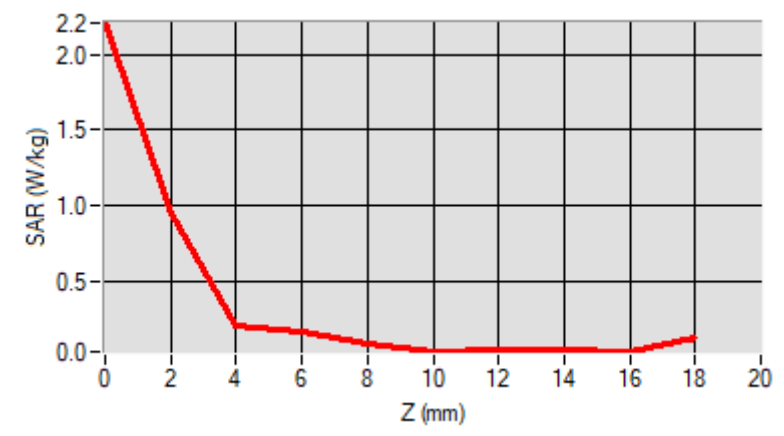

## MEASUREMENT 21

Type: Phone measurement (Complete)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.80; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back Ant B           |
| Band            | WiFi(5.6G)_802.11a   |
| Channels        | Middle               |
| Signal          | Duty Cycle: 1:1      |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5600.000000 |
| Relative Permittivity (real part) | 48.302143   |
| Conductivity (S/m)                | 5.521688    |
| Power Variation (%)               | 1.083921    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

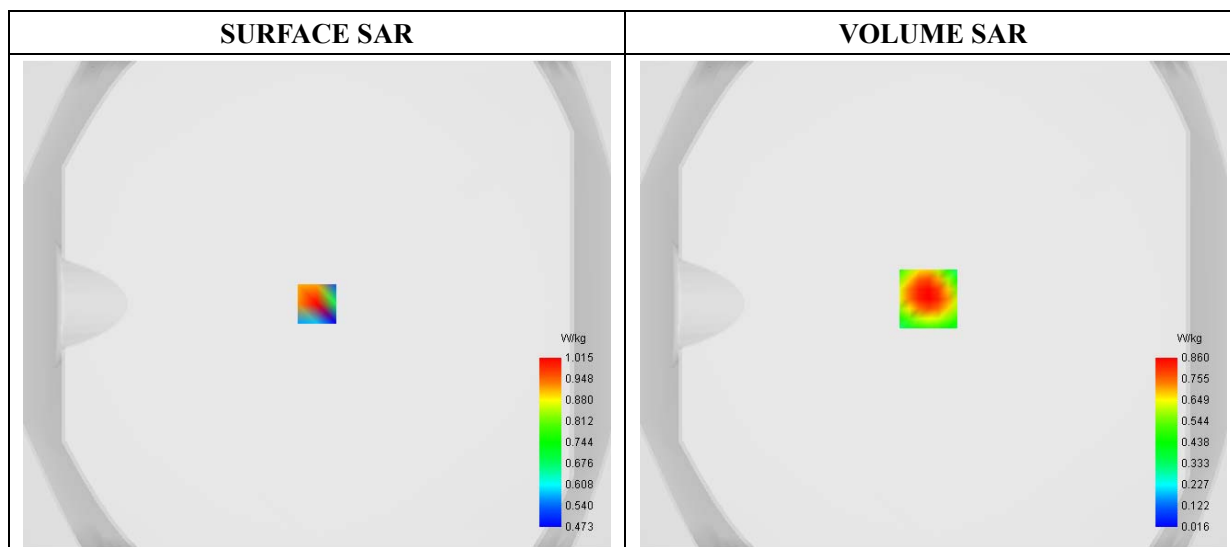

**Maximum location: X=-2.00, Y=2.00**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.231456</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.586380</b> |

|                   |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.00</b>  | <b>12.00</b>  | <b>14.00</b>  | <b>16.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.2739</b> | <b>0.8603</b> | <b>0.5701</b> | <b>0.3710</b> | <b>0.2413</b> | <b>0.1574</b> | <b>0.1031</b> | <b>0.0673</b> | <b>0.0429</b> |

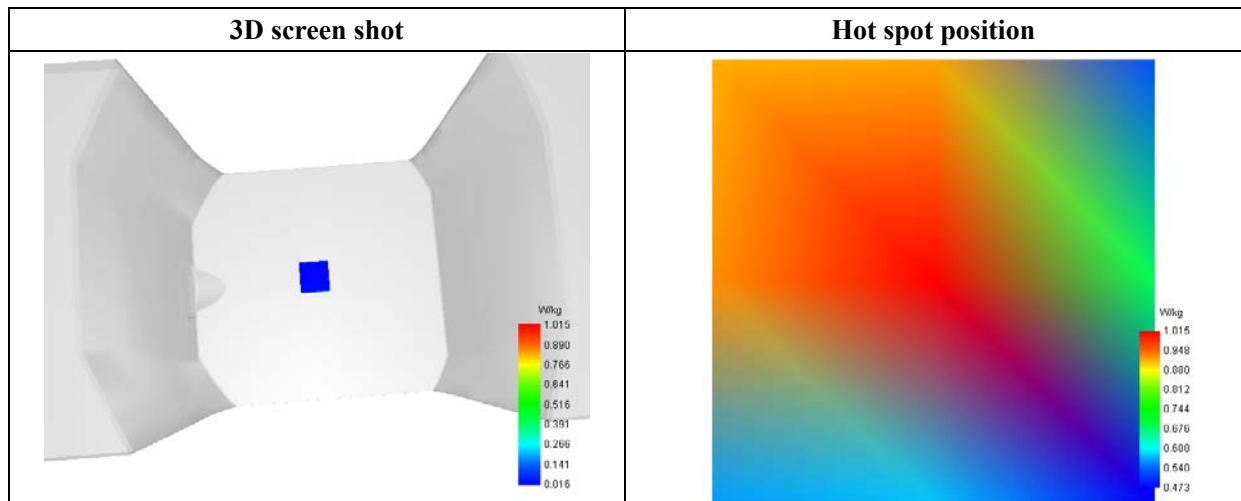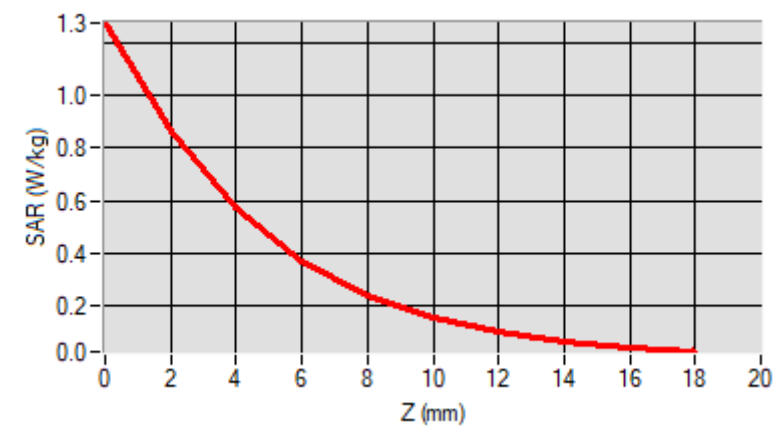

## MEASUREMENT 24

Type: Phone measurement (Complete)

Date of measurement: 12/31/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.58; Calibrated: 2019/07/08

### A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back Ant B           |
| Band            | WiFi(5.8G)_802.11a   |
| Channels        | Low                  |
| Signal          | Duty Cycle: 1:1      |

### B. SAR Measurement Results



|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5745.000000 |
| Relative Permittivity (real part) | 48.101939   |
| Conductivity (S/m)                | 5.761487    |
| Power Variation (%)               | 1.155771    |
| Ambient Temperature               | 21.1        |
| Liquid Temperature                | 21.2        |

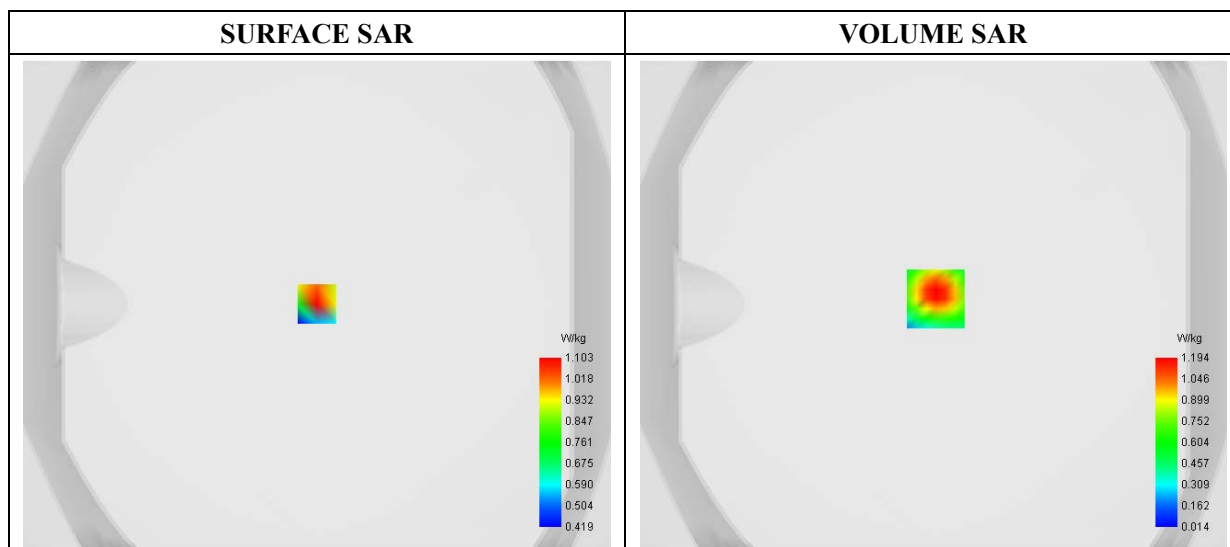

**Maximum location: X=1.00, Y=2.00**

|                       |                 |
|-----------------------|-----------------|
| <b>SAR 10g (W/Kg)</b> | <b>0.231543</b> |
| <b>SAR 1g (W/Kg)</b>  | <b>0.677729</b> |

|                   |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.00</b>  | <b>12.00</b>  | <b>14.00</b>  | <b>16.00</b>  |
| <b>SAR (W/Kg)</b> | <b>2.2546</b> | <b>1.1940</b> | <b>0.5185</b> | <b>0.3060</b> | <b>0.1285</b> | <b>0.0740</b> | <b>0.0385</b> | <b>0.0300</b> | <b>0.0268</b> |

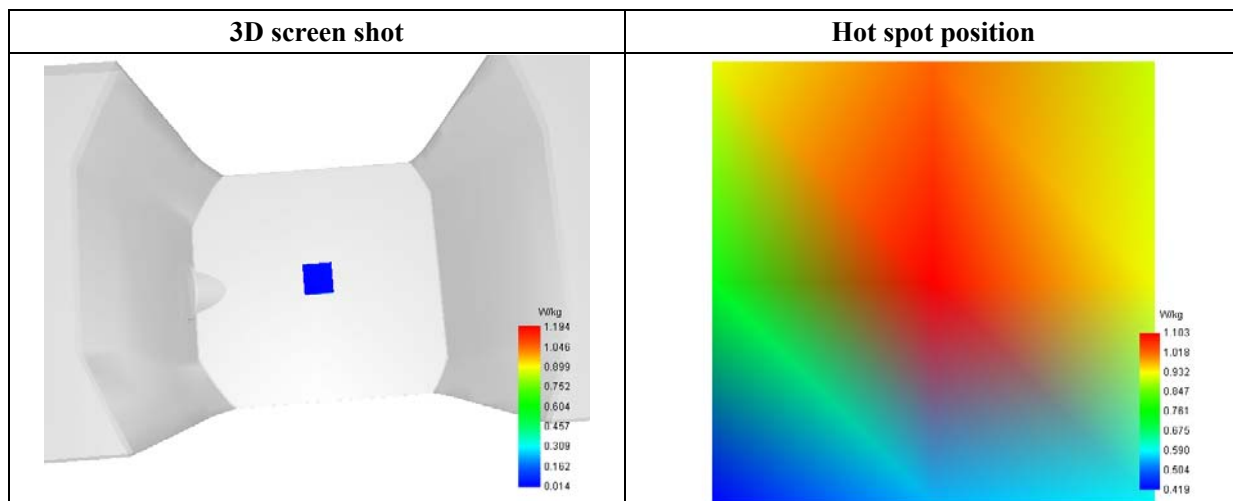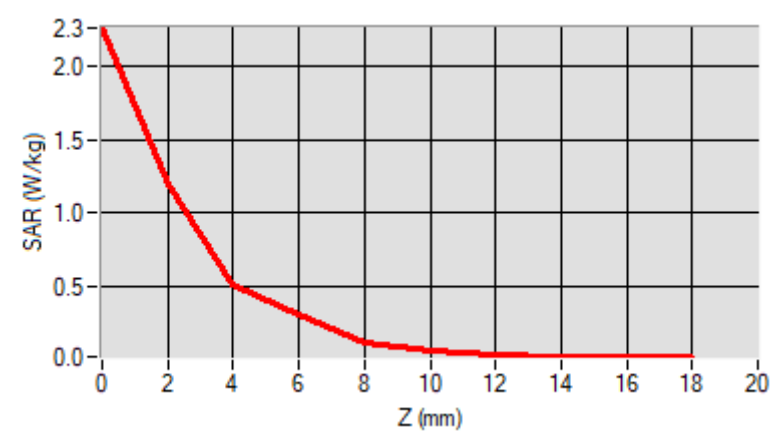

## Annex C. EUT Photos


### EUT View\_1



### EUT View\_3



**Antenna View**

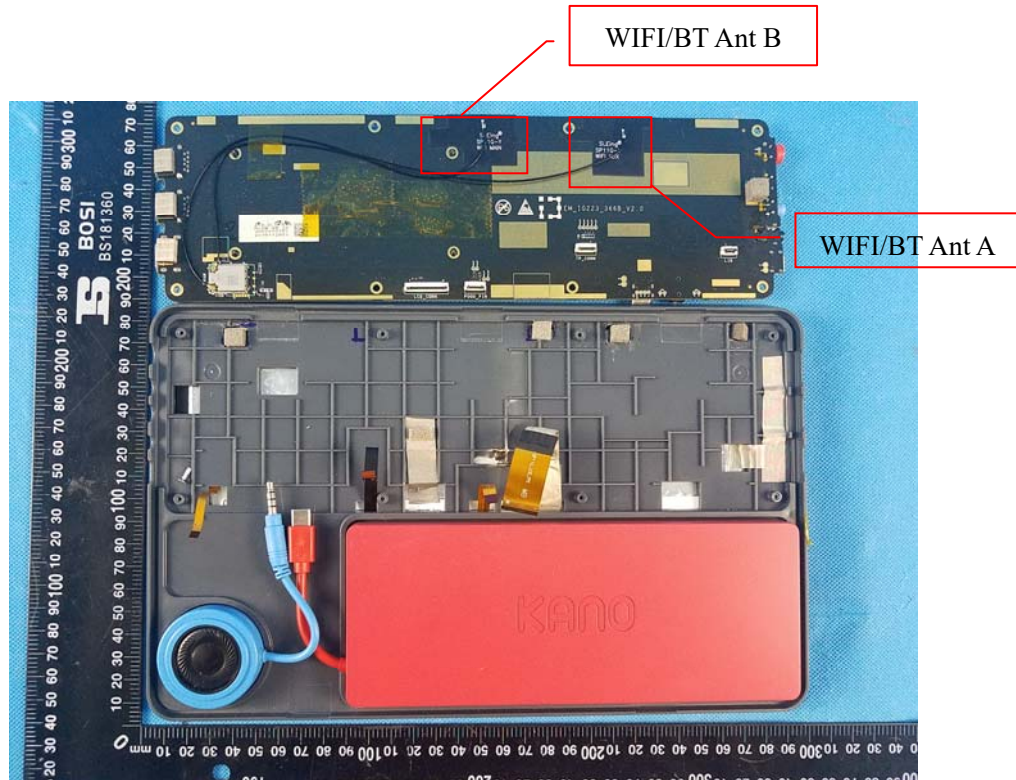

## Annex D. Test Setup Photos


---

### Body mode Exposure Conditions

**Body Back**



**Body Front**

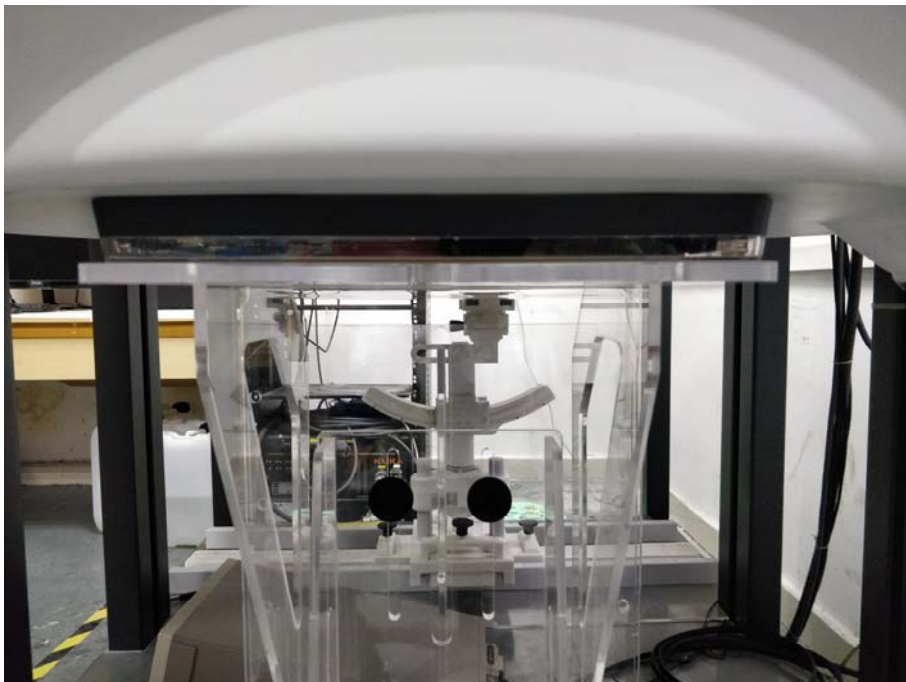

### Body Top





## **Annex E. Calibration Certificate**

---

*Please refer to the exhibit for the calibration certificate*

**\*\*\*\*\* END OF REPORT \*\*\*\*\***