



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Shenzhen Youmi Intelligent Technology Co., Ltd.

Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

FCC ID: 2ATZ4-G3MP606

IC: 26074-G3MP606

HVIN: G2239U-UF-V

Product Name: Smart phone

Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H

47 CFR Part 24, Subpart E

47 CFR Part 27

RSS-130 Issue 2, February 2019

RSS-132 Issue 4, January 31, 2023

RSS-133 Issue 6, January 2018, Amendment

RSS-199 Issue 4, July 2023

RSS-Gen, Issue 5, February 2021 Amendment 2

ANSI C63.26-2015

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231168240-00E

Date Of Issue: 2024/01/06

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	6
1. GENERAL INFORMATION	7
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	7
1.2 DESCRIPTION OF TEST CONFIGURATION.....	9
1.2.1 EUT Operation Condition:.....	9
1.2.2 Support Equipment List and Details	12
1.2.3 Support Cable List and Details	13
1.2.4 Block Diagram of Test Setup.....	13
1.3 MEASUREMENT UNCERTAINTY	14
2. SUMMARY OF TEST RESULTS	15
3. REQUIREMENTS AND TEST PROCEDURES	17
3.1 Applicable Standard For Part 22 Subpart H:.....	17
3.1.1 RF Output Power	17
3.1.2 Spurious Emissions	17
3.1.3 Frequency stability.....	17
3.2 Applicable Standard For Part 24 Subpart E:	19
3.2.1 RF Output Power	19
3.2.2 Spurious Emissions	19
3.2.3 Frequency stability.....	19
3.3 Applicable Standard For Part 27:.....	20
3.3.1 RF Output Power	20
3.3.2 Spurious Emissions	20
3.3.3 Frequency stability.....	22
3.4 APPLICABLE STANDARD FOR RSS-130 ISSUE 2, FEBRUARY 2019:	23
3.4.1 Types of modulation	23
3.4.1.1 Applicable Standard.....	23
3.4.1.2 Judgment.....	23
3.4.2 Frequency block.....	23
3.4.2.1 Applicable Standard.....	23
3.4.2.2 Judgment.....	23
3.4.3 Interoperability requirement	23
3.4.3.1 Applicable Standard.....	23
3.4.3.2 Judgment.....	23
3.4.4 Transmitter frequency stability	23
3.4.4.1 Applicable Standard.....	23
3.4.5 Transmitter output power and effective radiated power (e.r.p.).....	24
3.4.5.1 Applicable Standard.....	24
3.4.6 Transmitter unwanted emissions.....	24
3.4.6.1 Applicable Standard.....	24
3.5 APPLICABLE STANDARD FOR RSS-132 ISSUE 4, JANUARY 31, 2023:	25
3.5.1 Frequency Sub-bands	25
3.5.1.1 Applicable Standard.....	25

3.5.1.2 Judgment.....	25
3.5.2 Types of Modulation.....	25
3.5.2.1 Applicable Standard.....	25
3.5.2.2 Judgment.....	25
3.5.3 Frequency stability.....	25
3.5.3.1 Applicable Standard.....	25
3.5.4 Transmitter output power and effective radiated power (e.r.p.).....	26
3.5.4.1 Applicable Standard.....	26
3.5.5 Transmitter unwanted emissions.....	26
3.5.5.1 Applicable Standard.....	26
3.6 APPLICABLE STANDARD FOR RSS-133 ISSUE 6, JANUARY 2018 AMENDMENT:	27
3.6.1 Frequency Plan	27
3.6.1.1 Applicable Standard.....	27
3.6.1.2 Judgment.....	27
3.6.2 Types of Modulation.....	27
3.6.2.1 Applicable Standard.....	27
3.6.2.2 Judgment.....	27
3.6.3 Frequency stability.....	27
3.6.3.1 Applicable Standard.....	27
3.6.4 Transmitter Output Power and Equivalent Isotropically Radiated Power	27
3.6.4.1 Applicable Standard.....	27
3.6.5 Transmitter unwanted emissions.....	28
3.6.5.1 Applicable Standard.....	28
3.6.6 Receiver Spurious Emissions.....	28
3.6.6.1 Applicable Standard.....	28
3.7 APPLICABLE STANDARD FOR RSS-199 ISSUE 4 JULY 2023::.....	29
3.7.1 Types of Modulation.....	29
3.7.1.1 Applicable Standard.....	29
3.7.1.2 Judgment.....	29
3.7.2 Band plan	29
3.7.2.1 Applicable Standard.....	29
3.7.2.2 Judgment.....	29
3.7.3 Frequency stability.....	29
3.7.3.1 Applicable Standard.....	29
3.7.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.)	30
3.7.4.1 Applicable Standard.....	30
3.7.5 Transmitter unwanted emissions.....	30
3.7.5.1 Applicable Standard.....	30
3.8 APPLICABLE STANDARD FOR RSS-GEN, ISSUE 5, FEBRUARY 2021 AMENDMENT 2:	31
3.9 TEST METHOD:	32
3.9.1 Transmitter output power, e.r.p. and e.i.r.p.....	32
3.9.2 Occupied Bandwidth.....	33
3.9.3 Transmitter unwanted emissions-at antenna terminals	34
3.9.4 Transmitter unwanted emissions-Out of band emission	35
3.9.5 Frequency stability.....	36
3.9.6 Transmitter unwanted emissions- Radiated Spurious emissions.....	37
3.9.7 Receiver radiated emissions.....	39
4. Test DATA AND RESULTS	41
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	41
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	47
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:	53

4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:	60
4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2:	68
4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5:	89
4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 7:	106
4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 12:	122
4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41:	139
4.10 RADIATED SPURIOUS EMISSIONS:	155
4.11 RECEIVER RADIATED EMISSIONS:	165
5. EUT PHOTOGRAPHS	178
6. TEST SETUP PHOTOGRAPHS	179

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231168240-00E	Original Report	2024/01/06

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart phone
Trade Name:	UMIDIGI
EUT Model:	G3 Max
Operation Bands and modes:	GSM/GPRS: 850/1900 WCDMA: Band 2/5 LTE: Band 2/5/7/12/41
Modulation Type:	GSM/GPRS:GMSK WCDMA: BPSK,QPSK,16QAM LTE: BPSK,16QAM
Rated Input Voltage:	DC5V from adapter or DC3.85V from battery
Serial Number:	RF: 2DW6-1 RE: 2DW6-2(Below 1GHz), 2DW4-2(Above 1GHz)
EUT Received Date:	2023/11/20
EUT Received Status:	Good

Operation Voltage(V_{DC}) ▲:

Lowest:	3.45	Normal:	3.85	Highest:	4.4
---------	------	---------	------	----------	-----

Transmission Antenna Information ▲:

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G_T) (dBi)	L_c (dB)
FPC	GSM850	824-849	-1.13	0.5
	PCS1900	1850-1910	0.87	0
	WCDMA B2	1850-1910	0.87	0
	WCDMA B5	824-849	-1.13	0.5
	LTE B2	1850-1910	0.87	0
	LTE B5	824-849	-1.13	0.5
	LTE B7	2500-2570	1.89	0.5
	LTE B12	699-716	-1.94	0.5
	LTE B41	2535-2655	1.89	0.5

Note: L_c = Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Huajin	HJ-0502000W2-US	Input:100-240V~50/60Hz 0.3A Output:5.0V, 2.0A

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting: GSM/GPRS/EGPRS Function: Menu select > GSM Mobile Station > GSM 850/1900 Press Connection control to choose the different menus Press RESET > choose all the reset all settings Connection Press Signal Off to turn off the signal and change settings Network Support > GSM + GPRS or GSM + EGSM Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1 PSR Bit Stream AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β	11/15	6/15	1 /15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30 /15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/1	2/15	30/15	4/15	5/15
	CM(dB)	1.0	3.	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE- PCCH		8	8	5	7
	DHARQ	0	0	0	0	0
	A Index	20	12	1	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	82.8	205.8	308.9
	Reference E_FCI's	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 96	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Wideband Radio Communication Tester	CMW500	143458
Unknown	Antenna	Unknown	Unknown
Unknown	Earphone	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.0	EUT	Adapter
Earphone Cable	No	No	1.2	Earphone	EUT
Antenna Cable	No	No	2.0	Antenna	CMW500

1.2.4 Block Diagram of Test Setup

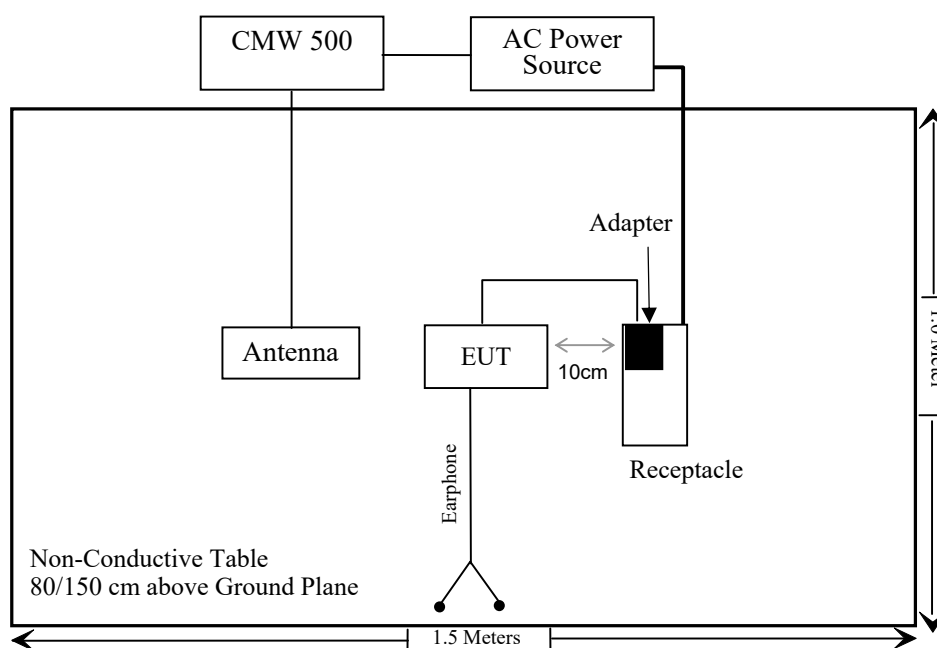

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Cellular Band: GSM 850/WCDMA Band 5/LTE Band 5:

FCC Standard Rule(s)	ISED Standard Rule(s)	Description of Test	Result	Section
/	RSS-132 Clause 5.1	Frequency Sub-bands	Compliant	3.5.1.2
/	RSS-132 Clause 5.2	Types of Modulation	Compliant	3.5.2.2
§ 2.1055, § 22.355	RSS-132 Clause 5.3	Frequency stability	Compliant	4.1, 4.4, 4.6
§2.1046;§ 22.913	RSS-132 Clause 5.4	Transmitter output power and effective radiated power (e.r.p.)	Compliant	4.1, 4.4, 4.6
§ 2.1051,§ 22.917 (a)	RSS-132 Clause 5.5	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.1, 4.4, 4.6
§ 22.917 (a)	RSS-132 Clause 5.5	Transmitter unwanted emissions- Out of band emission	Compliant	4.1, 4.4, 4.6
§ 2.1053, § 22.917 (a)	RSS-132 Clause 5.5	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049; § 22.905	RSS-Gen Clause 6.7	Occupied Bandwidth	Compliant	4.1, 4.4, 4.6

PCS Band: GSM 1900/WCDMA Band 2/LTE Band 2:

FCC Standard Rule(s)	ISED Standard Rule(s)	Description of Test	Result	Section
/	RSS-133 Clause 6.1	Frequency Plan	Compliant	3.6.1.2
/	RSS-133 Clause 6.2	Types of Modulation	Compliant	3.6.2.2
§ 2.1055, § 24.235	RSS-133 Clause 6.3	Frequency stability	Compliant	4.2, 4.3, 4.5
§2.1046,§ 24.232	RSS-133 Clause 6.4	Transmitter Output Power and Equivalent Isotropically Radiated Power	Compliant	4.2, 4.3, 4.5
§ 2.1051,§ 24.238 (a)	RSS-133 Clause 6.5	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.2, 4.3, 4.5
§ 24.238 (a)	RSS-133 Clause 6.5	Transmitter unwanted emissions- Out of band emission	Compliant	4.2, 4.3, 4.5
§ 2.1053,§ 24.238 (a)	RSS-133 Clause 6.5	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049, § 24.238	RSS-Gen Clause 6.7	Occupied Bandwidth	Compliant	4.2, 4.3, 4.5
/	RSS-133 Clause 6.6	Receiver radiated emissions limits	Compliant	4.11

LTE Band 12:

FCC Standard Rule(s)	ISED Standard Rule(s)	Description of Test	Result	Section
/	RSS-130 Clause 4.2	Types of modulation	Compliant	3.4.1.2
/	RSS-130 Clause 4.3	Frequency block	Compliant	3.4.2.2
/	RSS-130 Clause 4.4	Interoperability requirement	Compliant	3.4.3.2
§ 2.1055, §27.54	RSS-130 Clause 4.5	Transmitter frequency stability	Compliant	4.8
§2.1046, §27.50	RSS-130 Clause 4.6	Transmitter output power and effective radiated power (e.r.p.)	Compliant	4.8
§ 2.1051, §27.53	RSS-130 Clause 4.7	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.8
§27.53	RSS-130 Clause 4.7	Transmitter unwanted emissions- Out of band emission	Compliant	4.8
§ 2.1053, §27.53	RSS-130 Clause 4.7	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049, §27.53	RSS-Gen Clause 6.7	Occupied Bandwidth	Compliant	4.8

BRS/EBS Band: LTE Band 7/41:

FCC Standard Rule(s)	ISED Standard Rule(s)	Description of Test	Result	Section
/	RSS-199 Clause 5.2	Frequency Plan	Compliant	3.7.2.2
/	RSS-199 Clause 5.3	Types of Modulation	Compliant	3.7.1.2
§ 2.1055, §27.54	RSS-199 Clause 5.4	Frequency stability	Compliant	4.7, 4.9
FCC§2.1046, §27.50	RSS-199 Clause 5.5	Transmitter Output Power and Equivalent Isotropically Radiated Power	Compliant	4.7, 4.9
FCC§ 2.1051, §27.53	RSS-199 Clause 5.6	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.7, 4.9
§27.53	RSS-199 Clause 5.6	Transmitter unwanted emissions- Out of band emission	Compliant	4.7, 4.9
§ 2.1053, §27.53	RSS-199 Clause 5.6	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049, §27.53	RSS-Gen Clause 6.7	Occupied Bandwidth	Compliant	4.7, 4.9

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Applicable Standard For RSS-130 Issue 2, February 2019:

3.4.1 Types of modulation

3.4.1.1 Applicable Standard

RSS-130 clause 4.2

Equipment certified under this standard shall employ digital modulation

3.4.1.2 Judgment

Compliant, the device employs digital modulation.

3.4.2 Frequency block

3.4.2.1 Applicable Standard

RSS-130 clause 4.3

The frequency bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz are divided into small frequency blocks as per SRSP-518. Equipment shall operate according to the frequency plan given in the SRSP.

3.4.2.2 Judgment

Compliant, the device operates in the frequency bands 663-698 MHz, 698-756 MHz and 777-787 MHz are divided into small frequency blocks as per SRSP-518. Equipment shall operate according to the frequency plan given in the SRSP.

3.4.3 Interoperability requirement

3.4.3.1 Applicable Standard

RSS-130 clause 4.4

Mobile and portable stations in the bands 617-652 MHz and 663-698 MHz must be capable of operating on all frequencies in these bands.

3.4.3.2 Judgment

Compliant, the device employs all the range of 663-698MHz for this band.

3.4.4 Transmitter frequency stability

3.4.4.1 Applicable Standard

RSS-130 clause 4.5

For equipment that is capable of transmitting numerous channels simultaneously for different applications (e.g. LTE and narrowband – internet of things (IoT)), the occupied bandwidth shall be the bandwidth representing the sum of the occupied bandwidths of these channels.

The frequency stability shall be sufficient to ensure that the occupied bandwidth remains within each frequency block range when tested at the temperature and supply voltage variations specified in RSS-Gen.

3.4.5 Transmitter output power and effective radiated power (e.r.p.)

3.4.5.1 Applicable Standard

RSS-130 clause 4.6.1 General

The transmitter output power shall be measured in terms of average power. In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

RSS-130 clause 4.6.2 Frequency bands 617-652 MHz and 663-698 MHz

The e.r.p. shall not exceed 3 watts for mobile equipment, fixed subscriber equipment and portable equipment.

For base and fixed equipment other than fixed subscriber equipment, refer to SRSP-518 for the equivalent isotropically radiated power (e.i.r.p.) limits.

RSS-130 clause 4.6.3 Frequency bands 698-756 MHz and 777-787 MHz

The e.r.p. shall not exceed 30 watts for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

For base and fixed equipment other than fixed subscriber equipment, refer to SRSP-518 for the e.i.r.p. limits.

3.4.6 Transmitter unwanted emissions

3.4.6.1 Applicable Standard

RSS-130 clause 4.7.1 General unwanted emissions limits

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

RSS-130 clause 4.7.2 Additional unwanted emissions limits

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

- a) The power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - (i) $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment, and
 - (ii) $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment.
- b) The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

3.5 Applicable Standard For RSS-132 Issue 4, January 31, 2023:**3.5.1 Frequency Sub-bands****3.5.1.1 Applicable Standard**

RSS-132 clause 5.1

The frequency bands 824-849 MHz and 869-894 MHz are divided into sub-bands as described in SRSP-503. These sub-bands are:

824-835 MHz, 835-845 MHz, 845-846.5 MHz, and 846.5-849 MHz for mobile transmit; and

869-880 MHz, 880-890 MHz, 890-891.5 MHz, and 891.5-894 MHz for base transmit.

3.5.1.2 Judgment

Compliant, the device operates in this band is divided into sub-bands as described in SRSP-503.

3.5.2 Types of Modulation**3.5.2.1 Applicable Standard**

RSS-132 clause 5.2

Digital modulation shall be used.

3.5.2.2 Judgment

Compliant, the device operates under this standard use digital modulation.

3.5.3 Frequency stability**3.5.3.1 Applicable Standard**

RSS-132 clause 5.3

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within each of the sub-bands when tested at the temperature and supply voltage variations specified in [RSS-Gen](#).

3.5.4 Transmitter output power and effective radiated power (e.r.p.)

3.5.4.1 Applicable Standard

RSS-132 clause 5.4

The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment. The effective isotropic radiated power (e.i.r.p.) shall not exceed the limits specified in [SRSP-503](#) for base station equipment.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

3.5.5 Transmitter unwanted emissions

3.5.5.1 Applicable Standard

RSS-132 clause 5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

- (i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).
- (ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

3.6 Applicable Standard For RSS-133 Issue 6, January 2018 Amendment:**3.6.1 Frequency Plan****3.6.1.1 Applicable Standard**

RSS-133 clause 6.1

The frequency plan is described in SRSP-510.

3.6.1.2 Judgment

Compliant, the device operates in this band is Compliant with SRSP-510.

3.6.2 Types of Modulation**3.6.2.1 Applicable Standard**

RSS-133 clause 6.2

The devices shall employ digital modulation techniques.

3.6.2.2 Judgment

Compliant, the device operates under this standard use digital modulation.

3.6.3 Frequency stability**3.6.3.1 Applicable Standard**

RSS-133 clause 6.3

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

3.6.4 Transmitter Output Power and Equivalent Isotropically Radiated Power**3.6.4.1 Applicable Standard**

RSS-133 clause 6.4

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

3.6.5 Transmitter unwanted emissions

3.6.5.1 Applicable Standard

RSS-133 clause 6.5.1 Out-of-Block Emissions

Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

3.6.6 Receiver Spurious Emissions

3.6.6.1 Applicable Standard

RSS-133 clause 6.6

Receiver spurious emissions shall comply with the limits specified in RSS-Gen.

3.7 Applicable Standard For RSS-199 Issue 4 July 2023::

3.7.1 Types of Modulation

3.7.1.1 Applicable Standard

RSS-199 clause 5.3

Equipment certified under this standard shall employ digital modulation.

3.7.1.2 Judgment

Compliant, the device operates under this standard use digital modulation.

3.7.2 Band plan

3.7.2.1 Applicable Standard

RSS-199 clause 5.2

The band 2500-2690 MHz is divided into 7 paired blocks and 2 unpaired blocks as shown in table 1 and 2. SRSP-517 contains the detailed band plan. Frequency blocks can be aggregated to form a frequency block group.

3.7.2.2 Judgment

Compliant, the device operates in this band is Compliant with SRSP-517.

3.7.3 Frequency stability

3.7.3.1 Applicable Standard

RSS-199 clause 5.4

The transmitter frequency stability limit shall be determined as follows:

(a) the frequency offset shall be measured according to the procedure described in RSS-Gen and recorded.

(b) using a resolution bandwidth equal to that permitted within the 1 MHz band immediately outside the channel edge, as found in section 4.5, reference points will be selected at the unwanted emission limits, which comply with the attenuation specified in section 4.5 for the type of device under test, on the emission mask of the lowest and highest channels. The frequency at these points shall be recorded as f_L and f_H respectively.

The applicant shall ensure compliance with frequency stability requirements by showing that f_L minus the frequency offset and f_H plus the frequency offset is within the frequency range in which the equipment is designed to operate.

3.7.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.)

3.7.4.1 Applicable Standard

RSS-199 clause 5.5

The transmitter output power shall be measured in terms of average value.

For base station equipment, refer to SRSP-517 for the maximum permissible e.i.r.p.

For mobile subscriber equipment, the e.i.r.p. shall not exceed 2 W. For fixed subscriber equipment, the transmitter output power shall not exceed 2 W and the e.i.r.p. shall be limited to 40 W.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

For equipment with multiple antennas, the transmitter output power and e.i.r.p. shall be measured according to ANSI C63.26-2015.

3.7.5 Transmitter unwanted emissions

3.7.5.1 Applicable Standard

RSS-199 clause 5.6

In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

- (a) for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$.
- (b) for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:
 - (i) $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
 - (ii) $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2490.5 MHz and 2496 MHz, and $55 + 10 \log_{10} p$ at or below 2490.5 MHz.

In (a) and (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

3.8 Applicable Standard for RSS-Gen, Issue 5, February 2021 Amendment 2:

Receiver radiated emissions limits

Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna ports. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least five times the highest tunable or local oscillator frequency, whichever is higher, without exceeding 40 GHz.

Spurious emissions from receivers shall not exceed the radiated emissions limits shown in table 3.

Table 3 – Receiver radiated emissions limits

Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 metres) ^{Note 1}
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Note 1: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with section 6.6.

3.9 Test Method:

3.9.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

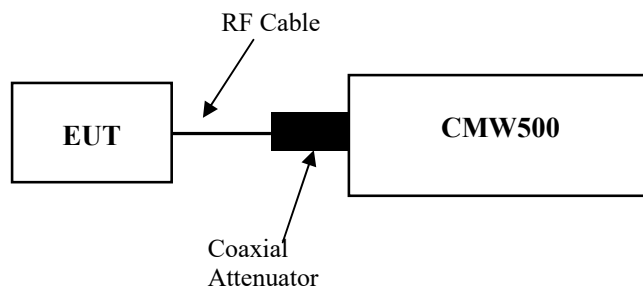

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.9.2 Occupied Bandwidth

According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.


c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3. NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

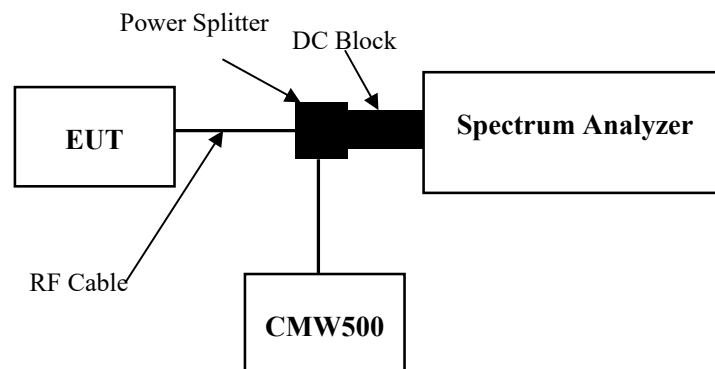


3.9.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),⁸ effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

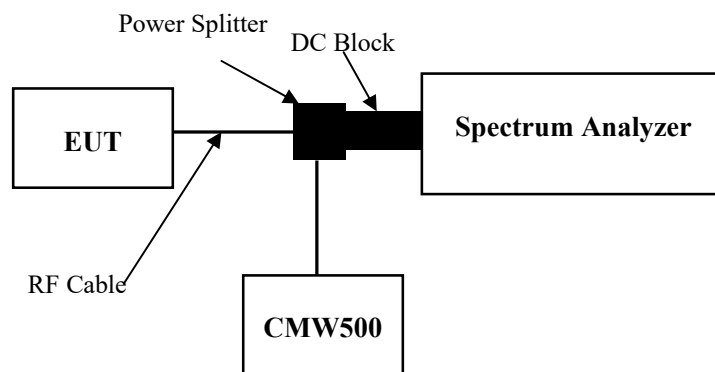


3.9.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

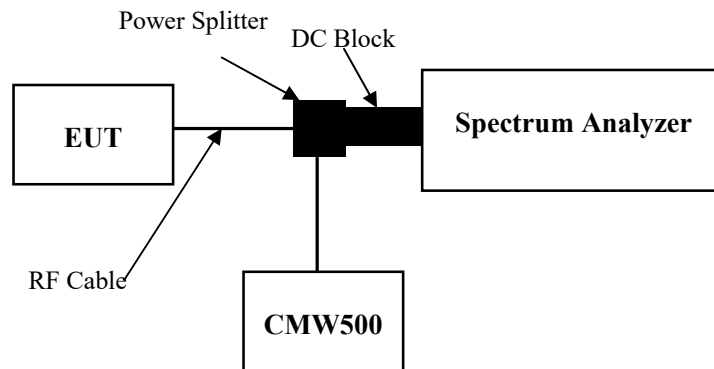

3.9.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and $\pm 15\%$ supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

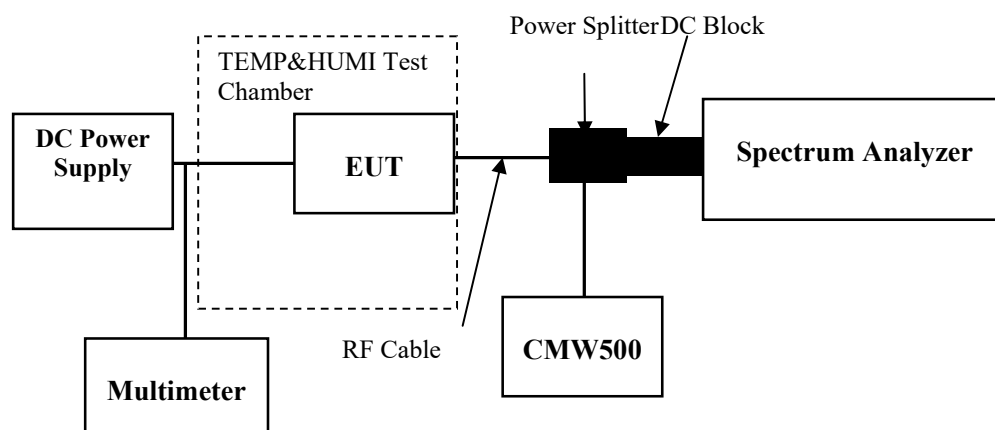

3.9.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

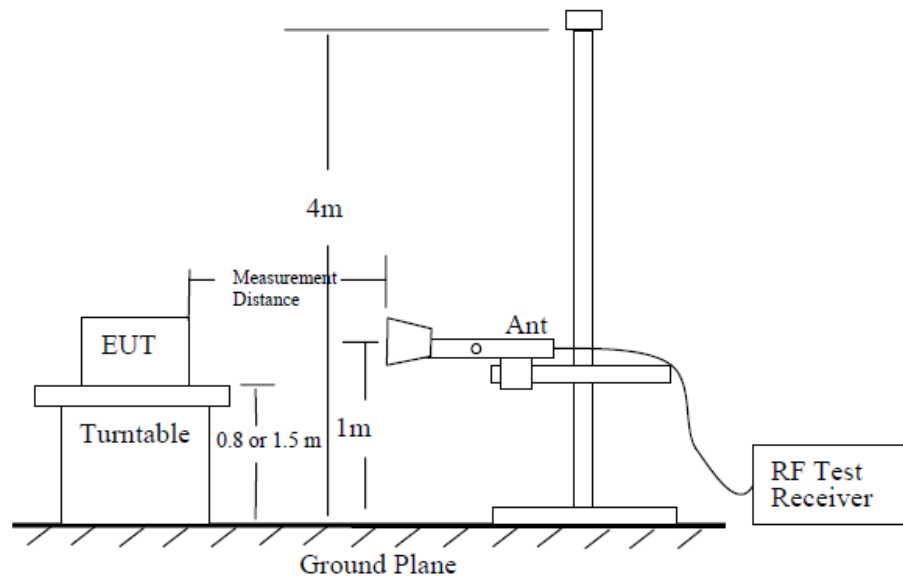


Figure 6 —Test site-up for radiated ERP and/or EIRP measurements

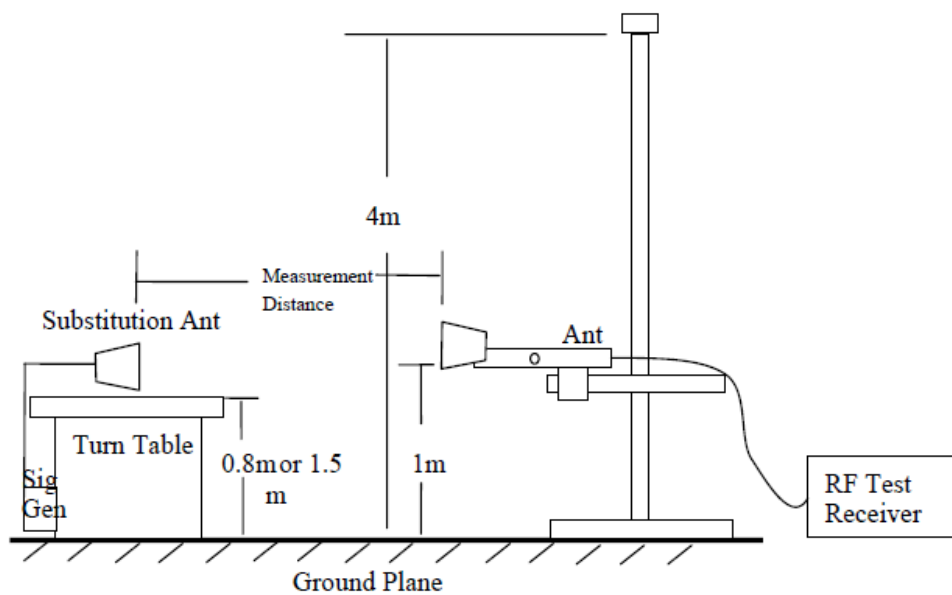


Figure 7 —Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where


P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.


3.9.7 Receiver radiated emissions

Test System Setup

Below 1GHz:

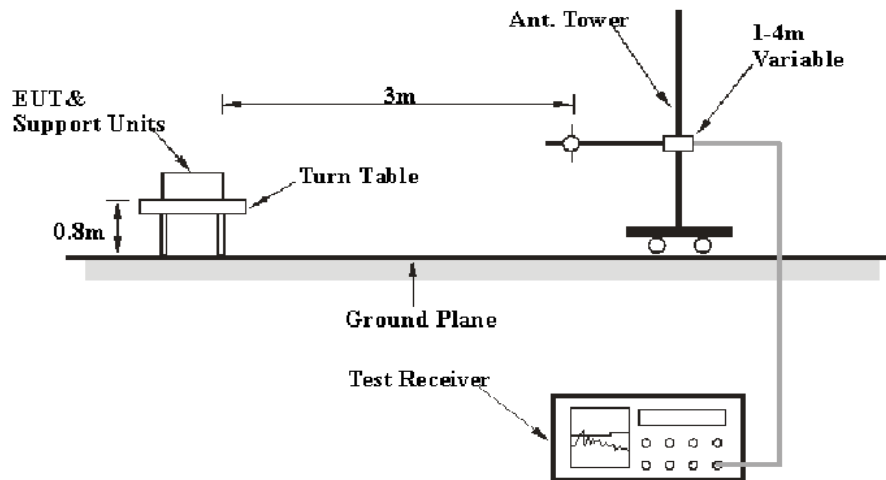

Above 1GHz:

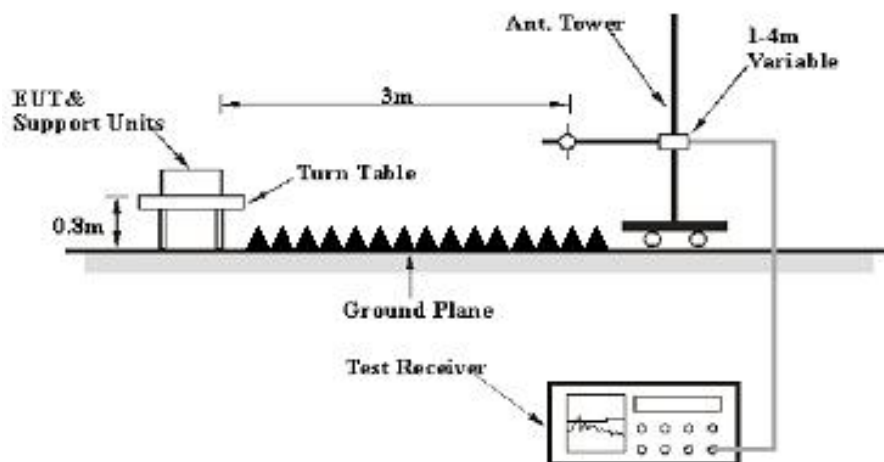

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	2DW6-1	Test Date:	2023/11/28-2024/01/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.6-26	Relative Humidity: (%)	43-48	ATM Pressure: (kPa)	101-101.5
----------------------	---------	---------------------------	-------	------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8

Test Data:

RF Output Power						
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	FCC ERP Limit (dBm)	IC ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel			
GSM	33.89	33.97	33.84	30.19	38.45	34.77
GPRS 1 Slot	34.03	34.02	33.95	30.25	38.45	34.77
GPRS 2 Slots	31.16	31.14	31.07	27.38	38.45	34.77
GPRS 3 Slots	29.16	29.13	29.03	25.38	38.45	34.77
GPRS 4 Slots	28.63	28.61	28.52	24.85	38.45	34.77
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15						
					Result:	Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.240	0.241	0.242	0.312	0.301	0.310
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.




Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

Frequency Stability for FCC:					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	105.805	0.126	2.5
	-20	3.85	106.355	0.127	2.5
	-10	3.85	102.586	0.123	2.5
	0	3.85	105.151	0.126	2.5
	10	3.85	106.643	0.127	2.5
	20	3.85	104.465	0.125	2.5
	30	3.85	102.386	0.122	2.5
	40	3.85	108.985	0.130	2.5
	50	3.85	99.237	0.119	2.5
Frequency Stability vs. Voltage	20	3.45	103.375	0.124	2.5
	20	4.4	101.724	0.122	2.5
Result:				Pass	

Frequency Stability for IC:						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	824.033	824	848.967	849
	-20	3.85	824.036	824	848.967	849
	-10	3.85	824.029	824	848.968	849
	0	3.85	824.034	824	848.968	849
	10	3.85	824.028	824	848.971	849
	20	3.85	824.034	824	848.972	849
	30	3.85	824.032	824	848.965	849
	40	3.85	824.033	824	848.969	849
	50	3.85	824.031	824	848.968	849
Frequency Stability vs. Voltage	20	3.45	824.034	824	848.968	849
	20	4.4	824.034	824	848.968	849
Result:					Pass	

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

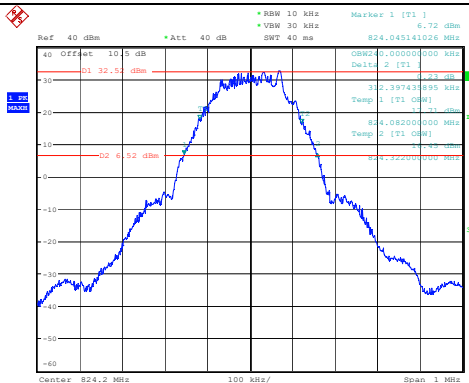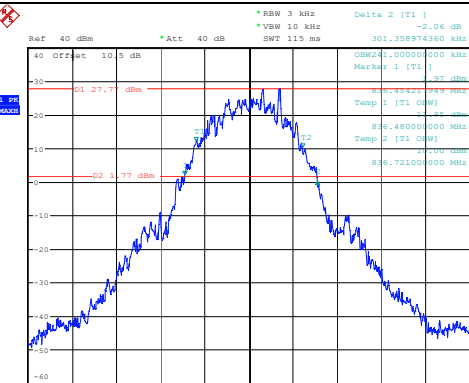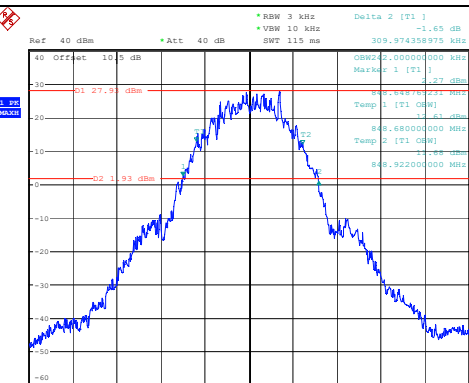
Channel	GSM
Lowest	 Ref: 40 dBm Att: 40 dB RBW 10 kHz VSW 30 kHz SWF 40 ms Marker 1 [T1] 824.045141026 MHz 6.72 dBm Offset: 10.5 dB Delta 2 [T1] 824.045141026 MHz 6.72 dBm Center 824.2 MHz 100 kHz/ Span 1 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 28.NOV.2023 13:46:45
Middle	 Ref: 40 dBm Att: 40 dB RBW 3 kHz VSW 10 kHz SWF 115 ms Delta 2 [T1] 836.395973160 MHz -2.06 dB Offset: 10.5 dB Marker 1 [T1] 836.395973160 MHz -2.06 dB Center 836.6 MHz 100 kHz/ Span 1 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 28.NOV.2023 14:06:11
Highest	 Ref: 40 dBm Att: 40 dB RBW 3 kHz VSW 10 kHz SWF 115 ms Delta 2 [T1] 848.976358975 MHz -1.65 dB Offset: 10.5 dB Marker 1 [T1] 848.976358975 MHz -1.65 dB Center 848.8 MHz 100 kHz/ Span 1 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 28.NOV.2023 14:11:39

Spurious Emissions at Antenna Terminal


Channel

GSM

Lowest

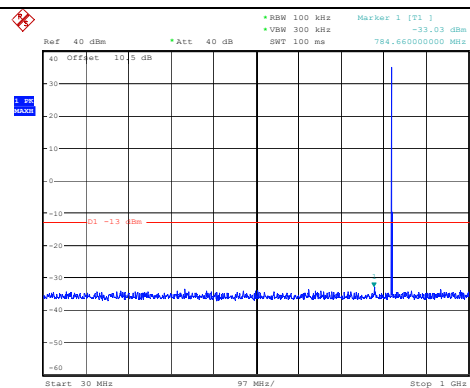


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 13:55:43

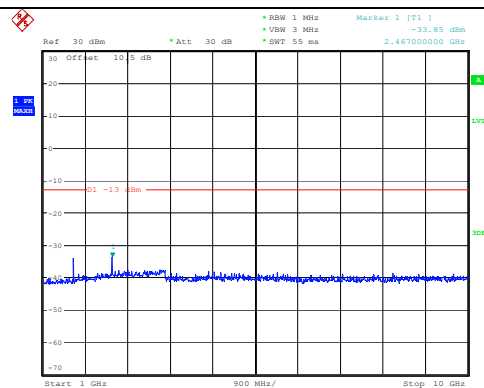


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 13:56:13

Middle

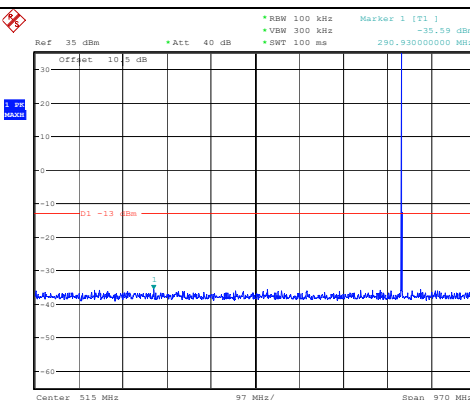


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 14:06:59

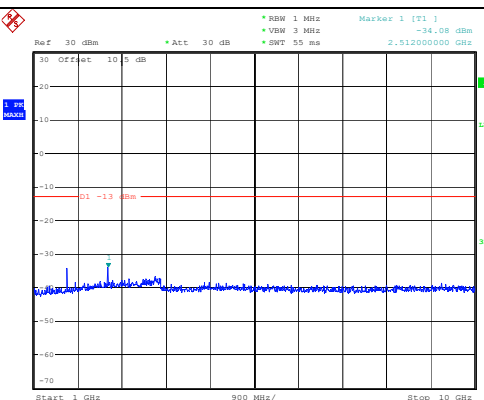


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 14:07:26


Highest

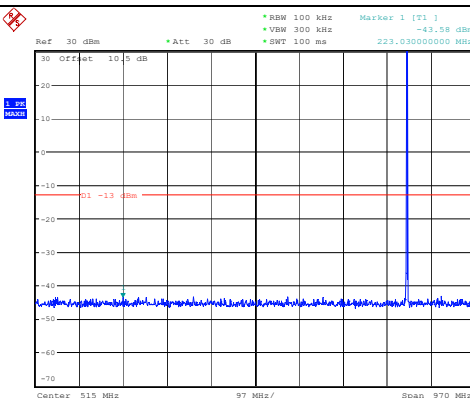

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 14:15:28

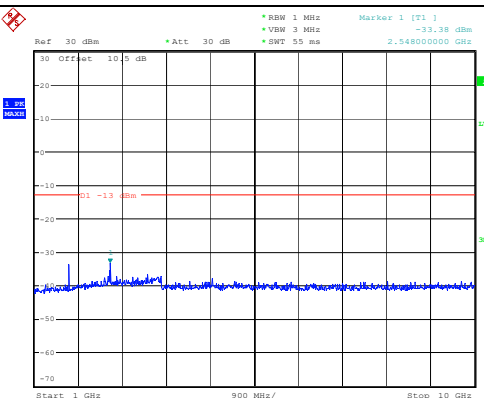

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 14:15:58

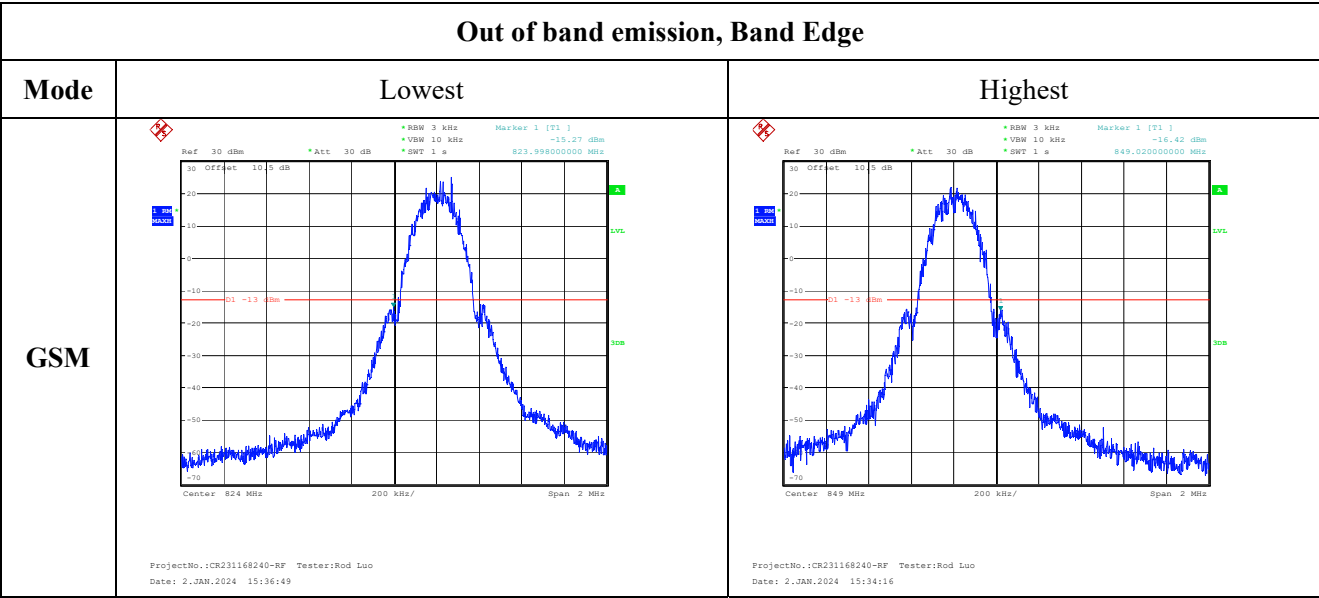

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	2DW6-1	Test Date:	2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.6	Relative Humidity: (%)	43	ATM Pressure: (kPa)	101
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8

Test Data:

RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	31.68	31.50	31.73	32.60	33
GPRS 1 Slot	31.68	31.51	31.73	32.60	33
GPRS 2 Slots	29.54	28.93	28.53	30.41	33
GPRS 3 Slots	27.70	27.14	26.72	28.57	33
GPRS 4 Slots	26.23	26.12	26.00	27.10	33
Note: EIRP=Conducted Power(dBm) - L _c (dB) + G _T (dBi)					
				Result:	Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.245	0.244	0.245	0.306	0.306	0.306
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.061	1850.000	1909.805	1910.000
	-20	3.85	1850.124	1850.000	1909.933	1910.000
	-10	3.85	1850.033	1850.000	1909.766	1910.000
	0	3.85	1850.141	1850.000	1909.512	1910.000
	10	3.85	1850.062	1850.000	1909.870	1910.000
	20	3.85	1850.028	1850.000	1909.952	1910.000
	30	3.85	1850.062	1850.000	1909.603	1910.000
	40	3.85	1850.068	1850.000	1909.866	1910.000
	50	3.85	1850.043	1850.000	1909.904	1910.000
Frequency Stability vs. Voltage	20	3.45	1850.037	1850.000	1909.758	1910.000
	20	4.4	1850.025	1850.000	1909.997	1910.000
					Result:	Pass

Occupied Bandwidth


Page 50 of 179

Spurious Emissions at Antenna Terminal


Channel

GSM

Lowest

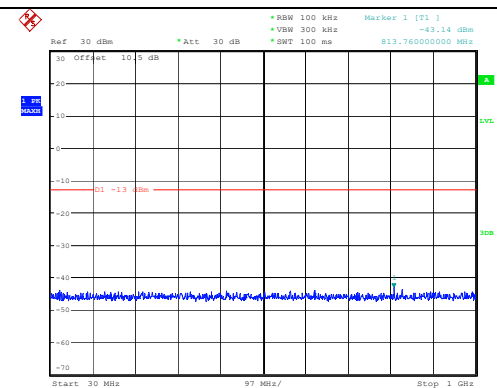


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 16:03:50

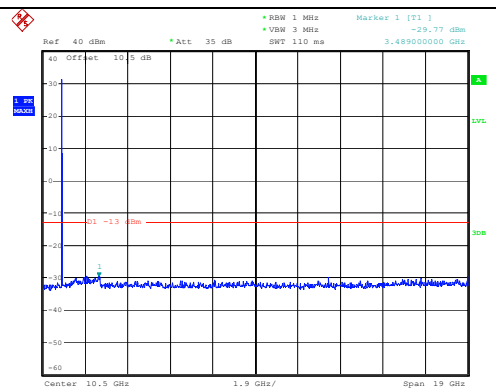


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 16:05:29

Middle

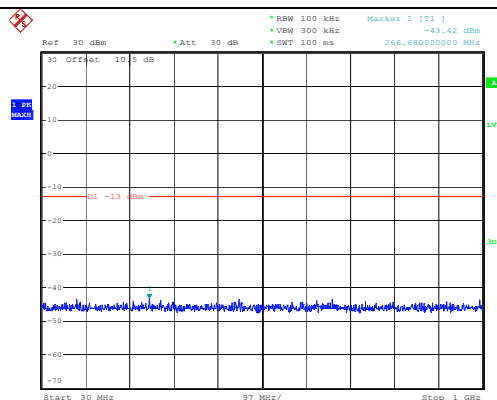


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 16:08:59

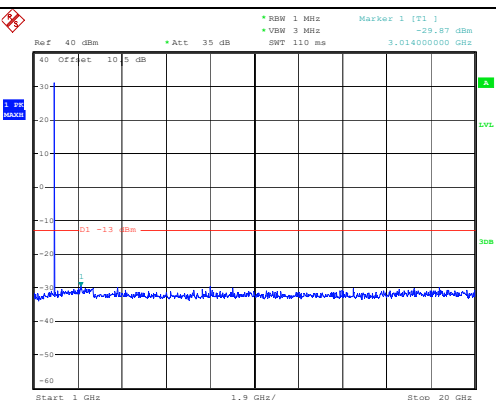


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 16:09:35

Highest

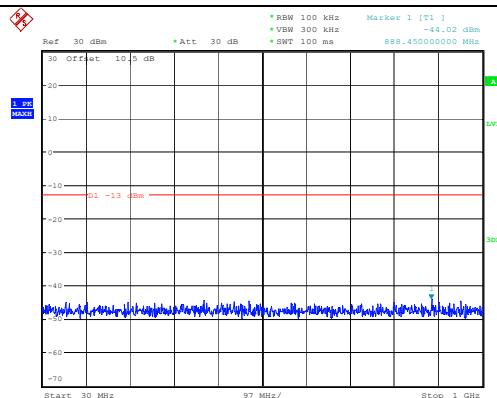

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 16:13:15

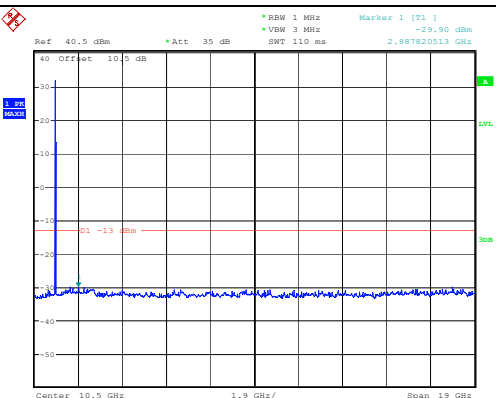

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 28.NOV.2023 16:22:05

Out of band emission, Band Edge		
Channel	Lowest	Highest
GSM	Ref 30 dBm *Att 30 dB RBW 3 kHz Marker 1: 1.85000000 GHz VBW 10 kHz -17.12 dBm SBT 500 ms	Ref 30 dBm *Att 30 dB RBW 3 kHz Marker 1: 1.91000000 GHz VBW 10 kHz -16.10 dBm SBT 500 ms
	ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 28.NOV.2023 16:03:27	ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 28.NOV.2023 16:13:04

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	2DW6-1	Test Date:	2023/11/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

Test Data:**RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.78	23.64	23.55	24.65	33
HSDPA Subtest 1	22.67	22.22	22.01	23.54	33
HSDPA Subtest 2	23.82	23.51	23.22	24.69	33
HSDPA Subtest 3	22.80	22.49	22.18	23.67	33
HSDPA Subtest 4	22.77	22.47	22.18	23.64	33
HSUPA Subtest 1	22.99	22.33	21.75	23.86	33
HSUPA Subtest 2	22.79	22.38	21.51	23.66	33
HSUPA Subtest 3	21.77	22.42	21.51	23.29	33
HSUPA Subtest 4	22.78	21.40	22.52	23.65	33
HSUPA Subtest 5	21.78	21.41	21.54	22.65	33
HSPA+ Subtest 1	21.83	22.39	22.49	23.36	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.08	2.98	2.92	13
HSDPA	4.81	4.78	4.74	13
HSUPA	5.38	5.00	5.38	13

Result:**Pass**

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.155	4.160	4.160	4.695	4.670	4.680
HSDPA	4.160	4.160	4.160	4.670	4.680	4.650
HSUPA	4.150	4.170	4.140	4.670	4.700	4.690


Note: The test plots please refer to the Plots of Occupied Bandwidth

Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

Frequency Stability						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.095	1850.000	1909.929	1910.000
	-20	3.85	1850.058	1850.000	1909.961	1910.000
	-10	3.85	1850.047	1850.000	1909.956	1910.000
	0	3.85	1850.086	1850.000	1909.898	1910.000
	10	3.85	1850.000	1850.000	1909.803	1910.000
	20	3.85	1850.012	1850.000	1909.942	1910.000
	30	3.85	1850.101	1850.000	1909.869	1910.000
	40	3.85	1850.111	1850.000	1909.762	1910.000
	50	3.85	1850.155	1850.000	1909.900	1910.000
Frequency Stability vs. Voltage	20	3.45	1850.039	1850.000	1909.951	1910.000
	20	4.4	1850.096	1850.000	1909.910	1910.000
Result:					Pass	

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

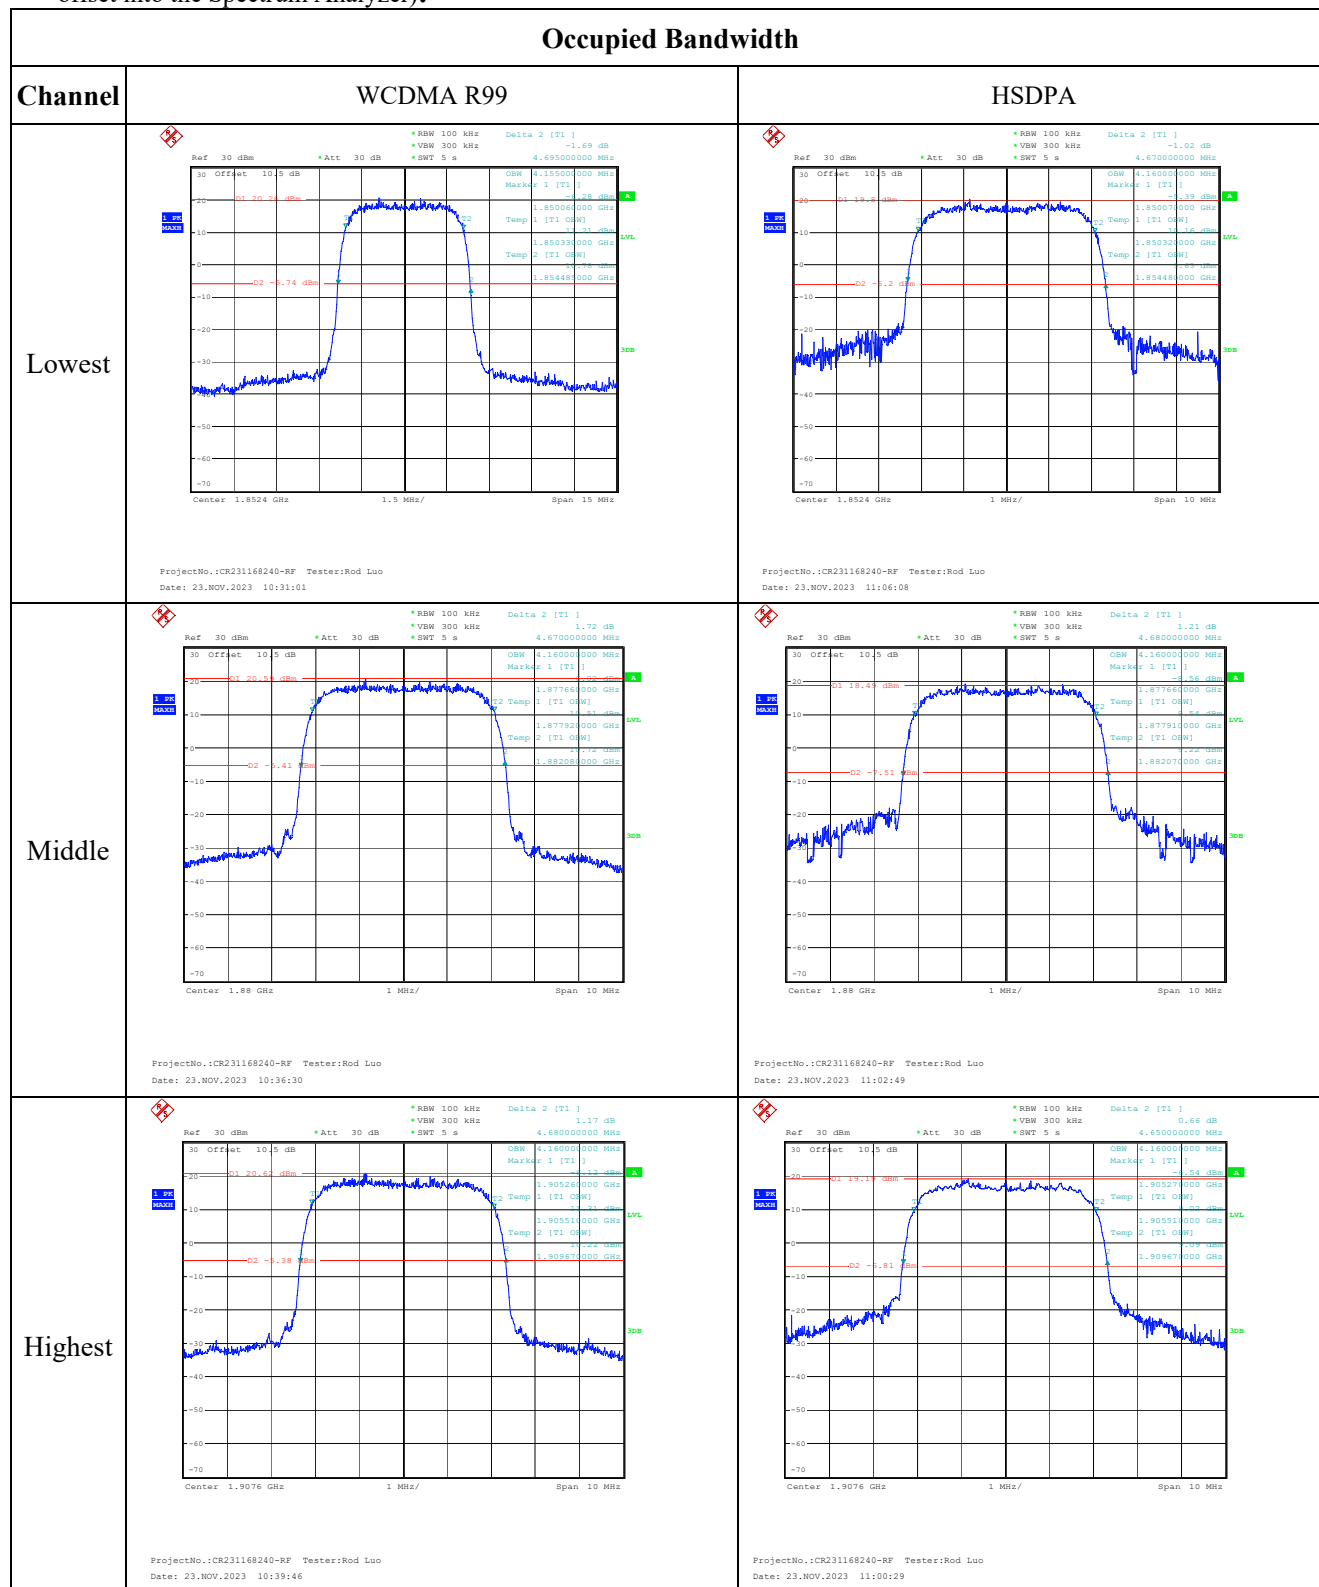


Occupied Bandwidth

Channel


HSUPA

Lowest

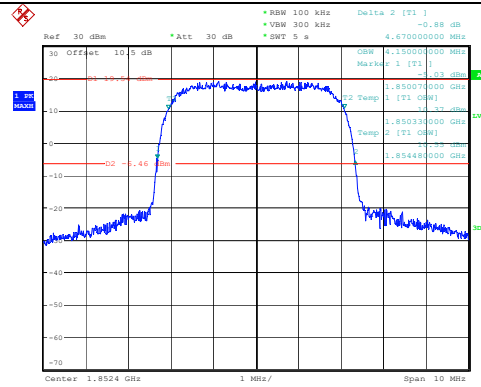


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 11:17:05

Middle

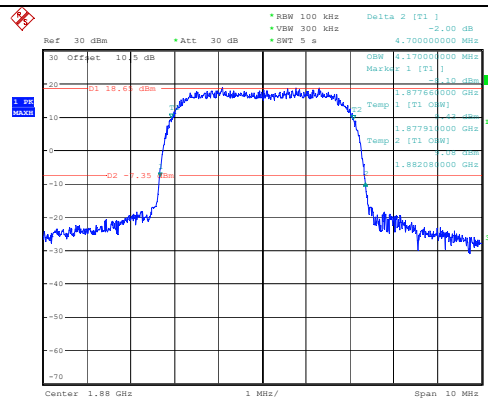

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 11:21:38

Highest

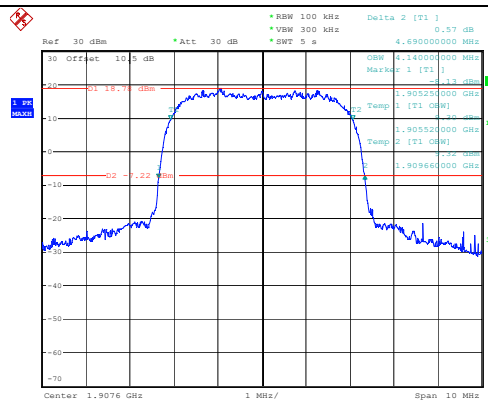


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 11:26:43

Spurious Emissions at Antenna Terminal


Channel

WCDMA R99

Lowest

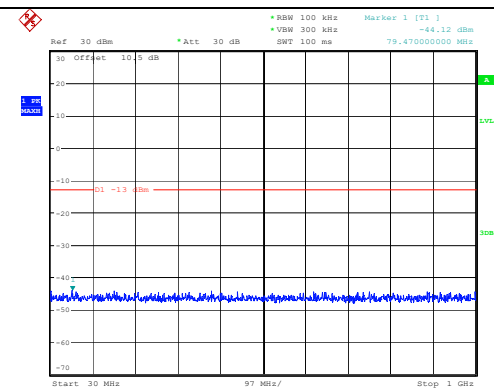


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 10:31:26

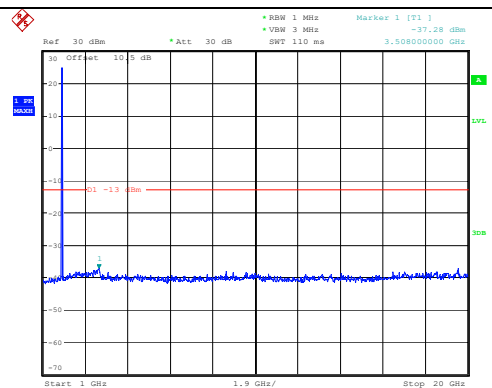


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 10:33:54

Middle

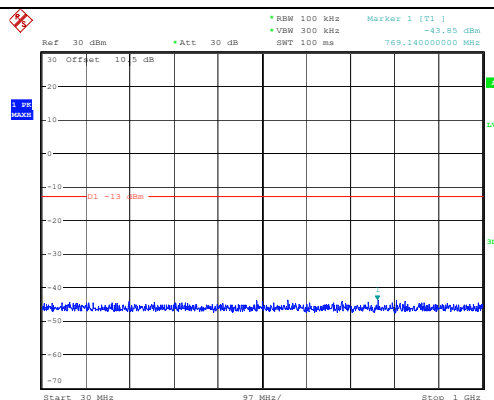


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 10:36:50

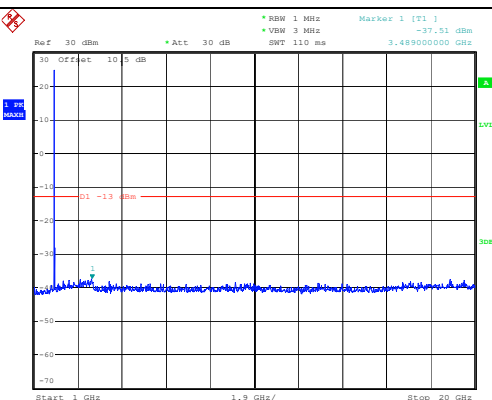


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 10:37:14

Highest






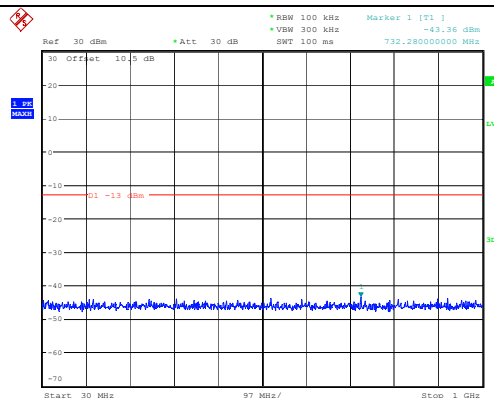


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 10:40:22

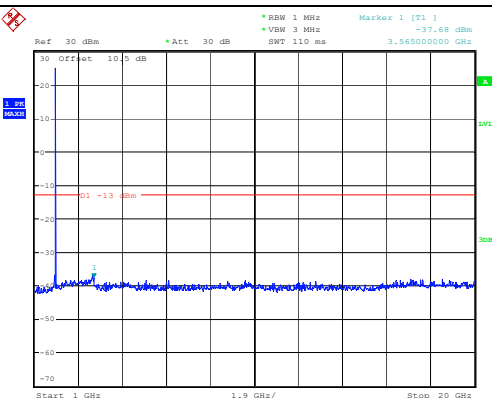

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 10:40:47

Out of band emission, Band Edge

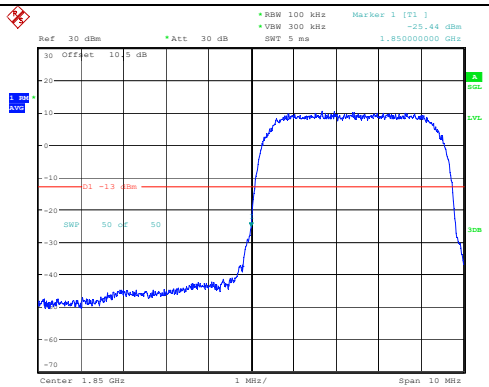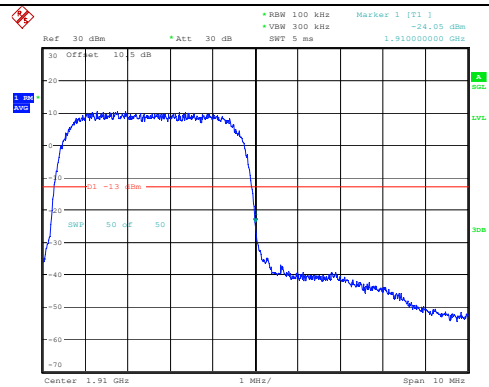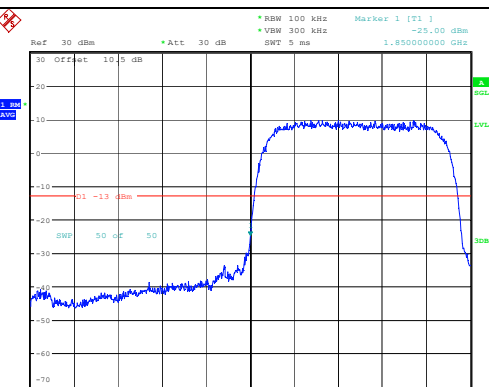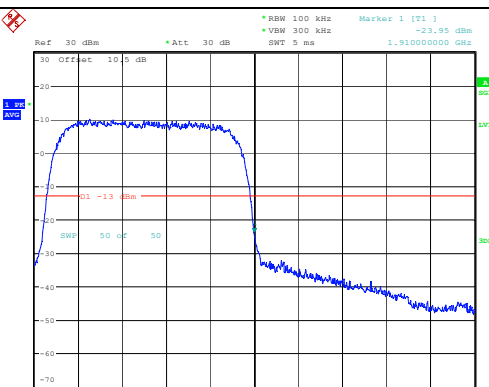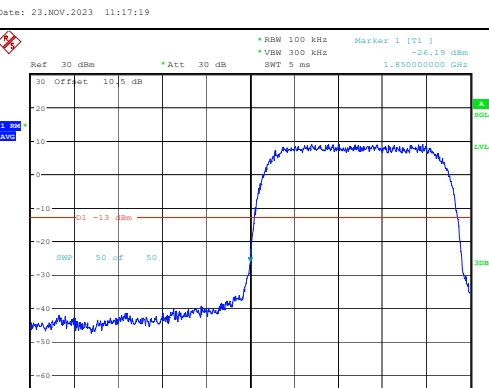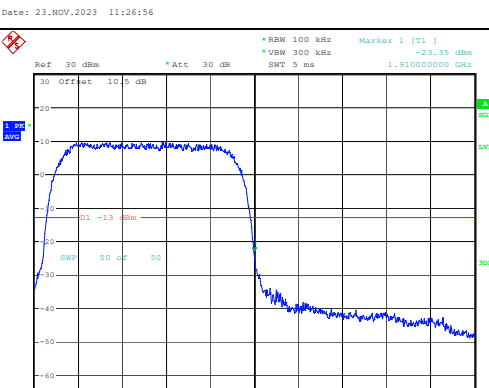Mode	Lowest	Highest
R99	 Ref 30 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -25.44 dBm SWT 5 ms 1.850000000 GHz Center 1.85 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 10:31:11	 Ref 30 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -24.05 dBm SWT 5 ms 1.910000000 GHz Center 1.91 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 10:40:03
HSUPA	 Ref 30 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -25.00 dBm SWT 5 ms 1.850000000 GHz Center 1.85 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 11:17:19	 Ref 30 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -23.95 dBm SWT 5 ms 1.910000000 GHz Center 1.91 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 11:26:56
HSDPA	 Ref 30 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -26.19 dBm SWT 5 ms 1.850000000 GHz Center 1.85 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 11:06:35	 Ref 30 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -23.35 dBm SWT 5 ms 1.910000000 GHz Center 1.91 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 10:49:26

4.4 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	2DW6-1	Test Date:	2023/11/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.7	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

Test Data:**RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	FCC ERP Limit (dBm)	IC ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel			
WCDMA R99	24.22	24.24	24.14	20.46	38.45	34.77
HSDPA Subtest 1	22.99	22.8	22.64	19.21	38.45	34.77
HSDPA Subtest 2	22.91	22.23	22.72	19.13	38.45	34.77
HSDPA Subtest 3	22.90	22.42	22.57	19.12	38.45	34.77
HSDPA Subtest 4	22.95	22.35	22.97	19.19	38.45	34.77
HSUPA Subtest 1	22.34	22.99	22.83	19.21	38.45	34.77
HSUPA Subtest 2	22.35	22.95	22.16	19.17	38.45	34.77
HSUPA Subtest 3	22.17	22.16	22.15	18.39	38.45	34.77
HSUPA Subtest 4	22.19	22.81	22.10	19.03	38.45	34.77
HSUPA Subtest 5	22.17	22.79	22.20	19.01	38.45	34.77
HSPA+ Subtest 1	23.14	22.97	23.04	19.36	38.45	34.77

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.82	3.24	3.17	13
HSDPA	4.49	4.68	4.49	13
HSUPA	4.94	5.45	5.38	13

Result:**Pass**

Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.160	4.150	4.150	4.690	4.690	4.680
HSDPA	4.160	4.150	4.150	4.670	4.680	4.660
HSUPA	4.170	4.170	4.160	4.730	4.700	4.670

Note: The test plots please refer to the Plots of Occupied Bandwidth

Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

Frequency Stability for FCC

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	101.869	0.122	2.5
	-20	3.85	101.411	0.121	2.5
	-10	3.85	105.073	0.126	2.5
	0	3.85	106.465	0.127	2.5
	10	3.85	99.453	0.119	2.5
	20	3.85	98.612	0.118	2.5
	30	3.85	107.146	0.128	2.5
	40	3.85	104.285	0.125	2.5
	50	3.85	103.837	0.124	2.5
Frequency Stability vs. Voltage	20	3.45	102.499	0.123	2.5
	20	4.4	106.643	0.127	2.5
Result:				Pass	

Frequency Stability for IC:						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{bc})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	824.010	824	848.988	849
	-20	3.85	824.017	824	848.987	849
	-10	3.85	824.011	824	848.990	849
	0	3.85	824.014	824	848.987	849
	10	3.85	824.013	824	848.987	849
	20	3.85	824.011	824	848.986	849
	30	3.85	824.012	824	848.990	849
	40	3.85	824.012	824	848.991	849
	50	3.85	824.013	824	848.989	849
Frequency Stability vs. Voltage	20	3.45	824.016	824	848.986	849
	20	4.4	824.012	824	848.986	849
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

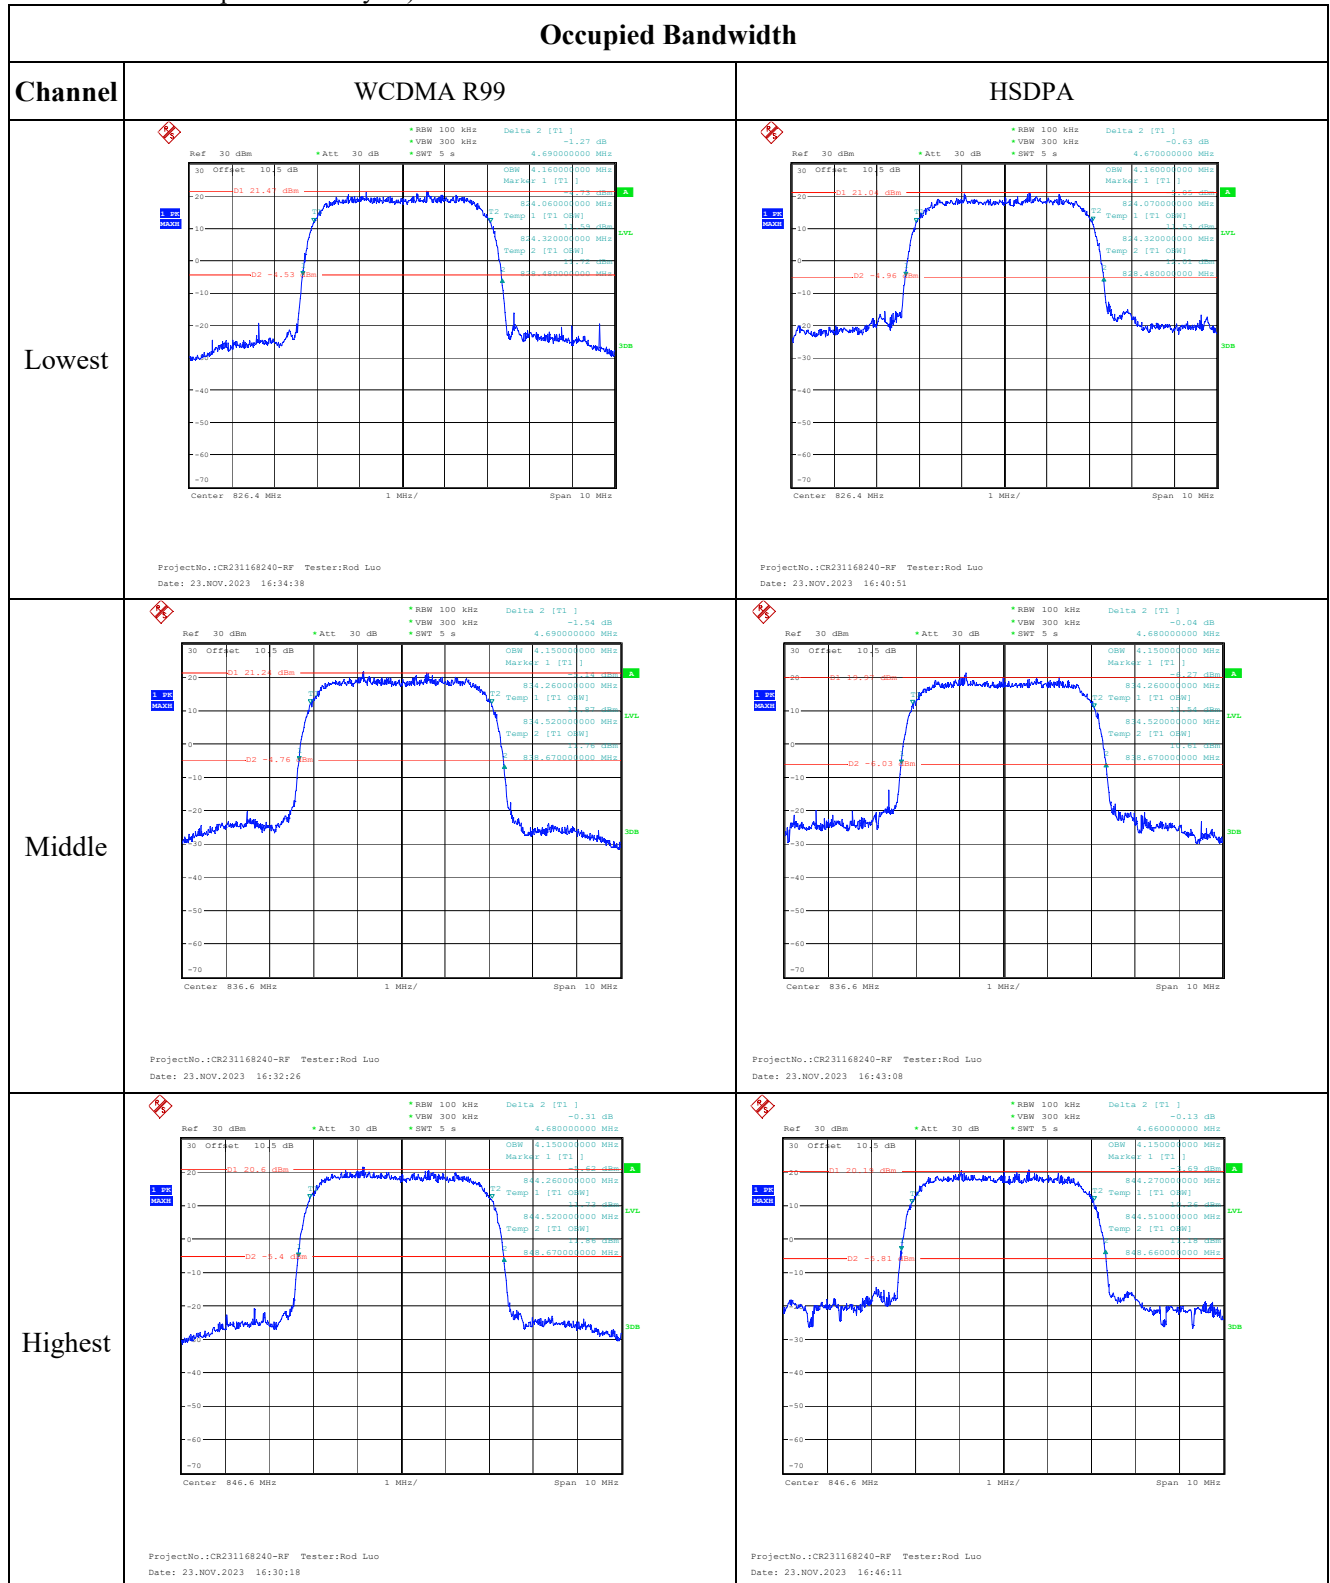


Spurious Emissions at Antenna Terminal


Channel

WCDMA R99

Lowest

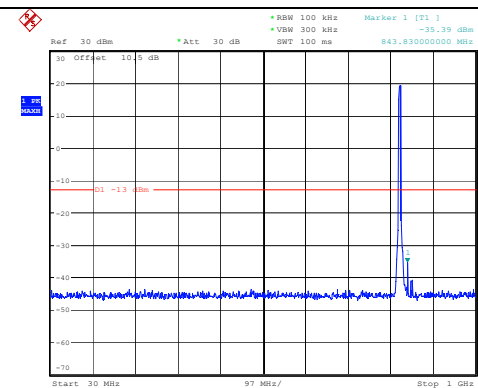


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 16:38:07

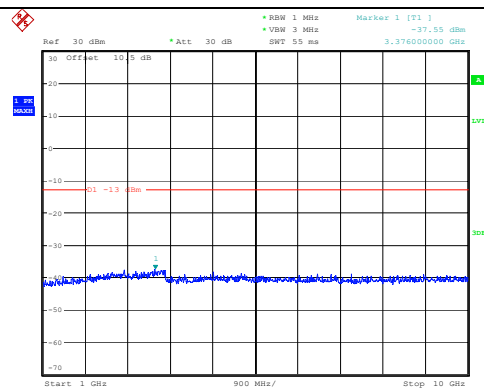


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 16:35:51

Middle

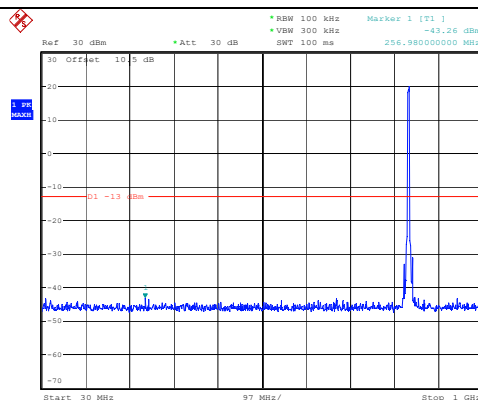


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 16:33:00

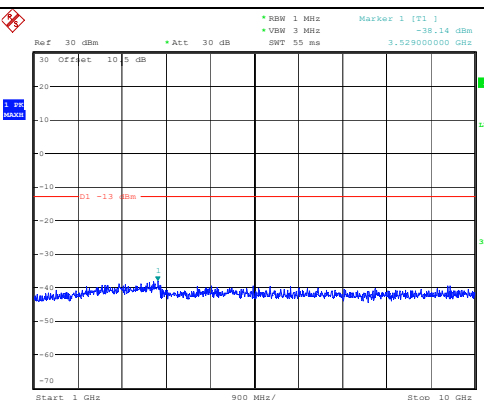


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 16:33:08

Highest






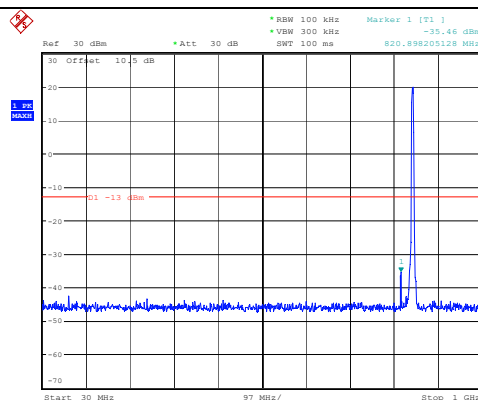


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 16:31:10

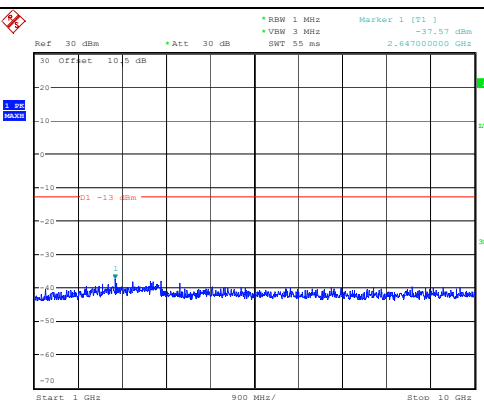

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 23.NOV.2023 16:31:17

Out of band emission, Band Edge

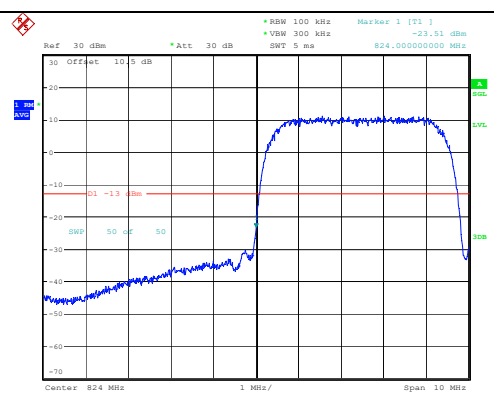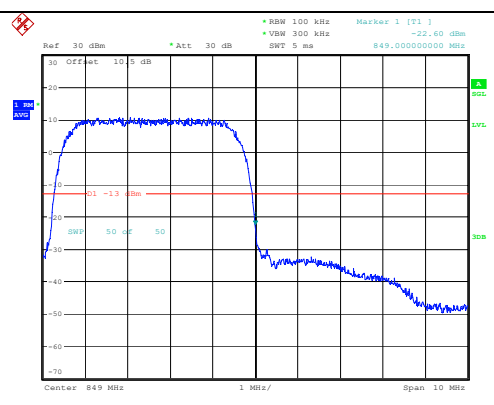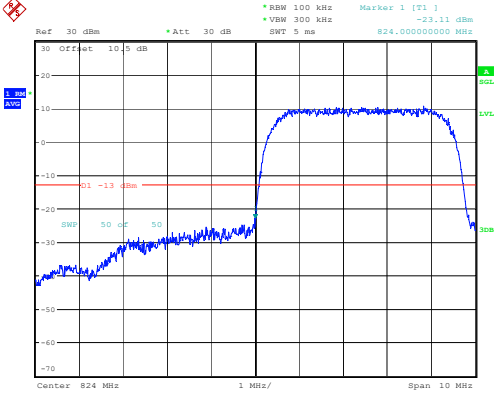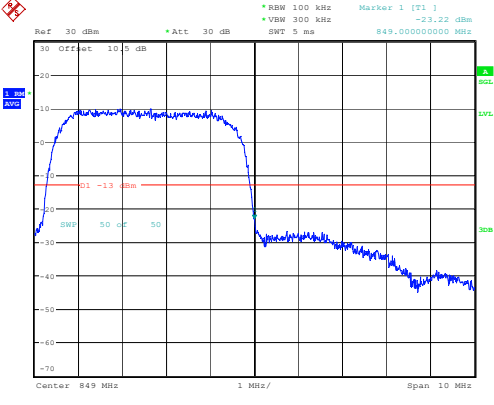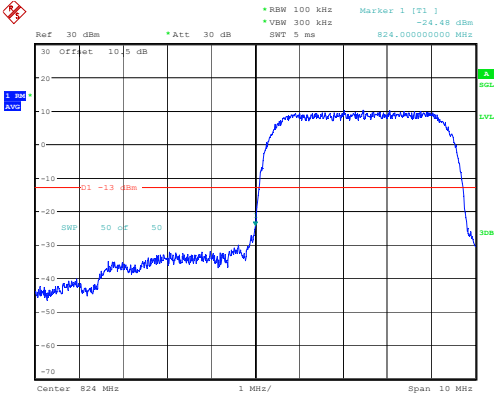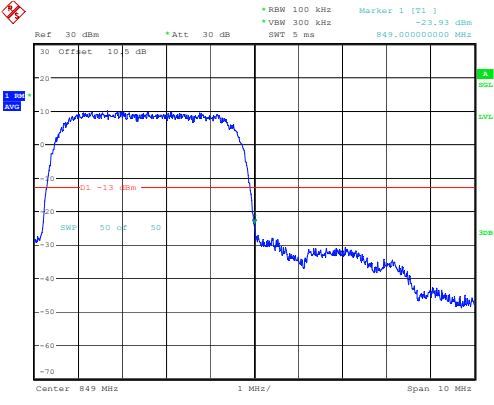Mode	Lowest	Highest
R99	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -23.51 dBm *VSW 300 kHz SWT 5 ms 824.00000000 MHz Center 824 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 16:34:49	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -22.60 dBm *VSW 300 kHz SWT 5 ms 849.00000000 MHz Center 849 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 16:30:31
HSUPA	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -23.11 dBm *VSW 300 kHz SWT 5 ms 824.00000000 MHz Center 824 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 17:00:02	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -23.22 dBm *VSW 300 kHz SWT 5 ms 849.00000000 MHz Center 849 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 16:49:43
HSDPA	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -24.48 dBm *VSW 300 kHz SWT 5 ms 824.00000000 MHz Center 824 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 16:41:03	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -23.93 dBm *VSW 300 kHz SWT 5 ms 849.00000000 MHz Center 849 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 23.NOV.2023 16:46:22

4.5 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	2DW6-1	Test Date:	2023/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.6	Relative Humidity: (%)	51	ATM Pressure: (kPa)	100.8
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:

RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.96	23.98	24.39	25.27	33
	RB1#3	23.95	23.93	24.33		
	RB1#5	23.97	23.95	24.4		
	RB3#0	24.06	24.1	24.29		
	RB3#3	24.03	24.05	24.3		
	RB6#0	22.97	22.96	23.3		
1.4MHz 16QAM	RB1#0	23.78	23.34	22.89	24.65	33
	RB1#3	23.76	23.34	22.85		
	RB1#5	23.74	23.36	22.91		
	RB3#0	23.13	23.14	23.23		
	RB3#3	23.22	22.92	23.17		
	RB6#0	22.34	22.12	22.39		
3MHz QPSK	RB1#0	24.15	23.98	24.2	25.14	33
	RB1#8	24.16	23.9	24.27		
	RB1#14	24.15	23.95	24.24		
	RB6#0	23.02	23.03	23.29		
	RB6#9	22.97	23.05	23.26		
	RB15#0	23.04	23.02	23.24		
3MHz 16QAM	RB1#0	23.26	22.88	23.5	24.44	33
	RB1#8	23.19	22.91	23.57		
	RB1#14	23.22	22.84	23.57		
	RB6#0	22.27	22.07	22.5		
	RB6#9	22.29	22.08	22.52		
	RB15#0	22.11	22.02	22.43		
5MHz QPSK	RB1#0	24.09	23.83	24.12	25.11	33
	RB1#13	24.18	23.9	24.21		
	RB1#24	24.12	23.8	24.24		
	RB15#0	23.04	22.96	23.32		
	RB15#10	22.95	22.96	23.36		
	RB25#0	22.96	22.99	23.21		
5MHz 16QAM	RB1#0	23.07	23.03	22.39	23.95	33
	RB1#13	22.97	23.08	22.42		
	RB1#24	23	23.07	22.44		
	RB15#0	21.98	22.03	22.39		
	RB15#10	21.91	22.08	22.43		
	RB25#0	21.99	22.12	22.45		

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
10MHz QPSK	RB1#0	24.13	23.98	24.09	25.20	33
	RB1#25	24.17	23.97	24.13		
	RB1#49	24.08	23.87	24.33		
	RB25#0	22.98	22.99	23.13		
	RB25#25	22.93	23.04	23.26		
	RB50#0	22.99	22.95	23.21		
10MHz 16QAM	RB1#0	23.82	22.85	23.39	24.69	33
	RB1#25	23.81	22.83	23.49		
	RB1#49	23.73	22.79	23.57		
	RB25#0	22.12	22.27	22.21		
	RB25#25	22.09	22.22	22.31		
	RB50#0	22.15	22.1	22.35		
15MHz QPSK	RB1#0	24.15	23.92	24.02	25.18	33
	RB1#38	24.11	23.94	24.1		
	RB1#74	24.13	23.99	24.31		
	RB36#0	23.08	23	23.03		
	RB36#39	22.94	22.96	23.29		
	RB75#0	23.04	22.99	23.1		
15MHz 16QAM	RB1#0	23.87	23.12	23.53	24.74	33
	RB1#38	23.77	23.13	23.59		
	RB1#74	23.72	23.17	23.56		
	RB36#0	22.08	22.13	22.24		
	RB36#39	22.08	22.09	22.35		
	RB75#0	22.1	22.08	22.26		
20MHz QPSK	RB1#0	24.05	24.02	24.07	25.27	33
	RB1#50	24.01	24.01	24.09		
	RB1#99	23.91	24.03	24.4		
	RB50#0	23.01	23	23.09		
	RB50#50	23.03	22.99	23.21		
	RB100#0	23.04	22.98	23.03		
20MHz 16QAM	RB1#0	23.45	23.73	23.27	24.65	33
	RB1#50	23.38	23.69	23.19		
	RB1#99	23.27	23.78	23.42		
	RB50#0	22.15	22.11	22.16		
	RB50#50	22.1	22.12	22.36		
	RB100#0	22.11	22.08	22.14		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.90	4.75	5.25	13
	RB100#0	4.26	4.06	4.20	13
20MHz 16QAM	RB1#0	5.62	5.97	6.5	13
	RB100#0	5.91	5.74	5.88	13
Result:					Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.110	1.110	1.260	1.266	1.250
1.4MHz 16QAM	1.110	1.098	1.104	1.266	1.248	1.254
3MHz QPSK	2.700	2.700	2.700	3.000	3.000	3.000
3MHz 16QAM	2.700	2.700	2.700	3.000	3.000	3.000
5MHz QPSK	4.520	4.520	4.520	5.020	5.020	5.000
5MHz 16QAM	4.540	4.560	4.520	5.020	5.020	4.980
10MHz QPSK	9.000	8.960	8.960	9.800	9.800	9.680
10MHz 16QAM	9.000	8.960	8.960	9.800	9.800	9.760
15MHz QPSK	13.560	13.500	13.500	15.120	15.120	15.060
15MHz 16QAM	13.560	13.600	13.500	15.120	15.100	15.060
20MHz QPSK	18.000	18.080	17.920	19.600	19.680	19.520
20MHz 16QAM	18.000	18.000	18.000	19.840	19.760	19.760
Note: The test plots please refer to the Plots of Occupied Bandwidth						


Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.103	1850.000	1909.921	1910.000
	-20	3.85	1850.145	1850.000	1909.962	1910.000
	-10	3.85	1850.101	1850.000	1909.955	1910.000
	0	3.85	1850.057	1850.000	1909.921	1910.000
	10	3.85	1850.068	1850.000	1909.869	1910.000
	20	3.85	1850.117	1850.000	1909.914	1910.000
	30	3.85	1850.078	1850.000	1909.962	1910.000
	40	3.85	1850.042	1850.000	1909.890	1910.000
	50	3.85	1850.062	1850.000	1909.951	1910.000
Frequency Stability vs. Voltage	20	3.45	1850.056	1850.000	1909.990	1910.000
	20	4.4	1850.004	1850.000	1909.963	1910.000
Result:					Pass	

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.153	1850.000	1909.862	1910.000
	-20	3.85	1850.122	1850.000	1909.936	1910.000
	-10	3.85	1850.084	1850.000	1909.906	1910.000
	0	3.85	1850.026	1850.000	1909.899	1910.000
	10	3.85	1850.079	1850.000	1909.868	1910.000
	20	3.85	1850.082	1850.000	1909.884	1910.000
	30	3.85	1850.014	1850.000	1909.880	1910.000
	40	3.85	1850.075	1850.000	1909.854	1910.000
	50	3.85	1850.007	1850.000	1909.894	1910.000
Frequency Stability vs. Voltage	20	3.45	1850.115	1850.000	1909.953	1910.000
	20	4.4	1850.104	1850.000	1909.872	1910.000
Result:					Pass	

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

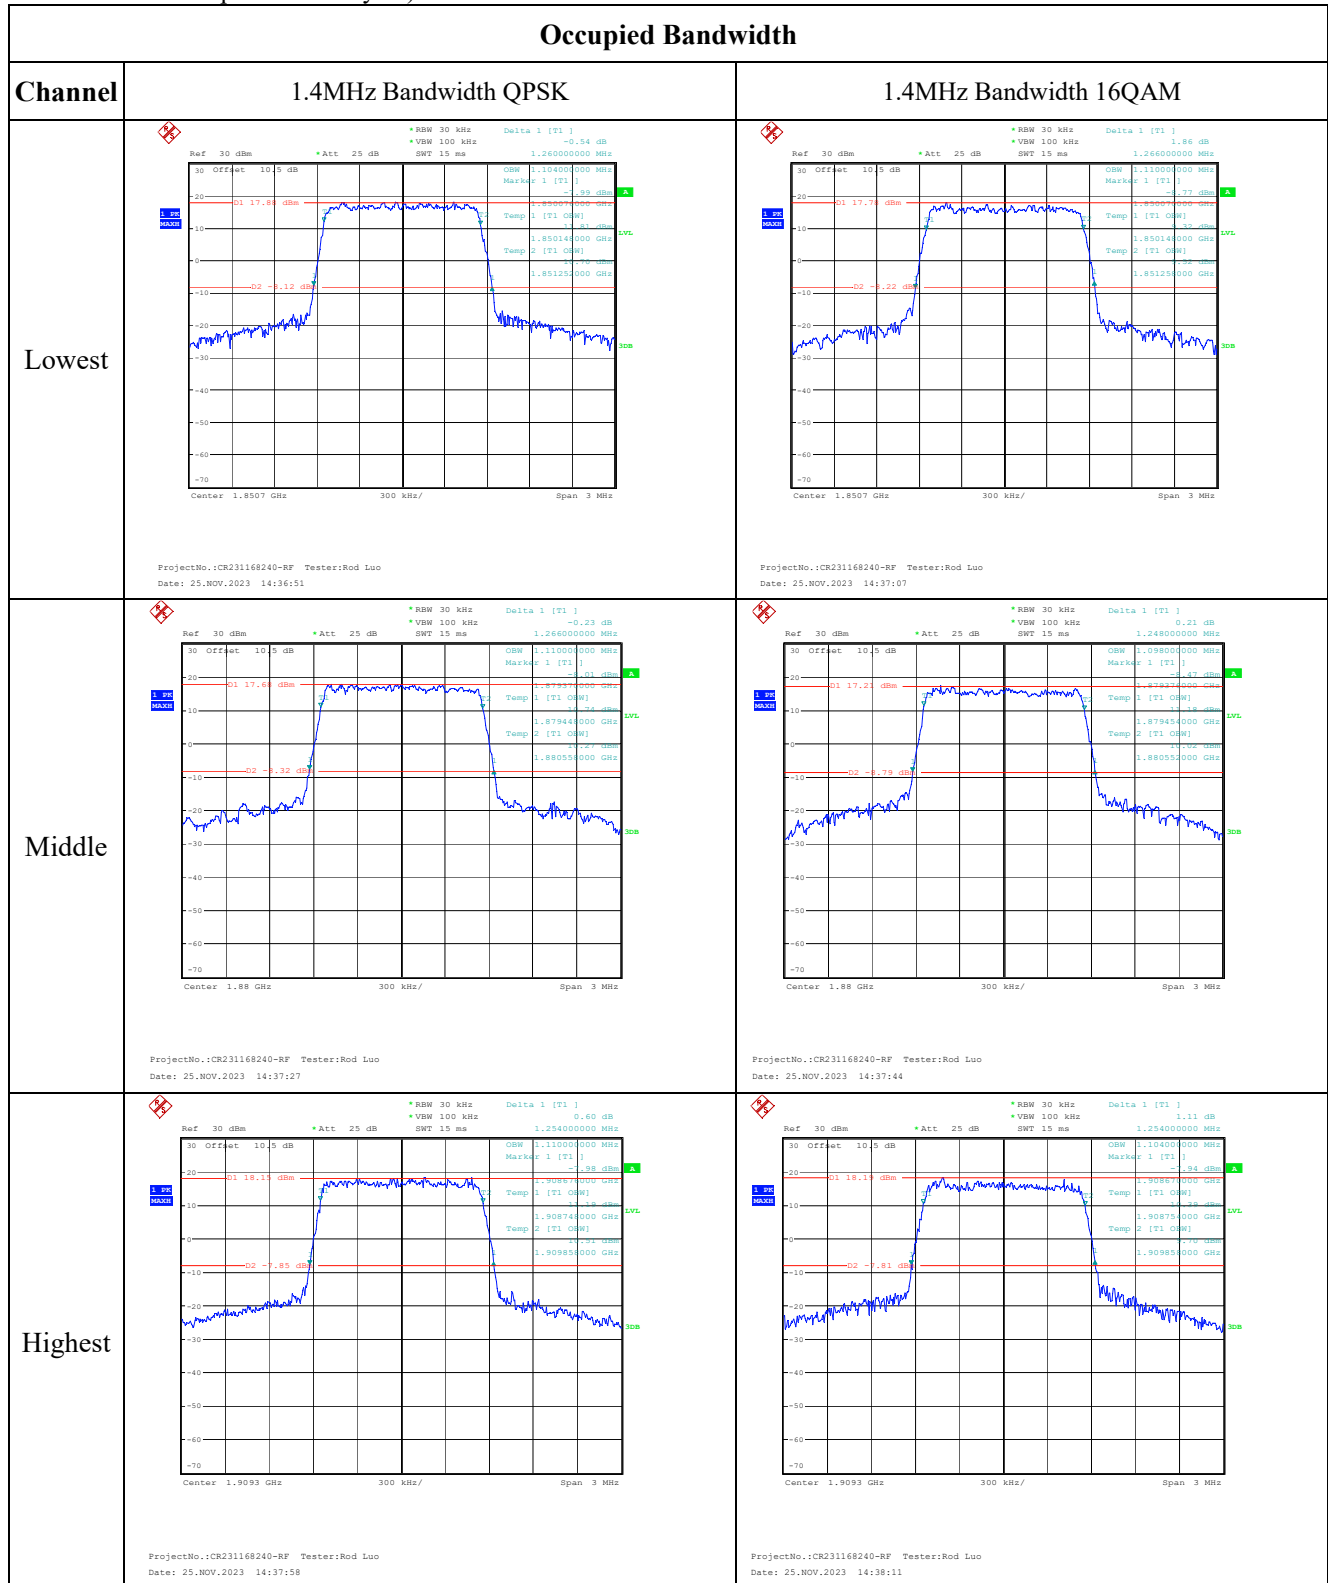

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.22 dB *VSW 100 kHz SWT 30 ms 3.000000000 MHz OSW 2.700000000 MHz Marker 1 [T1] -15.12 dBm Temp 1 [T1] OSW 1.850150000 GHz Temp 2 [T1] OSW 1.852850000 GHz Center 1.8515 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:38:32	Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.44 dB *VSW 100 kHz SWT 30 ms 3.000000000 MHz OSW 2.700000000 MHz Marker 1 [T1] -14.4 dBm Temp 1 [T1] OSW 1.850150000 GHz Temp 2 [T1] OSW 1.852850000 GHz Center 1.8515 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:38:48
Middle	Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.33 dB *VSW 100 kHz SWT 30 ms 3.012000000 MHz OSW 2.700000000 MHz Marker 1 [T1] -14.3 dBm Temp 1 [T1] OSW 1.878650000 GHz Temp 2 [T1] OSW 1.881350000 GHz Center 1.88 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:39:02	Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.72 dB *VSW 100 kHz SWT 30 ms 3.024000000 MHz OSW 2.700000000 MHz Marker 1 [T1] -14.7 dBm Temp 1 [T1] OSW 1.878650000 GHz Temp 2 [T1] OSW 1.881350000 GHz Center 1.88 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:39:18
Highest	Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.99 dB *VSW 100 kHz SWT 30 ms 3.012000000 MHz OSW 2.700000000 MHz Marker 1 [T1] -16.3 dBm Temp 1 [T1] OSW 1.907150000 GHz Temp 2 [T1] OSW 1.909850000 GHz Center 1.9085 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:39:36	Ref 30 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.20 dB *VSW 100 kHz SWT 30 ms 3.012000000 MHz OSW 2.700000000 MHz Marker 1 [T1] -14.6 dBm Temp 1 [T1] OSW 1.907150000 GHz Temp 2 [T1] OSW 1.909850000 GHz Center 1.9085 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:39:52


Occupied Bandwidth

Channel


5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM

Lowest

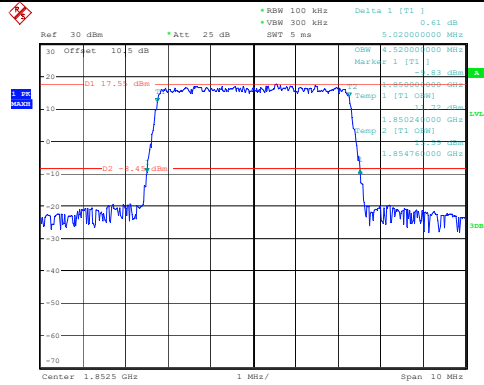


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:40:19

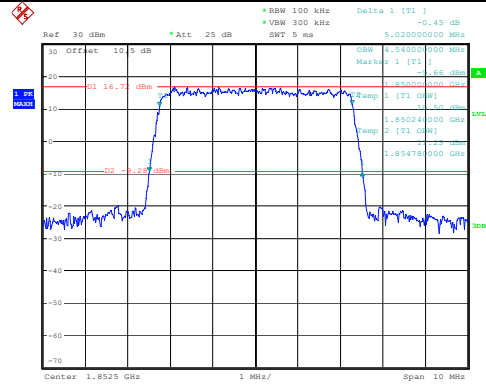


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:40:38

Middle

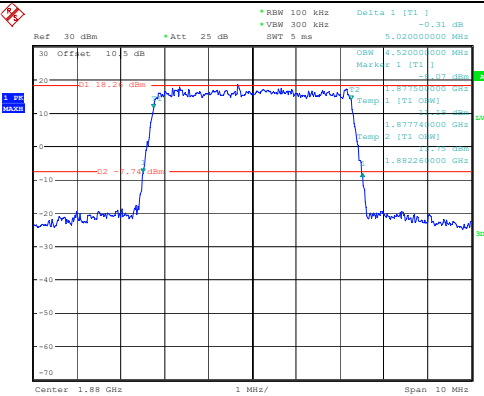


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:40:59

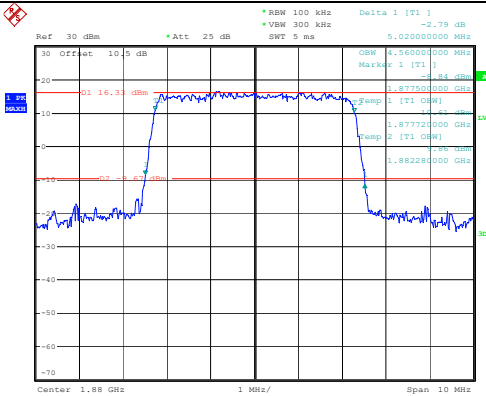


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:41:16

Highest






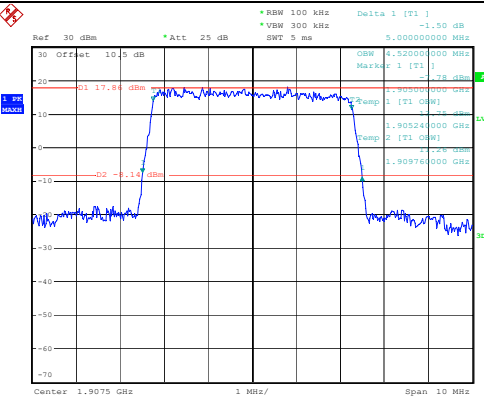


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:41:36

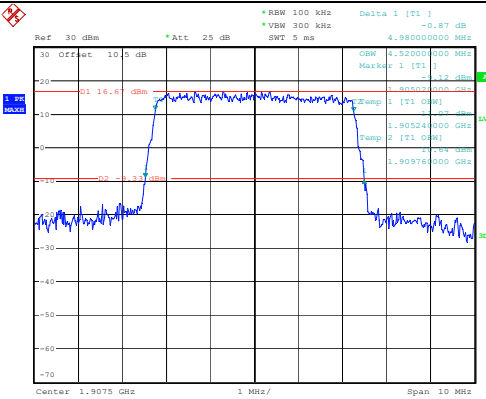

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:41:53

Occupied Bandwidth

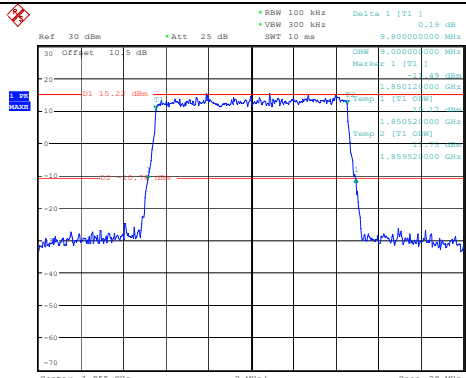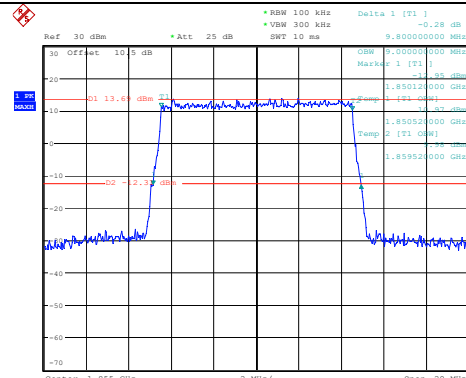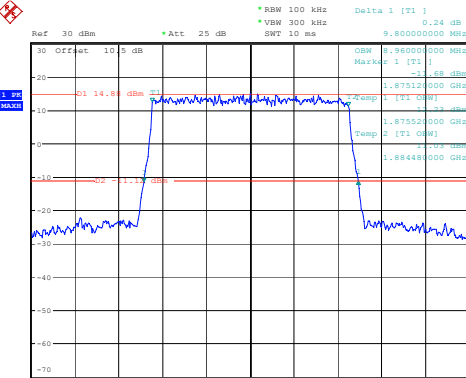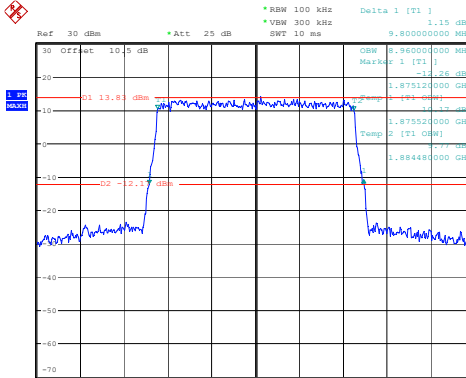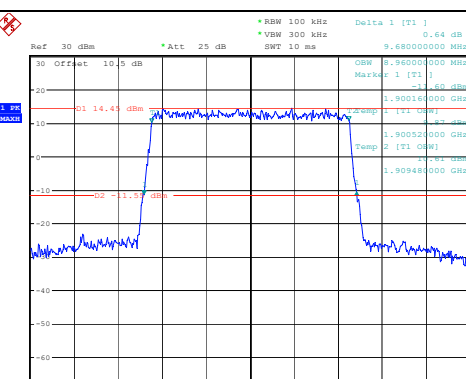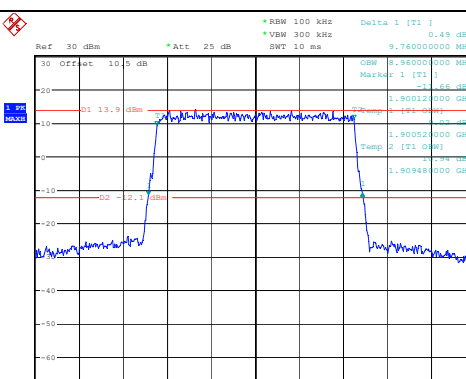Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 10 ms Delta 1 [T1] 0.19 dB 9.80000000 MHz OSW 9.80000000 MHz Marker 1 [T1] -15.2 dBm Temp 1 [T1] OSW -10.19 dBm Temp 2 [T1] OSW -10.19 dBm Center 1.855 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:42:13	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 10 ms Delta 1 [T1] -0.28 dB 9.80000000 MHz OSW 9.80000000 MHz Marker 1 [T1] -13.69 dBm Temp 1 [T1] OSW -10.28 dBm Temp 2 [T1] OSW -10.28 dBm Center 1.855 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:42:30
Middle	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 10 ms Delta 1 [T1] 0.24 dB 9.80000000 MHz OSW 9.80000000 MHz Marker 1 [T1] -14.8 dBm Temp 1 [T1] OSW -10.24 dBm Temp 2 [T1] OSW -10.24 dBm Center 1.88 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:42:47	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 10 ms Delta 1 [T1] 1.15 dB 9.80000000 MHz OSW 9.80000000 MHz Marker 1 [T1] -13.8 dBm Temp 1 [T1] OSW -10.26 dBm Temp 2 [T1] OSW -10.26 dBm Center 1.88 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:43:00
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 10 ms Delta 1 [T1] 0.64 dB 9.80000000 MHz OSW 9.80000000 MHz Marker 1 [T1] -14.45 dBm Temp 1 [T1] OSW -10.64 dBm Temp 2 [T1] OSW -10.64 dBm Center 1.905 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:43:15	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 10 ms Delta 1 [T1] 0.49 dB 9.76000000 MHz OSW 9.76000000 MHz Marker 1 [T1] -13.9 dBm Temp 1 [T1] OSW -10.49 dBm Temp 2 [T1] OSW -10.49 dBm Center 1.905 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:43:31


Occupied Bandwidth

Channel


15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM

Lowest

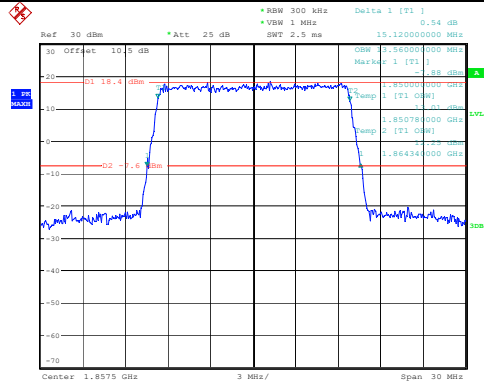


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:43:52

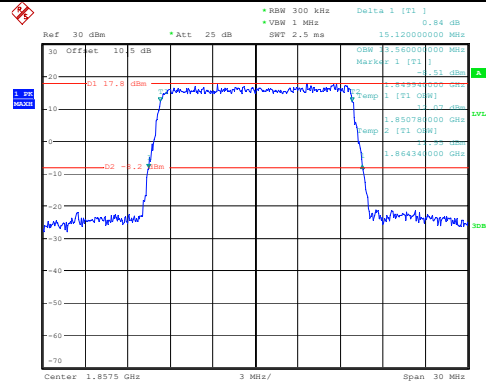


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:44:08

Middle

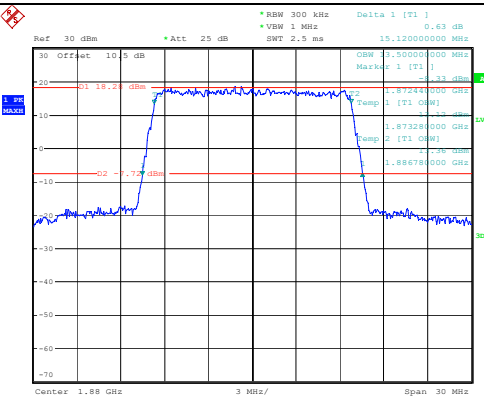


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:44:29

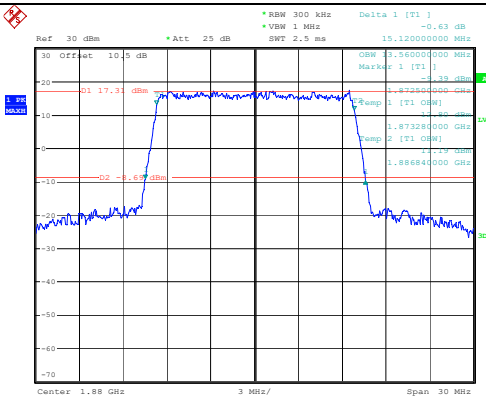


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:44:49

Highest

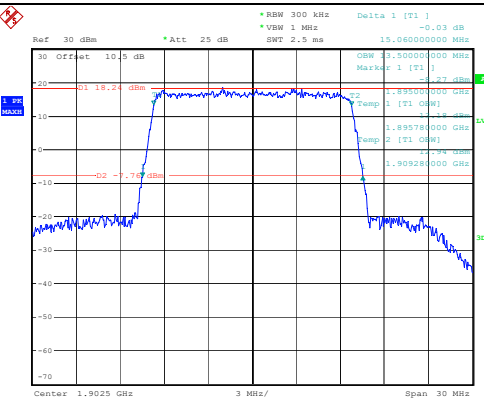

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:45:06

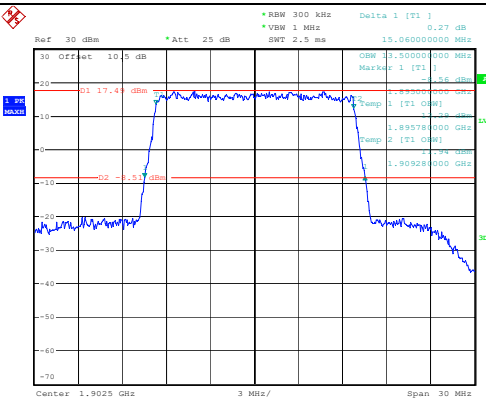

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:45:22


Page 78 of 179

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

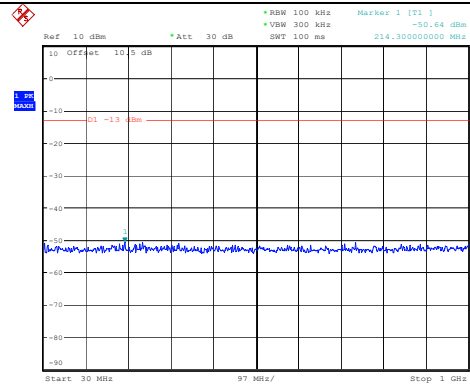


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:52:05

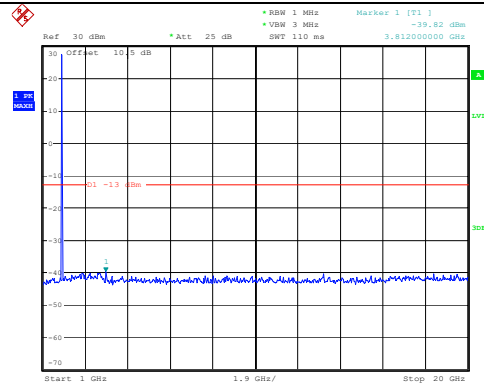


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:52:15

Middle

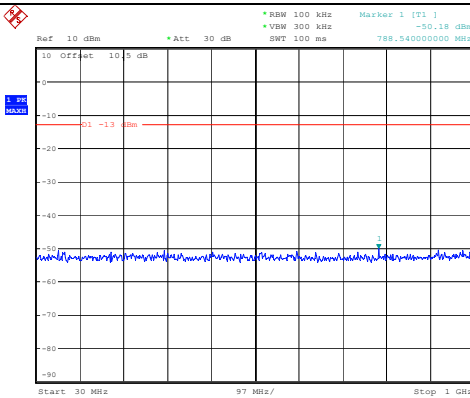


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:52:28

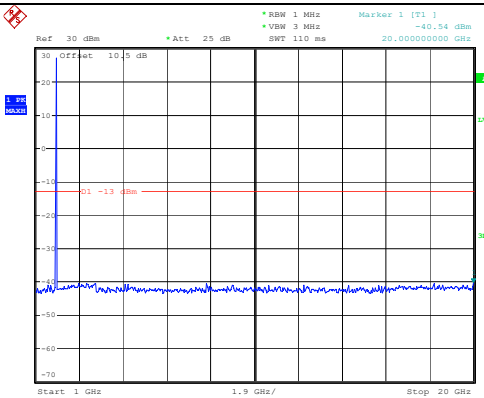


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:52:38

Highest

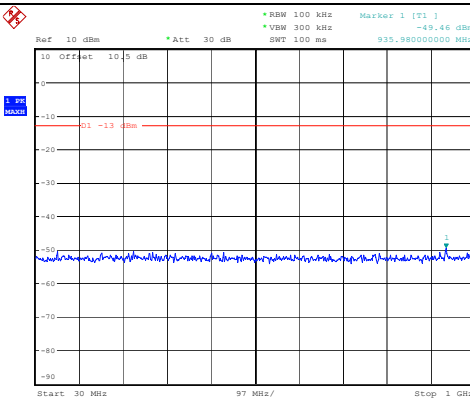

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:52:54

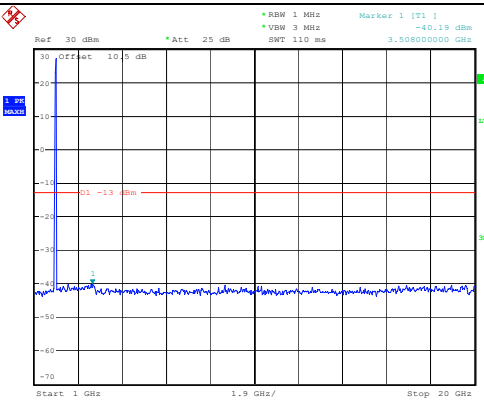



ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:53:04

Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

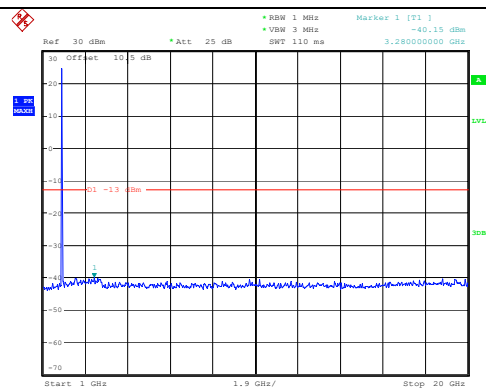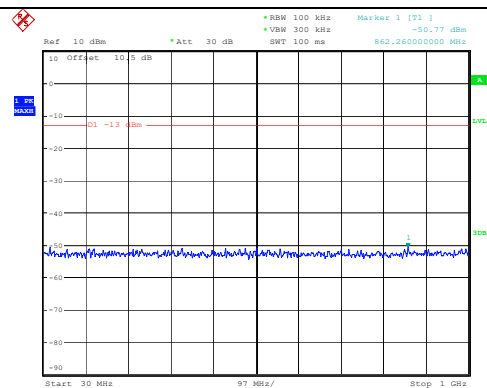







Middle

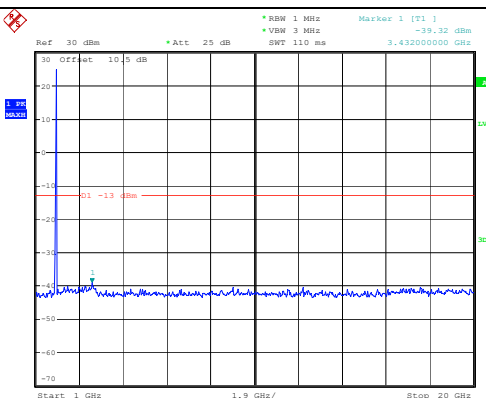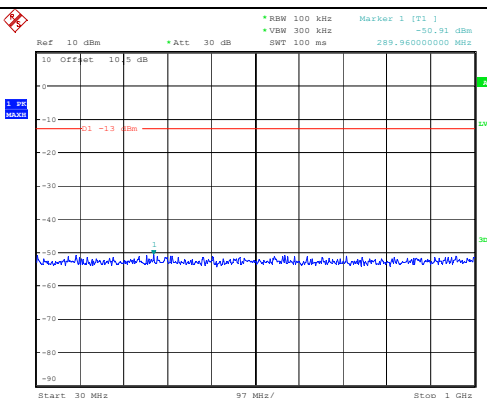

Highest

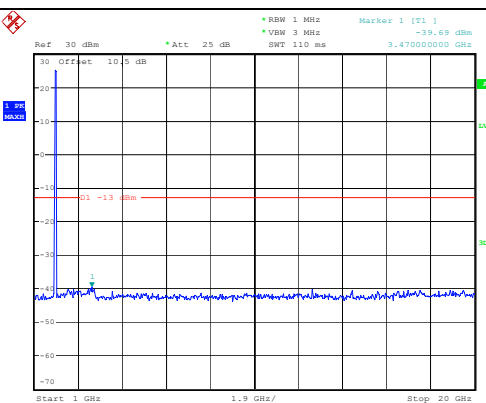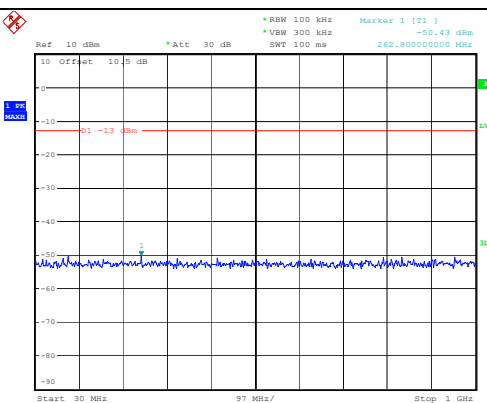

Spurious Emissions at Antenna Terminal

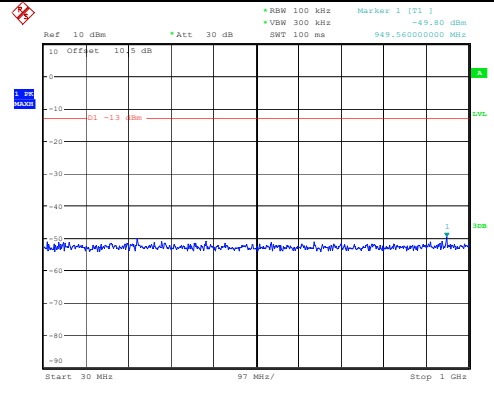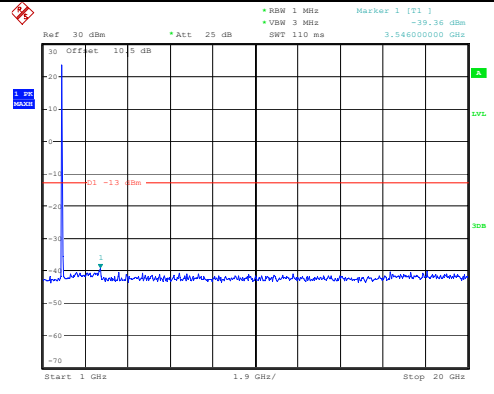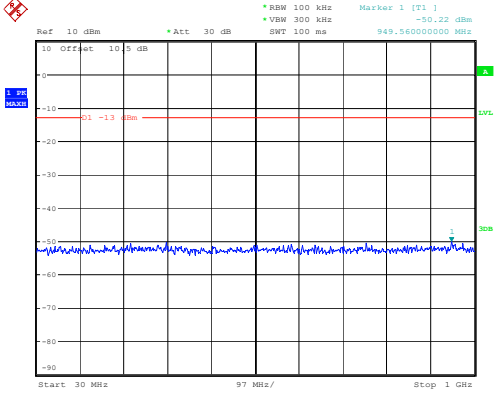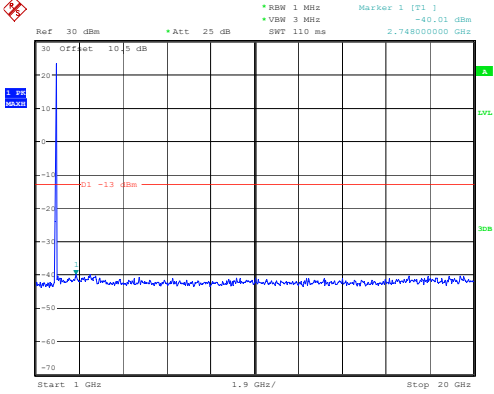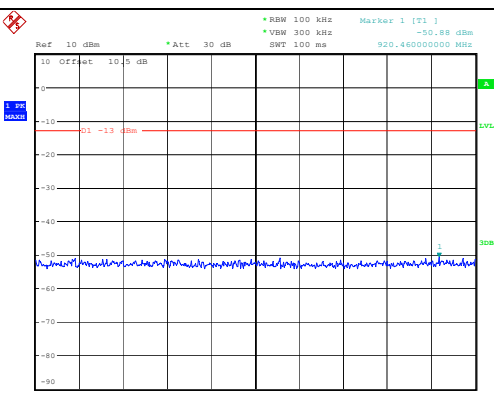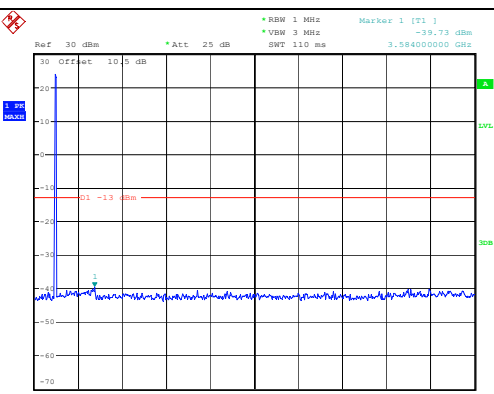
Channel	5MHz Bandwidth QPSK	
Lowest	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:54:31	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:54:41
Middle	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:54:57	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:55:07
Highest	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:55:20	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:55:30

Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK

Lowest

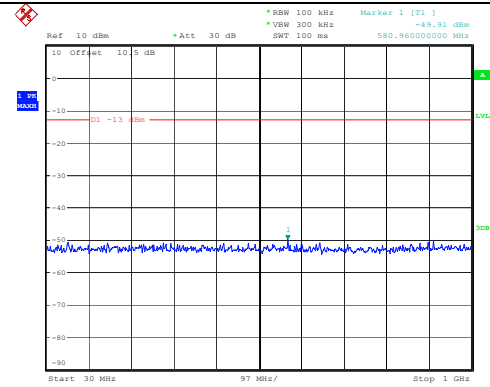


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:55:46

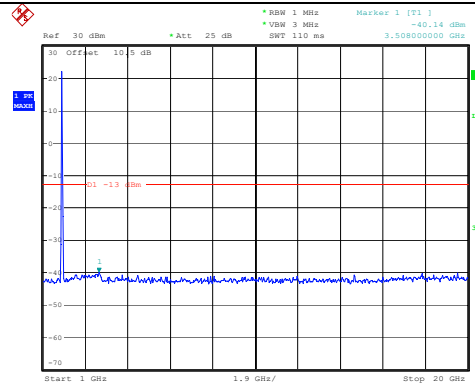


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:55:56

Middle

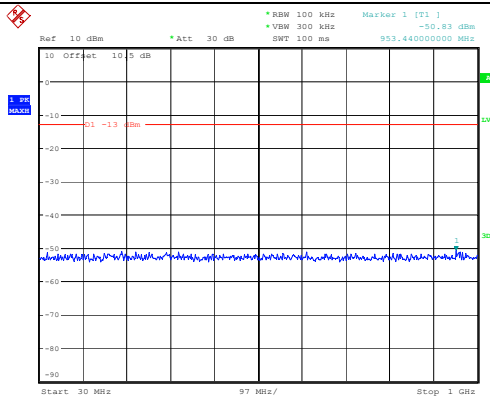


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:56:08

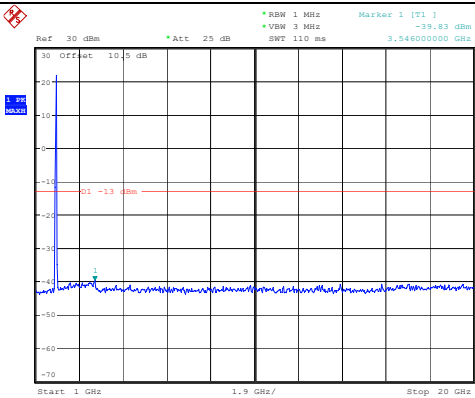


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:56:19

Highest

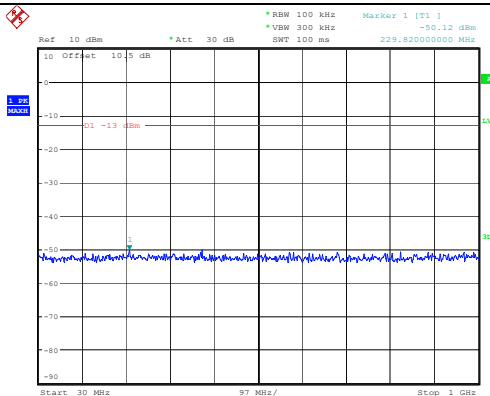

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:56:35

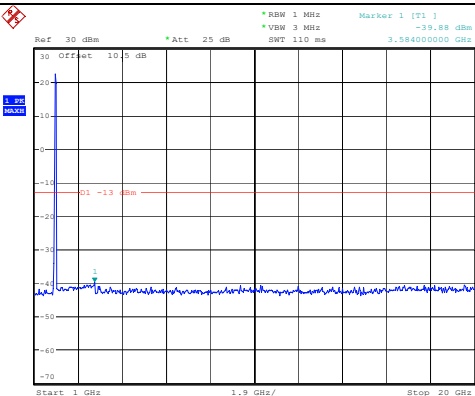



ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:56:45

Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

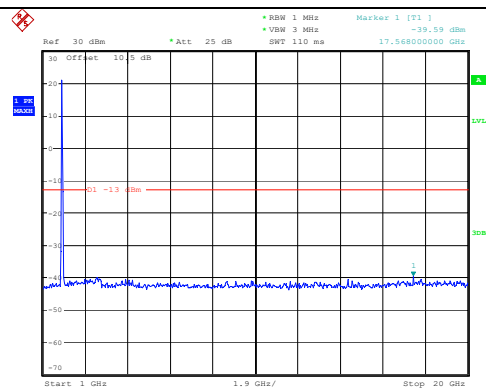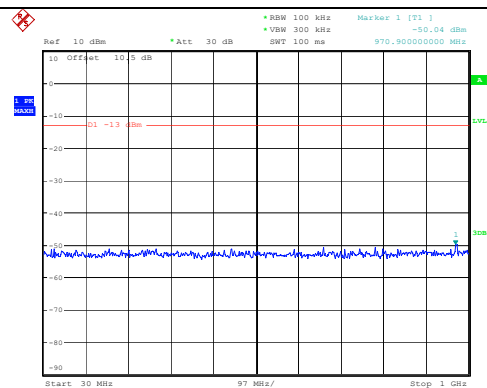

Middle

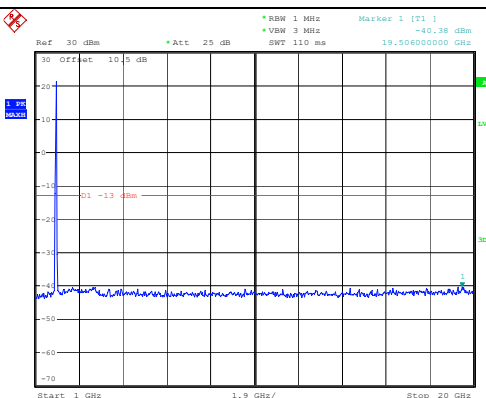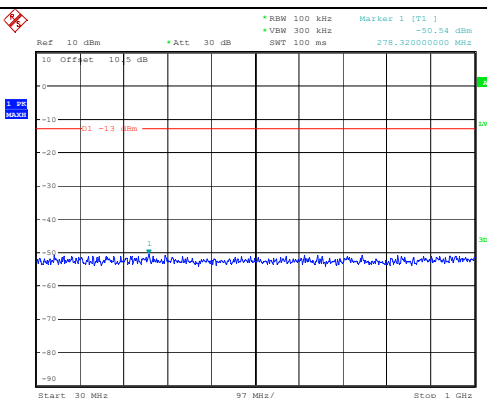

Highest

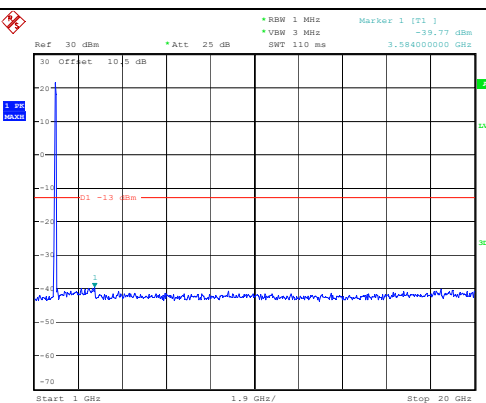
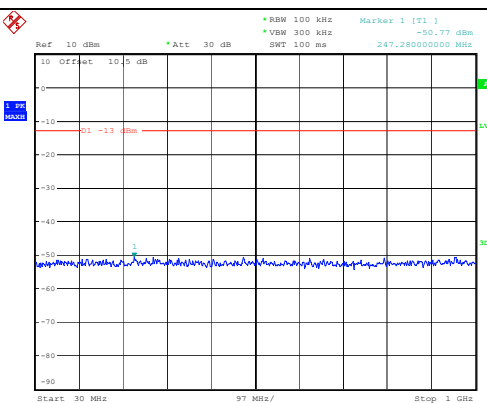


Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

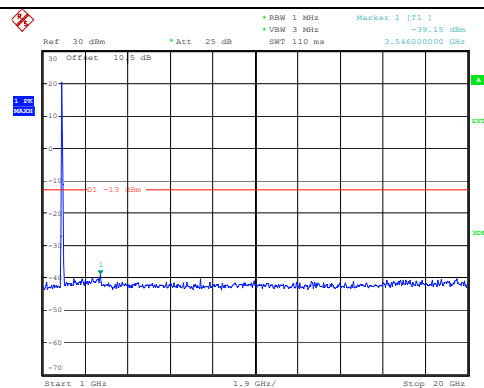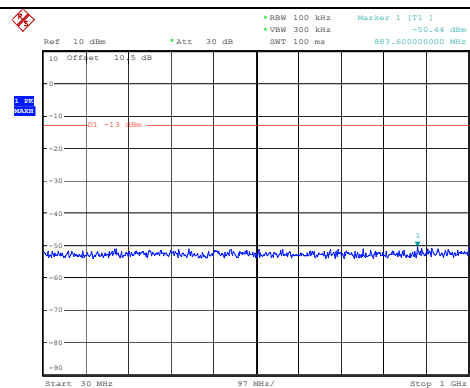







Middle

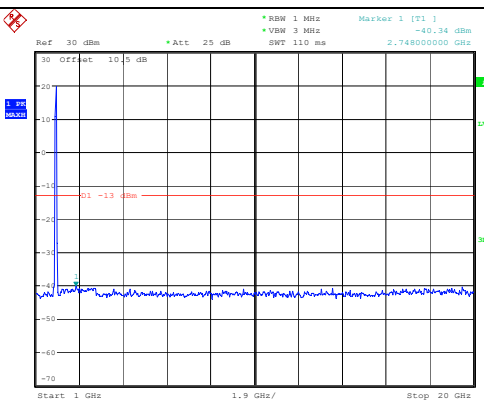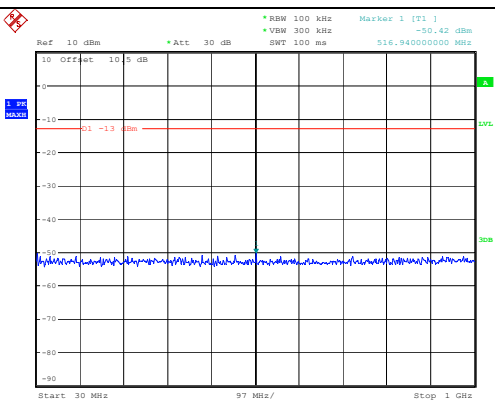







Highest

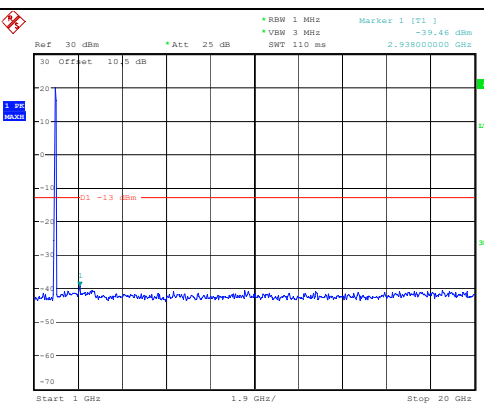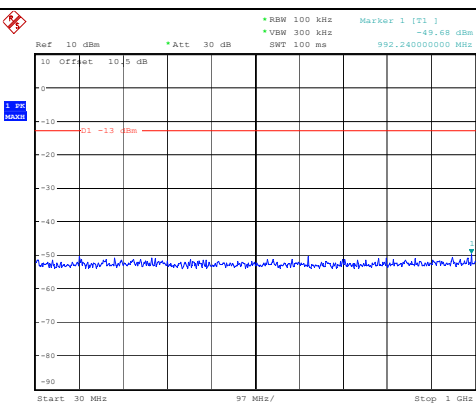







Out of band emission, Band Edge

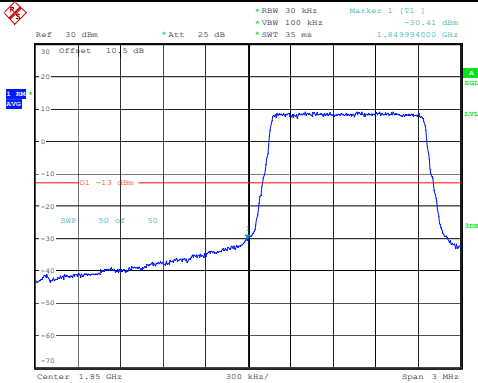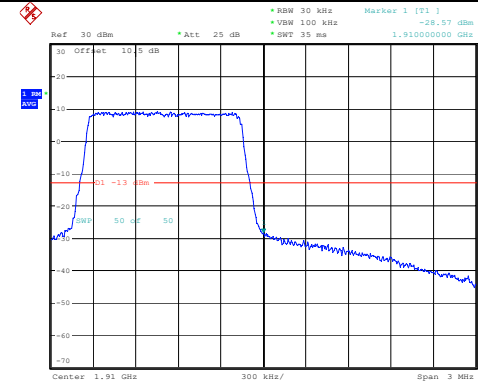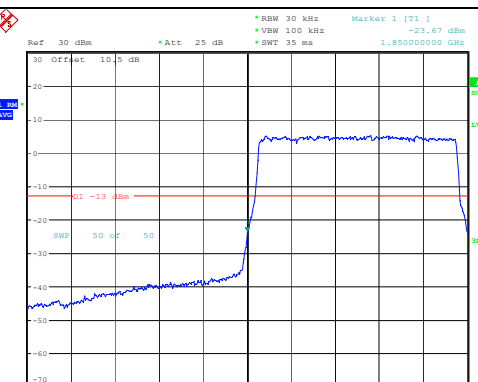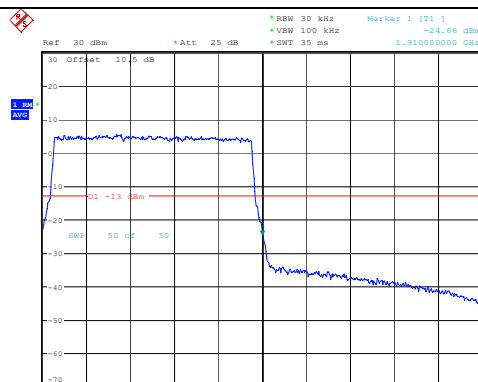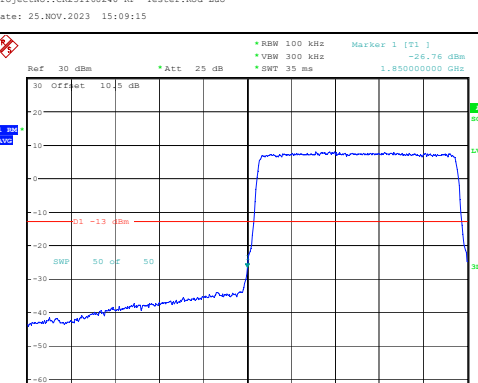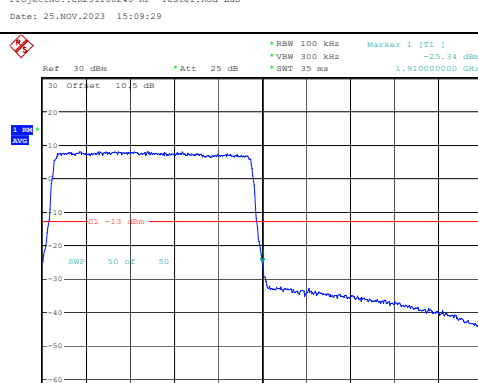Mode	Lowest	Highest
QPSK 1.4MHz	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -20.41 dBm 1.84994000 GHz Center 1.85 GHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:08:45	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -28.57 dBm 1.910000000 GHz Center 1.91 GHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:08:59
QPSK 3MHz	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -23.67 dBm 1.850000000 GHz Center 1.85 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:15	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -24.66 dBm 1.910000000 GHz Center 1.91 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:29
QPSK 5MHz	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 35 ms Marker 1 [T1] -26.76 dBm 1.850000000 GHz Center 1.85 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:46	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 35 ms Marker 1 [T1] -25.34 dBm 1.910000000 GHz Center 1.91 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:00







Out of band emission, Band Edge

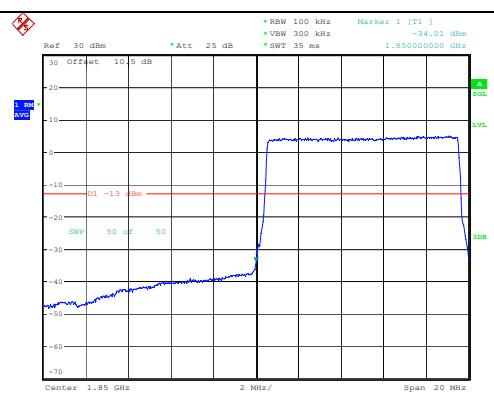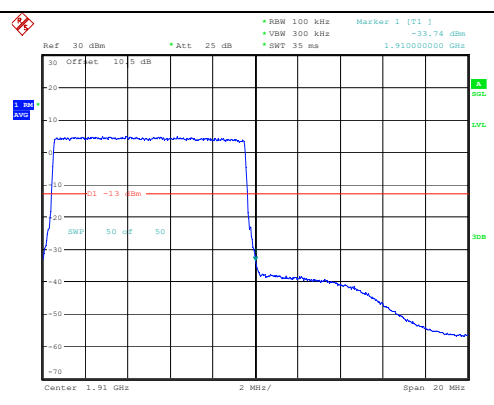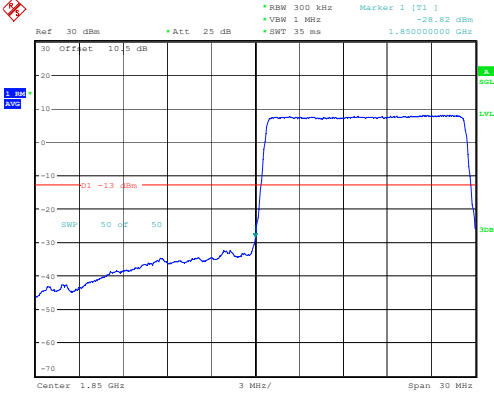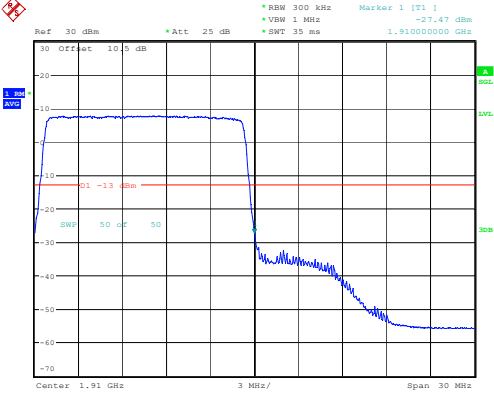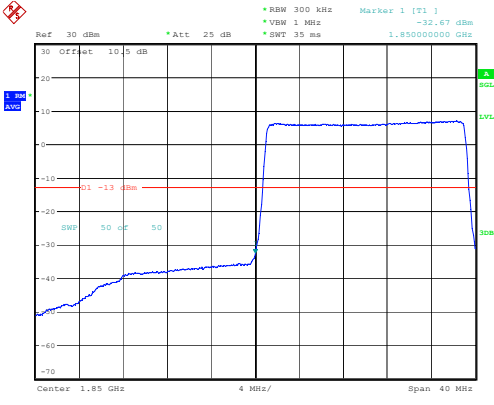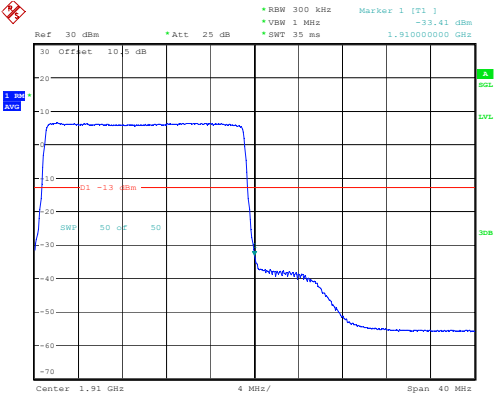Mode	Lowest	Highest
QPSK 10MHz	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -24.01 dBm *VBW 300 kHz *SWT 35 ms 1.850000000 GHz Center 1.85 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:19	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -23.74 dBm *VBW 300 kHz *SWT 35 ms 1.910000000 GHz Center 1.91 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:35
QPSK 15MHz	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -28.82 dBm *VBW 1 MHz *SWT 35 ms 1.850000000 GHz Center 1.85 GHz 3 MHz/ Span 30 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:53	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -27.47 dBm *VBW 1 MHz *SWT 35 ms 1.910000000 GHz Center 1.91 GHz 3 MHz/ Span 30 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:11:06
QPSK 20MHz	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -32.67 dBm *VBW 1 MHz *SWT 35 ms 1.850000000 GHz Center 1.85 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:11:23	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -33.41 dBm *VBW 1 MHz *SWT 35 ms 1.910000000 GHz Center 1.91 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:11:36

Out of band emission, Band Edge

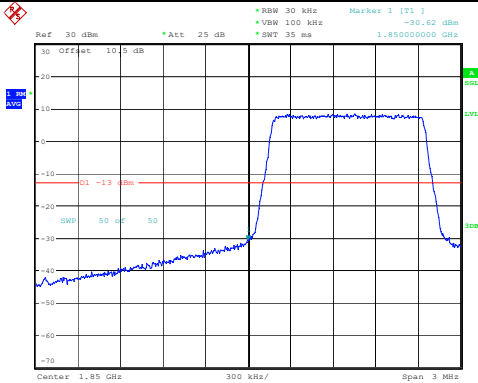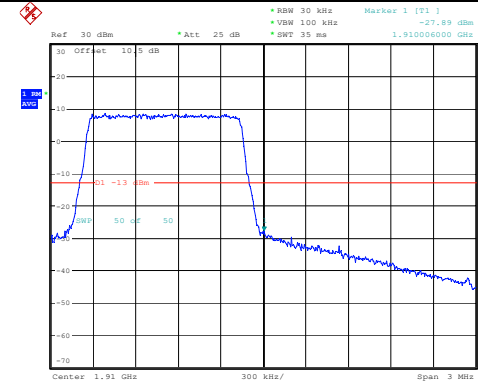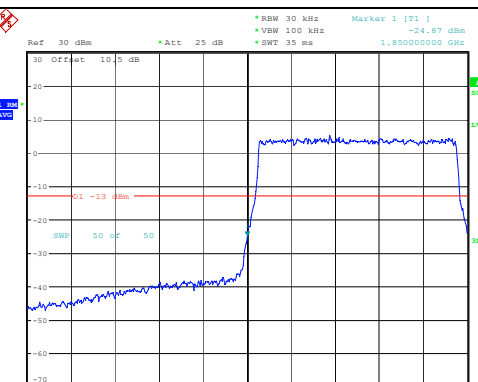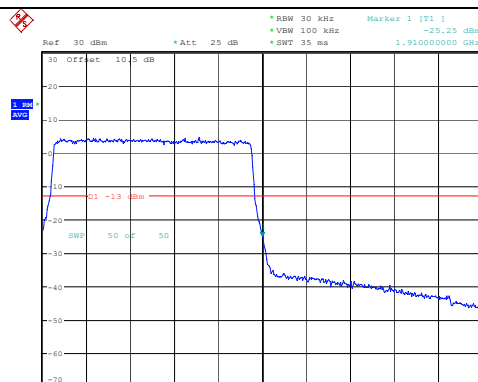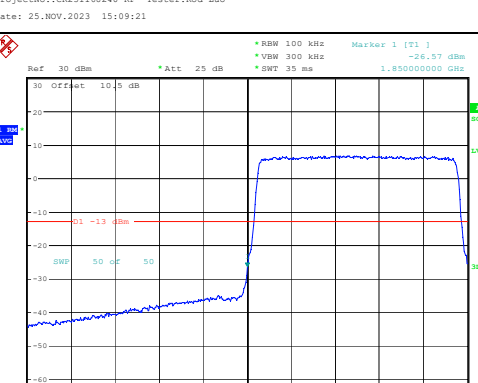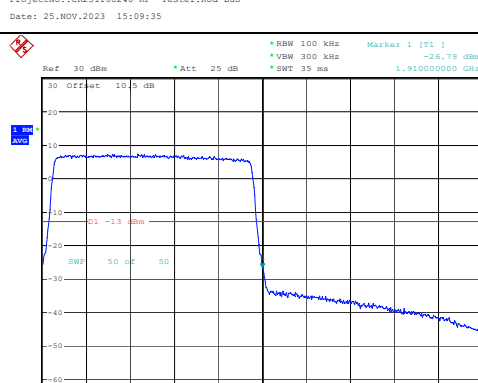Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -20.62 dBm 1.85000000 GHz Center 1.85 GHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:08:51	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -27.89 dBm 1.91000000 GHz Center 1.91 GHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:06
16QAM 3MHz	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -24.87 dBm 1.85000000 GHz Center 1.85 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:21	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz *SWT 35 ms Marker 1 [T1] -25.25 dBm 1.91000000 GHz Center 1.91 GHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:35
16QAM 5MHz	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 35 ms Marker 1 [T1] -26.57 dBm 1.85000000 GHz Center 1.85 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:09:52	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz *SWT 35 ms Marker 1 [T1] -26.79 dBm 1.91000000 GHz Center 1.91 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:07

Out of band emission, Band Edge

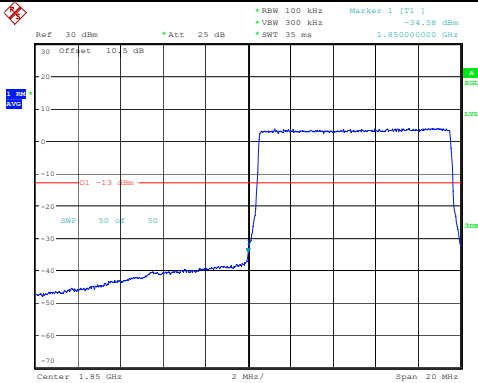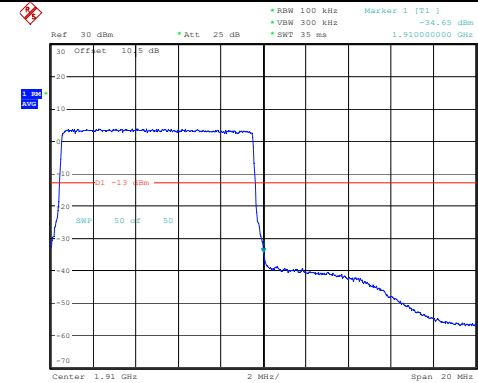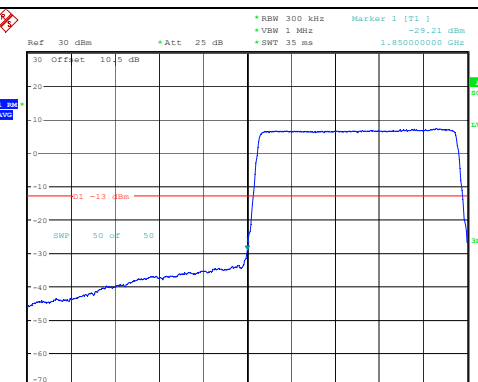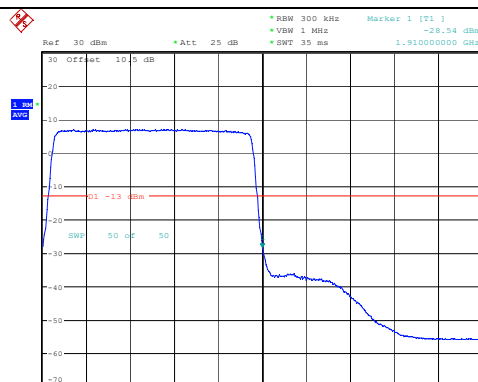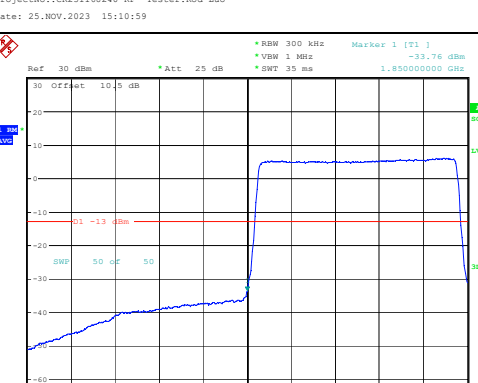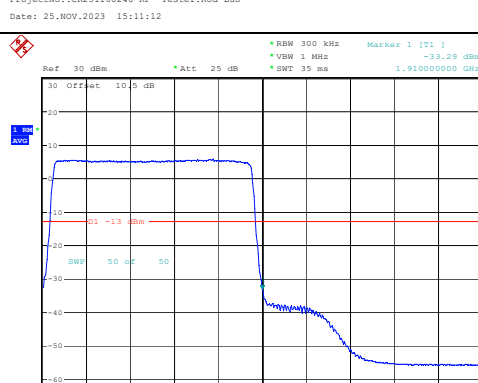Mode	Lowest	Highest
16QAM 10MHz	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -34.58 dBm *VSW 300 kHz *SWT 35 ms 1.850000000 GHz Center 1.85 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:26	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -34.65 dBm *VSW 300 kHz *SWT 35 ms 1.910000000 GHz Center 1.91 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:42
16QAM 15MHz	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -39.21 dBm *VSW 1 MHz *SWT 35 ms 1.850000000 GHz Center 1.85 GHz 3 MHz/ Span 30 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:10:59	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -39.54 dBm *VSW 1 MHz *SWT 35 ms 1.910000000 GHz Center 1.91 GHz 3 MHz/ Span 30 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:11:12
16QAM 20MHz	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -33.76 dBm *VSW 1 MHz *SWT 35 ms 1.850000000 GHz Center 1.85 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:11:29	 Ref 30 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] -33.29 dBm *VSW 1 MHz *SWT 35 ms 1.910000000 GHz Center 1.91 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 15:11:42

4.6 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	2DW6-1	Test Date:	2023/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.6	Relative Humidity: (%)	51	ATM Pressure: (kPa)	100.8
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Clrucuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:

RF Output Power:							
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	FCC ERP Limit_FCC (dBm)	IC ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel			
1.4MHz QPSK	RB1#0	24.48	24.39	24.4	20.85	38.45	34.77
	RB1#3	24.4	24.4	24.31			
	RB1#5	24.45	24.33	24.39			
	RB3#0	24.63	24.49	24.37			
	RB3#3	24.61	24.43	24.32			
	RB6#0	23.53	23.26	23.33			
1.4MHz 16QAM	RB1#0	23.45	24	23.84	20.22	38.45	34.77
	RB1#3	23.47	23.98	23.67			
	RB1#5	23.42	23.97	23.71			
	RB3#0	23.52	23.16	23.16			
	RB3#3	23.49	23.13	23.12			
	RB6#0	22.65	22.55	22.4			
3MHz QPSK	RB1#0	24.32	24.41	24.15	20.63	38.45	34.77
	RB1#8	24.31	24.33	24.21			
	RB1#14	24.39	24.4	24.21			
	RB6#0	23.44	23.47	23.3			
	RB6#9	23.37	23.37	23.22			
	RB15#0	23.49	23.45	23.26			
3MHz 16QAM	RB1#0	23.42	22.99	23.27	19.64	38.45	34.77
	RB1#8	23.38	22.94	23.25			
	RB1#14	23.37	22.93	23.17			
	RB6#0	22.61	22.47	22.17			
	RB6#9	22.62	22.39	22.11			
	RB15#0	22.54	22.3	22.34			
5MHz QPSK	RB1#0	24.58	24.33	24.26	20.80	38.45	34.77
	RB1#13	24.58	24.34	24.2			
	RB1#24	24.53	24.3	24.22			
	RB15#0	23.45	23.38	23.29			
	RB15#10	23.44	23.47	23.37			
	RB25#0	23.47	23.47	23.35			
5MHz 16QAM	RB1#0	23.47	23.68	22.7	19.90	38.45	34.77
	RB1#13	23.5	23.62	22.68			
	RB1#24	23.3	23.61	22.77			
	RB15#0	22.49	22.39	22.3			
	RB15#10	22.37	22.36	22.31			
	RB25#0	22.59	22.44	22.43			

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	FCC ERP Limit (dBm)	IC ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel			
10MHz QPSK	RB1#0	24.50	24.36	24.29	20.76	38.45	34.77
	RB1#25	24.46	24.22	24.22			
	RB1#49	24.54	24.16	24.14			
	RB25#0	23.56	23.36	23.29			
	RB25#25	23.43	23.44	23.34			
	RB50#0	23.32	23.4	23.29			
10MHz 16QAM	RB1#0	23.42	23.44	23.14	20.10	38.45	34.77
	RB1#25	23.4	23.33	23.18			
	RB1#49	23.88	23.28	23.26			
	RB25#0	22.55	22.5	22.36			
	RB25#25	22.46	22.49	22.27			
	RB50#0	22.43	22.42	22.39			
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15							
						Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	3.42	3.51	4.32	13
	RB50#0	4.41	4.70	4.61	13
10MHz 16QAM	RB1#0	4.61	4.06	5.28	13
	RB50#0	5.33	5.77	5.68	13
				Result:	Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.104	1.116	1.278	1.266	1.272
1.4MHz 16QAM	1.116	1.098	1.116	1.278	1.248	1.278
3MHz QPSK	2.700	2.700	2.724	3.024	3.024	3.024
3MHz 16QAM	2.712	2.712	2.700	3.000	3.036	3.024
5MHz QPSK	4.540	4.520	4.560	5.020	4.980	5.000
5MHz 16QAM	4.540	4.520	4.540	5.020	5.000	5.020
10MHz QPSK	8.960	8.960	8.960	9.760	9.760	9.760
10MHz 16QAM	9.000	8.960	8.960	9.840	9.880	9.720
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

Frequency Stability for FCC


Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	102.214	0.122	2.5
	-20	3.85	101.169	0.121	2.5
	-10	3.85	103.386	0.124	2.5
	0	3.85	102.028	0.122	2.5
	10	3.85	104.906	0.125	2.5
	20	3.85	103.733	0.124	2.5
	30	3.85	99.727	0.119	2.5
	40	3.85	101.109	0.121	2.5
	50	3.85	101.243	0.121	2.5
Frequency Stability vs. Voltage	20	3.45	103.636	0.124	2.5
	20	4.4	101.868	0.122	2.5
Result:				Pass	

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	102.586	0.123	2.5
	-20	3.85	101.444	0.121	2.5
	-10	3.85	108.028	0.129	2.5
	0	3.85	103.940	0.124	2.5
	10	3.85	99.987	0.120	2.5
	20	3.85	101.394	0.121	2.5
	30	3.85	105.880	0.127	2.5
	40	3.85	103.562	0.124	2.5
	50	3.85	104.123	0.124	2.5
Frequency Stability vs. Voltage	20	3.45	98.768	0.118	2.5
	20	4.4	99.960	0.119	2.5
Result:				Pass	

Frequency Stability for IC :						
Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	824.037	824	848.977	849
	-20	3.85	824.036	824	848.973	849
	-10	3.85	824.035	824	848.972	849
	0	3.85	824.033	824	848.974	849
	10	3.85	824.034	824	848.975	849
	20	3.85	824.035	824	848.979	849
	30	3.85	824.035	824	848.978	849
	40	3.85	824.034	824	848.974	849
	50	3.85	824.038	824	848.975	849
Frequency Stability vs. Voltage	20	3.45	824.038	824	848.972	849
	20	4.4	824.033	824	848.976	849
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	824.040	824	848.978	849
	-20	3.85	824.042	824	848.977	849
	-10	3.85	824.041	824	848.971	849
	0	3.85	824.041	824	848.976	849
	10	3.85	824.037	824	848.974	849
	20	3.85	824.038	824	848.974	849
	30	3.85	824.042	824	848.973	849
	40	3.85	824.039	824	848.975	849
	50	3.85	824.036	824	848.973	849
Frequency Stability vs. Voltage	20	3.45	824.042	824	848.973	849
	20	4.4	824.039	824	848.974	849
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

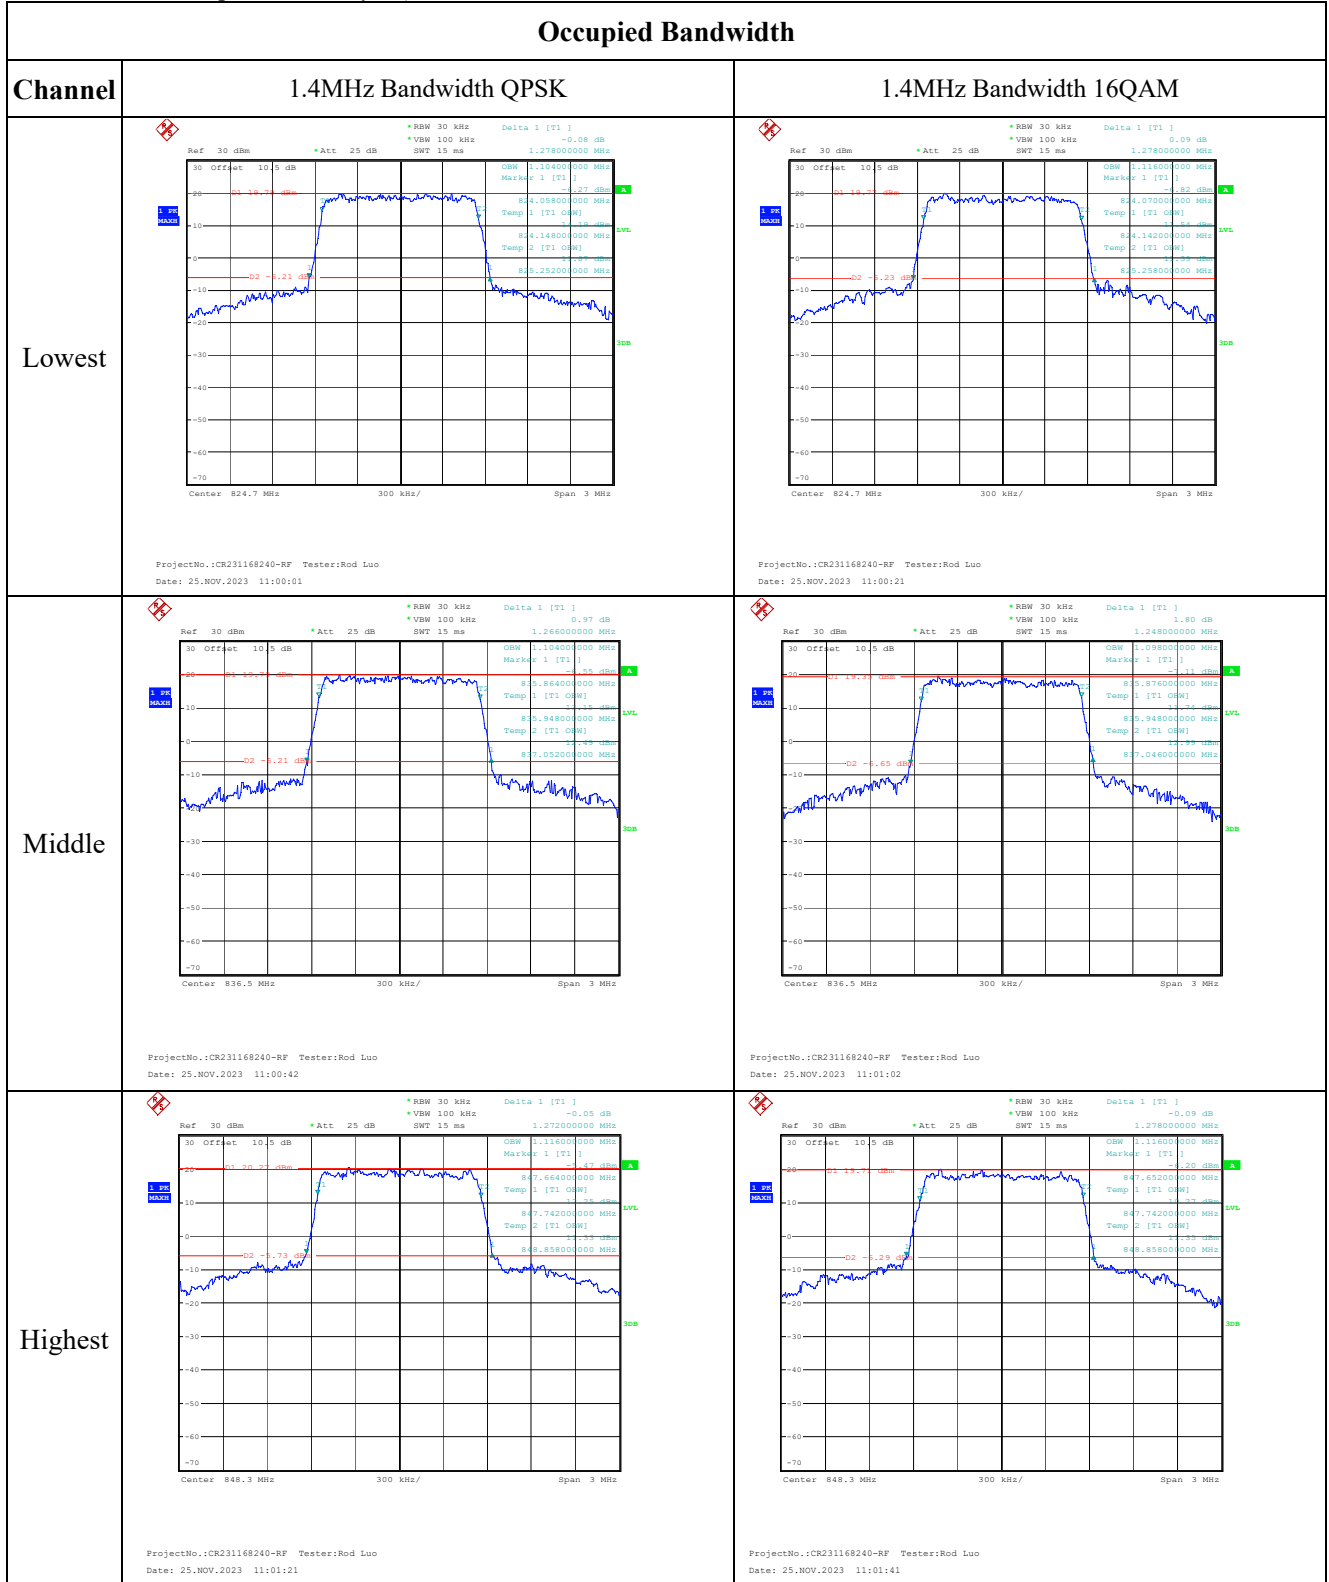


Occupied Bandwidth

Channel


3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM

Lowest

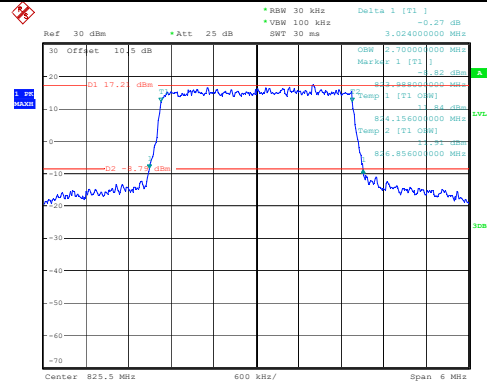


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:02:05

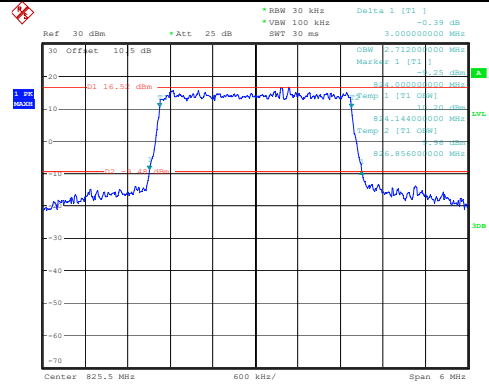


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:02:25

Middle

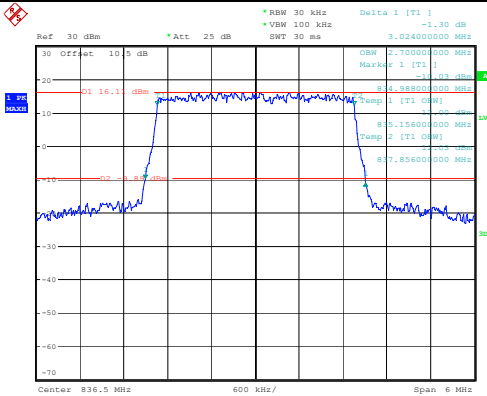


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:02:43

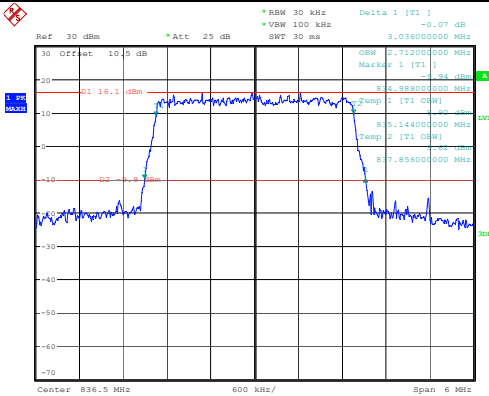


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:03:00

Highest

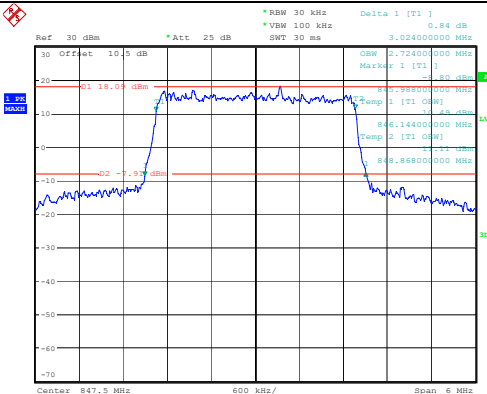

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:03:21

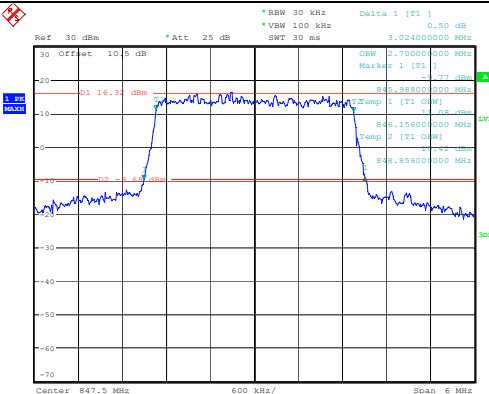

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:03:38



Occupied Bandwidth

Channel



5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM



Lowest

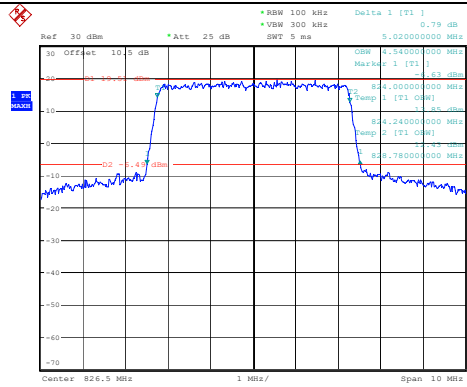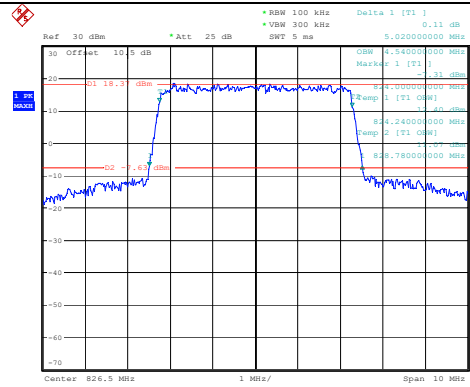ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:04:02ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:04:22

Middle

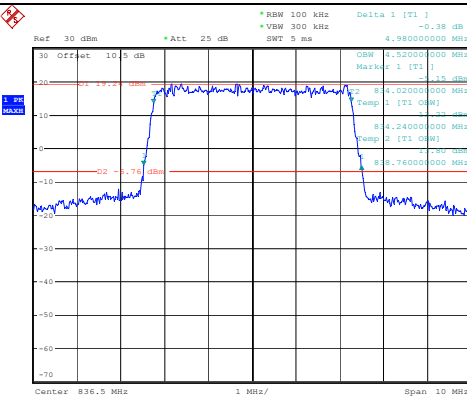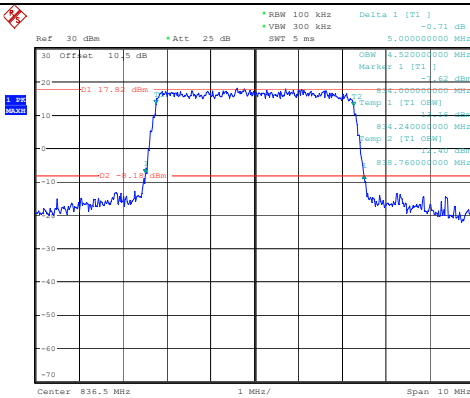ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:04:47ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:05:07

Highest

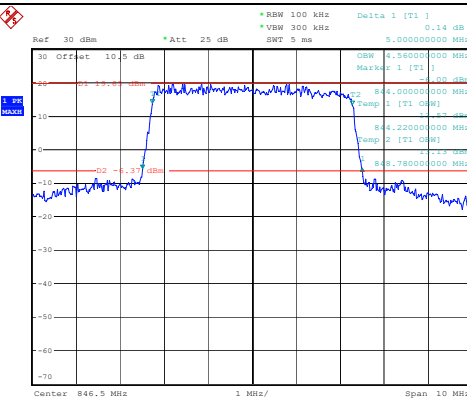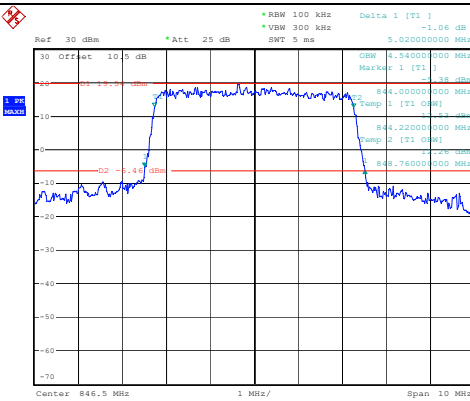
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:05:25ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:05:49

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

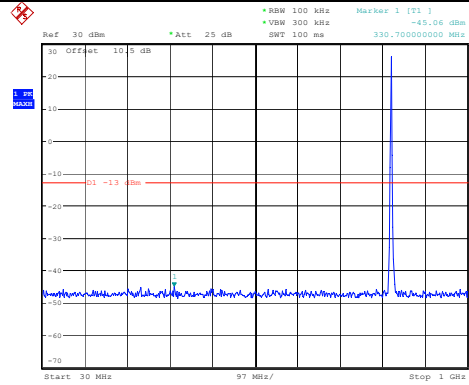


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:06:33

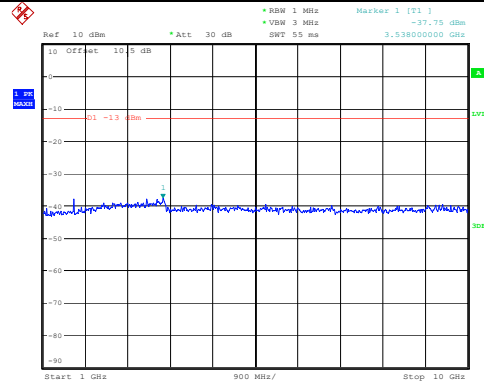


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:06:44

Middle

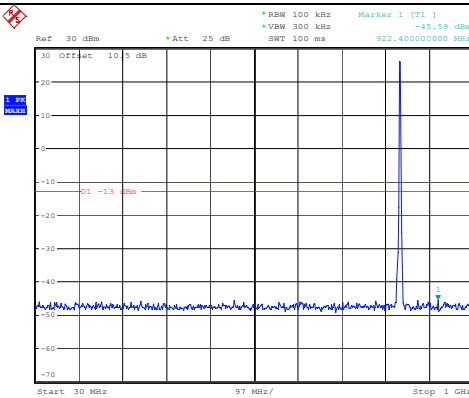


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:06:57

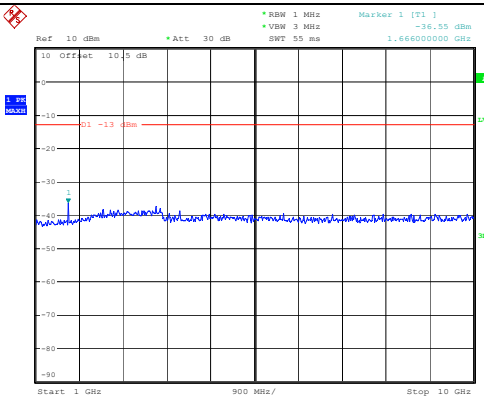


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:07:07

Highest






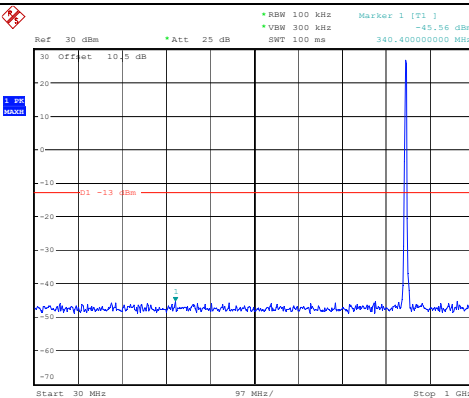


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:07:20

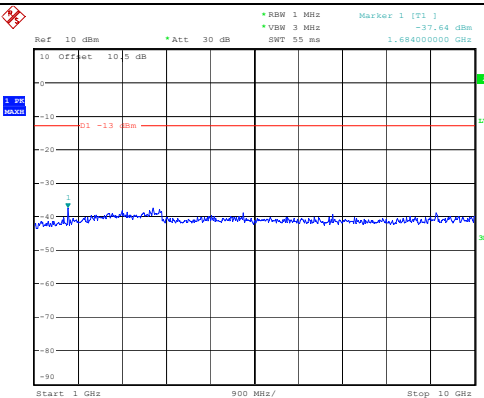

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:07:30

Spurious Emissions at Antenna Terminal

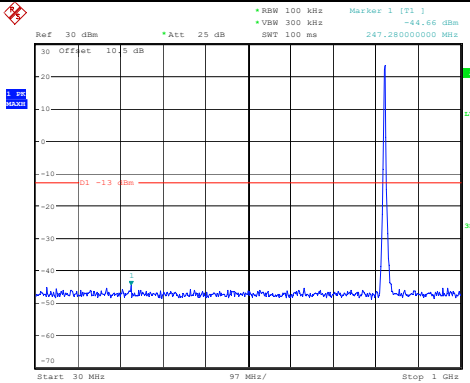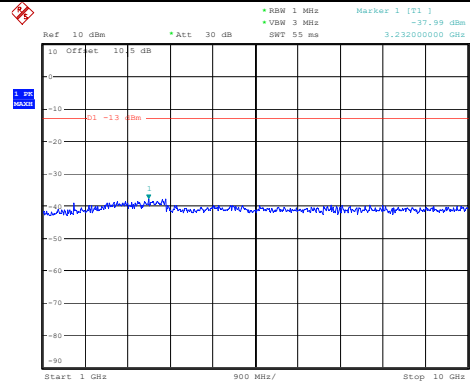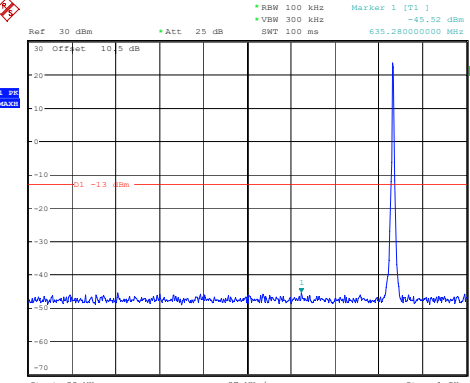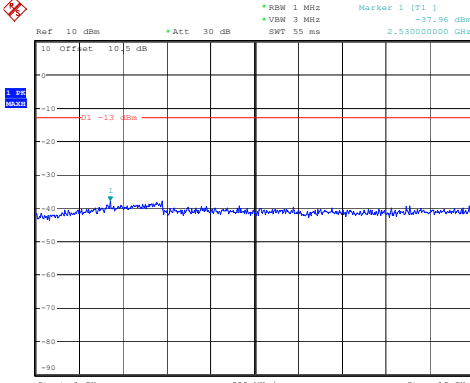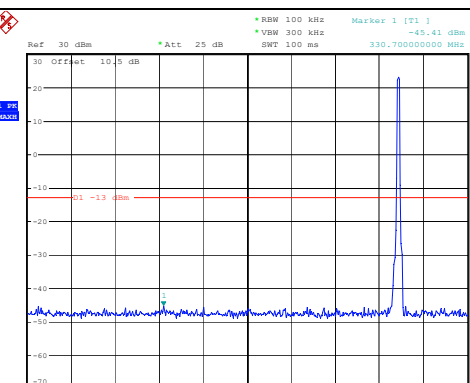
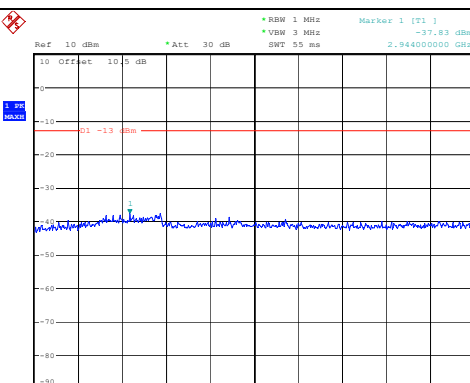
Channel	3MHz Bandwidth QPSK	
Lowest	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:07:48	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:07:58
	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:08:11	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:08:21
Middle	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:08:34	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:08:44
Highest		

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

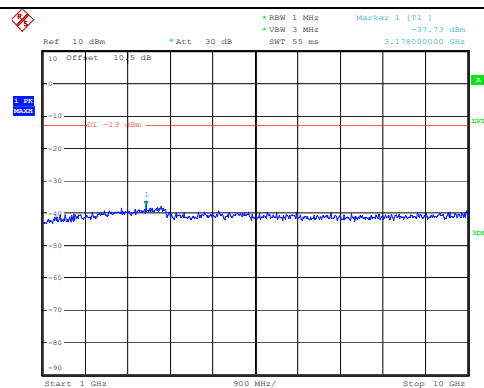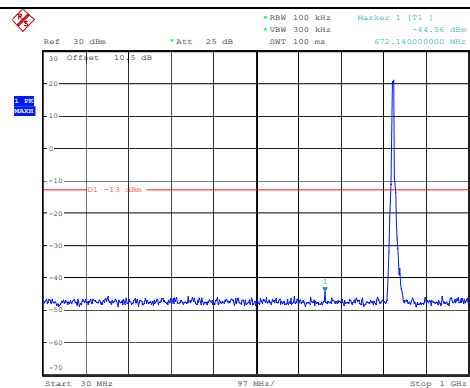







Middle

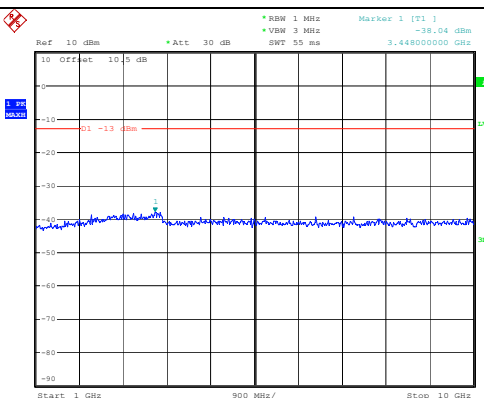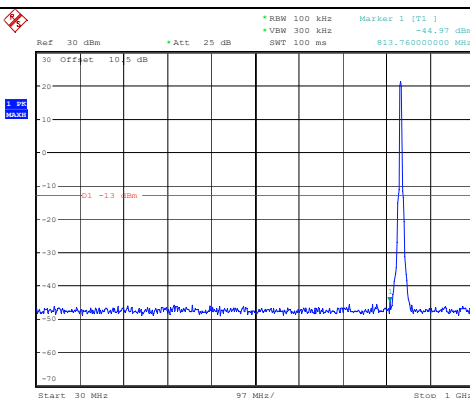

Highest

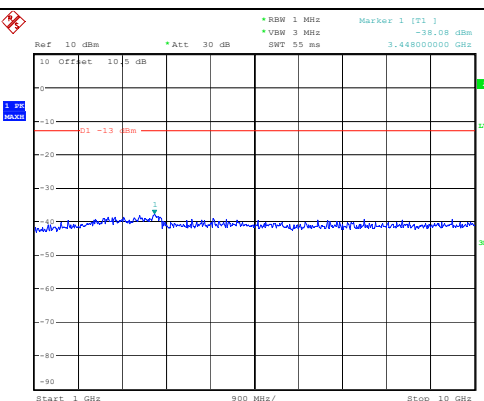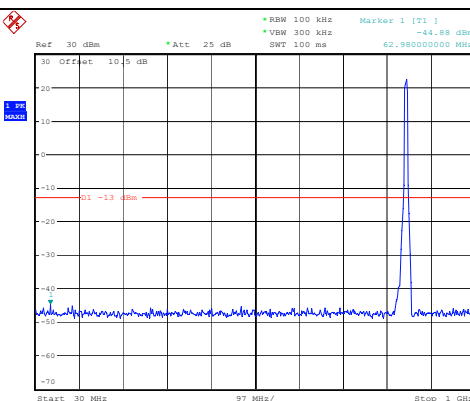

Spurious Emissions at Antenna Terminal

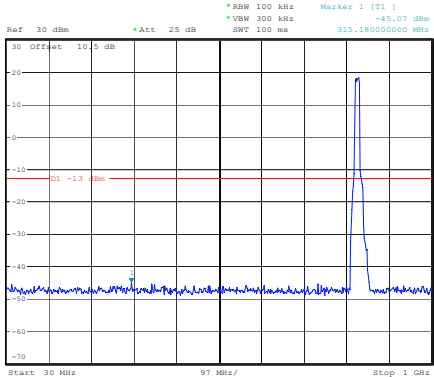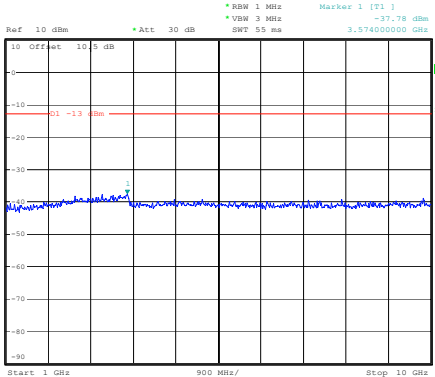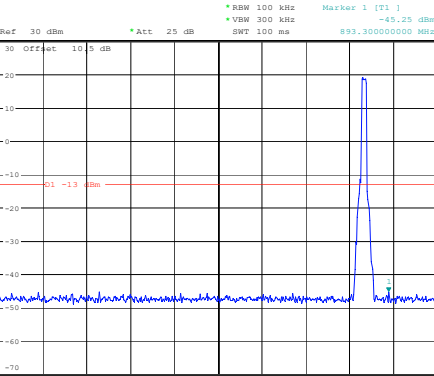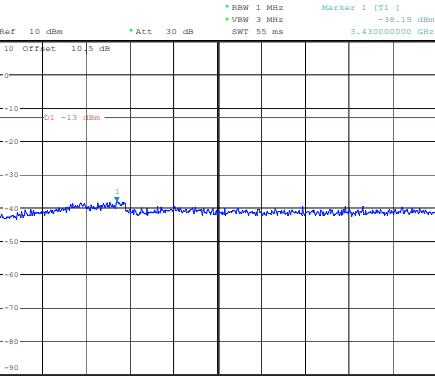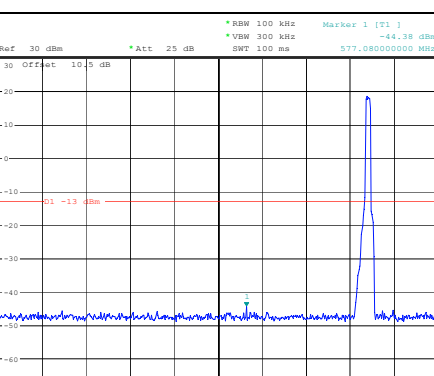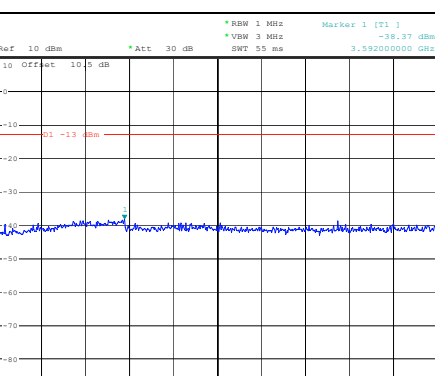Channel	10MHz Bandwidth QPSK	
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -45.07 dBm *VSW 300 kHz SWT 100 ms 315.180000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:10:20	 Ref 10 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -37.78 dBm *VSW 3 MHz SWT 55 ms 3.574000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:10:33
	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -45.25 dBm *VSW 300 kHz SWT 100 ms 893.300000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:10:49	 Ref 10 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -38.19 dBm *VSW 3 MHz SWT 55 ms 3.430000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:10:59
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -44.38 dBm *VSW 300 kHz SWT 100 ms 577.080000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:11:12	 Ref 10 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -39.37 dBm *VSW 3 MHz SWT 55 ms 3.592000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:11:22







Out of band emission, Band Edge


Mode	Lowest	Highest
QPSK 1.4MHz	Ref 30 dBm *Att 25 dB *RBW 30 kHz Marker 1 [T1] -26.18 dBm *VBW 100 kHz *SWT 35 ms 823.946000000 MHz Center 824 MHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:05:30	Ref 30 dBm *Att 25 dB *RBW 30 kHz Marker 1 [T1] -21.14 dBm *VBW 100 kHz *SWT 35 ms 849.084000000 MHz Center 849 MHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:05:42
QPSK 3MHz	Ref 30 dBm *Att 25 dB *RBW 30 kHz Marker 1 [T1] -22.15 dBm *VBW 100 kHz *SWT 35 ms 824.000000000 MHz Center 824 MHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:05:57	Ref 30 dBm *Att 25 dB *RBW 30 kHz Marker 1 [T1] -20.94 dBm *VBW 100 kHz *SWT 35 ms 849.000000000 MHz Center 849 MHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:07:45
QPSK 5MHz	Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -23.08 dBm *VBW 300 kHz *SWT 35 ms 824.000000000 MHz Center 824 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:08:00	Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -22.61 dBm *VBW 300 kHz *SWT 35 ms 849.000000000 MHz Center 849 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:08:14

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 10MHz	Ref: 30 dBm *Att: 25 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1]: 824.00000000 MHz -27.75 dBm Center: 824 MHz 2 MHz/ Span: 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:08:30	Ref: 30 dBm *Att: 25 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1]: 849.04000000 MHz -29.59 dBm Center: 849 MHz 2 MHz/ Span: 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:08:45

Out of band emission, Band Edge

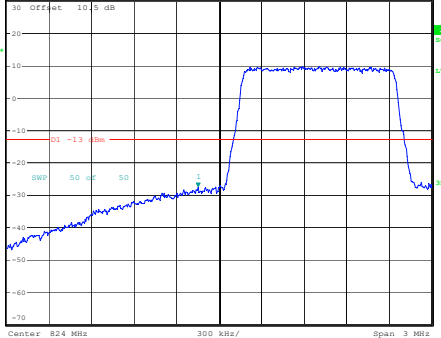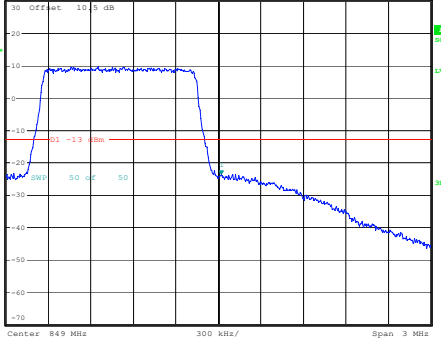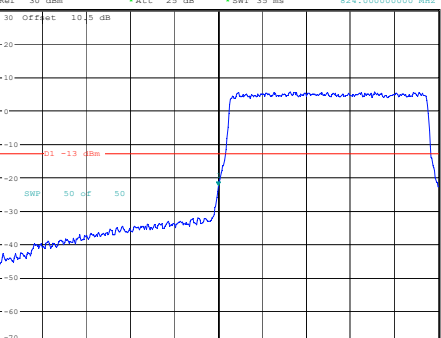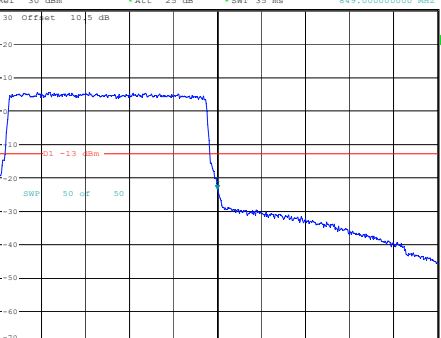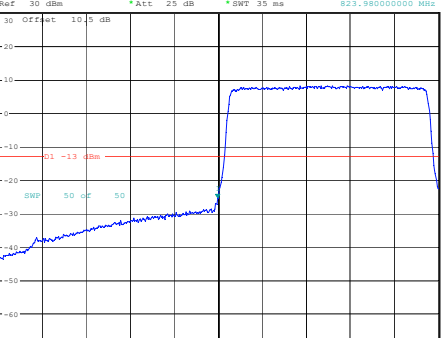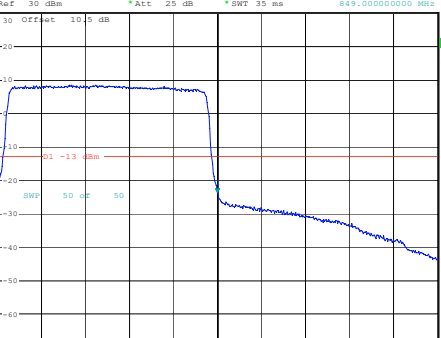Mode	Lowest	Highest
16QAM 1.4MHz	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -27.58 dBm 823.850000000 MHz Center: 824 MHz 300 kHz/ Span: 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:05:36	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -23.78 dBm 849.038000000 MHz Center: 849 MHz 300 kHz/ Span: 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:05:49
16QAM 3MHz	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -22.70 dBm 824.000000000 MHz Center: 824 MHz 600 kHz/ Span: 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:07:38	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -23.76 dBm 849.000000000 MHz Center: 849 MHz 600 kHz/ Span: 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:07:52
16QAM 5MHz	 Ref: 30 dBm *Att: 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 35 ns Marker 1 [T1] -23.91 dBm 823.980000000 MHz Center: 824 MHz 1 MHz/ Span: 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:08:07	 Ref: 30 dBm *Att: 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 35 ns Marker 1 [T1] -23.98 dBm 849.000000000 MHz Center: 849 MHz 1 MHz/ Span: 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:08:20

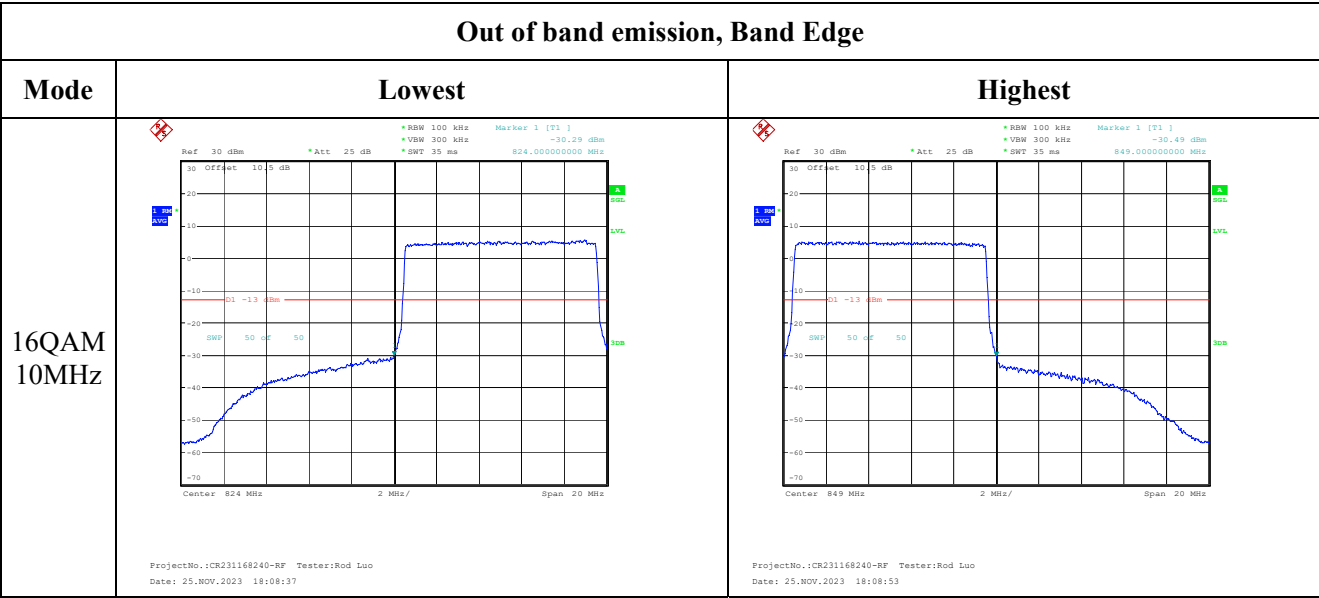

4.7 Antenna Port Test Data and Results for LTE Band 7

Serial Number:	2DW6-1	Test Date:	2023/11/25-2023/11/27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo, Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1-27.6	Relative Humidity: (%)	51-58	ATM Pressure: (kPa)	100.2-100.8
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2502.5	2535	2567.5
10MHz	2505	2535	2565
15MHz	2507.5	2535	2562.5
20MHz	2510	2535	2560

Test Data:

RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	24.34	24.47	24.51	25.90	33
	RB1#13	24.37	24.46	24.42		
	RB1#24	24.4	24.45	23.84		
	RB15#0	23.23	23.42	23.55		
	RB15#10	23.32	23.41	23.55		
	RB25#0	23.26	23.42	23.59		
5MHz 16QAM	RB1#0	23.01	23.41	23.17	24.80	33
	RB1#13	23.04	23.38	23.13		
	RB1#24	23	23.38	23.14		
	RB15#0	22.33	22.55	22.55		
	RB15#10	22.3	22.54	22.58		
	RB25#0	22.42	22.43	22.7		
10MHz QPSK	RB1#0	24.32	24.44	24.41	25.83	33
	RB1#25	24.3	24.39	24.43		
	RB1#49	24.4	24.38	24.08		
	RB25#0	23.39	23.6	23.58		
	RB25#25	23.28	23.5	23.48		
	RB50#0	23.4	23.51	23.58		
10MHz 16QAM	RB1#0	23.33	23.48	23.49	24.89	33
	RB1#25	23.26	23.05	23.5		
	RB1#49	23.28	23.04	23.44		
	RB25#0	22.53	22.68	22.63		
	RB25#25	22.59	22.65	22.52		
	RB50#0	22.52	22.51	22.76		
15MHz QPSK	RB1#0	24.19	24.54	24.4	25.93	33
	RB1#38	24.14	24.48	24.37		
	RB1#74	24.3	24.47	23.92		
	RB36#0	23.36	23.5	23.64		
	RB36#39	23.34	23.44	23.49		
	RB75#0	23.36	23.5	23.63		
15MHz 16QAM	RB1#0	23.92	23.82	23.5	25.33	33
	RB1#38	23.94	23.89	23.51		
	RB1#74	23.92	23.8	23.43		
	RB36#0	22.34	22.75	22.76		
	RB36#39	22.44	22.68	22.59		
	RB75#0	22.5	22.69	22.63		

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
20MHz QPSK	RB1#0	24.14	24.55	24.61	26.02	33
	RB1#50	24.17	24.48	24.63		
	RB1#99	24.24	24.47	24.56		
	RB50#0	23.33	23.58	23.6		
	RB50#50	23.4	23.44	23.55		
	RB100#0	23.31	23.52	23.64		
20MHz 16QAM	RB1#0	23.62	24	23.28	25.39	33
	RB1#50	23.37	23.95	23.29		
	RB1#99	23.43	23.93	23.13		
	RB50#0	22.5	22.6	22.84		
	RB50#50	22.59	22.5	22.67		
	RB100#0	22.45	22.68	22.67		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	3.36	3.19	3.01	13
	RB100#0	3.54	3.48	3.39	13
20MHz 16QAM	RB1#0	3.86	4.55	4.12	13
	RB100#0	5.33	5.16	5.10	13
				Result:	Pass

Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.540	4.540	4.540	4.980	5.040	5.020
5MHz 16QAM	4.540	4.560	4.540	5.040	5.220	5.540
10MHz QPSK	9.000	9.000	9.000	9.840	10.200	11.080
10MHz 16QAM	9.000	9.000	9.000	9.800	10.800	9.880
15MHz QPSK	13.560	13.620	13.620	15.360	15.480	16.380
15MHz 16QAM	13.620	13.620	13.620	15.300	16.260	16.560
20MHz QPSK	18.000	18.080	18.080	19.760	21.040	20.000
20MHz 16QAM	18.080	18.080	18.080	20.000	20.000	19.920

Note: The test plots please refer to the Plots of Occupied Bandwidth

Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2500.108	2500.00	2569.889	2570
	-20	3.85	2500.027	2500.00	2569.987	2570
	-10	3.85	2500.146	2500.00	2569.964	2570
	0	3.85	2500.035	2500.00	2569.874	2570
	10	3.85	2500.078	2500.00	2569.892	2570
	20	3.85	2500.124	2500.00	2569.881	2570
	30	3.85	2500.007	2500.00	2569.905	2570
	40	3.85	2500.123	2500.00	2569.917	2570
	50	3.85	2500.108	2500.00	2569.942	2570
Frequency Stability vs. Voltage	20	3.45	2500.142	2500.00	2569.926	2570
	20	4.4	2500.132	2500.00	2569.951	2570
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2500.059	2500.00	2569.796	2570
	-20	3.85	2500.042	2500.00	2569.862	2570
	-10	3.85	2500.155	2500.00	2569.876	2570
	0	3.85	2500.093	2500.00	2569.812	2570
	10	3.85	2500.087	2500.00	2569.958	2570
	20	3.85	2500.152	2500.00	2569.904	2570
	30	3.85	2500.064	2500.00	2569.991	2570
	40	3.85	2500.061	2500.00	2569.952	2570
	50	3.85	2500.046	2500.00	2569.871	2570
Frequency Stability vs. Voltage	20	3.45	2500.159	2500.00	2569.955	2570
	20	4.4	2500.037	2500.00	2569.996	2570
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

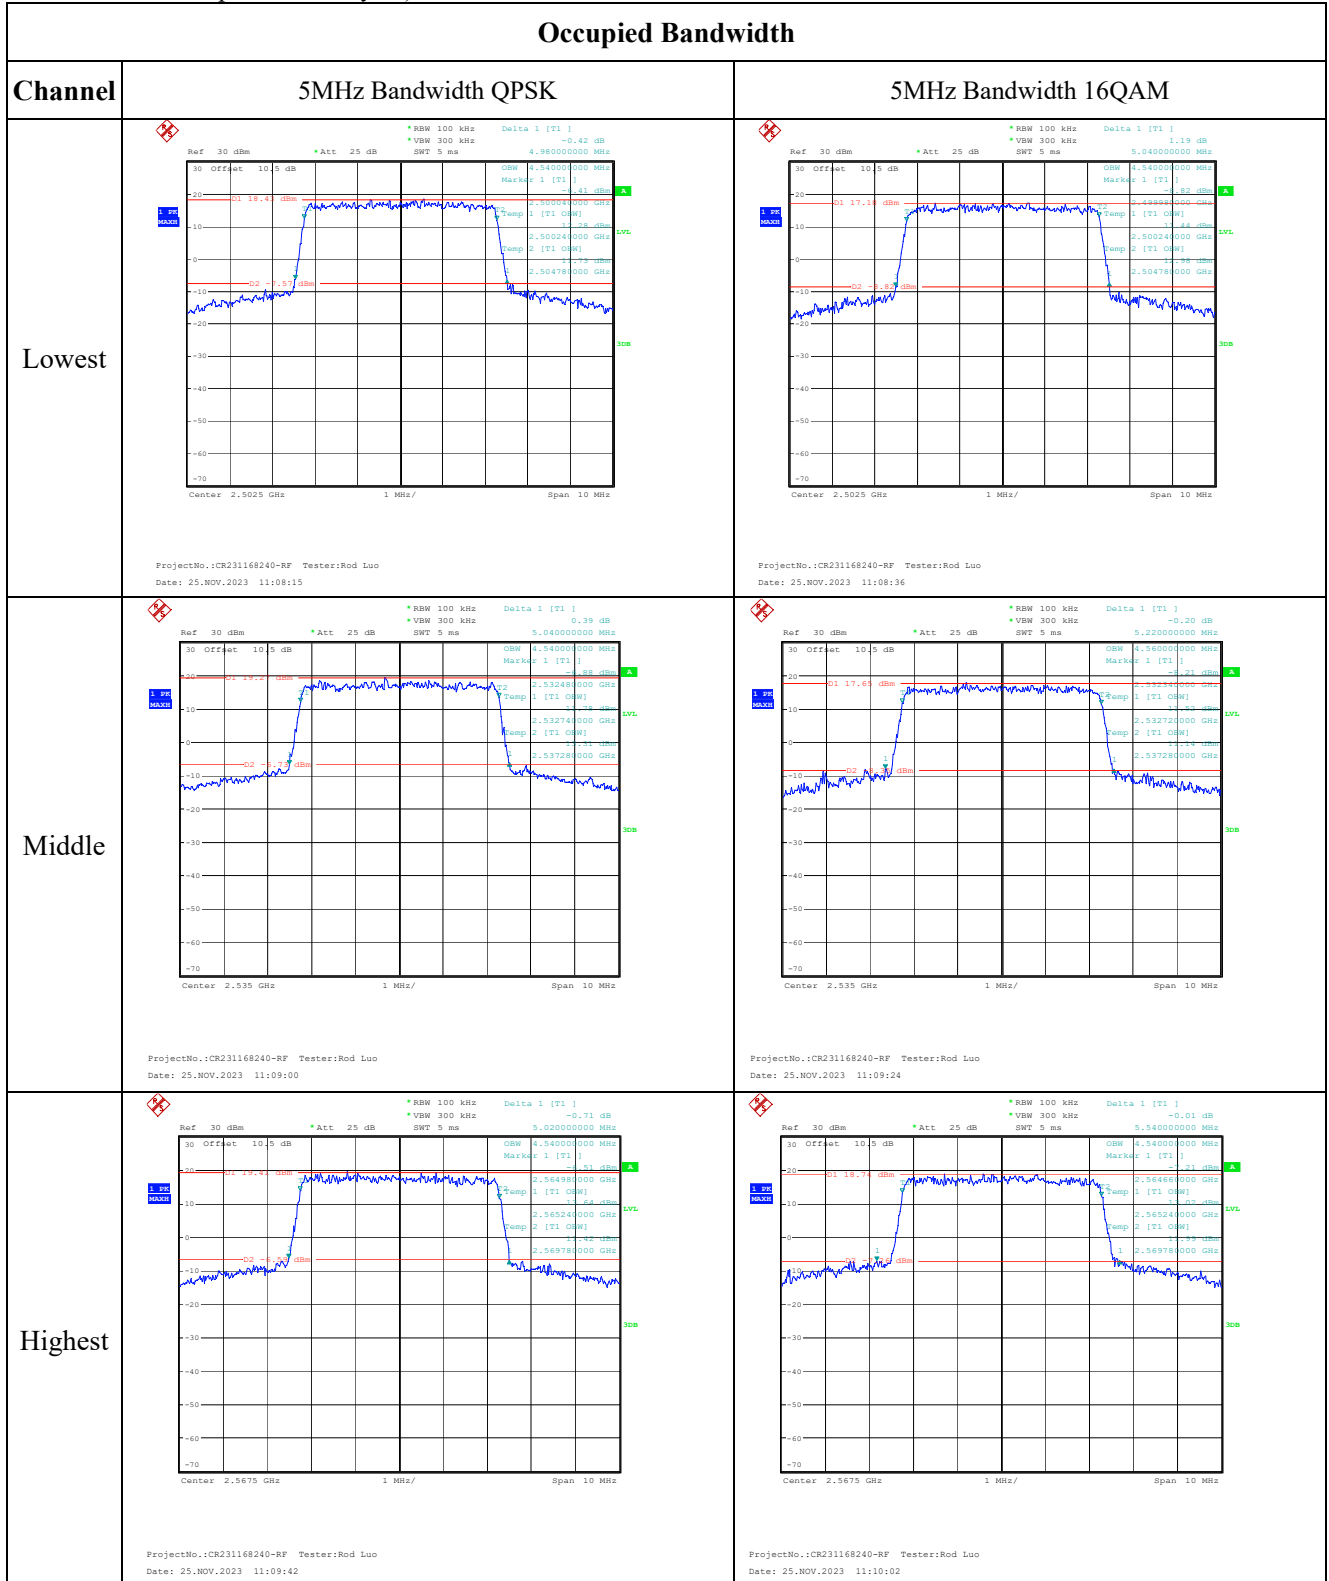


Occupied Bandwidth

Channel


10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM

Lowest

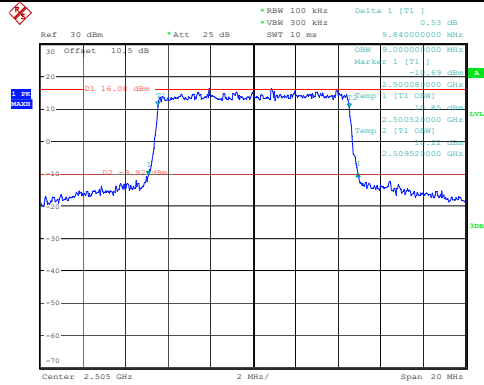


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:10:31

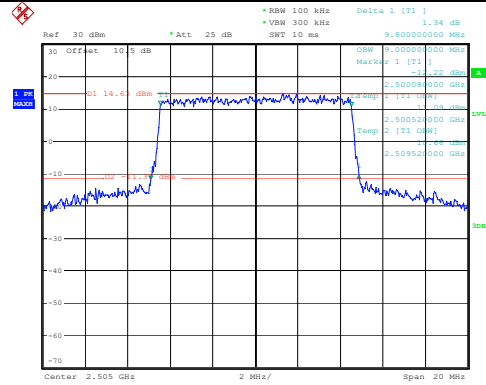


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:10:45

Middle

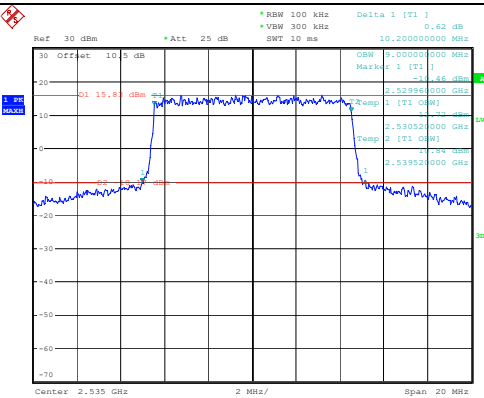


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:11:06

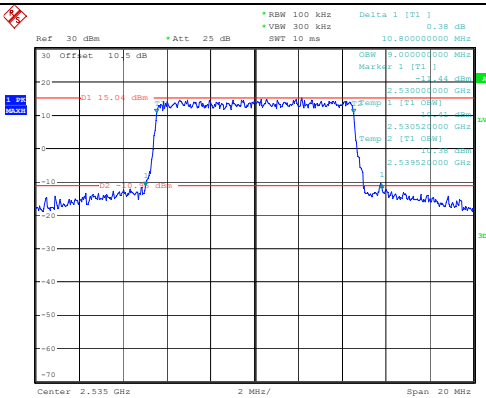


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:11:27

Highest

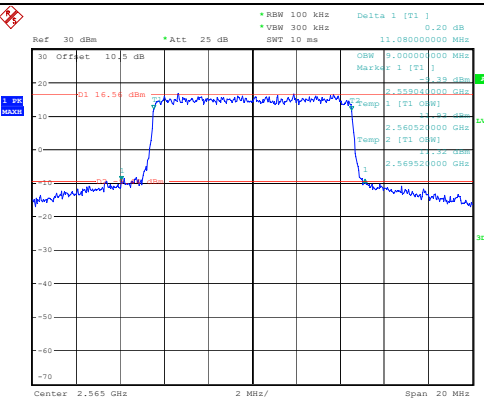

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:11:45

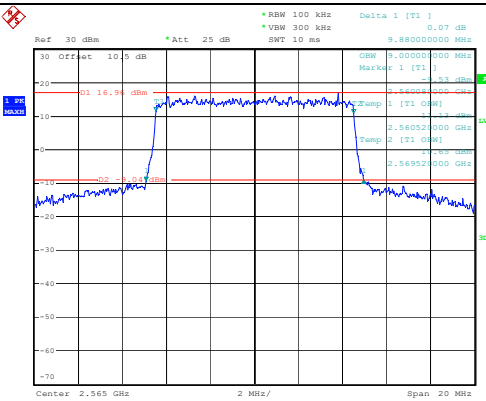

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:12:05

Page 112 of 179



Page 113 of 179

Spurious Emissions at Antenna Terminal



Channel

5.0MHz Bandwidth QPSK



Lowest

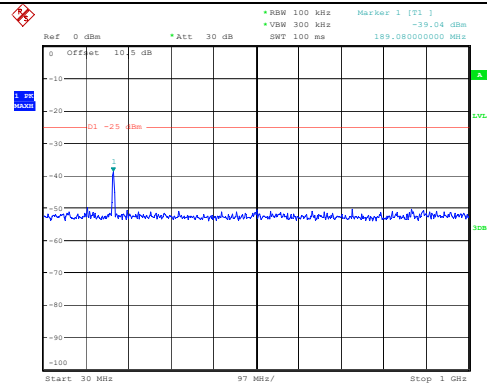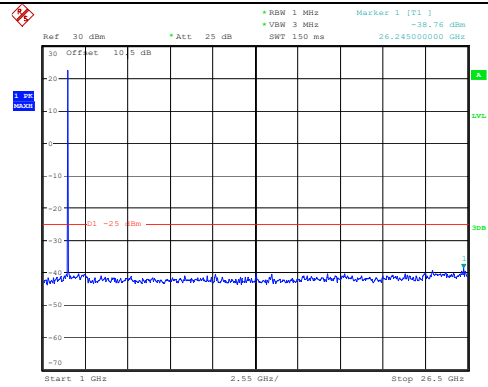ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:11:45ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:11:55

Middle

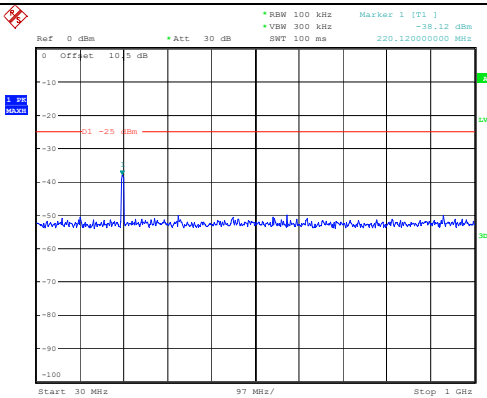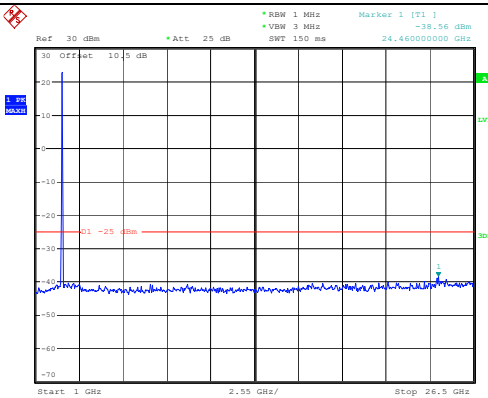ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:12:11ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:12:21

Highest

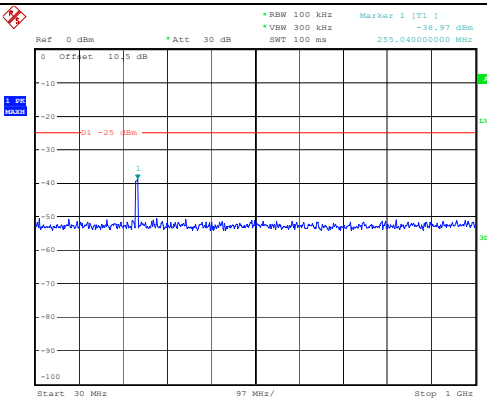
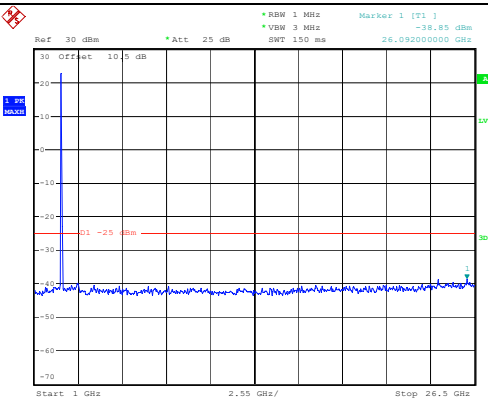
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:12:34ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:12:44

Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

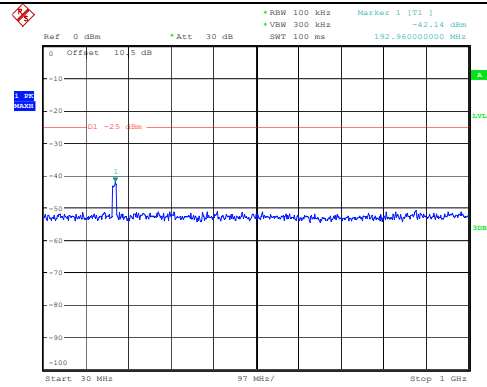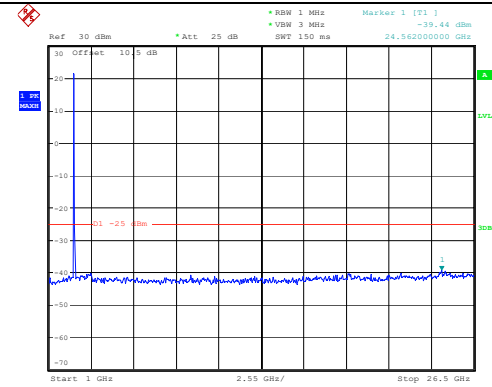ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:13:01ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:13:12

Middle

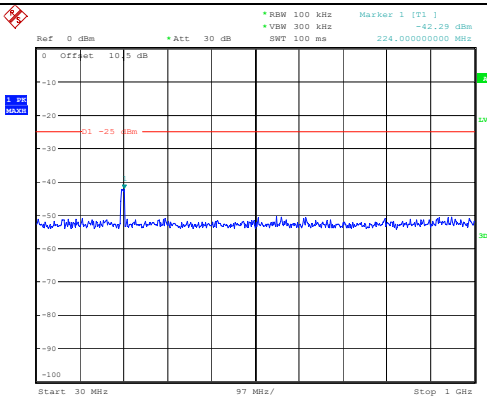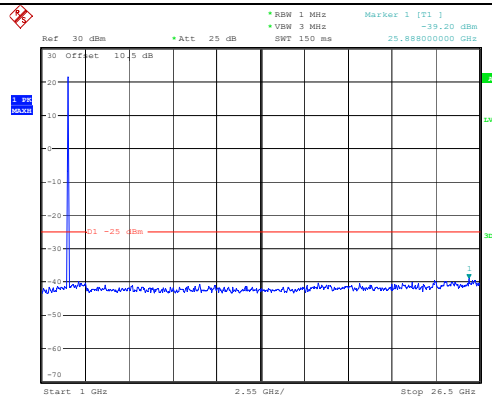ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:13:24ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:13:35

Highest

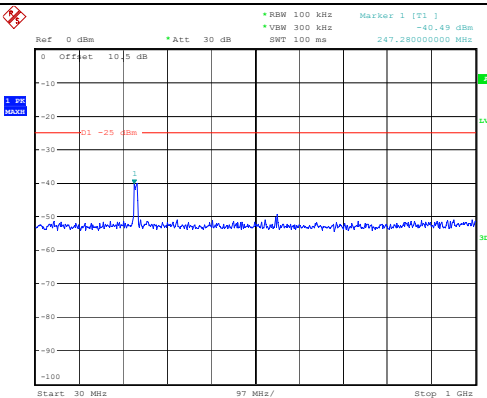
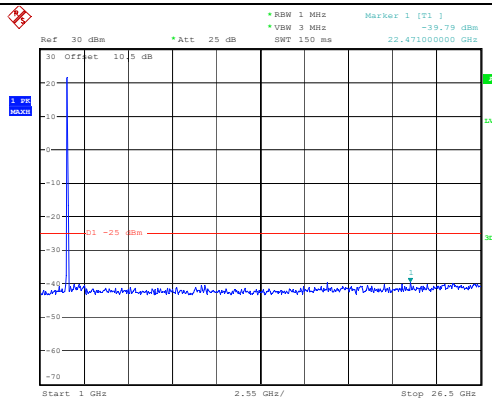
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:13:47ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:13:58

Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

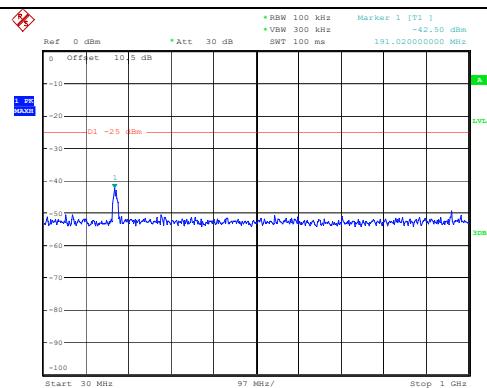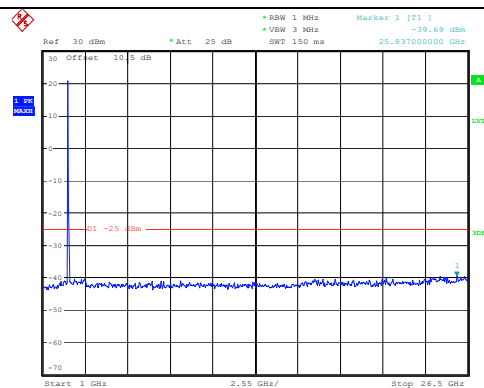ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:14:14ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:14:24

Middle

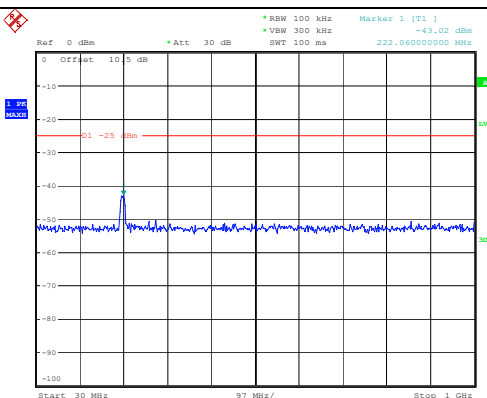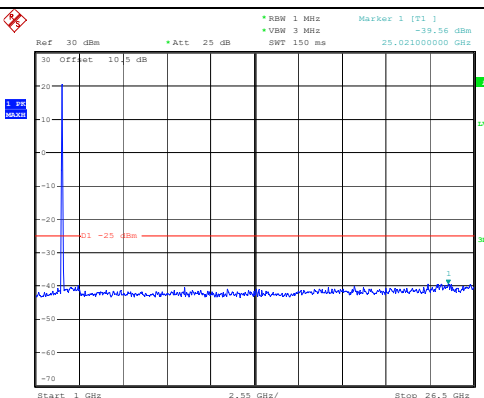ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:14:37ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:14:47

Highest

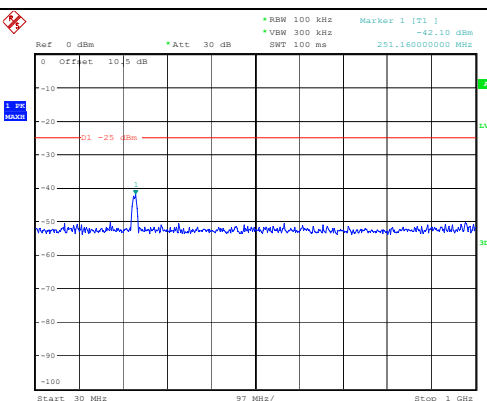
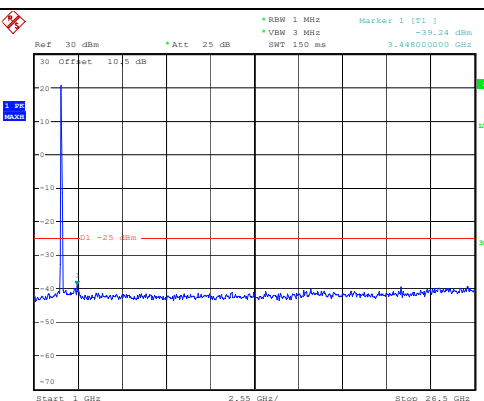
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:15:03ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:15:14

Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

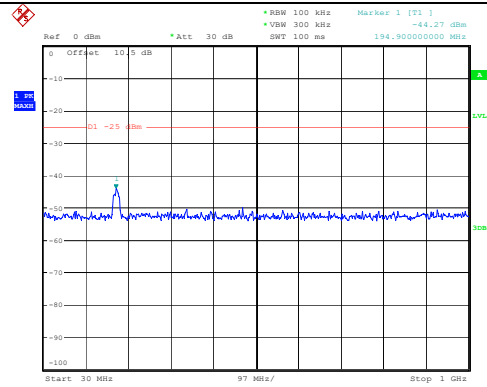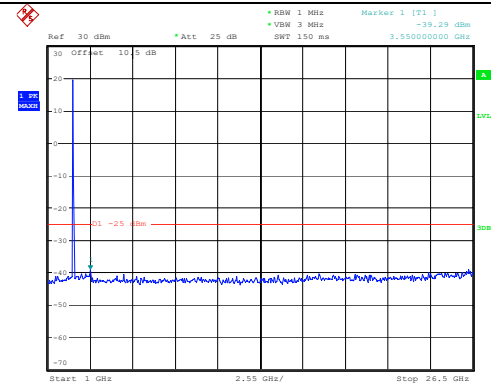ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:15:34ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:15:44


Middle

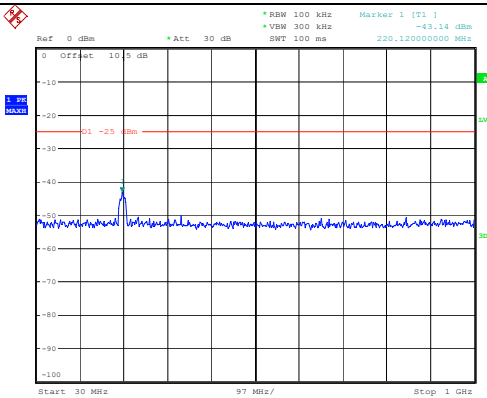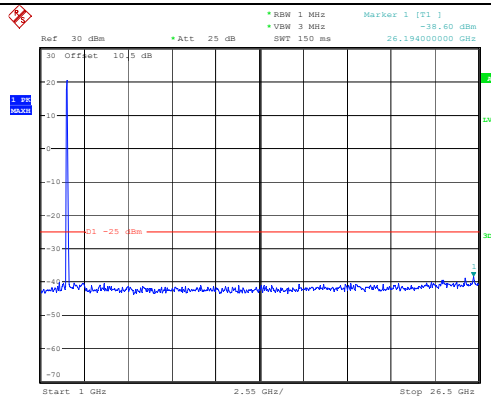
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:15:57ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:16:07

Highest

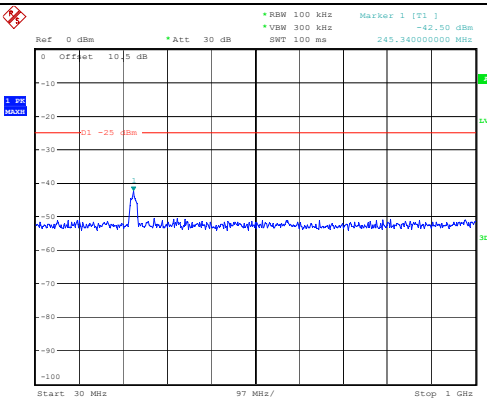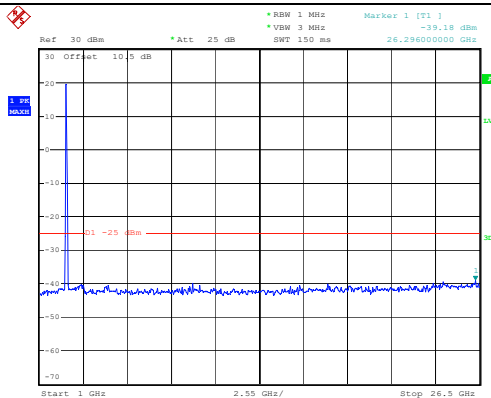
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:16:23ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:16:33

Out of band emission, Band Edge

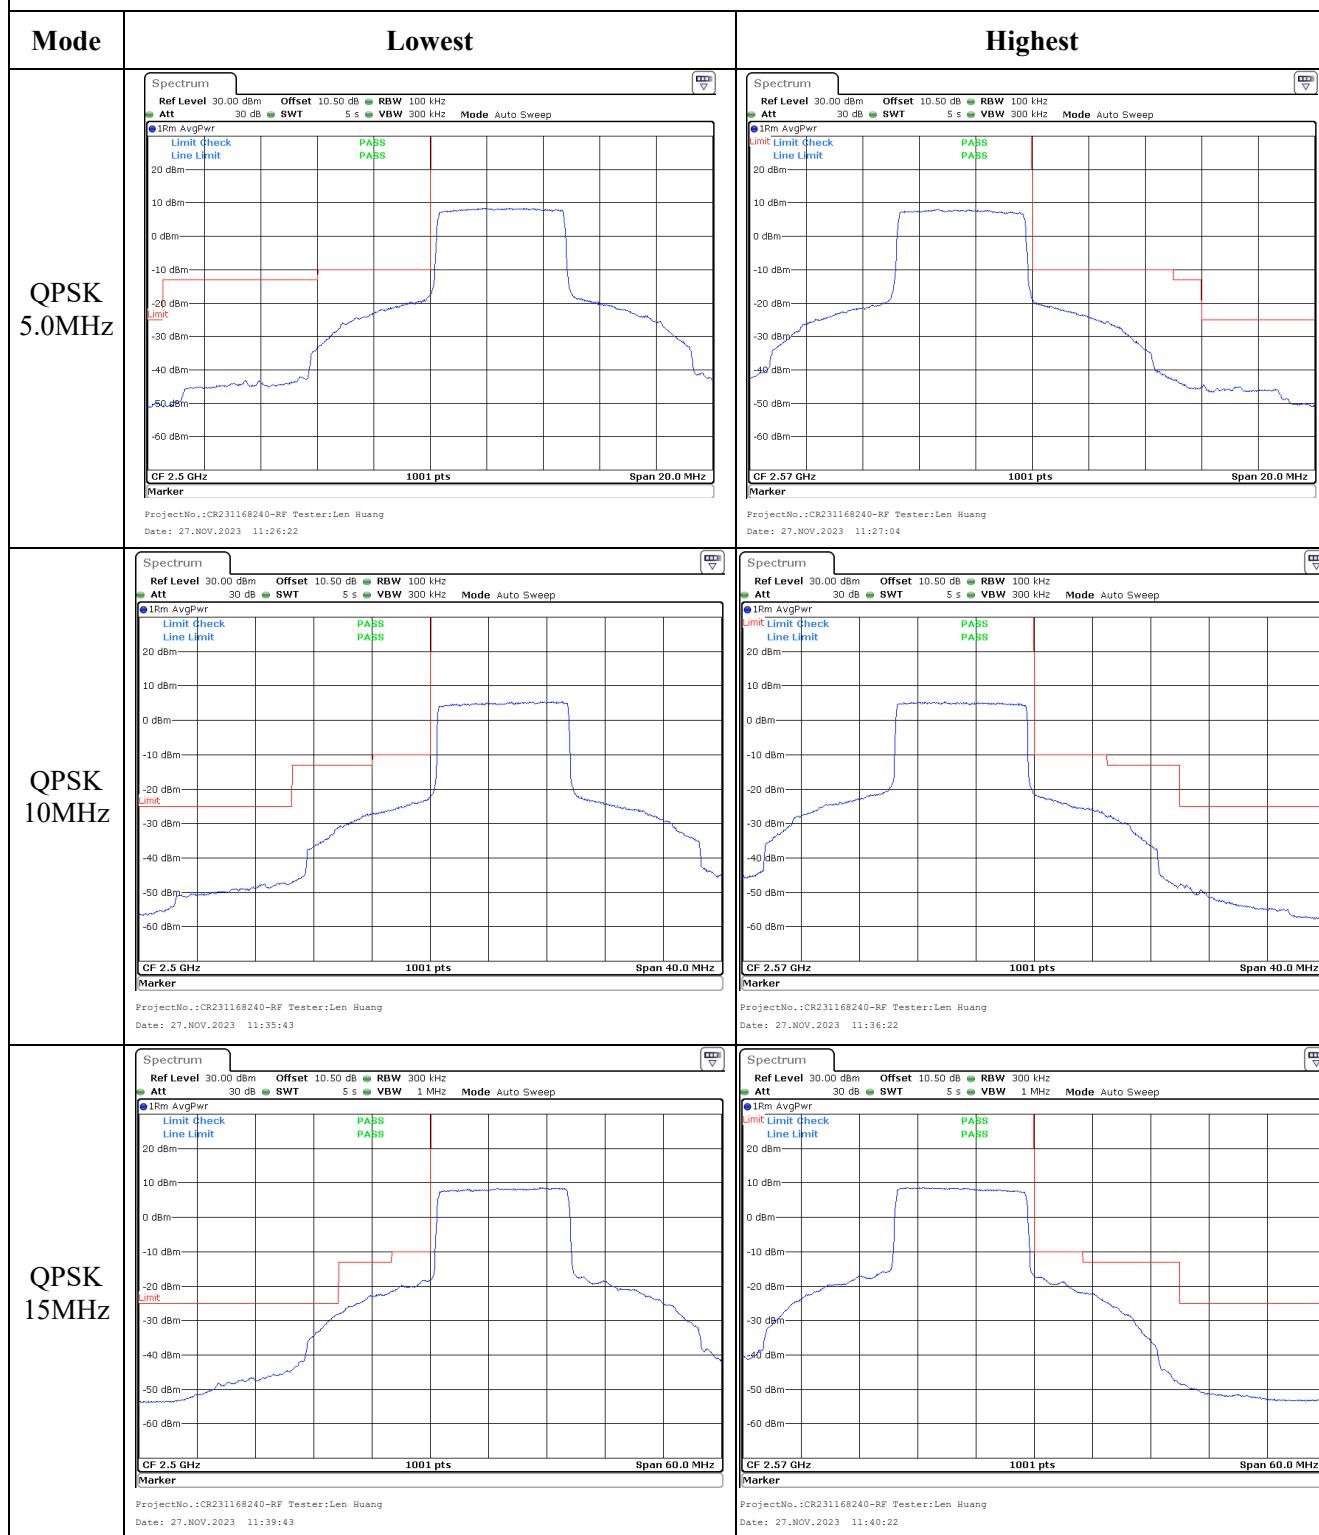


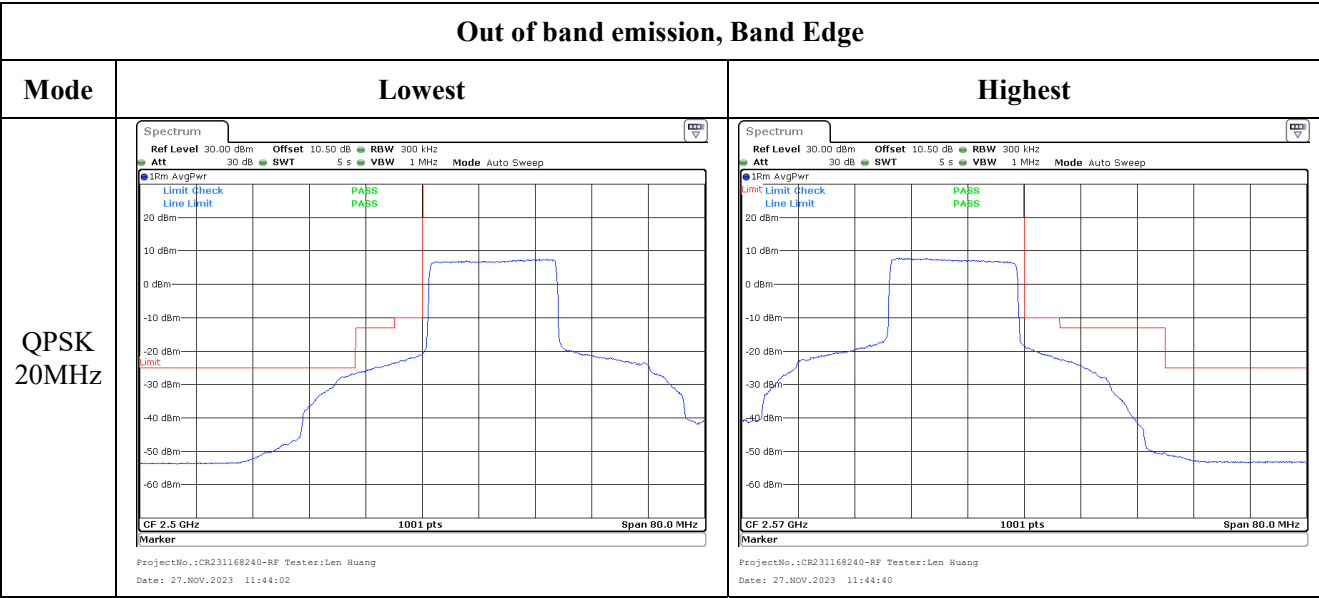

Out of band emission, Band Edge

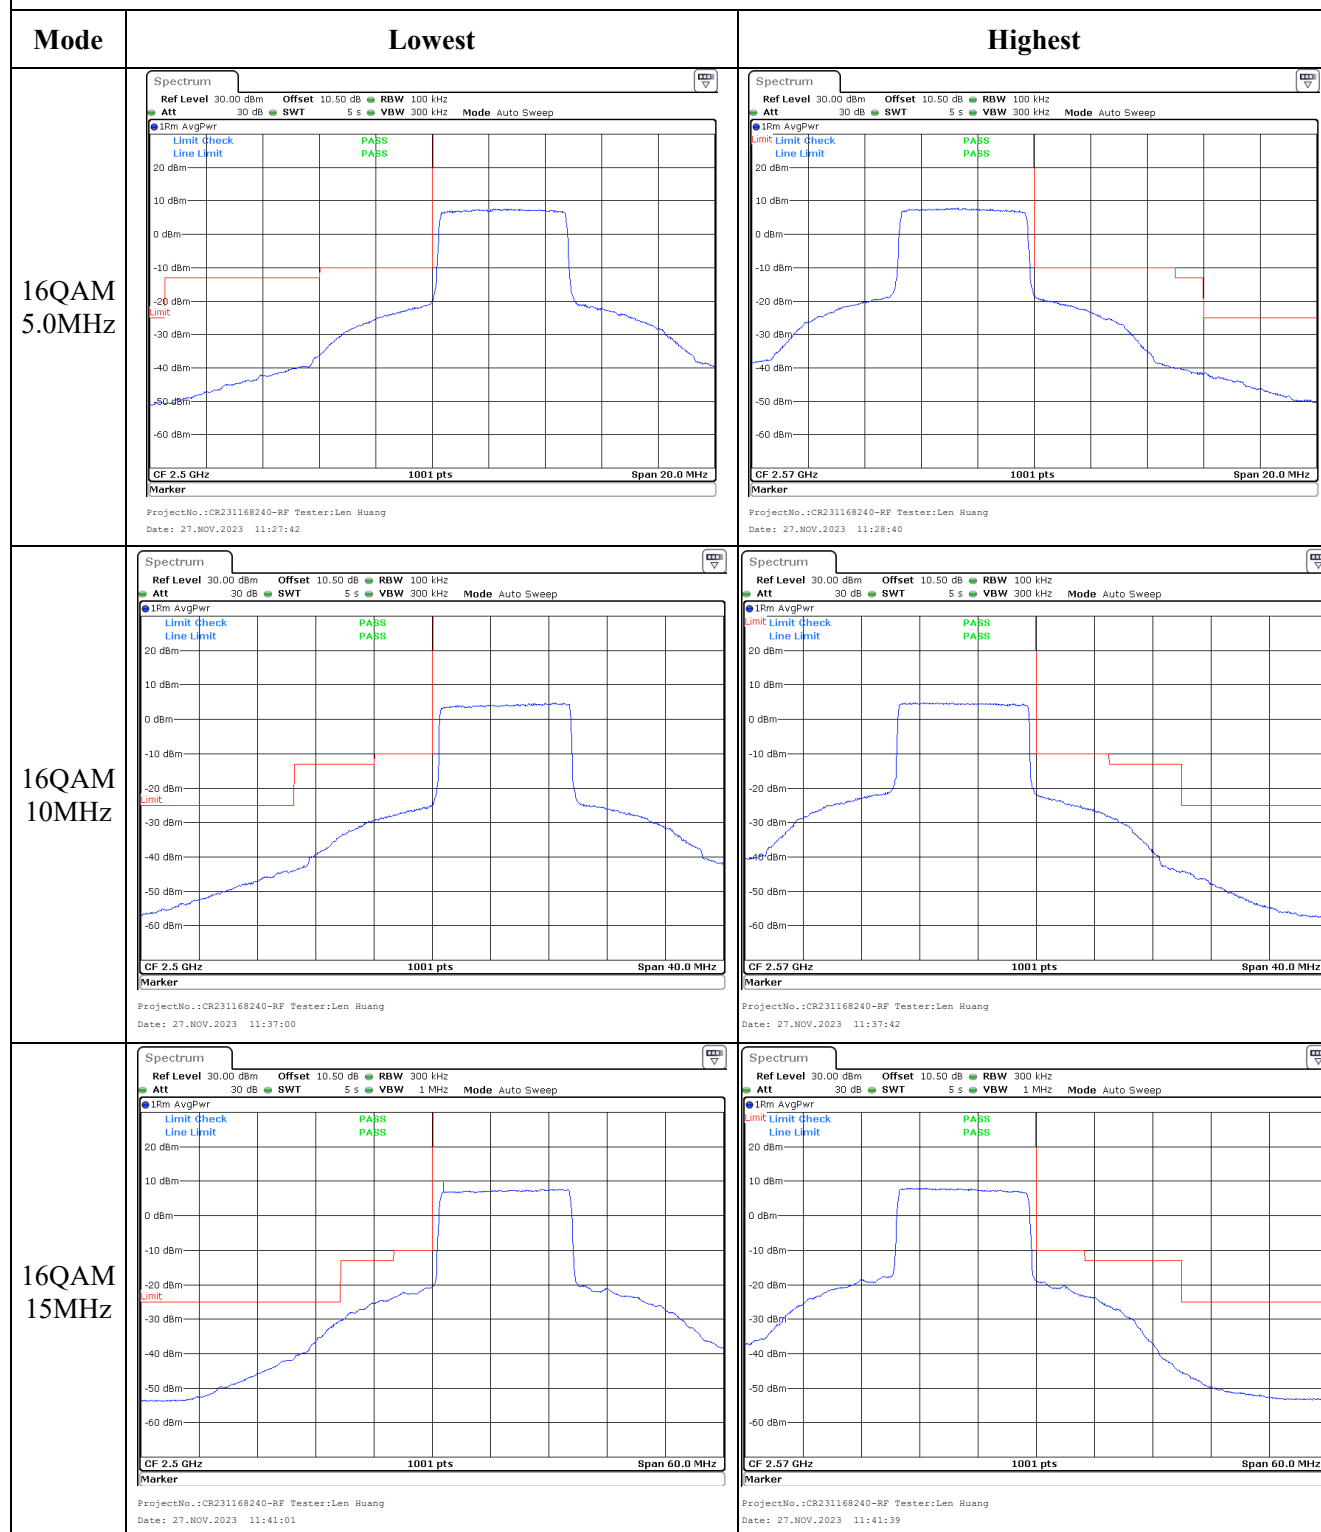

Out of band emission, Band Edge

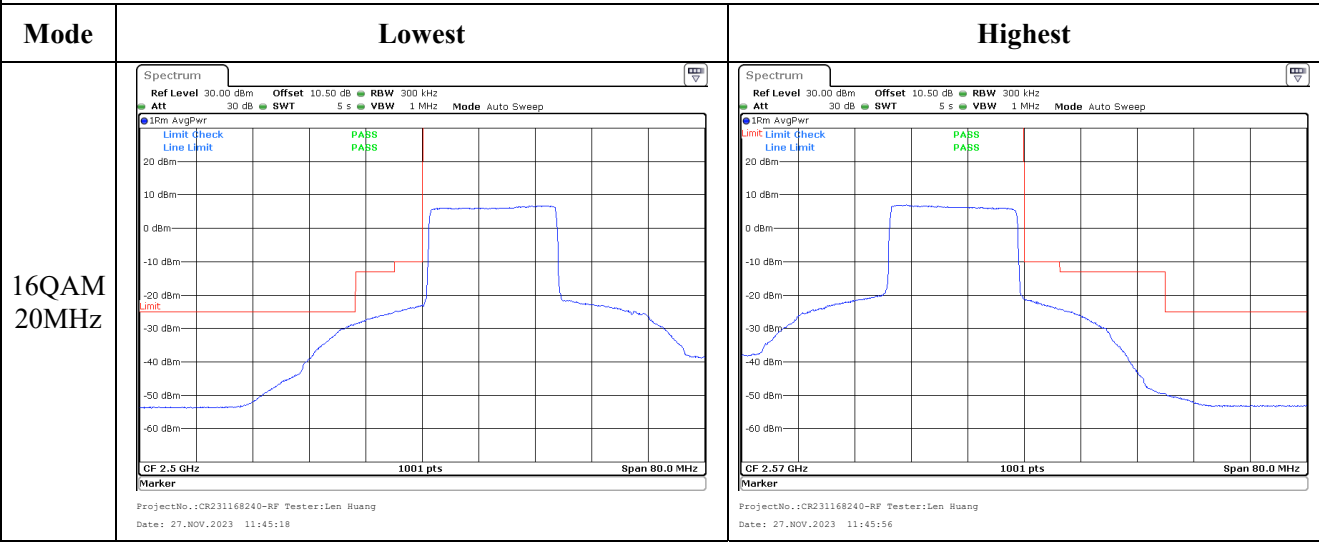

4.8 Antenna Port Test Data and Results for LTE Band 12

Serial Number:	2DW6-1	Test Date:	2023/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.6	Relative Humidity: (%)	51	ATM Pressure: (kPa)	100.8
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	699.7	707.5	715.3
3MHz	700.5	707.5	714.5
5MHz	701.5	707.5	713.5
10MHz	704	707.5	711

Test Data:

RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	24.04	23.92	23.86	19.49	34.77
	RB1#3	23.98	23.83	23.88		
	RB1#5	24.04	23.82	23.88		
	RB3#0	24.08	23.87	23.91		
	RB3#3	23.95	23.91	24.02		
	RB6#0	23.01	22.82	22.83		
1.4MHz 16QAM	RB1#0	23.01	22.46	23.33	18.82	34.77
	RB1#3	23.41	22.77	23.36		
	RB1#5	23.41	22.56	23.34		
	RB3#0	22.65	22.48	22.6		
	RB3#3	22.66	22.49	22.57		
	RB6#0	21.93	21.58	22.05		
3MHz QPSK	RB1#0	23.98	23.9	23.93	19.45	34.77
	RB1#8	24.01	23.94	23.87		
	RB1#14	24.04	23.86	23.84		
	RB6#0	22.98	22.94	22.87		
	RB6#9	22.89	22.83	22.85		
	RB15#0	22.81	22.9	22.94		
3MHz 16QAM	RB1#0	22.8	22.54	22.84	18.27	34.77
	RB1#8	22.86	22.54	22.77		
	RB1#14	22.86	22.58	22.69		
	RB6#0	22.03	21.82	21.72		
	RB6#9	22.02	21.87	21.68		
	RB15#0	21.8	21.78	21.88		
5MHz QPSK	RB1#0	24.1	23.85	23.86	19.51	34.77
	RB1#13	24.08	23.85	23.85		
	RB1#24	24.02	23.86	23.86		
	RB15#0	22.96	22.89	22.84		
	RB15#10	22.91	22.87	22.84		
	RB25#0	22.88	22.88	22.95		

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz 16QAM	RB1#0	22.88	22.82	22.16	18.32	34.77
	RB1#13	22.91	22.76	22.3		
	RB1#24	22.84	22.75	22.25		
	RB15#0	21.85	21.82	21.73		
	RB15#10	21.84	21.88	21.84		
	RB25#0	22.06	21.71	22.01		
10MHz QPSK	RB1#0	23.98	23.84	24.05	19.46	34.77
	RB1#25	23.92	23.86	23.97		
	RB1#49	23.99	23.87	23.92		
	RB25#0	23.01	23.03	22.89		
	RB25#25	22.93	22.94	22.91		
	RB50#0	22.81	22.87	22.82		
10MHz 16QAM	RB1#0	23.47	22.88	23.3	18.88	34.77
	RB1#25	23.35	22.76	23.31		
	RB1#49	23.29	22.75	22.68		
	RB25#0	22.05	21.81	21.95		
	RB25#25	21.98	21.84	22.03		
	RB50#0	21.96	21.8	21.9		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	4.5	4.46	5.16	13
	RB50#0	5.07	5.25	5.10	13
10MHz 16QAM	RB1#0	5.10	5.57	6.78	13
	RB50#0	6.12	6.20	6.03	13
				Result:	Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.104	1.104	1.260	1.260	1.266
1.4MHz 16QAM	1.092	1.104	1.116	1.254	1.254	1.266
3MHz QPSK	2.700	2.700	2.700	3.000	3.012	3.012
3MHz 16QAM	2.700	2.700	2.700	3.000	3.012	3.000
5MHz QPSK	4.520	4.520	4.500	5.020	5.000	4.840
5MHz 16QAM	4.540	4.520	4.520	5.000	5.020	4.980
10MHz QPSK	8.960	9.000	9.000	9.760	9.800	9.720
10MHz 16QAM	8.960	8.960	8.920	9.760	9.840	9.800
Note: The test plots please refer to the Plots of Occupied Bandwidth						


Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.







Frequency Stability						
Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	699.056	699.00	715.975	716.00
	-20	3.85	699.079	699.00	715.996	716.00
	-10	3.85	699.094	699.00	715.943	716.00
	0	3.85	699.043	699.00	715.887	716.00
	10	3.85	699.054	699.00	715.893	716.00
	20	3.85	699.146	699.00	715.953	716.00
	30	3.85	699.094	699.00	715.964	716.00
	40	3.85	699.052	699.00	715.936	716.00
	50	3.85	699.168	699.00	715.963	716.00
Frequency Stability vs. Voltage	20	3.45	699.098	699.00	715.984	716.00
	20	4.4	699.009	699.00	715.961	716.00
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	699.089	699.00	715.958	716.00
	-20	3.85	699.141	699.00	715.821	716.00
	-10	3.85	699.068	699.00	715.832	716.00
	0	3.85	699.100	699.00	715.955	716.00
	10	3.85	699.155	699.00	715.983	716.00
	20	3.85	699.087	699.00	715.997	716.00
	30	3.85	699.156	699.00	715.879	716.00
	40	3.85	699.084	699.00	715.923	716.00
	50	3.85	699.090	699.00	715.912	716.00
Frequency Stability vs. Voltage	20	3.45	699.127	699.00	715.955	716.00
	20	4.4	699.088	699.00	715.977	716.00
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

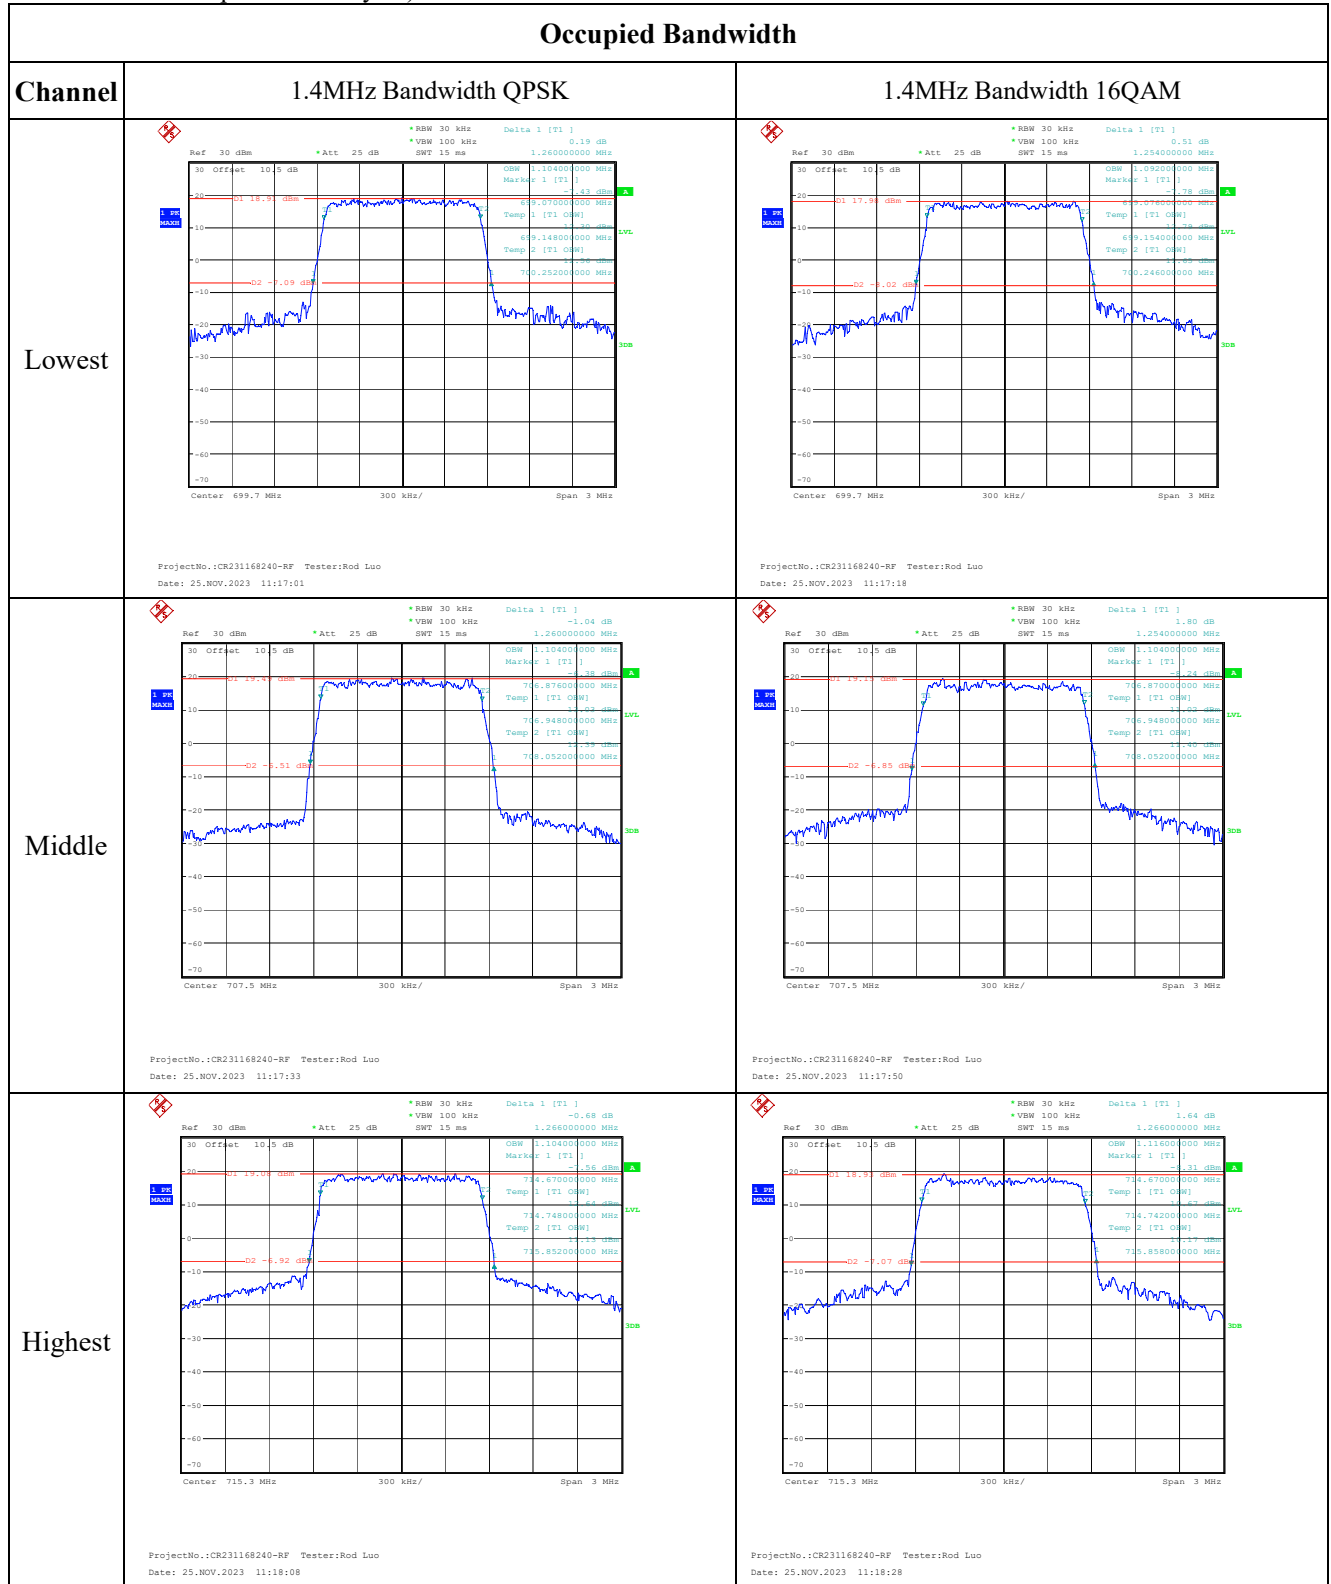

Occupied Bandwidth

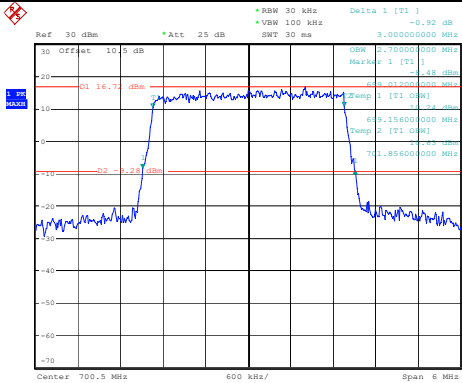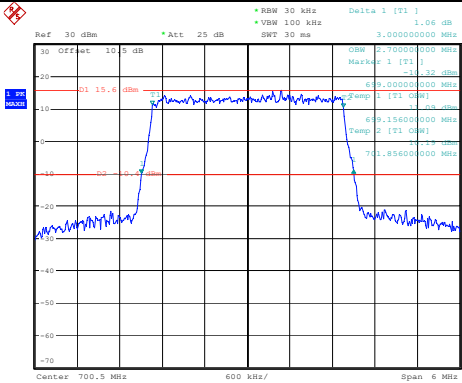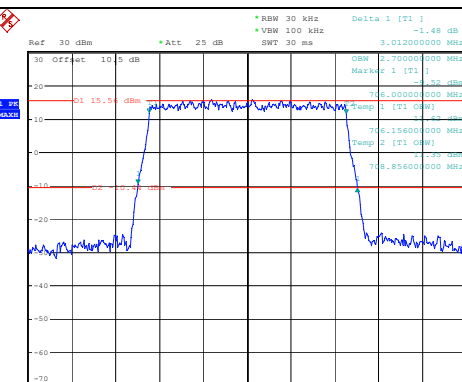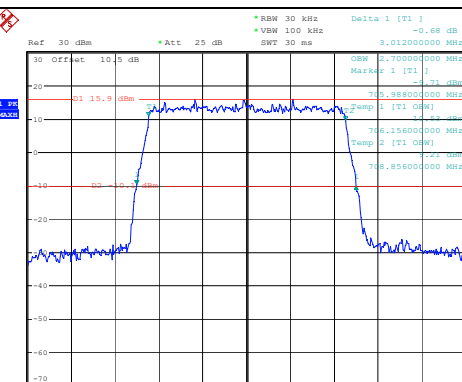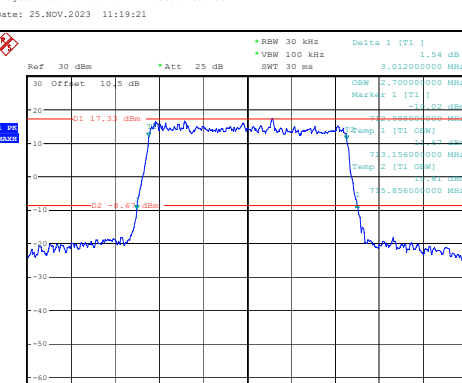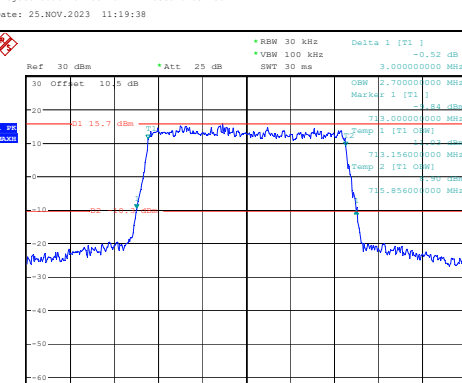Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 11:18:49	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 11:19:06
Middle	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 11:19:21	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 11:19:38
Highest	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 11:19:56	 ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 11:20:10


Occupied Bandwidth

Channel


5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM

Lowest

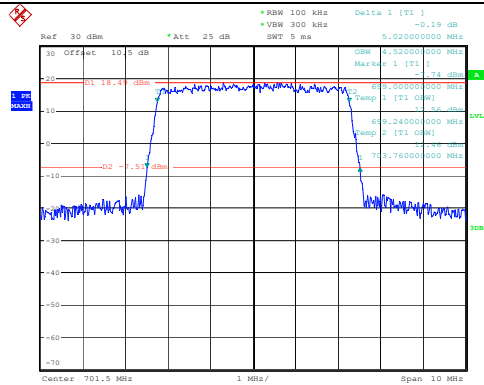


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:20:38

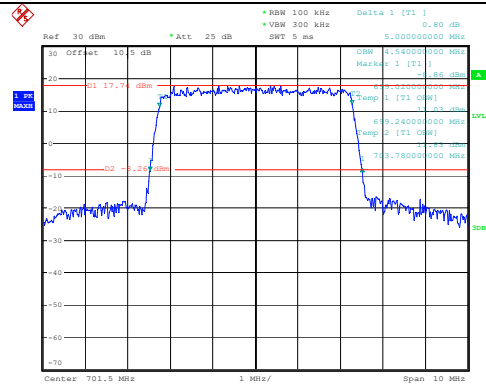


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:20:59

Middle

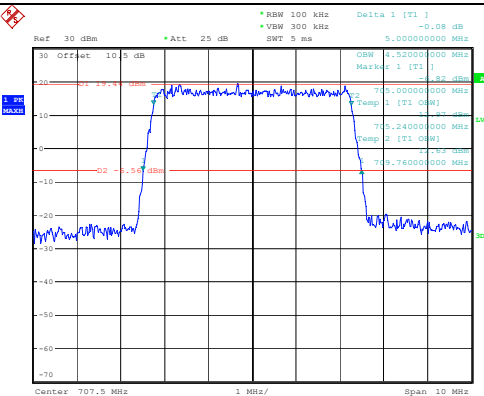


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:21:17

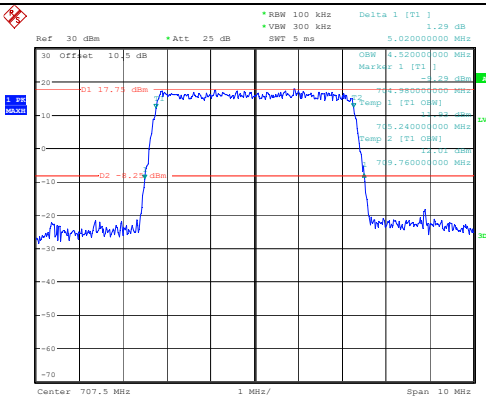


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:21:37

Highest

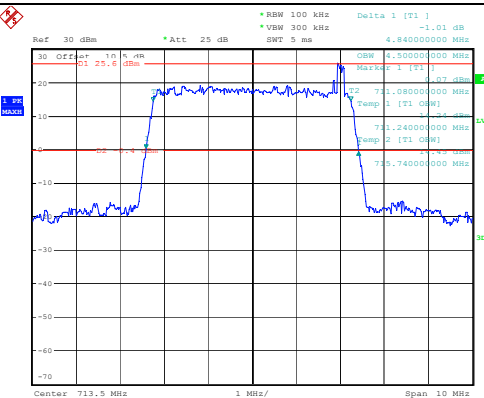

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:21:59

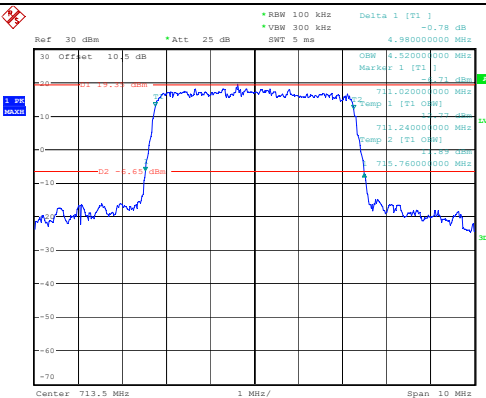

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 11:22:22



Page 130 of 179

Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

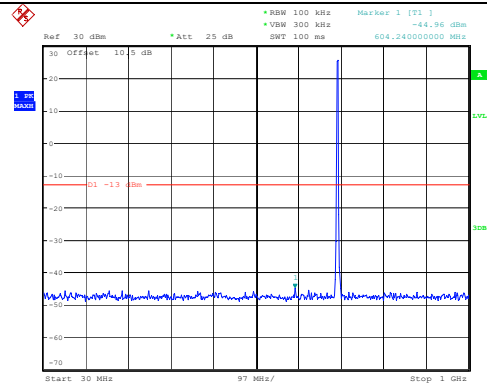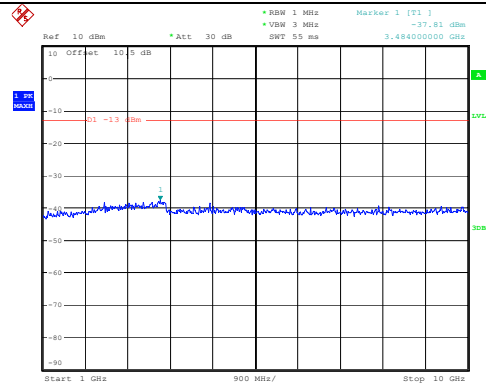ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:17:09ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:17:19







Middle

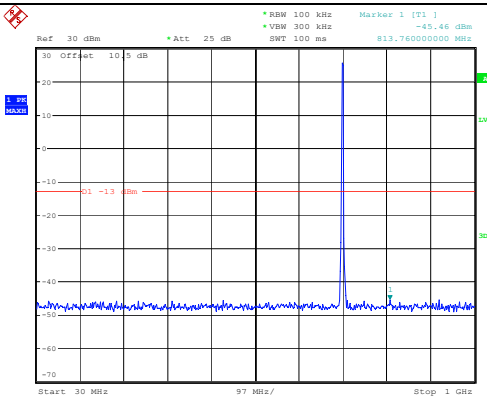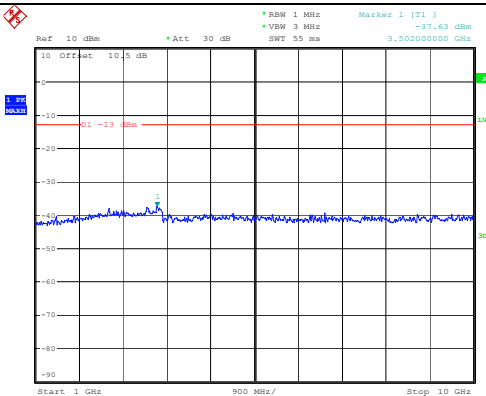ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:17:32ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:17:42

Highest

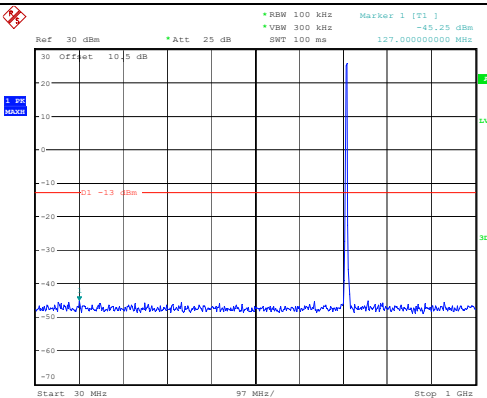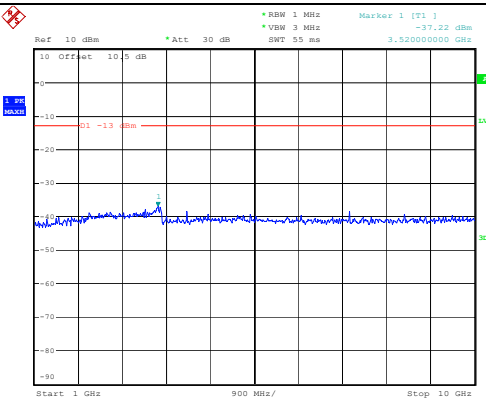ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:17:55ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:18:05

Spurious Emissions at Antenna Terminal

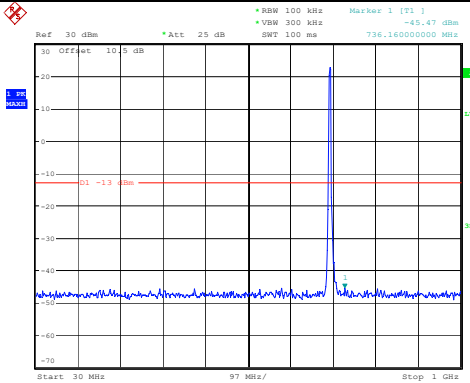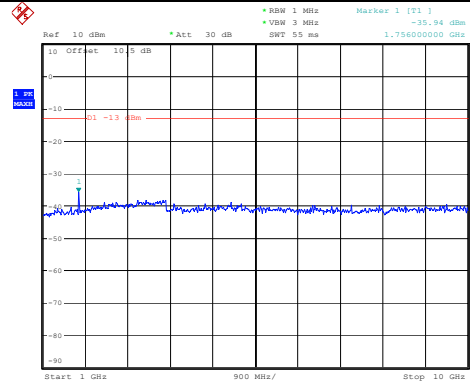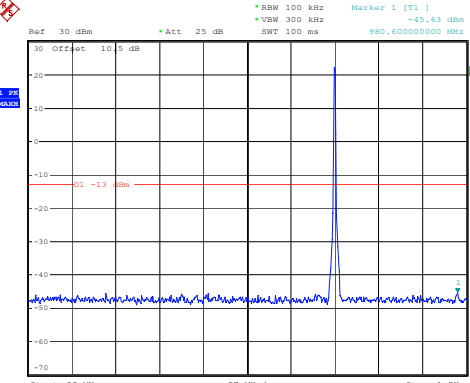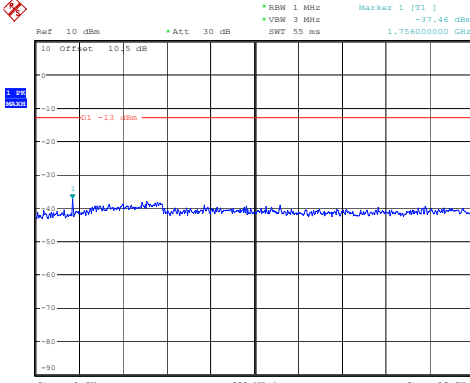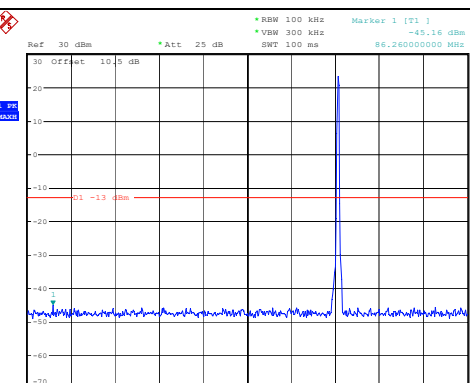
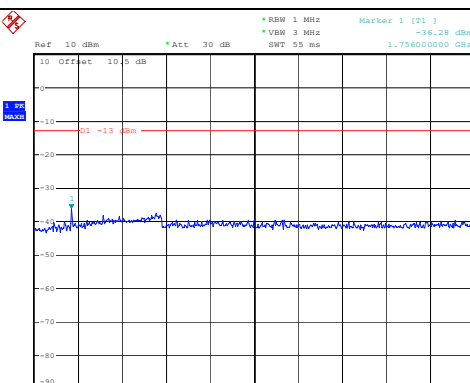
Channel	3MHz Bandwidth QPSK	
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -45.47 dBm SWT 100 ms 736.16000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:31:05	 Ref 10 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz Marker 1 [T1] -35.94 dBm SWT 55 ms 1.756000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:31:16
	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -45.63 dBm SWT 100 ms 980.60000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:31:29	 Ref 10 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz Marker 1 [T1] -37.46 dBm SWT 55 ms 1.756000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:31:39
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -45.16 dBm SWT 100 ms 86.260000000 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:31:51	 Ref 10 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz Marker 1 [T1] -36.28 dBm SWT 55 ms 1.756000000 GHz Start 1 GHz 900 MHz/ Stop 10 GHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 12:32:02

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

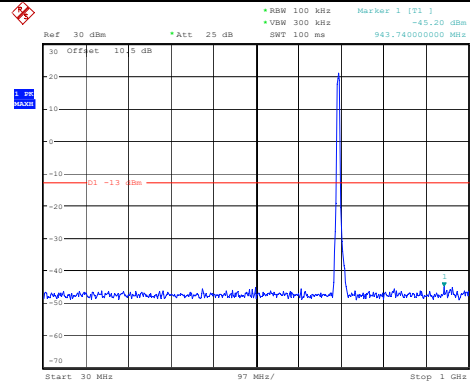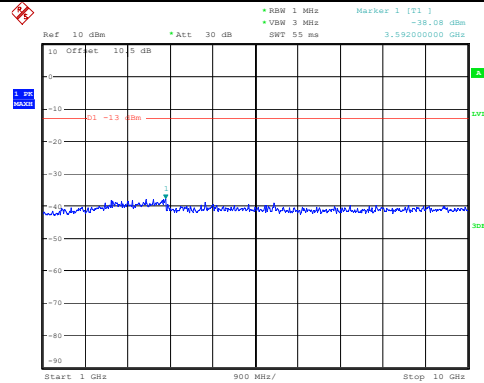ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:32:17ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:32:27

Middle

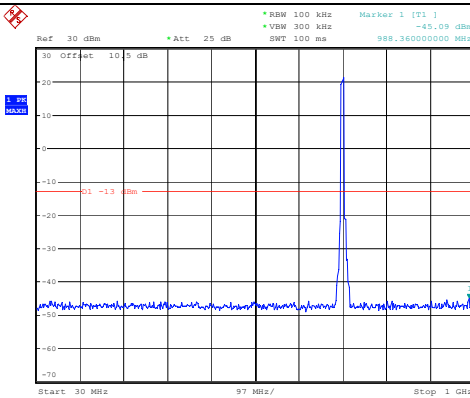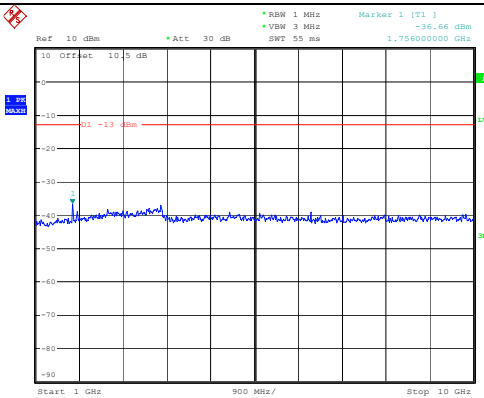ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:32:43ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:32:53

Highest

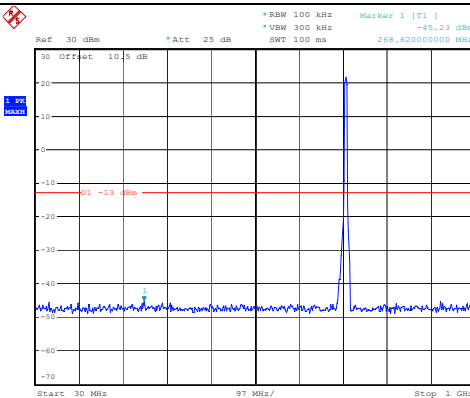
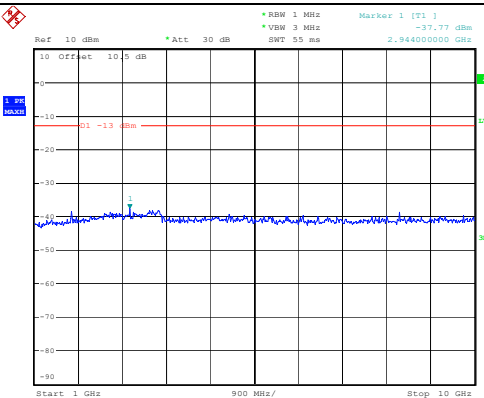
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:33:06ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:33:16

Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

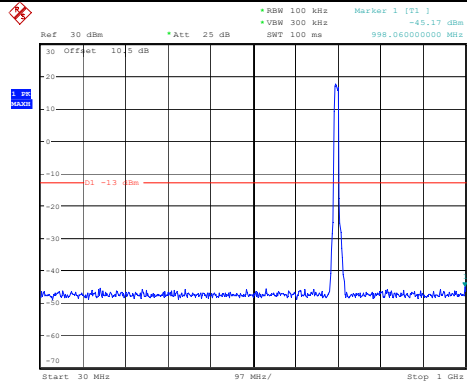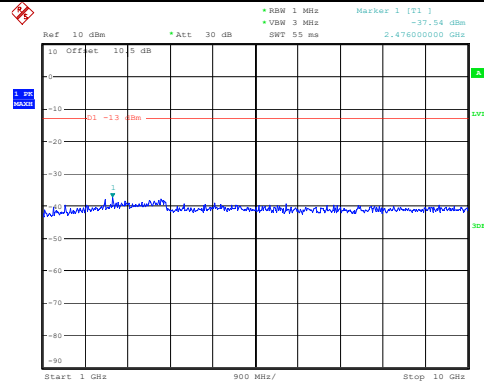ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:33:32ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:33:42







Middle

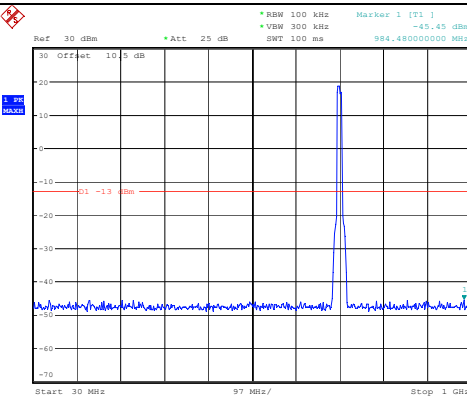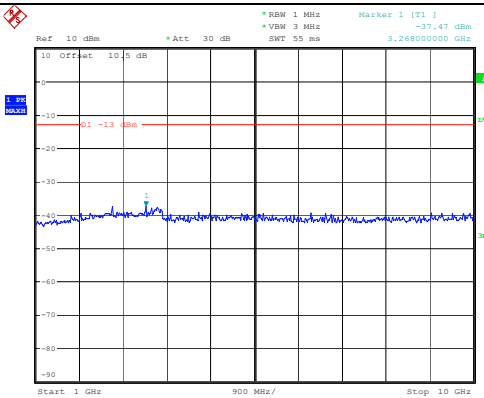
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:33:55ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:34:05

Highest





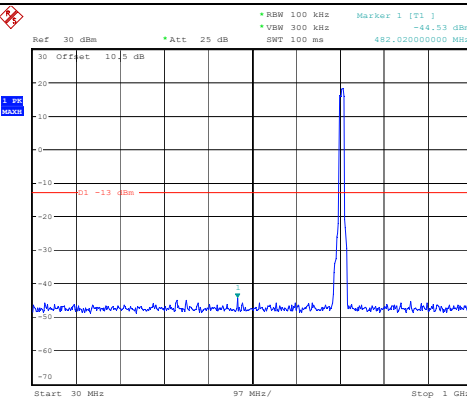
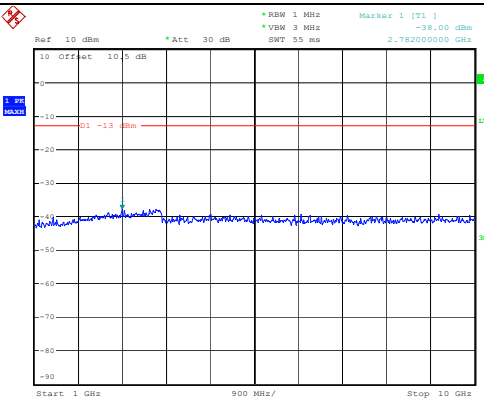
ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:34:18ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 12:34:29

Out of band emission, Band Edge

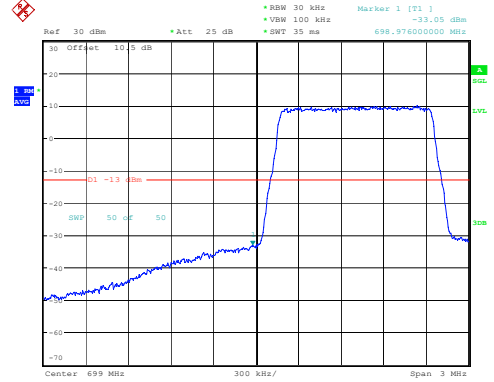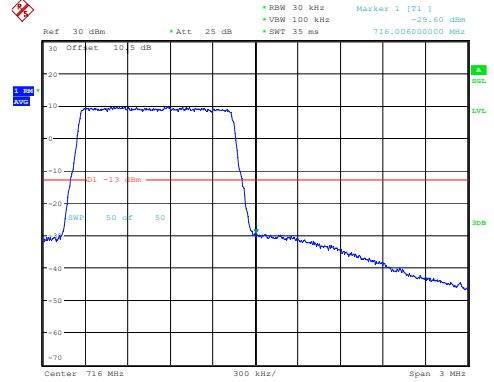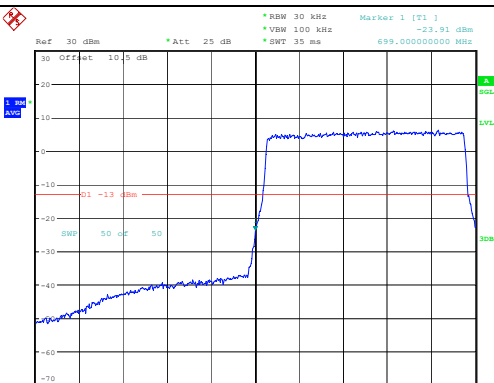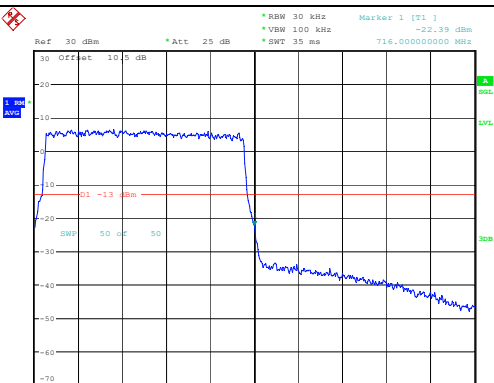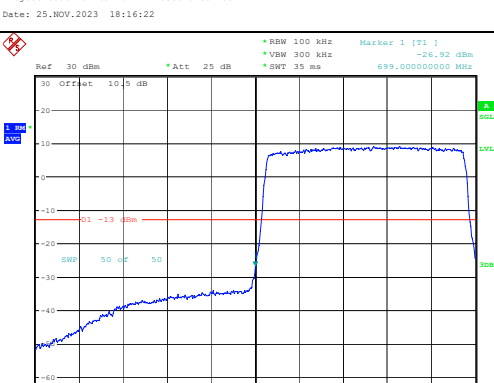
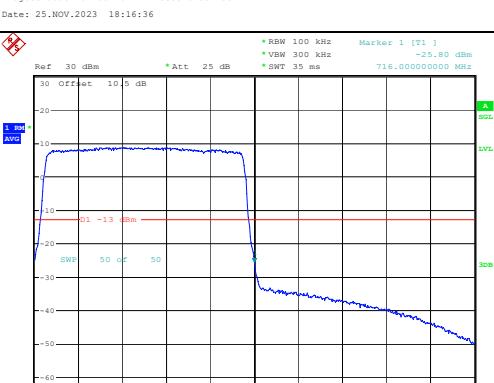
Mode	Lowest	Highest
QPSK 1.4MHz	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [71.1] -33.95 dBm 699.976000000 MHz 30 Offset 10.5 dB SWP 50 0.0 50 Center 699 MHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:15:53	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [71.1] -29.60 dBm 716.006000000 MHz 30 Offset 10.5 dB SWP 50 0.0 50 Center 716 MHz 300 kHz/ Span 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:06
QPSK 3MHz	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [71.1] -23.91 dBm 699.000000000 MHz 30 Offset 10.5 dB SWP 50 0.0 50 Center 699 MHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:22	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [71.1] -22.39 dBm 716.000000000 MHz 30 Offset 10.5 dB SWP 50 0.0 50 Center 716 MHz 600 kHz/ Span 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:36
QPSK 5MHz	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 35 ms Marker 1 [71.1] -26.92 dBm 699.000000000 MHz 30 Offset 10.5 dB SWP 50 0.0 50 Center 699 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:52	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 35 ms Marker 1 [71.1] -25.80 dBm 716.000000000 MHz 30 Offset 10.5 dB SWP 50 0.0 50 Center 716 MHz 1 MHz/ Span 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:17:06

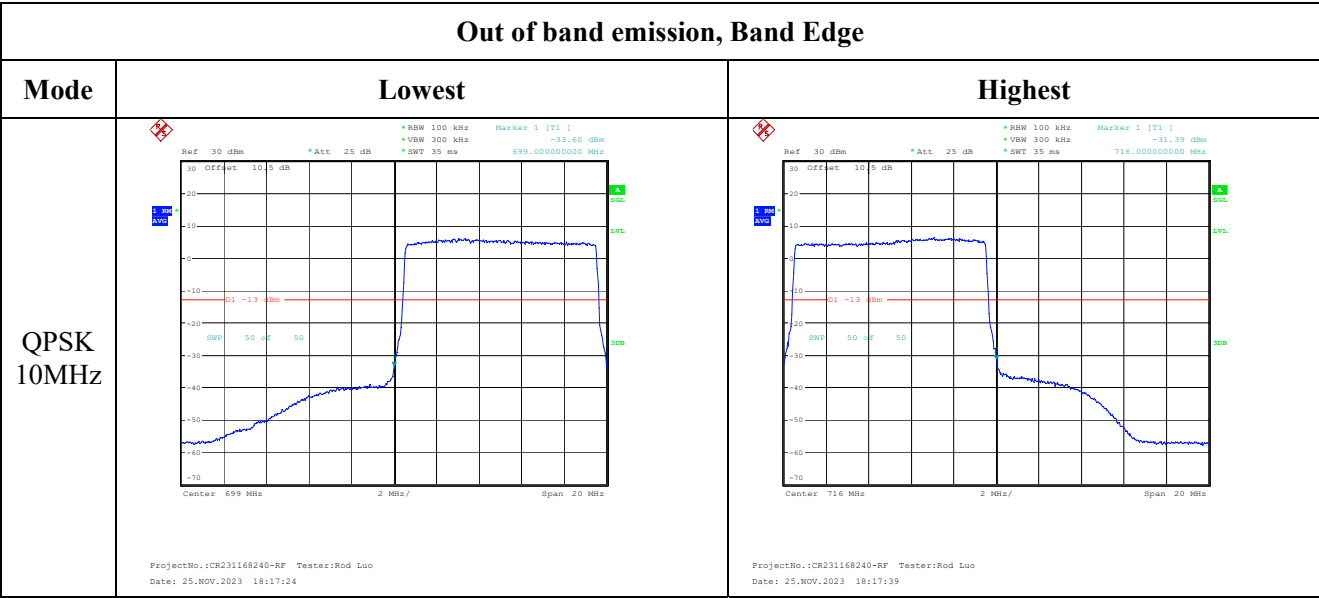

Out of band emission, Band Edge

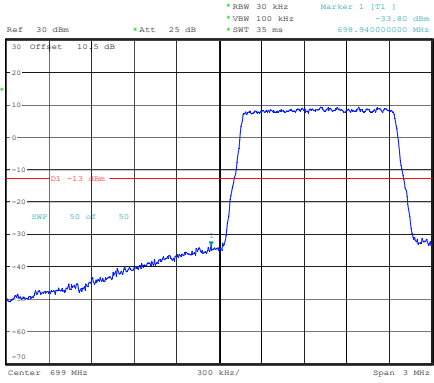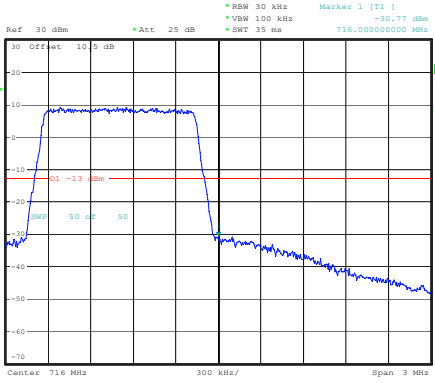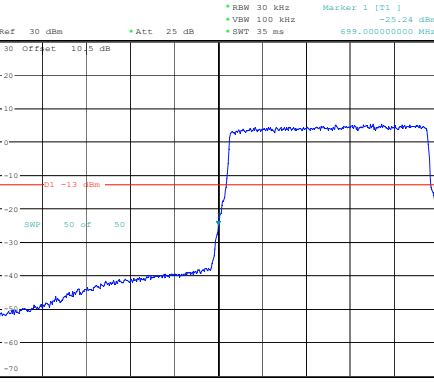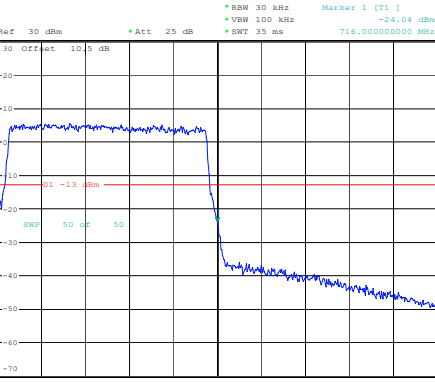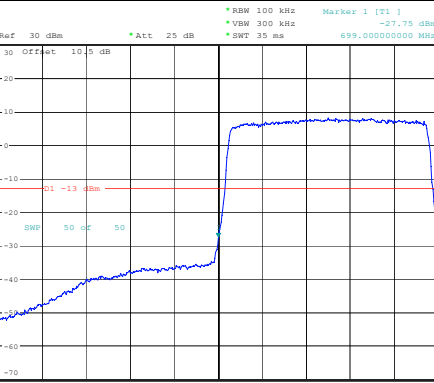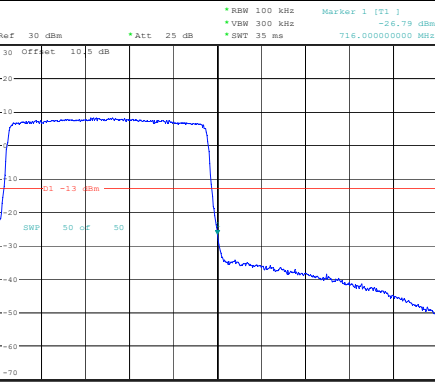Mode	Lowest	Highest
16QAM 1.4MHz	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -33.80 dBm 699.940000000 MHz Center: 699 MHz 300 kHz/ Span: 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:15:59	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -30.77 dBm 716.000000000 MHz Center: 716 MHz 300 kHz/ Span: 3 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:12
16QAM 3MHz	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -25.24 dBm 699.900000000 MHz Center: 699 MHz 600 kHz/ Span: 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:29	 Ref: 30 dBm *Att: 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ns Marker 1 [T1] -24.04 dBm 716.000000000 MHz Center: 716 MHz 600 kHz/ Span: 6 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:16:41
16QAM 5MHz	 Ref: 30 dBm *Att: 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 35 ns Marker 1 [T1] -27.79 dBm 699.900000000 MHz Center: 699 MHz 1 MHz/ Span: 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:17:00	 Ref: 30 dBm *Att: 25 dB *RBW 100 kHz *VSW 300 kHz *SWT 35 ns Marker 1 [T1] -26.79 dBm 716.000000000 MHz Center: 716 MHz 1 MHz/ Span: 10 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:17:12

Out of band emission, Band Edge

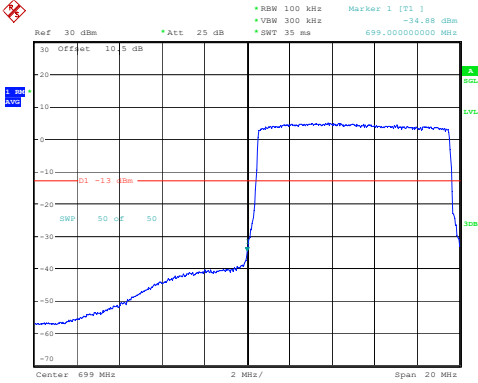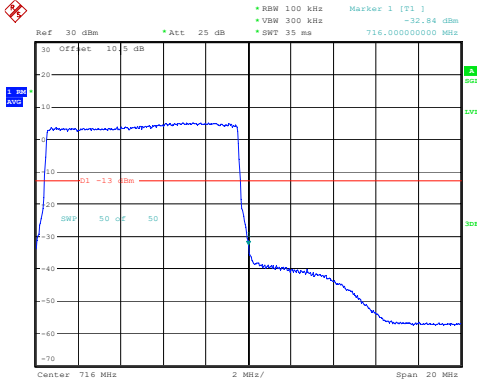Mode	Lowest	Highest
16QAM 10MHz	 Ref: 30 dBm *Att: 25 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1] -24.58 dBm 699.00000000 MHz Center: 699 MHz 2 MHz/ Span: 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:17:32	 Ref: 30 dBm *Att: 25 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1] -22.54 dBm 716.00000000 MHz Center: 716 MHz 2 MHz/ Span: 20 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 18:17:45

4.9 Antenna Port Test Data and Results for LTE Band 41

Serial Number:	2DW6-1	Test Date:	2023/11/25-2024/01/06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo&Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1-26.5	Relative Humidity: (%)	51-56	ATM Pressure: (kPa)	100.2-100.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2537.5	2595	2652.5
10MHz	2540	2595	2650
15MHz	2542.5	2595	2647.5
20MHz	2545	2595	2645

Test Data:

RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	24.4	24.53	24.81	26.28	33
	RB1#13	24.48	24.63	24.89		
	RB1#24	24.5	24.62	24.83		
	RB15#0	23.46	23.54	23.78		
	RB15#10	23.39	23.64	23.67		
	RB25#0	23.5	23.63	23.72		
5MHz 16QAM	RB1#0	23.38	23.36	24.1	25.49	33
	RB1#13	23.21	23.41	24.08		
	RB1#24	23.38	23.47	24.09		
	RB15#0	22.8	22.75	22.97		
	RB15#10	22.76	22.71	22.94		
	RB25#0	22.39	22.78	23.02		
10MHz QPSK	RB1#0	24.52	24.45	24.52	26.01	33
	RB1#25	24.58	24.39	24.54		
	RB1#49	24.62	24.51	24.55		
	RB25#0	23.58	23.34	23.58		
	RB25#25	23.46	23.43	23.72		
	RB50#0	23.42	23.38	23.61		
10MHz 16QAM	RB1#0	23.78	23.75	23.72	25.17	33
	RB1#25	23.69	23.77	23.7		
	RB1#49	23.75	23.59	23.65		
	RB25#0	22.77	22.6	22.75		
	RB25#25	22.7	22.71	22.7		
	RB50#0	22.75	22.65	22.74		
15MHz QPSK	RB1#0	24.54	24.23	24.72	26.12	33
	RB1#38	24.66	24.12	24.73		
	RB1#74	24.56	24.19	24.6		
	RB36#0	23.53	23.46	23.74		
	RB36#39	23.45	23.42	23.6		
	RB75#0	23.43	23.34	23.57		
15MHz 16QAM	RB1#0	23.72	23.75	23.64	25.34	33
	RB1#38	23.66	23.58	23.82		
	RB1#74	23.66	23.69	23.95		
	RB36#0	22.53	22.46	22.78		
	RB36#39	22.42	22.57	22.71		
	RB75#0	22.64	22.61	22.76		

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
20MHz QPSK	RB1#0	24.34	24.78	24.72	26.22	33
	RB1#50	24.36	24.83	24.67		
	RB1#99	24.42	24.75	24.75		
	RB50#0	23.5	23.63	23.76		
	RB50#50	23.55	23.52	23.68		
	RB100#0	23.52	23.64	23.66		
20MHz 16QAM	RB1#0	23.29	24.22	24.1	25.61	33
	RB1#50	23.33	24.21	24.22		
	RB1#99	23.29	24.2	24.2		
	RB50#0	22.71	22.64	22.97		
	RB50#50	22.7	22.75	22.95		
	RB100#0	22.6	22.72	22.85		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)						
					Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	7.59	8.06	6.78	13
	RB100#0	8.35	8.70	8.14	13
20MHz 16QAM	RB1#0	8.29	8.58	7.68	13
	RB100#0	9.16	9.54	8.99	13
				Result:	Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.520	4.500	4.520	4.980	4.960	5.060
5MHz 16QAM	4.520	4.500	4.500	5.060	5.020	5.000
10MHz QPSK	9.000	9.000	9.000	9.840	9.680	9.840
10MHz 16QAM	8.960	8.960	9.000	9.720	9.840	9.760
15MHz QPSK	13.560	13.560	13.620	15.180	15.720	15.120
15MHz 16QAM	13.560	13.560	13.560	15.300	15.000	15.420
20MHz QPSK	18.000	18.000	18.080	19.520	19.840	19.760
20MHz 16QAM	18.080	18.000	18.000	19.600	19.680	20.720
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2535.070	2535.00	2654.992	2655
	-20	3.85	2535.116	2535.00	2654.931	2655
	-10	3.85	2535.137	2535.00	2654.916	2655
	0	3.85	2535.125	2535.00	2654.964	2655
	10	3.85	2535.187	2535.00	2654.978	2655
	20	3.85	2535.073	2535.00	2654.953	2655
	30	3.85	2535.012	2535.00	2654.998	2655
	40	3.85	2535.149	2535.00	2654.877	2655
	50	3.85	2535.052	2535.00	2654.880	2655
Frequency Stability vs. Voltage	20	3.45	2535.083	2535.00	2654.854	2655
	20	4.4	2535.091	2535.00	2654.826	2655
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2535.034	2535.00	2654.943	2655
	-20	3.85	2535.129	2535.00	2654.937	2655
	-10	3.85	2535.007	2535.00	2654.921	2655
	0	3.85	2535.068	2535.00	2654.976	2655
	10	3.85	2535.135	2535.00	2654.987	2655
	20	3.85	2535.901	2535.00	2654.970	2655
	30	3.85	2535.053	2535.00	2654.952	2655
	40	3.85	2535.072	2535.00	2654.978	2655
	50	3.85	2535.154	2535.00	2654.996	2655
Frequency Stability vs. Voltage	20	3.45	2535.093	2535.00	2654.879	2655
	20	4.4	2535.163	2535.00	2654.875	2655
					Result:	Pass

Test Plots(Note: The 10.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

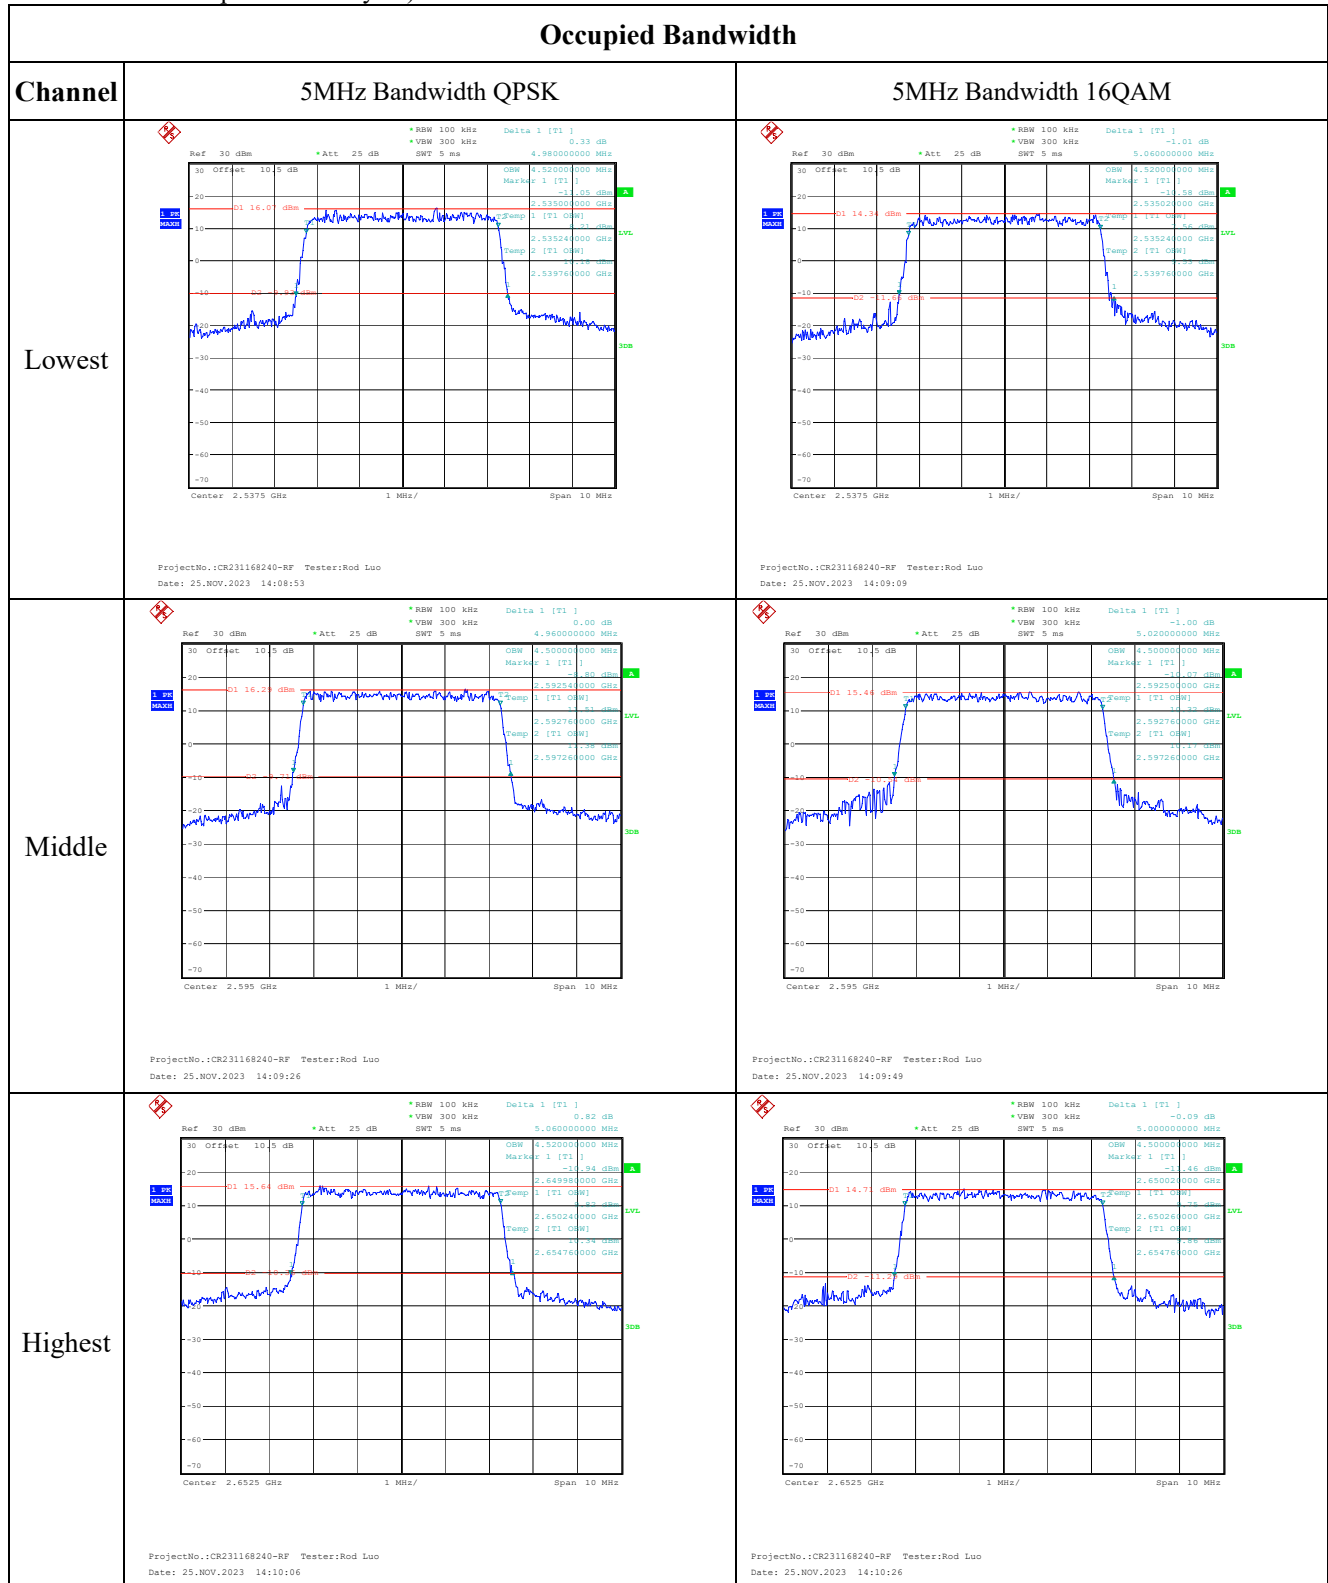


Occupied Bandwidth

Channel


10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM

Lowest

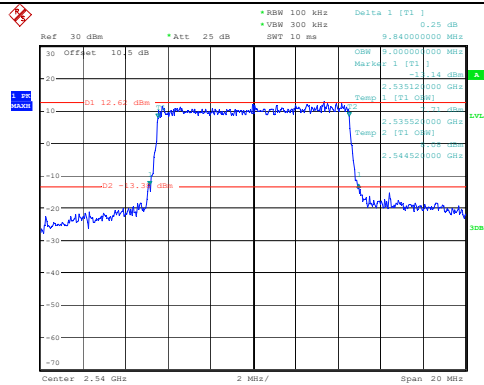


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:10:42

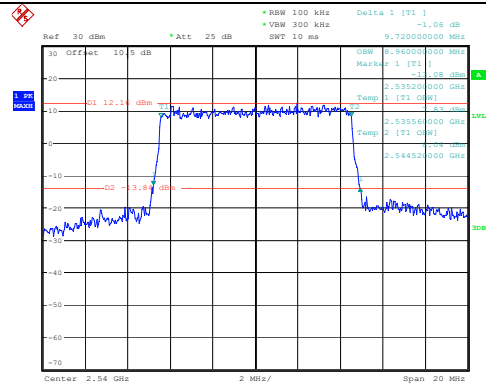


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:10:58

Middle

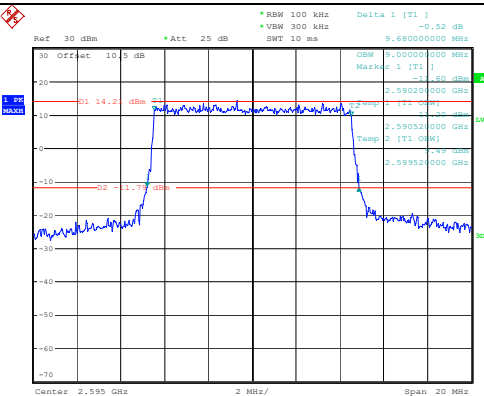


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:11:16

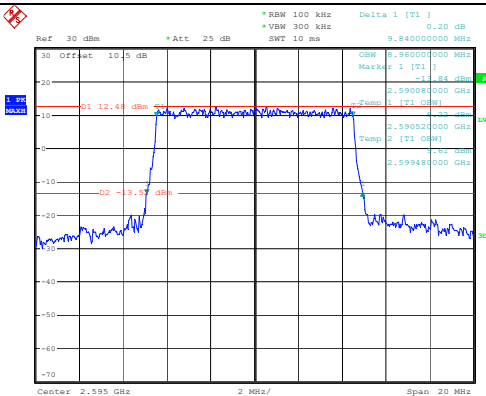


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:11:32

Highest

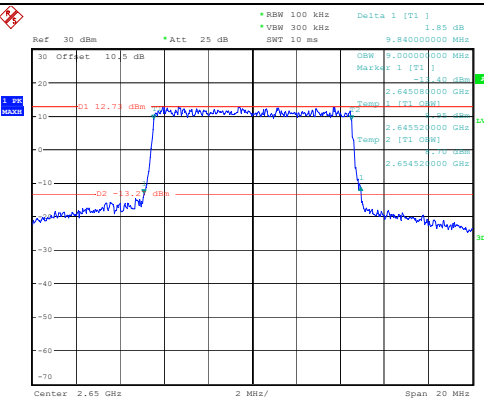

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:11:50

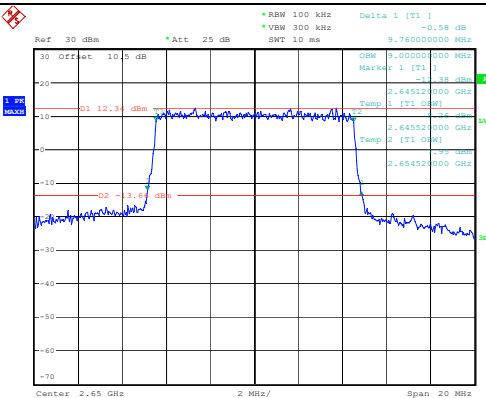

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:12:06


Occupied Bandwidth

Channel


15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM

Lowest

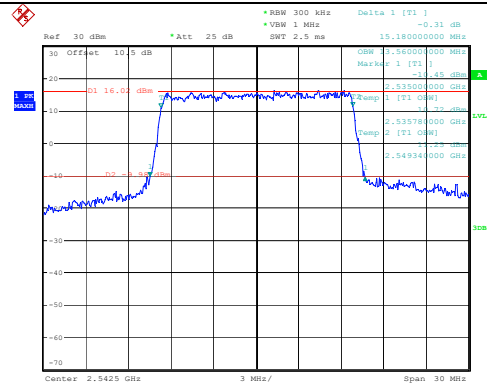


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:12:28

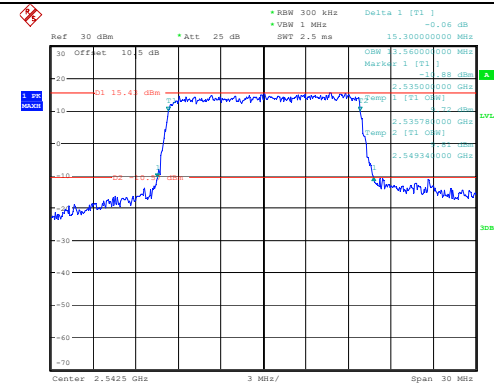


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:12:51

Middle

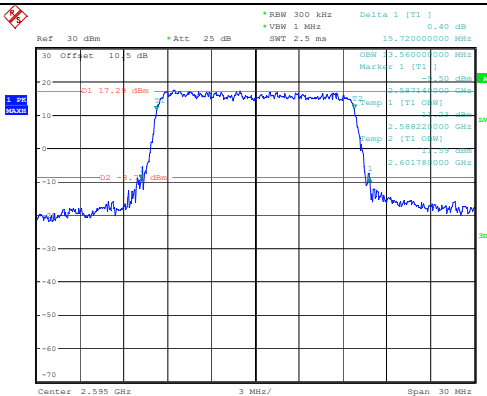


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:13:18

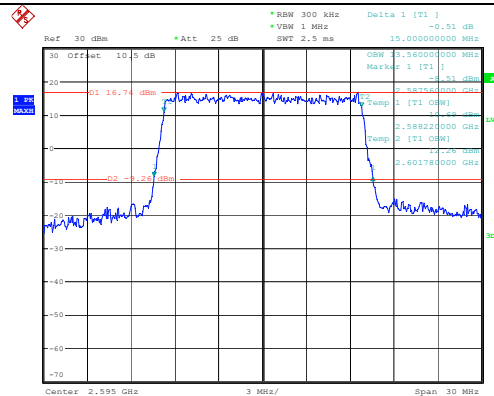


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:13:37

Highest

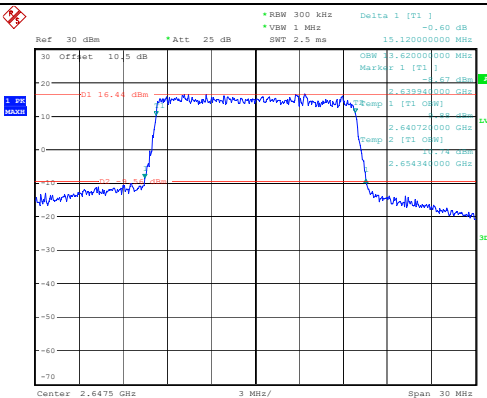

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:13:55

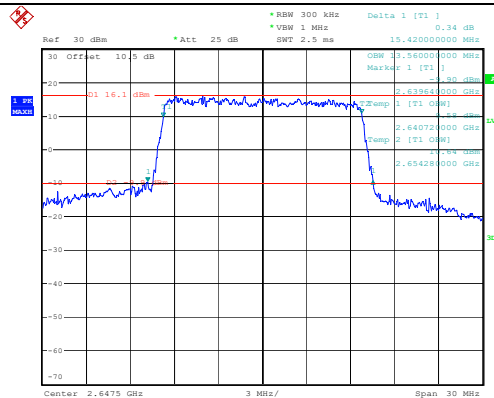

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:14:17

Occupied Bandwidth


Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.33 dB *VBW 1 MHz SWT 2.5 ms 19.520000000 MHz OSW 19.520000000 MHz Marker 1 [T1] -0.33 dB D1 15.9 dBm 2.535320000 GHz Temp 1 [T1 OSW] 2.538220000 GHz Temp 2 [T1 OSW] 2.554120000 GHz Center 2.545 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:14:33	Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.97 dB *VBW 1 MHz SWT 2.5 ms 19.600000000 MHz OSW 19.600000000 MHz Marker 1 [T1] -0.97 dB D1 15.6 dBm 2.535320000 GHz Temp 1 [T1 OSW] 2.538220000 GHz Temp 2 [T1 OSW] 2.554120000 GHz Center 2.545 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:14:53
Middle	Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -3.15 dB *VBW 1 MHz SWT 2.5 ms 19.840000000 MHz OSW 19.840000000 MHz Marker 1 [T1] -3.15 dB D1 16.0 dBm 2.585180000 GHz Temp 1 [T1 OSW] 2.586000000 GHz Temp 2 [T1 OSW] 2.604040000 GHz Center 2.595 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:15:16	Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -3.65 dB *VBW 1 MHz SWT 2.5 ms 19.680000000 MHz OSW 19.680000000 MHz Marker 1 [T1] -3.65 dB D1 16.1 dBm 2.585180000 GHz Temp 1 [T1 OSW] 2.586000000 GHz Temp 2 [T1 OSW] 2.604040000 GHz Center 2.595 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:15:33
Highest	Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -0.82 dB *VBW 1 MHz SWT 2.5 ms 19.760000000 MHz OSW 19.760000000 MHz Marker 1 [T1] -0.82 dB D1 16.0 dBm 2.635080000 GHz Temp 1 [T1 OSW] 2.635980000 GHz Temp 2 [T1 OSW] 2.654040000 GHz Center 2.645 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:15:53	Ref 30 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] -1.33 dB *VBW 1 MHz SWT 2.5 ms 20.720000000 MHz OSW 20.720000000 MHz Marker 1 [T1] -1.33 dB D1 14.5 dBm 2.634200000 GHz Temp 1 [T1 OSW] 2.635080000 GHz Temp 2 [T1 OSW] 2.654040000 GHz Center 2.645 GHz 4 MHz/ Span 40 MHz ProjectNo.:CR231168240-RF Tester:Rod Luo Date: 25.NOV.2023 14:16:16

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

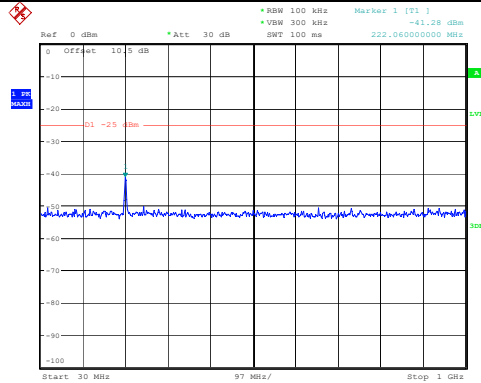


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:21:19

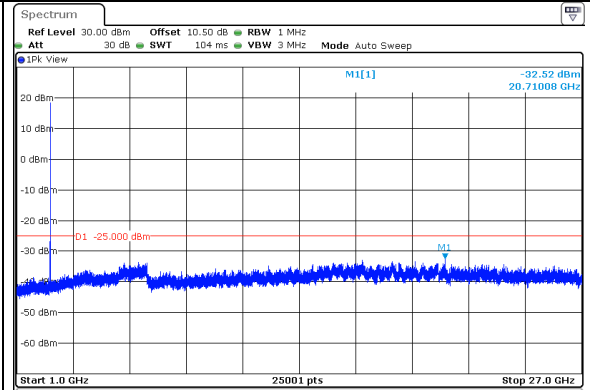


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:31:51

Middle

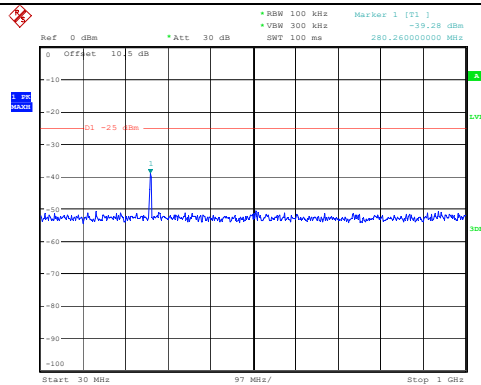


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:21:42

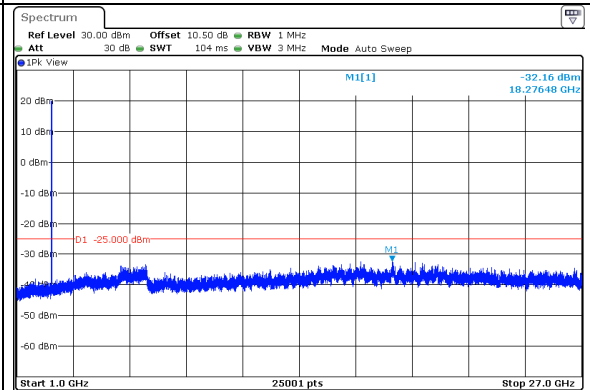


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:32:12

High

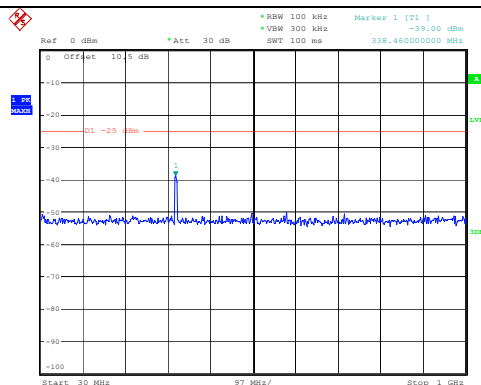

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:22:05

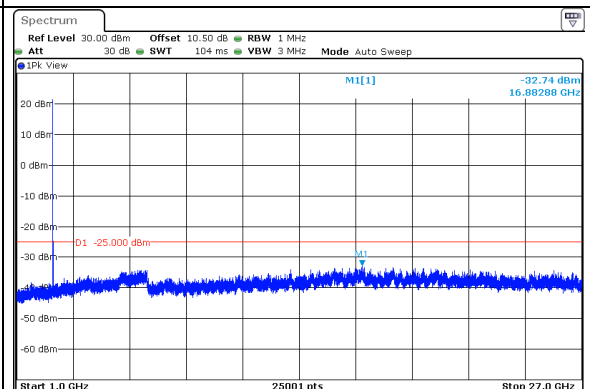


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:32:38

Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK

Lowest

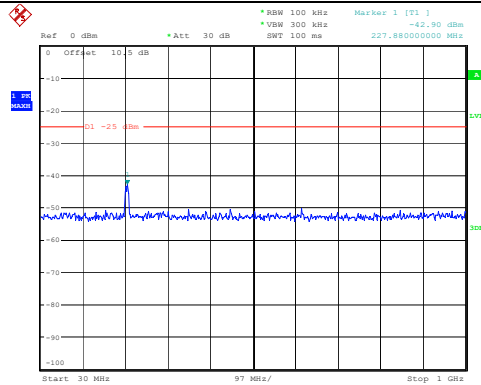


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:22:30

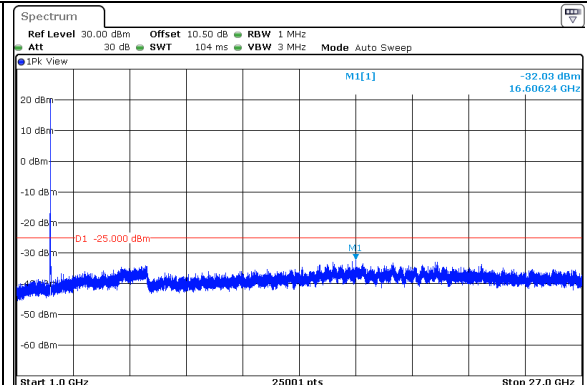


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:33:11

Middle

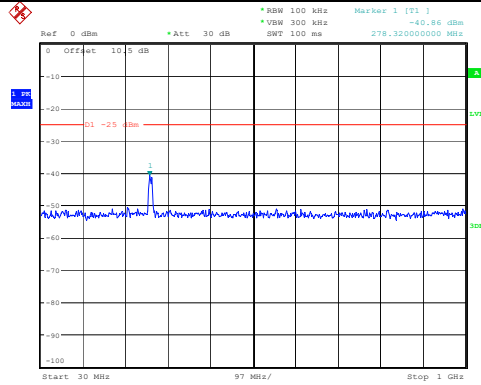


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:22:52

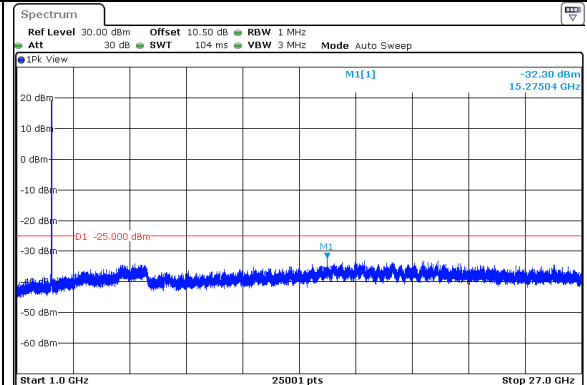


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:33:31

High

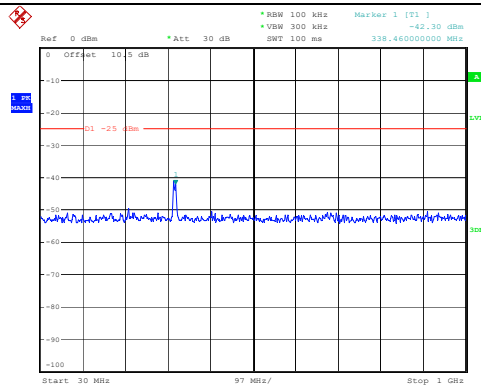

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:23:15

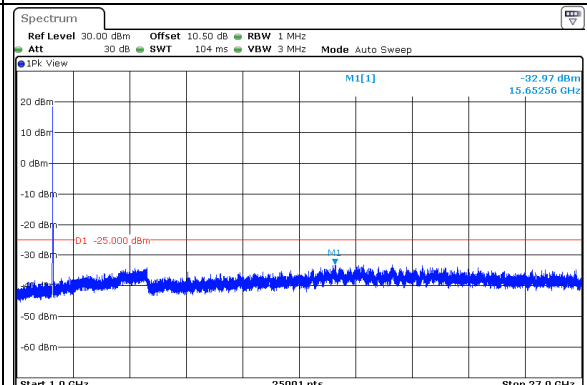


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:33:53

Spurious Emissions at Antenna Terminal


Channel

15MHz Bandwidth QPSK

Lowest

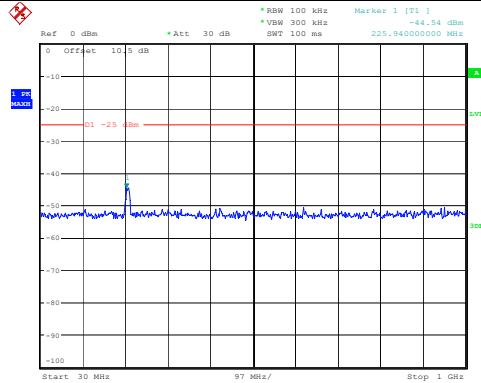


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:23:41

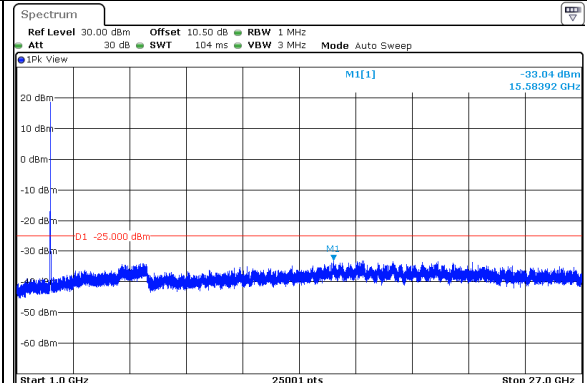


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		15.58392 GHz	-33.04 dBm		

ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:34:22

Middle

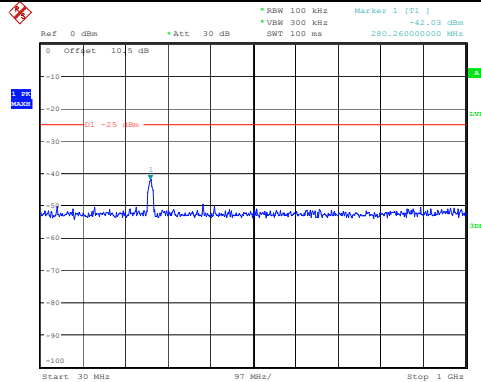


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:24:07

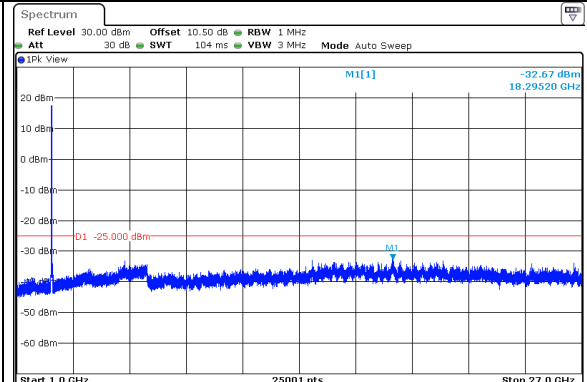


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		18.2952 GHz	-32.67 dBm		

ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:34:42

High

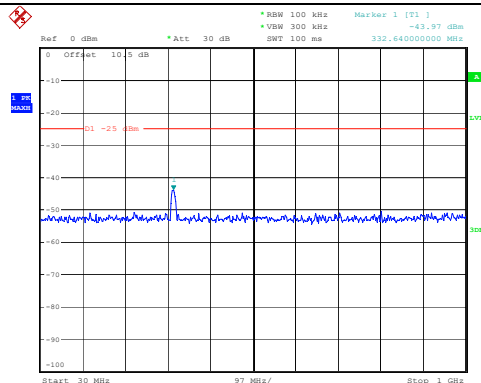

ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:24:29

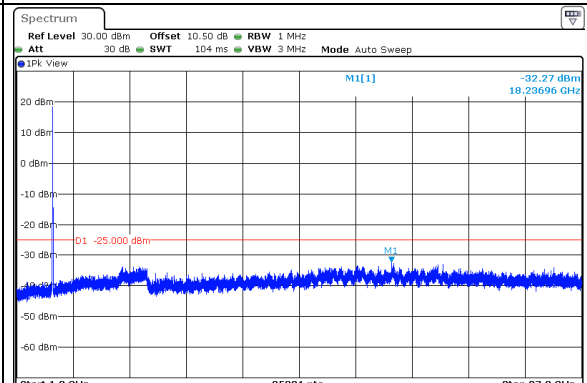

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		18.23696 GHz	-32.27 dBm		


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:35:04

Spurious Emissions at Antenna Terminal


Channel

20MHz Bandwidth QPSK

Lowest

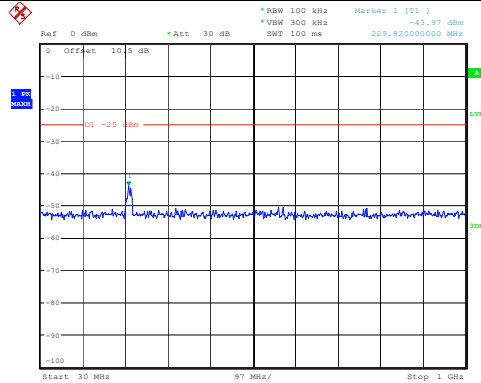


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:24:55

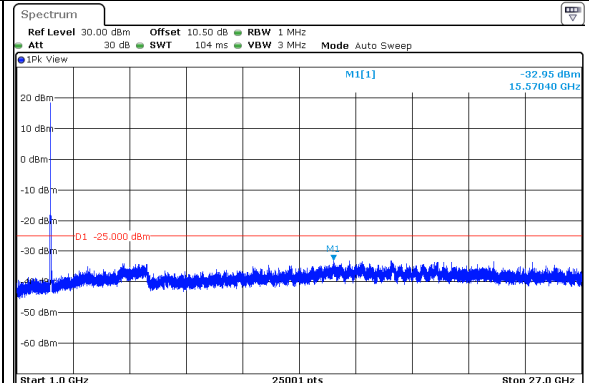


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:35:35

Middle

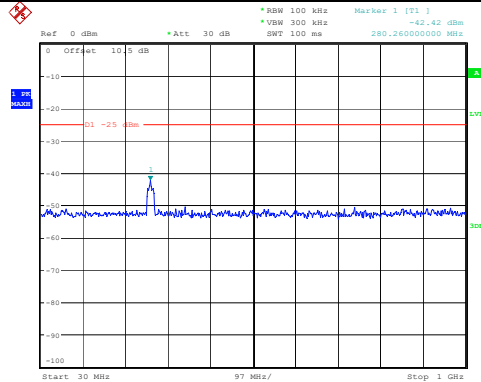


ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:25:21

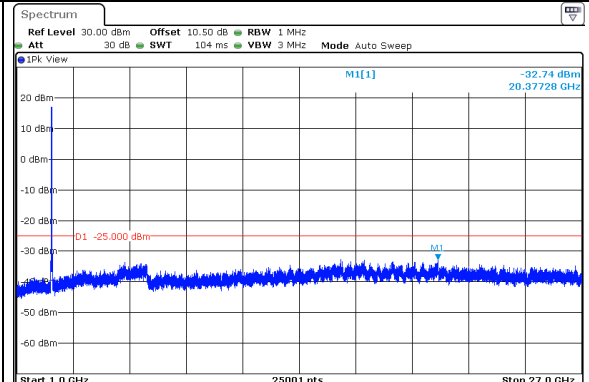


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:35:57

High

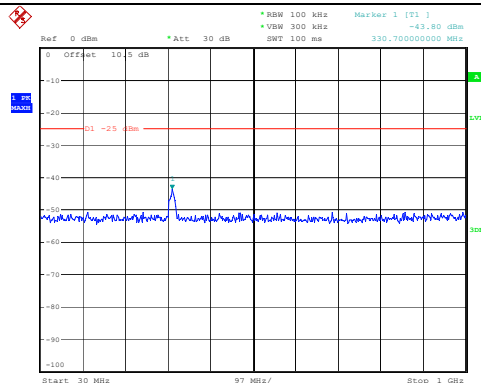



ProjectNo.:CR231168240-RF Tester:Rod Luo
Date: 25.NOV.2023 14:25:43

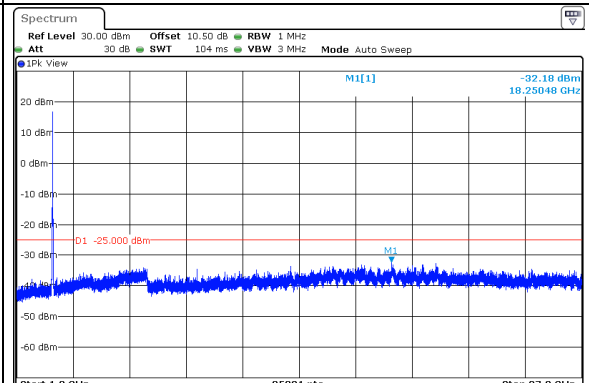


ProjectNo.:CR231168240-RF Tester:Len Huang
Date: 6.JAN.2024 10:36:18


Out of band emission, Band Edge

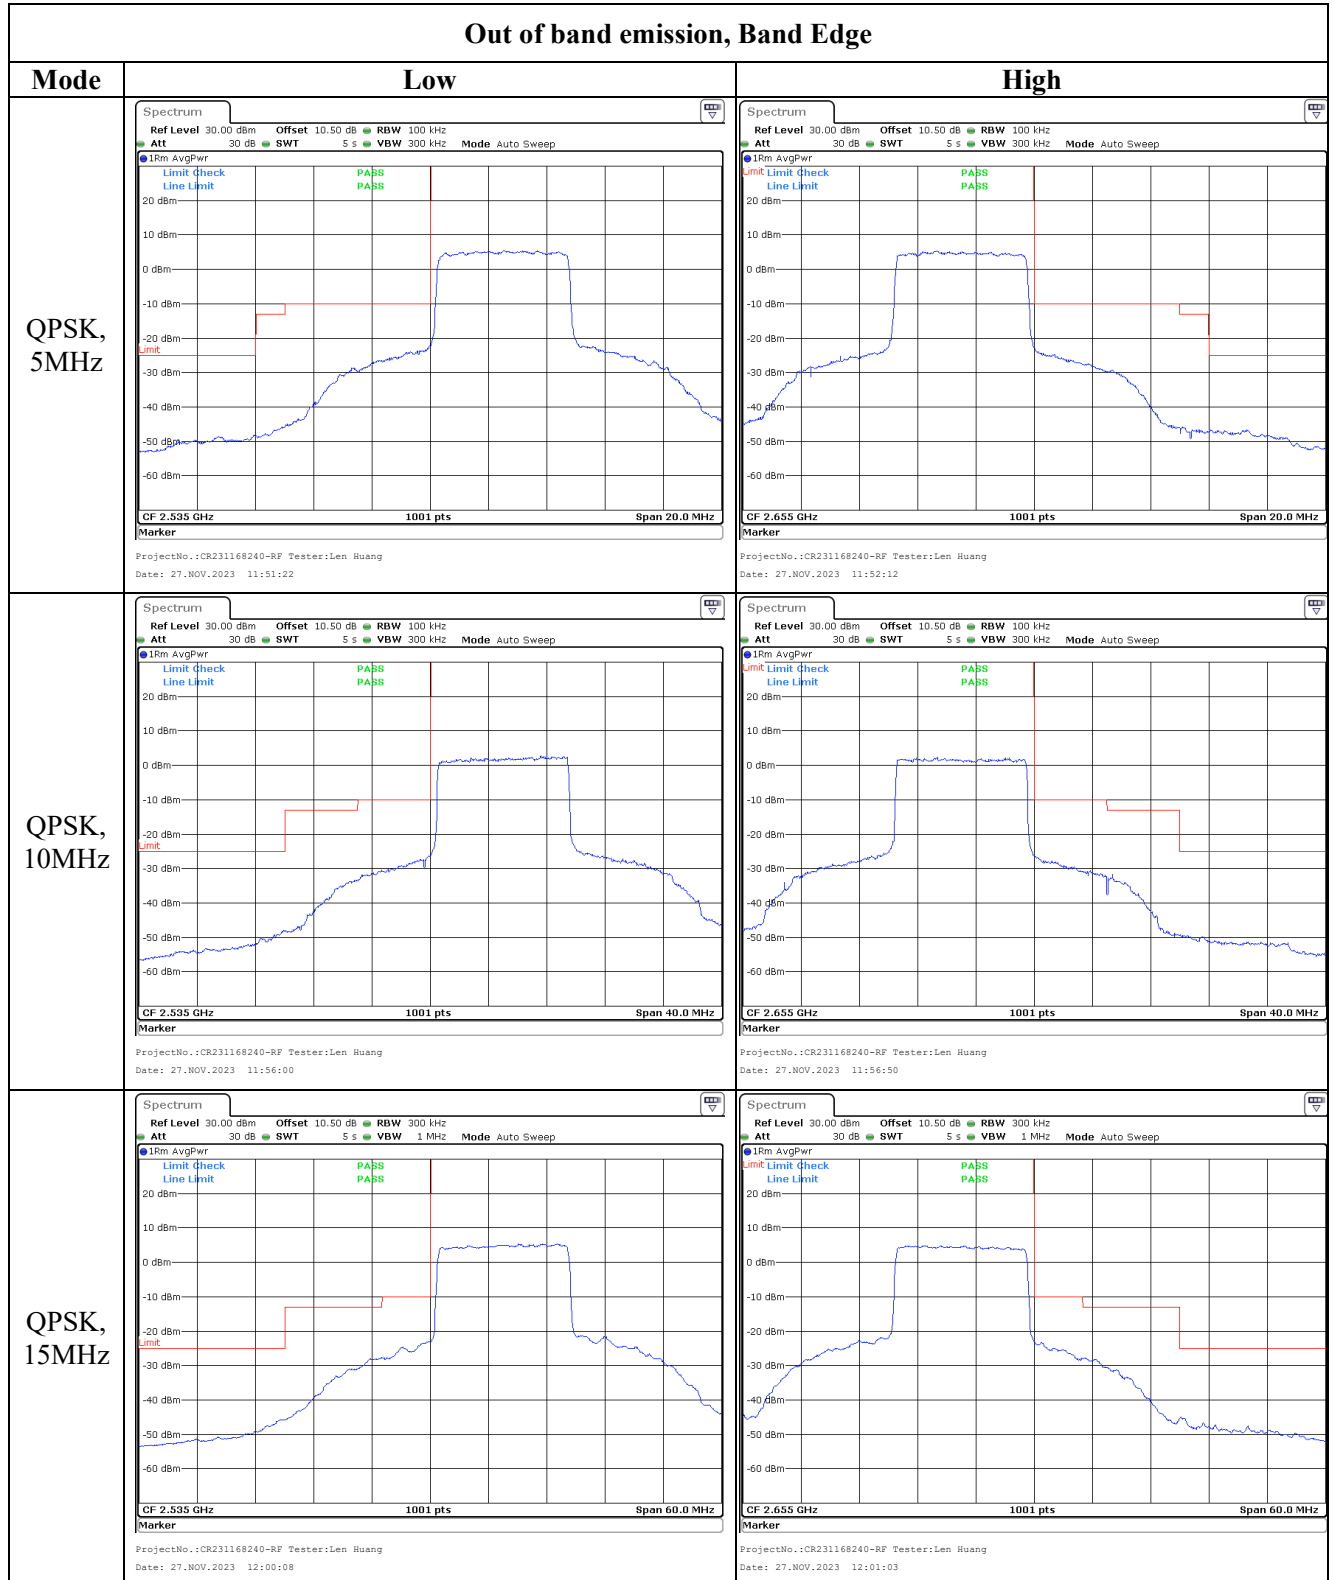

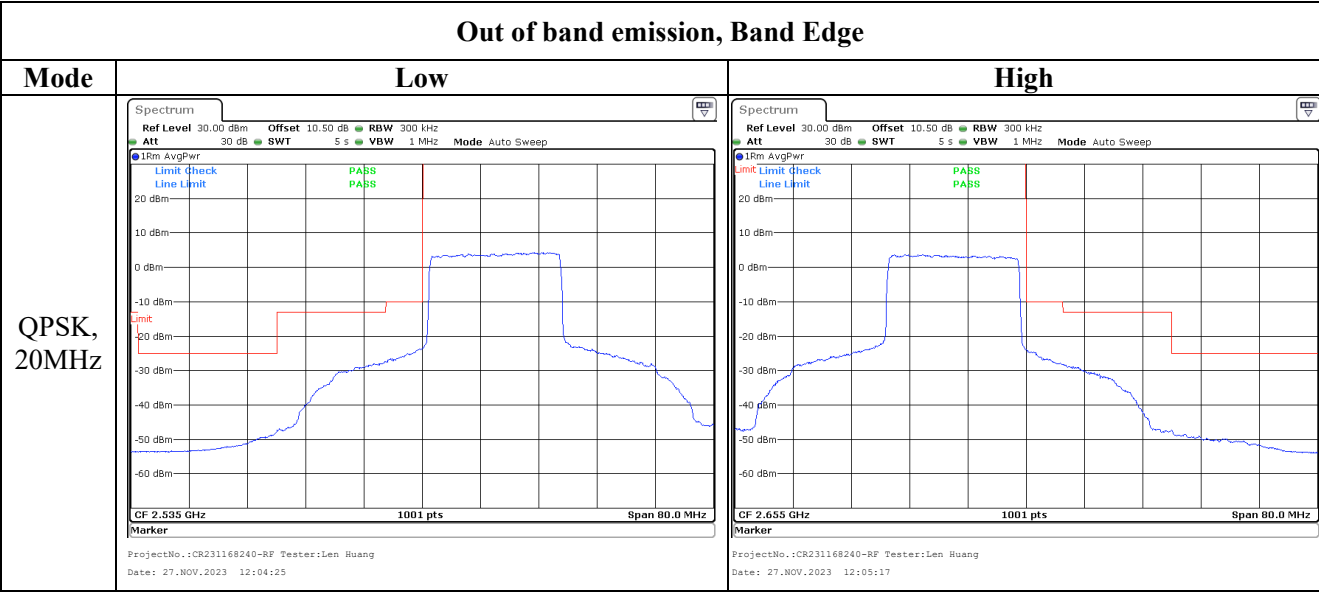

Out of band emission, Band Edge

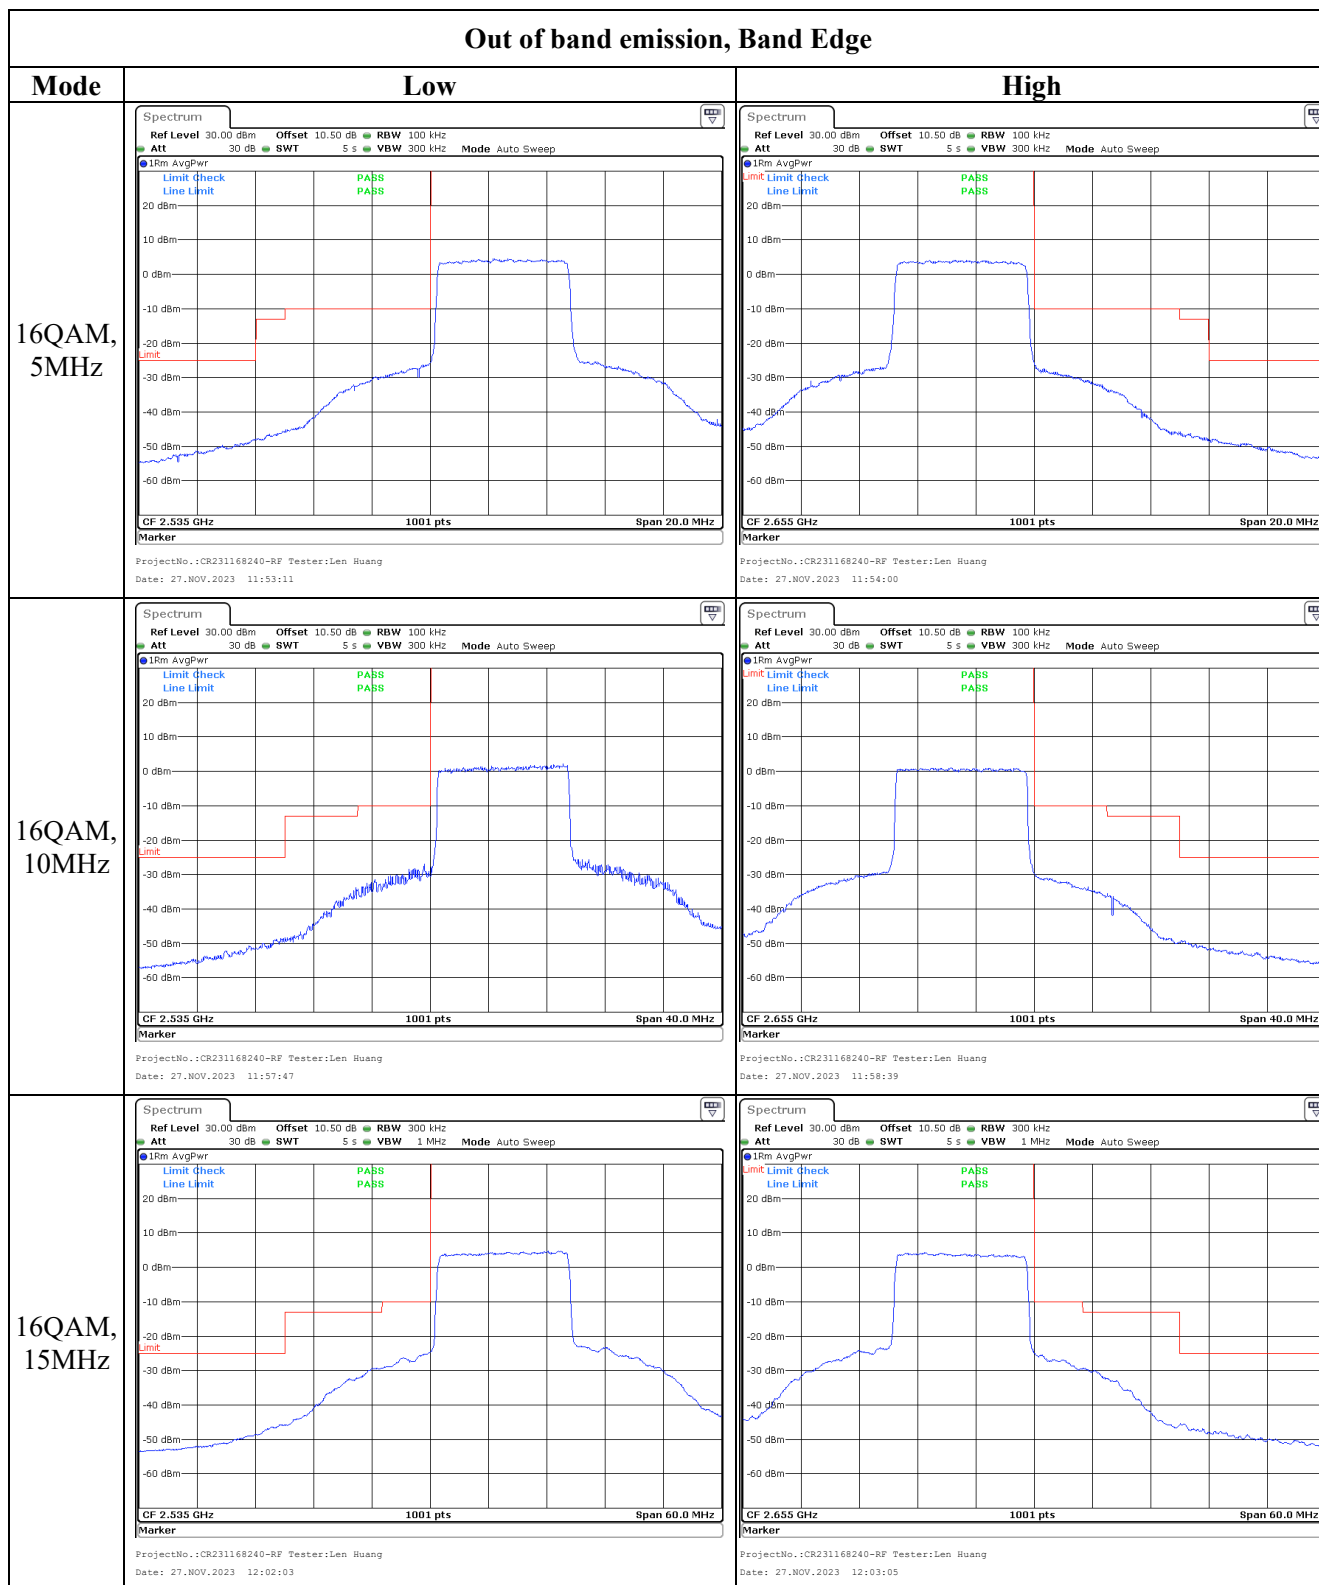

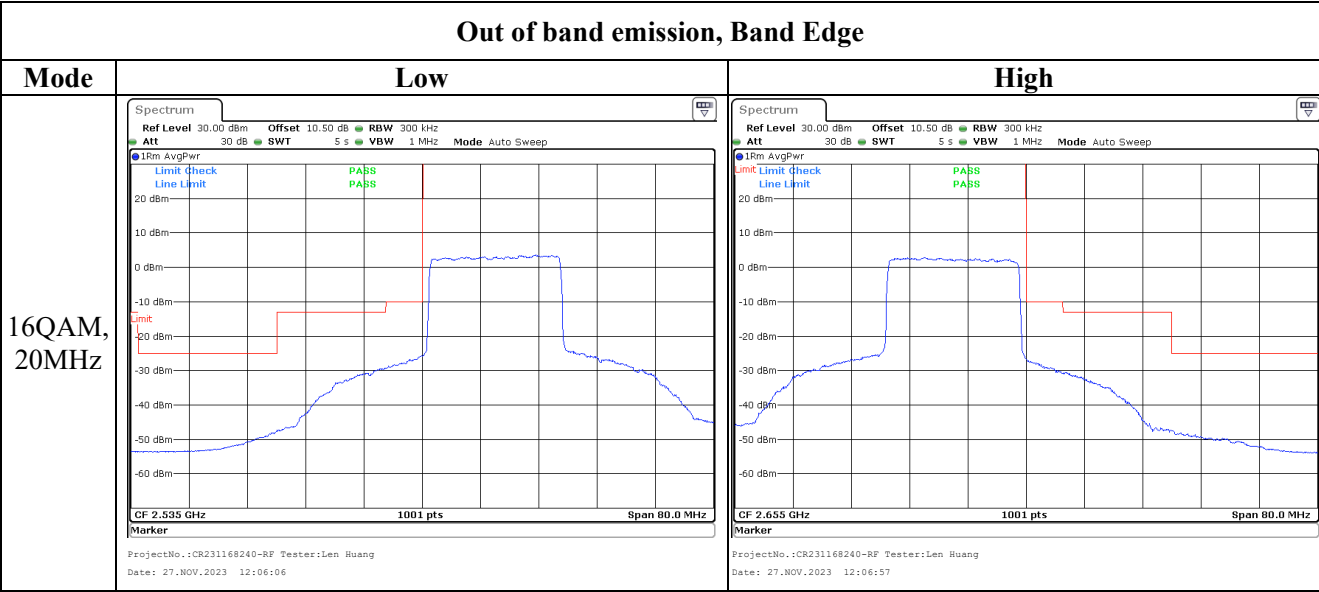

4.10 Radiated Spurious Emissions

Serial Number:	2DW6-2, 2DW4-2	Test Date:	2023/11/25-2023/12/04
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Carl Xue, Tao Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3-26.2	Relative Humidity: (%)	39-56	ATM Pressure: (kPa)	101.2-101.4
----------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2023/7/16	2024/7/15
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2023/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2023/11/17	2024/11/16
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9852/2F-20	112001	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9850/2F-20	072002	2021/2/5	2024/2/4
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below tables.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Cellular Band**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Frequency:824.2MHz								
584.78	H	21.30	-52.86	0.00	0.46	-53.32	-13.00	40.32
719.20	V	21.15	-48.35	0.00	0.49	-48.84	-13.00	35.84
1648.400	H	63.05	-41.28	8.68	0.80	-33.40	-13.00	20.40
1648.400	V	61.13	-43.28	8.68	0.80	-35.40	-13.00	22.40
2472.600	H	62.10	-38.68	9.38	1.00	-30.30	-13.00	17.30
2472.600	V	63.65	-37.08	9.38	1.00	-28.70	-13.00	15.70
3296.800	H	39.81	-56.87	10.32	1.15	-47.70	-13.00	34.70
3296.800	V	40.67	-55.77	10.32	1.15	-46.60	-13.00	33.60
GSM 850 Frequency:836.6MHz								
679.85	H	20.85	-52.58	0.00	0.52	-53.10	-13.00	40.10
701.70	V	21.12	-48.76	0.00	0.55	-49.31	-13.00	36.31
1673.200	H	64.15	-40.16	8.71	0.85	-32.30	-13.00	19.30
1673.200	V	62.15	-42.26	8.71	0.85	-34.40	-13.00	21.40
2509.800	H	62.50	-38.11	9.42	1.01	-29.70	-13.00	16.70
2509.800	V	64.21	-36.41	9.42	1.01	-28.00	-13.00	15.00
3346.400	H	40.89	-56.28	10.34	1.16	-47.10	-13.00	34.10
3346.400	V	41.75	-55.28	10.34	1.16	-46.10	-13.00	33.10
GSM 850 Frequency:848.8MHz								
724.10	H	21.07	-51.76	0.00	0.51	-52.27	-13.00	39.27
692.01	V	20.87	-49.19	0.00	0.54	-49.73	-13.00	36.73
1697.600	H	65.55	-38.74	8.74	0.90	-30.90	-13.00	17.90
1697.600	V	63.58	-40.84	8.74	0.90	-33.00	-13.00	20.00
2546.400	H	63.47	-36.86	9.47	1.01	-28.40	-13.00	15.40
2546.400	V	65.12	-35.16	9.47	1.01	-26.70	-13.00	13.70
3395.200	H	42.52	-55.17	10.36	1.19	-46.00	-13.00	33.00
3395.200	V	43.59	-54.07	10.36	1.19	-44.90	-13.00	31.90

30 MHz-10 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
716.84	H	20.86	-52.12	0.00	0.50	-52.62	-13.00	39.62
711.85	V	20.74	-48.92	0.00	0.51	-49.43	-13.00	36.43
1652.800	H	46.86	-57.47	8.68	0.81	-49.60	-13.00	36.60
1652.800	V	45.44	-58.97	8.68	0.81	-51.10	-13.00	38.10
2479.200	H	44.38	-56.38	9.39	1.01	-48.00	-13.00	35.00
2479.200	V	45.35	-55.38	9.39	1.01	-47.00	-13.00	34.00
3305.600	H	35.26	-61.47	10.32	1.15	-52.30	-13.00	39.30
3305.600	V	36.13	-60.37	10.32	1.15	-51.20	-13.00	38.20
WCDMA Band 5 Frequency:836.6MHz								
652.14	H	21.06	-52.52	0.00	0.52	-53.04	-13.00	40.04
724.42	V	20.98	-48.41	0.00	0.51	-48.92	-13.00	35.92
1673.200	H	47.35	-56.96	8.71	0.85	-49.10	-13.00	36.10
1673.200	V	45.75	-58.66	8.71	0.85	-50.80	-13.00	37.80
2509.800	H	45.00	-55.61	9.42	1.01	-47.20	-13.00	34.20
2509.800	V	45.71	-54.91	9.42	1.01	-46.50	-13.00	33.50
3346.400	H	36.29	-60.88	10.34	1.16	-51.70	-13.00	38.70
3346.400	V	37.15	-59.88	10.34	1.16	-50.70	-13.00	37.70
WCDMA Band 5 Frequency:846.6MHz								
709.35	H	20.97	-52.16	0.00	0.52	-52.68	-13.00	39.68
663.68	V	20.88	-49.70	0.00	0.50	-50.20	-13.00	37.20
1693.200	H	48.56	-55.74	8.73	0.89	-47.90	-13.00	34.90
1693.200	V	47.18	-57.24	8.73	0.89	-49.40	-13.00	36.40
2539.800	H	45.43	-54.95	9.46	1.01	-46.50	-13.00	33.50
2539.800	V	46.59	-53.75	9.46	1.01	-45.30	-13.00	32.30
3386.400	H	37.42	-60.17	10.35	1.18	-51.00	-13.00	38.00
3386.400	V	38.57	-58.97	10.35	1.18	-49.80	-13.00	36.80

PCS Band**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 1900 Frequency:1850.2MHz								
209.31	H	39.73	-72.98	0.00	0.26	-73.24	-13.00	60.24
54.64	V	42.62	-60.83	-12.77	0.13	-73.73	-13.00	60.73
3700.400	H	44.47	-52.85	10.60	1.25	-43.50	-13.00	30.50
3700.400	V	43.75	-53.55	10.60	1.25	-44.20	-13.00	31.20
5550.600	H	54.21	-39.05	11.44	1.49	-29.10	-13.00	16.10
5550.600	V	52.85	-40.25	11.44	1.49	-30.30	-13.00	17.30
GSM 1900 Frequency:1880MHz								
212.26	H	38.96	-73.69	0.00	0.26	-73.95	-13.00	60.95
55.22	V	42.83	-60.90	-12.50	0.13	-73.53	-13.00	60.53
3760.000	H	44.49	-51.92	10.66	1.24	-42.50	-13.00	29.50
3760.000	V	43.67	-52.62	10.66	1.24	-43.20	-13.00	30.20
5640.000	H	55.76	-37.69	11.33	1.54	-27.90	-13.00	14.90
5640.000	V	54.44	-38.89	11.33	1.54	-29.10	-13.00	16.10
GSM 1900 Frequency:1909.8MHz								
207.12	H	37.93	-74.82	0.00	0.26	-75.08	-13.00	62.08
53.83	V	42.34	-60.72	-13.14	0.13	-73.99	-13.00	60.99
3819.600	H	45.13	-50.73	10.72	1.29	-41.30	-13.00	28.30
3819.600	V	44.29	-51.43	10.72	1.29	-42.00	-13.00	29.00
5729.400	H	57.25	-36.23	11.22	1.59	-26.60	-13.00	13.60
5729.400	V	55.73	-37.63	11.22	1.59	-28.00	-13.00	15.00

30 MHz-20 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II, Frequency:1852.4 MHz								
210.78	H	38.43	-74.25	0.00	0.26	-74.51	-13.00	61.51
51.41	V	41.93	-59.97	-14.25	0.13	-74.4	-13.00	61.35
3704.800	H	37.61	-59.65	10.60	1.25	-50.30	-13.00	37.30
3704.800	V	38.38	-58.85	10.60	1.25	-49.50	-13.00	36.50
5557.200	H	39.74	-53.54	11.43	1.49	-43.60	-13.00	30.60
5557.200	V	39.99	-53.14	11.43	1.49	-43.20	-13.00	30.20
WCDMA Band II, Frequency:1880 MHz								
208.58	H	38.98	-73.74	0.00	0.26	-74.00	-13.00	61.00
54.07	V	42.78	-60.40	-13.03	0.13	-73.56	-13.00	60.56
3760.000	H	37.59	-58.82	10.66	1.24	-49.40	-13.00	36.40
3760.000	V	38.07	-58.22	10.66	1.24	-48.80	-13.00	35.80
5640.000	H	40.56	-52.89	11.33	1.54	-43.10	-13.00	30.10
5640.000	V	41.04	-52.29	11.33	1.54	-42.50	-13.00	29.50
WCDMA Band II, Frequency:1907.6MHz								
219.06	H	39.58	-72.93	0.00	0.27	-73.20	-13.00	60.20
55.41	V	42.64	-61.18	-12.41	0.13	-73.72	-13.00	60.72
3815.200	H	37.82	-58.03	10.72	1.29	-48.60	-13.00	35.60
3815.200	V	38.36	-57.33	10.72	1.29	-47.90	-13.00	34.90
5722.800	H	42.04	-51.45	11.23	1.58	-41.80	-13.00	28.80
5722.800	V	42.40	-50.95	11.23	1.58	-41.30	-13.00	28.30

LTE Bands: (The Worst modulation and bandwidth was below)

LTE Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 1.4MHz, Frequency:1850.7 MHz								
207.10	H	38.31	-74.44	0.00	0.26	-74.70	-13.00	61.70
55.22	V	43.13	-60.60	-12.50	0.13	-73.23	-13.00	60.23
3701.400	H	38.66	-58.65	10.60	1.25	-49.30	-13.00	36.30
3701.400	V	39.54	-57.75	10.60	1.25	-48.40	-13.00	35.40
5552.100	H	46.42	-46.85	11.44	1.49	-36.90	-13.00	23.90
5552.100	V	47.15	-45.95	11.44	1.49	-36.00	-13.00	23.00
QPSK, 1.4MHz,Frequency:1880 MHz								
209.31	H	38.62	-74.09	0.00	0.26	-74.4	-13.00	61.35
54.07	V	42.29	-60.89	-13.03	0.13	-74.05	-13.00	61.05
3760.000	H	38.69	-57.72	10.66	1.24	-48.30	-13.00	35.30
3760.000	V	39.37	-56.92	10.66	1.24	-47.50	-13.00	34.50
5640.000	H	47.26	-46.19	11.33	1.54	-36.40	-13.00	23.40
5640.000	V	48.14	-45.19	11.33	1.54	-35.40	-13.00	22.40
QPSK, 1.4MHz,Frequency:1909.3 MHz								
210.78	H	39.07	-73.61	0.00	0.26	-73.87	-13.00	60.87
56.59	V	42.48	-61.90	-11.87	0.14	-73.91	-13.00	60.91
3818.600	H	38.73	-57.13	10.72	1.29	-47.70	-13.00	34.70
3818.600	V	39.38	-56.33	10.72	1.29	-46.90	-13.00	33.90
5727.900	H	49.04	-44.44	11.23	1.59	-34.80	-13.00	21.80
5727.900	V	49.82	-43.54	11.23	1.59	-33.90	-13.00	20.90

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1.4MHz QPSK, Frequency: 824.7 MHz								
699.47	H	21.03	-52.29	0.00	0.55	-52.84	-13.00	39.84
726.91	V	20.82	-48.51	0.00	0.52	-49.03	-13.00	36.03
1649.400	H	53.45	-50.88	8.68	0.80	-43.00	-13.00	30.00
1649.400	V	51.83	-52.58	8.68	0.80	-44.70	-13.00	31.70
2474.100	H	52.00	-48.78	9.38	1.00	-40.40	-13.00	27.40
2474.100	V	51.05	-49.68	9.38	1.00	-41.30	-13.00	28.30
3298.800	H	39.91	-56.77	10.32	1.15	-47.60	-13.00	34.60
3298.800	V	40.67	-55.77	10.32	1.15	-46.60	-13.00	33.60
1.4MHz QPSK, Frequency: 836.5 MHz								
724.41	H	20.89	-51.94	0.00	0.51	-52.45	-13.00	39.45
701.88	V	20.74	-49.14	0.00	0.55	-49.69	-13.00	36.69
1673.000	H	54.55	-49.76	8.71	0.85	-41.90	-13.00	28.90
1673.000	V	52.85	-51.56	8.71	0.85	-43.70	-13.00	30.70
2509.500	H	52.60	-48.01	9.42	1.01	-39.60	-13.00	26.60
2509.500	V	51.71	-48.91	9.42	1.01	-40.50	-13.00	27.50
3346.000	H	40.78	-56.38	10.34	1.16	-47.20	-13.00	34.20
3346.000	V	41.84	-55.18	10.34	1.16	-46.00	-13.00	33.00
1.4MHz QPSK, Frequency: 848.3 MHz								
682.53	H	20.80	-52.61	0.00	0.53	-53.14	-13.00	40.14
640.78	V	20.96	-50.03	0.00	0.52	-50.55	-13.00	37.55
1696.600	H	55.44	-48.85	8.74	0.89	-41.00	-13.00	28.00
1696.600	V	53.77	-50.65	8.74	0.89	-42.80	-13.00	29.80
2544.900	H	53.48	-46.86	9.47	1.01	-38.40	-13.00	25.40
2544.900	V	51.64	-48.66	9.47	1.01	-40.20	-13.00	27.20
3393.200	H	42.50	-55.17	10.36	1.19	-46.00	-13.00	33.00
3393.200	V	43.36	-54.27	10.36	1.19	-45.10	-13.00	32.10

LTE Band 7 (30MHz-26.5GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK, Frequency: 2502.5 MHz								
209.31	H	39.48	-73.23	0.00	0.26	-73.49	-25.00	48.49
55.60	V	41.68	-62.23	-12.32	0.14	-74.69	-25.00	49.69
5005.000	H	44.03	-48.93	11.20	1.47	-39.20	-25.00	14.20
5005.000	V	45.59	-47.23	11.20	1.47	-37.50	-25.00	12.50
7507.500	H	45.14	-44.65	10.90	1.95	-35.70	-25.00	10.70
7507.500	V	46.14	-44.15	10.90	1.95	-35.20	-25.00	10.20
5MHz QPSK, Frequency: 2535 MHz								
210.04	H	38.09	-74.60	0.00	0.26	-74.86	-25.00	49.86
54.07	V	42.48	-60.70	-13.03	0.13	-73.86	-25.00	48.86
5070.000	H	45.42	-47.77	11.24	1.47	-38.00	-25.00	13.00
5070.000	V	46.92	-46.17	11.24	1.47	-36.40	-25.00	11.40
7605.000	H	45.90	-43.57	10.88	2.01	-34.70	-25.00	9.70
7605.000	V	47.42	-42.77	10.88	2.01	-33.90	-25.00	8.90
5MHz QPSK, Frequency: 2567.5 MHz								
208.58	H	38.84	-73.88	0.00	0.26	-74.14	-25.00	49.14
56.79	V	42.05	-62.43	-11.78	0.14	-74.4	-25.00	49.35
5135.000	H	46.59	-47.01	11.28	1.47	-37.20	-25.00	12.20
5135.000	V	48.18	-45.31	11.28	1.47	-35.50	-25.00	10.50
7702.500	H	47.03	-42.49	10.86	1.97	-33.60	-25.00	8.60
7702.500	V	48.39	-41.79	10.86	1.97	-32.90	-25.00	7.90

LTE Band 12 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1.4MHz QPSK, Frequency: 699.7 MHz								
589.15	H	20.62	-53.45	0.00	0.48	-53.93	-13.00	40.93
448.26	V	20.54	-53.09	0.00	0.43	-53.52	-13.00	40.52
1399.400	H	42.99	-60.71	8.22	0.71	-53.20	-13.00	40.20
1399.400	V	42.94	-60.81	8.22	0.71	-53.30	-13.00	40.30
2099.100	H	50.43	-51.45	9.16	0.91	-43.20	-13.00	30.20
2099.100	V	48.98	-52.85	9.16	0.91	-44.60	-13.00	31.60
2798.800	H	46.69	-53.24	9.88	1.04	-44.40	-13.00	31.40
2798.800	V	48.06	-51.74	9.88	1.04	-42.90	-13.00	29.90
1.4MHz QPSK, Frequency: 707.5 MHz								
539.75	H	20.48	-54.57	0.00	0.46	-55.03	-13.00	42.03
521.13	V	20.39	-51.22	0.00	0.41	-51.63	-13.00	38.63
1415.000	H	43.43	-60.24	8.26	0.72	-52.70	-13.00	39.70
1415.000	V	43.48	-60.24	8.26	0.72	-52.70	-13.00	39.70
2122.500	H	51.34	-50.65	9.17	0.92	-42.40	-13.00	29.40
2122.500	V	50.02	-51.95	9.17	0.92	-43.70	-13.00	30.70
2830.000	H	46.93	-52.87	9.93	1.06	-44.00	-13.00	31.00
2830.000	V	48.36	-51.37	9.93	1.06	-42.50	-13.00	29.50
1.4MHz QPSK, Frequency: 715.3 MHz								
474.13	H	20.53	-55.83	0.00	0.42	-56.25	-13.00	43.25
582.95	V	20.59	-51.11	0.00	0.46	-51.57	-13.00	38.57
1430.600	H	44.15	-59.48	8.31	0.73	-51.90	-13.00	38.90
1430.600	V	44.31	-59.38	8.31	0.73	-51.80	-13.00	38.80
2145.900	H	52.54	-49.56	9.19	0.93	-41.30	-13.00	28.30
2145.900	V	51.15	-50.96	9.19	0.93	-42.70	-13.00	29.70
2861.200	H	48.34	-51.31	9.98	1.07	-42.40	-13.00	29.40
2861.200	V	49.46	-50.21	9.98	1.07	-41.30	-13.00	28.30

LTE Band 41 (30MHz-27GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK, Frequency: 2537.5 MHz								
210.78	H	38.25	-74.43	0.00	0.26	-74.69	-25.00	49.69
54.07	V	42.25	-60.93	-13.03	0.13	-74.09	-25.00	49.09
5075.000	H	45.04	-48.17	11.25	1.48	-38.40	-25.00	13.40
5075.000	V	46.54	-46.57	11.25	1.48	-36.80	-25.00	11.80
7612.500	H	46.42	-43.06	10.88	2.02	-34.20	-25.00	9.20
7612.500	V	47.53	-42.66	10.88	2.02	-33.80	-25.00	8.80
5MHz QPSK, Frequency: 2595 MHz								
213.76	H	37.60	-75.02	0.00	0.27	-75.29	-25.00	50.29
55.41	V	41.92	-61.90	-12.41	0.13	-74.44	-25.00	49.44
5190.000	H	46.60	-47.47	11.31	1.44	-37.60	-25.00	12.60
5190.000	V	48.05	-45.87	11.31	1.44	-36.00	-25.00	11.00
7785.000	H	47.44	-42.05	10.84	1.99	-33.20	-25.00	8.20
7785.000	V	48.37	-41.55	10.84	1.99	-32.70	-25.00	7.70
5MHz QPSK, Frequency: 2652.5 MHz								
207.12	H	37.92	-74.83	0.00	0.26	-75.09	-25.00	50.09
52.76	V	41.39	-61.16	-13.63	0.13	-74.92	-25.00	49.92
5305.000	H	47.42	-46.02	11.38	1.46	-36.10	-25.00	11.10
5305.000	V	48.26	-44.92	11.38	1.46	-35.00	-25.00	10.00
7957.500	H	47.60	-40.82	10.81	2.09	-32.10	-25.00	7.10
7957.500	V	48.45	-40.42	10.81	2.09	-31.70	-25.00	6.70

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

4.11 Receiver Radiated Emissions

Serial Number:	2DW6-2, 2DW4-2	Test Date:	2023/12/14~2023/12/15
Test Site:	966-2	Test Mode:	Receiving
Tester:	Jeff Luo, CocoTian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.8~26.4	Relative Humidity: (%)	44~58	ATM Pressure: (kPa)	101.2~101.4
----------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
Audix	Test Software	E3	201021 (V9)	N/A	N/A

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


**1) 30MHz-1GHz
GSM 1900, 1880MHz:**

Project No.: CR231168240-RF
Tester: Jeff Luo
Polarization: horizontal
Note: Receiving PCS1900

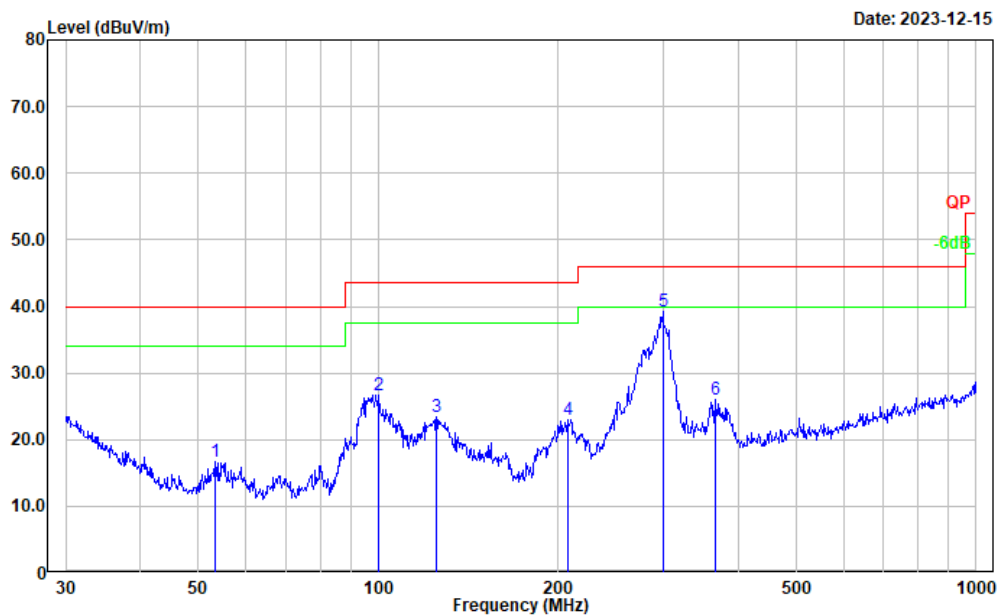

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	53.318	33.91	-17.14	16.77	40.00	23.23	Peak
2	100.229	41.00	-14.28	26.72	43.50	16.78	Peak
3	125.007	34.81	-11.31	23.50	43.50	20.00	Peak
4	207.123	35.35	-12.41	22.94	43.50	20.56	Peak
5	299.316	49.85	-10.65	39.20	46.00	6.80	Peak
6	365.539	35.71	-9.64	26.07	46.00	19.93	Peak


Project No.: CR231168240-RF
Tester: Jeff Luo
Polarization: vertical
Note: Receiving PCS1900

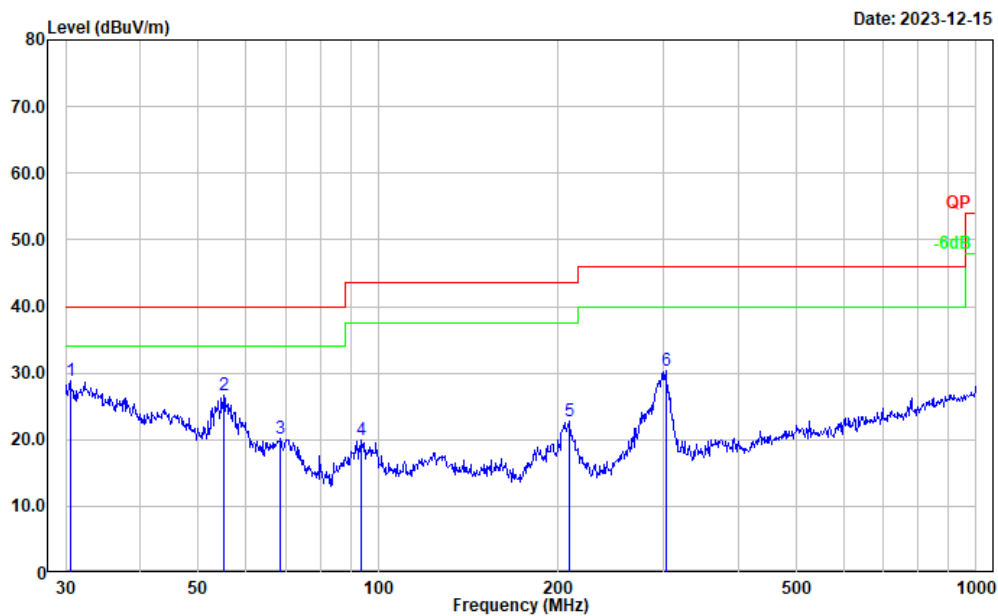

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	32.95	-4.20	28.75	40.00	11.25	Peak
2	55.221	43.80	-17.19	26.61	40.00	13.39	Peak
3	68.631	36.89	-16.70	20.19	40.00	19.81	Peak
4	93.440	35.98	-16.05	19.93	43.50	23.57	Peak
5	208.580	35.25	-12.46	22.79	43.50	20.71	Peak
6	302.481	40.92	-10.61	30.31	46.00	15.69	Peak


WCDMA Band2, 1880MHz:

Project No.: CR231168240-RF
Tester: Jeff Luo
Polarization: horizontal
Note: Receiving 3G B2

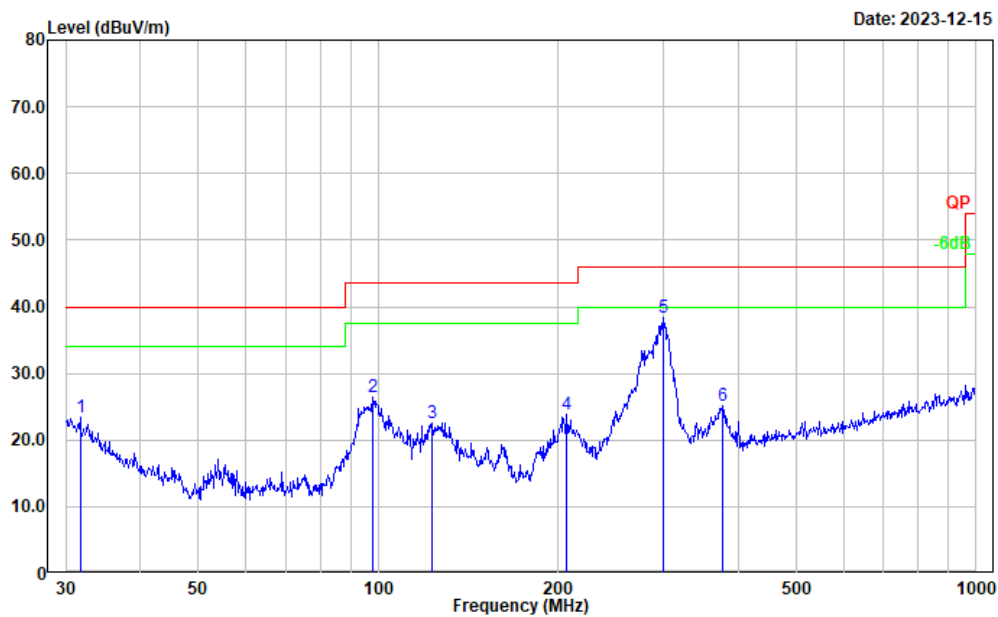

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.731	28.48	-5.10	23.38	40.00	16.62	Peak
2	98.142	41.12	-14.75	26.37	43.50	17.13	Peak
3	122.834	34.02	-11.38	22.64	43.50	20.86	Peak
4	206.398	36.20	-12.40	23.80	43.50	19.70	Peak
5	299.316	49.06	-10.65	38.41	46.00	7.59	Peak
6	377.259	34.39	-9.22	25.17	46.00	20.83	Peak


Project No.: CR231168240-RF
Tester: Jeff Luo
Polarization: vertical
Note: Receiving 3G B2

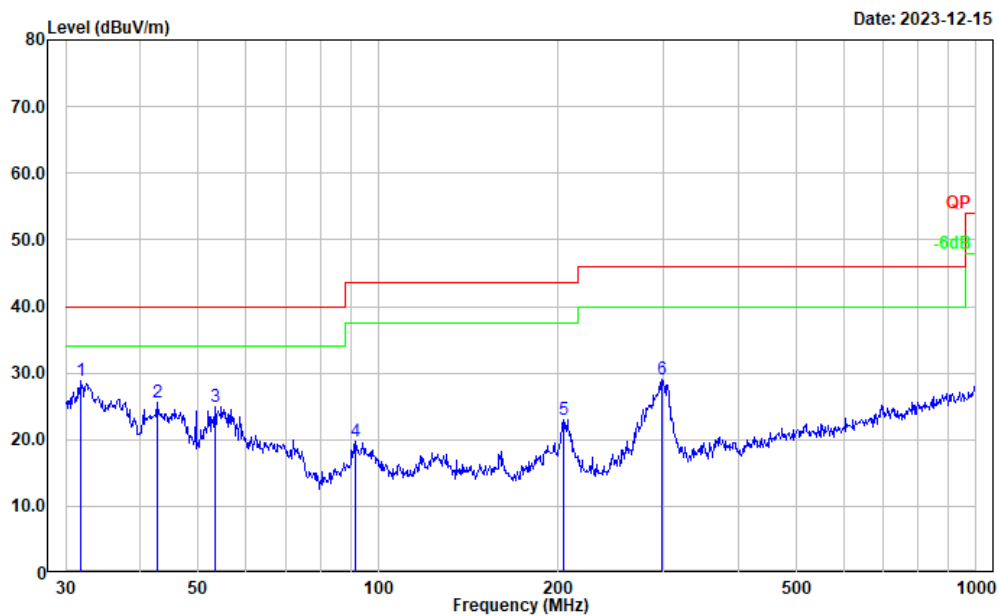

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.731	34.01	-5.10	28.91	40.00	11.09	Peak
2	42.600	38.41	-12.87	25.54	40.00	14.46	Peak
3	53.318	42.18	-17.14	25.04	40.00	14.96	Peak
4	91.495	36.40	-16.57	19.83	43.50	23.67	Peak
5	204.238	35.34	-12.33	23.01	43.50	20.49	Peak
6	298.268	39.70	-10.69	29.01	46.00	16.99	Peak


LTE Band2, 1880MHz:

Project No.: CR231168240-RF
Tester: Jeff Luo
Polarization: horizontal
Note: Receiving 4G B2

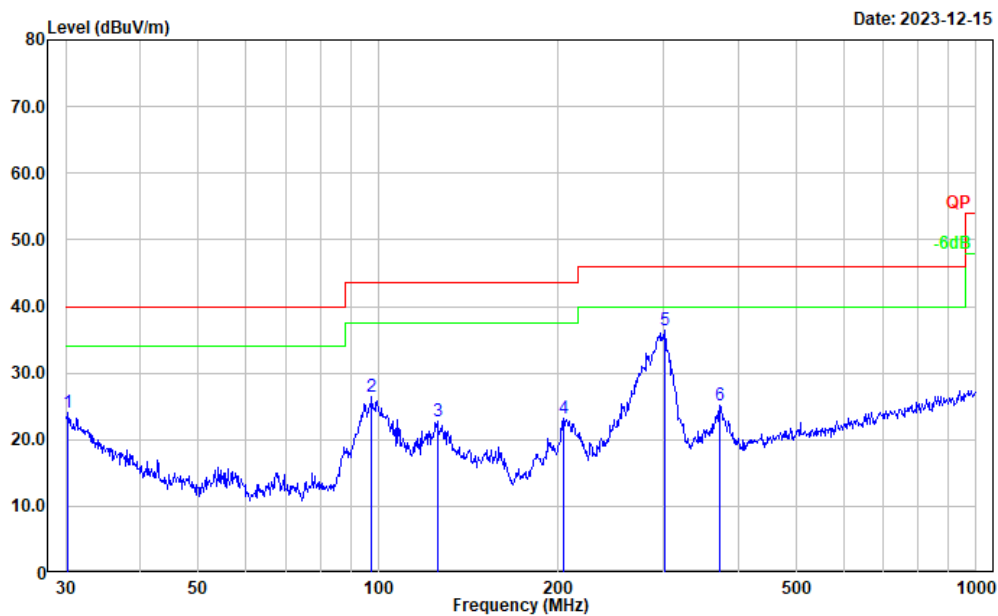

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	28.17	-4.04	24.13	40.00	15.87	Peak
2	97.456	41.42	-14.94	26.48	43.50	17.02	Peak
3	125.446	34.07	-11.30	22.77	43.50	20.73	Peak
4	204.238	35.45	-12.33	23.12	43.50	20.38	Peak
5	301.422	46.95	-10.61	36.34	46.00	9.66	Peak
6	372.005	34.52	-9.45	25.07	46.00	20.93	Peak

Project No.: CR231168240-RF
Tester: Jeff Luo
Polarization: vertical
Note: Receiving 4G B2

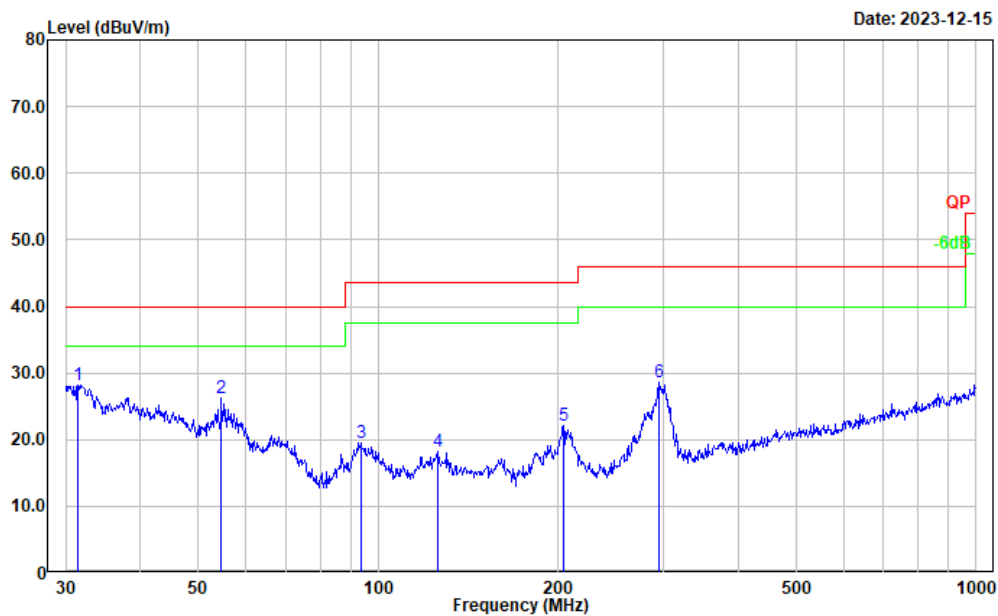


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.399	33.11	-4.86	28.25	40.00	11.75	Peak
2	54.643	43.46	-17.17	26.29	40.00	13.71	Peak
3	93.440	35.56	-16.05	19.51	43.50	23.99	Peak
4	125.446	29.56	-11.30	18.26	43.50	25.24	Peak
5	204.238	34.38	-12.33	22.05	43.50	21.45	Peak
6	294.114	39.48	-10.83	28.65	46.00	17.35	Peak

2) 1-13GHz

GSM 1900, 1880MHz:


Project No.: CR231168240-RF
Tester: coco Tian
Polarization: horizontal
Note: PCS1900

Date: 2023-12-14

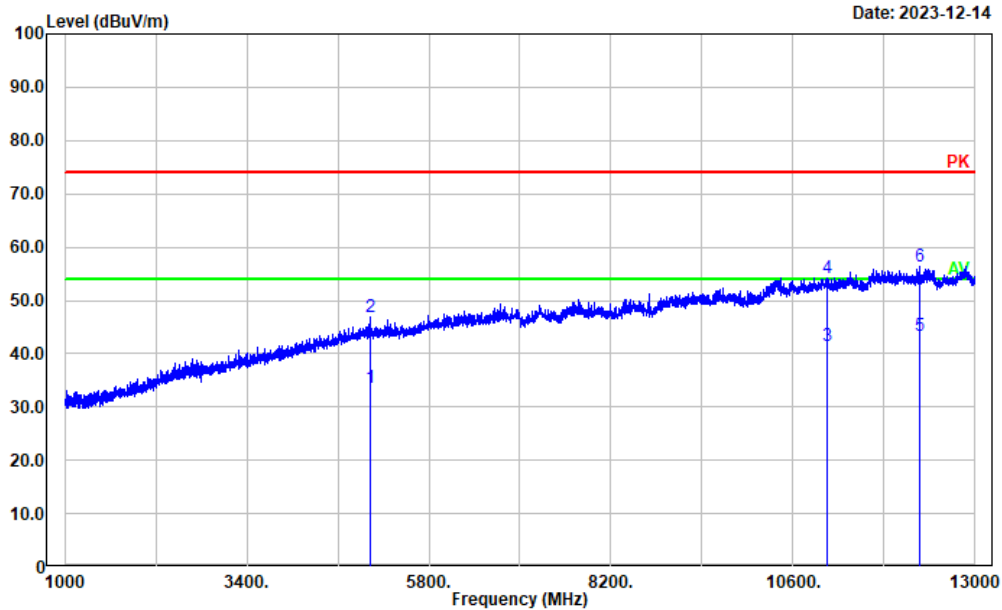

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5020.804	21.90	11.73	33.63	54.00	20.37	Average
2	5020.804	35.22	11.73	46.95	74.00	27.05	Peak
3	11041.210	19.84	21.51	41.35	54.00	12.65	Average
4	11041.210	32.79	21.51	54.30	74.00	19.70	Peak
5	12277.460	20.71	22.64	43.35	54.00	10.65	Average
6	12277.460	33.77	22.64	56.41	74.00	17.59	Peak


Project No.: CR231168240-RF
Tester: coco Tian
Polarization: vertical
Note: PCS1900

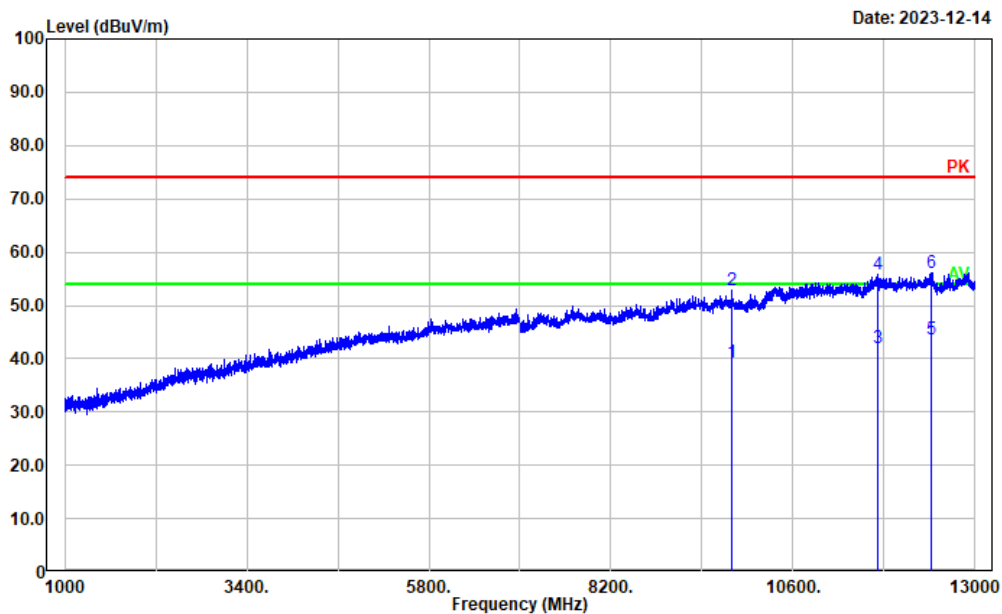

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	9800.160	20.25	19.10	39.35	54.00	14.65	Average
2	9800.160	33.68	19.10	52.78	74.00	21.22	Peak
3	11708.540	19.72	22.26	41.98	54.00	12.02	Average
4	11708.540	33.50	22.26	55.76	74.00	18.24	Peak
5	12423.880	21.12	22.53	43.65	54.00	10.35	Average
6	12423.880	33.50	22.53	56.03	74.00	17.97	Peak


WCDMA Band2, 1880MHz:

Project No.: CR231168240-RF
Tester: coco Tian
Polarization: horizontal
Note: WCDMA Band 2

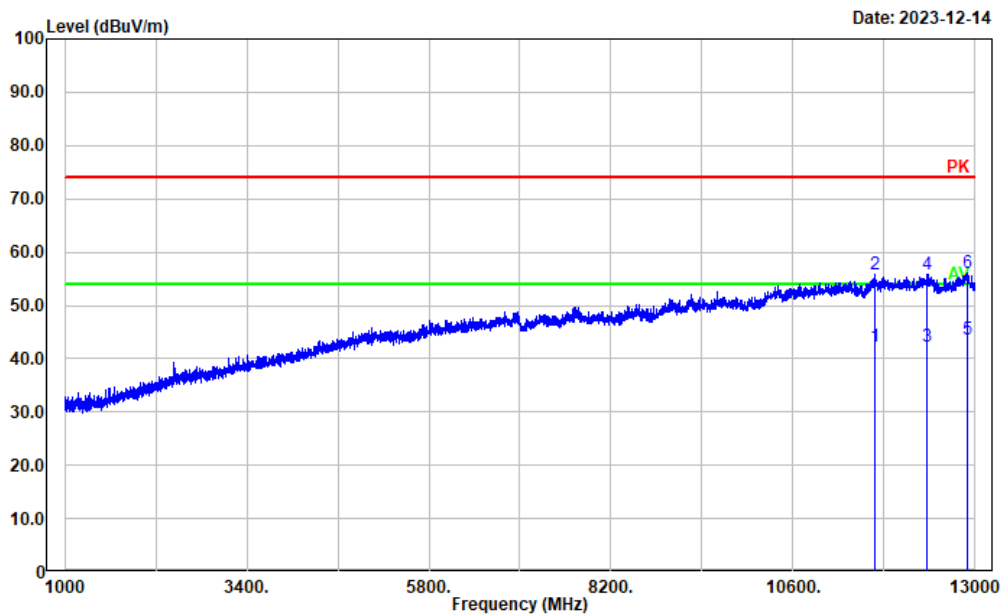

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11674.930	20.22	22.15	42.37	54.00	11.63	Average
2	11674.930	33.67	22.15	55.82	74.00	18.18	Peak
3	12368.670	19.52	22.63	42.15	54.00	11.85	Average
4	12368.670	33.19	22.63	55.82	74.00	18.18	Peak
5	12906.380	20.25	23.27	43.52	54.00	10.48	Average
6	12906.380	32.83	23.27	56.10	74.00	17.90	Peak


Project No.: CR231168240-RF
Tester: coco Tian
Polarization: vertical
Note: WCDMA Band 2

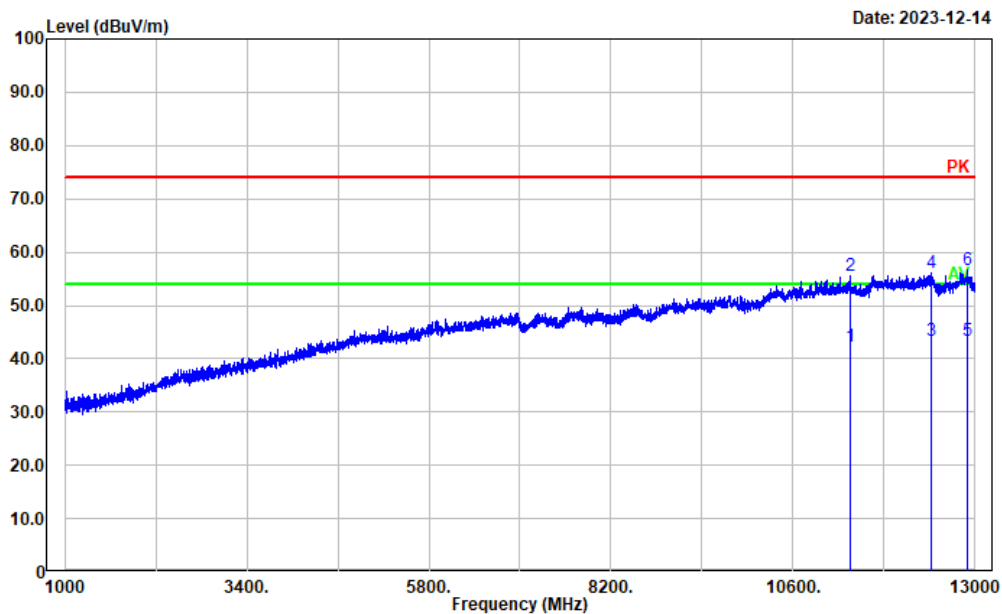

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11355.670	20.30	21.88	42.18	54.00	11.82	Average
2	11355.670	33.63	21.88	55.51	74.00	18.49	Peak
3	12419.080	20.73	22.55	43.28	54.00	10.72	Average
4	12419.080	33.51	22.55	56.06	74.00	17.94	Peak
5	12894.380	20.07	23.28	43.35	54.00	10.65	Average
6	12894.380	33.29	23.28	56.57	74.00	17.43	Peak


LTE Band2, 1880MHz:

Project No.: CR231168240-RF
Tester: coco Tian
Polarization: horizontal
Note: LTE Band 2

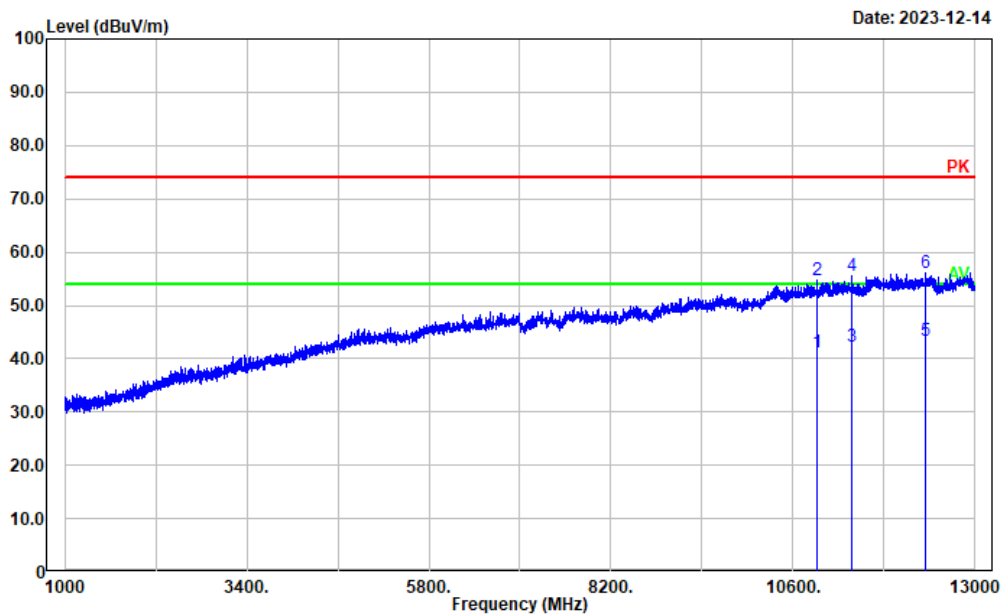

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10913.980	19.61	21.56	41.17	54.00	12.83	Average
2	10913.980	33.19	21.56	54.75	74.00	19.25	Peak
3	11382.080	20.26	21.89	42.15	54.00	11.85	Average
4	11382.080	33.57	21.89	55.46	74.00	18.54	Peak
5	12337.470	20.74	22.64	43.38	54.00	10.62	Average
6	12337.470	33.54	22.64	56.18	74.00	17.82	Peak

Project No.: CR231168240-RF
Tester: coco Tian
Polarization: vertical
Note: LTE Band 2

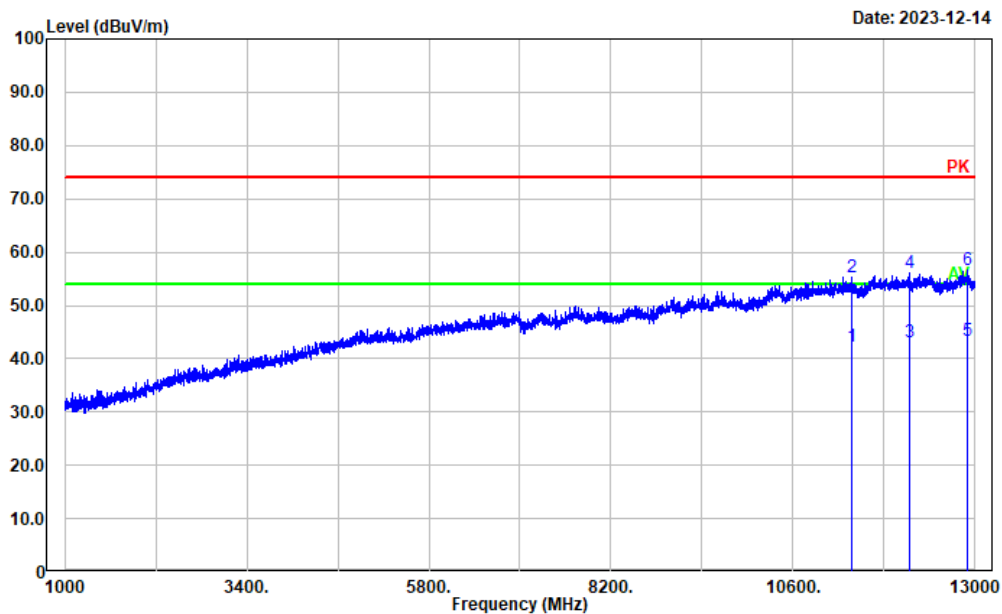

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11377.280	20.37	21.88	42.25	54.00	11.75	Average
2	11377.280	33.51	21.88	55.39	74.00	18.61	Peak
3	12135.830	20.31	22.84	43.15	54.00	10.85	Average
4	12135.830	33.30	22.84	56.14	74.00	17.86	Peak
5	12903.980	20.10	23.28	43.38	54.00	10.62	Average
6	12903.980	33.38	23.28	56.66	74.00	17.34	Peak

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231168240-EXP EUT EXTERNAL PHOTOGRAPHS and CR231168240-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231168240-00E-TSP TEST SETUP PHOTOGRAPHS.

==== END OF REPORT =====