

FCC Test Report

Report No.: RWAY202300045A

Applicant: Shenzhen Youmi Intelligent Technology Co., Ltd.

Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

Product Name: Smart phone

Product Model: PG2309GBA

Multiple Models: N/A

Trade Mark: UMIDIGI

FCC ID: 2ATZ4-G65GA

Standards: FCC CFR Title 47 Part 15C (§15.247)

Test Date: 2023-11-16~2024-02-01

Test Result: Complied

Report Date: 2024-02-06

Reviewed by:

Frank Yin

Approved by:

Jacob Kong

Frank Yin
Project Engineer

Jacob Kong
Manager

Prepared by:

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing and Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-02-06	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Test Setup.....	7
2.4	Test Procedure	9
2.5	Measurement Method.....	10
2.6	Measurement Equipment	10
3	Test Results	12
3.1	Test Summary.....	12
3.2	Limit	13
3.3	AC Line Conducted Emissions Test Data.....	14
3.4	Radiated emission Test Data.....	18
3.5	RF Conducted Test Data	28
3.5.1	20 dB Emission Bandwidth and 99% Occupied Bandwidth.....	28
3.5.2	Maximum Conducted Peak Output Power.....	28
3.5.3	Channel separation	29
3.5.4	Number of hopping Frequency	29
3.5.5	Time of occupancy (dwell time).....	29
3.5.6	100 kHz Bandwidth of Frequency Band Edge	30
4	Test Setup Photo.....	44
5	E.U.T Photo	45

1 General Information

1.1 Client Information

Applicant:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Manufacturer:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

1.2 Product Description of EUT

The EUT is Smart phone that contains Classic Bluetooth(BDR/EDR), BLE, 2.4G/5G WLAN, NFC, GSM/GPRS/EGPRS/WCDMA/LTE and 5G NR radios, this report covers the full testing of the Classic Bluetooth(BDR/EDR) radio.

Sample Serial Number	2W-1 for CE&RE test, 2W-2 for RF test conducted test (assigned by WATC)
Sample Received Date	2023-11-15
Sample Status	Good Condition
Frequency Range	2402MHz - 2480MHz
Maximum Conducted Peak Output Power	-0.46dBm
Modulation Technology	GFSK, $\pi/4$ DQPSK, 8DPSK
Spatial Streams	SISO (1TX, 1RX)
Antenna Gain [#]	1.1dBi
Power Supply	DC5V from adapter or DC3.87 V from battery
Adapter 1 Information	Model: HJ-0502000W2-US Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5V, 2A
Adapter 2 Information	Model: HF-0502000U Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5.0V, 2A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
Device Antenna information:	
The BT antenna is an internal antenna which cannot replace by end-user, please see product internal photos for details.	

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: 2ATZ4-G65GA
 FCC Part 15, Subpart C, Equipment Class: DXX, FCC ID: 2ATZ4-G65GA
 FCC Part 15, Subpart E, Equipment Class: NII, FCC ID: 2ATZ4-G65GA
 FCC Part 22H/24E/27, Equipment Class: PCE, FCC ID: 2ATZ4-G65GA

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Emissions, Conducted		1.75dB
Conducted Power		0.74dB
Frequency Error		150Hz
Bandwidth		0.34%
Power Spectral Density		0.74dB
Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.		

1.6 Laboratory Location

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: qa@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	76	2478
1	2403	40	2442	77	2479
...	...	...	...	78	2480
38	2440	...	...	/	/
According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	78	2480

Test Mode:				
Transmitting mode:		Keep the EUT in continuous transmitting with modulation		
Exercise software [#] :		Engineering mode		
Mode	Data rate	Powel Level Setting [#]		
		Low Channel	Middle Channel	High Channel
GFSK	1Mbps	5	5	5
$\pi/4$ DQPSK	2Mbps	5	5	5
8DPSK	3Mbps	5	5	5
The exercise software and the maximum power setting that provided by manufacturer.				


Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For AC power line conducted emission and radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Test Setup


1) Conducted emission measurement:

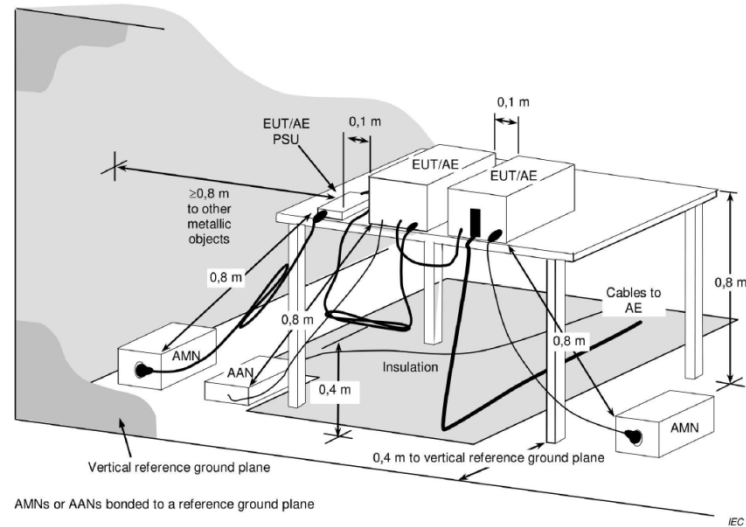


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:


Below 30MHz (3m SAC)

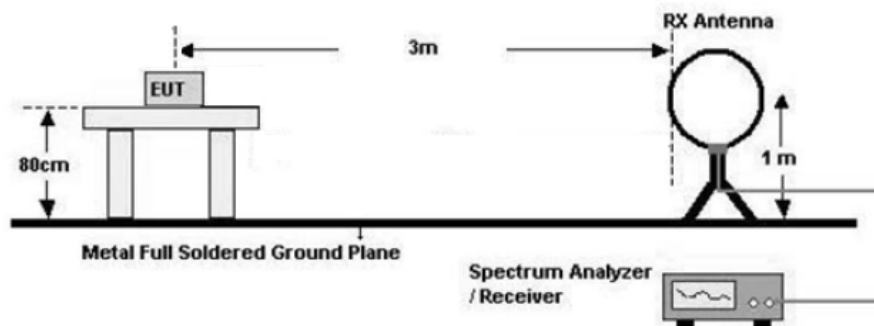


30MHz-1GHz (3m SAC)

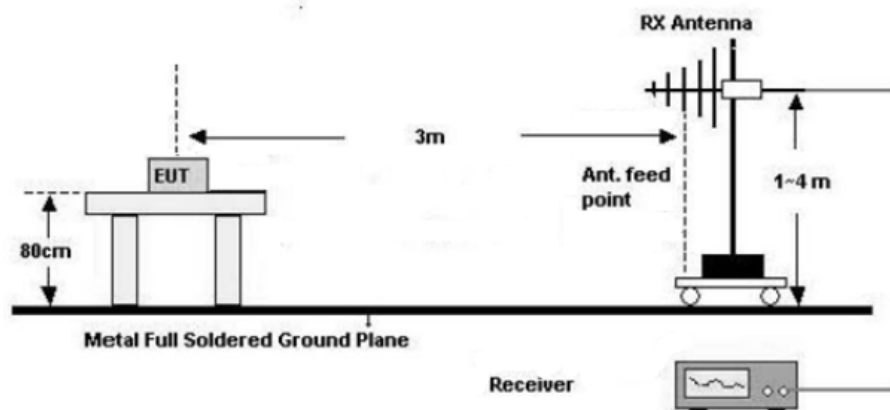


1GHz-18GHz(3m FAC)

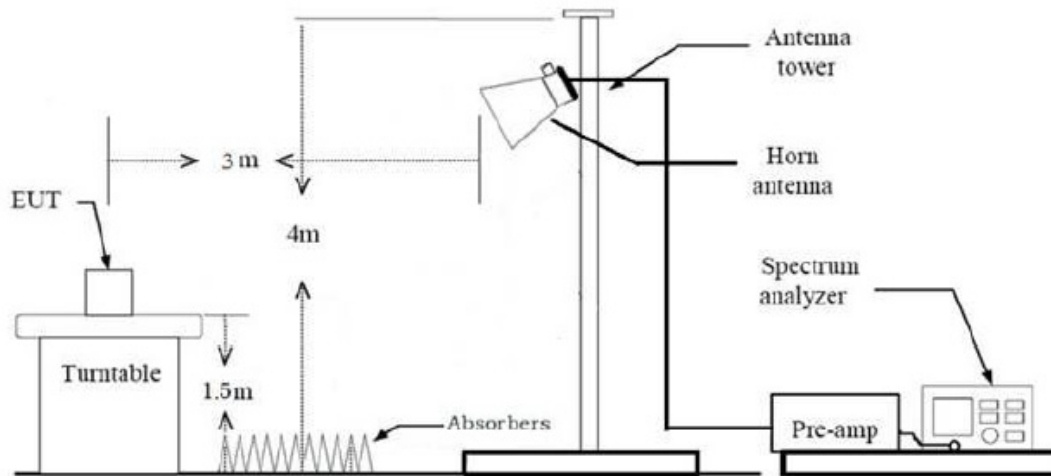

Above 18GHz (3m FAC)

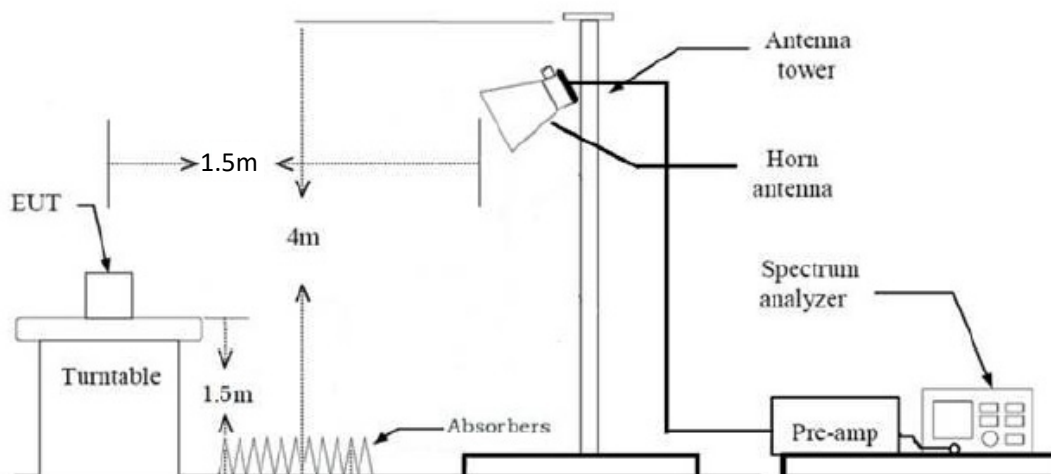

3) RF Conducted Test

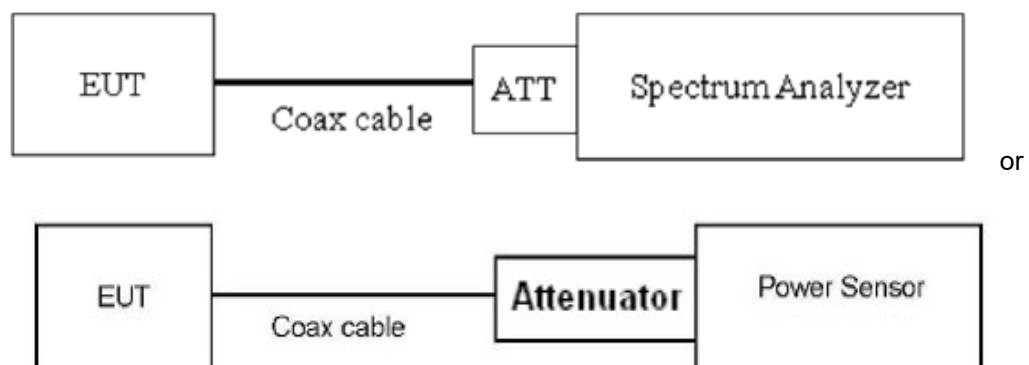

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or

- Spectrum analyzer) through Attenuator and RF cable.
- The cable assembly insertion loss of 10.5dB (including 10.0 dB Attenuator and 0.5dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 0.5dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
 - The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
Maximum Conducted Output Power	ANSI C63.10-2020 Section 7.8.5
20 dB Emission Bandwidth	ANSI C63.10-2020 Section 6.9.2
99% Occupied Bandwidth	ANSI C63.10-2020 Section 6.9.3
Channel separation	ANSI C63.10-2020 Section 7.8.2
Number of hopping Frequency	ANSI C63.10-2020 Section 7.8.3
Time of occupancy (dwell time)	ANSI C63.10-2020 Section 7.8.4
100kHz Bandwidth of Frequency Band Edge	ANSI C63.10-2020 Section 7.8.7.2&6.10
Radiated emission	ANSI C63.10-2020 Section 7.8&6.3&6.4&6.5&6.6

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE& SCHWARZ	EMI TEST RECEIVER	ESR	101817	2023/7/3	2024/7/2
R&S	LISN	ENV216	101748	2023/8/1	2024/7/31
N/A	Coaxial Cable	NO.12	N/A	2023/7/3	2024/7/2
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7

ETS	Passive Loop Antenna	6512	29604	2023/7/7	2024/7/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2024/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2023/9/15	2024/9/14
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
R&S	Spectrum Analyzer	FSV40	101590	2023/11/16	2024/11/15
MARCONI	10dB Attenuator	1692595	2942	2023/10/25	2024/10/24

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247 (a)(1)	20dB Emission Bandwidth	Compliance
-	99% Occupied Bandwidth	Report only
§15.247 (a)(1)	Channel separation	Compliance
§15.247 (a)(1)(iii)	Number of hopping Frequency	Compliance
§15.247 (a)(1)(iii)	Time of occupancy (dwell time)	Compliance
§15.247(b)(1)	Maximum Conducted Output Power	Compliance
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliance
§15.205, §15.209, §15.247(d)	Radiated emission	Compliance


3.2 Limit

Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)
Conducted Output Power	For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.
Channel separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Number of hopping Frequency	Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.
Time of occupancy (dwell time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Spurious Emissions, 100kHz Bandwidth of Frequency Band Edge	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.3 AC Line Conducted Emissions Test Data

Test Date:	2023-11-16	Test By:	Lirou Li
Environment condition:	Temperature: 20.9°C; Relative Humidity:34%; ATM Pressure: 101.2kPa		

Adapter: HJ-0502000W2-US

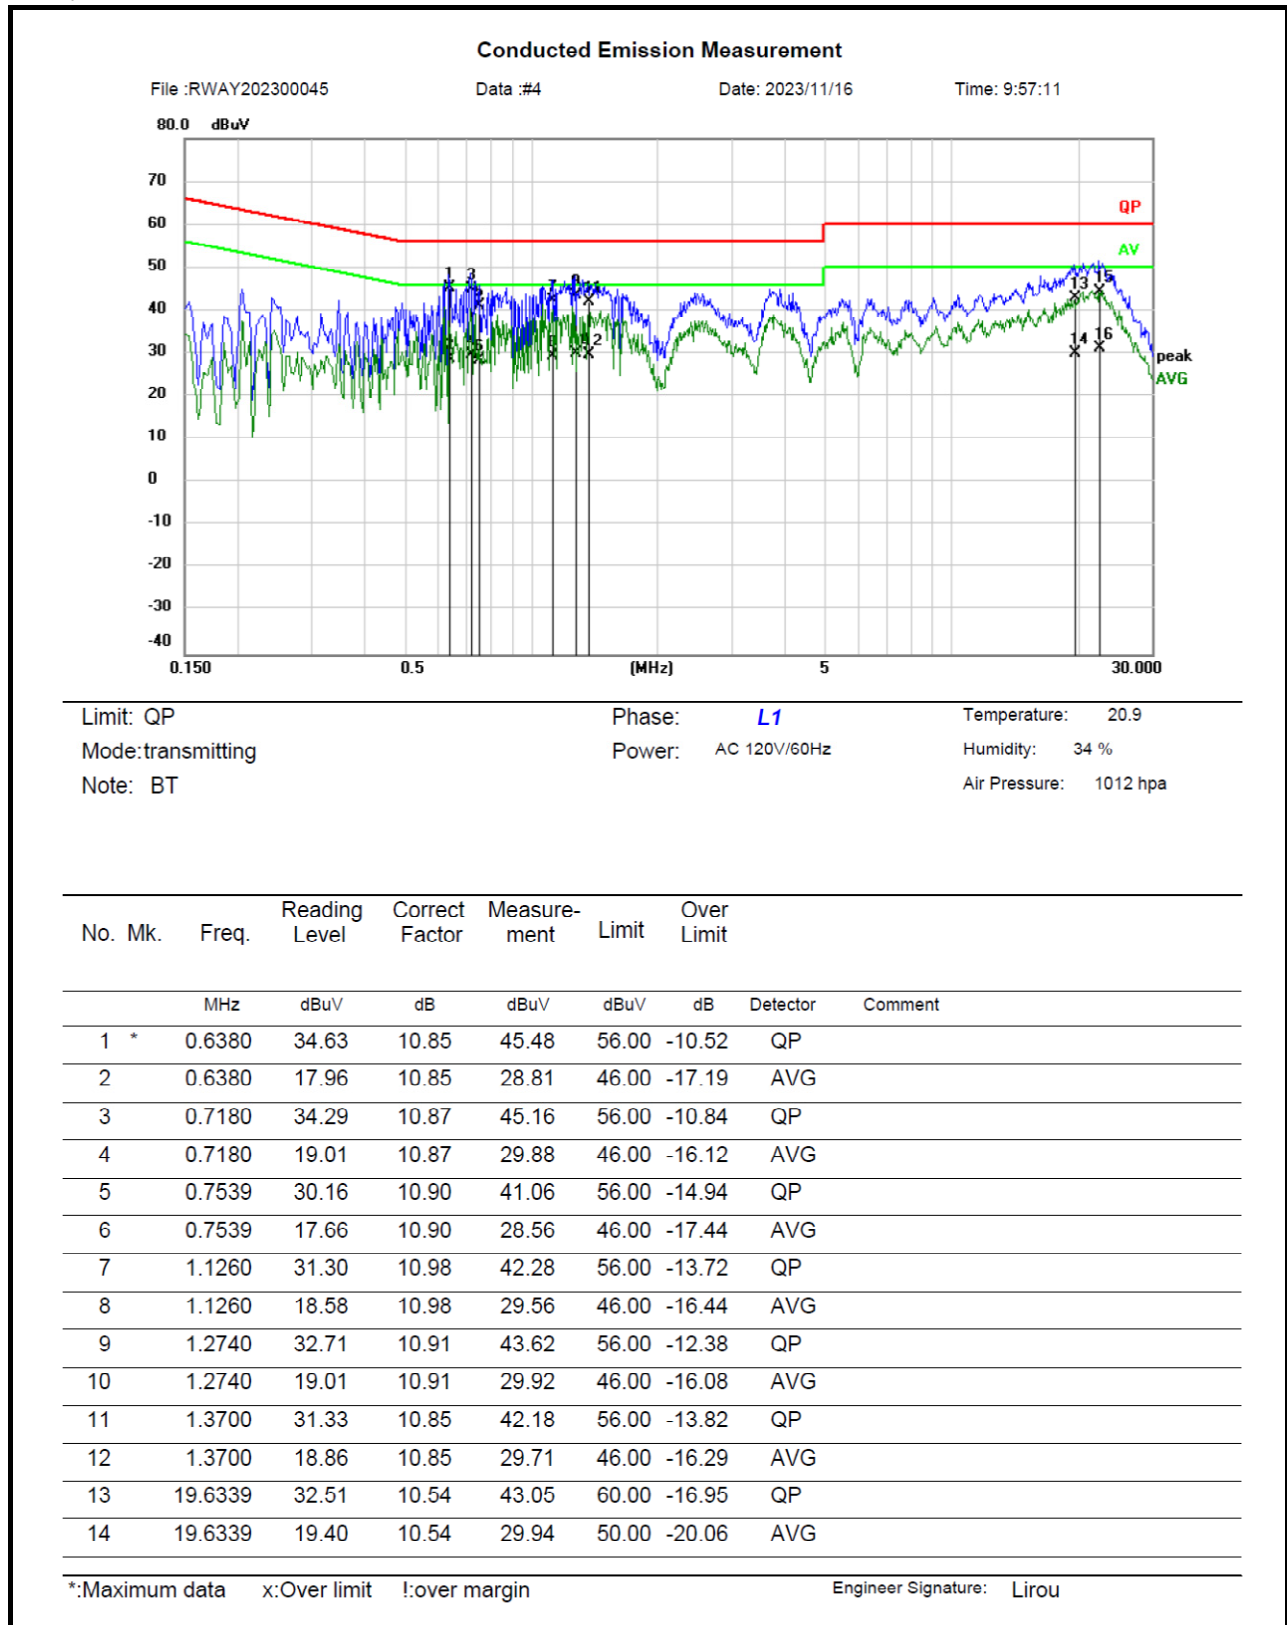


Conducted Emission Measurement

File :RWAY202300045

Data :#3

Date: 2023/11/16

Time: 9:49:56

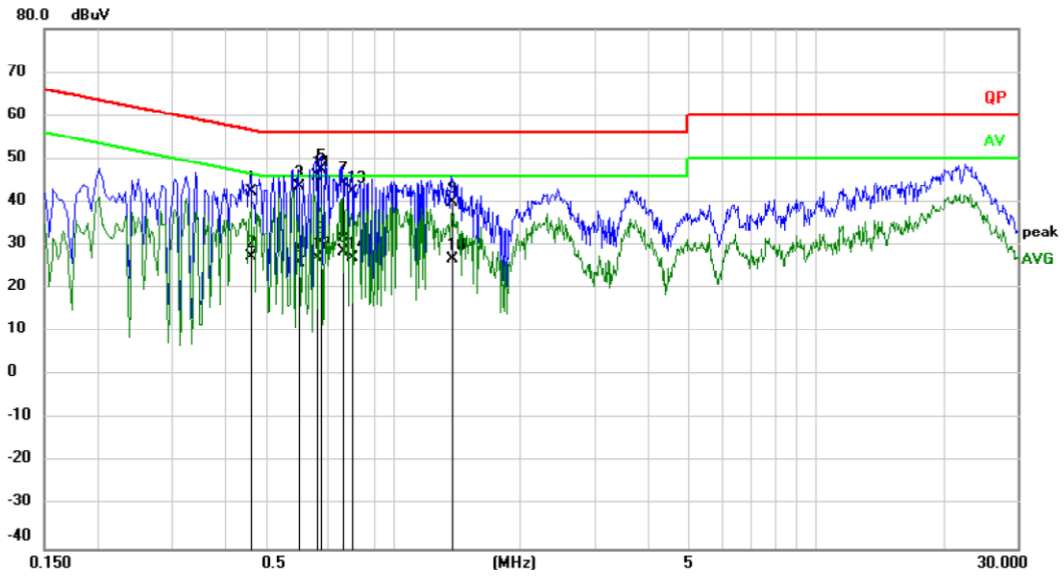

Limit: QP

Mode: transmitting

Note: BT

Phase: **N**

Power: AC 120V/60Hz

Temperature: 20.9

Humidity: 34 %

Air Pressure: 1012 hpa

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over Limit	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.4620	31.67	10.69	42.36	56.66	-14.30	QP
2		0.4620	16.67	10.69	27.36	46.66	-19.30	AVG
3		0.5980	32.90	10.64	43.54	56.00	-12.46	QP
4		0.5980	15.29	10.64	25.93	46.00	-20.07	AVG
5	*	0.6780	36.77	10.57	47.34	56.00	-8.66	QP
6		0.6780	19.97	10.57	30.54	46.00	-15.46	AVG
7		0.7620	33.85	10.58	44.43	56.00	-11.57	QP
8		0.7620	18.06	10.58	28.64	46.00	-17.36	AVG
9		1.3779	29.18	10.67	39.85	56.00	-16.15	QP
10		1.3779	15.98	10.67	26.65	46.00	-19.35	AVG
11		0.6580	35.51	10.59	46.10	56.00	-9.90	QP
12		0.6580	16.33	10.59	26.92	46.00	-19.08	AVG
13		0.7980	31.81	10.60	42.41	56.00	-13.59	QP
14		0.7980	16.40	10.60	27.00	46.00	-19.00	AVG

*:Maximum data x:Over limit !:over margin

Engineer Signature: Lirou

Adapter: HF-0502000U


Conducted Emission Measurement

File :RWAY202300045-RF

Data :#11

Date: 2024/11/16

Time: 9:14:20

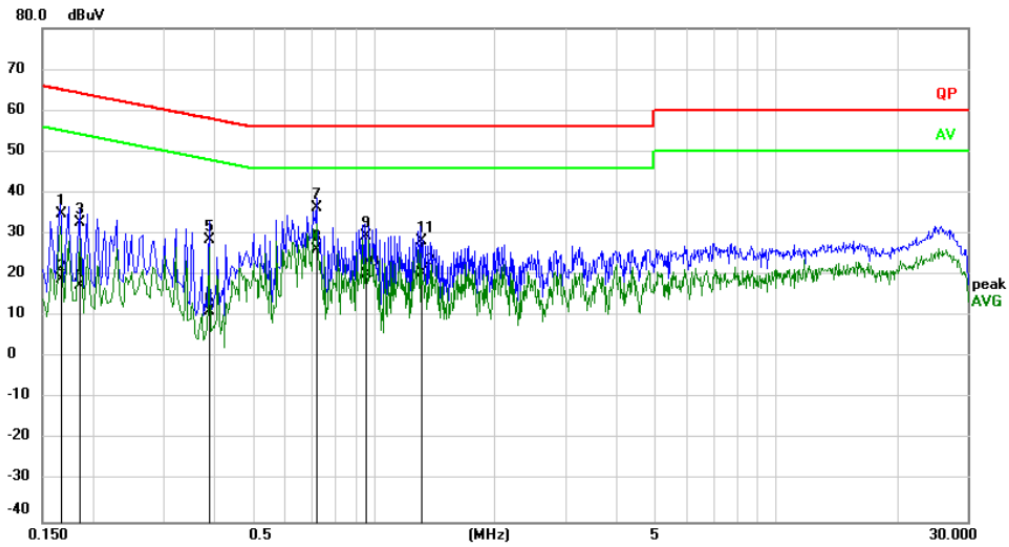

Limit: QP

Mode:transmitting

Note: BT

Phase: **L1**

Power: AC 120V/60Hz

Temperature: 20.9

Humidity: 34 %

Air Pressure: 1012 hpa

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over Limit	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1		0.1660	23.99	10.75	34.74	65.16	-30.42	QP
2		0.1660	8.11	10.75	18.86	55.16	-36.30	AVG
3		0.1860	22.19	10.67	32.86	64.21	-31.35	QP
4		0.1860	6.91	10.67	17.58	54.21	-36.63	AVG
5		0.3899	17.67	10.78	28.45	58.07	-29.62	QP
6		0.3899	0.35	10.78	11.13	48.07	-36.94	AVG
7	*	0.7220	25.55	10.87	36.42	56.00	-19.58	QP
8		0.7220	15.34	10.87	26.21	46.00	-19.79	AVG
9		0.9580	18.37	11.03	29.40	56.00	-26.60	QP
10		0.9580	9.02	11.03	20.05	46.00	-25.95	AVG
11		1.3099	17.38	10.88	28.26	56.00	-27.74	QP
12		1.3099	9.46	10.88	20.34	46.00	-25.66	AVG

*:Maximum data x:Over limit !:over margin

Engineer Signature: **Lirou**


Conducted Emission Measurement

File :RWAY202300045-RF

Data :#12

Date: 2024/11/16

Time: 9:26:18

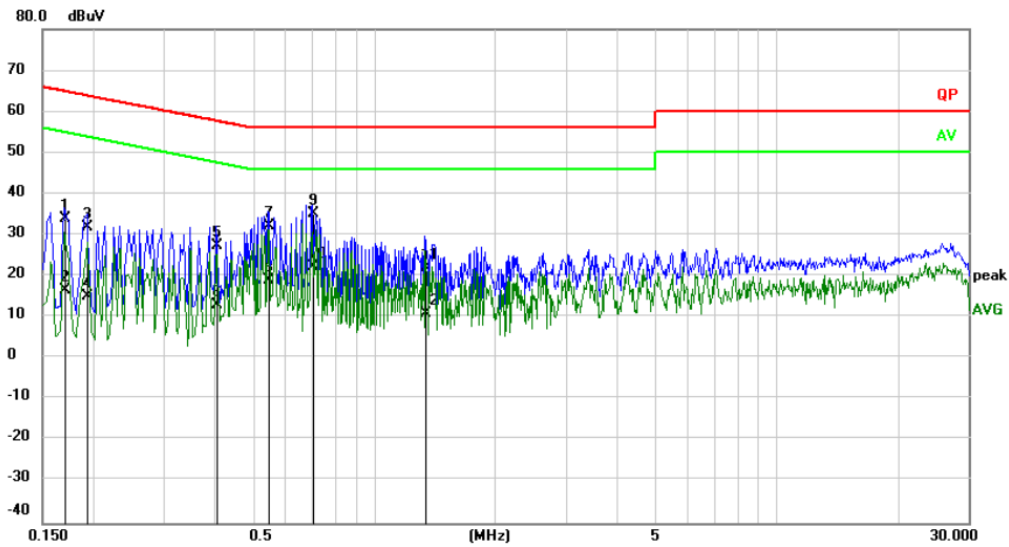

Limit: QP
Mode:transmitting
Note: BT

Phase: **N**
Power: AC 120V/60Hz

Temperature: 20.9
Humidity: 34 %
Air Pressure: 1012 hpa

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over Limit	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1		0.1700	23.43	10.53	33.96	64.96	-31.00	QP
2		0.1700	6.13	10.53	16.66	54.96	-38.30	AVG
3		0.1940	21.38	10.43	31.81	63.86	-32.05	QP
4		0.1940	4.76	10.43	15.19	53.86	-38.67	AVG
5		0.4060	16.63	10.66	27.29	57.73	-30.44	QP
6		0.4060	2.23	10.66	12.89	47.73	-34.84	AVG
7		0.5460	21.51	10.67	32.18	56.00	-23.82	QP
8		0.5460	8.43	10.67	19.10	46.00	-26.90	AVG
9	*	0.7019	24.57	10.56	35.13	56.00	-20.87	QP
10		0.7019	11.55	10.56	22.11	46.00	-23.89	AVG
11		1.3380	11.25	10.67	21.92	56.00	-34.08	QP
12		1.3380	0.28	10.67	10.95	46.00	-35.05	AVG

*:Maximum data x:Over limit !:over margin

Engineer Signature: Lirou

Remark:

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)

Correct Factor(dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)

Over Limit = Measurement – Limit

3.4 Radiated emission Test Data

9 kHz-30MHz:


Test Date:	2024-02-01	Test By:	Luke Li
Environment condition:	Temperature: 23.6°C; Relative Humidity:64%; ATM Pressure: 101.2kPa		


For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2024-02-01	Test By:	Luke Li
Environment condition:	Temperature: 23.6°C; Relative Humidity:64%; ATM Pressure: 101.2kPa		

Adapter: HJ-0502000W2-US

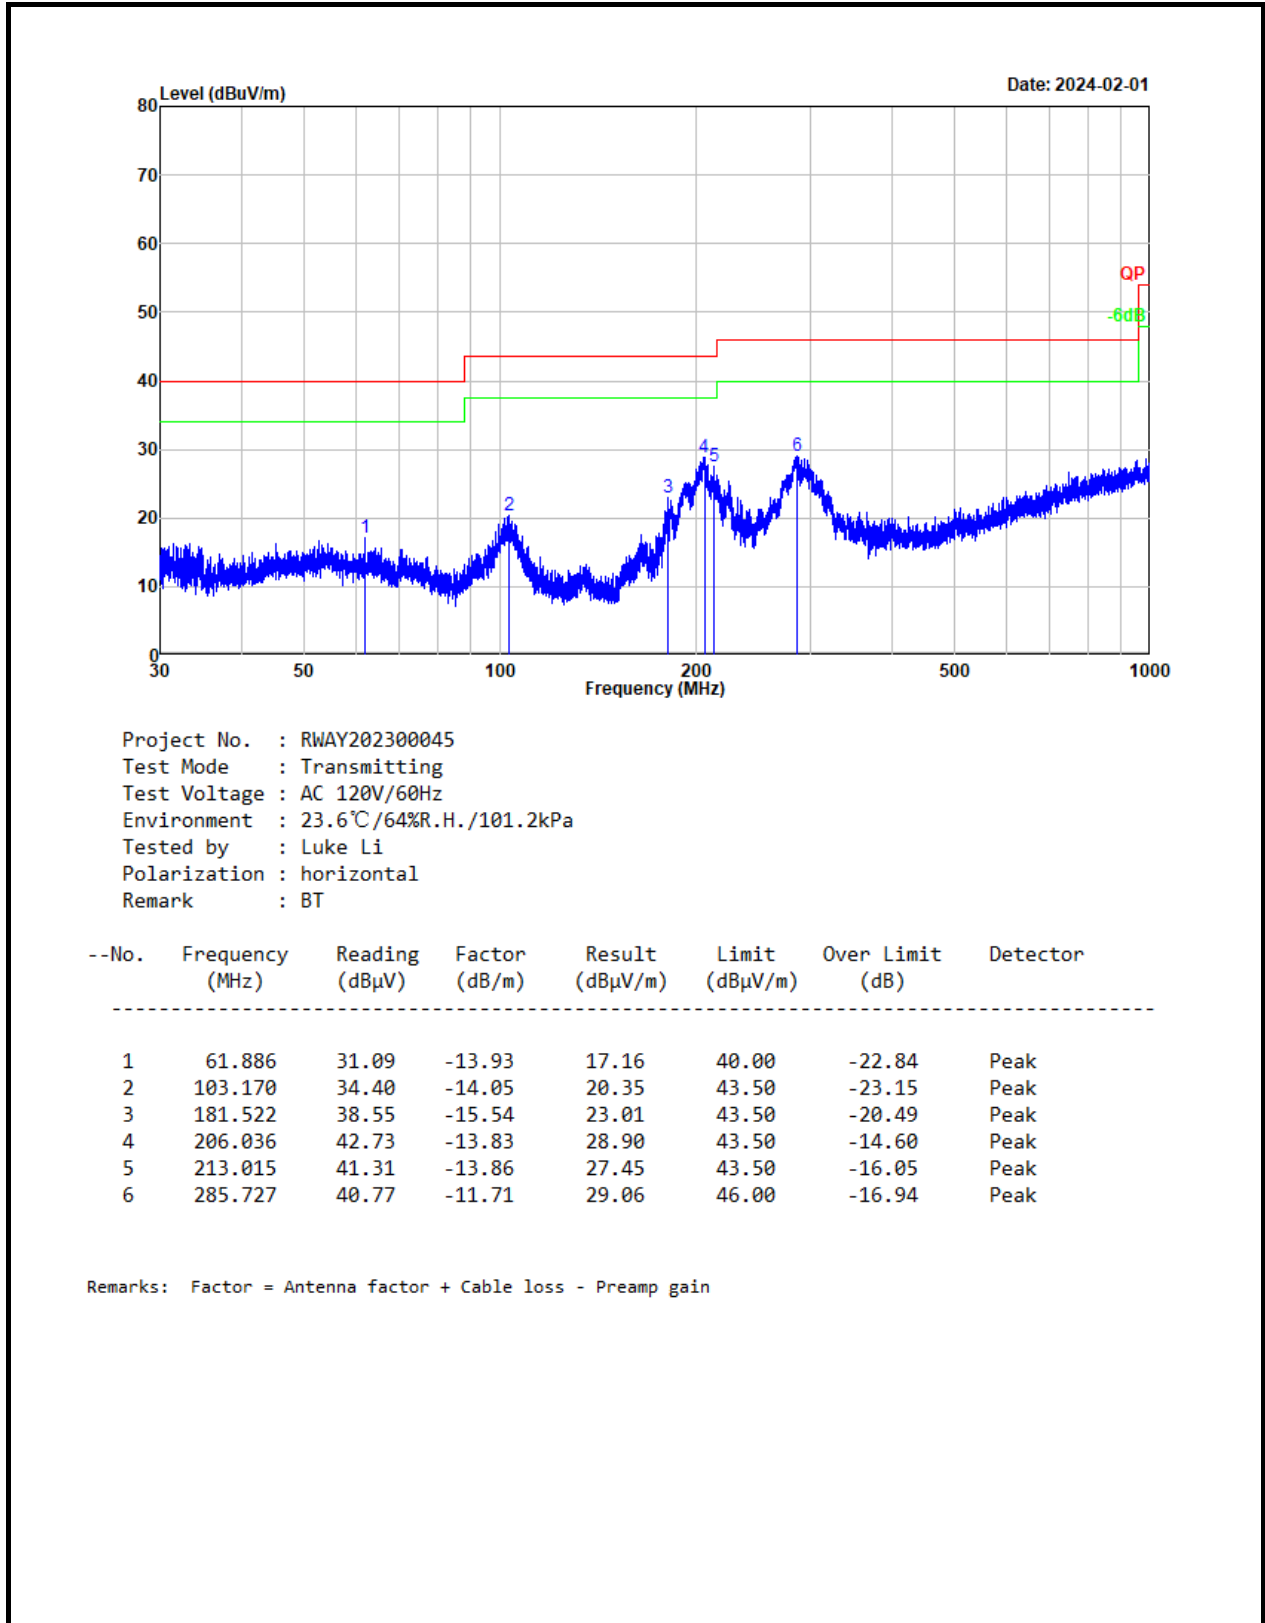

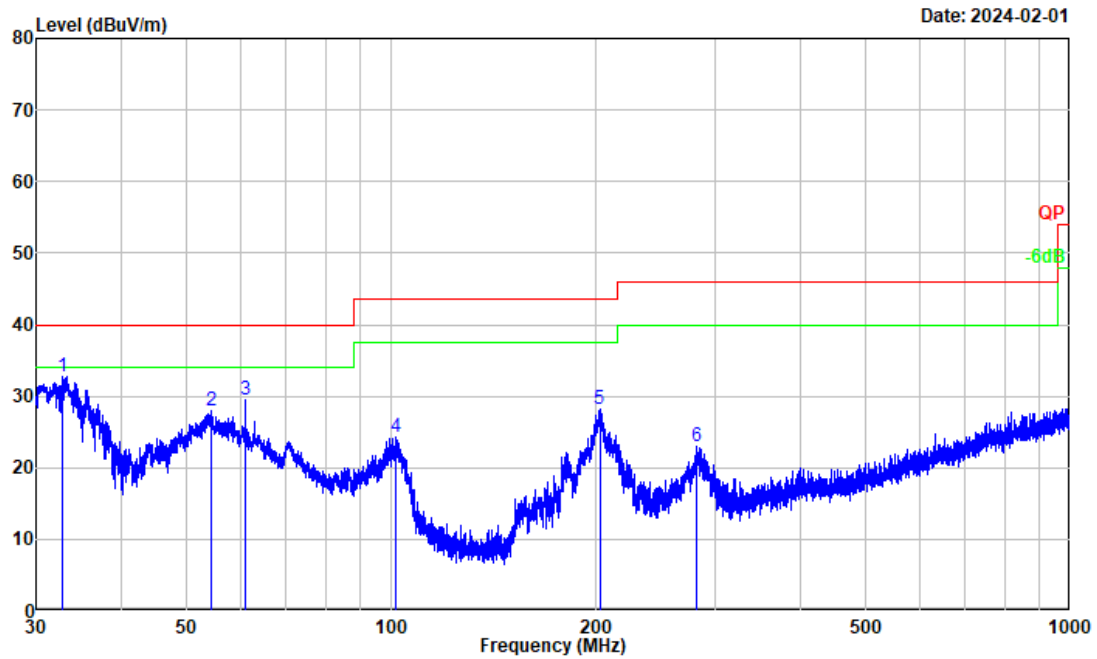


Project No. : RWAY202300045
 Test Mode : Transmitting
 Test Voltage : AC 120V/60Hz
 Environment : 23.6°C/64%R.H./101.2kPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	32.777	47.94	-15.18	32.76	40.00	-7.24	Peak
2	54.428	40.53	-12.59	27.94	40.00	-12.06	Peak
3	61.132	43.30	-13.85	29.45	40.00	-10.55	Peak
4	101.466	38.47	-14.14	24.33	43.50	-19.17	Peak
5	202.810	41.95	-13.81	28.14	43.50	-15.36	Peak
6	281.131	34.75	-11.81	22.94	46.00	-23.06	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain


Adapter: HF-0502000U

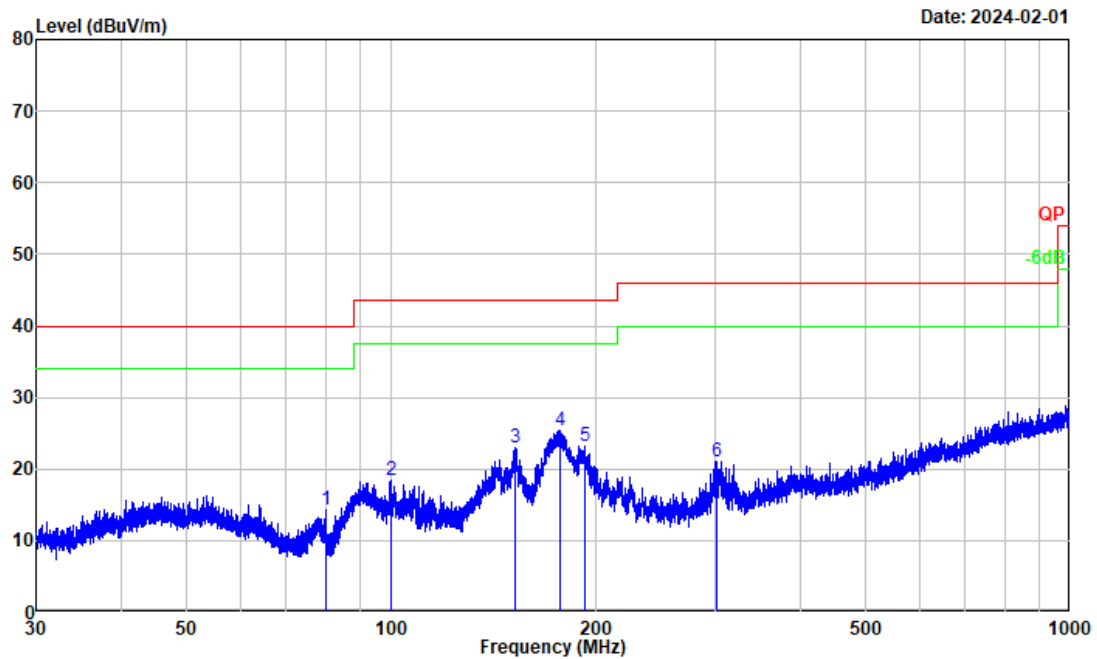

Project No. : RWAY202300045
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 23.6℃/64%R.H./101.2kPa
Tested by : Luke Li
Polarization : horizontal
Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	80.020	32.35	-18.08	14.27	40.00	-25.73	Peak
2	99.893	32.60	-14.21	18.39	43.50	-25.11	Peak
3	152.361	40.33	-17.34	22.99	43.50	-20.51	Peak
4	176.927	41.36	-15.94	25.42	43.50	-18.08	Peak
5	192.801	37.62	-14.36	23.26	43.50	-20.24	Peak
6	301.245	32.36	-11.33	21.03	46.00	-24.97	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

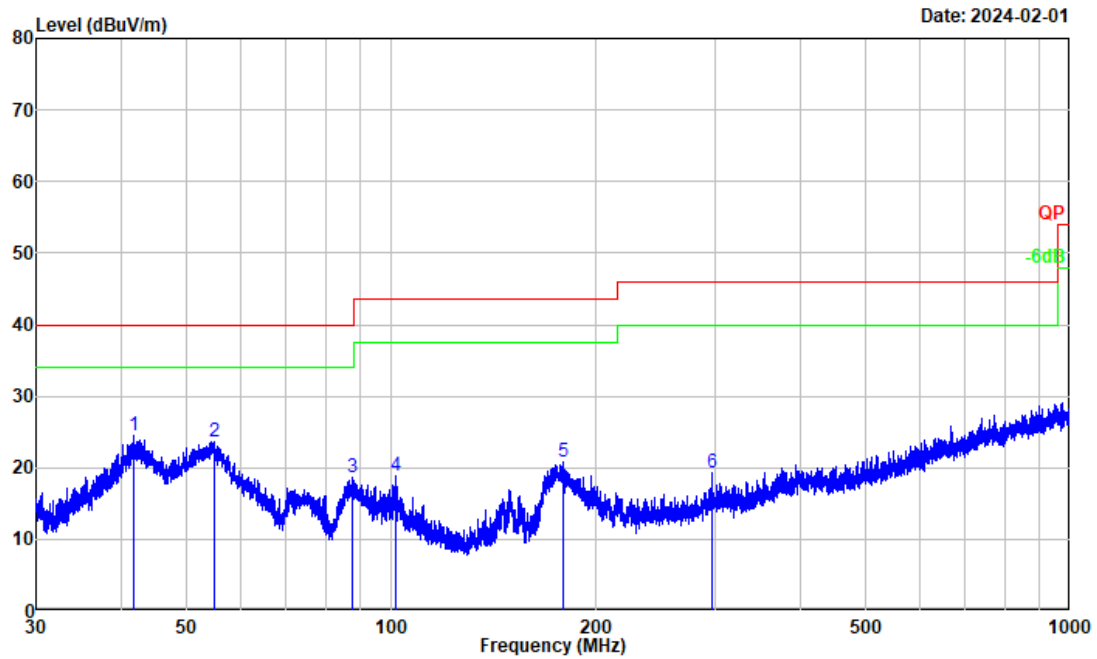

Project No. : RWAY202300045
 Test Mode : Transmitting
 Test Voltage : AC 120V/60Hz
 Environment : 23.6°C/64%R.H./101.2kPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	41.861	37.14	-12.55	24.59	40.00	-15.41	Peak
2	54.863	36.42	-12.68	23.74	40.00	-16.26	Peak
3	87.506	35.07	-16.46	18.61	40.00	-21.39	Peak
4	101.660	32.98	-14.11	18.87	43.50	-24.63	Peak
5	178.877	36.63	-15.72	20.91	43.50	-22.59	Peak
6	296.268	30.67	-11.45	19.22	46.00	-26.78	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result – Limit

Above 1GHz:

Test Date:	2024-01-20	Test By:	Bard Huang
Environment condition:	Temperature: 25.4°C; Relative Humidity:49.8%; ATM Pressure: 101.9kPa		

Frequency (MHz)	Reading level (dBμV)	Polar	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
GFSK							
Low Channel							
2390.000	52.24	horizontal	8.25	60.49	74.00	-13.51	Peak
2390.000	38.21	horizontal	8.25	46.46	54.00	-7.54	Average
2390.000	52.38	vertical	8.25	60.63	74.00	-13.37	Peak
2390.000	38.34	vertical	8.25	46.59	54.00	-7.41	Average
4804.000	53.86	horizontal	0.21	54.07	74.00	-19.93	Peak
4804.000	45.05	horizontal	0.21	45.26	54.00	-8.74	Average
4804.000	53.64	vertical	0.21	53.85	74.00	-20.15	Peak
4804.000	44.13	vertical	0.21	44.34	54.00	-9.66	Average
Middle Channel							
4882.000	53.52	horizontal	0.45	53.97	74.00	-20.03	Peak
4882.000	44.70	horizontal	0.45	45.15	54.00	-8.85	Average
4882.000	53.08	vertical	0.45	53.53	74.00	-20.47	Peak
4882.000	44.19	vertical	0.45	44.64	54.00	-9.36	Average
High Channel							
2483.500	52.08	horizontal	8.25	60.33	74.00	-13.67	Peak
2483.500	38.75	horizontal	8.25	47.00	54.00	-7.00	Average
2483.500	52.43	vertical	8.25	60.68	74.00	-13.32	Peak
2483.500	39.43	vertical	8.25	47.68	54.00	-6.32	Average
4960.000	53.30	horizontal	0.93	54.23	74.00	-19.77	Peak
4960.000	44.96	horizontal	0.93	45.89	54.00	-8.11	Average
4960.000	53.11	vertical	0.93	54.04	74.00	-19.96	Peak
4960.000	45.07	vertical	0.93	46.00	54.00	-8.00	Average
π/4 DQPSK							
Low Channel							
2390.000	51.79	horizontal	8.25	60.04	74.00	-13.96	Peak
2390.000	36.87	horizontal	8.25	45.12	54.00	-8.88	Average
2390.000	52.08	vertical	8.25	60.33	74.00	-13.67	Peak
2390.000	37.82	vertical	8.25	46.07	54.00	-7.93	Average
4804.000	52.42	horizontal	0.21	52.63	74.00	-21.37	Peak

4804.000	44.81	horizontal	0.21	45.02	54.00	-8.98	Average
4804.000	53.62	vertical	0.21	53.83	74.00	-20.17	Peak
4804.000	43.50	vertical	0.21	43.71	54.00	-10.29	Average
Middle Channel							
4882.000	52.70	horizontal	0.45	53.15	74.00	-20.85	Peak
4882.000	43.67	horizontal	0.45	44.12	54.00	-9.88	Average
4882.000	52.10	vertical	0.45	52.55	74.00	-21.45	Peak
4882.000	43.11	vertical	0.45	43.56	54.00	-10.44	Average
High Channel							
2483.500	52.05	horizontal	8.25	60.30	74.00	-13.70	Peak
2483.500	37.34	horizontal	8.25	45.59	54.00	-8.41	Average
2483.500	51.83	vertical	8.25	60.08	74.00	-13.92	Peak
2483.500	38.11	vertical	8.25	46.36	54.00	-7.64	Average
4960.000	52.14	horizontal	0.93	53.07	74.00	-20.93	Peak
4960.000	43.85	horizontal	0.93	44.78	54.00	-9.22	Average
4960.000	51.82	vertical	0.93	52.75	74.00	-21.25	Peak
4960.000	44.53	vertical	0.93	45.46	54.00	-8.54	Average
8DPSK							
Low Channel							
2390.000	51.35	horizontal	8.25	59.60	74.00	-14.40	Peak
2390.000	38.19	horizontal	8.25	46.44	54.00	-7.56	Average
2390.000	51.15	vertical	8.25	59.40	74.00	-14.60	Peak
2390.000	37.52	vertical	8.25	45.77	54.00	-8.23	Average
4804.000	53.73	horizontal	0.21	53.94	74.00	-20.06	Peak
4804.000	45.01	horizontal	0.21	45.22	54.00	-8.78	Average
4804.000	52.29	vertical	0.21	52.50	74.00	-21.50	Peak
4804.000	42.85	vertical	0.21	43.06	54.00	-10.94	Average
Middle Channel							
4882.000	52.85	horizontal	0.45	53.30	74.00	-20.70	Peak
4882.000	44.37	horizontal	0.45	44.82	54.00	-9.18	Average
4882.000	53.07	vertical	0.45	53.52	74.00	-20.48	Peak
4882.000	42.91	vertical	0.45	43.36	54.00	-10.64	Average
High Channel							
2483.500	51.14	horizontal	8.25	59.39	74.00	-14.61	Peak
2483.500	37.35	horizontal	8.25	45.60	54.00	-8.40	Average
2483.500	51.09	vertical	8.25	59.34	74.00	-14.66	Peak
2483.500	39.19	vertical	8.25	47.44	54.00	-6.56	Average
4960.000	53.00	horizontal	0.93	53.93	74.00	-20.07	Peak

4960.000	44.95	horizontal	0.93	45.88	54.00	-8.12	Average
4960.000	53.02	vertical	0.93	53.95	74.00	-20.05	Peak
4960.000	44.72	vertical	0.93	45.65	54.00	-8.35	Average

Remark:

Corrected Amplitude= Reading level + corrected Factor


Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit

The emission levels of other frequencies that were lower than the limit 20dB, not show in test report.

For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.

Test plot for example as below:

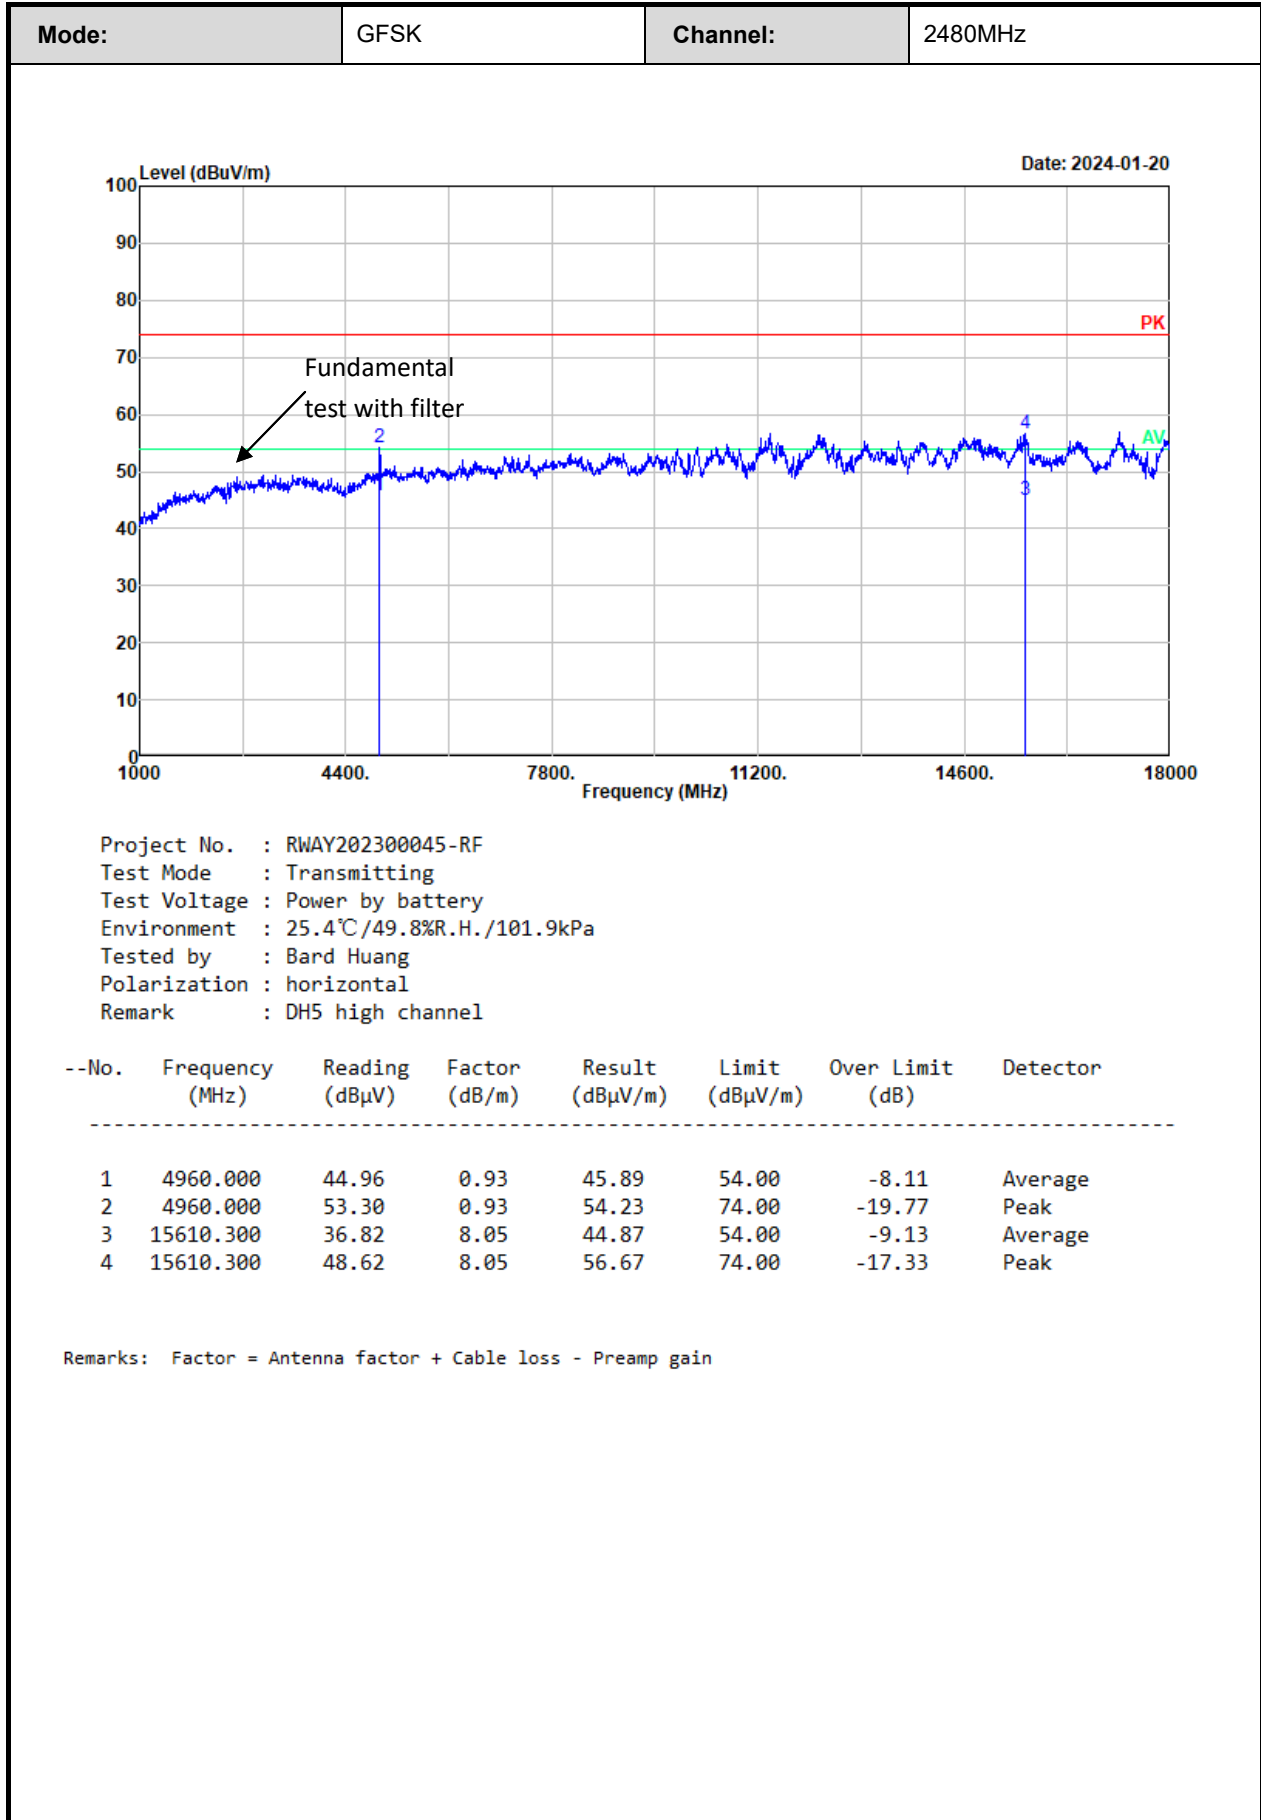

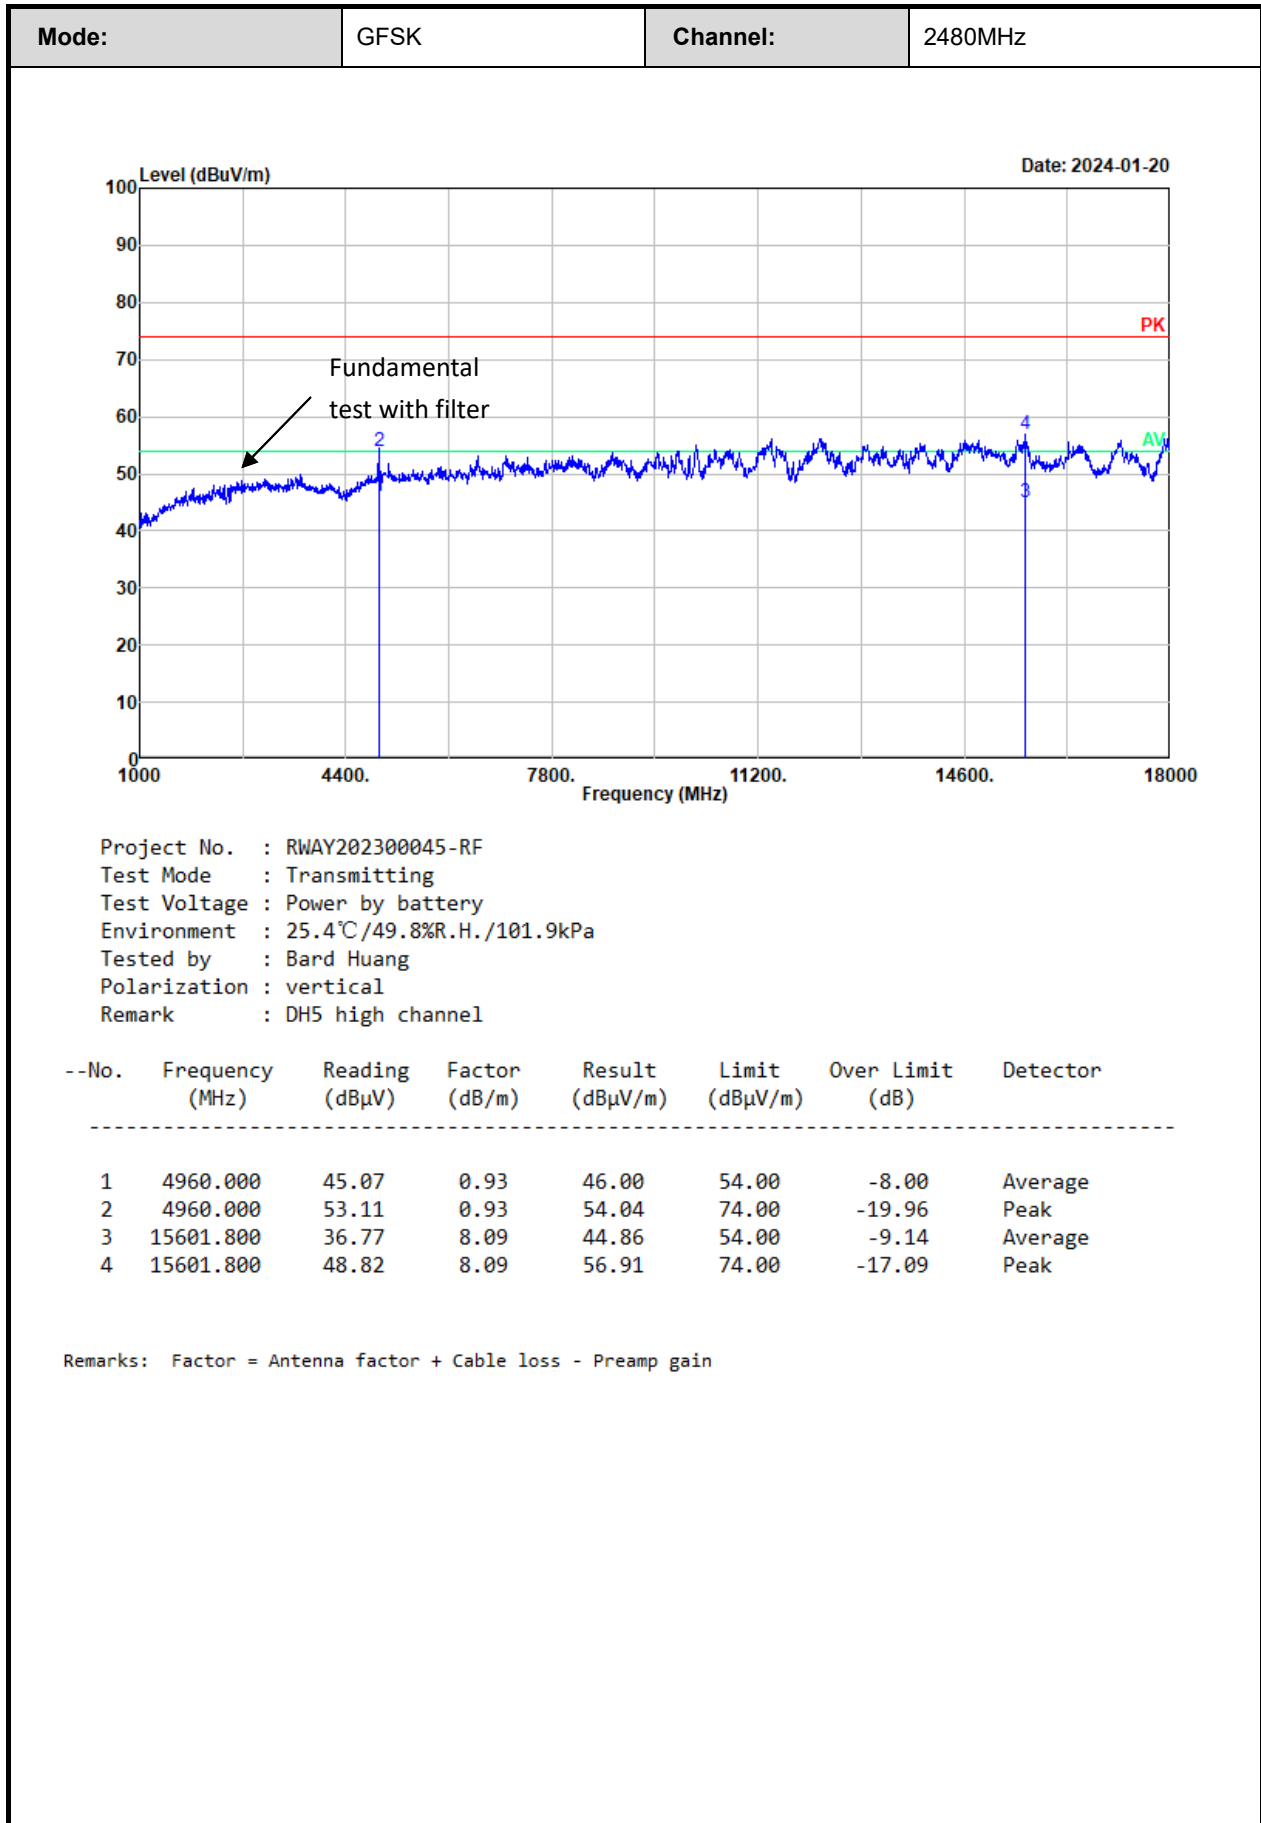

3.5 RF Conducted Test Data

Test Date:	2023-12-05~2023-12-06	Test By:	Ryan Zhang
Environment condition:	Temperature: 25.6-26.3°C; Relative Humidity: 49.1-47.5%; ATM Pressure: 101kPa		

3.5.1 20 dB Emission Bandwidth and 99% Occupied Bandwidth

Test Mode	Channel	20dB BW [MHz]	99% OBW[MHz]
GFSK	2402	0.868	0.762
	2441	0.868	0.758
	2480	0.868	0.758
$\pi/4$ DQPSK	2402	1.264	1.146
	2441	1.260	1.146
	2480	1.260	1.146
8DPSK	2402	1.260	1.150
	2441	1.260	1.146
	2480	1.260	1.150

3.5.2 Maximum Conducted Peak Output Power

Test Mode	Channel[MHz]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	-2.64	21	Pass
	2441	-0.46	21	Pass
	2480	-1.47	21	Pass
$\pi/4$ DQPSK	2402	-3.37	21	Pass
	2441	-1.15	21	Pass
	2480	-2.22	21	Pass
8DPSK	2402	-3.27	21	Pass
	2441	-1.11	21	Pass
	2480	-2.18	21	Pass

3.5.3 Channel separation

Test Mode	Channel[MHz]	Result[MHz]	Limit[MHz]	Verdict
GFSK	2402	1.000	0.579	Pass
	2441	1.000	0.579	Pass
	2480	1.000	0.579	Pass
π/4 DQPSK	2402	1.000	0.843	Pass
	2441	1.000	0.840	Pass
	2480	1.000	0.840	Pass
8DPSK	2402	1.000	0.840	Pass
	2441	1.000	0.840	Pass
	2480	1.000	0.840	Pass

3.5.4 Number of hopping Frequency

Test Mode	Frequency Range [MHz]	Number of hopping Frequency	Limit	Verdict
GFSK	2400-2483.5	79	≥15	Pass
π/4 DQPSK	2400-2483.5	79	≥15	Pass
8DPSK	2400-2483.5	79	≥15	Pass

3.5.5 Time of occupancy (dwell time)

Test Mode	Packet Type	Channel[MHz]	Pulse Time [ms]	Result[s]	Limit[s]	Verdict
GFSK	DH1	2441	0.376	0.120	0.400	Pass
	DH3	2441	1.632	0.261	0.400	Pass
	DH5	2441	2.880	0.307	0.400	Pass
π/4 DQPSK	2DH1	2441	0.384	0.123	0.400	Pass
	2DH3	2441	1.638	0.262	0.400	Pass
	2DH5	2441	2.890	0.308	0.400	Pass
8DPSK	3DH1	2441	0.384	0.123	0.400	Pass
	3DH3	2441	1.638	0.262	0.400	Pass
	3DH5	2441	2.890	0.308	0.400	Pass

Note:

DH1: Dwell time=Pulse time (ms) *(1600/2/79)*31.6s

DH3: Dwell time=Pulse time (ms) *(1600/4/79)*31.6s


DH5: Dwell time=Pulse time (ms) *(1600/6/79)*31.6s




3.5.6 100 kHz Bandwidth of Frequency Band Edge

Test Mode	Channel	Result	Limit	Verdict
GFSK	2402	Refer test plot	Refer test plot	Pass
	2480	Refer test plot	Refer test plot	Pass
$\pi/4$ DQPSK	2402	Refer test plot	Refer test plot	Pass
	2480	Refer test plot	Refer test plot	Pass
8DPSK	2402	Refer test plot	Refer test plot	Pass
	2480	Refer test plot	Refer test plot	Pass


Test Plots:




20 dB Emission Bandwidth:

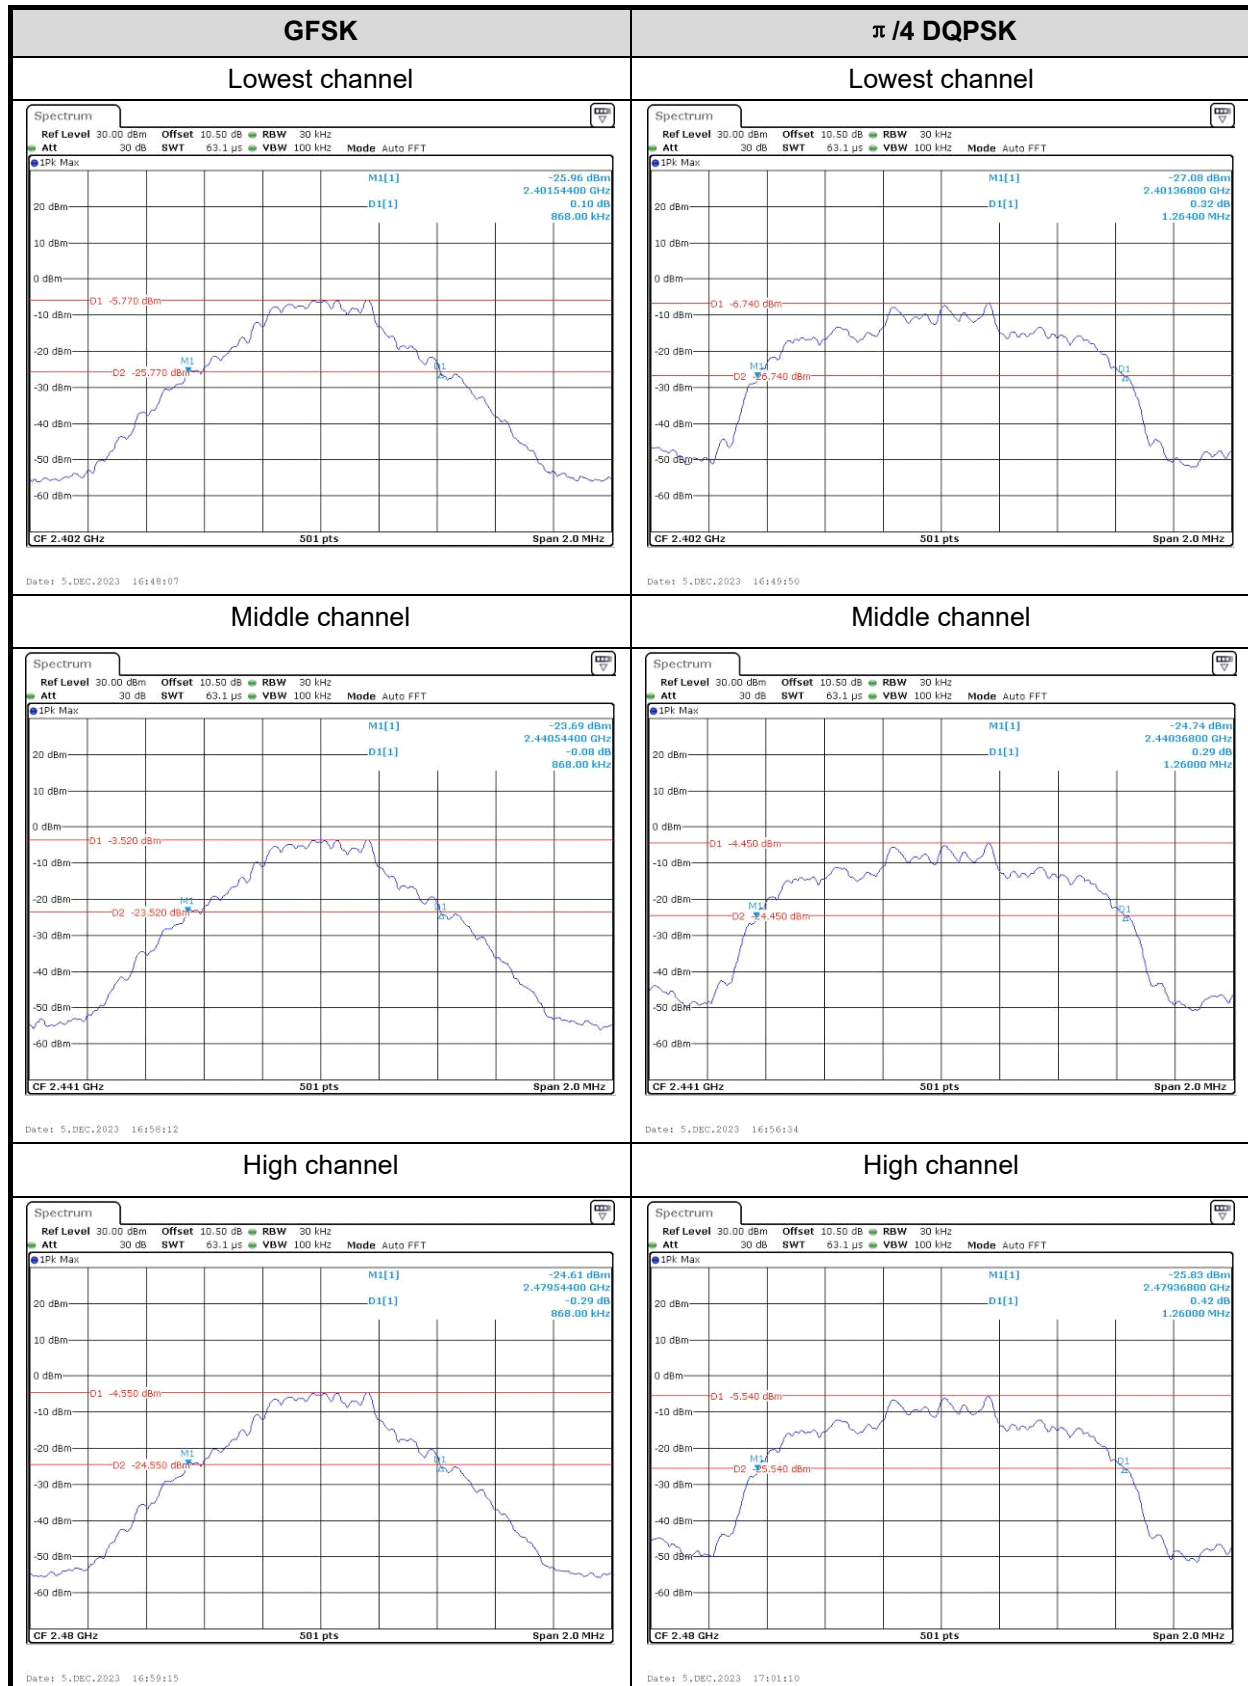

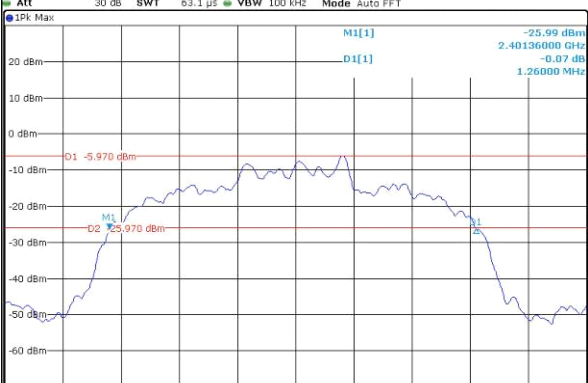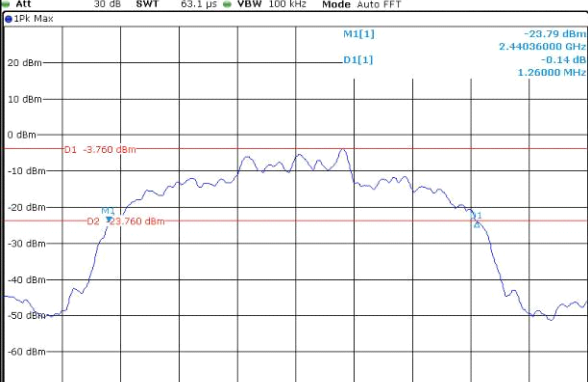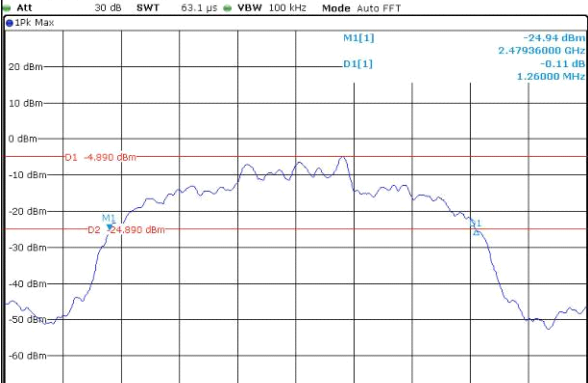
8DPSK	/
Lowest channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT  CF 2.402 GHz 501 pts Span 2.0 MHz Date: 5, DEC, 2023 16:54:49	/
Middle channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT  CF 2.441 GHz 501 pts Span 2.0 MHz Date: 5, DEC, 2023 16:53:42	/
High channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT  CF 2.48 GHz 501 pts Span 2.0 MHz Date: 5, DEC, 2023 17:02:38	/



99% Occupied Bandwidth:

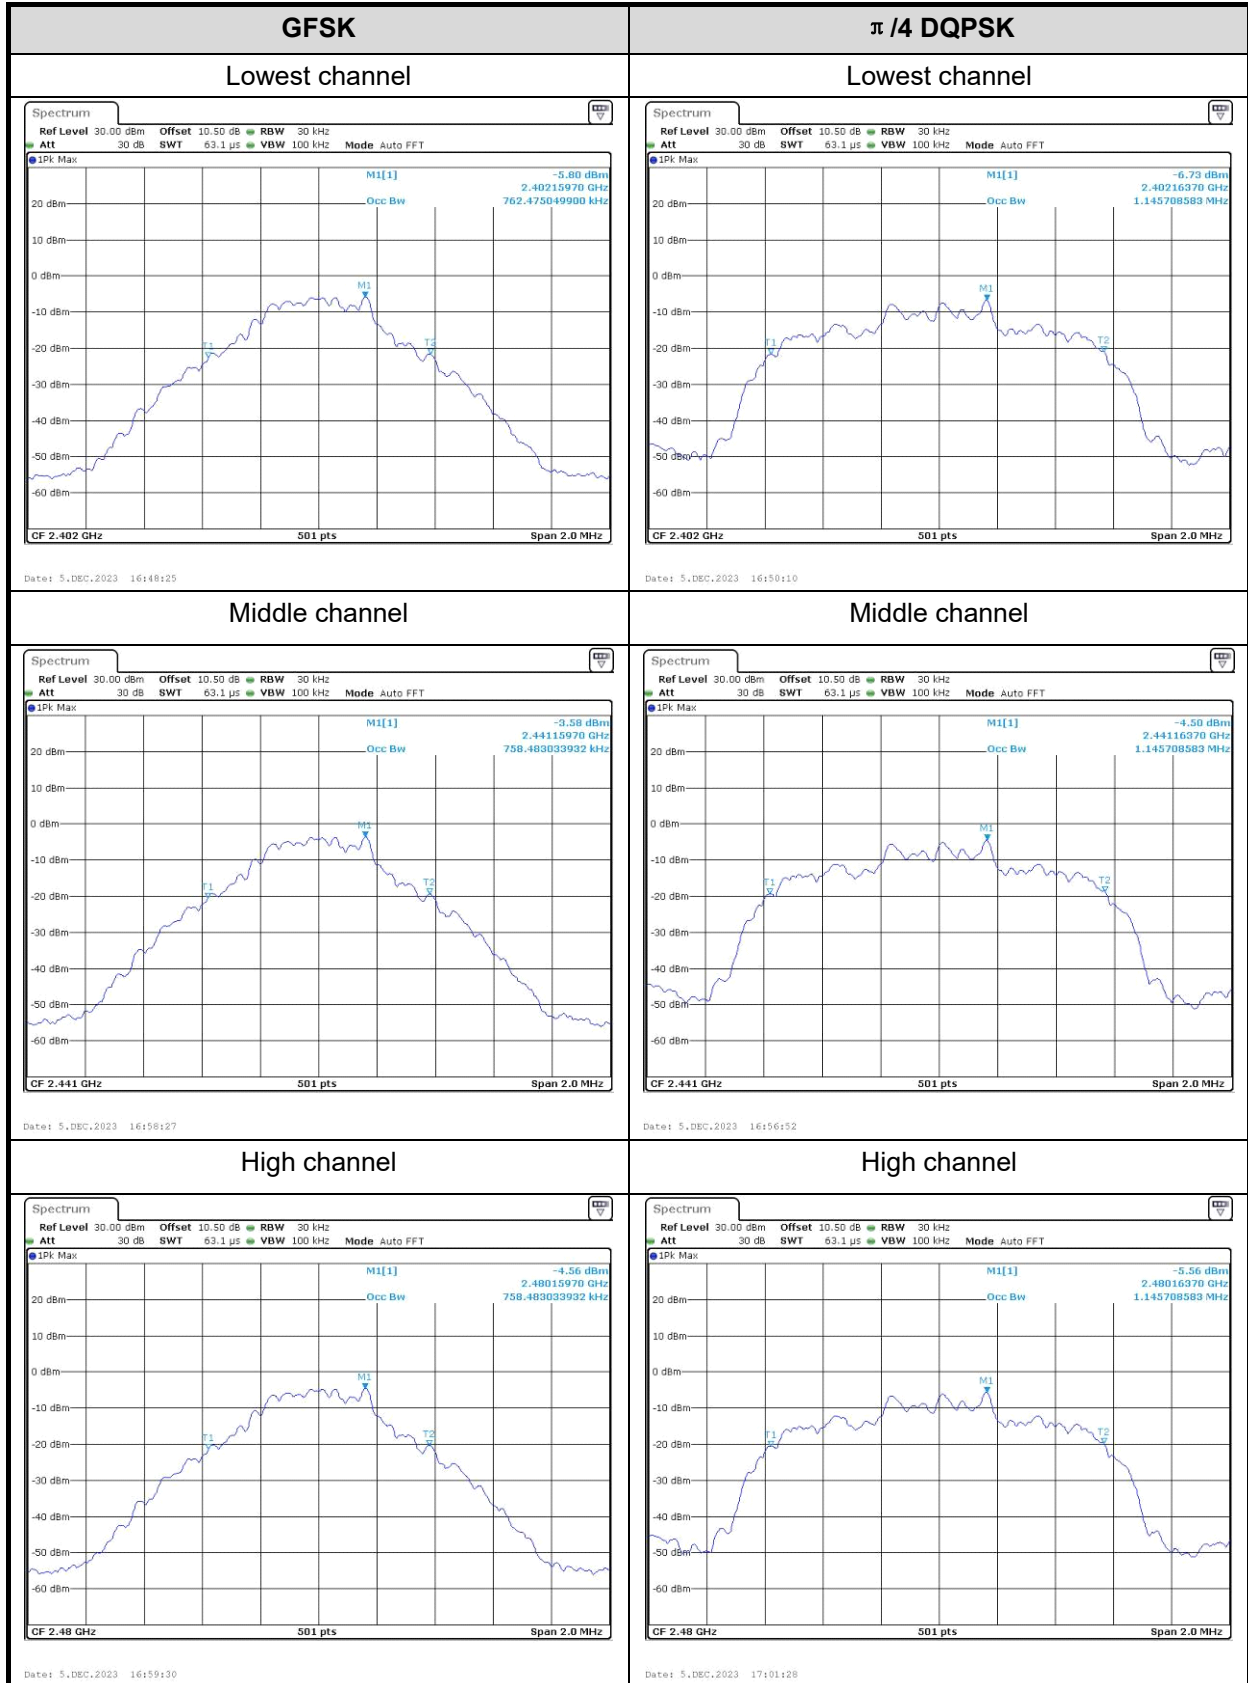

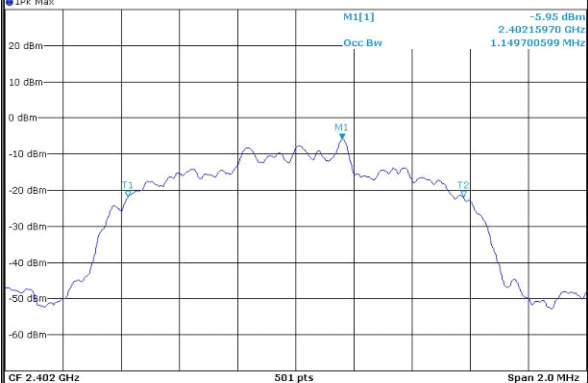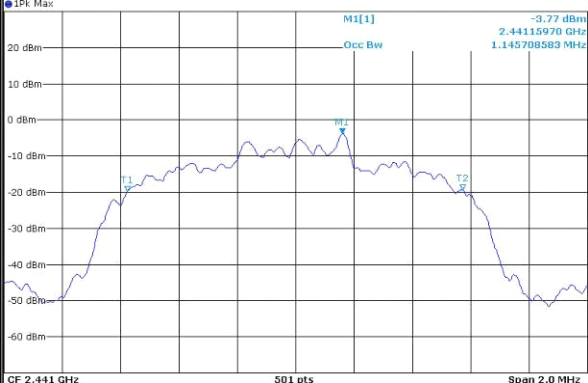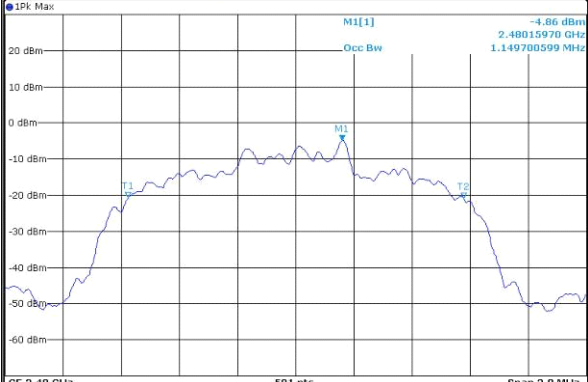
8DPSK	/
Lowest channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT 1PK Max  CF 2.402 GHz 501 pts Span 2.0 MHz Date: 5.DEC.2023 16:55:01	/
Middle channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT 1PK Max  CF 2.441 GHz 501 pts Span 2.0 MHz Date: 5.DEC.2023 16:53:53	/
High channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT 1PK Max  CF 2.48 GHz 501 pts Span 2.0 MHz Date: 5.DEC.2023 17:02:53	/




Maximum Conducted Peak Output Power:

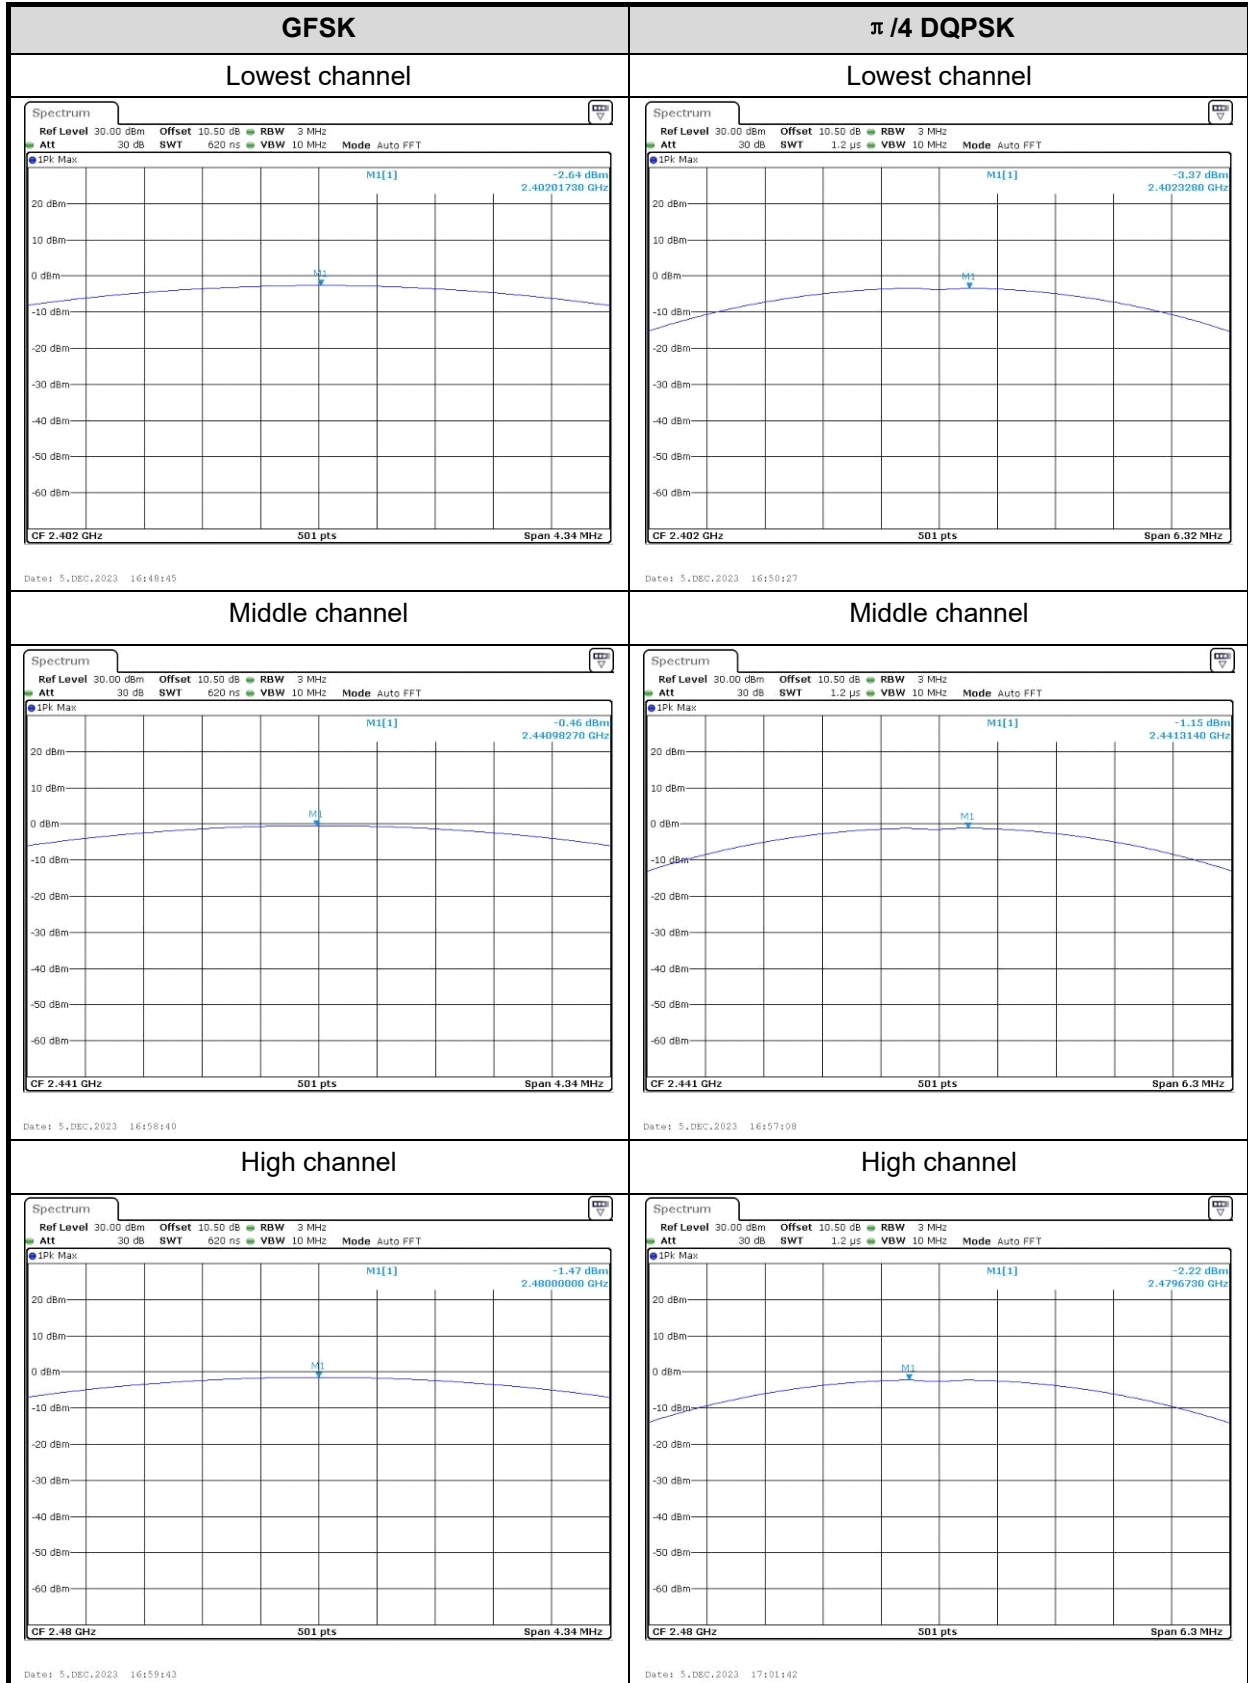

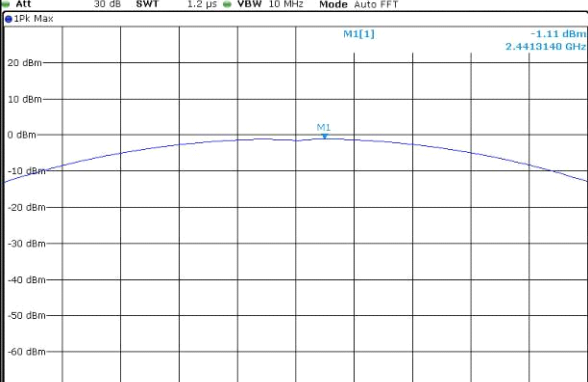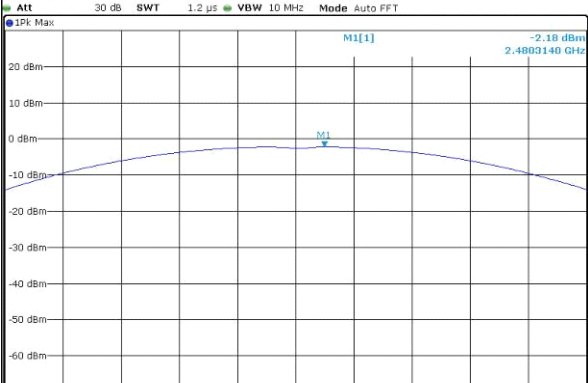
8DPSK	/
Lowest channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 3 MHz Att 30 dB SWT 1.2 μs VBW 10 MHz Mode Auto FFT IPK Max  CF 2.402 GHz 501 pts Span 6.3 MHz Date: 5.DEC.2023 16:55:20	/
Middle channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 3 MHz Att 30 dB SWT 1.2 μs VBW 10 MHz Mode Auto FFT IPK Max  CF 2.441 GHz 501 pts Span 6.3 MHz Date: 5.DEC.2023 16:54:10	/
High channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 3 MHz Att 30 dB SWT 1.2 μs VBW 10 MHz Mode Auto FFT IPK Max  CF 2.48 GHz 501 pts Span 6.3 MHz Date: 5.DEC.2023 17:03:10	/

Channel separation:

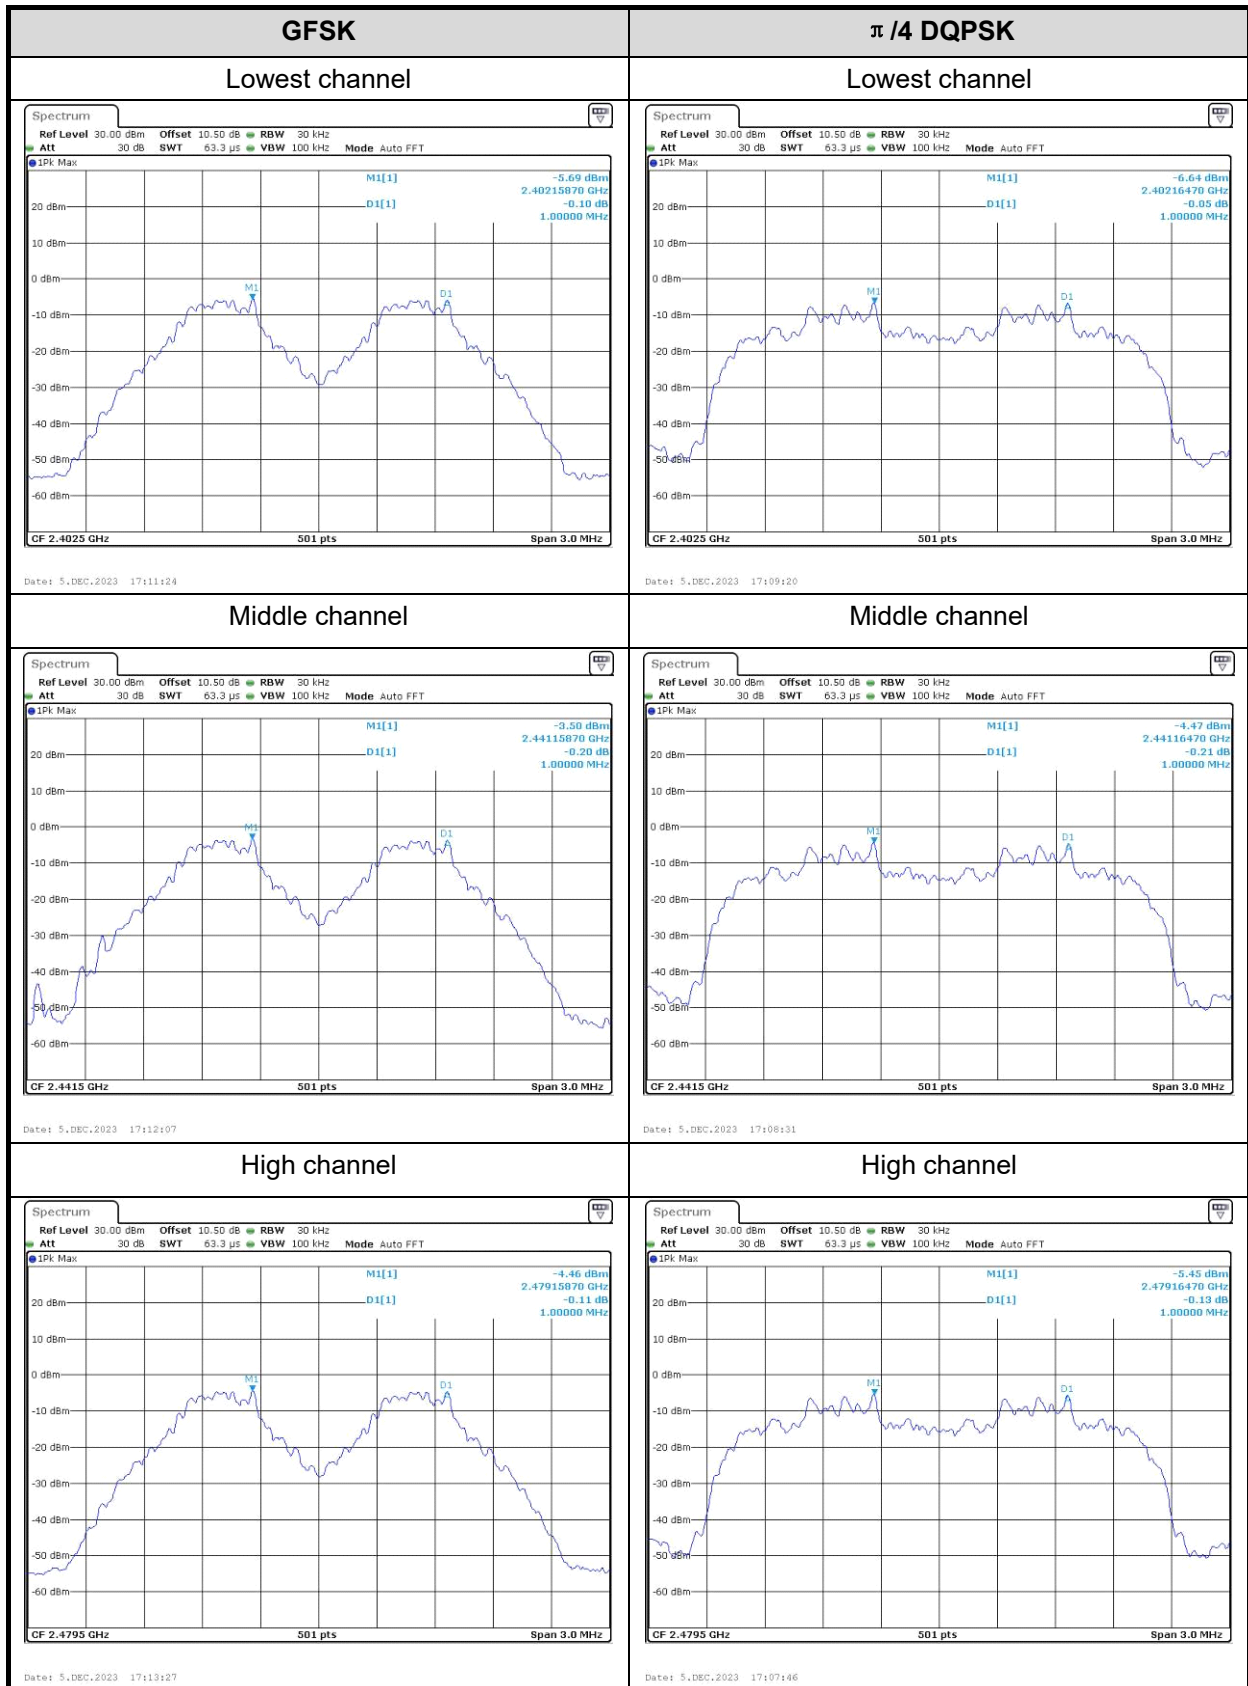


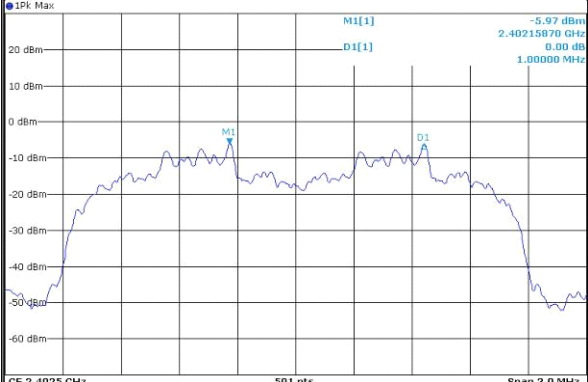
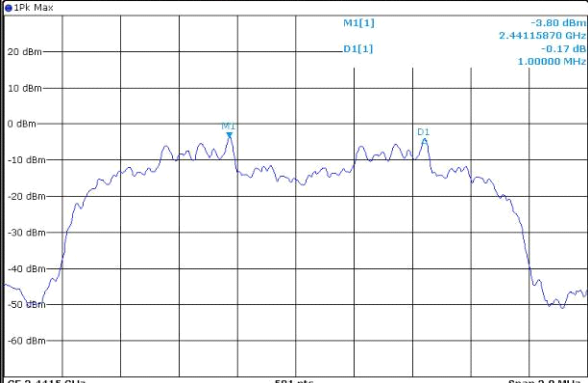
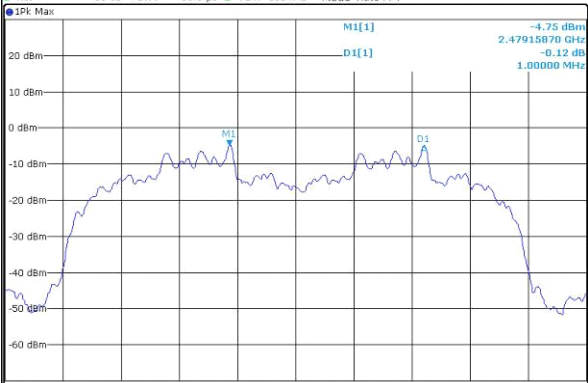
8DPSK	/
Lowest channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.3 μs VBW 100 kHz Mode Auto FFT 1PK Max  M1[1] -5.97 dBm 2.40215870 GHz 0.00 dB 1.00000 MHz CF 2.4025 GHz 501 pts Span 3.0 MHz Date: 5.DEC.2023 17:04:29	/
Middle channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.3 μs VBW 100 kHz Mode Auto FFT 1PK Max  M1[1] -5.80 dBm 2.44115870 GHz -0.17 dB 1.00000 MHz CF 2.4415 GHz 501 pts Span 3.0 MHz Date: 5.DEC.2023 17:05:15	/
High channel	/
Spectrum Ref Level 30.00 dBm Offset 10.50 dB RBW 30 kHz Att 30 dB SWT 63.3 μs VBW 100 kHz Mode Auto FFT 1PK Max  M1[1] -4.75 dBm 2.47915870 GHz -0.12 dB 1.00000 MHz CF 2.4795 GHz 501 pts Span 3.0 MHz Date: 5.DEC.2023 17:06:23	/

Number of hopping Frequency

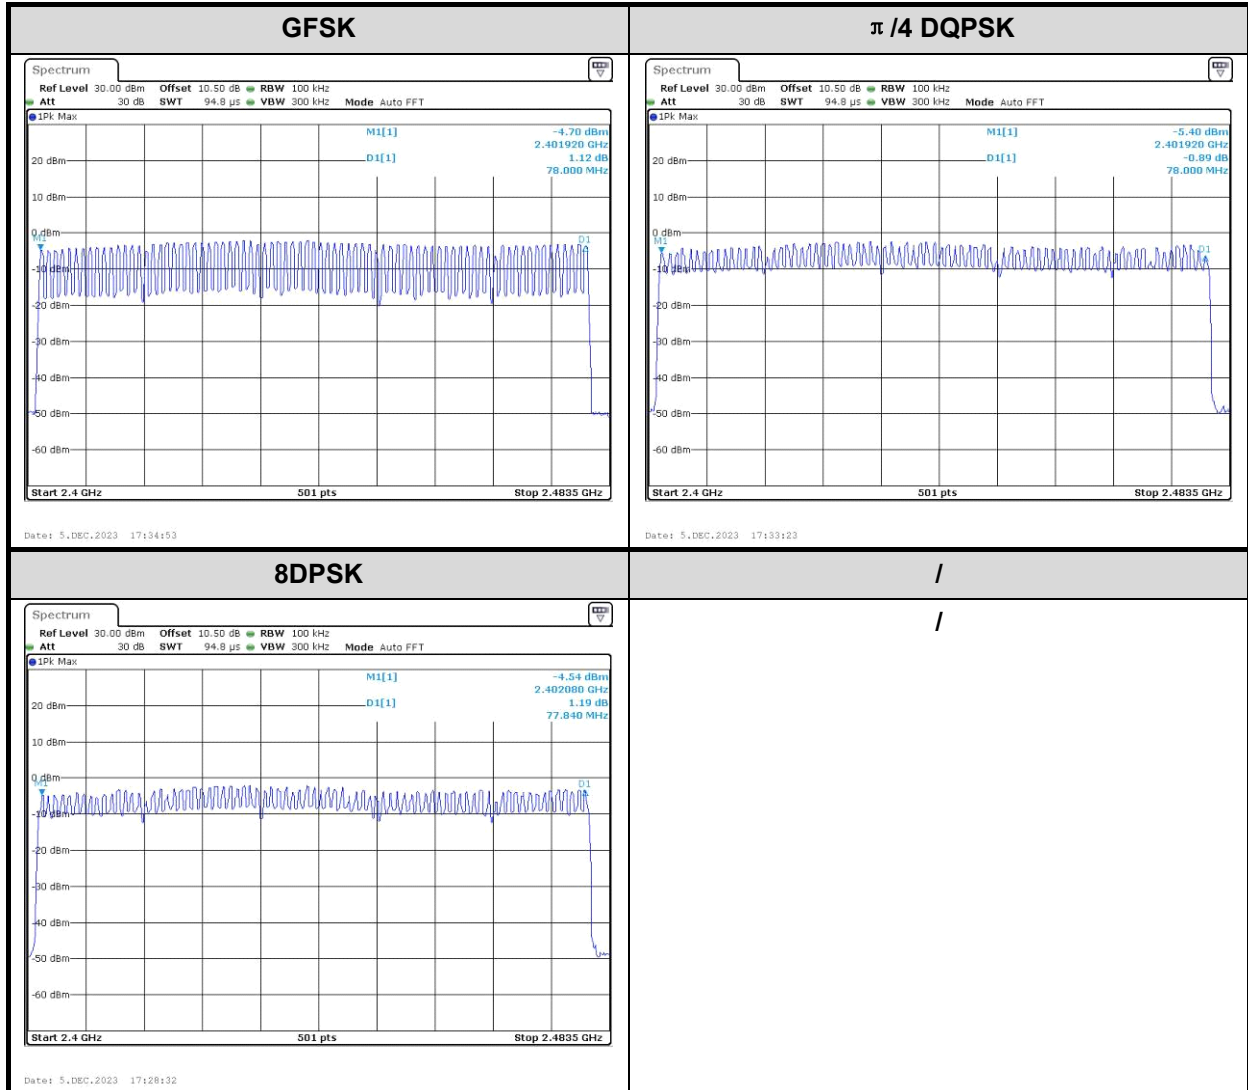


Time of occupancy (dwell time)

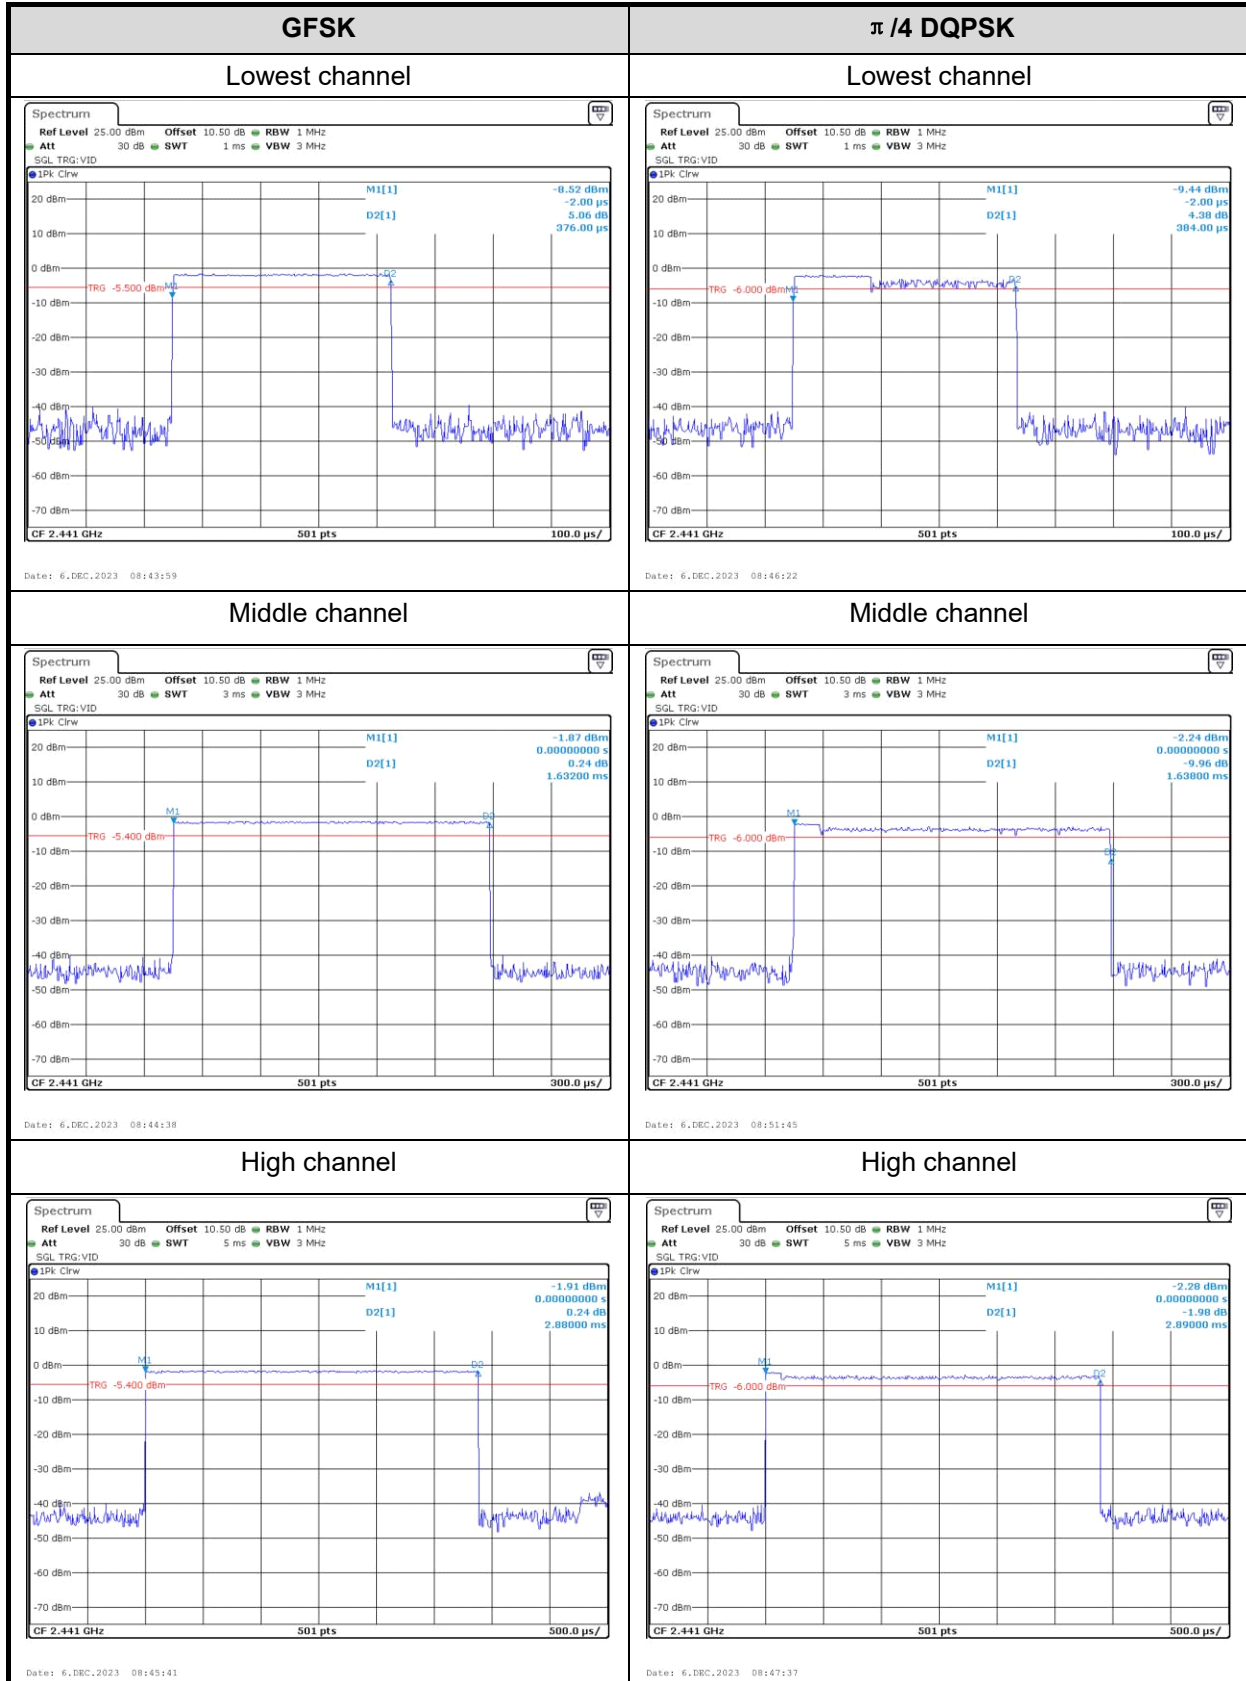

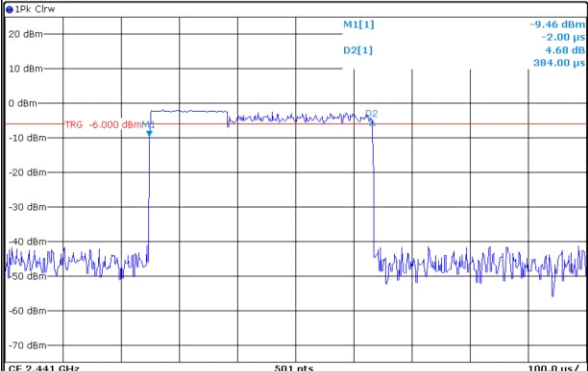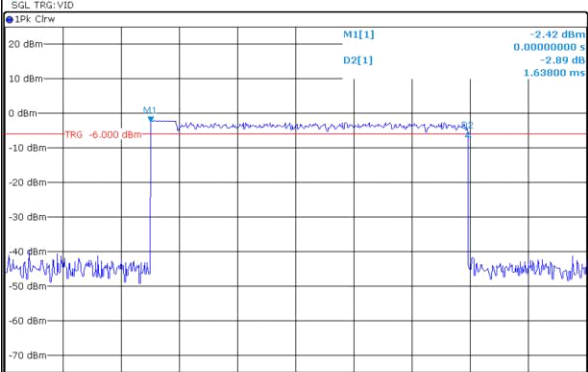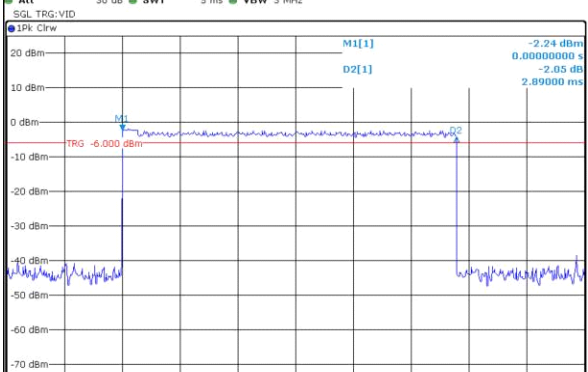8DPSK	/
Lowest channel	/
Spectrum Ref Level 25.00 dBm Offset 10.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz SQL TRG:VID  M1[1] -9.46 dBm D2[1] 2.00 µs 4.68 dB 384.00 µs TRG -6.000 dBm CF 2.441 GHz 501 pts 100.0 µs/ Date: 6, DEC, 2023 08:48:11	/
Middle channel	/
Spectrum Ref Level 25.00 dBm Offset 10.50 dB RBW 1 MHz Att 30 dB SWT 3 ms VBW 3 MHz SQL TRG:VID  M1[1] -2.42 dBm D2[1] 0.00000000 s -2.89 dB 1.63800 ms TRG -6.000 dBm CF 2.441 GHz 501 pts 300.0 µs/ Date: 6, DEC, 2023 08:48:43	/
High channel	/
Spectrum Ref Level 25.00 dBm Offset 10.50 dB RBW 1 MHz Att 30 dB SWT 5 ms VBW 3 MHz SQL TRG:VID  M1[1] -2.24 dBm D2[1] 0.00000000 s -2.05 dB 2.89000 ms TRG -6.000 dBm CF 2.441 GHz 501 pts 500.0 µs/ Date: 6, DEC, 2023 08:49:15	/


100kHz Bandwidth of Frequency Band Edge:

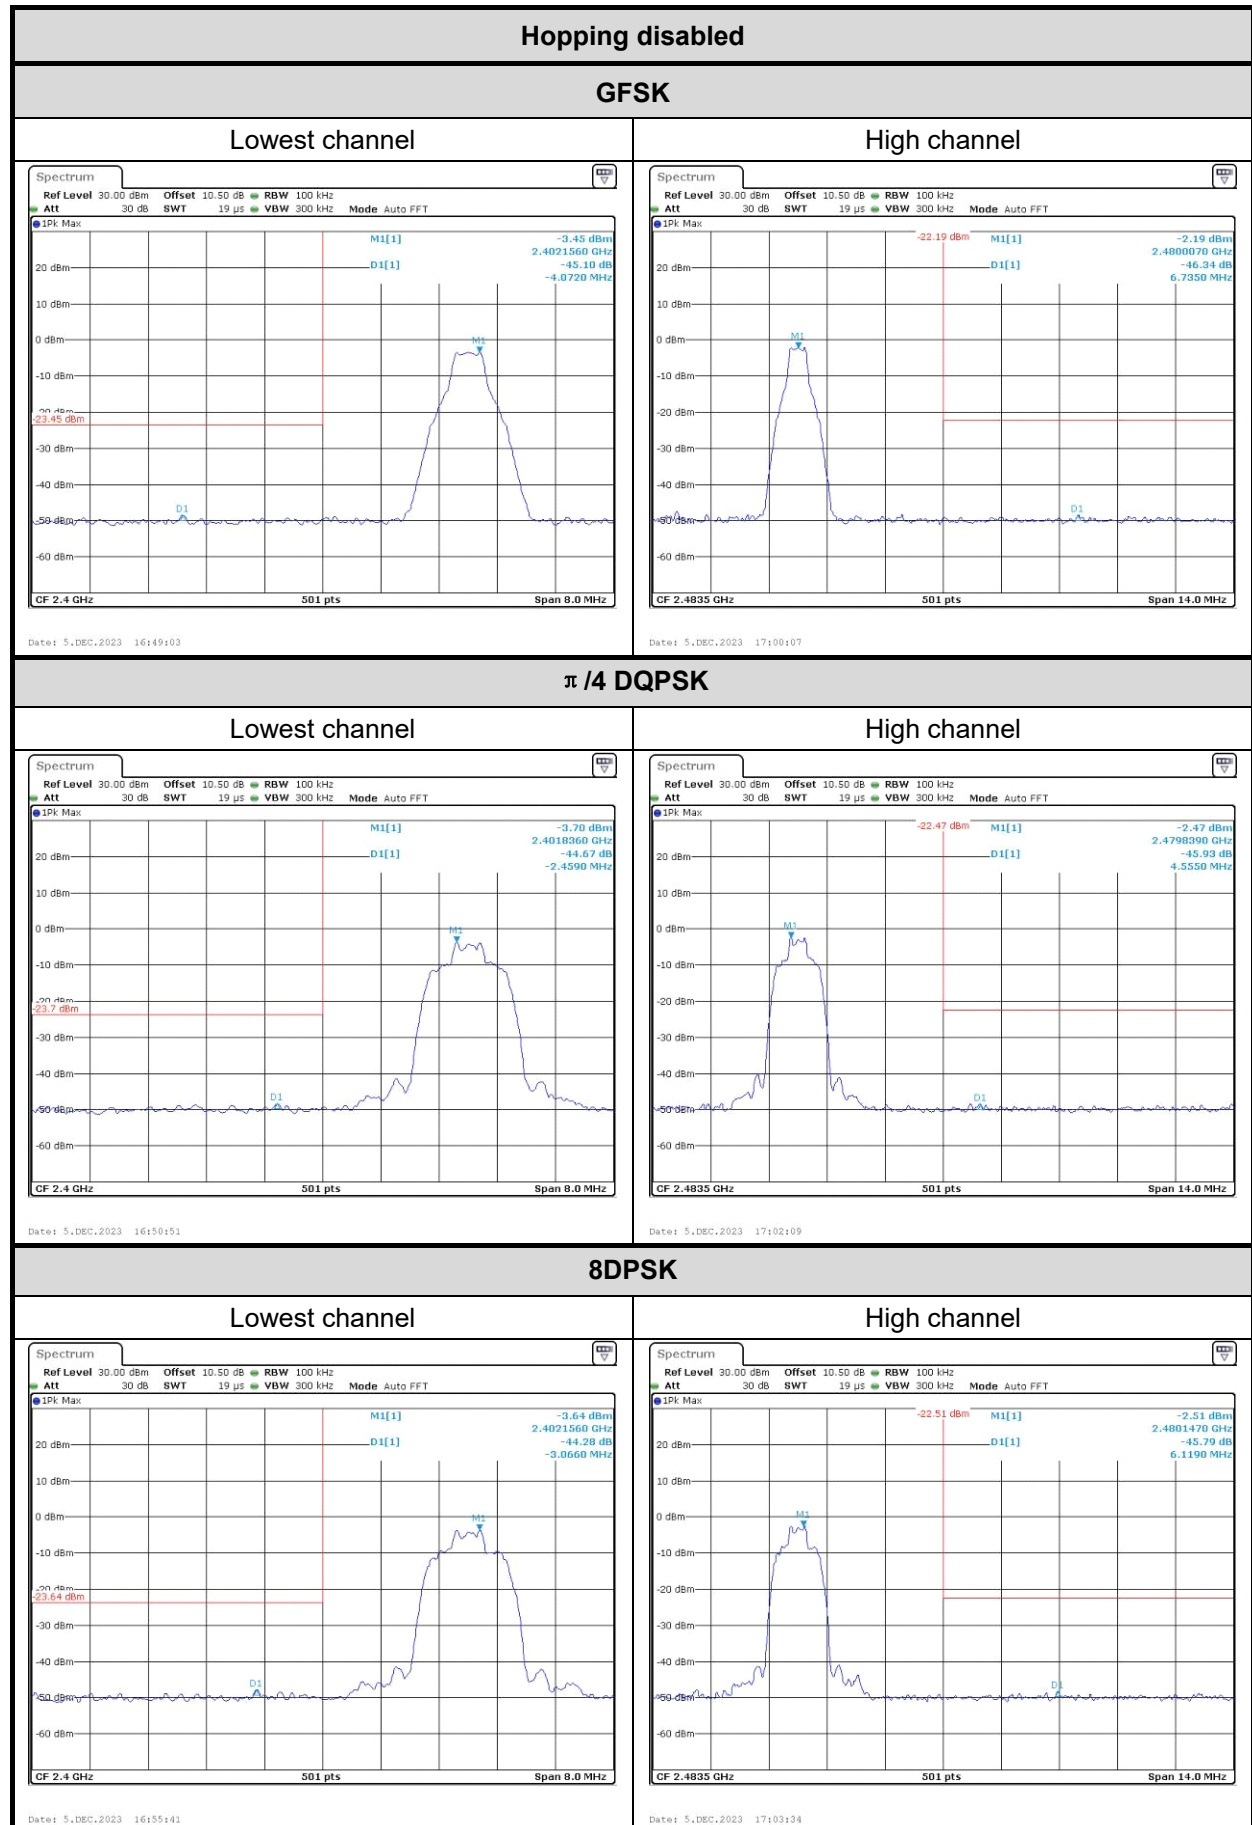

Hopping enabled


GFSK

Lowest channel

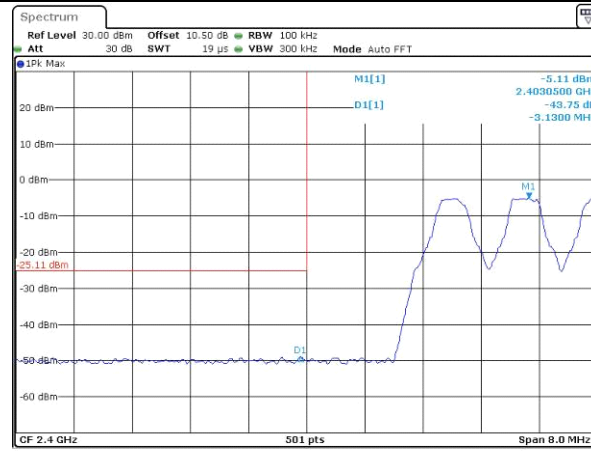

Date: 5, DEC, 2023 17:17:42


High channel

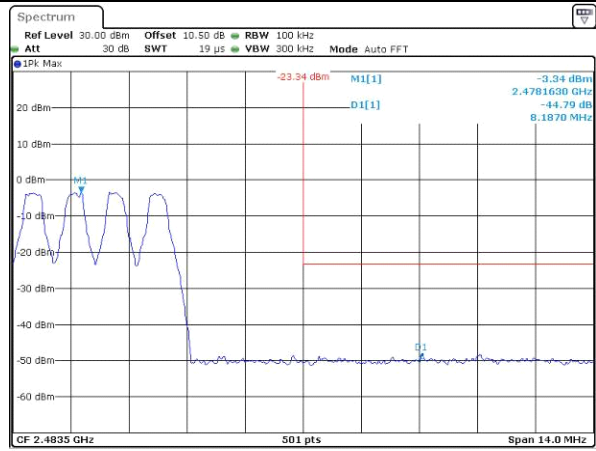

Date: 5, DEC, 2023 17:18:36


$\pi/4$ DQPSK

Lowest channel

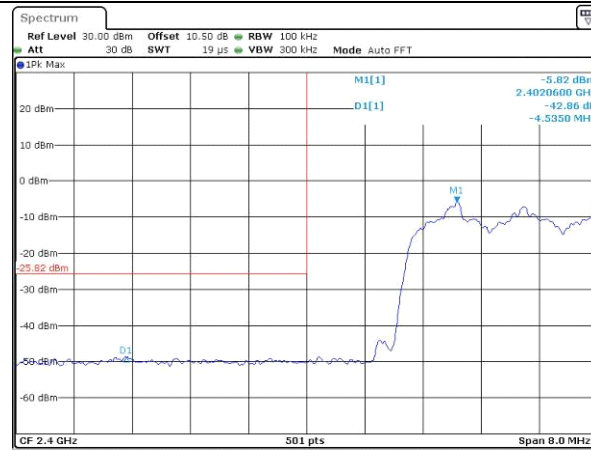

Date: 5, DEC, 2023 17:19:39


High channel

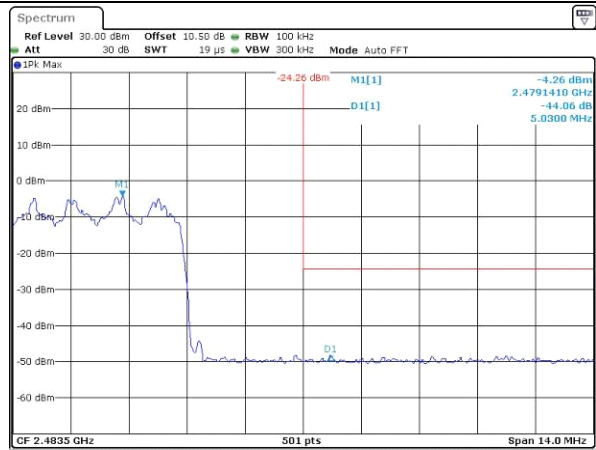

Date: 5, DEC, 2023 17:20:35


8DPSK

Lowest channel

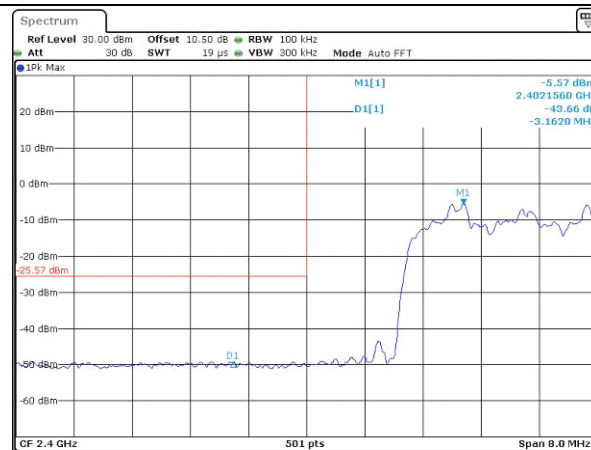

Date: 5, DEC, 2023 17:22:22

High channel

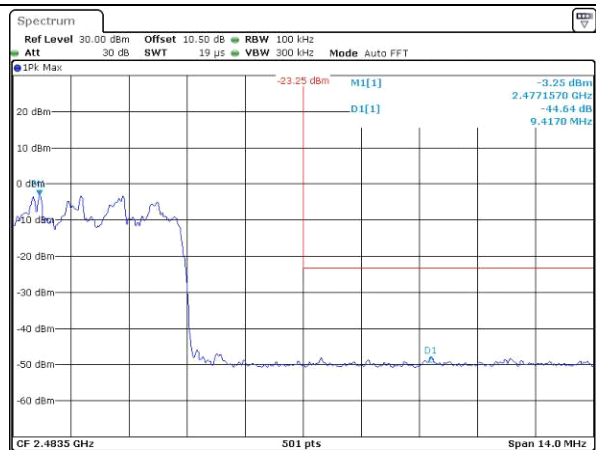

Date: 5, DEC, 2023 17:22:59

4 Test Setup Photo

Please refer to the attachment RWAY202300045 Test Setup photo.

5 E.U.T Photo

Please refer to the attachment RWAY202300045 External photo and RWAY202300045 Internal photo.

---End of Report---