

FCC Test Report

Report No.: RWAY202300045M
Applicant: Shenzhen Youmi Intelligent Technology Co., Ltd.
Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Product Name: Smart phone
Product Model: PG2309GBA
Multiple Models: N/A
Trade Mark: UMIDIGI
FCC ID: 2ATZ4-G65GA
Standards: FCC CFR Title 47 Part 15C (§15.225)
Test Date: 2023-11-16~2024-02-22
Test Result: Complied
Report Date: 2024-03-01
Reviewed by:

Frank Yin

Frank Yin
Project Engineer

Approved by

Jacob Kong

Jacob Kong
Manager

Prepared by:

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing and Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-03-01	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Test Setup.....	7
2.4	Test Procedure	8
2.5	Measurement Method.....	10
2.6	Measurement Equipment	10
3	Test Results	11
3.1	Test Summary.....	11
3.2	Limit	11
3.3	AC Line Conducted Emissions Test Data.....	12
3.4	Radiated emission Test Data.....	14
3.5	Frequency Stability Test Data.....	19
3.6	Bandwidth Test Data.....	20
4	Test Setup Photo	21
5	E.U.T Photo	22

1 General Information

1.1 Client Information

Applicant:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Manufacturer:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

1.2 Product Description of EUT

The EUT is Smart phone that contains Classic Bluetooth(BDR/EDR), BLE, 2.4G/5G WLAN, NFC, GSM/GPRS/EGPRS/WCDMA/LTE and 5G NR radios, this report covers the full testing of the NFC radios.

Sample Serial Number	2W-1 for CE&RE test, 2W-2 for RF test conducted test (assigned by WATC)
Sample Received Date	2023-11-15
Sample Status	Good Condition
Frequency Range	13.56MHz
Maximum E-field Strength:	69.68dBuV/m@3m
Modulation Technology	ASK
Antenna Gain [#]	Unknown
Spatial Streams [#]	SISO (1TX, 1RX)
Power Supply	DC5V from adapter or DC3.87 V from battery
Adapter 1 Information	Model: HJ-0502000W2-US Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5V, 2A
Adapter 2 Information	Model: HF-0502000U Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5.0V, 2A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
Device Antenna information:	
The antenna is an internal antenna which cannot replace by end-user. Please see product internal photos for details.	

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: 2ATZ4-G65GA
 FCC Part 15, Subpart C, Equipment Class: DSS, FCC ID: 2ATZ4-G65GA
 FCC Part 15, Subpart E, Equipment Class: NII, FCC ID: 2ATZ4-G65GA
 FCC Part 22H/24E/27, Equipment Class: PCE, FCC ID: 2ATZ4-G65GA

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Bandwidth		0.34%
Frequency Error		150Hz
Note 1: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. Note 2: The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)		

1.6 Laboratory Location

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: qa@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	13.56	/	/	/	/
According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, the above frequency listed above was tested.					

Test Mode:			
Transmitting mode:	Keep the EUT in continuous transmitting with modulation		
Exercise software [#] :	Engineer mode		
Mode:	NFC	Powel Level Setting [#] :	Default
The exercise software and the maximum power setting that provided by manufacturer.			


Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For radiated emission 9kHz-30MHz, investigation was done on the three antenna orientations (parallel, perpendicular, gound-parallel), the worst-case antenna orientation was recorded in report.
For AC power line conducted emission and radiated emission below 1GHz, according to the two adapter test result in BT report, the worst case adapter HJ-0502000W2-US was select to test.

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Test Setup


1) Conducted emission measurement:

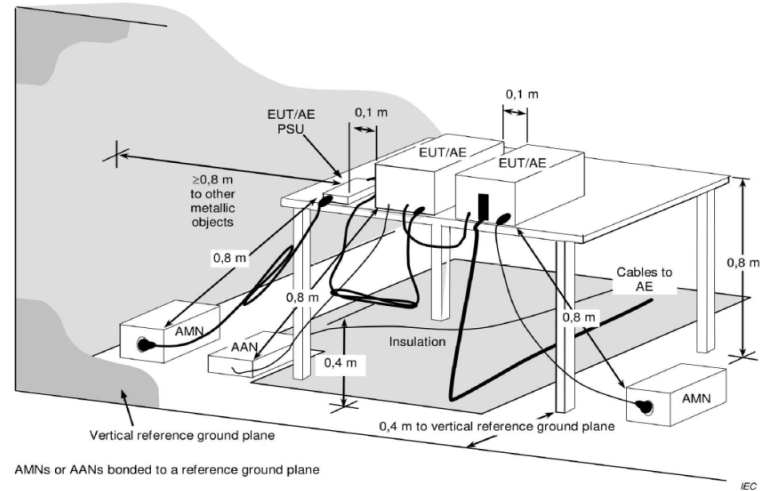


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:


Below 30MHz (3m SAC)

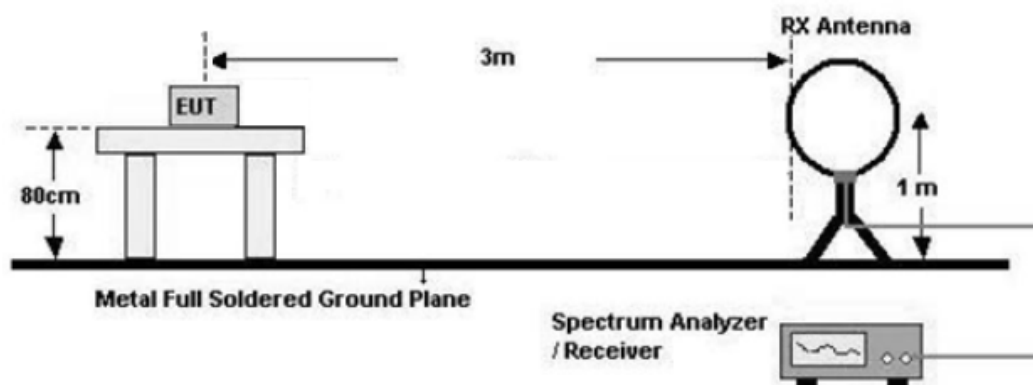

30MHz-1GHz (3m SAC)

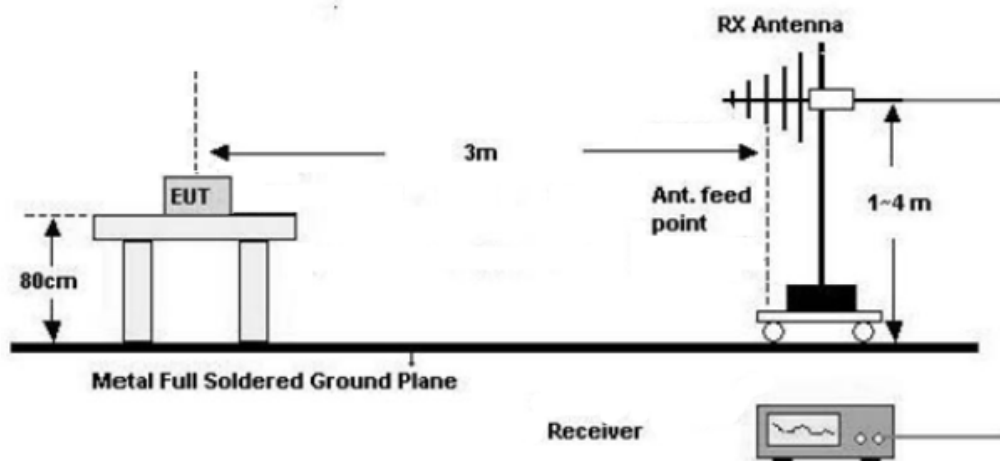

3) Frequency Stability Measurement

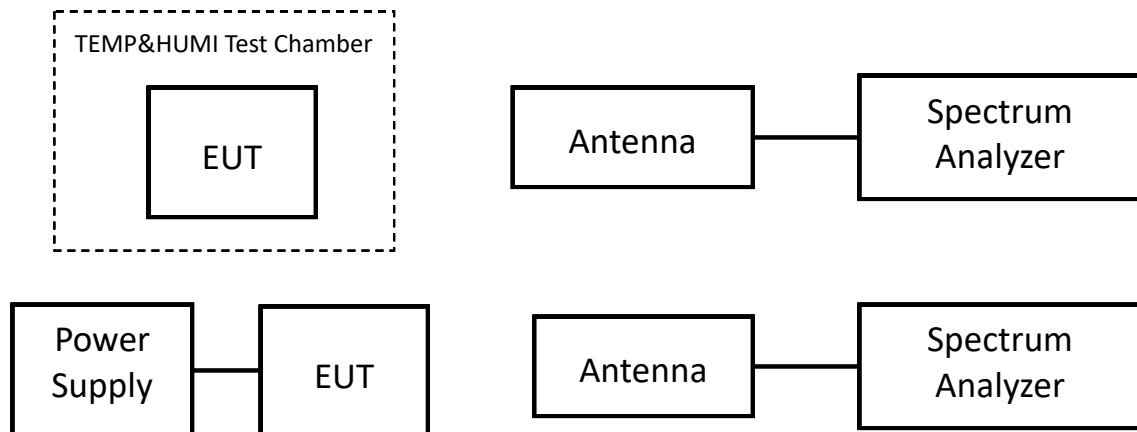

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

Bandwidth Test:

1. Use the same setup for radiated 9kHz ~30MHz, found the maximum fundamental level.
2. Change the spectrum analyzer setting for bandwidth testing
3. Test the bandwidth and record the result

Frequency Stability VS temperature Test:

1. The EUT was supply power with normal voltage and placed in the center of the environmental chamber
2. Adjust the location of the measurement antenna to obtain a suitable signal level in measurement instrument
3. Turn off the EUT and set the temperature control on the chamber to the highest specified in the regulatory requirements and allow the chamber temperature to stabilize.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency
5. Switch OFF the EUT, Lower the chamber temperature by not more that 10 °C, and allow the temperature inside the chamber to stabilize
6. Repeat step 4 and step 5 down to the lowest specified temperature

Frequency Stability VS Voltage Test:

1. EUT was placed at ambient room temperature (+15 °C to +25 °C) and connect to a power source which can varying supply voltage
2. Adjust the location of the measurement antenna to obtain a suitable signal level in measurement instrument
3. Varying the supply voltage at 85% and 115% of the nominal supply voltage, record the operating frequency

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
Field strength of fundamental and Radiated emission	ANSI C63.10-2020 Section 6.3&6.4&6.5
20dB Emission Bandwidth	ANSI C63.10-2020 Section 6.9.2
Frequency Stability	ANSI C63.10-2020 Section 6.8

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE& SCHWARZ	EMI TEST RECEIVER	ESR	101817	2023/7/3	2024/7/2
R&S	LISN	ENV216	101748	2023/8/1	2024/7/30
N/A	Coaxial Cable	NO.12	N/A	2023/7/3	2024/7/2
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2427/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
Frequency Stability					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2427/2/6
N/A	Coaxial Cable	NO.11	N/A	2023/8/8	2024/8/7
BACL	TEMP&HUMI Test Chamber	BTH-150	30022	2023/7/12	2024/7/11
FLUKE	Digital Multimeter	15B+	N/A	2023/7/12	2024/7/11

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary


FCC/ISED Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.225	Field strength of fundamental and Radiated emission	Compliance
§15.225(e)	Frequency Stability	Compliance
FCC §15.215(c)	20dB Emission Bandwidth	Compliance

3.2 Limit

Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)
Field strength of fundamental and Radiated emission	(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.
Frequency Stability	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
20dB Emission Bandwidth	contained within the frequency band designated

3.3 AC Line Conducted Emissions Test Data

Test Date:	2023-11-16	Test By:	Lirou Li
Environment condition:	Temperature: 20.9°C; Relative Humidity:34%; ATM Pressure: 101.2kPa		

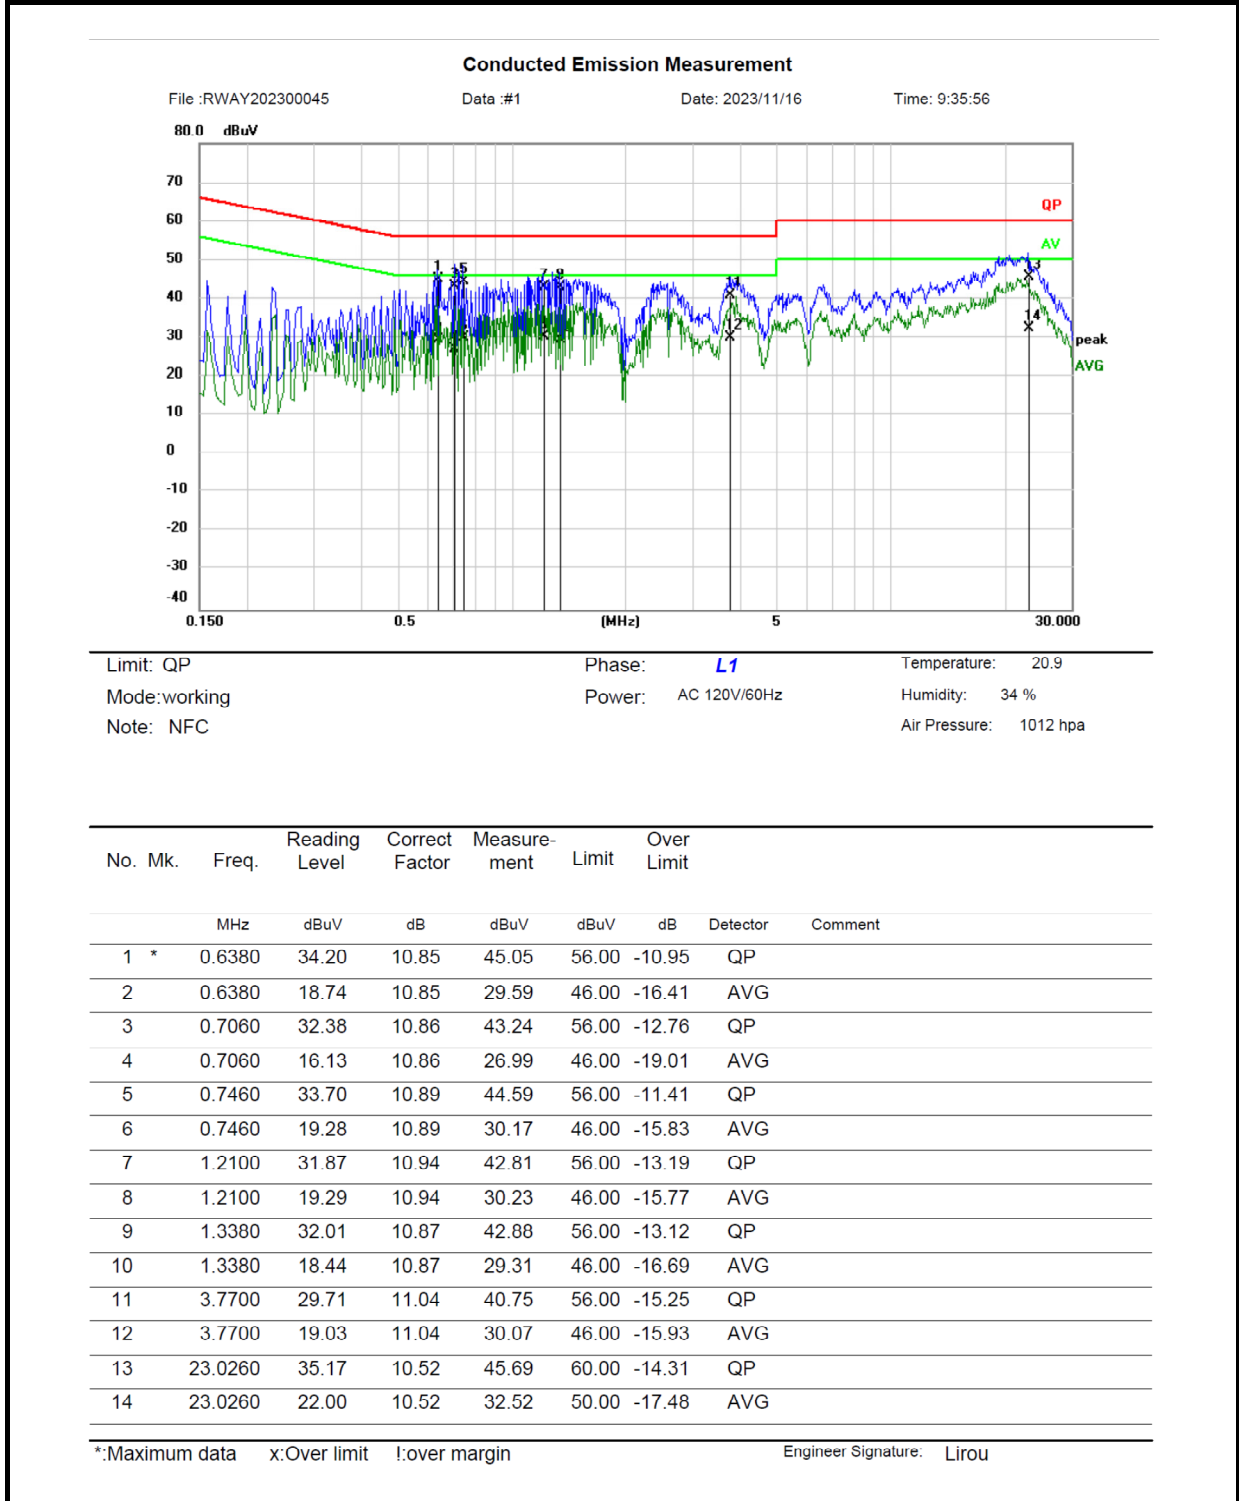


Conducted Emission Measurement

File :RWAY202300045

Data :#2

Date: 2023/11/16

Time: 9:44:57

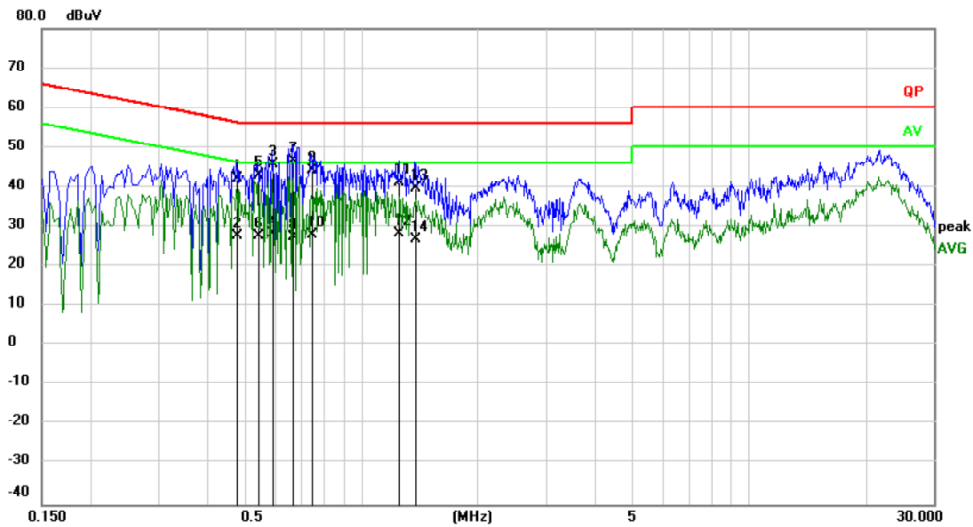

Limit: QP
Mode: working
Note: NFC

Phase: **N**
Power: AC 120V/60Hz

Temperature: 20.9
Humidity: 34 %
Air Pressure: 1012 hpa

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over Limit		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.4780	31.38	10.70	42.08	56.37	-14.29	QP	
2	0.4780	17.05	10.70	27.75	46.37	-18.62	AVG	
3	0.5899	35.04	10.65	45.69	56.00	-10.31	QP	
4	0.5899	17.64	10.65	28.29	46.00	-17.71	AVG	
5	0.5420	32.19	10.68	42.87	56.00	-13.13	QP	
6	0.5420	17.06	10.68	27.74	46.00	-18.26	AVG	
7 *	0.6660	36.09	10.58	46.67	56.00	-9.33	QP	
8	0.6660	16.92	10.58	27.50	46.00	-18.50	AVG	
9	0.7460	33.59	10.58	44.17	56.00	-11.83	QP	
10	0.7460	17.50	10.58	28.08	46.00	-17.92	AVG	
11	1.2540	30.55	10.67	41.22	56.00	-14.78	QP	
12	1.2540	17.47	10.67	28.14	46.00	-17.86	AVG	
13	1.3779	29.09	10.67	39.76	56.00	-16.24	QP	
14	1.3779	15.98	10.67	26.65	46.00	-19.35	AVG	

*:Maximum data x:Over limit !:over margin

Engineer Signature: Lirou

Remark:

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)

Correct Factor (dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)


Over = Measurement – Limit


3.4 Radiated emission Test Data

9 kHz-30MHz:

Test Date:	2024-02-22	Test By:	Luke Li
Environment condition:	Temperature: 22.4°C; Relative Humidity:70%; ATM Pressure: 101kPa		

Worst case antenna orientation:

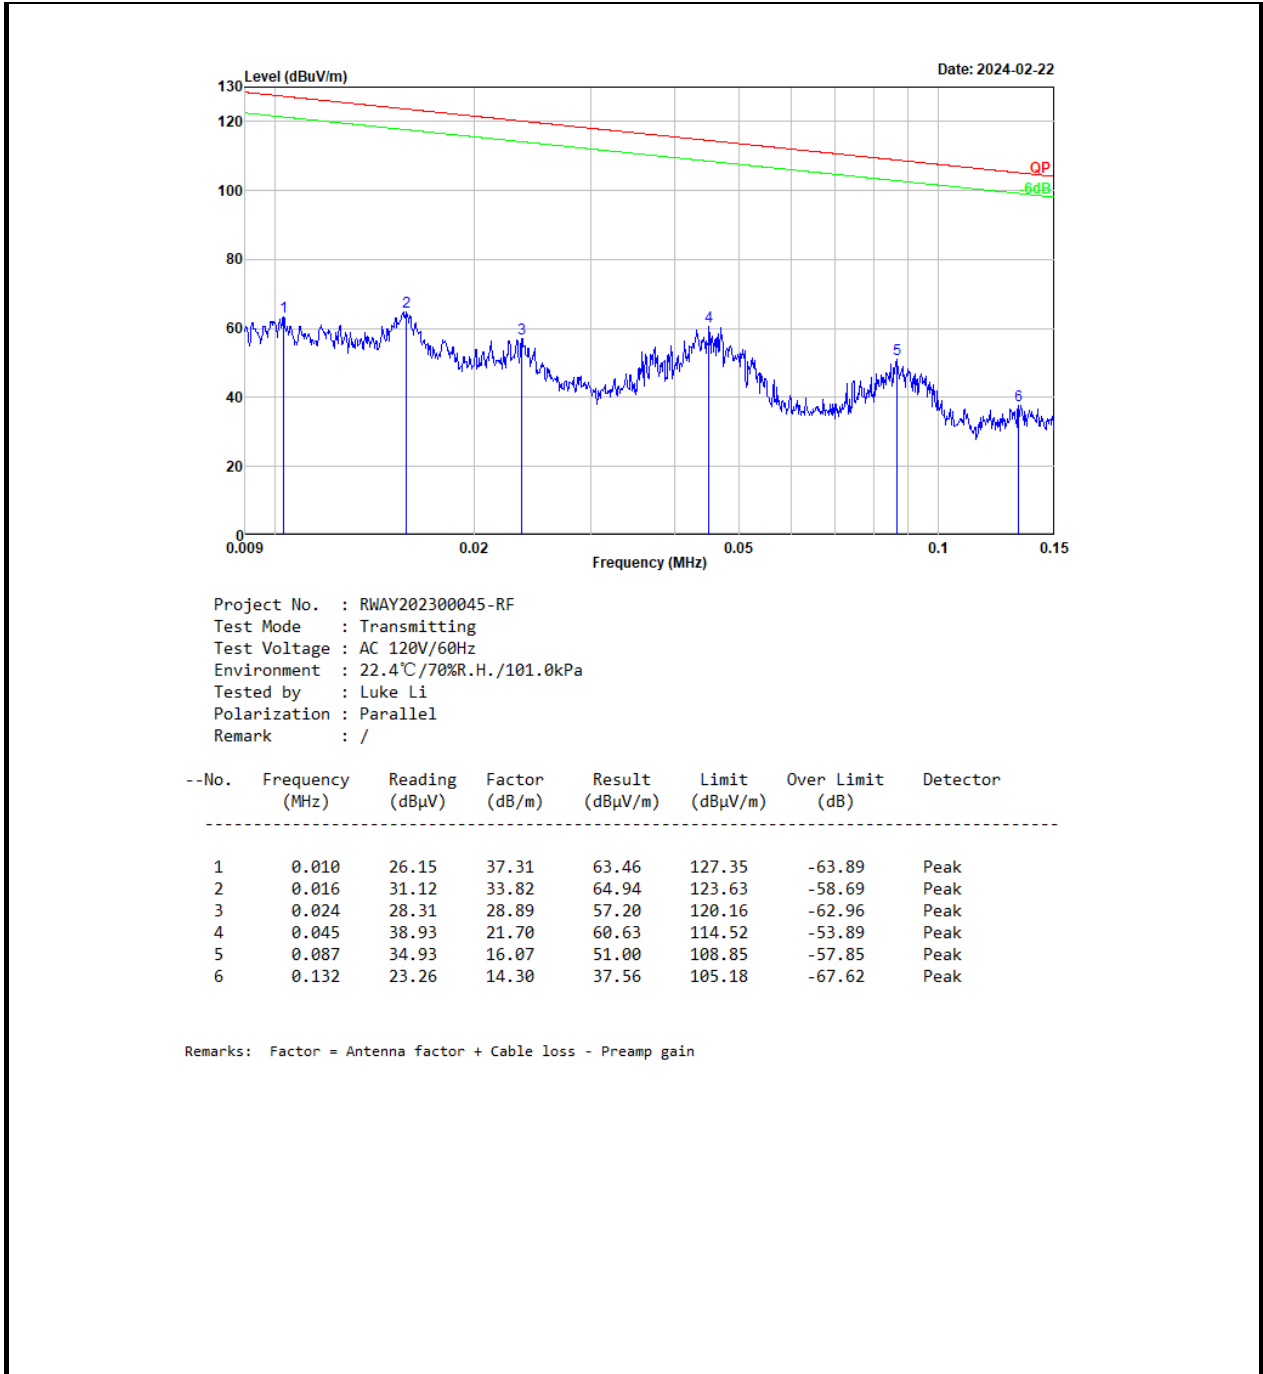


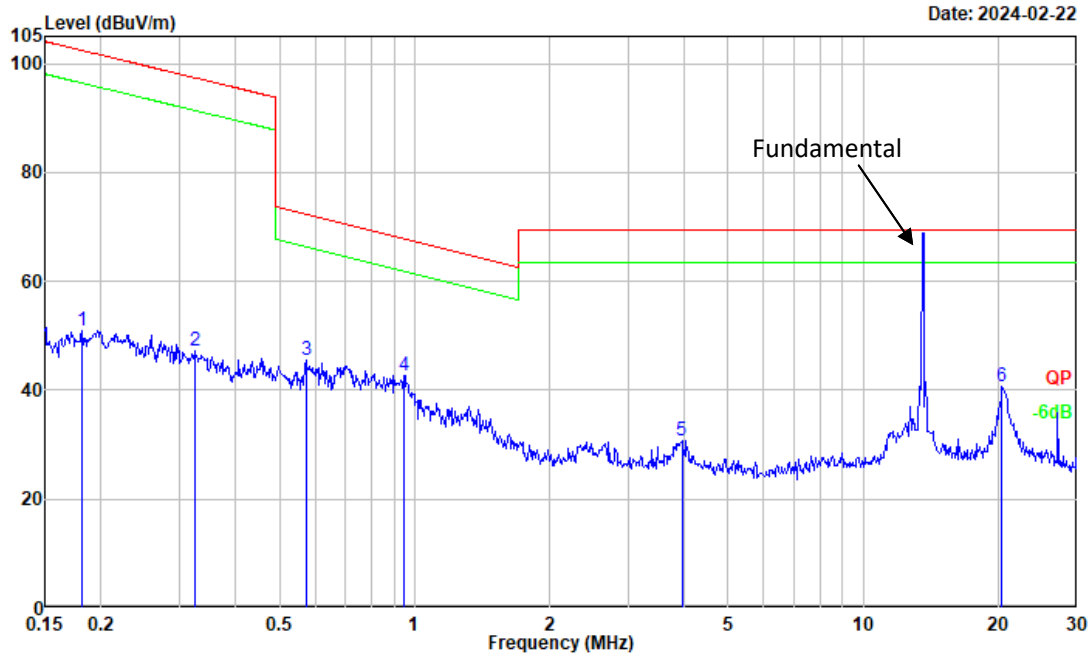

Project No. : RWAY202300045-RF
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 22.4°C/70%R.H./101.0kPa
Tested by : Luke Li
Polarization : Parallel
Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	0.182	38.11	12.92	51.03	102.43	-51.40	Peak
2	0.323	38.14	9.16	47.30	97.41	-50.11	Peak
3	0.573	40.59	5.02	45.61	72.41	-26.80	Peak
4	0.948	41.59	1.12	42.71	67.95	-25.24	Peak
5	3.943	34.57	-3.71	30.86	69.54	-38.68	Peak
6	20.377	43.99	-3.24	40.75	69.54	-28.79	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

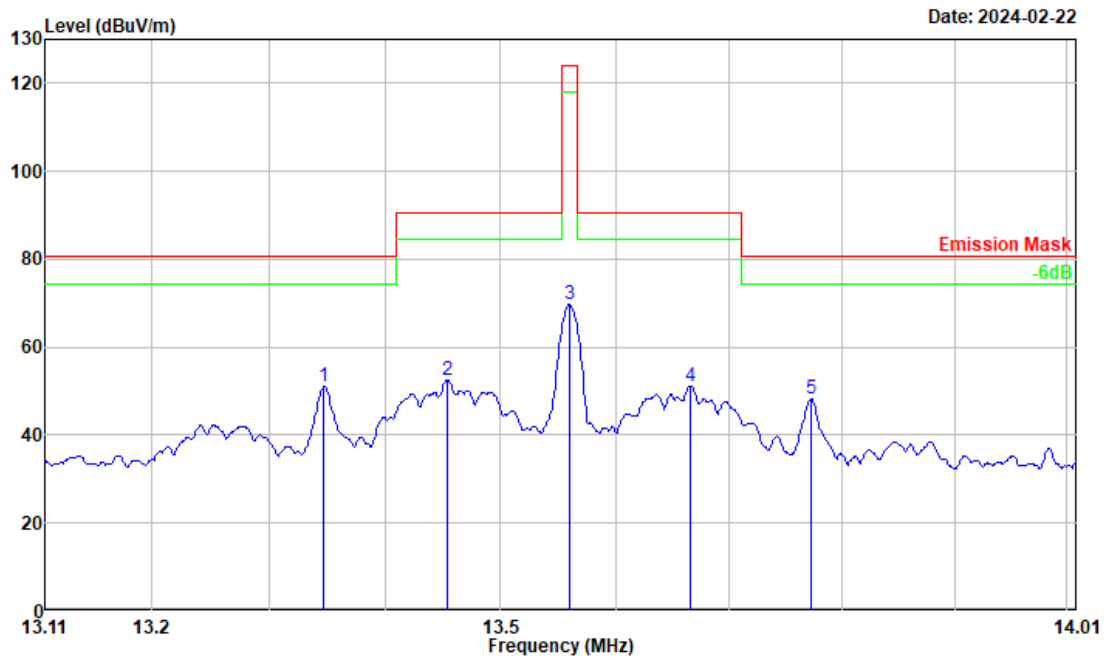


Project No. : RWAY202300045-RF
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 22.4°C / 70%R.H. / 101.0kPa
Tested by : Luke Li
Polarization : Parallel
Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	13.348	54.47	-3.50	50.97	80.51	-29.54	Peak
2	13.454	56.11	-3.52	52.59	90.47	-37.88	Peak
3	13.560	73.21	-3.53	69.68	124.00	-54.32	Peak
4	13.666	54.76	-3.55	51.21	90.47	-39.26	Peak
5	13.772	51.87	-3.57	48.30	80.51	-32.21	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

30MHz-1GHz:


Test Date:	2024-02-01	Test By:	Luke Li
Environment condition:	Temperature: 23.6°C; Relative Humidity:64%; ATM Pressure: 101.2kPa		

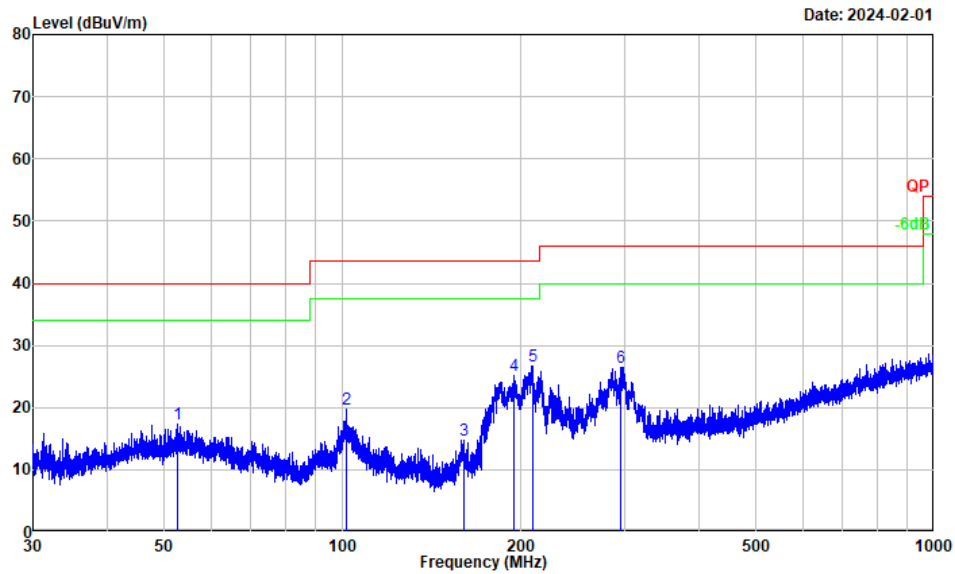

Project No. : RWAY202300045
 Test Mode : Transmitting
 Test Voltage : AC 120V/60Hz
 Environment : 23.6°C/64%R.H./101.2kPa
 Tested by : Luke Li
 Polarization : horizontal
 Remark : NFC

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	52.529	29.62	-12.28	17.34	40.00	-22.66	Peak
2	101.600	33.75	-14.12	19.63	43.50	-23.87	Peak
3	160.698	31.59	-16.82	14.77	43.50	-28.73	Peak
4	195.393	39.14	-14.08	25.06	43.50	-18.44	Peak
5	209.405	40.59	-13.91	26.68	43.50	-16.82	Peak
6	294.630	38.03	-11.50	26.53	46.00	-19.47	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

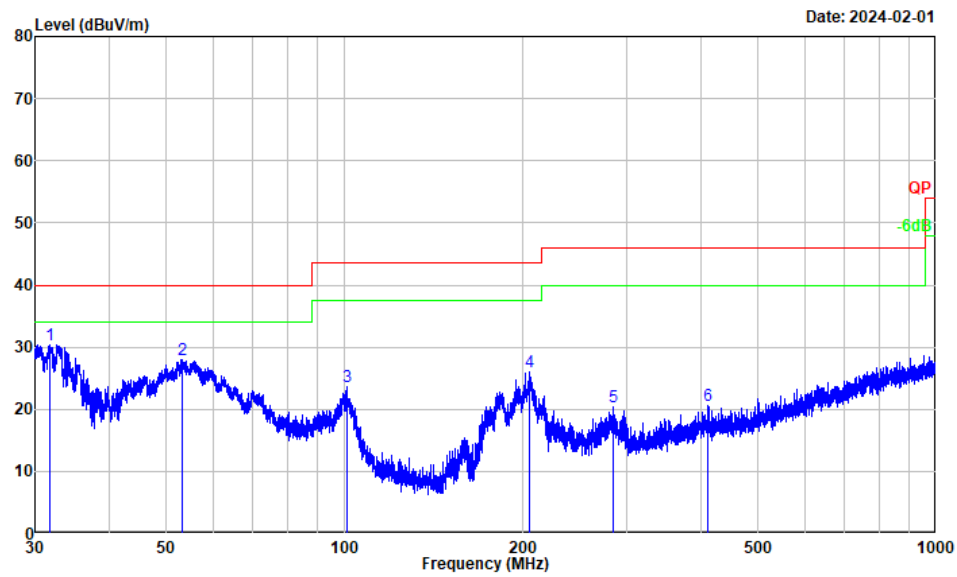

Project No. : RWAY202300045
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 23.6°C /64%R.H./101.2kPa
Tested by : Luke Li
Polarization : vertical
Remark : NFC

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	31.745	45.73	-15.32	30.41	40.00	-9.59	Peak
2	53.108	40.29	-12.31	27.98	40.00	-12.02	Peak
3	100.978	37.82	-14.19	23.63	43.50	-19.87	Peak
4	205.856	39.80	-13.83	25.97	43.50	-17.53	Peak
5	285.102	32.14	-11.72	20.42	46.00	-25.58	Peak
6	412.366	28.95	-8.43	20.52	46.00	-25.48	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result – Limit

3.5 Frequency Stability Test Data

Test Date:	2024-02-22	Test By:	Luke Li
Environment condition:	Temperature: 22.4°C; Relative Humidity:70%; ATM Pressure: 101.0kPa		

Nominal frequency: 13.56MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Test Frequency (MHz)	Frequency Error (%)	Limit (%)	Result
-20	3.87	13.560062	0.00046	±0.01	Pass
-10		13.560054	0.00040	±0.01	Pass
0		13.560057	0.00042	±0.01	Pass
10		13.560052	0.00038	±0.01	Pass
20		13.560035	0.00026	±0.01	Pass
30		13.559985	-0.00011	±0.01	Pass
40		13.559989	-0.00008	±0.01	Pass
50		13.559969	-0.00023	±0.01	Pass
20	3.35	13.559979	-0.00015	±0.01	Pass
	4.4	13.559978	-0.00016	±0.01	Pass


Note: Frequency error = (Test Frequency – Nominal frequency)/ Nominal frequency*100%

3.6 Bandwidth Test Data

Test Date:	2024-02-22	Test By:	Luke Li
Environment condition:	Temperature: 22.4°C; Relative Humidity:70%; ATM Pressure: 101.0kPa		

Channel Frequency [MHz]	20dB BW [kHz]
13.56	1.229
Note: the 20dB Bandwidth fall within 13.110~14.010MHz range	

Test Plots:

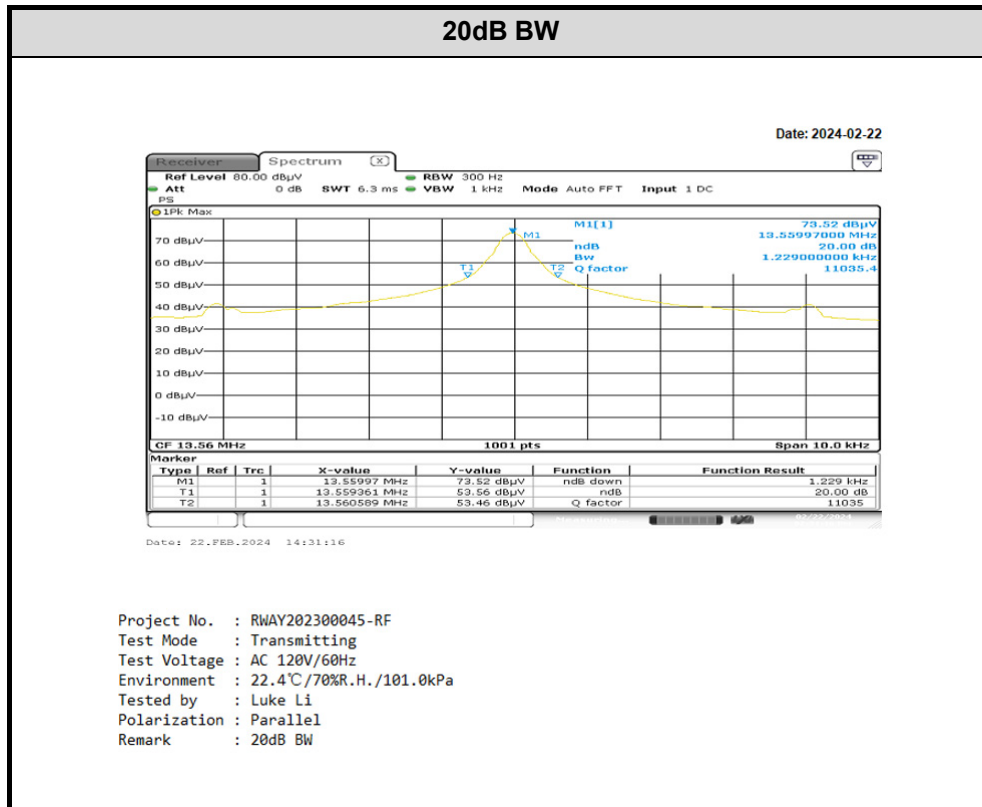

4 Test Setup Photo

Please refer to the attachment RWAY202300045M Test Setup photo.

5 E.U.T Photo

Please refer to the attachment RWAY202300045 External photo and RWAY202300045 Internal photo.

---End of Report---