

5.0 x 2.0 x 0.6 (mm) WiFi/Bluetooth Ceramic Chip Antenna (YF500A) Engineering Specification

1. Product Number

YF 5020 H1 R 2G4502

1 2 3 4 5

1 2 3 4 5



(1)Product Type	Chip Antenna
(2) Size Code	5.0x2.0mm
(3) Type Code	H1
(4) Packing	Tape and reel
(5) Frequency	2.45GHz



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification**

**DOCUMENT
NO.**

YF5020H1R2G4502

**REV.
B**

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

Ying feng chip antenna series are specially designed for WiFi/Bluetooth applications. Based on yingfeng proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications (40 x 40 mm² ground plane)

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		5.0x2.0x0.6	mm
Working Frequency		2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polarization		Linear Polarization	
Gain	Peak	2.5(typical)	dBi
	Efficiency	75 (typical)	%

5-2. Return Loss & VSWR



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**



Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification**

**DOCUMENT
NO.**

YF5020H1R2G4502

**REV.
B**

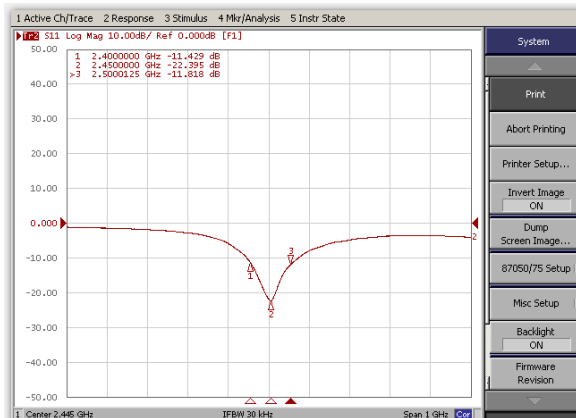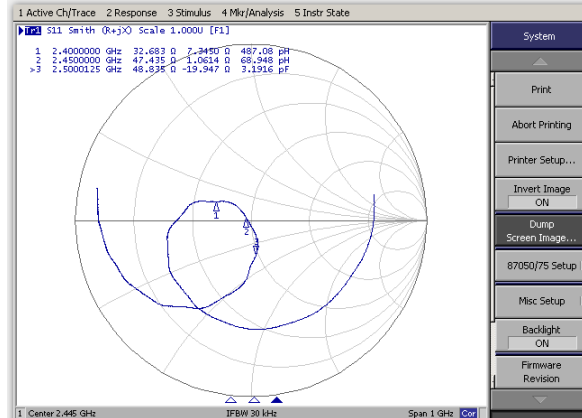
Return Loss (S_{11})Smith Chart(S_{11})

6 Outline Dimensions of Antenna & Evaluation Board (unit: mm)

6-1. Antenna Dimensions

Configuration and Dimensions:

Dimension and Terminal Configuration

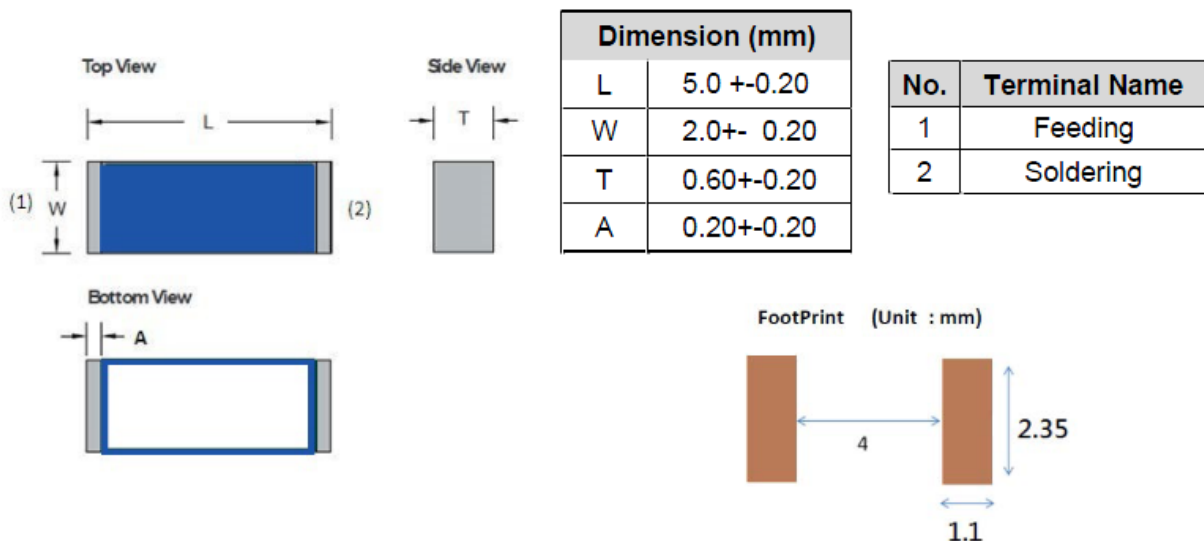

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
 412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
 Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**

**TITLE : 5.0 x 2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
 Antenna (YF500A) Engineering Specification**


**DOCUMENT
 NO.**

YF5020H1R2G4502


**REV.
 B**

6-2-2. Matching Circuit:

With the following recommended values of matching and tuning components, the center frequencies will be about 2450 MHz at our standard 40x40 mm² evaluation board. However, these are reference values, may need to be changed when the circuit boards or part vendors are different.

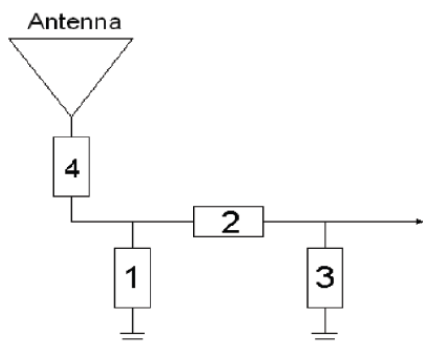

System Matching Circuit Component		
Location	Description	Vendor
1	N/A*	-
2	3.3nH, (0402)	DARFON
3	1.5pF, (0402)	MURATA
4	0Ω, (0402)	-

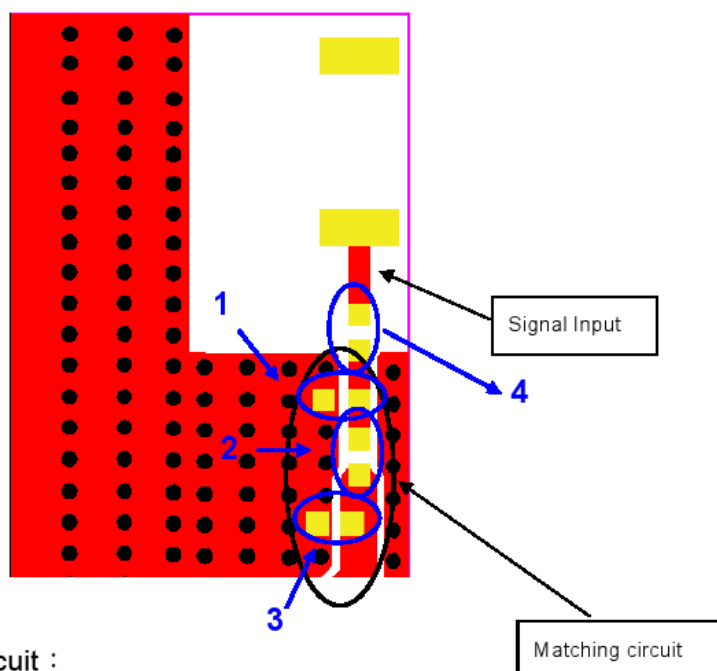

8-2. Matching circuit :



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**


Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification**

**DOCUMENT
NO.**

YF5020H1R2G4502

**REV.
B**

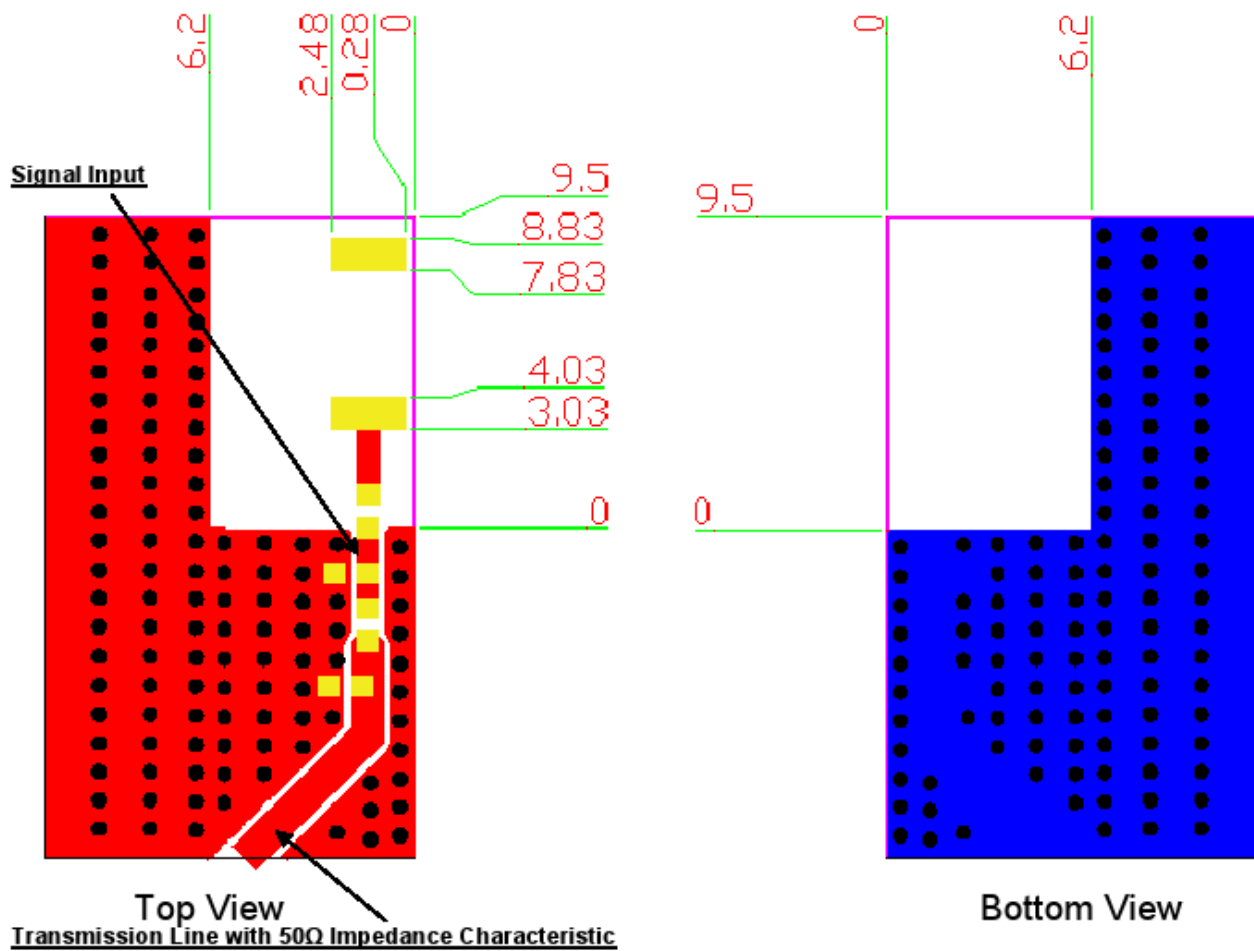

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
 412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
 Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**


Approved by : **oliver**

**TITLE : 5.0 x 2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
 Antenna (YF500A) Engineering Specification**

**DOCUMENT
 NO.**

YF5020H1R2G4502

**REV.
 B**

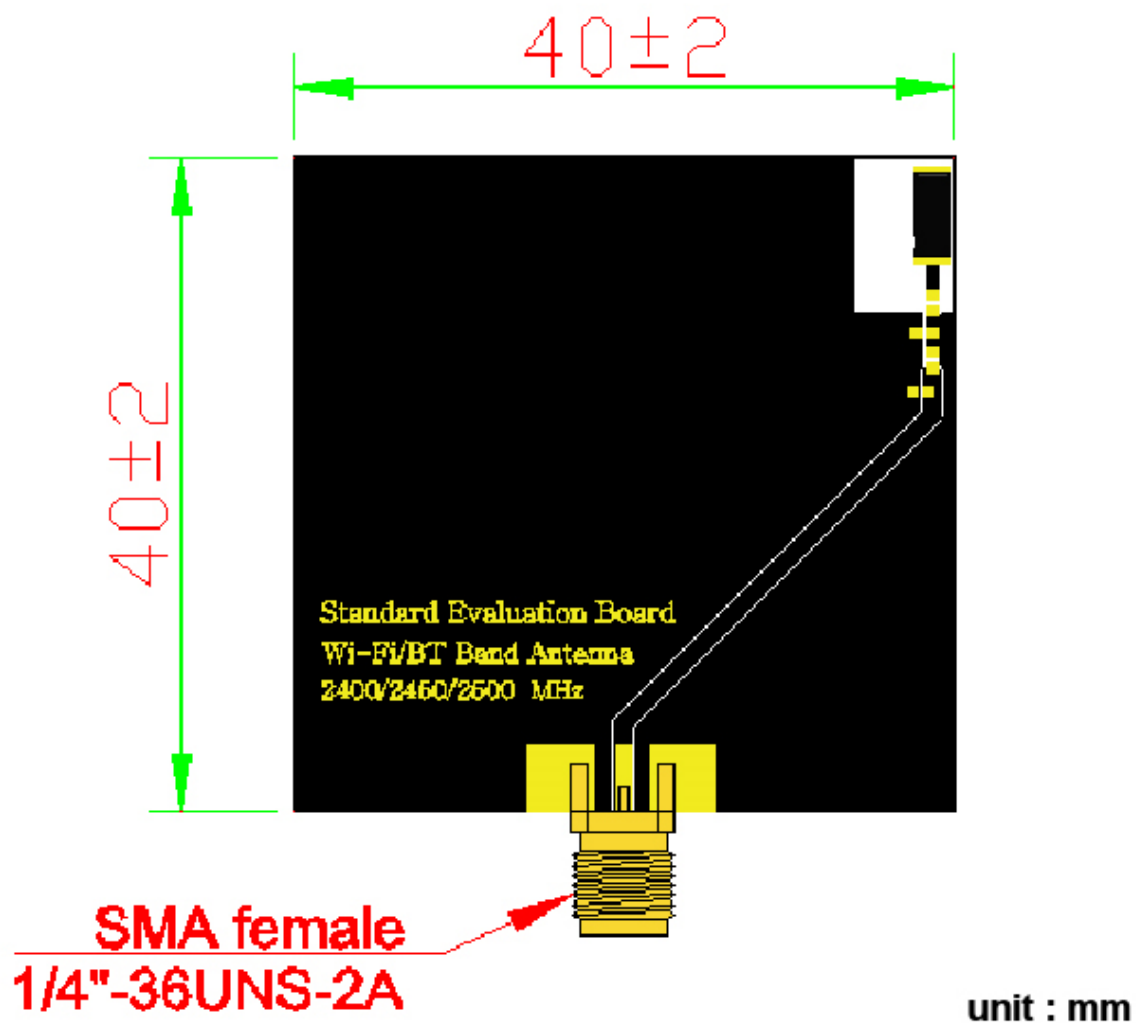

7. Radiation Pattern (40x 40 mm² ground plane)

7-1. 3D Gain Pattern @ 2450 MHz



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**


TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification

DOCUMENT
NO.


YF5020H1R2G4502

REV.
B



Azimuth = -180.0
 Elevation = 0.0
 Roll = 0.0

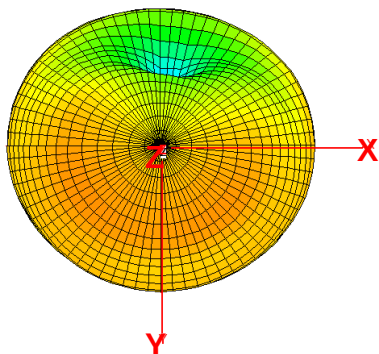

Azimuth = -180.0
 Elevation = -5.1
 Roll = 180.0

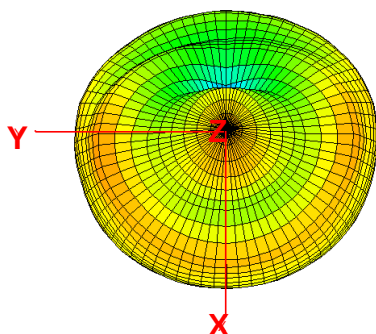

Azimuth = 0.0
 Elevation = -90.0
 Roll = 180.0

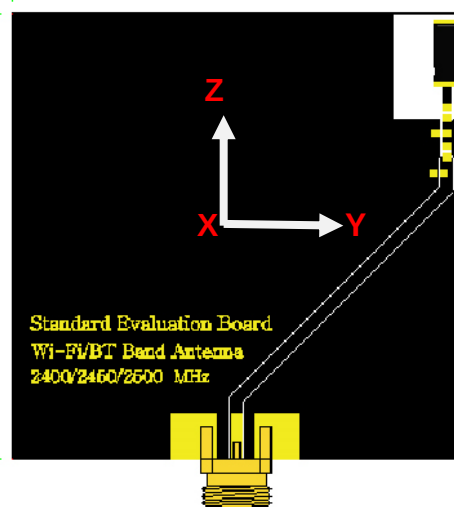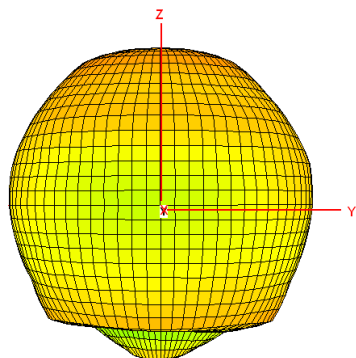

7-2. 3D Efficiency Table



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
 412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
 Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
 Antenna (YF500A) Engineering Specification**



**DOCUMENT
 NO.**

YF5020H1R2G4502

**REV.
 B**

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency (dB)	-1.4	-1.0	-0.9	-0.7	-0.7	-0.8	-0.9	-1.1	-1.2	-1.3	-1.4
Efficiency (%)	70.8	71.7	72.3	74.4	74.5	75.0	74.0	73.6	72.1	71.6	70.5
Gain (dBi)	1.9	2.1	2.3	2.4	2.5	2.5	2.4	2.3	2.2	2.1	1.8

Taping Specifications

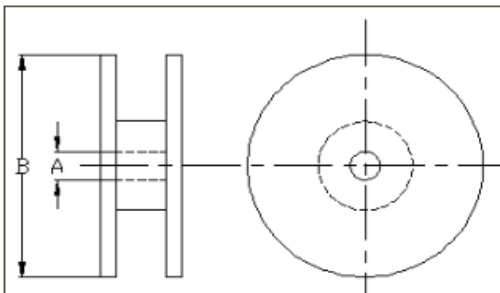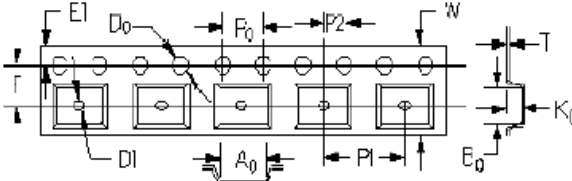Reel	Taping Blister Tape																																													
																																														
<table><tr><th>Checking note</th><th>Index</th><th>Spec (mm)</th></tr><tr><td>Internal diameter of reel</td><td>A</td><td>60.20 ± 0.50</td></tr><tr><td>External diameter of reel</td><td>B</td><td>178 ± 1.00</td></tr></table>	Checking note	Index	Spec (mm)	Internal diameter of reel	A	60.20 ± 0.50	External diameter of reel	B	178 ± 1.00	<table><tr><th>Checking note</th><th>Index</th><th>Spec (mm)</th></tr><tr><td>Sprocket hole</td><td>D0</td><td>1.50 +0.10/-0.00</td></tr><tr><td>Distance sprocket hole to outside</td><td>E1</td><td>1.75 ± 0.10</td></tr><tr><td>Distance sprocket hole to pocket</td><td>F</td><td>5.50 ± 0.05</td></tr><tr><td>Distance sprocket hole to sprocket hole</td><td>P0</td><td>4.00 ± 0.10</td></tr><tr><td>Distance pocket to pocket</td><td>P1</td><td>4.00 ± 0.10</td></tr><tr><td>Distance sprocket hole to pocket</td><td>P2</td><td>2.00 ± 0.05</td></tr><tr><td>Tape width</td><td>W</td><td>12.00 +0.30/-0.10</td></tr><tr><td>Pocket width nominal clearance</td><td>A0</td><td>2.28 ± 0.13</td></tr><tr><td>Pocket length nominal clearance</td><td>B0</td><td>5.70 ± 0.13</td></tr><tr><td>Pocket depth minimum clearance</td><td>K0</td><td>1.58 ± 0.10</td></tr><tr><td>Thickness of tape</td><td>T</td><td>0.23 ± 0.02</td></tr></table>	Checking note	Index	Spec (mm)	Sprocket hole	D0	1.50 +0.10/-0.00	Distance sprocket hole to outside	E1	1.75 ± 0.10	Distance sprocket hole to pocket	F	5.50 ± 0.05	Distance sprocket hole to sprocket hole	P0	4.00 ± 0.10	Distance pocket to pocket	P1	4.00 ± 0.10	Distance sprocket hole to pocket	P2	2.00 ± 0.05	Tape width	W	12.00 +0.30/-0.10	Pocket width nominal clearance	A0	2.28 ± 0.13	Pocket length nominal clearance	B0	5.70 ± 0.13	Pocket depth minimum clearance	K0	1.58 ± 0.10	Thickness of tape	T	0.23 ± 0.02
Checking note	Index	Spec (mm)																																												
Internal diameter of reel	A	60.20 ± 0.50																																												
External diameter of reel	B	178 ± 1.00																																												
Checking note	Index	Spec (mm)																																												
Sprocket hole	D0	1.50 +0.10/-0.00																																												
Distance sprocket hole to outside	E1	1.75 ± 0.10																																												
Distance sprocket hole to pocket	F	5.50 ± 0.05																																												
Distance sprocket hole to sprocket hole	P0	4.00 ± 0.10																																												
Distance pocket to pocket	P1	4.00 ± 0.10																																												
Distance sprocket hole to pocket	P2	2.00 ± 0.05																																												
Tape width	W	12.00 +0.30/-0.10																																												
Pocket width nominal clearance	A0	2.28 ± 0.13																																												
Pocket length nominal clearance	B0	5.70 ± 0.13																																												
Pocket depth minimum clearance	K0	1.58 ± 0.10																																												
Thickness of tape	T	0.23 ± 0.02																																												
<table><tr><td>Quantity/per reel</td><td>3000 pcs</td></tr><tr><td>Tape material</td><td>Plastic (embossed)</td></tr></table>	Quantity/per reel	3000 pcs	Tape material	Plastic (embossed)																																										
Quantity/per reel	3000 pcs																																													
Tape material	Plastic (embossed)																																													



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification**

**DOCUMENT
NO.**

YF5020H1R2G4502

**REV.
B**

Reliability Table

Test Item	Procedure	Requirements Ceramic Type	Remark (Reference)
Electrical Characterization		Fulfill the electrical specification	User Spec.
Thermal Shock	1. Preconditioning: 50 ± 10°C / 1 hr, then keep for 24 ± 1 hrs at room temp. 2. Initial measure: Spec: refer Initial spec. 3. Rapid change of temperature test: -30°C to +85°C; 100 cycles; 15 minutes at Lower category temperature; 15 minutes at Upper category temperature.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 107
Temperature Cycling	1. Initial measure: Spec: refer Initial spec. 2. 100 Cycles (-30°C to +85°C), Soak Mode=1 (2 Cycle/hours). 3. Measurement at 24 ± 2Hours after test condition.	No Visible Damage. Fulfill the electrical specification.	JESD22 JA104
High Temperature Exposure	1. Initial measure: Spec: refer Initial spec. 2. Unpowered; 500hours @ T=+85°C. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Low Temperature Storage	1. Initial measure: Spec: refer Initial spec. 2. Unpowered; 500hours @ T= -30°C. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Solderability (SMD Bottom Side)	Dipping method: a. Temperature: 235 ± 5°C b. Dipping time: 3 ± 0.5s	The solder should cover over 95% of the critical area of bottom side.	IEC 60384-21/22 4.10
Soldering Heat Resistance (RSH)	Preheating temperature: 150 ± 10°C. Preheating time: 1~2 min. Solder temperature: 260 ± 5°C. Dipping time: 5 ± 0.5s	No Visible Damage.	IEC 60384-21/22 4.10
Vibration	5g's for 20 min., 12 cycles each of 3 orientations Note: Use 8"x5" PCB .031" thick 7 secure points on, one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz	No Visible Damage.	MIL-STD-202 Method 204
Mechanical Shock	Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks) Peak value: 1,500g's Duration: 0.5ms Velocity change: 15.4 ft/s Waveform: Half-sine	No Visible Damage.	MIL-STD-202 Method 213
Humidity Bias	1. Humidity: 85% R.H., Temperature: 85 ± 2 °C. 2. Time: 500 ± 24 hours. 3. Measurement at 24 ± 2hrs after test condition.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 Method 106



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**



Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification**

**DOCUMENT
NO.**

YF5020H1R2G4502

**REV.
B**

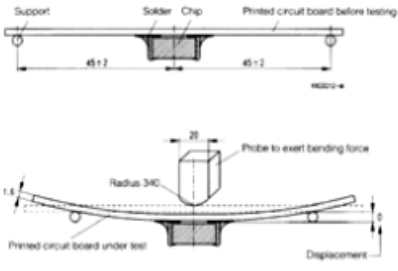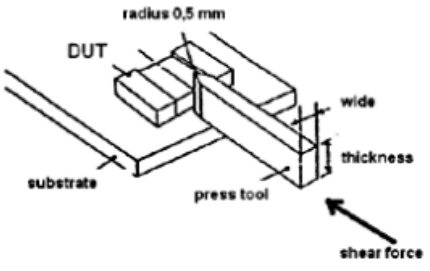Board Flex (SMD)	1. Mounting method: IR-Reflow. PCB Size (L:100 × W:40 × T:1.6mm) 2. Apply the load in direction of the arrow until bending reaches 2 mm. 	No Visible Damage.	AEC-Q200 005
Adhesion	Force of 1.8Kg for 60 seconds. 	No Visible Damage Magnification of 20X or greater may be employed for inspection of the mechanical integrity of the device body terminals and body/terminal junction.	AEC-Q200 006
Physical Dimension	Any applicable method using x10 magnification, micrometers, calipers, gauges, contour projectors, or other measuring equipment, capable of determining the actual specimen dimensions.	In accordance with specification.	JESD22 JB100



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD
412, Building 7, Phase II, Nanshan Yungu Pioneer Park, No. 2, Pingshan Road,
Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**

**TITLE : 5.0 x2.0 x 0.6mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF500A) Engineering Specification**

**DOCUMENT
NO.**

YF5020H1R2G4502

**REV.
B**