



RF Exposure Evaluation FCC ID: 2ATZH-M1

1 General Information

| | |
|--------------------|--|
| Product Name: | Wireless Charging Power Bank |
| Product Model No.: | M1 |
| Test Auxiliary: | Apple Watch, Adapter, iPhone 12 pro |
| Model No.: | N/A |
| Transmitting mode | Keep the EUT in continuously wireless charging mode |
| Power supply: | Input: DC 5V/2A, 9V/2.22A Wireless Output (Phone): 5W/7.5W/10W Wireless Output (Watch): 2.5W USB-C Output: DC 5V/3A, 9V/2.22A, 12V/1.67A Battery: DC 3.85V, 10000mAh, 38.5Wh |
| Test description: | Phone Battery>98%, =50%and <1% are tested, and the worst is <1%. Watch Battery>98%, =50%and <1% are tested, and the worst is <1%. |

| Test Auxiliary | | | | | |
|-------------------|---|------------|---|---|-----------|
| A1 | Adapter | HONOR | / | / | Auxiliary |
| A2 | Apple Watch | Apple Inc. | / | / | Auxiliary |
| A3 | iPhone 12 pro | Apple Inc. | / | / | Auxiliary |
| Transmitting mode | Keep the EUT in continuously wireless charging mode | | | | |

2 Test Modes

| Test Modes | | |
|------------|--|--------|
| Mode 1 | Charging+Wireless Output (Phone:10W+Watch:2.5W) | Record |
| Mode 2 | Charging+Wireless Output (Phone:7.5W+Watch:2.5W) | Record |
| Mode 3 | Charging+Wireless Output (Phone:5W+Watch:2.5W) | Record |

Note: all modes of the equipment have been evaluated and tested, and the report only reflects the data of the worst mode.

3 Measuring Standard

KDB 680106 RF Exposure Wireless Charging Apps v03r01

4 Requirements

According to the item 5 of KDB 680106 v03r01:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

| Requirement | Device |
|--|---|
| 1. Power transfer frequency is less than 1 MHz. | Yes. The operating frequencies are: Phone ANT:115kHz-205kHz Watch ANT: 324.4kHz |
| 2. Output power from each primary coil is less than or equal to 15 watts | Yes. The maximum output power: 10W |



| | |
|---|---|
| 3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time. | Yes. EUT has two source primary coils and both coils can be energized simultaneously. |
| 4. Client device is placed directly in contact with the transmitter. | Yes. The client device is placed directly in contact with the transmitter. |
| 5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion). | No. The EUT has portable exposure condition. |
| 6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit. | Yes, the H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm were also evaluated for portable use condition. |

Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | / | / | f/300 | 6 |
| 1500-100,000 | / | / | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

5 Test Setup

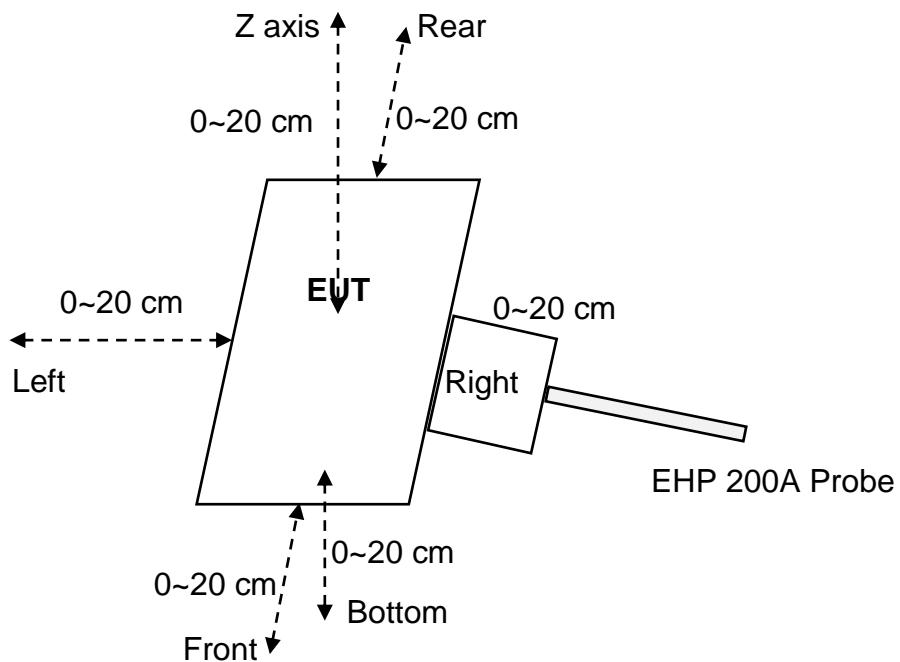

6 Test Procedure

For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 v03r01.

For portable exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of TCB Workshop “41-Part-18-&-Wireless-Power-Transfer - April 27, 2022”

Notes: The EUT was setted to transmit continuously with the duty cycle of 100%.

7 Test Instruments list

| Test Equipment | Manufacturer | Model No. | SN. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
|--------------------------------------|--------------|-----------|------------|---------------------|-------------------------|
| Electric and Magnetic Field Analyzer | Narda | EHP-200A | 180ZX11013 | May. 26 2022 | May. 25 2023 |



8 Test Result

For portable exposure condition:

Note: operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

H-field measurements taken every 2 cm (starting as close to 20 cm as possible) on each edge/top surface of the host/client pair were also evaluated for portable use conditions. The report reflects data for the worst 0 cm test distance mode only.

Test condition 1: Mode 1 operating mode with client device (1 % battery status of client device)

-test distance: 0cm

| Antenna | Probe Position | H-field (A/m) | | |
|---------|----------------|---------------|-------|---------------------|
| | | Measurement | Limit | Max. Percentage (%) |
| 1 | Z axis | 0.3083 | 1.63 | 8.52% |
| | Left | 0.1510 | | |
| | Right | 0.3260 | | |
| | Front | 0.3083 | | |
| | Rear | 0.0536 | | |
| | Bottom | 0.4295 | | |



Test Set-up Photo

See the Appendix - Test Setup Photos.

***** END OF REPORT *****