
SPECIFICATION FOR APPROVAL

CUSTOMER: Shenzhen Maxnon Technology Limited

CUST P/N: 56566

DESC: J-MN56566-L50

DATE: 20230424

VERSION: A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
Yang Maoxin	Liu Xijiang	Roger	

DONGGUAN JIOU ELECTRONIC TECHNOLOGY
CO,LTD Company address: Xinf
Industrial Zone, Shijie Town,
Dongguan City

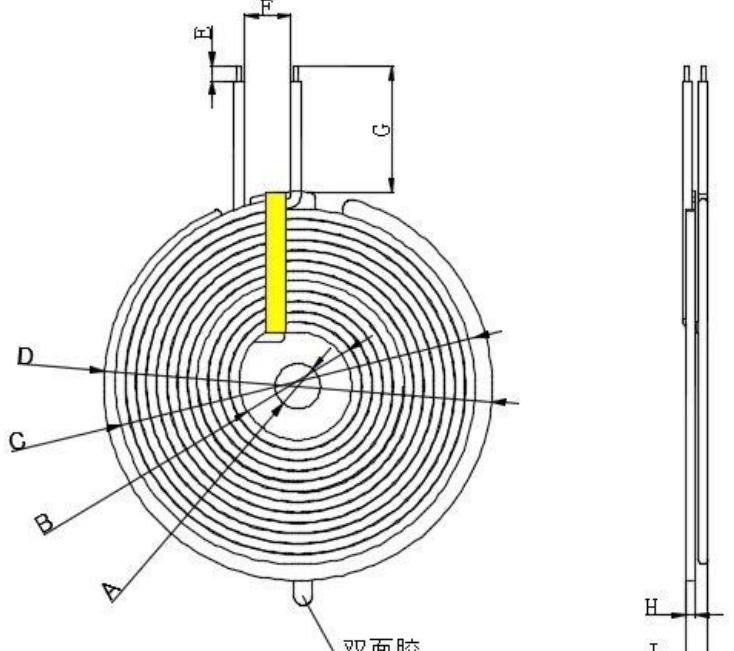
TEL:0769-83067050

E-mail: lybofmana@163.com

Version Change History

DESC	J-MN56566-L50	REV:A.1	CUST	Maineng
			CUST P/N	56566

一、DIMENSION(MM)

	A	5.0±0.3
	B	12.5±1
	C	39±1
	D	43±0.5
	E	4±1
	F	5 Ref
	G	50±2
	H	1±0.1
	I	2.6Max

Note:

1. Stick double-sided adhesive tape on the back of the coil
2. The magnetic separator adopts $43 * 5.0 * 1.0$ double slots
3. The H value does not include the thickness of the double-sided adhesive release paper
4. Apply 5mm high-temperature tape at the coil lead

二、 Winding Specification:

Wire	Turns	Winding Direction
0.08*105P	12TS	rewind

四、 ELECTRICAL CHARACTERISTICS:

temperature TEMPERATURE:25±10°C, RELATIVE HUMIDITY :65±20%

TIEM	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
IND	6.4UH±10%	100 KHZ/1.0V	LCZ METER 1062B
DCR	50mΩ Max		LCZ METER 1062B

PREPARED BY	CHECKED BY	DATE
Yang Maoxin	Liu Xijiang	20230424