

TEST REPORT

Product : Car FM Transmitter
Trade mark : N/A
Model/Type reference : Refer to Section 6.2
Serial Number : N/A
Report Number : EED32L00115901
FCC ID : 2ATZS-BC42
Date of Issue : Jul. 01, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

SHEN ZHEN LEADINWAY TECHNOLOGY CO., LTD
Room 201, Building A, No.1, Qingwan Road 1, Qianhai Shenzhen and
Hongkong Cooperation Zone, Shenzhen China.

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Jay Zheng
Jay Zheng

Compiled by:

Kevin Lan
Kevin Lan

Reviewed by:

Ware Xin
Ware Xin

Approved by:

Kevin Yang
Kevin Yang

Date:

Jul. 01, 2019



Check No.: 3757565985

2 Version

Version No.	Date	Description
00	Jul. 01, 2019	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.:BC06B,BC06S,BC07,BC09,BC09B,BC11,BC11B,BC11N,BC12,BC13,BC14, BC15, BC16,BC17,BC18,BC19,BC20,BC21,BC22,BC23,BC24,BC25,BC26B,BC26BQ,BC27,BC28, BC29,BC29B,BC30B,BC30BQ,BC31,BC31Q,BC32,BC33,BC34,BC35B,BC36,BC36Q,BC37, BC37Q,BC38,BC39,BC40,BC41,BC41T,BC42T,BC43,BC44,BC45,BC46,BC47,BC48,BC49AQ, BC49BQ,BC50,BC51,BC52,BC53,BC54,BC55,BC56,BC57,BC58,BC59,BC60,BC61,BC62, BC63,BC64,BC65,BC66,BC67,BC68,BC69,BC70,BC71,BC72,BC73,BC74,BC75,BC76, BC77,BC78,BC79,BC80,BC81,BC82,BC83,BC84,BC85,BC86,BC87,BC88,BC89,BC90, BC91,BC92,BC93,BC94,BC95,BC96,BC97,BC98,BC99,BC100,FM12,FM12B,FM15,FM18, FM19,FM21,FM23,FM24,FM26,FM30,FM8112B,FM8116B,BA05,BA06A,BA06B,BA07,BA08, BA09,BA10,BT15,BT8117S,BT8112A,BT8115A,BT8121A,BT8128A,BT8118,DAB001, DAB002,DAB003,DAB004,DAB005,DAB006,DAB007,DAB008,DAB009,DAB010,HUD001, HUD002,HUD003,HUD004,HUD005,CH001,CH002,CH003,CH004,CH005

Only the model BC42 was tested, since the internal structure is identical, only the sales areas and model name are different.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	13
Appendix A): 20dB Occupied Bandwidth.....	14
Appendix B): Carrier Frequency Separation.....	18
Appendix C): Dwell Time.....	22
Appendix D): Hopping Channel Number.....	26
Appendix E): Conducted Peak Output Power.....	28
Appendix F): Band-edge for RF Conducted Emissions.....	32
Appendix G): RF Conducted Spurious Emissions.....	37
Appendix H): Pseudorandom Frequency Hopping Sequence.....	44
Appendix I): Antenna Requirement.....	45
Appendix J): Restricted bands around fundamental frequency (Radiated).....	46
Appendix K): Radiated Spurious Emissions.....	60
PHOTOGRAPHS OF TEST SETUP.....	69
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	71

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

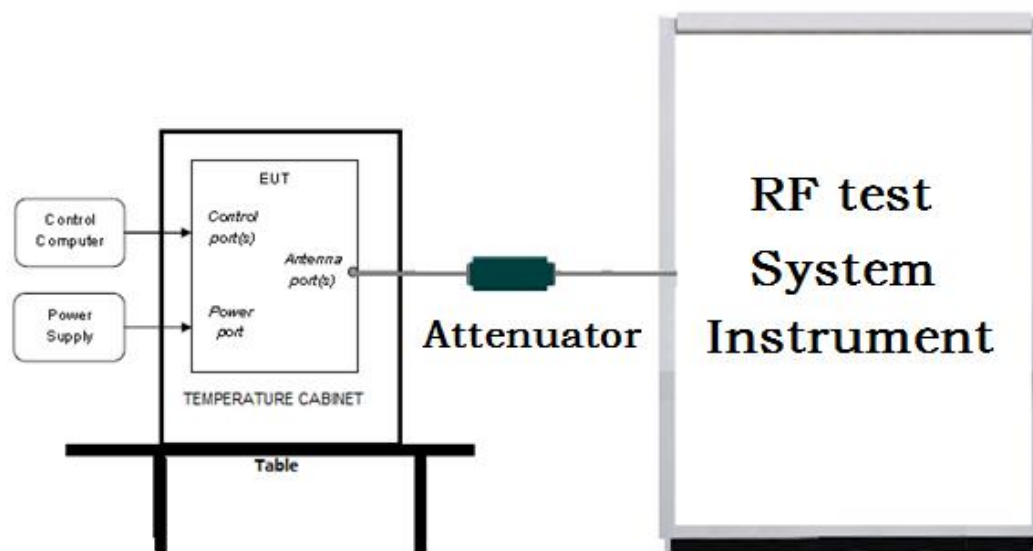

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

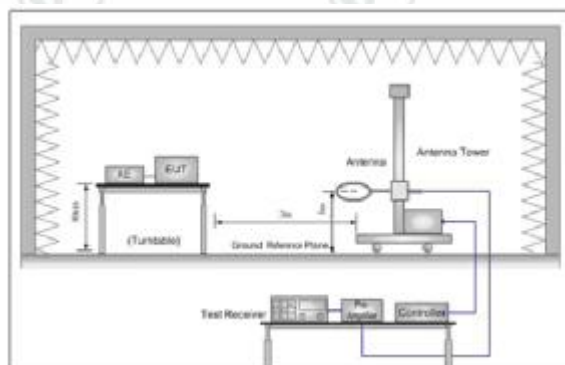


Figure 1. Below 30MHz

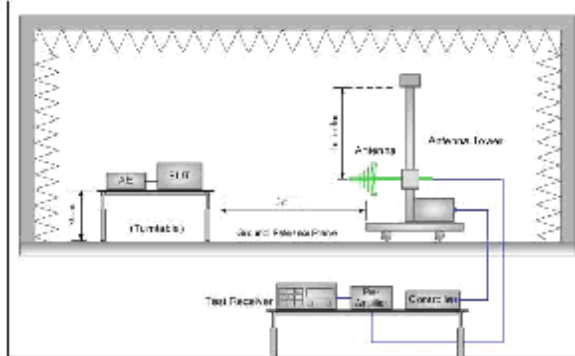


Figure 2. 30MHz to 1GHz

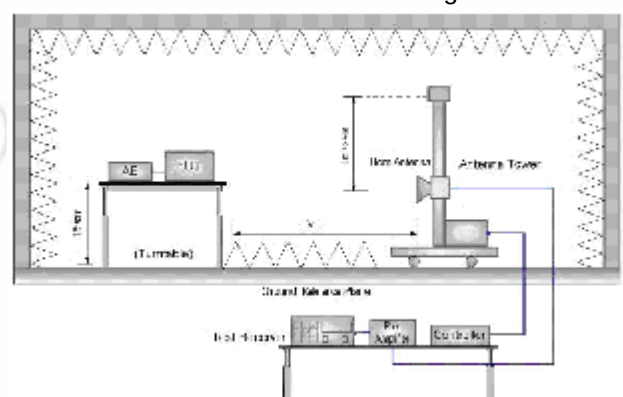


Figure 3. Above 1GHz

5.2 Test Environment

Operating Environment for RF Conducted test:	
Temperature:	26°C
Humidity:	56% RH
Atmospheric Pressure:	101kPa

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	-2.946	-2.940	-2.937

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	0.541	0.548	0.552
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	1.451	1.460	1.467

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	SHEN ZHEN LEADINWAY TECHNOLOGY CO., LTD
Address of Applicant:	Room 201,Building A, No.1, Qingwan Road 1, Qianhai Shenzhen and Hongkong Cooperation Zone, Shenzhen China.
Manufacturer:	SHEN ZHEN LEADINWAY TECHNOLOGY CO., LTD
Address of Manufacturer:	Room 201,Building A, No.1, Qingwan Road 1, Qianhai Shenzhen and Hongkong Cooperation Zone, Shenzhen China.
Factory:	SHEN ZHEN SAILING ELECTRONIC CO., LTD
Address of Factory:	Block 29, Baotian Industrial Zone, Chentian, Xixiang Town, Bao'an District, Shenzhen China.

6.2 General Description of EUT

Product Name:	Car FM Transmitter
Mode No.:	BC06B,BC06S,BC07,BC09,BC09B,BC11,BC11B,BC11N,BC12,BC13,BC14,BC15,BC16,BC17,BC18,BC19,BC20,BC21,BC22,BC23,BC24,BC25,BC26B,BC26BQ,BC27,BC28,BC29,BC29B,BC30B,BC30BQ,BC31,BC31Q,BC32,BC33,BC34,BC35B,BC36,BC36Q,BC37,BC37Q,BC38,BC39,BC40,BC41,BC41T,BC42T,BC43,BC44,BC45,BC46,BC47,BC48,BC49AQ,BC49BQ,BC50,BC51,BC52,BC53,BC54,BC55,BC56,BC57,BC58,BC59,BC60,BC61,BC62,BC63,BC64,BC65,BC66,BC67,BC68,BC69,BC70,BC71,BC72,BC73,BC74,BC75,BC76,BC77,BC78,BC79,BC80,BC81,BC82,BC83,BC84,BC85,BC86,BC87,BC88,BC89,BC90,BC91,BC92,BC93,BC94,BC95,BC96,BC97,BC98,BC99,BC100,FM12,FM12B,FM15,FM18,FM19,FM21,FM23,FM24,FM26,FM30,FM8112B,FM8116B,BA05,BA06A,BA06B,BA07,BA08,BA09,BA10,BT15,BT8117S,BT8112A,BT8115A,BT8121A,BT8128A,BT8118,DAB001,DAB002,DAB003,DAB004,DAB005,DAB006,DAB007,DAB008,DAB009,DAB010,HUD001,HUD002,HUD003,HUD004,HUD005,CH001,CH002,CH003,CH004,CH005
Test Mode No.:	BC42
Trade mark:	N/A
EUT Supports Radios application:	BT4.2 Single mode: 2402MHz to 2480MHz
Power Supply:	DC 12V, DC 24V
Sample Received Date:	May 23, 2019
Sample tested Date:	May 29, 2019 to Jun. 20, 2019

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	4.2						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Test Power Grade:	3(manufacturer declare)						
Test Software of EUT:	ACTIONS BT FCC Tool V2.00(manufacturer declare)						
Antenna Type:	PCB antenna						
Antenna Gain:	0dBi						
Test Voltage:	DC 12V, DC 24V						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-28-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-28-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-0 02	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRO NICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-28-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-28-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-28-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-01-2019	02-28-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-22-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845S E	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057410	06-05-2018	06-03-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.6041	08-08-2018	08-07-2019
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-26-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Receiver	R&S	ESCI7	100938-003	11-23-2018	11-22-2019
Multi device Controller	maturio	NCD/070/1071 1112	---	01-09-2019	01-08-2020
LISN	schwarzbeck	NNBM8125	81251547	05-08-2019	05-06-2020
LISN	schwarzbeck	NNBM8125	81251548	05-08-2019	05-06-2020
Signal Generator	Agilent	E4438C	MY45095744	03-01-2019	02-28-2020
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	104466	01-18-2019	01-17-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-20-2018 06-19-2019	06-19-2019 06-17-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-23-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-23-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-23-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-12-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-08-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-20-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-06-2020
Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-28-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-28-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-15-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-08-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	N/A
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix K)




Appendix A): 20dB Occupied Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.8552	0.83915	PASS
GFSK	MCH	0.9078	0.84735	PASS
GFSK	HCH	0.9084	0.84357	PASS
$\pi/4$ DQPSK	LCH	1.281	1.1939	PASS
$\pi/4$ DQPSK	MCH	1.279	1.1956	PASS
$\pi/4$ DQPSK	HCH	1.279	1.2018	PASS
8DPSK	LCH	1.277	1.1757	PASS
8DPSK	MCH	1.277	1.1732	PASS
8DPSK	HCH	1.283	1.1817	PASS

Test Graph

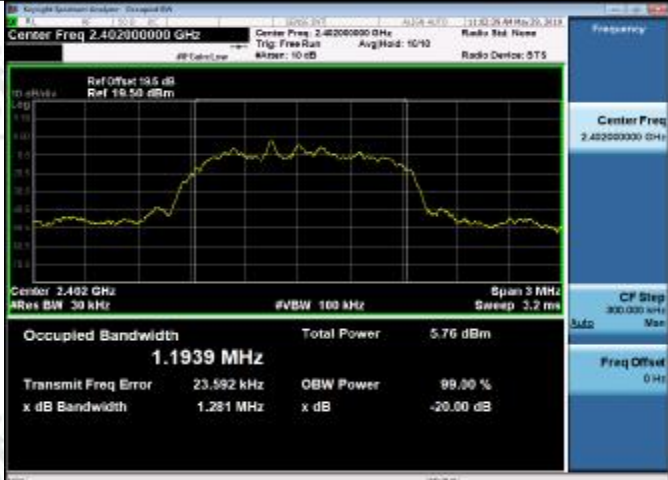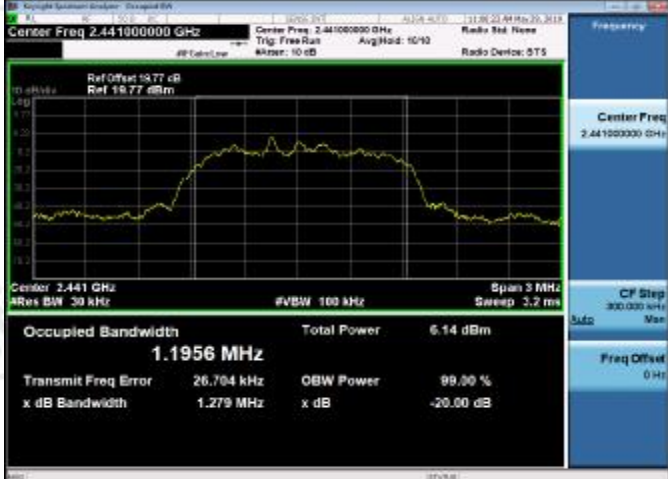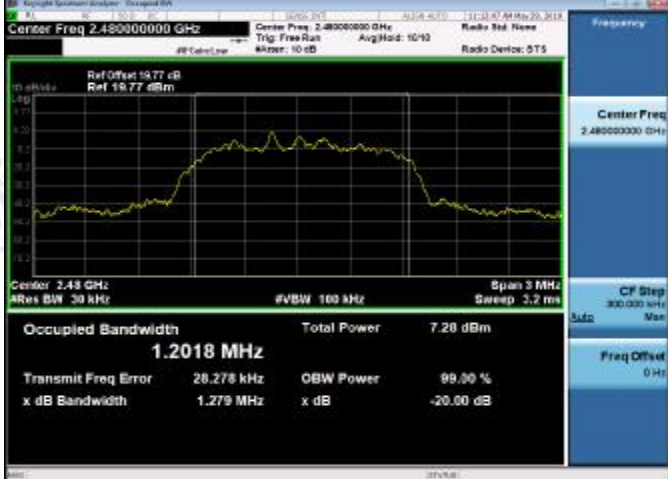

$\pi/4$DQPSK/LCH	 Center Freq 2.40200000 GHz Ref Offset 19.6 dB Ref 19.50 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1939 MHz Total Power 5.76 dBm Transmit Freq Error 23.592 kHz OBW Power 99.00 % x dB Bandwidth 1.281 MHz x dB -20.00 dB
$\pi/4$DQPSK/MCH	 Center Freq 2.44100000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1956 MHz Total Power 6.14 dBm Transmit Freq Error 26.764 kHz OBW Power 99.00 % x dB Bandwidth 1.279 MHz x dB -20.00 dB
$\pi/4$DQPSK/HCH	 Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2018 MHz Total Power 7.28 dBm Transmit Freq Error 28.278 kHz OBW Power 99.00 % x dB Bandwidth 1.279 MHz x dB -20.00 dB

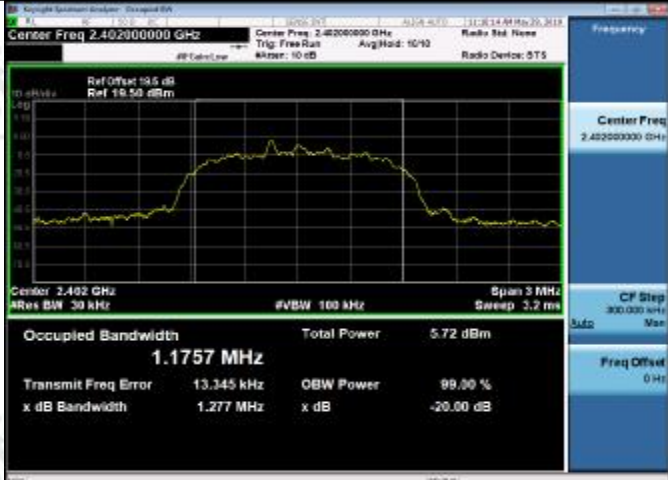8DPSK/LCH	 Center Freq 2.40200000 GHz Ref Offset 19.6 dB Ref 19.50 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1757 MHz Total Power 5.72 dBm Transmit Freq Error 13.345 kHz OBW Power 99.00 % x dB Bandwidth 1.277 MHz x dB -20.00 dB
8DPSK/MCH	 Center Freq 2.44100000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1732 MHz Total Power 6.20 dBm Transmit Freq Error 15.444 kHz OBW Power 99.00 % x dB Bandwidth 1.277 MHz x dB -20.00 dB
8DPSK/HCH	 Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1817 MHz Total Power 7.10 dBm Transmit Freq Error 16.894 kHz OBW Power 99.00 % x dB Bandwidth 1.283 MHz x dB -20.00 dB

Appendix B): Carrier Frequency Separation




Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.000	PASS
GFSK	MCH	1.000	PASS
GFSK	HCH	1.000	PASS
$\pi/4$ DQPSK	LCH	1.000	PASS
$\pi/4$ DQPSK	MCH	1.000	PASS
$\pi/4$ DQPSK	HCH	1.000	PASS
8DPSK	LCH	1.000	PASS
8DPSK	MCH	1.000	PASS
8DPSK	HCH	1.000	PASS

Test Graph



$\pi/4$ DQPSK/LCH	 Center Freq 2.402500000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Start 2.401500 GHz Stop 2.403500 GHz Bandwidth 30 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>Row</th><th>Col 1</th><th>Col 2</th><th>Col 3</th><th>Col 4</th><th>Col 5</th><th>Col 6</th><th>Col 7</th><th>Col 8</th><th>Col 9</th><th>Col 10</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(dB)</td><td>1.999 MHz (Δ)</td><td>-0.105 dB</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.401852 GHz</td><td>-3.253 dBm</td><td></td><td></td><td></td><td></td></tr></table>	Row	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	1	ΔZ	1	f	(dB)	1.999 MHz (Δ)	-0.105 dB					2	F	1	f		2.401852 GHz	-3.253 dBm				
Row	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10																								
1	ΔZ	1	f	(dB)	1.999 MHz (Δ)	-0.105 dB																												
2	F	1	f		2.401852 GHz	-3.253 dBm																												
$\pi/4$ DQPSK/MCH	 Center Freq 2.439500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Start 2.438500 GHz Stop 2.440500 GHz Bandwidth 30 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>Row</th><th>Col 1</th><th>Col 2</th><th>Col 3</th><th>Col 4</th><th>Col 5</th><th>Col 6</th><th>Col 7</th><th>Col 8</th><th>Col 9</th><th>Col 10</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(dB)</td><td>1.999 MHz (Δ)</td><td>-0.088 dB</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.438852 GHz</td><td>-3.253 dBm</td><td></td><td></td><td></td><td></td></tr></table>	Row	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	1	ΔZ	1	f	(dB)	1.999 MHz (Δ)	-0.088 dB					2	F	1	f		2.438852 GHz	-3.253 dBm				
Row	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10																								
1	ΔZ	1	f	(dB)	1.999 MHz (Δ)	-0.088 dB																												
2	F	1	f		2.438852 GHz	-3.253 dBm																												
$\pi/4$ DQPSK/HCH	 Center Freq 2.479500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Start 2.478500 GHz Stop 2.480500 GHz Bandwidth 30 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>Row</th><th>Col 1</th><th>Col 2</th><th>Col 3</th><th>Col 4</th><th>Col 5</th><th>Col 6</th><th>Col 7</th><th>Col 8</th><th>Col 9</th><th>Col 10</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(dB)</td><td>1.999 MHz (Δ)</td><td>-0.088 dB</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.478852 GHz</td><td>-3.253 dBm</td><td></td><td></td><td></td><td></td></tr></table>	Row	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	1	ΔZ	1	f	(dB)	1.999 MHz (Δ)	-0.088 dB					2	F	1	f		2.478852 GHz	-3.253 dBm				
Row	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10																								
1	ΔZ	1	f	(dB)	1.999 MHz (Δ)	-0.088 dB																												
2	F	1	f		2.478852 GHz	-3.253 dBm																												

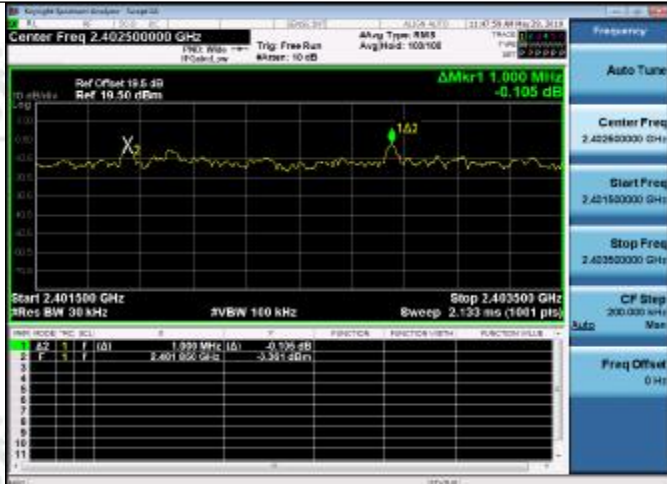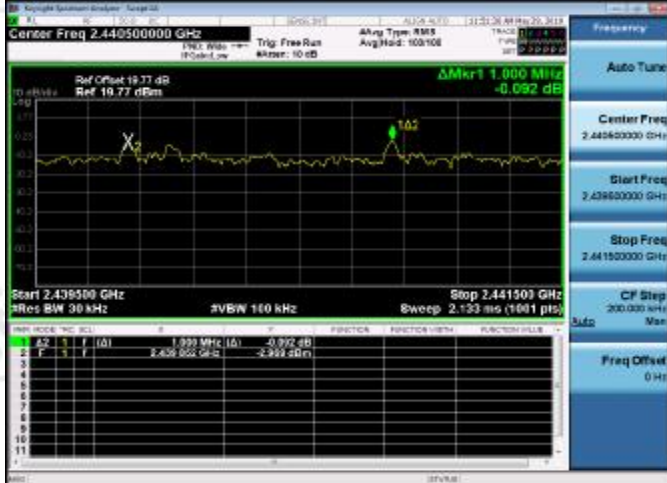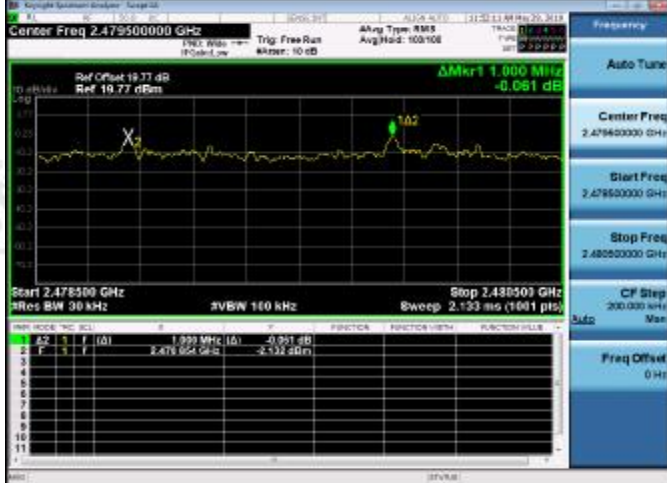8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	


Appendix C): Dwell Time


Result Table




Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.13554	320	0.043	0.13	PASS
GFSK	DH1	MCH	0.134267	320	0.043	0.13	PASS
GFSK	DH1	HCH	0.133	320	0.043	0.13	PASS
GFSK	DH3	LCH	1.383203	160	0.221	0.61	PASS
GFSK	DH3	MCH	0.37746	160	0.06	0.25	PASS
GFSK	DH3	HCH	1.38193	160	0.221	0.61	PASS
GFSK	DH5	LCH	0.3588	106.7	0.038	0.24	PASS
GFSK	DH5	MCH	0.3588	106.7	0.038	0.24	PASS
GFSK	DH5	HCH	0.3588	106.7	0.038	0.24	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

Test Graph

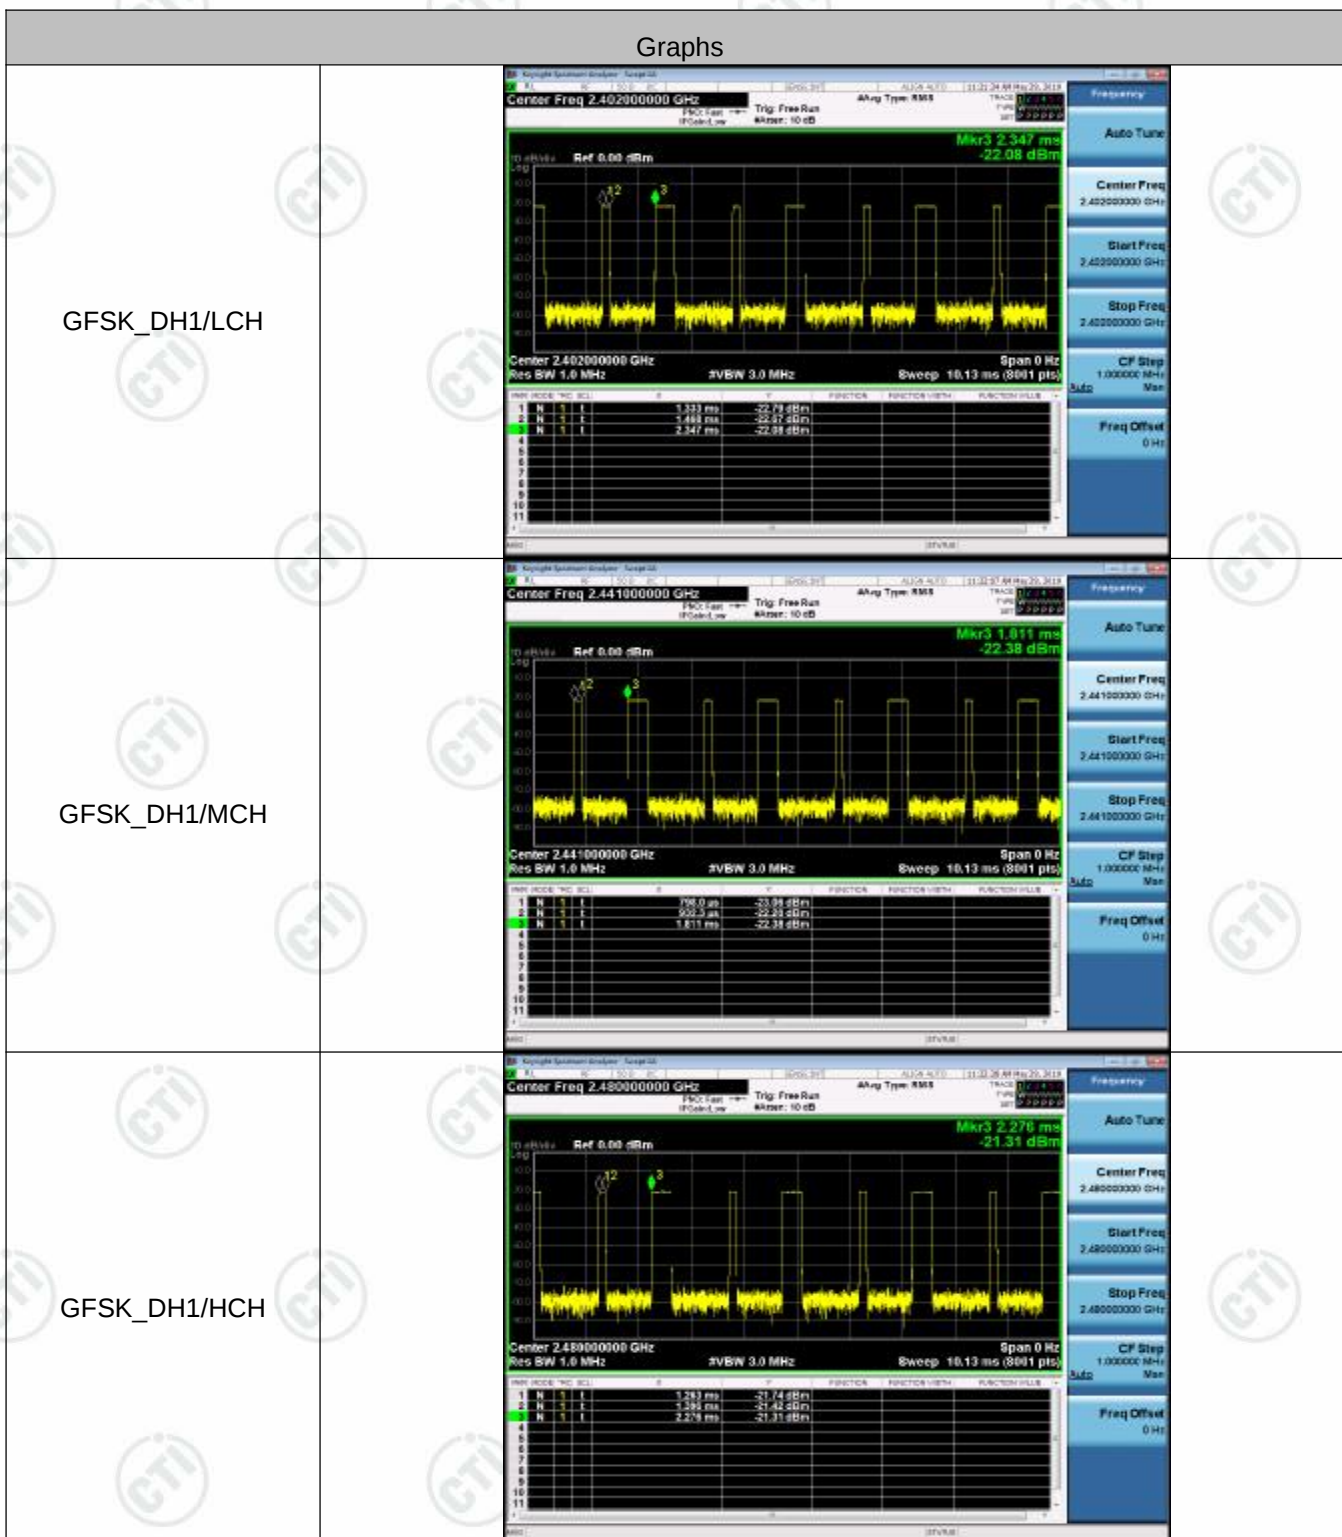

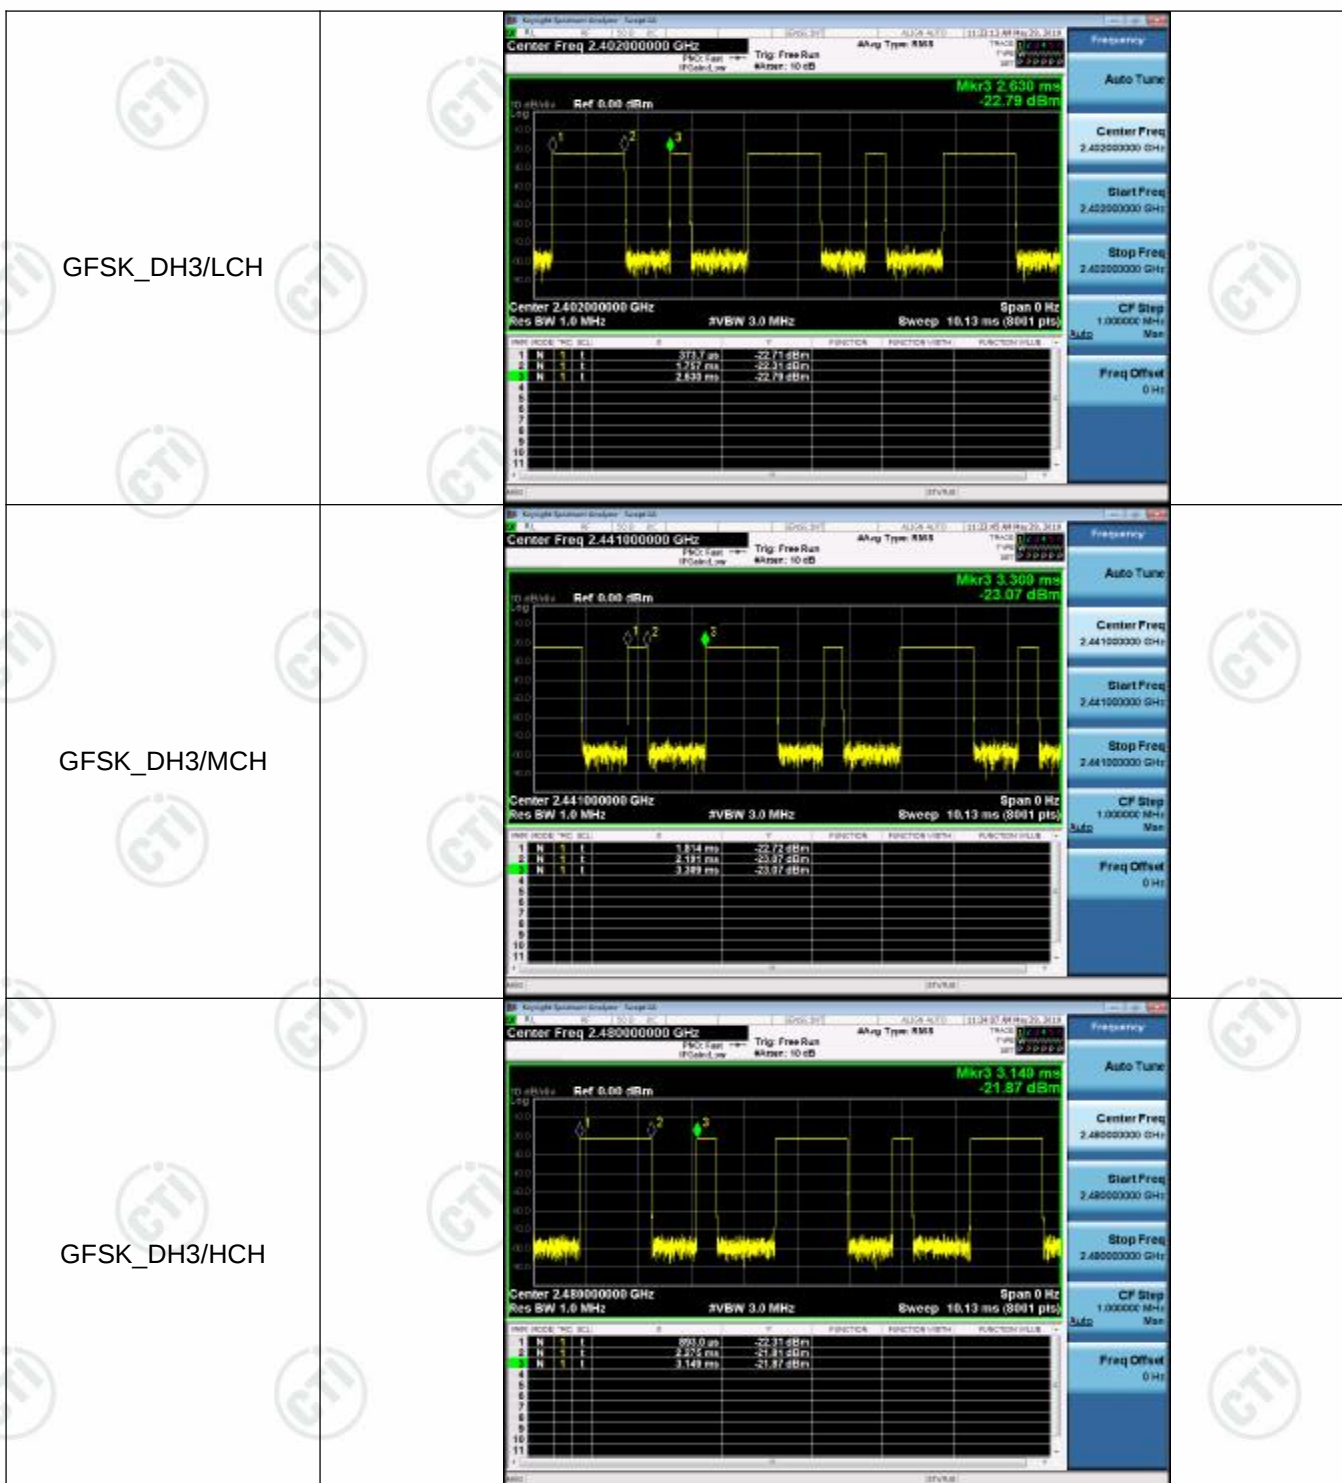

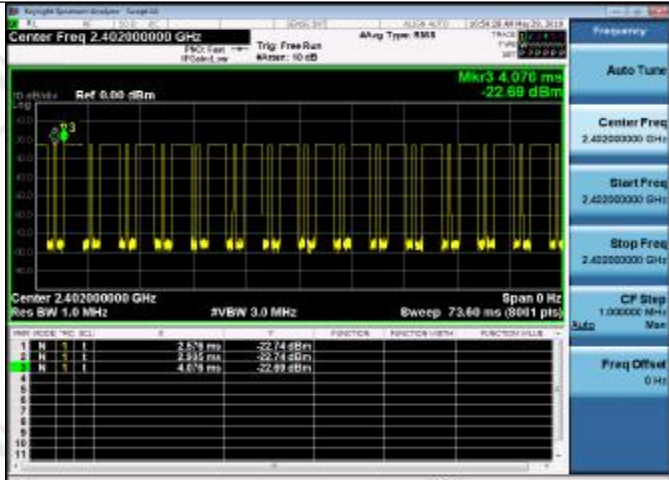
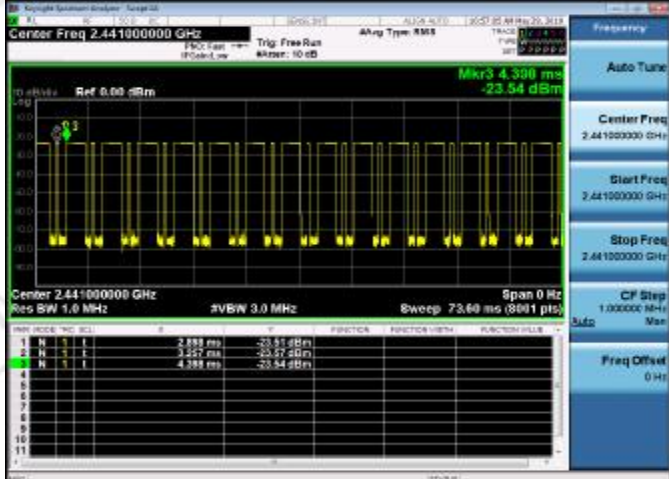
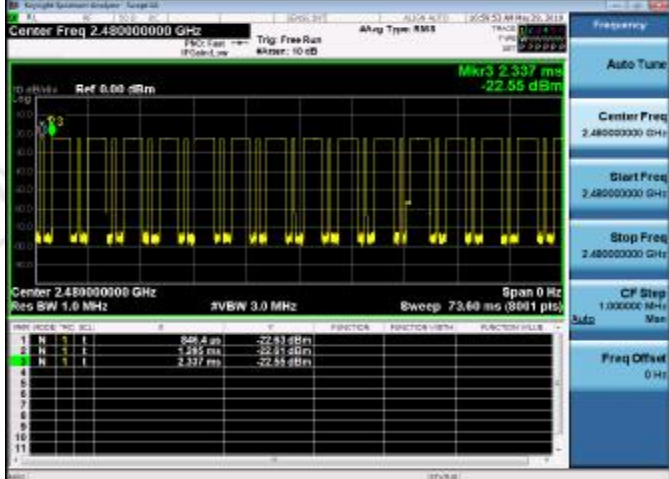
GFSK_DH5/LCH	 Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 4.076 ms -22.69 dBm Center 2.402000000 GHz Res BW 1.0 MHz Span 0 Hz Res BW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><tr><th>PK</th><th>TIME (ms)</th><th>POWER (dBm)</th></tr><tr><td>1</td><td>2.679</td><td>-22.74</td></tr><tr><td>2</td><td>2.995</td><td>-22.74</td></tr><tr><td>3</td><td>4.076</td><td>-22.69</td></tr></table>	PK	TIME (ms)	POWER (dBm)	1	2.679	-22.74	2	2.995	-22.74	3	4.076	-22.69
PK	TIME (ms)	POWER (dBm)											
1	2.679	-22.74											
2	2.995	-22.74											
3	4.076	-22.69											
GFSK_DH5/MCH	 Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 4.398 ms -23.54 dBm Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Res BW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><tr><th>PK</th><th>TIME (ms)</th><th>POWER (dBm)</th></tr><tr><td>1</td><td>2.888</td><td>-23.51</td></tr><tr><td>2</td><td>3.457</td><td>-23.47</td></tr><tr><td>3</td><td>4.398</td><td>-23.54</td></tr></table>	PK	TIME (ms)	POWER (dBm)	1	2.888	-23.51	2	3.457	-23.47	3	4.398	-23.54
PK	TIME (ms)	POWER (dBm)											
1	2.888	-23.51											
2	3.457	-23.47											
3	4.398	-23.54											
GFSK_DH5/HCH	 Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 2.337 ms -22.55 dBm Center 2.480000000 GHz Res BW 1.0 MHz Span 0 Hz Res BW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><tr><th>PK</th><th>TIME (ms)</th><th>POWER (dBm)</th></tr><tr><td>1</td><td>3.004</td><td>-22.83</td></tr><tr><td>2</td><td>3.485</td><td>-22.81</td></tr><tr><td>3</td><td>2.337</td><td>-22.55</td></tr></table>	PK	TIME (ms)	POWER (dBm)	1	3.004	-22.83	2	3.485	-22.81	3	2.337	-22.55
PK	TIME (ms)	POWER (dBm)											
1	3.004	-22.83											
2	3.485	-22.81											
3	2.337	-22.55											

Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

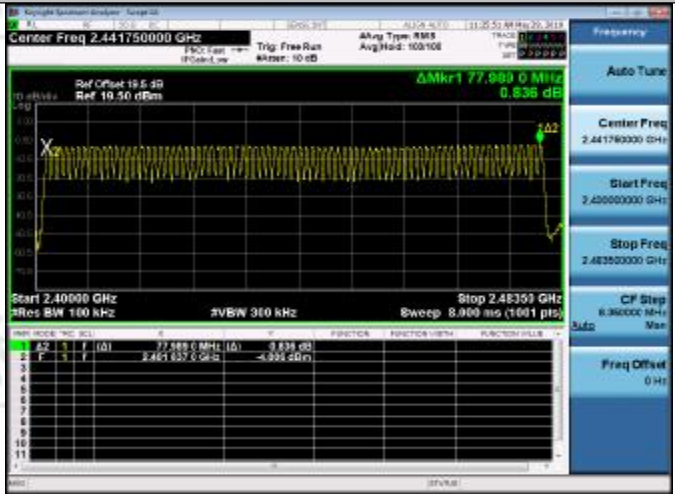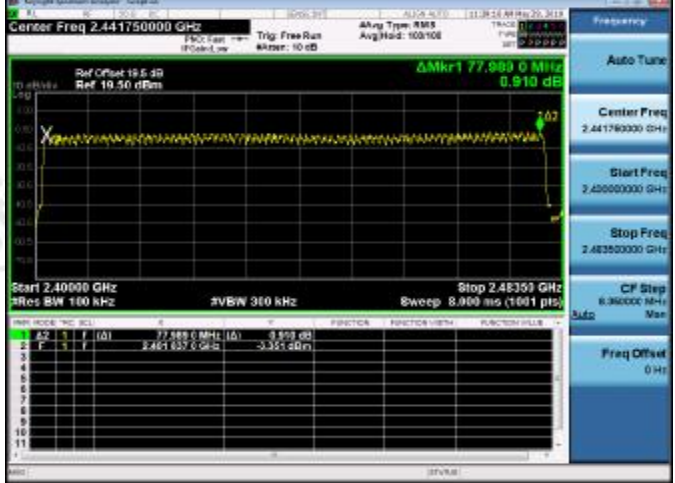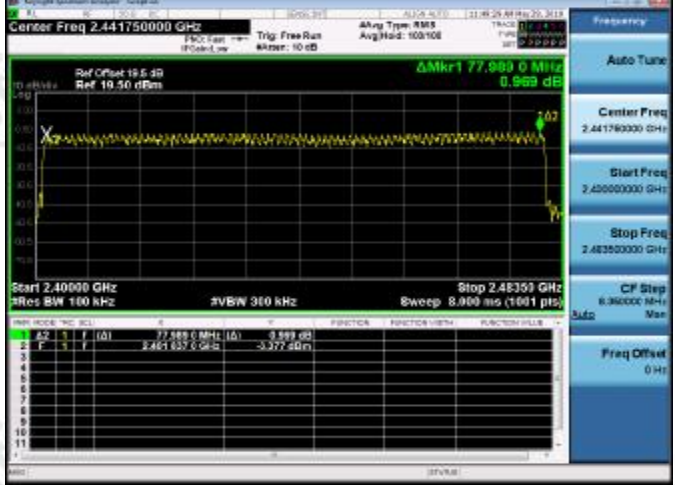
Graphs		
GFSK/Hop		
$\pi/4$ DQPSK/Hop		
8DPSK/Hop		


Appendix E): Conducted Peak Output Power




Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-2.937	PASS
GFSK	MCH	-2.561	PASS
GFSK	HCH	-1.778	PASS
$\pi/4$ DQPSK	LCH	0.552	PASS
$\pi/4$ DQPSK	MCH	0.888	PASS
$\pi/4$ DQPSK	HCH	1.757	PASS
8DPSK	LCH	1.467	PASS
8DPSK	MCH	2.003	PASS
8DPSK	HCH	2.795	PASS

Test Graph

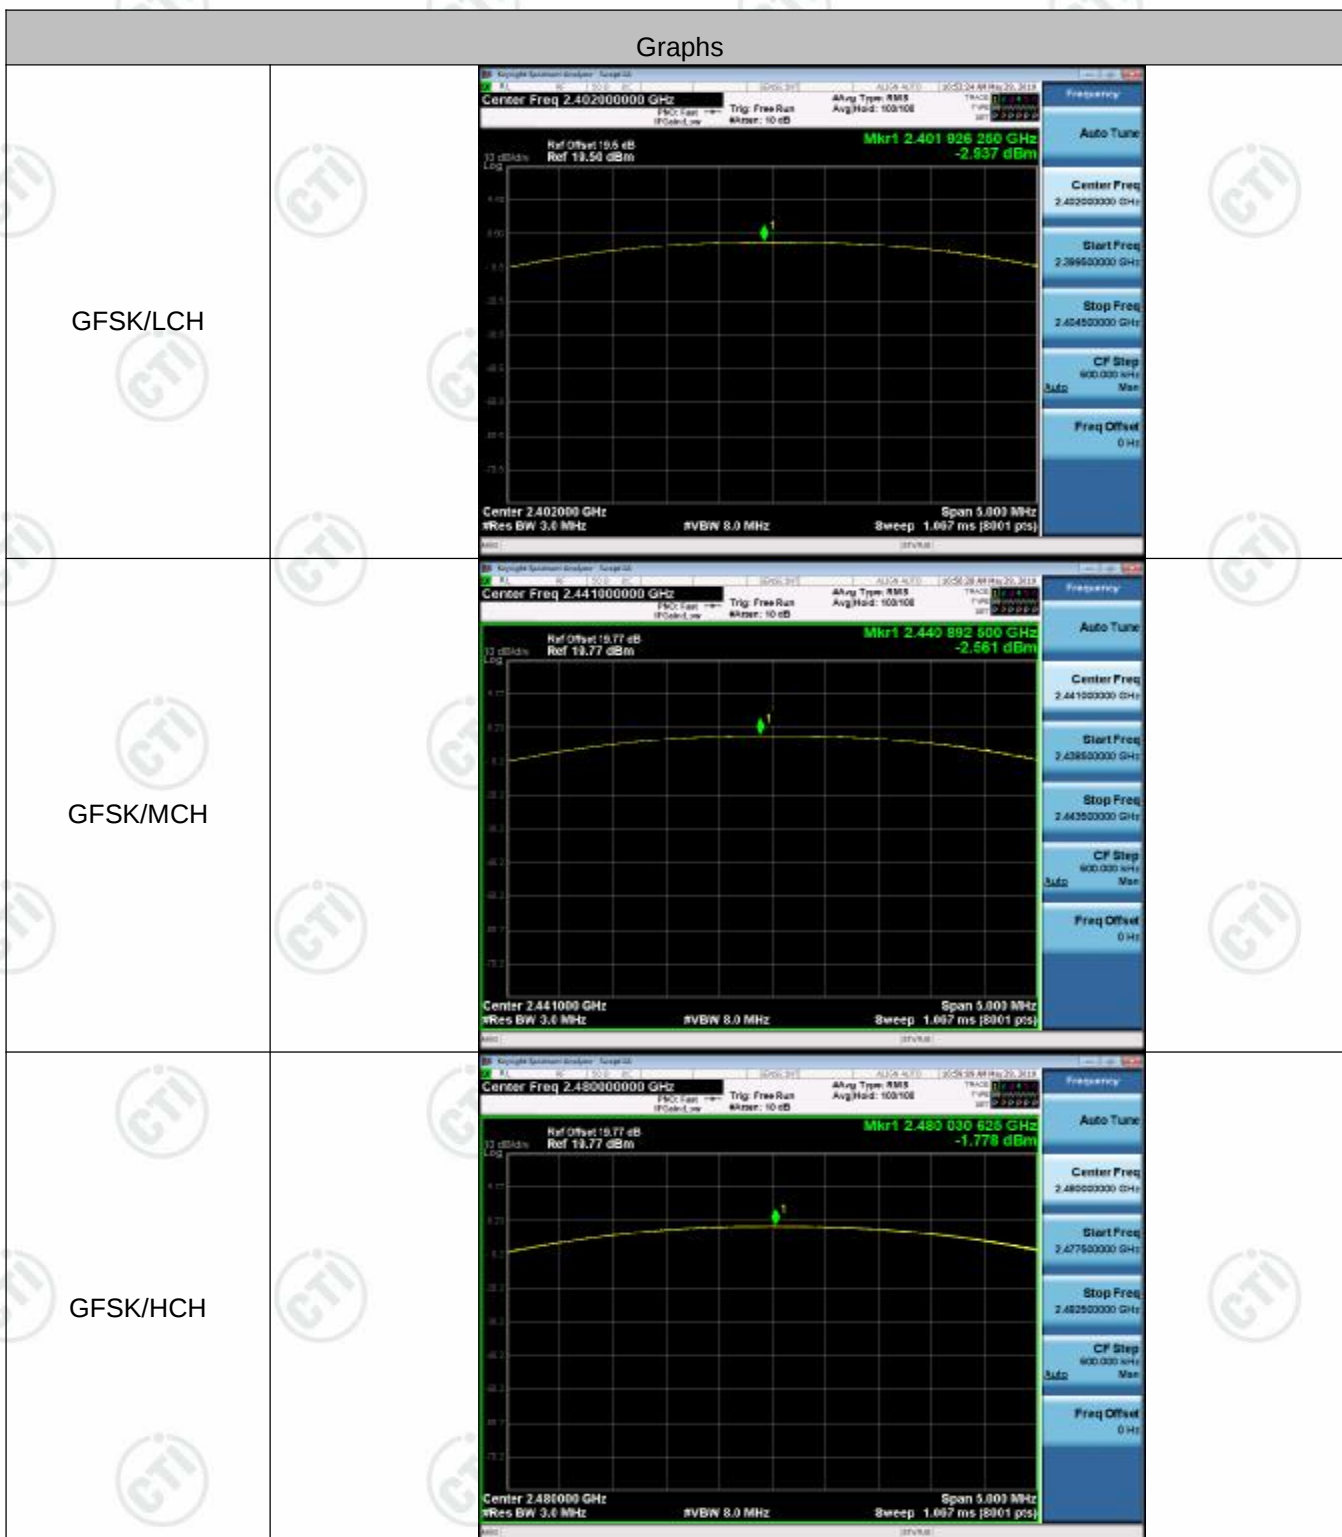

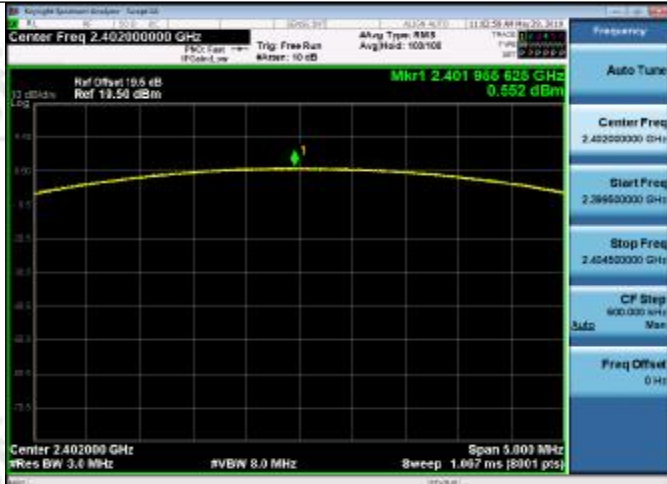$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

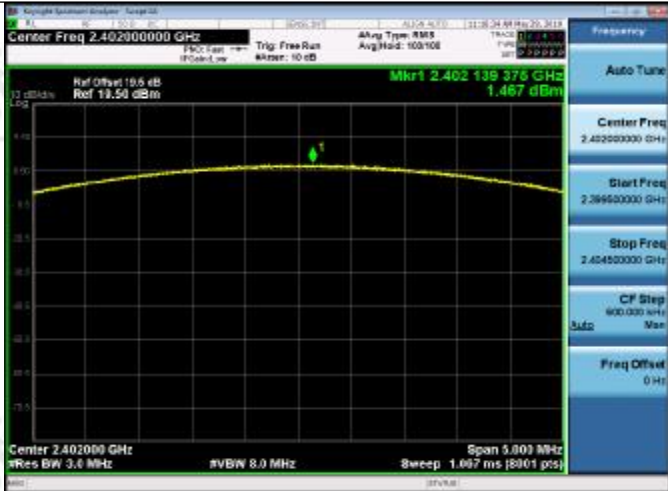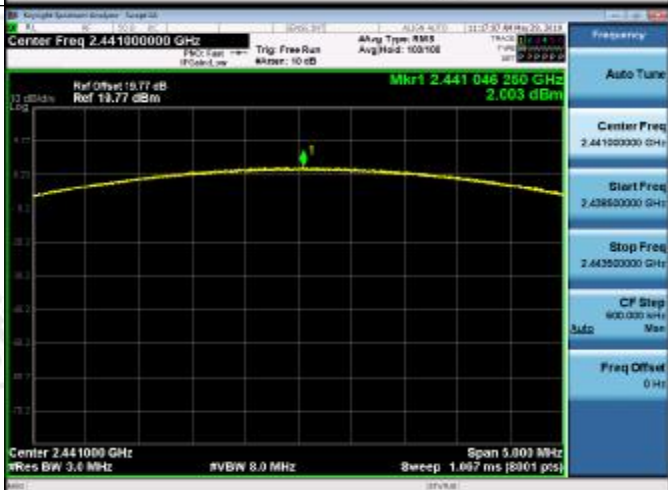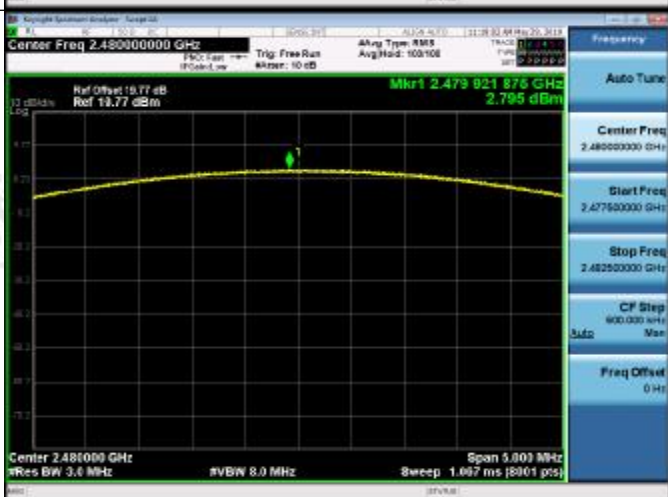8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	



Appendix F): Band-edge for RF Conducted Emissions


Result Table




Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-2.956	Off	-59.305	-22.96	PASS
			-3.265	On	-47.321	-23.27	PASS
GFSK	HCH	2480	-1.990	Off	-53.421	-21.99	PASS
			-1.847	On	-37.125	-21.85	PASS
$\pi/4$ DQPSK	LCH	2402	-3.367	Off	-58.954	-23.37	PASS
			-3.289	On	-47.252	-23.29	PASS
$\pi/4$ DQPSK	HCH	2480	-2.041	Off	-53.416	-22.04	PASS
			-2.020	On	-40.630	-22.02	PASS
8DPSK	LCH	2402	-3.421	Off	-53.881	-23.42	PASS
			-3.234	On	-47.536	-23.23	PASS
8DPSK	HCH	2480	-2.106	Off	-45.574	-22.11	PASS
			-1.965	On	-39.226	-21.97	PASS




Test Graph

Graphs

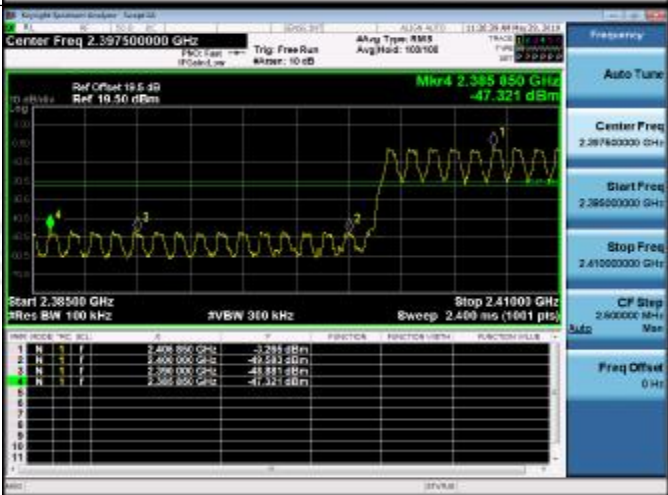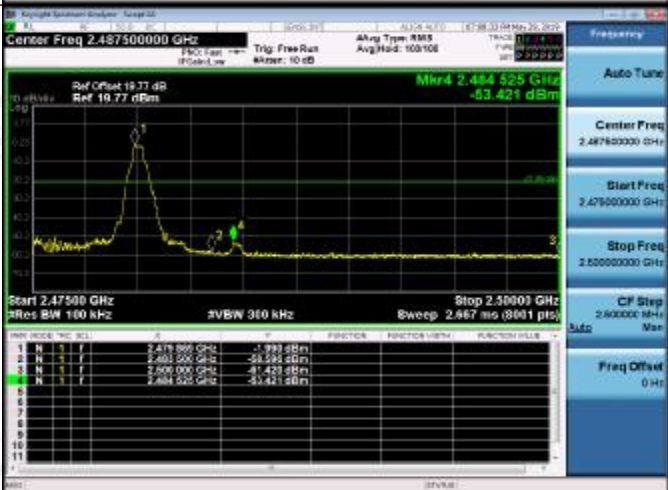GFSK/LCH/No Hop	
GFSK/LCH/Hop	
GFSK/HCH/No Hop	

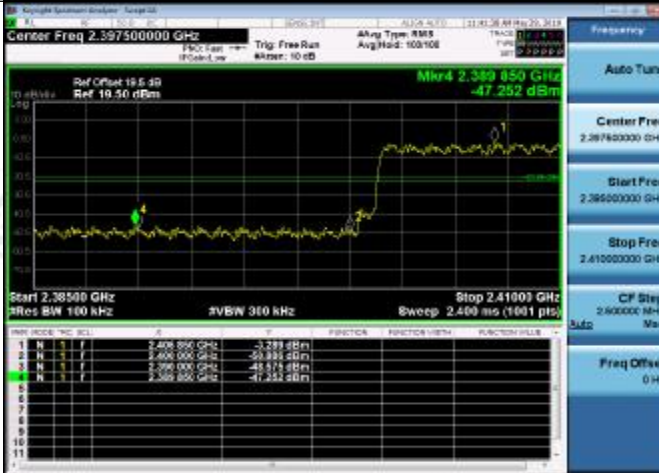GFSK/HCH/Hop	 <table><tr><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th></tr><tr><td>N</td><td>1</td><td>F</td><td>2.476 87 GHz</td><td>-5.847 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>2</td><td>F</td><td>2.483 53 GHz</td><td>-49.234 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>3</td><td>F</td><td>2.500 91 GHz</td><td>-49.414 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>4</td><td>F</td><td>2.484 49 GHz</td><td>-37.125 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	2	3	4	5	6	7	8	9	10	11	N	1	F	2.476 87 GHz	-5.847 dBm							N	2	F	2.483 53 GHz	-49.234 dBm							N	3	F	2.500 91 GHz	-49.414 dBm							N	4	F	2.484 49 GHz	-37.125 dBm							
1	2	3	4	5	6	7	8	9	10	11																																															
N	1	F	2.476 87 GHz	-5.847 dBm																																																					
N	2	F	2.483 53 GHz	-49.234 dBm																																																					
N	3	F	2.500 91 GHz	-49.414 dBm																																																					
N	4	F	2.484 49 GHz	-37.125 dBm																																																					
$\pi/4$ DQPSK/LCH/ No Hop	 <table><tr><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th></tr><tr><td>N</td><td>1</td><td>F</td><td>2.401 357 GHz</td><td>-3.387 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>2</td><td>F</td><td>2.408 022 GHz</td><td>-50.642 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>3</td><td>F</td><td>2.395 000 GHz</td><td>-47.594 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>4</td><td>F</td><td>2.387 387 GHz</td><td>-38.954 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	2	3	4	5	6	7	8	9	10	11	N	1	F	2.401 357 GHz	-3.387 dBm							N	2	F	2.408 022 GHz	-50.642 dBm							N	3	F	2.395 000 GHz	-47.594 dBm							N	4	F	2.387 387 GHz	-38.954 dBm							
1	2	3	4	5	6	7	8	9	10	11																																															
N	1	F	2.401 357 GHz	-3.387 dBm																																																					
N	2	F	2.408 022 GHz	-50.642 dBm																																																					
N	3	F	2.395 000 GHz	-47.594 dBm																																																					
N	4	F	2.387 387 GHz	-38.954 dBm																																																					
$\pi/4$ DQPSK/LCH/ Hop	 <table><tr><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th></tr><tr><td>N</td><td>1</td><td>F</td><td>2.408 890 GHz</td><td>-3.289 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>2</td><td>F</td><td>2.400 000 GHz</td><td>-50.981 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>3</td><td>F</td><td>2.390 000 GHz</td><td>-48.574 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td>4</td><td>F</td><td>2.389 850 GHz</td><td>-47.252 dBm</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	1	2	3	4	5	6	7	8	9	10	11	N	1	F	2.408 890 GHz	-3.289 dBm							N	2	F	2.400 000 GHz	-50.981 dBm							N	3	F	2.390 000 GHz	-48.574 dBm							N	4	F	2.389 850 GHz	-47.252 dBm							
1	2	3	4	5	6	7	8	9	10	11																																															
N	1	F	2.408 890 GHz	-3.289 dBm																																																					
N	2	F	2.400 000 GHz	-50.981 dBm																																																					
N	3	F	2.390 000 GHz	-48.574 dBm																																																					
N	4	F	2.389 850 GHz	-47.252 dBm																																																					

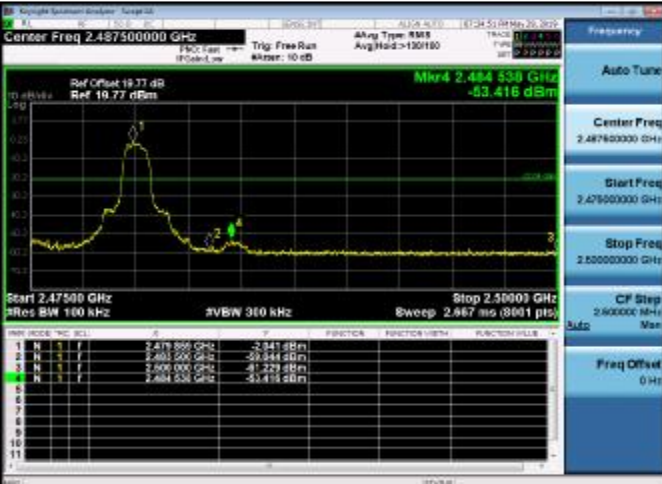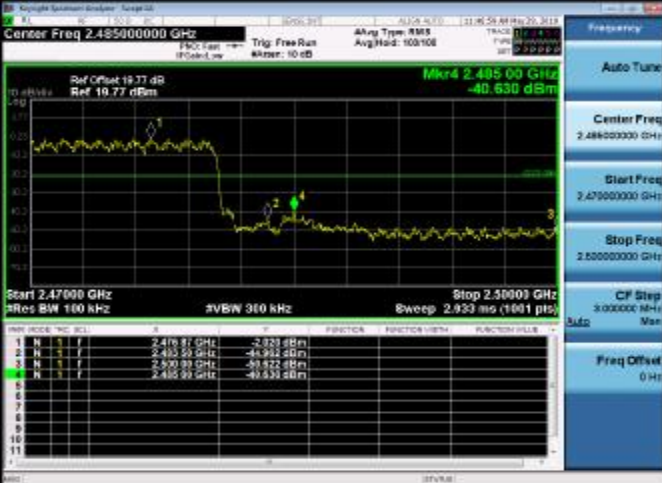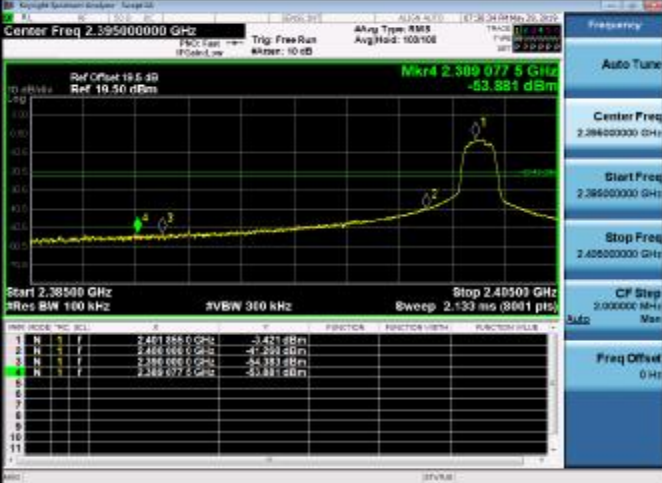$\pi/4$DQPSK/HCH/ No Hop		
$\pi/4$DQPSK/HCH/ Hop		
8DPSK/LCH/No Hop		

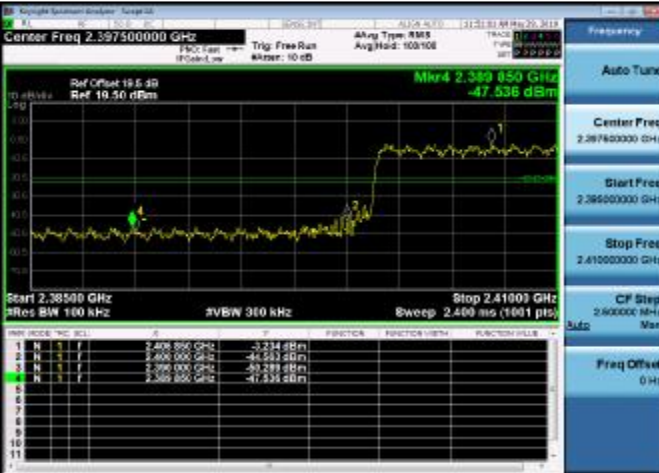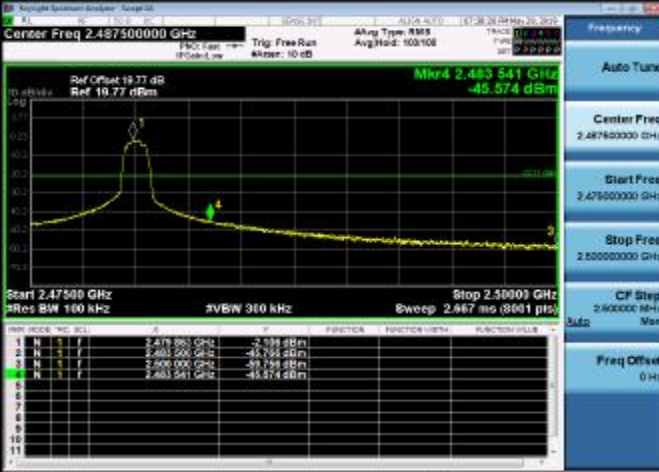
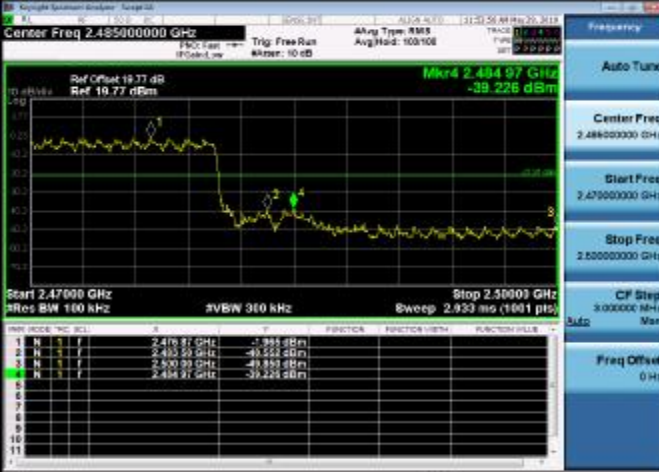
8DPSK/LCH/Hop		
8DPSK/HCH/No Hop		
8DPSK/HCH/Hop		


Appendix G): RF Conducted Spurious Emissions

Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-3.166	<Limit	PASS
GFSK	MCH	-2.897	<Limit	PASS
GFSK	HCH	-2.056	<Limit	PASS
$\pi/4$ DQPSK	LCH	-3.385	<Limit	PASS
$\pi/4$ DQPSK	MCH	-2.937	<Limit	PASS
$\pi/4$ DQPSK	HCH	-2.073	<Limit	PASS
8DPSK	LCH	-3.457	<Limit	PASS
8DPSK	MCH	-2.988	<Limit	PASS
8DPSK	HCH	-2.139	<Limit	PASS


Test Graph

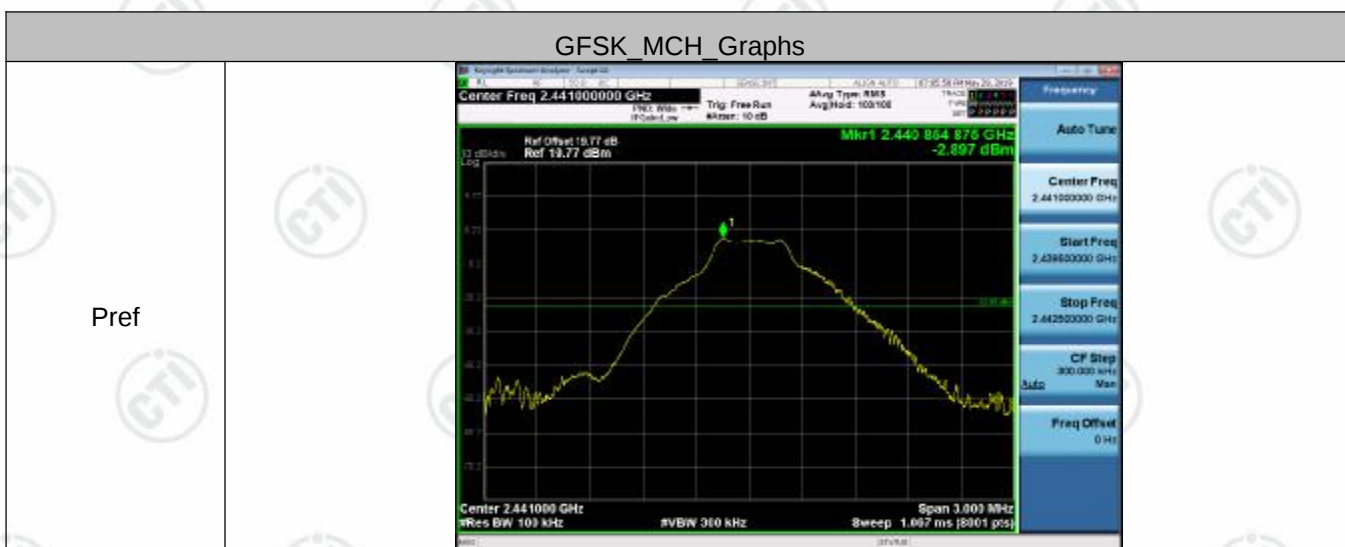
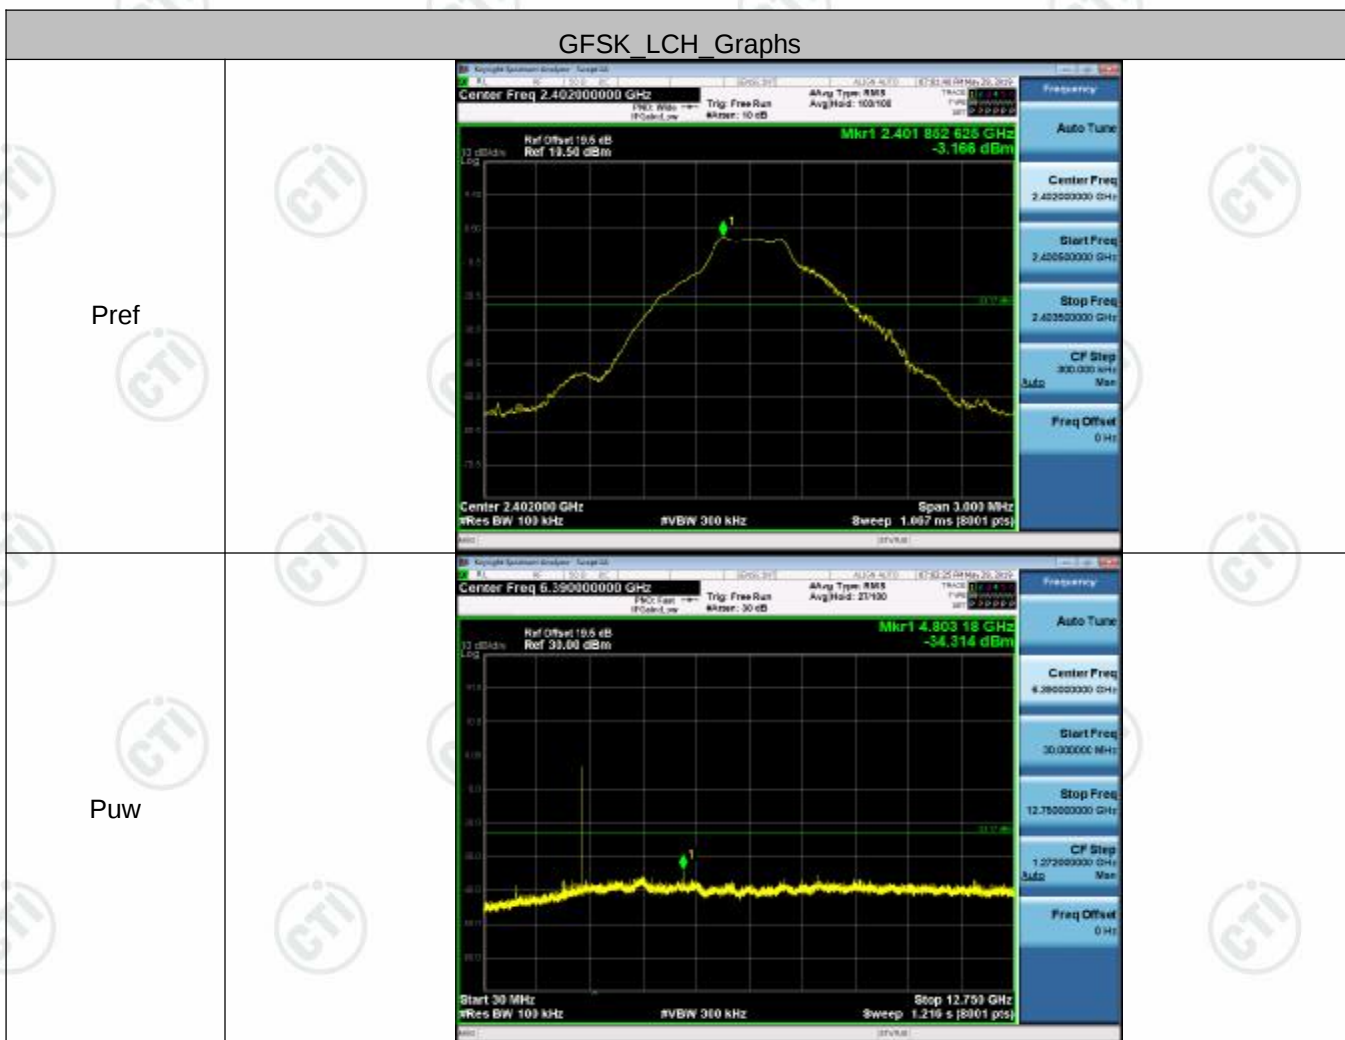


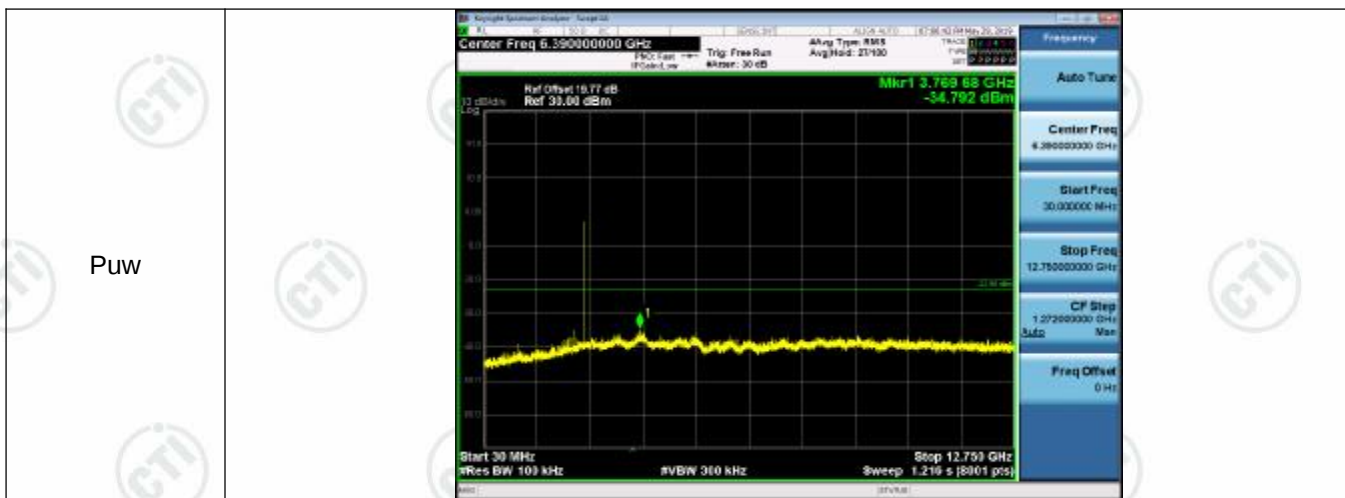



GFSK_HCH Graphs

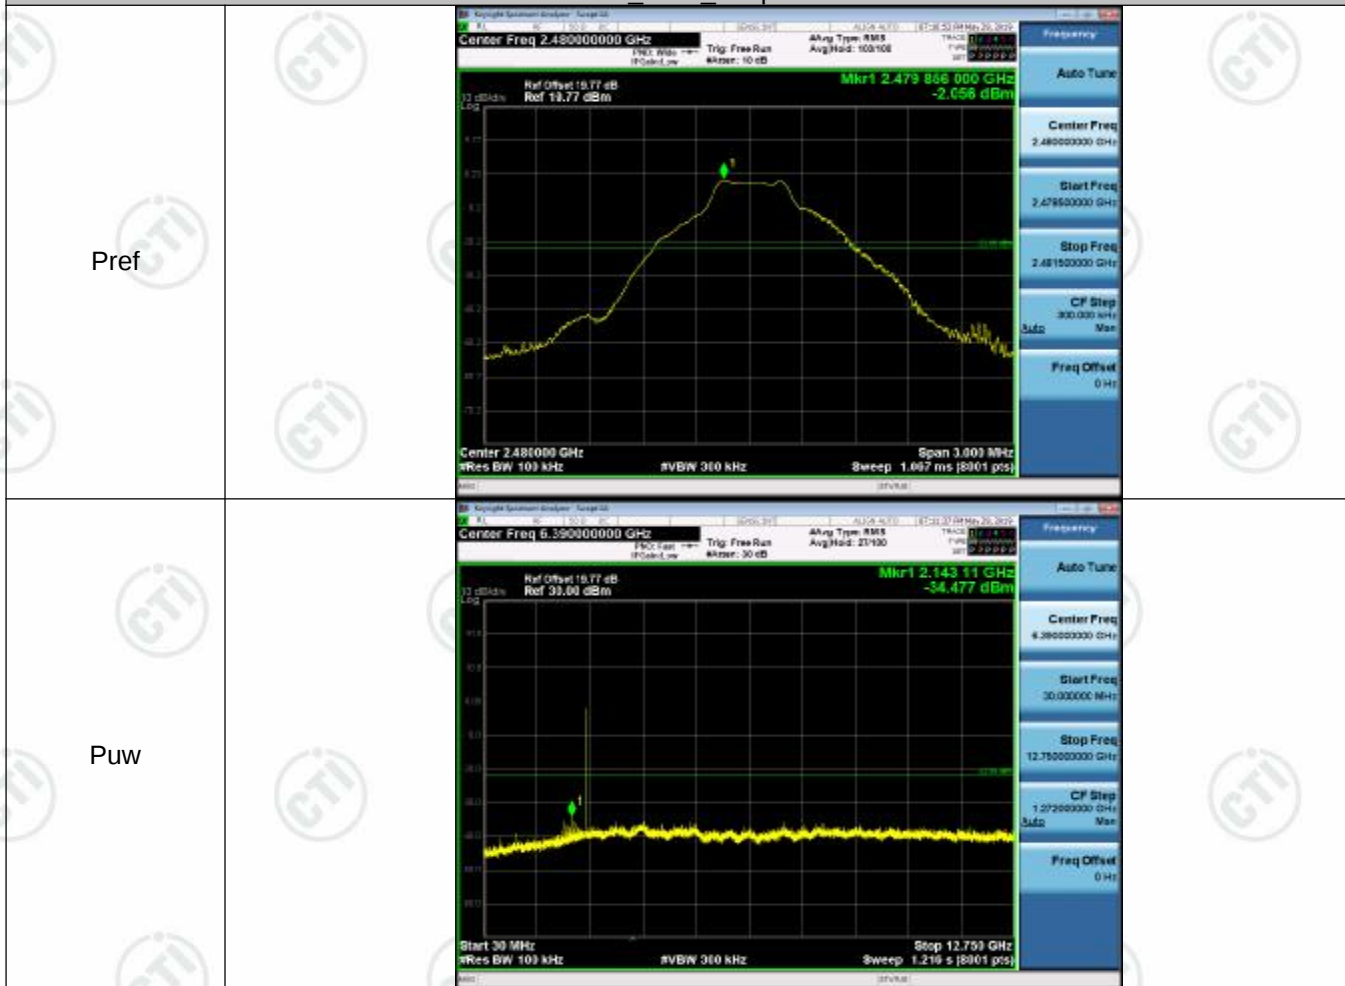

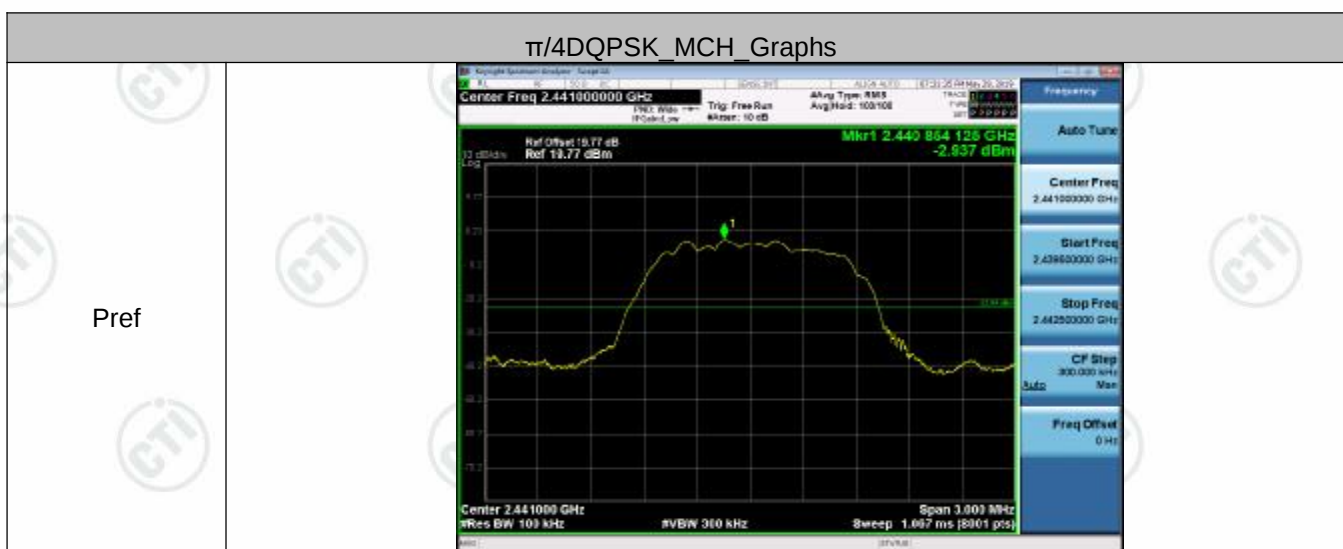

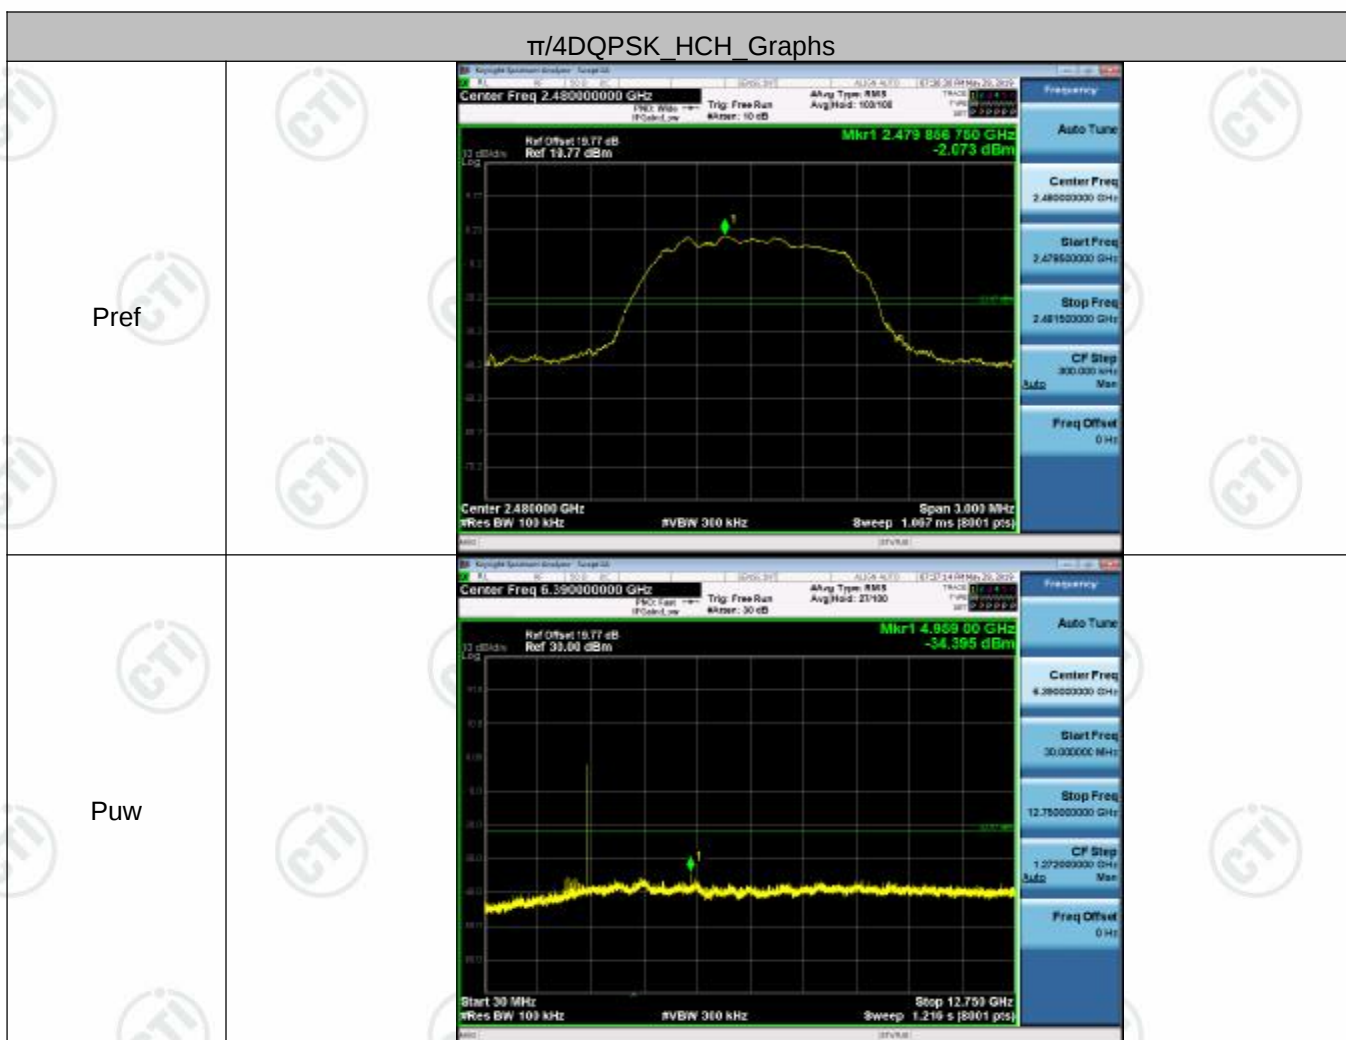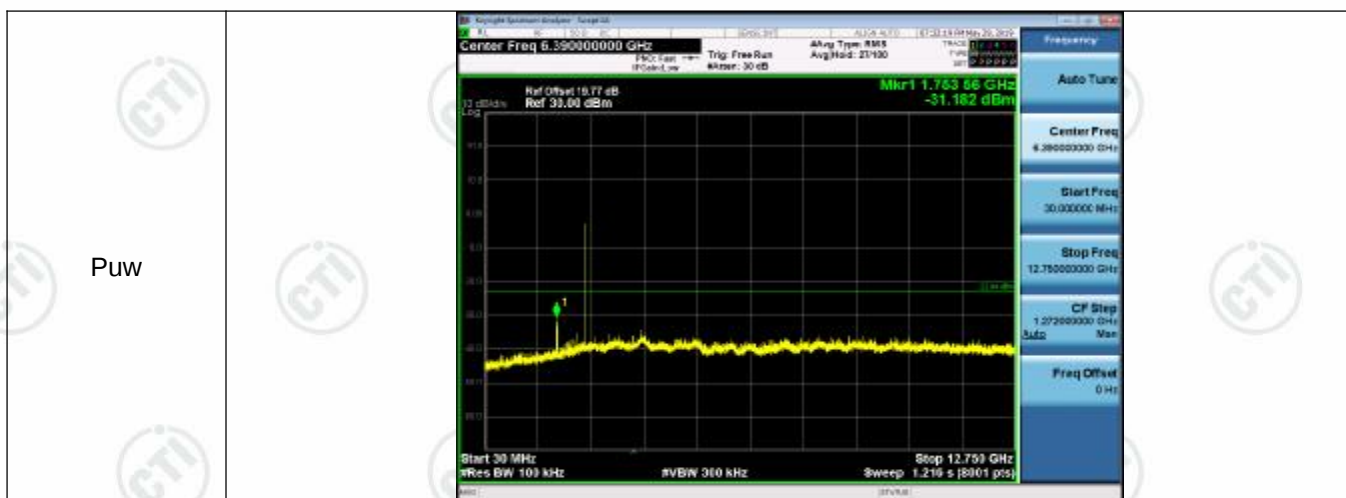

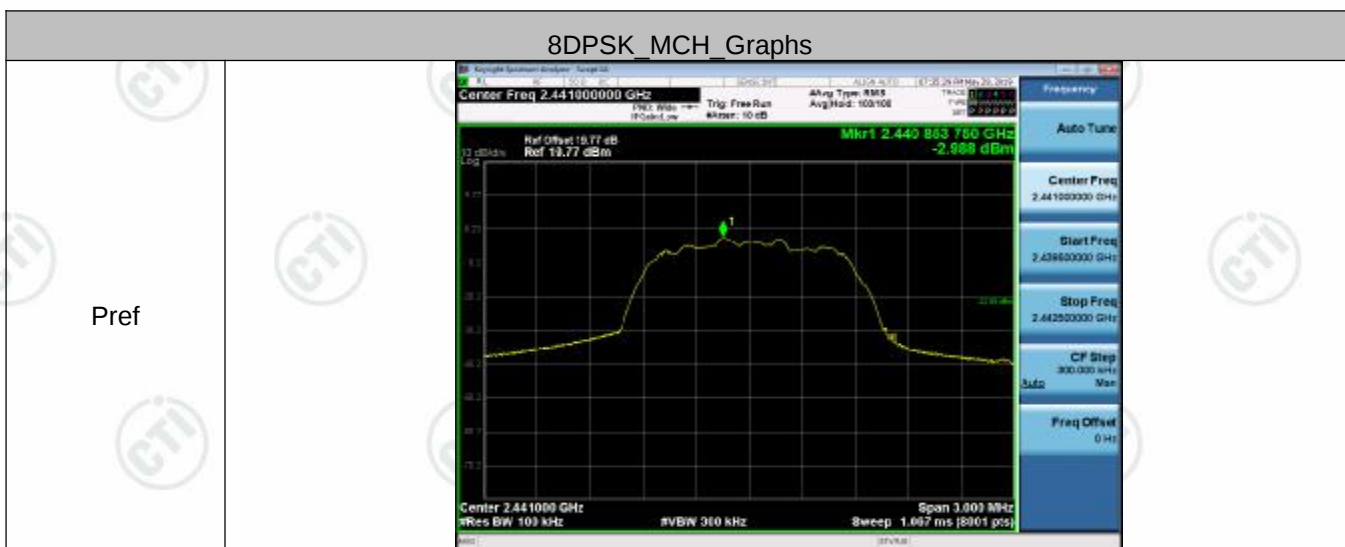

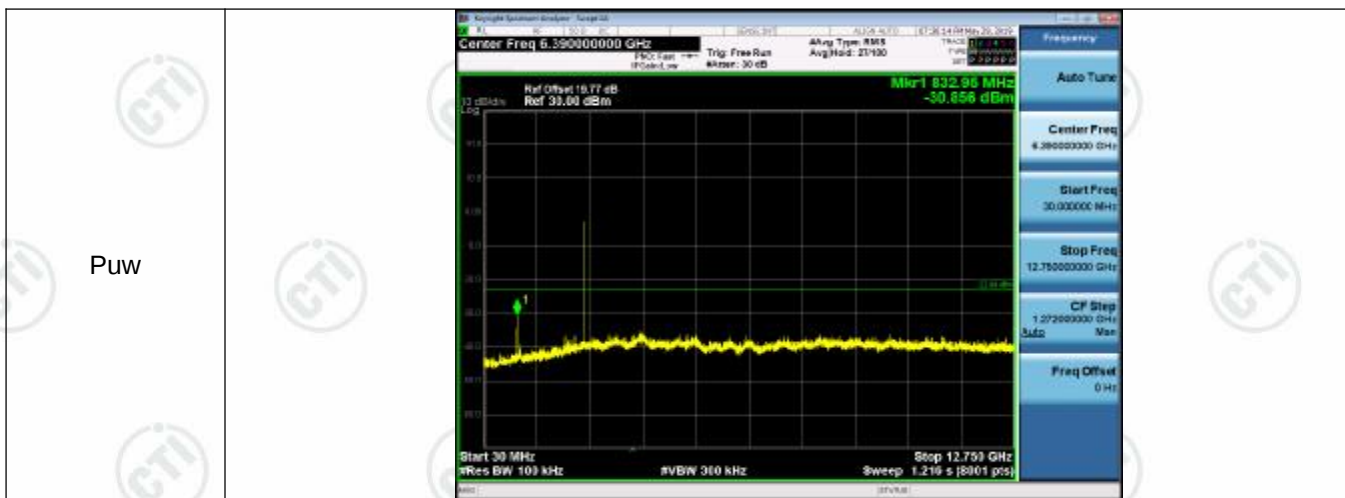

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

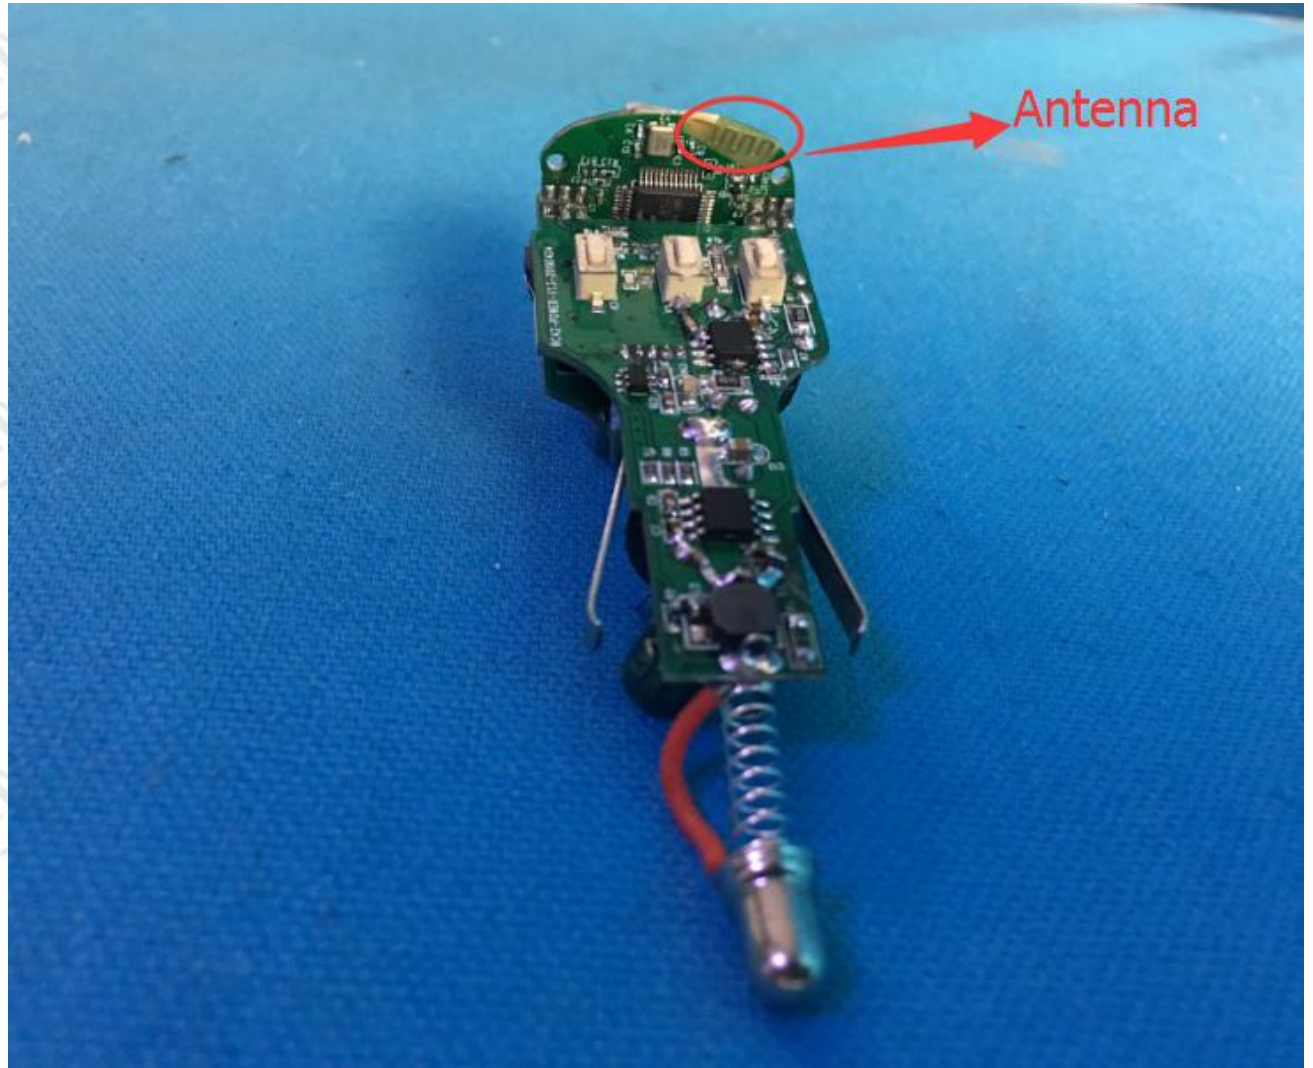


Appendix J): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. b. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBµV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		
Test Ambient:	Temp.: 23°C	Humid.: 54%	Press.: 101kPa		

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

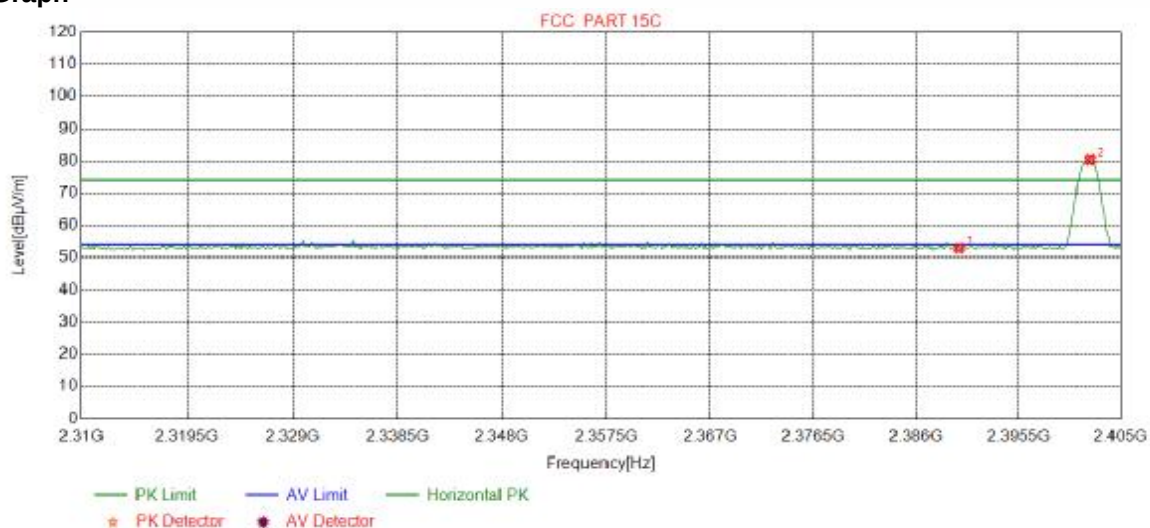

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.70	52.88	74.00	21.12	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	77.19	80.33	74.00	-6.33	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

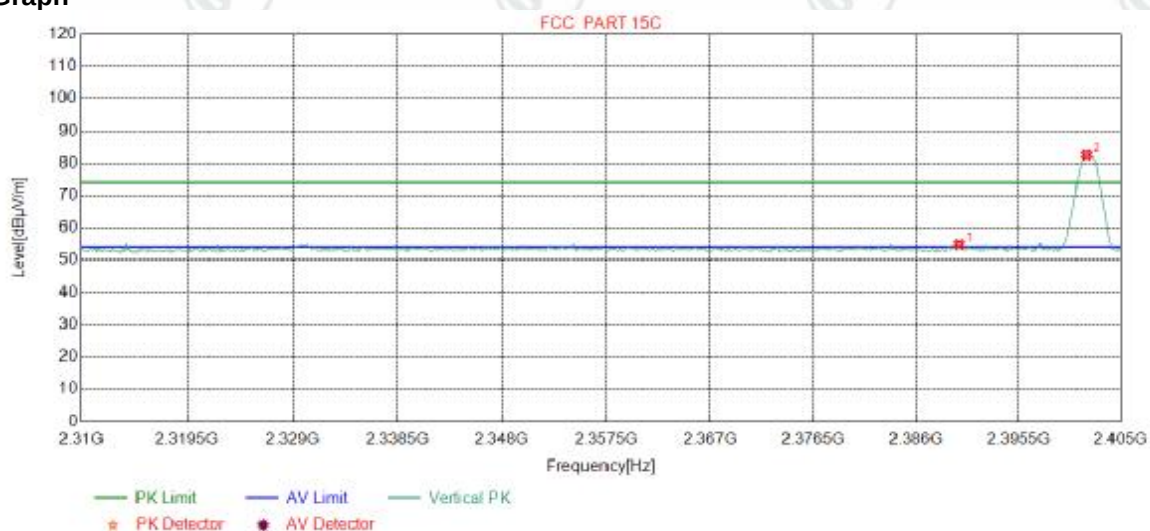

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	51.64	54.82	74.00	19.18	Pass	Vertical
2	2401.7897	32.26	13.31	-42.43	79.37	82.51	74.00	-8.51	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

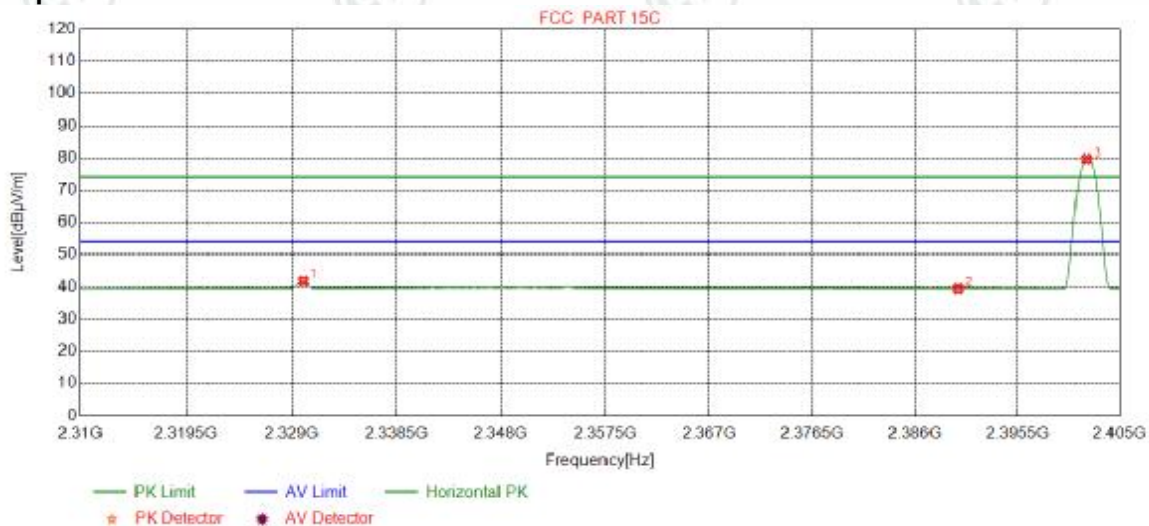

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2330.0939	32.16	13.52	-42.46	38.53	41.75	54.00	12.25	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	36.27	39.45	54.00	14.55	Pass	Horizontal
3	2401.9086	32.26	13.31	-42.43	76.48	79.62	54.00	-25.62	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

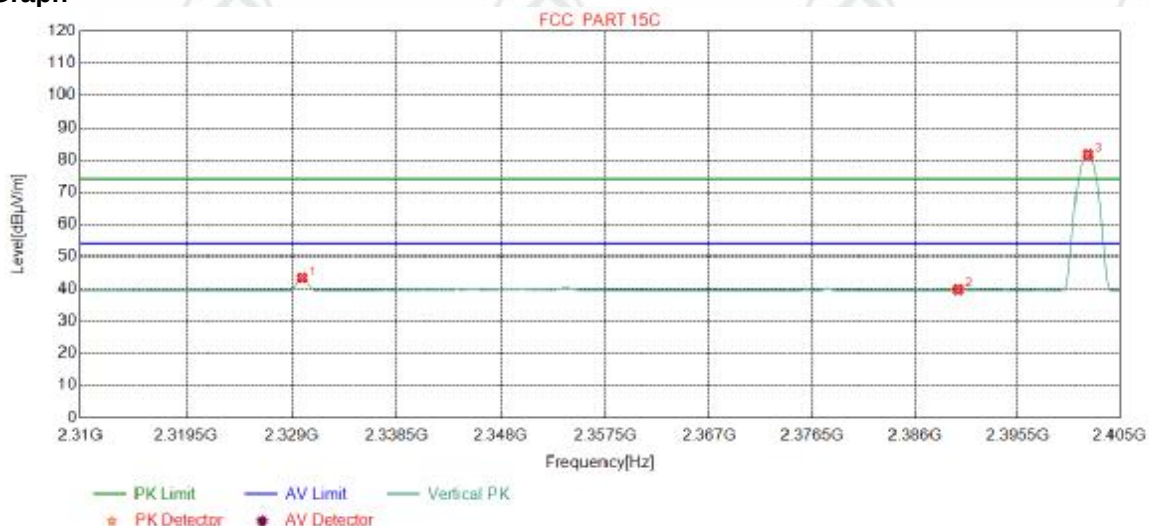

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2329.9750	32.16	13.52	-42.47	40.17	43.38	54.00	10.62	Pass	Vertical
2	2390.0000	32.25	13.37	-42.44	36.59	39.77	54.00	14.23	Pass	Vertical
3	2402.0275	32.26	13.31	-42.43	78.48	81.62	54.00	-27.62	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

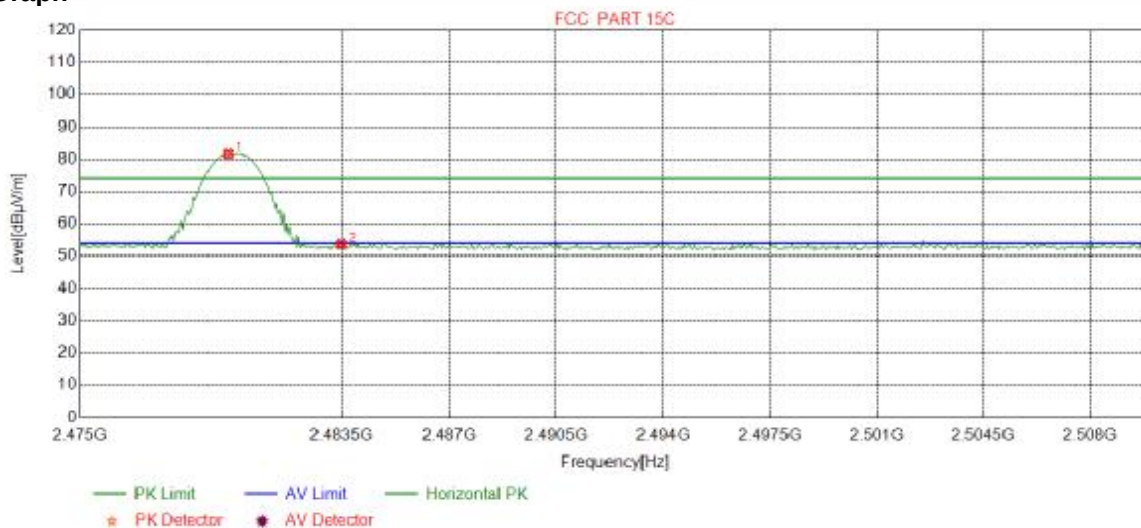

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8185	32.37	13.39	-42.39	78.24	81.61	74.00	-7.61	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	50.34	53.70	74.00	20.30	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

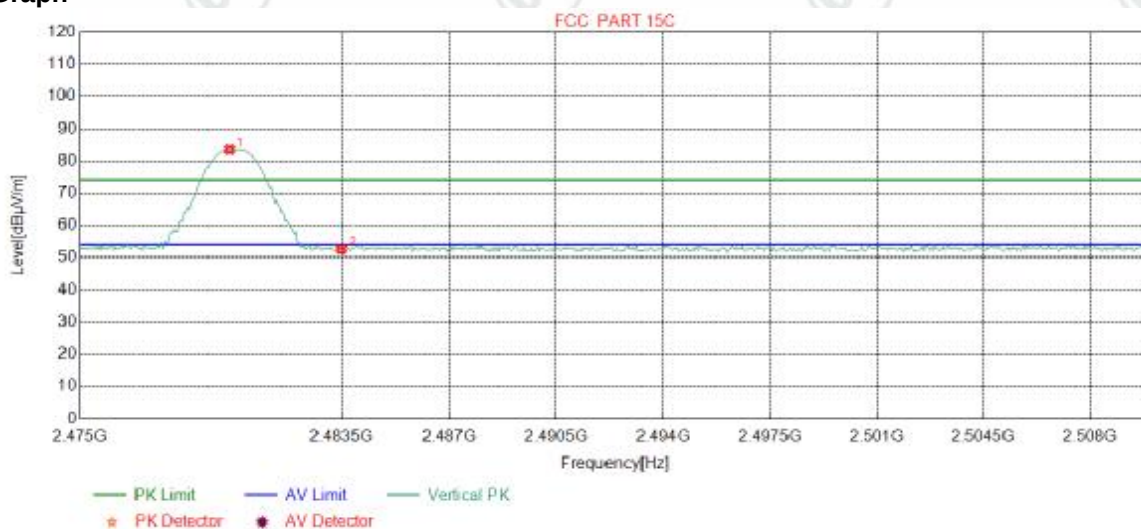

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8623	32.37	13.39	-42.39	80.10	83.47	74.00	-9.47	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.31	52.67	74.00	21.33	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

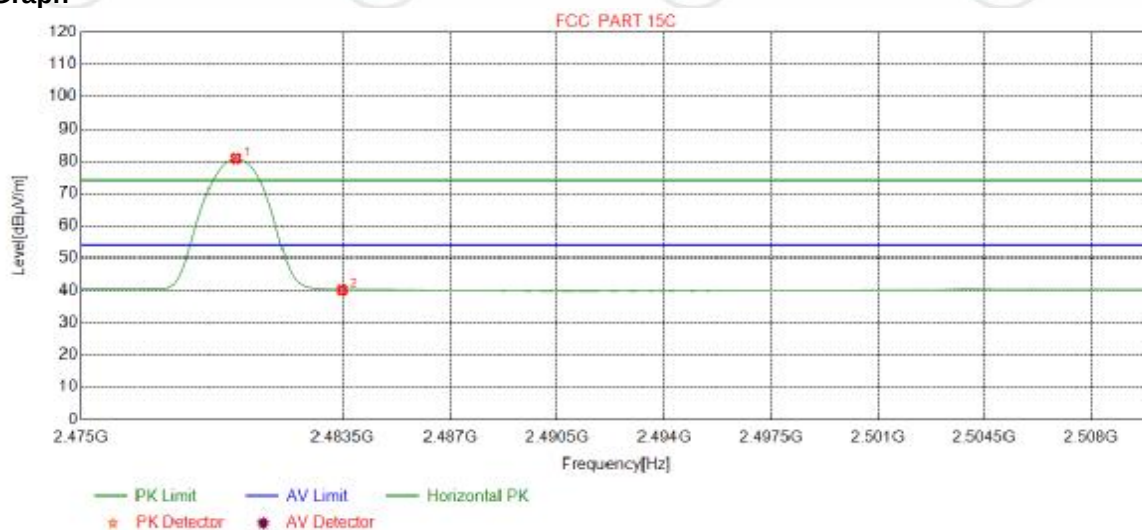

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	77.42	80.79	54.00	-26.79	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.74	40.10	54.00	13.90	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

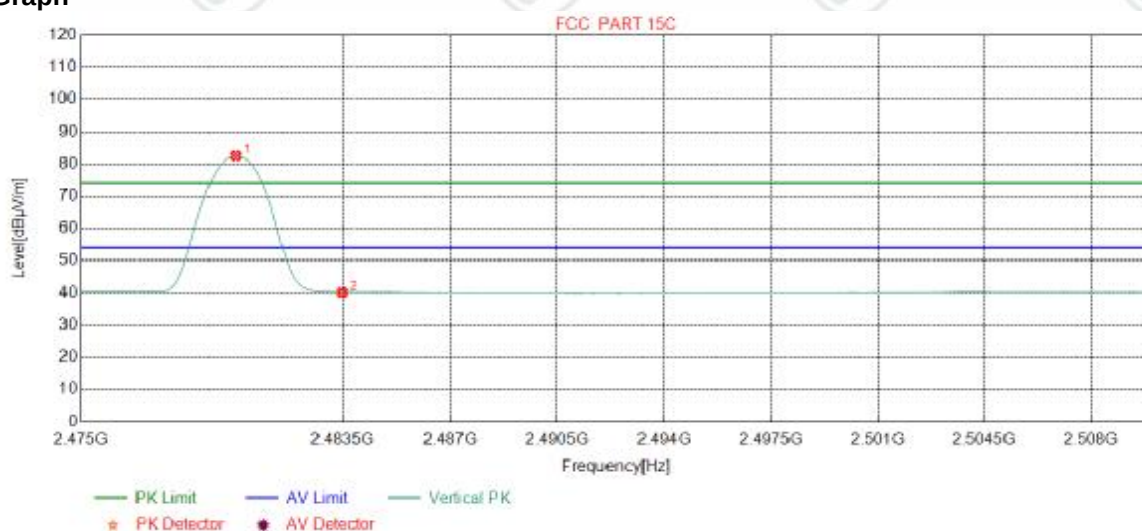

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	79.14	82.51	54.00	-28.51	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.77	40.13	54.00	13.87	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

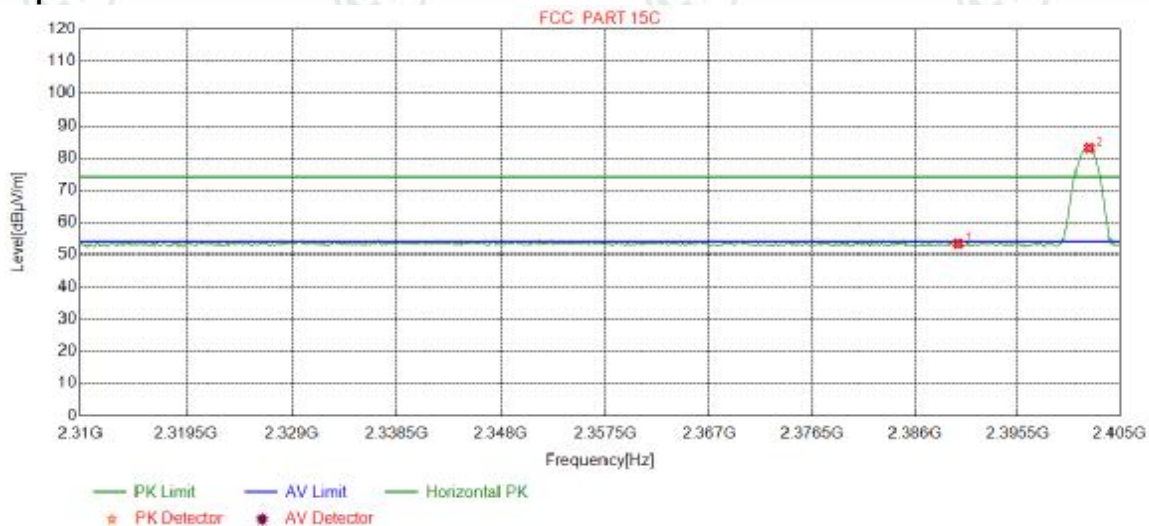

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.16	53.34	74.00	20.66	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	79.80	82.94	74.00	-8.94	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

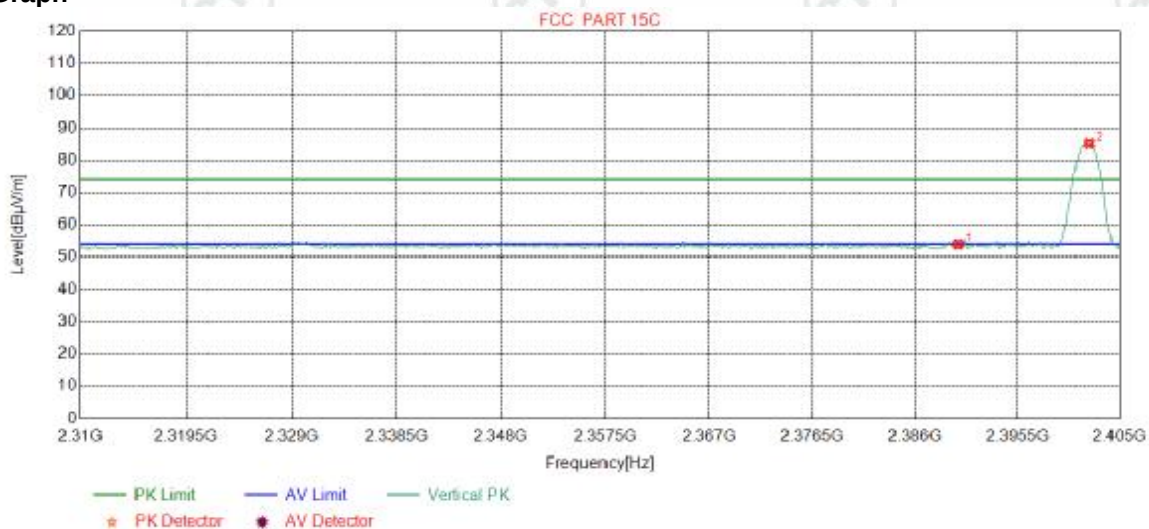

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.71	53.89	74.00	20.11	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	82.01	85.15	74.00	-11.15	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

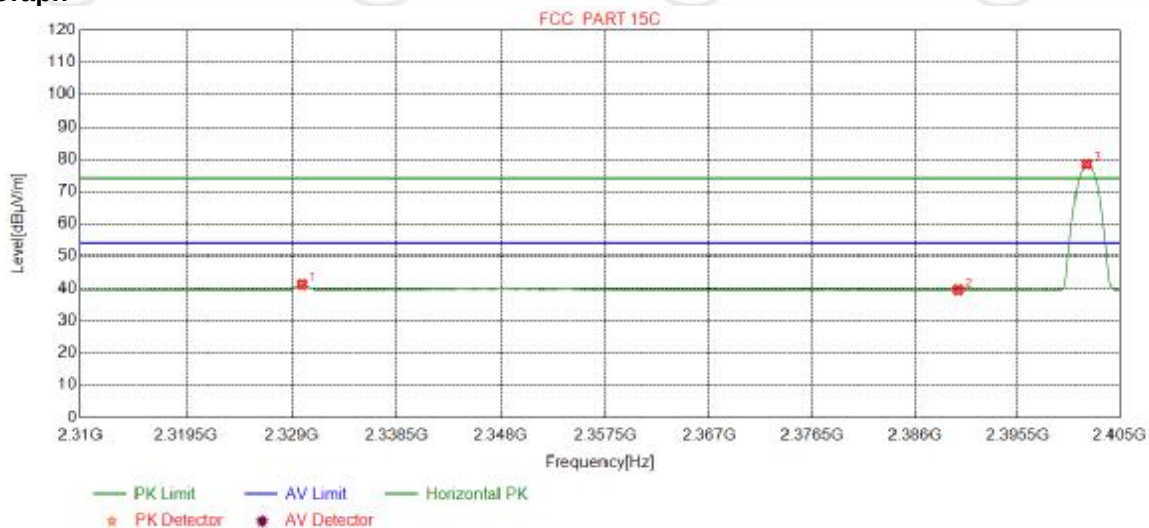

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2329.9750	32.16	13.52	-42.47	38.02	41.23	54.00	12.77	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	36.35	39.53	54.00	14.47	Pass	Horizontal
3	2401.9086	32.26	13.31	-42.43	75.33	78.47	54.00	-24.47	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

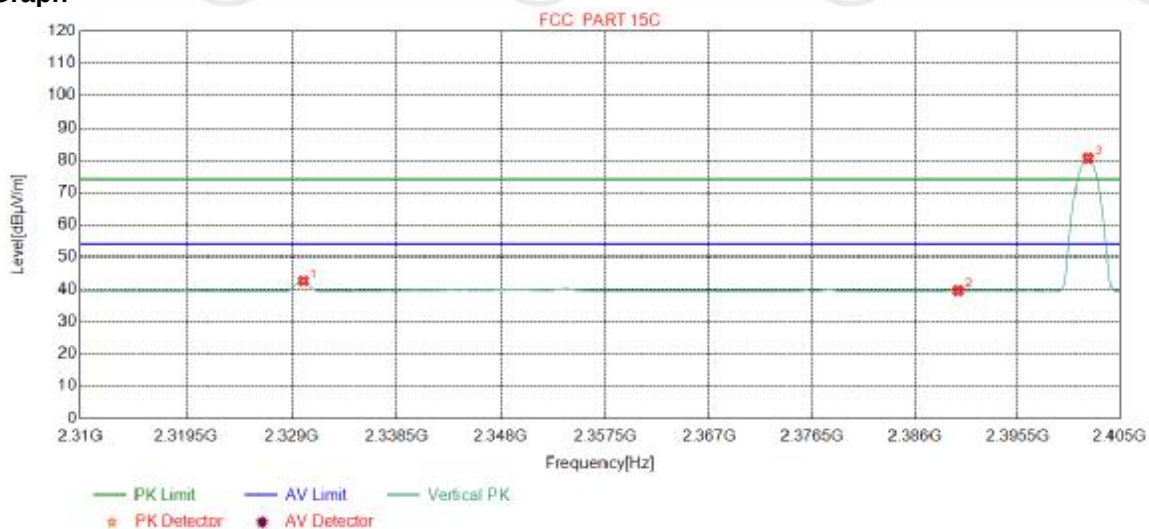

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2330.0939	32.16	13.52	-42.46	39.32	42.54	54.00	11.46	Pass	Vertical
2	2390.0000	32.25	13.37	-42.44	36.46	39.64	54.00	14.36	Pass	Vertical
3	2402.0275	32.26	13.31	-42.43	77.44	80.58	54.00	-26.58	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

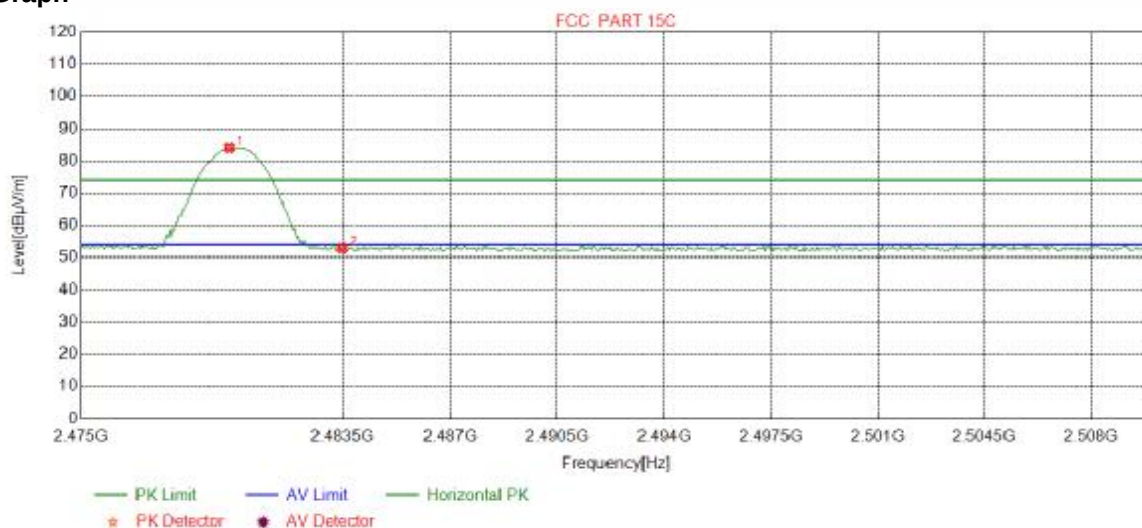

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8185	32.37	13.39	-42.39	80.62	83.99	74.00	-9.99	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.56	52.92	74.00	21.08	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

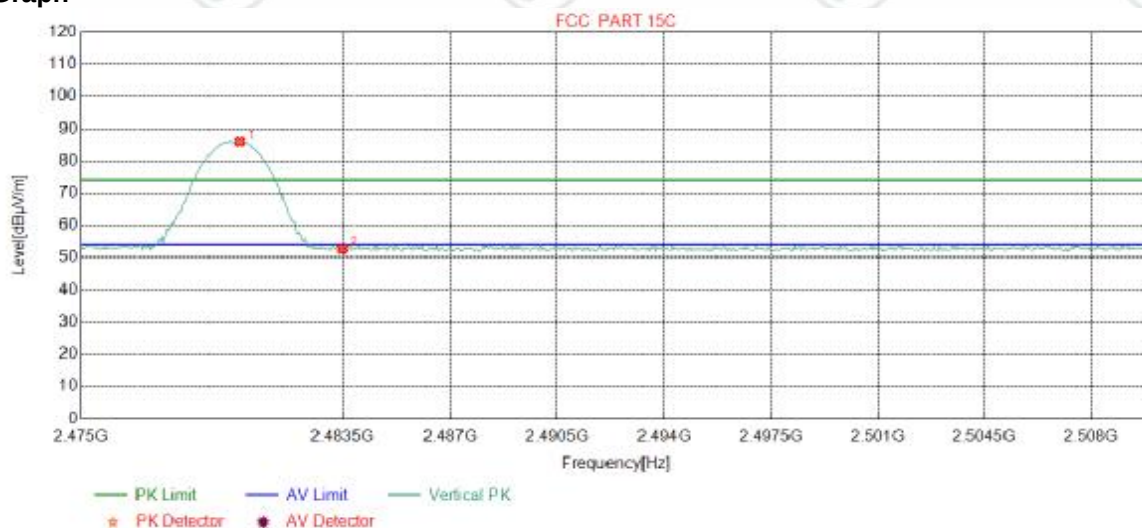

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1690	32.37	13.39	-42.40	82.59	85.95	74.00	-11.95	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.36	52.72	74.00	21.28	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

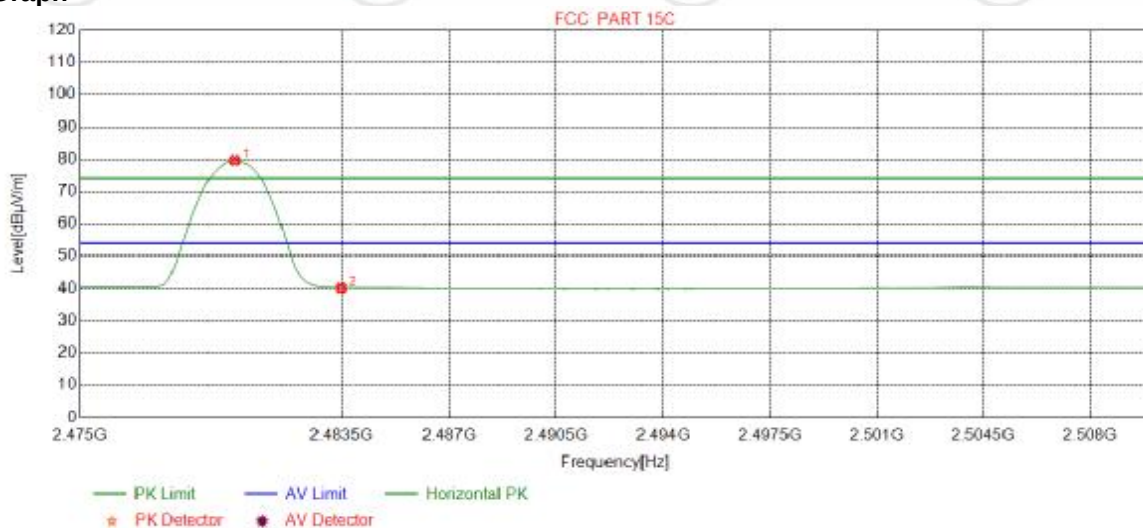

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	76.26	79.63	54.00	-25.63	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.74	40.10	54.00	13.90	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

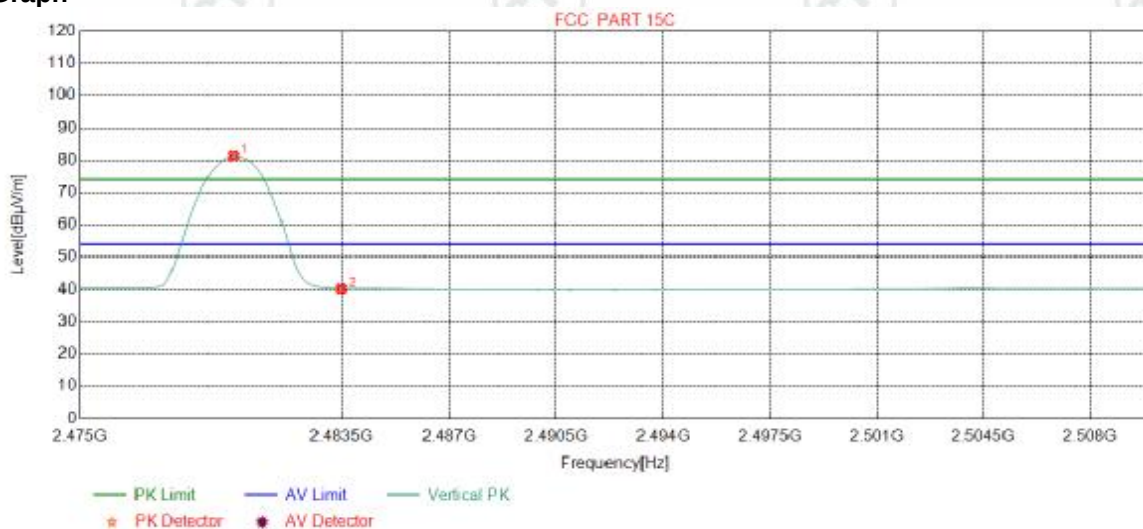

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	77.93	81.30	54.00	-27.30	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.79	40.15	54.00	13.85	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

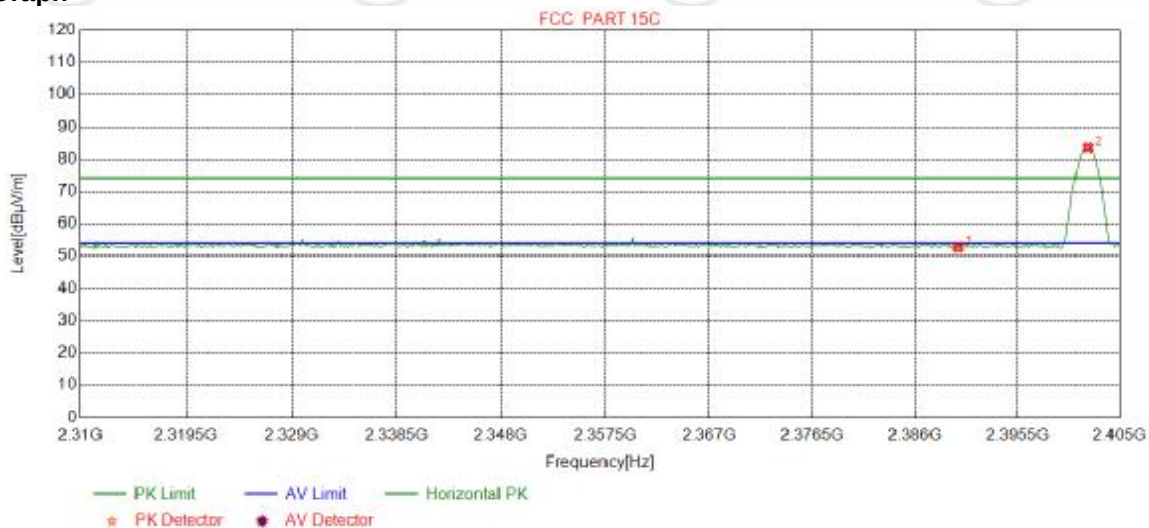

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.55	52.73	74.00	21.27	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	80.33	83.47	74.00	-9.47	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

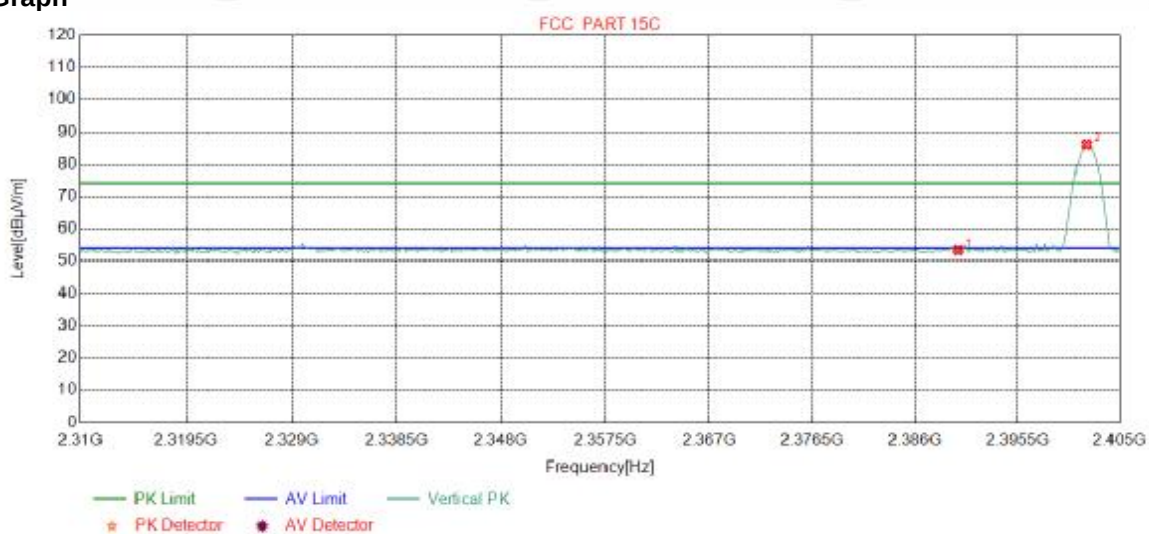

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.21	53.39	74.00	20.61	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	82.88	86.02	74.00	-12.02	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

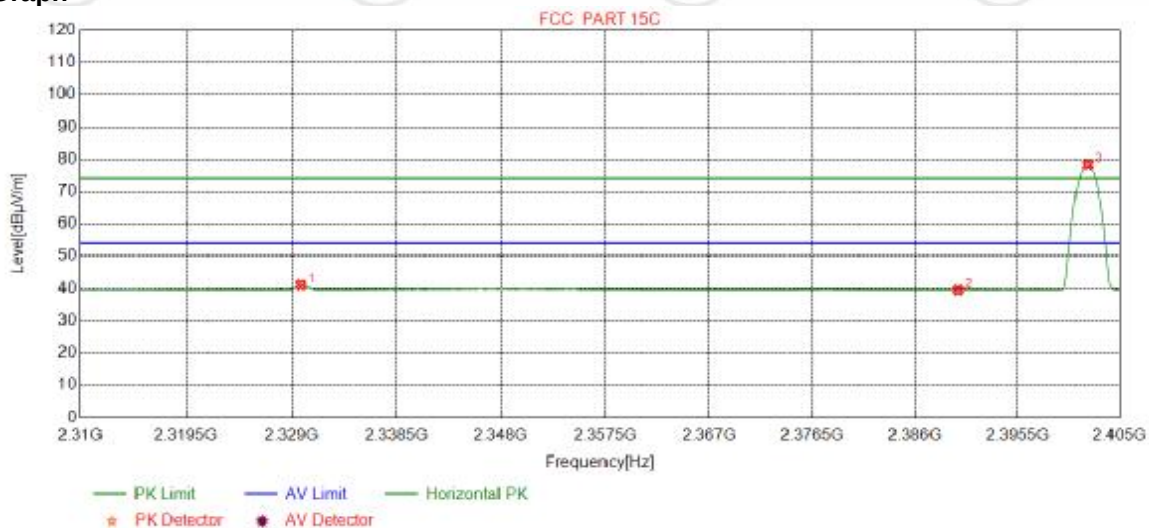

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2329.8561	32.16	13.52	-42.47	37.88	41.09	54.00	12.91	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	36.31	39.49	54.00	14.51	Pass	Horizontal
3	2402.0275	32.26	13.31	-42.43	75.13	78.27	54.00	-24.27	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

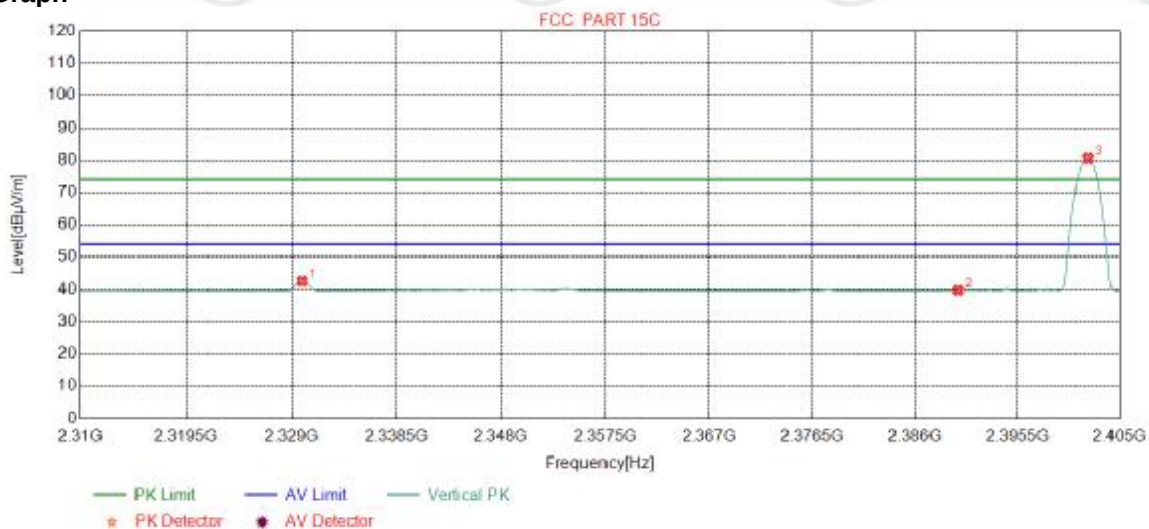

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2329.9750	32.16	13.52	-42.47	39.34	42.55	54.00	11.45	Pass	Vertical
2	2390.0000	32.25	13.37	-42.44	36.57	39.75	54.00	14.25	Pass	Vertical
3	2402.0275	32.26	13.31	-42.43	77.47	80.61	54.00	-26.61	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

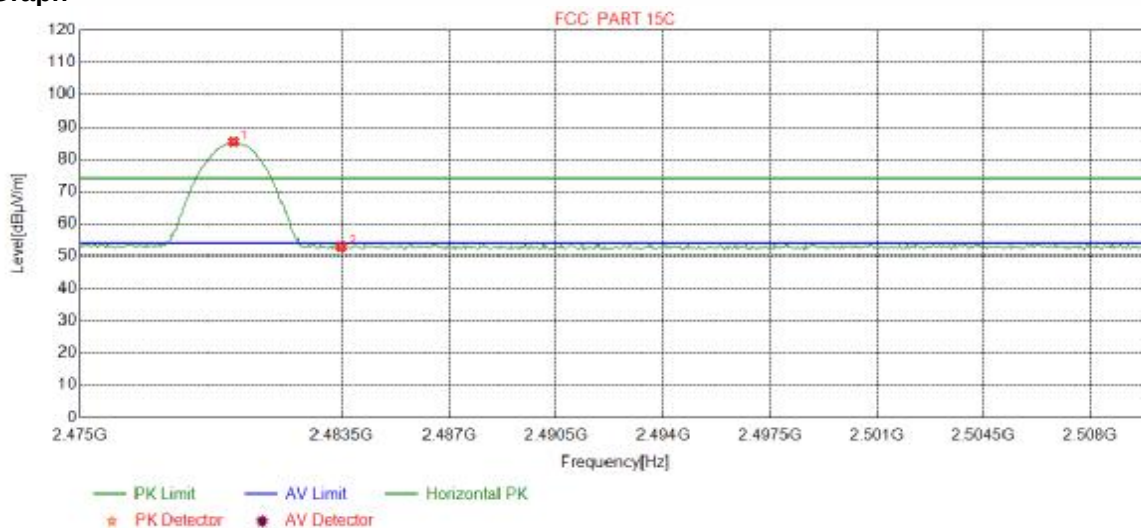

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	81.95	85.32	74.00	-11.32	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.49	52.85	74.00	21.15	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

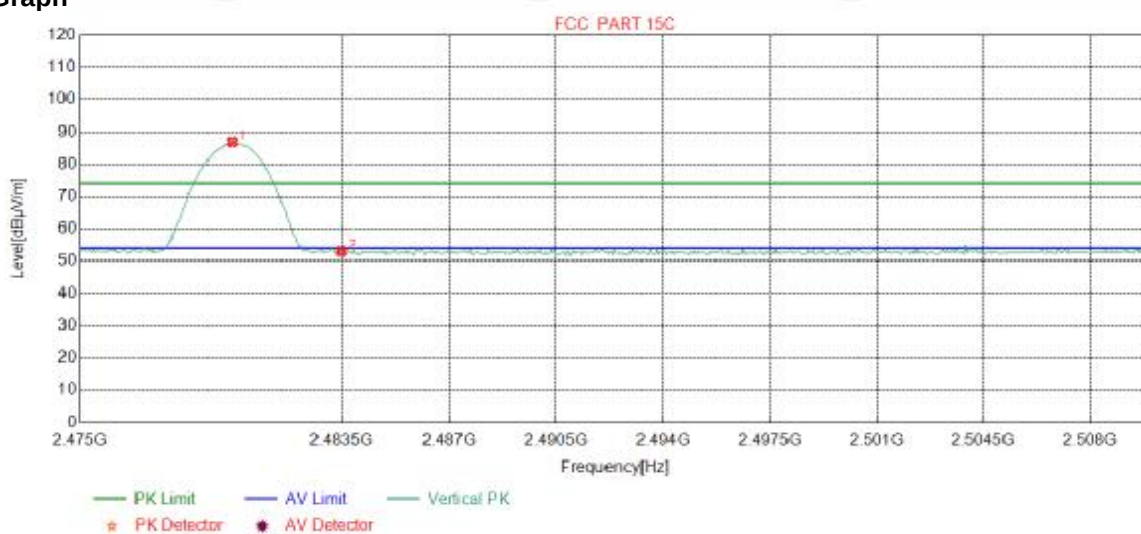

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9499	32.37	13.39	-42.39	83.46	86.83	74.00	-12.83	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.65	53.01	74.00	20.99	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

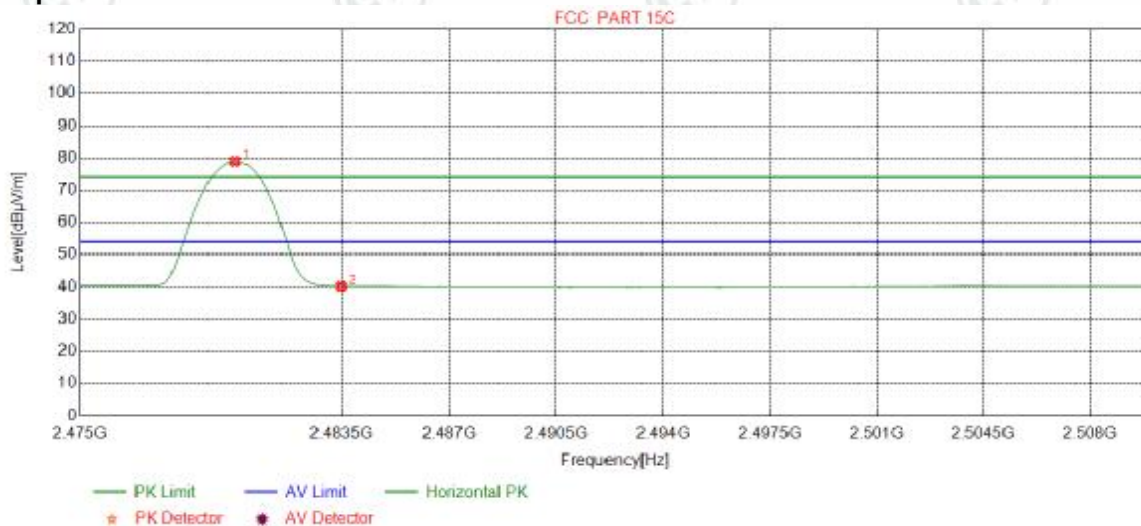

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	75.55	78.92	54.00	-24.92	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.79	40.15	54.00	13.85	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

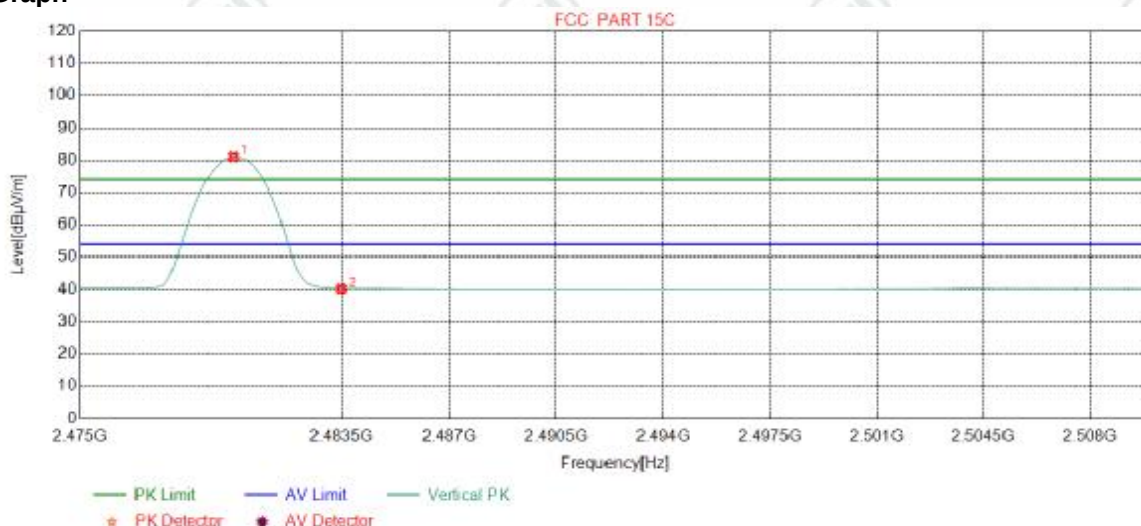

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	77.63	81.00	54.00	-27.00	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.79	40.15	54.00	13.85	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK

modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Through Pre-scan with the DC 12V and DC 24V, and found the DC 12V which was worse case, and then only the worst case mode is recorded in the report.

Appendix K): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.					
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.					
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.					
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.					
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.					
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).					
h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel					
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.					
j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test Ambient:		Temp.: 23°C	Humid.: 54%	Press.: 101kPa	

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

Mode:			GFSK Transmitting				Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	156.0156	7.76	1.46	-31.99	53.49	30.72	43.50	12.78	Pass	Horizontal
2	179.9770	9.00	1.58	-31.99	57.95	36.54	43.50	6.96	Pass	Horizontal
3	215.9676	11.32	1.75	-31.96	56.94	38.05	43.50	5.45	Pass	Horizontal
4	312.0072	13.46	2.10	-31.89	54.53	38.20	46.00	7.80	Pass	Horizontal
5	408.0468	15.53	2.41	-31.82	51.67	37.79	46.00	8.21	Pass	Horizontal
6	456.0666	16.30	2.54	-31.86	51.88	38.86	46.00	7.14	Pass	Horizontal

Mode:			GFSK Transmitting				Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	180.0740	9.01	1.58	-31.99	50.68	29.28	43.50	14.22	Pass	Vertical
2	227.9968	11.63	1.79	-31.92	53.59	35.09	46.00	10.91	Pass	Vertical
3	276.0166	12.72	1.98	-31.91	55.08	37.87	46.00	8.13	Pass	Vertical
4	396.0176	15.31	2.37	-31.78	52.65	38.55	46.00	7.45	Pass	Vertical
5	444.0374	16.10	2.49	-31.88	51.76	38.47	46.00	7.53	Pass	Vertical
6	600.0290	19.00	2.96	-31.99	41.31	31.28	46.00	14.72	Pass	Vertical

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	204.0354	11.00	1.69	-31.94	55.31	36.06	43.50	7.44	Pass	Horizontal
2	252.0552	12.24	1.89	-31.89	56.87	39.11	46.00	6.89	Pass	Horizontal
3	276.0166	12.72	1.98	-31.91	54.78	37.57	46.00	8.43	Pass	Horizontal
4	324.0364	13.73	2.14	-31.81	53.85	37.91	46.00	8.09	Pass	Horizontal
5	396.0176	15.31	2.37	-31.78	53.39	39.29	46.00	6.71	Pass	Horizontal
6	444.0374	16.10	2.49	-31.88	51.73	38.44	46.00	7.56	Pass	Horizontal

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	208.8859	11.13	1.71	-31.94	48.86	29.76	43.50	13.74	Pass	Vertical
2	276.0166	12.72	1.98	-31.91	50.68	33.47	46.00	12.53	Pass	Vertical
3	300.0750	13.20	2.06	-31.85	50.12	33.53	46.00	12.47	Pass	Vertical
4	372.0562	14.79	2.30	-31.88	49.52	34.73	46.00	11.27	Pass	Vertical
5	396.0176	15.31	2.37	-31.78	46.05	31.95	46.00	14.05	Pass	Vertical
6	444.0374	16.10	2.49	-31.88	44.61	31.32	46.00	14.68	Pass	Vertical

Mode:			8DPSK Transmitting				Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	179.9770	9.00	1.58	-31.99	55.05	33.64	43.50	9.86	Pass	Horizontal
2	227.9968	11.63	1.79	-31.92	56.10	37.60	46.00	8.40	Pass	Horizontal
3	252.0552	12.24	1.89	-31.89	56.79	39.03	46.00	6.97	Pass	Horizontal
4	276.0166	12.72	1.98	-31.91	54.94	37.73	46.00	8.27	Pass	Horizontal
5	324.0364	13.73	2.14	-31.81	53.94	38.00	46.00	8.00	Pass	Horizontal
6	396.0176	15.31	2.37	-31.78	53.27	39.17	46.00	6.83	Pass	Horizontal

Mode:			8DPSK Transmitting				Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	208.8859	11.13	1.71	-31.94	48.71	29.61	43.50	13.89	Pass	Vertical
2	276.0166	12.72	1.98	-31.91	50.60	33.39	46.00	12.61	Pass	Vertical
3	324.0364	13.73	2.14	-31.81	49.66	33.72	46.00	12.28	Pass	Vertical
4	372.0562	14.79	2.30	-31.88	49.19	34.40	46.00	11.60	Pass	Vertical
5	396.0176	15.31	2.37	-31.78	45.75	31.65	46.00	14.35	Pass	Vertical
6	444.0374	16.10	2.49	-31.88	45.33	32.04	46.00	13.96	Pass	Vertical

Remark : All the channels are tested, only the worst data were reported.

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1798.4798	30.37	3.32	-42.71	54.89	45.87	74.00	28.13	Pass	H	PK
2	1992.0992	31.65	3.46	-42.61	57.17	49.67	74.00	24.33	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	53.25	51.64	74.00	22.36	Pass	H	PK
4	4804.0000	34.50	4.55	-40.66	49.95	48.34	54.00	5.66	Pass	H	AV
5	7206.0000	36.31	5.81	-41.02	45.25	46.35	74.00	27.65	Pass	H	PK
6	9608.0000	37.64	6.63	-40.76	45.04	48.55	74.00	25.45	Pass	H	PK
7	12010.0000	39.31	7.60	-41.21	44.01	49.71	74.00	24.29	Pass	H	PK
8	1596.6597	29.04	3.07	-42.90	57.92	47.13	74.00	26.87	Pass	V	PK
9	2592.3592	32.55	4.10	-42.34	53.79	48.10	74.00	25.90	Pass	V	PK
10	4804.0000	34.50	4.55	-40.66	55.75	54.14	74.00	19.86	Pass	V	PK
11	4804.0000	34.50	4.55	-40.66	52.27	50.66	54.00	3.34	Pass	V	AV
12	7206.0000	36.31	5.81	-41.02	45.65	46.75	74.00	27.25	Pass	V	PK
13	9608.0000	37.64	6.63	-40.76	45.21	48.72	74.00	25.28	Pass	V	PK
14	12010.0000	39.31	7.60	-41.21	44.57	50.27	74.00	23.73	Pass	V	PK

Mode:			GFSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1798.0798	30.37	3.32	-42.72	56.46	47.43	74.00	26.57	Pass	H	PK
2	1997.6998	31.68	3.47	-42.61	55.78	48.32	74.00	25.68	Pass	H	PK
3	4882.0000	34.50	4.81	-40.60	51.63	50.34	74.00	23.66	Pass	H	PK
4	7323.0000	36.42	5.85	-40.92	44.93	46.28	74.00	27.72	Pass	H	PK
5	9764.0000	37.71	6.71	-40.62	44.44	48.24	74.00	25.76	Pass	H	PK
6	12205.0000	39.42	7.67	-41.16	44.89	50.82	74.00	23.18	Pass	H	PK
7	1599.8600	29.06	3.07	-42.90	58.86	48.09	74.00	25.91	Pass	V	PK
8	2848.9849	32.96	4.23	-42.20	51.94	46.93	74.00	27.07	Pass	V	PK
9	4882.0000	34.50	4.81	-40.60	53.47	52.18	74.00	21.82	Pass	V	PK
10	4882.0000	34.50	4.81	-40.60	50.64	49.35	54.00	4.65	Pass	V	AV
11	7323.0000	36.42	5.85	-40.92	43.61	44.96	74.00	29.04	Pass	V	PK
12	9764.0000	37.71	6.71	-40.62	44.64	48.44	74.00	25.56	Pass	V	PK
13	12205.0000	39.42	7.67	-41.16	44.58	50.51	74.00	23.49	Pass	V	PK

Mode:			GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1790.8791	30.32	3.30	-42.70	55.78	46.70	74.00	27.30	Pass	H	PK
2	1991.6992	31.65	3.46	-42.62	58.35	50.84	74.00	23.16	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	50.78	49.57	74.00	24.43	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	44.25	45.82	74.00	28.18	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	43.19	47.27	74.00	26.73	Pass	H	PK
6	12400.0000	39.54	7.86	-41.12	45.78	52.06	74.00	21.94	Pass	H	PK
7	12400.0000	39.54	7.86	-41.12	31.71	37.99	54.00	16.01	Pass	H	AV
8	1592.6593	29.01	3.06	-42.88	57.64	46.83	74.00	27.17	Pass	V	PK
9	3193.0129	33.28	4.64	-42.01	51.49	47.40	74.00	26.60	Pass	V	PK
10	4960.0000	34.50	4.82	-40.53	54.23	53.02	74.00	20.98	Pass	V	PK
11	4960.0000	34.50	4.82	-40.53	50.24	49.03	54.00	4.97	Pass	V	AV
12	7440.0000	36.54	5.85	-40.82	44.84	46.41	74.00	27.59	Pass	V	PK
13	12400.0000	39.54	7.86	-41.12	31.71	37.99	54.00	16.01	Pass	V	AV
14	9920.0000	37.77	6.79	-40.48	44.72	48.80	74.00	25.20	Pass	V	PK
15	12400.0000	39.54	7.86	-41.12	44.97	51.25	74.00	22.75	Pass	V	PK

Mode:			π/4DQPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1794.4794	30.34	3.31	-42.70	60.72	51.67	74.00	22.33	Pass	H	PK
2	1994.0994	31.66	3.46	-42.61	56.64	49.15	74.00	24.85	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	56.03	54.42	74.00	19.58	Pass	H	PK
4	4804.0000	34.50	4.55	-40.66	48.72	47.11	54.00	6.89	Pass	H	AV
5	7206.0000	36.31	5.81	-41.02	45.61	46.71	74.00	27.29	Pass	H	PK
6	9608.0000	37.64	6.63	-40.76	45.32	48.83	74.00	25.17	Pass	H	PK
7	12010.0000	39.31	7.60	-41.21	44.40	50.10	74.00	23.90	Pass	H	PK
8	1595.8596	29.03	3.07	-42.89	58.99	48.20	74.00	25.80	Pass	V	PK
9	2690.1690	32.70	4.11	-42.28	54.14	48.67	74.00	25.33	Pass	V	PK
10	4804.0000	34.50	4.55	-40.66	58.72	57.11	74.00	16.89	Pass	V	PK
11	4804.0000	34.50	4.55	-40.66	51.07	49.46	54.00	4.54	Pass	V	AV
12	7206.0000	36.31	5.81	-41.02	45.14	46.24	74.00	27.76	Pass	V	PK
13	9608.0000	37.64	6.63	-40.76	46.32	49.83	74.00	24.17	Pass	V	PK
14	12010.0000	39.31	7.60	-41.21	44.66	50.36	74.00	23.64	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1791.8792	30.33	3.31	-42.71	56.93	47.86	74.00	26.14	Pass	H	PK
2	1996.6997	31.68	3.47	-42.62	58.49	51.02	74.00	22.98	Pass	H	PK
3	4882.0000	34.50	4.81	-40.60	53.54	52.25	74.00	21.75	Pass	H	PK
4	4882.0000	34.50	4.81	-40.60	46.14	44.85	54.00	9.15	Pass	H	AV
5	7323.0000	36.42	5.85	-40.92	44.44	45.79	74.00	28.21	Pass	H	PK
6	9764.0000	37.71	6.71	-40.62	45.71	49.51	74.00	24.49	Pass	H	PK
7	12205.0000	39.42	7.67	-41.16	45.41	51.34	74.00	22.66	Pass	H	PK
8	12205.0000	39.42	7.67	-41.16	30.62	36.55	54.00	17.45	Pass	H	AV
9	1596.2596	29.04	3.07	-42.90	57.92	47.13	74.00	26.87	Pass	V	PK
10	2944.9945	33.11	4.40	-42.15	53.14	48.50	74.00	25.50	Pass	V	PK
11	4882.0000	34.50	4.81	-40.60	56.85	55.56	74.00	18.44	Pass	V	PK
12	4882.0000	34.50	4.81	-40.60	49.13	47.84	54.00	6.16	Pass	V	AV
13	7323.0000	36.42	5.85	-40.92	45.95	47.30	74.00	26.70	Pass	V	PK
14	9764.0000	37.71	6.71	-40.62	44.15	47.95	74.00	26.05	Pass	V	PK
15	12205.0000	39.42	7.67	-41.16	44.48	50.41	74.00	23.59	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1793.6794	30.34	3.31	-42.71	59.70	50.64	74.00	23.36	Pass	H	PK
2	1996.0996	31.67	3.47	-42.61	57.57	50.10	74.00	23.90	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	54.02	52.81	74.00	21.19	Pass	H	PK
4	4960.0000	34.50	4.82	-40.53	45.33	44.12	54.00	9.88	Pass	H	AV
5	7440.0000	36.54	5.85	-40.82	44.34	45.91	74.00	28.09	Pass	H	PK
6	9920.0000	37.77	6.79	-40.48	43.13	47.21	74.00	26.79	Pass	H	PK
7	12400.0000	39.54	7.86	-41.12	45.79	52.07	74.00	21.93	Pass	H	PK
8	12400.0000	39.54	7.86	-41.12	31.70	37.98	54.00	16.02	Pass	H	AV
9	1810.6811	30.45	3.33	-42.70	58.59	49.67	74.00	24.33	Pass	V	PK
10	2599.7600	32.56	4.10	-42.34	55.43	49.75	74.00	24.25	Pass	V	PK
11	4960.0000	34.50	4.82	-40.53	56.03	54.82	74.00	19.18	Pass	V	AV
12	4960.0000	34.50	4.82	-40.53	48.35	47.14	54.00	6.86	Pass	V	AV
13	7440.0000	36.54	5.85	-40.82	44.81	46.38	74.00	27.62	Pass	V	PK
14	9920.0000	37.77	6.79	-40.48	44.14	48.22	74.00	25.78	Pass	V	PK
15	12400.0000	39.54	7.86	-41.12	44.87	51.15	74.00	22.85	Pass	V	PK
16	12400.0000	39.54	7.86	-41.12	31.68	37.96	54.00	16.04	Pass	V	AV

Mode:			8DPSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1793.2793	30.34	3.31	-42.71	57.24	48.18	74.00	25.82	Pass	H	PK
2	1992.8993	31.65	3.46	-42.61	58.40	50.90	74.00	23.10	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	57.45	55.84	74.00	18.16	Pass	H	PK
4	4804.0000	34.50	4.55	-40.66	48.63	47.02	54.00	6.98	Pass	H	AV
5	7206.0000	36.31	5.81	-41.02	44.79	45.89	74.00	28.11	Pass	H	PK
6	9608.0000	37.64	6.63	-40.76	45.22	48.73	74.00	25.27	Pass	H	PK
7	12010.0000	39.31	7.60	-41.21	44.91	50.61	74.00	23.39	Pass	H	PK
8	1599.0599	29.05	3.07	-42.89	58.02	47.25	74.00	26.75	Pass	V	PK
9	2810.1810	32.90	4.24	-42.23	52.70	47.61	74.00	26.39	Pass	V	PK
10	4804.0000	34.50	4.55	-40.66	58.89	57.28	74.00	16.72	Pass	V	PK
11	4804.0000	34.50	4.55	-40.66	51.03	49.42	54.00	4.58	Pass	V	AV
12	7206.0000	36.31	5.81	-41.02	44.03	45.13	74.00	28.87	Pass	V	PK
13	9608.0000	37.64	6.63	-40.76	45.86	49.37	74.00	24.63	Pass	V	PK
14	12010.0000	39.31	7.60	-41.21	44.04	49.74	74.00	24.26	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1797.4797	30.36	3.32	-42.71	60.52	51.49	74.00	22.51	Pass	H	PK
2	1997.0997	31.68	3.47	-42.61	55.72	48.26	74.00	25.74	Pass	H	PK
3	4882.0000	34.50	4.81	-40.60	54.43	53.14	74.00	20.86	Pass	H	PK
4	4882.0000	34.50	4.81	-40.60	46.22	44.93	54.00	9.07	Pass	H	AV
5	7323.0000	36.42	5.85	-40.92	45.13	46.48	74.00	27.52	Pass	H	PK
6	9764.0000	37.71	6.71	-40.62	44.30	48.10	74.00	25.90	Pass	H	PK
7	12205.0000	39.42	7.67	-41.16	44.04	49.97	74.00	24.03	Pass	H	PK
8	1594.4594	29.02	3.07	-42.89	58.73	47.93	74.00	26.07	Pass	V	PK
9	3188.0125	33.28	4.63	-42.01	53.14	49.04	74.00	24.96	Pass	V	PK
10	4882.0000	34.50	4.81	-40.60	57.13	55.84	74.00	18.16	Pass	V	PK
11	4882.0000	34.50	4.81	-40.60	49.54	48.25	54.00	5.75	Pass	V	AV
12	7323.0000	36.42	5.85	-40.92	44.43	45.78	74.00	28.22	Pass	V	PK
13	9764.0000	37.71	6.71	-40.62	44.17	47.97	74.00	26.03	Pass	V	PK
14	12205.0000	39.42	7.67	-41.16	44.19	50.12	74.00	23.88	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1798.2798	30.37	3.32	-42.71	54.20	45.18	74.00	28.82	Pass	H	PK
2	1993.8994	31.66	3.46	-42.61	55.84	48.35	74.00	25.65	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	52.84	51.63	74.00	22.37	Pass	H	PK
4	4960.0000	34.50	4.82	-40.53	45.25	44.04	54.00	9.96	Pass	H	AV
5	7440.0000	36.54	5.85	-40.82	44.21	45.78	74.00	28.22	Pass	H	PK
6	9920.0000	37.77	6.79	-40.48	44.91	48.99	74.00	25.01	Pass	H	PK
7	12400.0000	39.54	7.86	-41.12	44.65	50.93	74.00	23.07	Pass	H	PK
8	1596.2596	29.04	3.07	-42.90	58.78	47.99	74.00	26.01	Pass	V	PK
9	2720.1720	32.75	4.13	-42.27	53.43	48.04	74.00	25.96	Pass	V	PK
10	4960.0000	34.50	4.82	-40.53	56.08	54.87	74.00	19.13	Pass	V	PK
11	4960.0000	34.50	4.82	-40.53	48.53	47.32	54.00	6.68	Pass	V	AV
12	7440.0000	36.54	5.85	-40.82	45.25	46.82	74.00	27.18	Pass	V	PK
13	9920.0000	37.77	6.79	-40.48	43.93	48.01	74.00	25.99	Pass	V	PK
14	12400.0000	39.54	7.86	-41.12	44.66	50.94	74.00	23.06	Pass	V	PK

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


5) Through Pre-scan with the DC 12V and DC 24V, and found the DC 12V which was worse case, and then only the worst case mode is recorded in the report.

PHOTOGRAPHS OF TEST SETUP

Test model No.: BC42

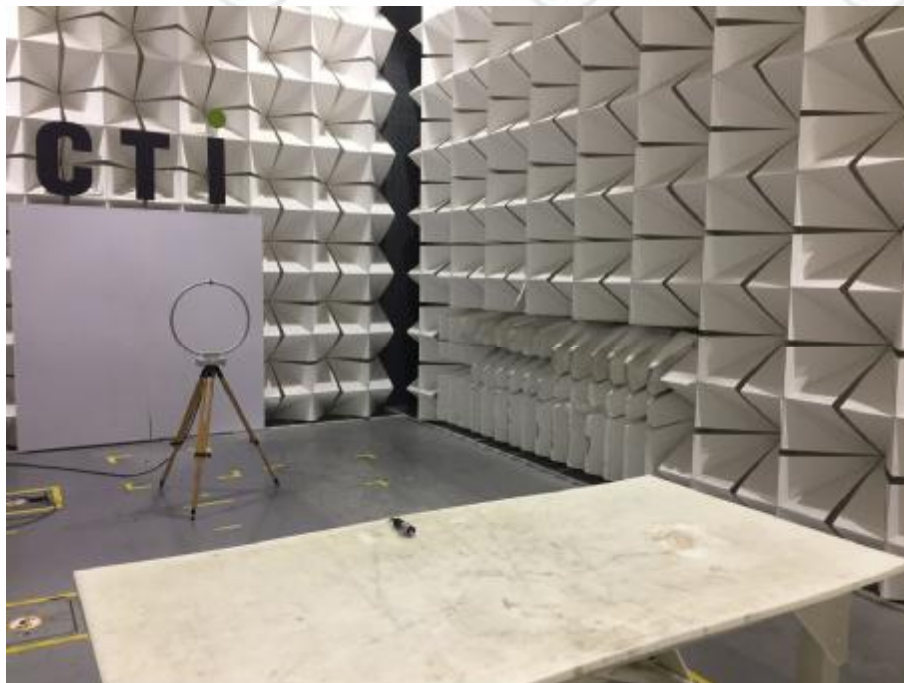

Radiated spurious emission Test Setup-1(Below 30MHz)

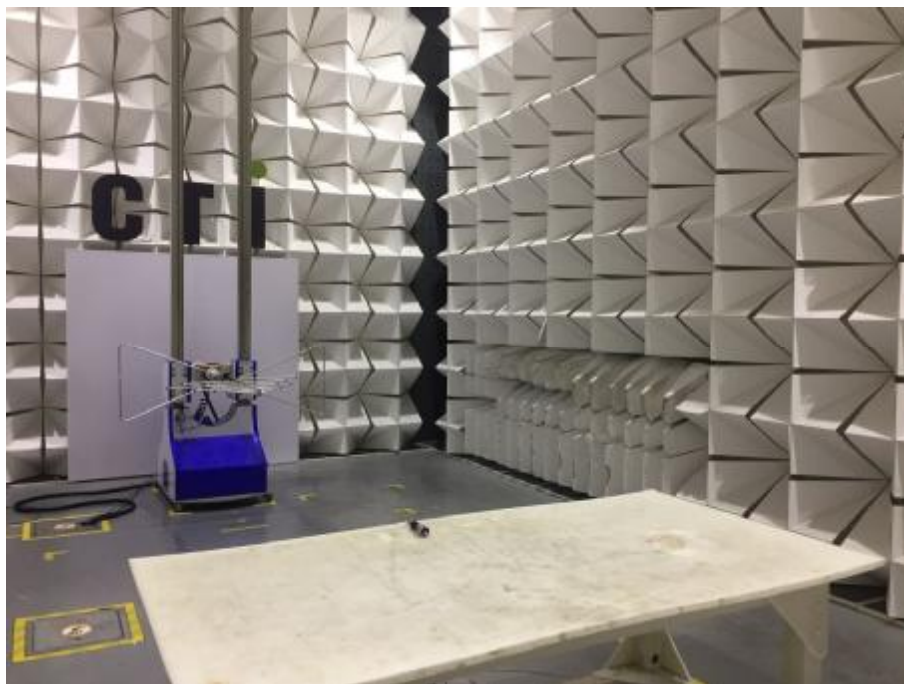

Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

PHOTOGRAPHS OF EUT Constructional Details

Test model No.: BC42



View of Product-1



View of Product-2



View of Product-3



View of Product-4



View of Product-5




View of Product-6



View of Product-7



View of Product-8

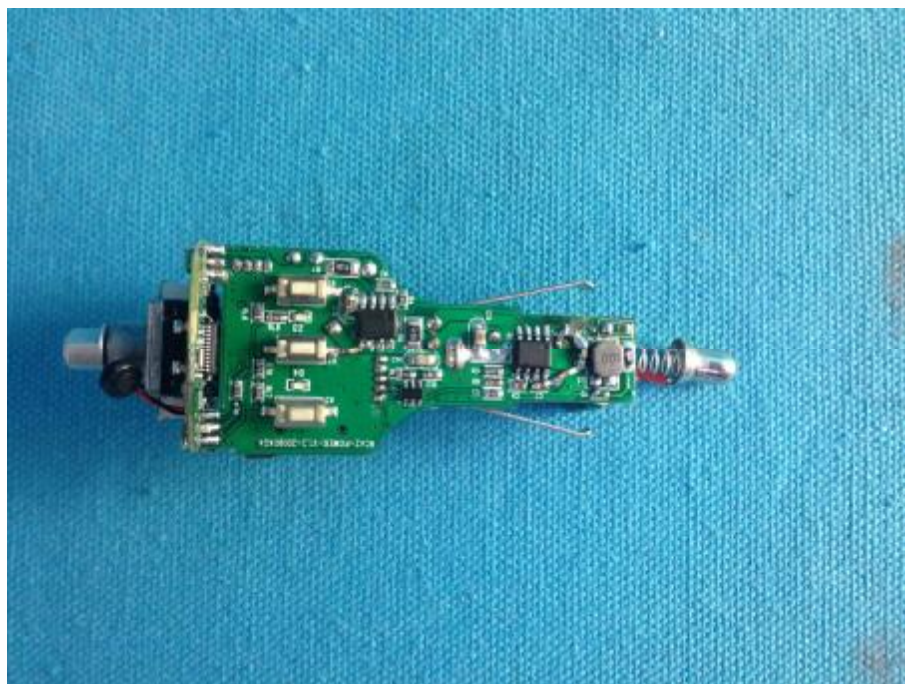


View of Product-9




View of Product-10




View of Product-11

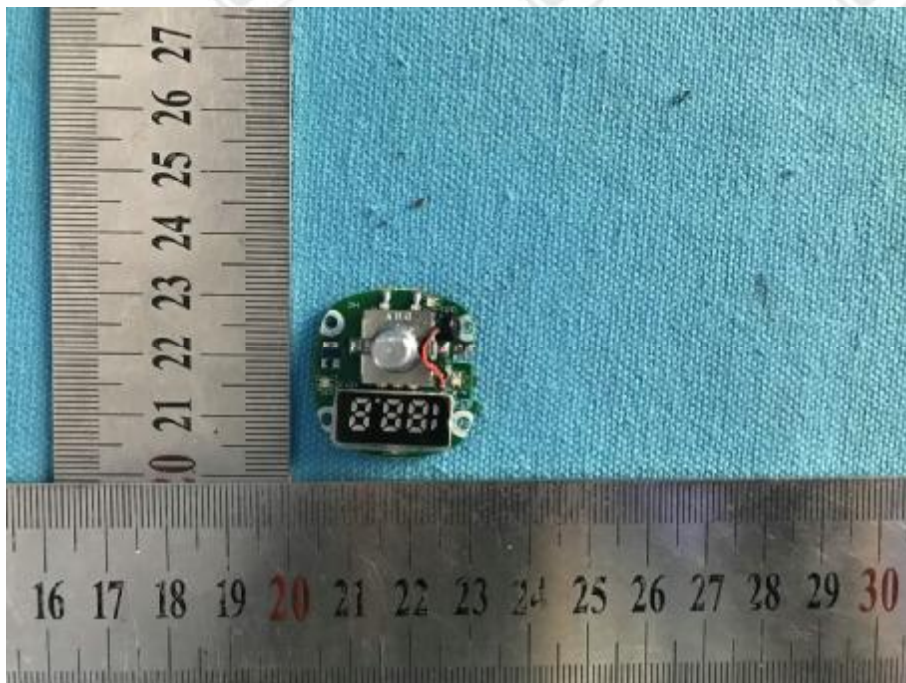


View of Product-12

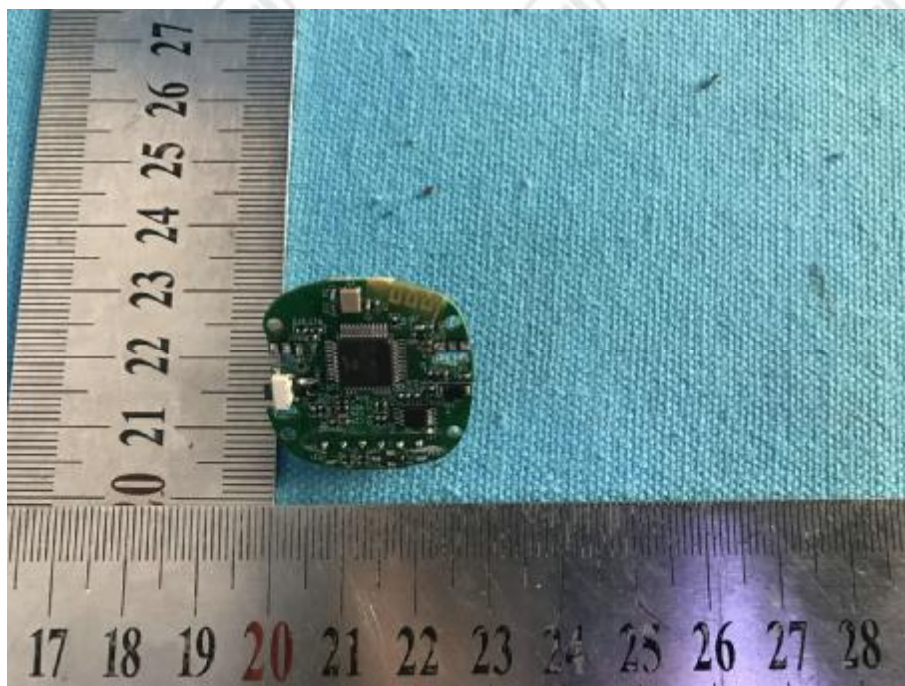

View of Product-13

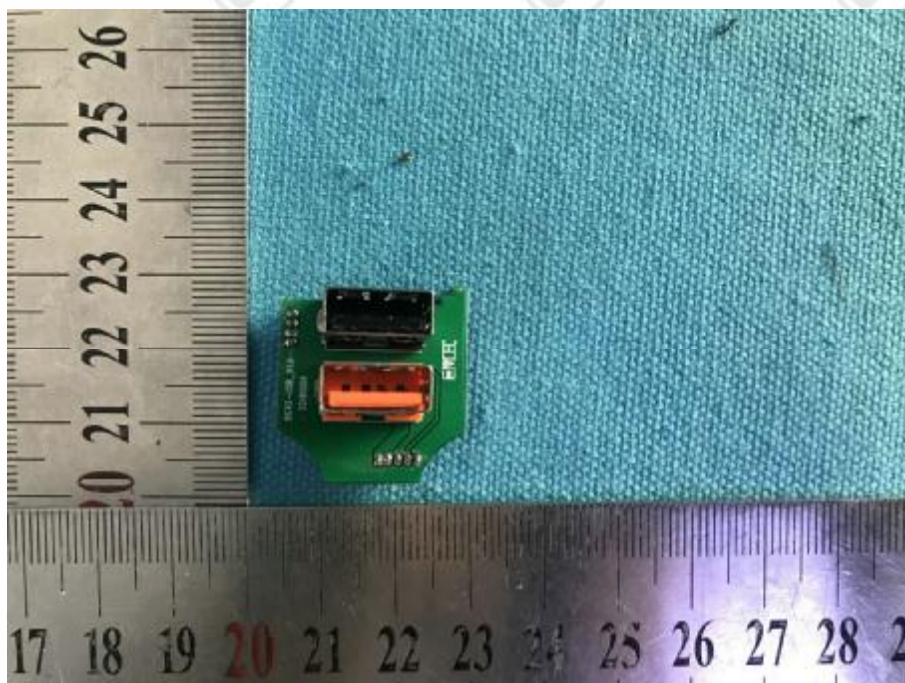


View of Product-14

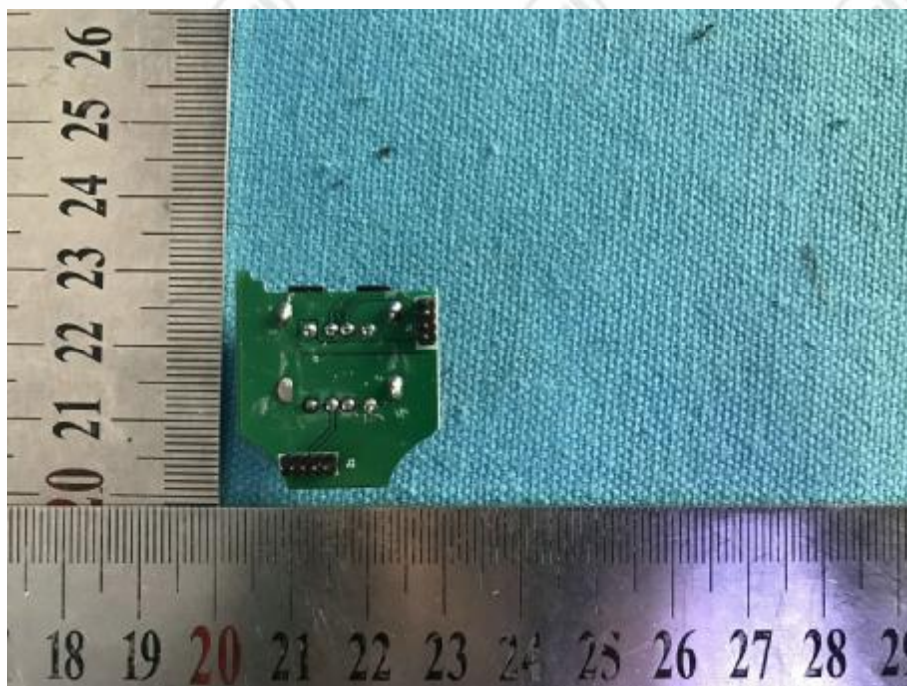

View of Product-15



View of Product-16

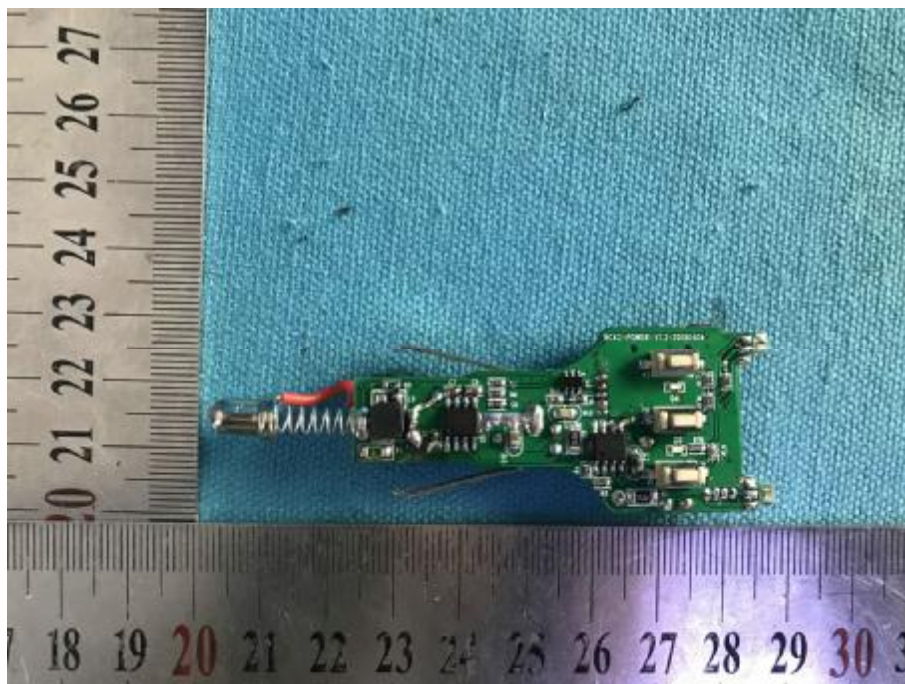

View of Product-17

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.