

Dates of Tests: Oct 21, 2020 ~ Oct 28, 2020
Test Report S/N: LR500112011R
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2ATZYSDK-0502

APPLICANT

SONIC DUTCH KOREA Co., Ltd.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Coffee Pot
Manufacturer	:	SONIC DUTCH KOREA Co., Ltd.
Model name	:	SDK-0502
Variant Model name	:	-
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013
Frequency Range	:	BLE 2402 ~ 2480 MHz
Max. Output Power	:	Max 6.33 dBm - Conducted
Data of issue	:	

This test report is issued under the authority of:

The test was supervised by:



Ja-Beom Koo, Manager



Gyeong hun KO, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. INFORMATION ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 6 dB BANDWIDTH	6
3.2.2 PEAK OUTPUT POWER	8
3.2.3 POWER SPECTRAL DENSITY	10
3.2.4 BAND EDGE	12
3.2.5 CONDUCTED SPURIOUS EMISSIONS	14
3.2.6 RADIATED SPURIOUS EMISSIONS	16
3.2.7 AC Conducted Emissions	37
APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	40

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2021-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2021-04-11	FCC CAB
VCCI	JAPAN	C-4948,	2021-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2021-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2021-10-15	VCCI registration
VCCI	JAPAN	G-847	2021-12-13	VCCI registration
IC	CANADA	5799A-1	updating	IC filing
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Client Company name : SONIC DUTCH KOREA Co.,Ltd
 Address : 410, 160, Hyanggyo-ro, Paldal-gu, Suwon-si, Gyeonggi-do, Korea.
 Tel / Fax : +82-31-247-3999 / +82-31-247-3999
 Manufacturer : SONIC DUTCH KOREA Co.,Ltd
 Address : 410, 160, Hyanggyo-ro, Paldal-gu, Suwon-si, Gyeonggi-do, Korea.
 Tel / Fax : +82-31-247-3999 / +82-31-247-3999

2-2 Equipment Under Test (EUT)

Model name : SDK-0502
 Serial number : Identical prototype
 Date of receipt : OCT 29, 2020
 EUT condition : Pre-production, not damaged
 Antenna type : Pattern Antenna (Max Gain : 4.451 dBi)
 Frequency Range : BLE 2402 ~ 2480 MHz
 RF output power : Max 6.33 dBm – Conducted
 Type of Modulation : DQPSK,
 Power Source : AC 120 V

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz) BLE	2402	2442	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	-	MS-1736	MSI

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	C
15.247(b)	Transmitter Peak Output Power		C
15.247(e)	Transmitter Power Spectral Density		C
15.247(d)	Band Edge & Conducted Spurious emission		C
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	N/A
15.203	Antenna requirement	-	C

N/A : This product is battery-enabled and excludes the test.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement

Alien Technology Asia. FCC ID:2ATYZSDK-0502 unit complies with the requirement of §15.203.

The antenna type is Pattern Antenna

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 3 X RBW

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (kHz)	Result
2402	697.500	Complies
2442	706.200	Complies
2480	700.400	Complies

(

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth $\geq$ 500 kHz

Measurement Setup




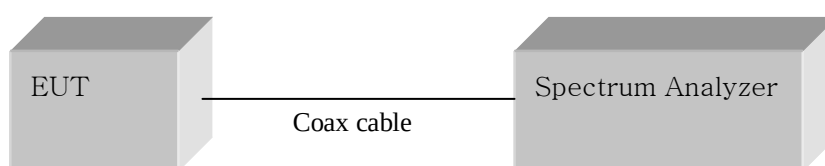


Figure 1: Measurement setup for the carrier frequency separation

BLE

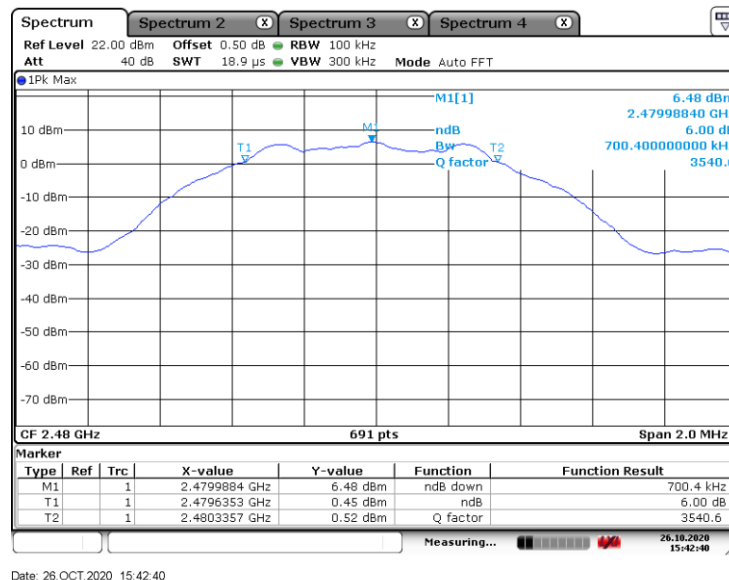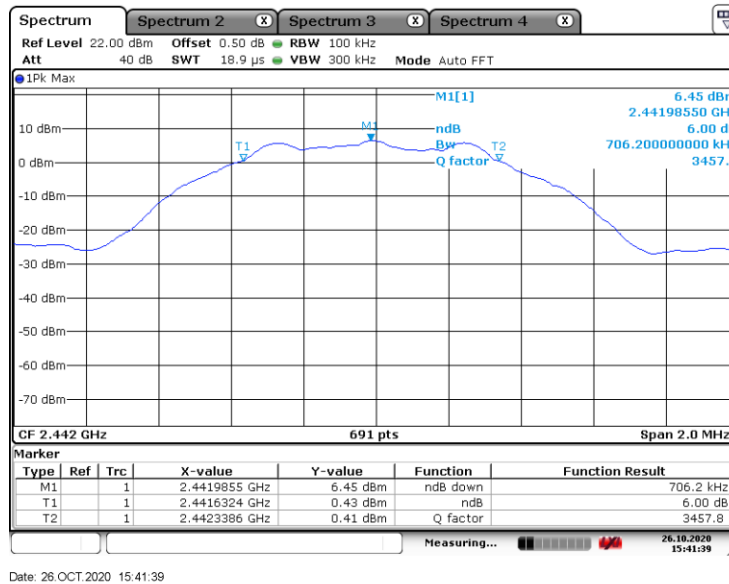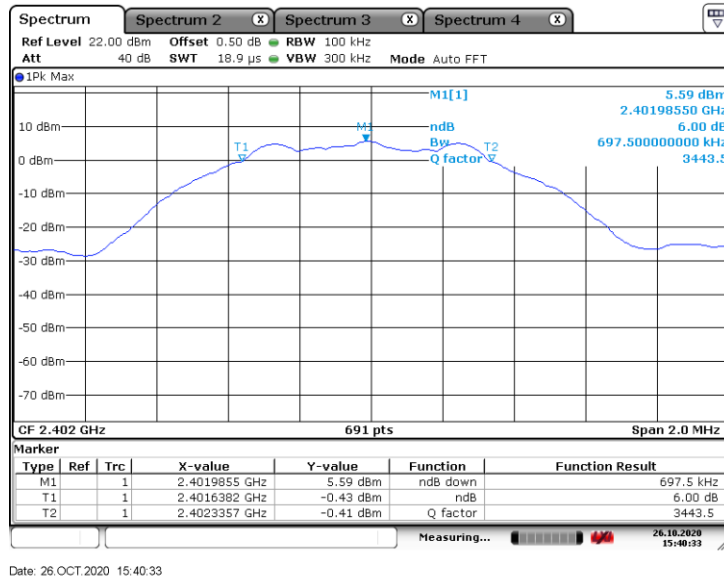

3.2.2 Peak Output Power Measurement

Procedure:

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth :

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW $\geq$ DTS Bandwidth

Span $\geq 3 \times$ RBW

VBW = $3 \times$ RBW

Sweep = auto

Detector function = peak

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2402	5.32	Complies
2442	6.34	Complies
2480	6.33	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	$\leq 1 \text{ W}(30 \text{ dBm})$
-------------------	------------------------------------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


BLE

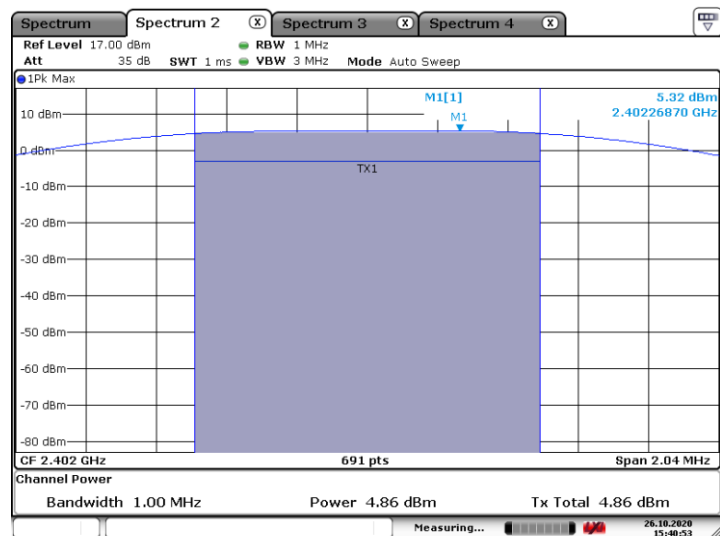

Date: 26.OCT.2020 15:40:54

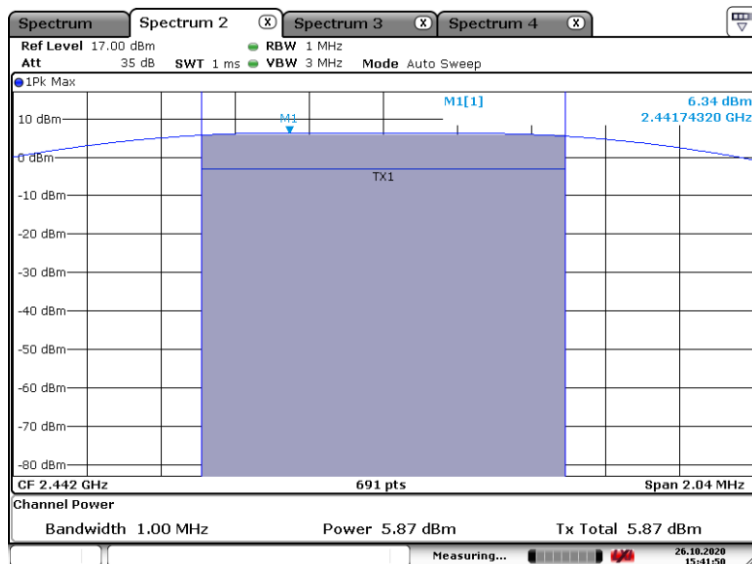

Date: 26.OCT.2020 15:41:50

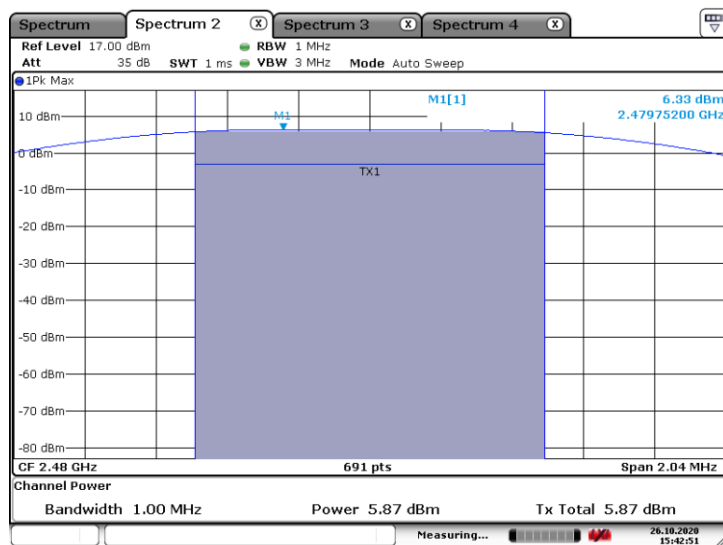

Date: 26.OCT.2020 15:42:51

3.2.3 Power Spectral Density

Procedure:

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The spectrum analyzer is set to:

RBW = 3 kHz ($3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$)

Span ≥ 1.5 times the DTS bandwidth

VBW = 3 X RBW

Sweep = auto

Detector function = peak

Trace = max hold

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2402	-10.39	Complies
2442	-9.45	Complies
2480	-9.43	Complies

- See next pages for actual measured spectrum plots.




Minimum Standard:

Power Spectral Density	$\leq 8 \text{ dBm @ } 3 \text{ kHz BW}$
------------------------	--

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

BLE

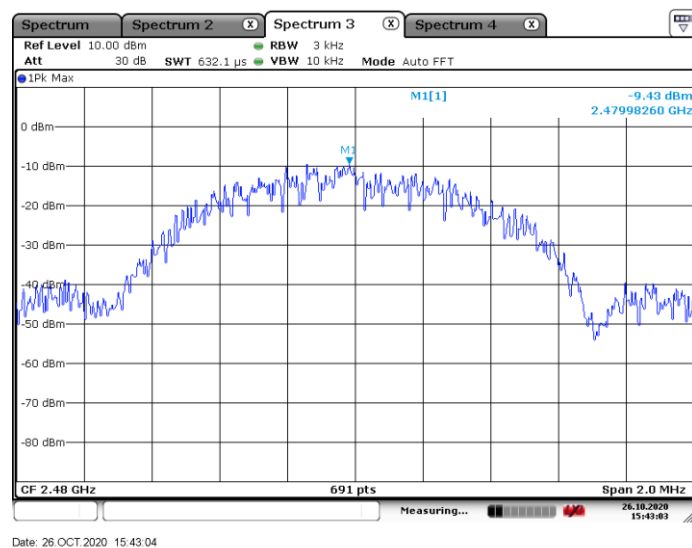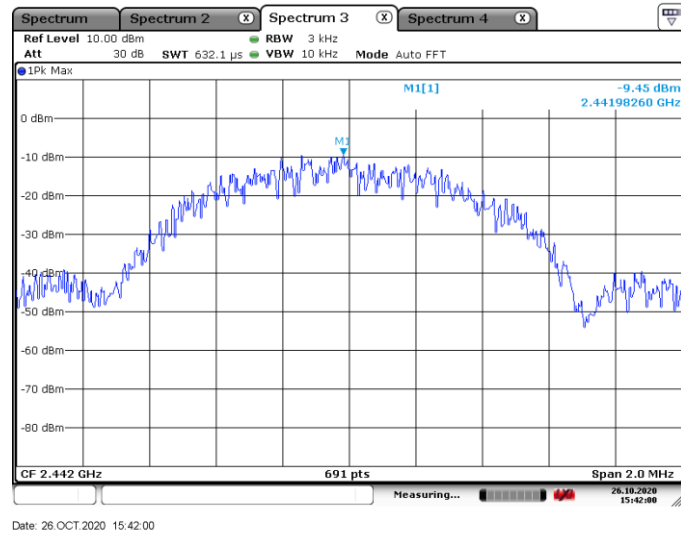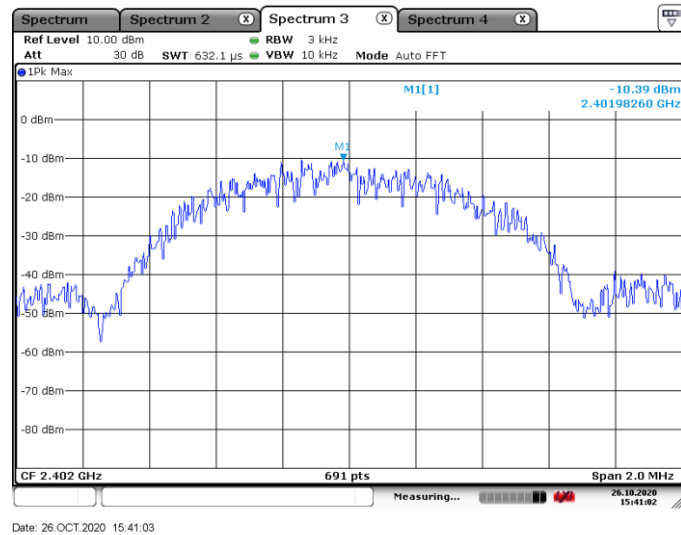

3.2.4 Band Edge

Procedure:

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB..

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector function = peak


Trace = max hold

Sweep = auto


Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	≤ 20 dBc
--------------------------	---------------

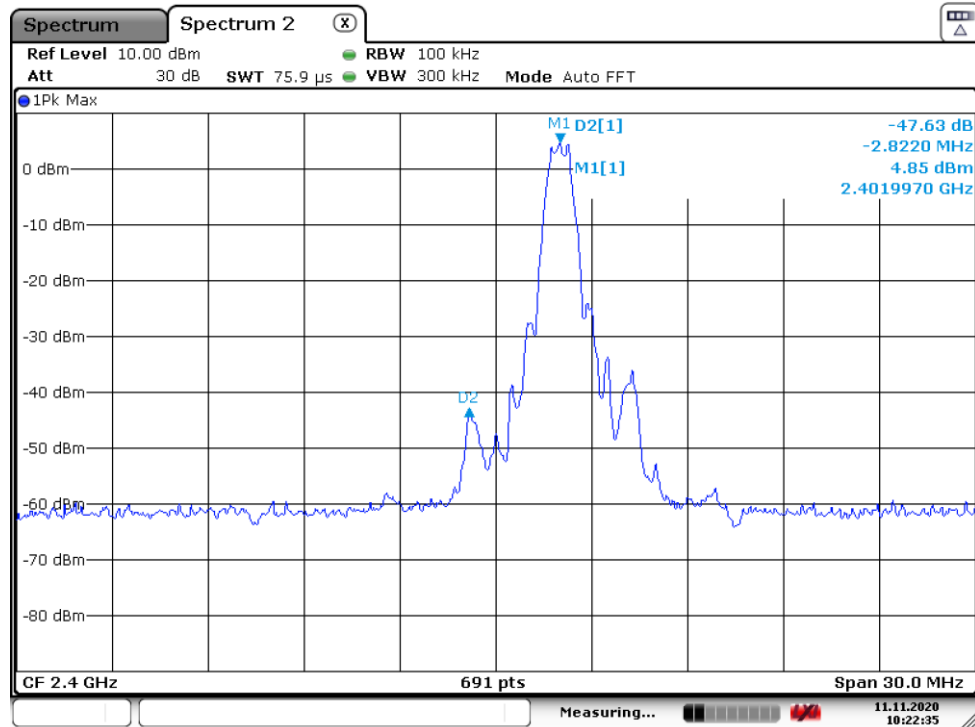BLE

Date: 11.NOV.2020 10:22:34

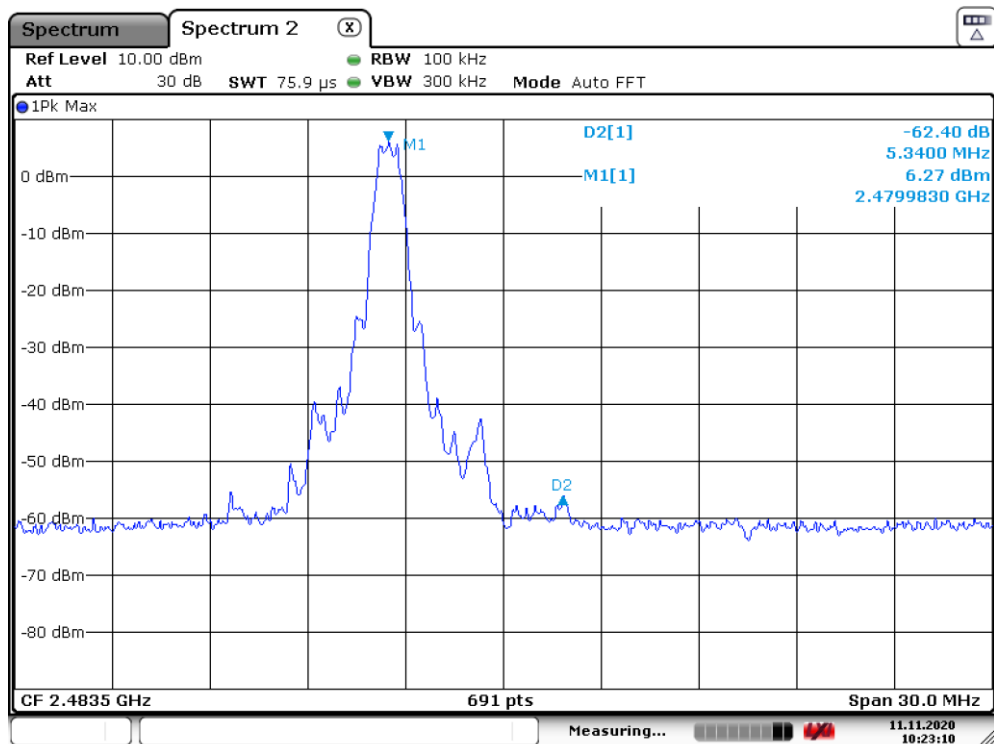

Date: 11.NOV.2020 10:23:10

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: **Complies**




- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	≥ 20 dBc
--------------------------	---------------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Unwanted Emission – BLE (Low,Middle,High)

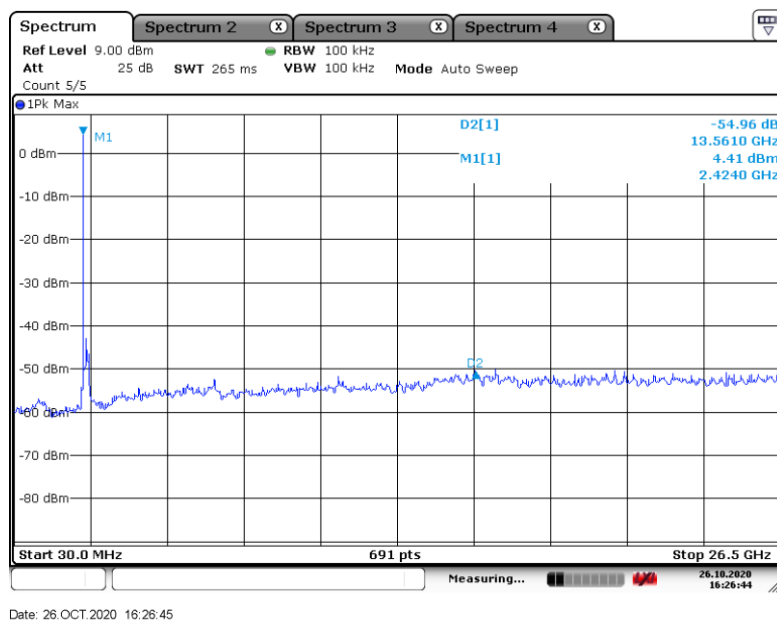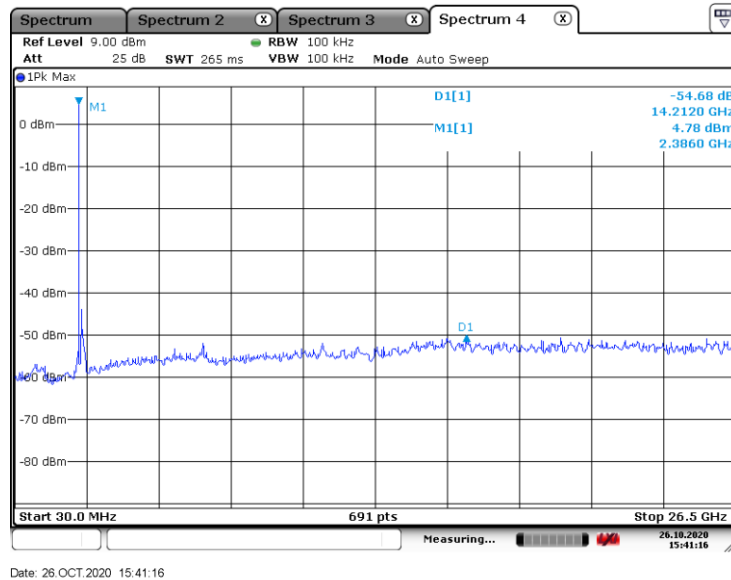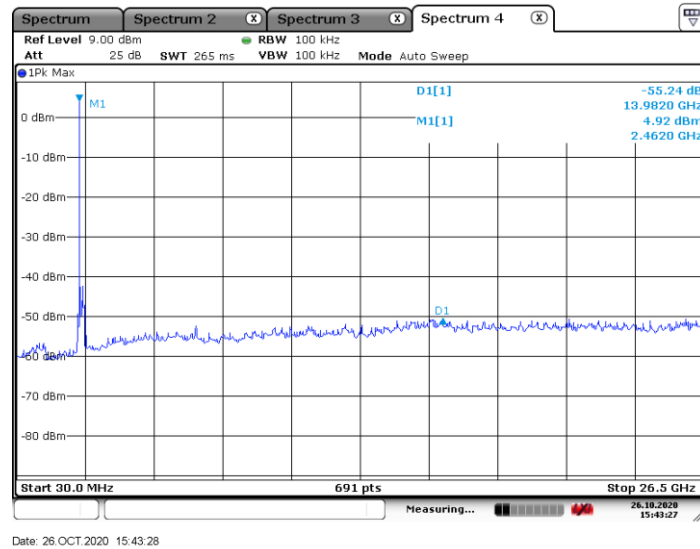

3.2.6 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz)

VBW $\geq$ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Trace = max hold


Detector function = peak

Sweep = auto


Duty cycle : 98.89 %

The EUT configureal to transmit continuously(D $\geq$ 98%)/ Duty Factor = 0


below 30 MHz

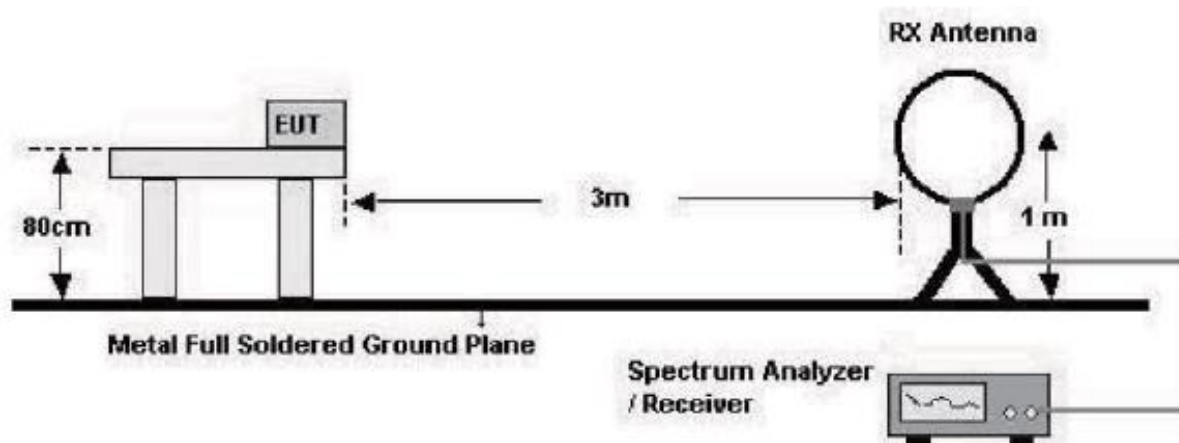

below 1 GHz (30 MHz to 1 GHz)

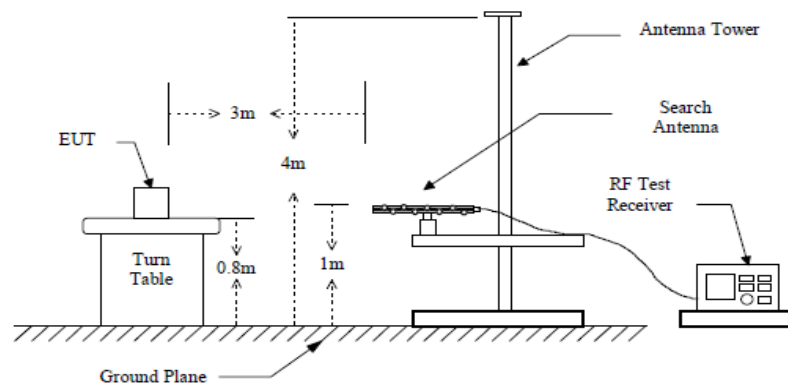

above 1 GHz

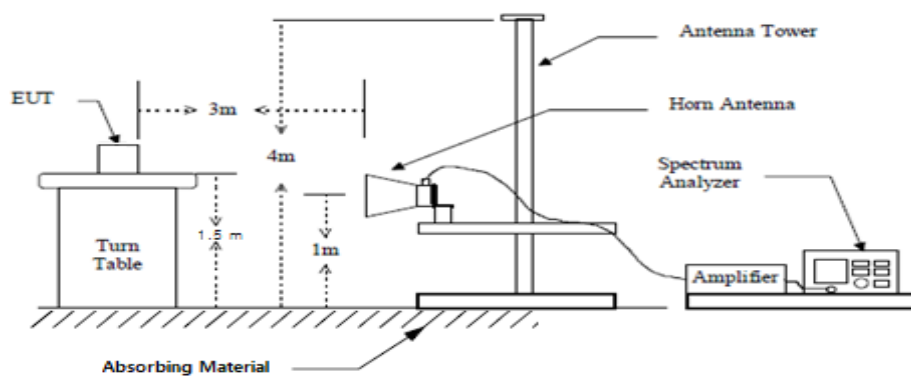

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions – BLE

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE HIGH

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

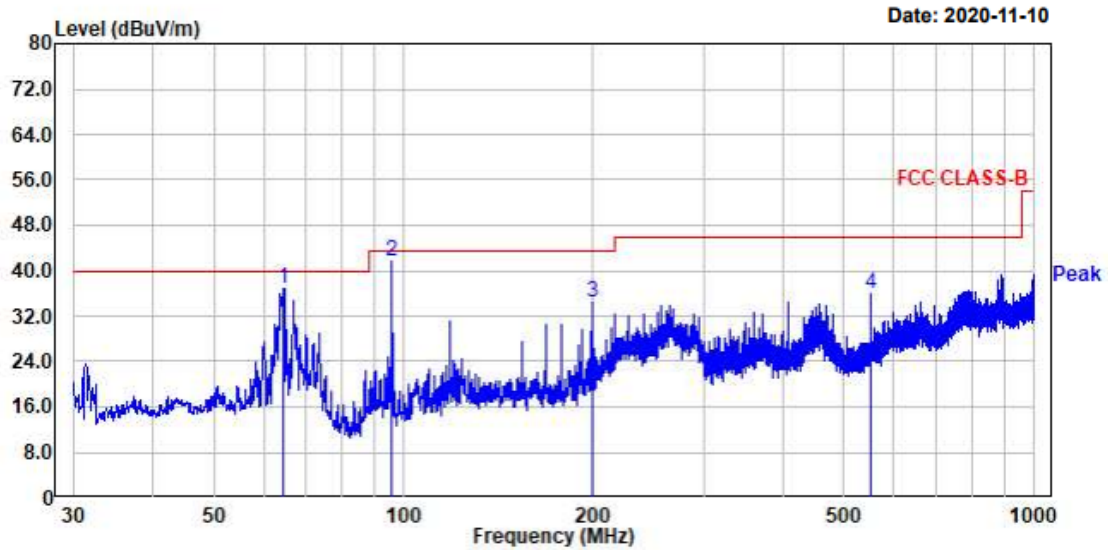

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	64.31	50.30	-13.40	36.90	40.00	3.10	100	178	horizontal
2.	95.96	57.58	-15.95	41.63	43.50	1.87	100	94	horizontal
3.	199.63	48.48	-14.17	34.31	43.50	9.19	100	113	horizontal
4.	551.98	39.98	-3.92	36.06	46.00	9.94	100	127	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE HIGH

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

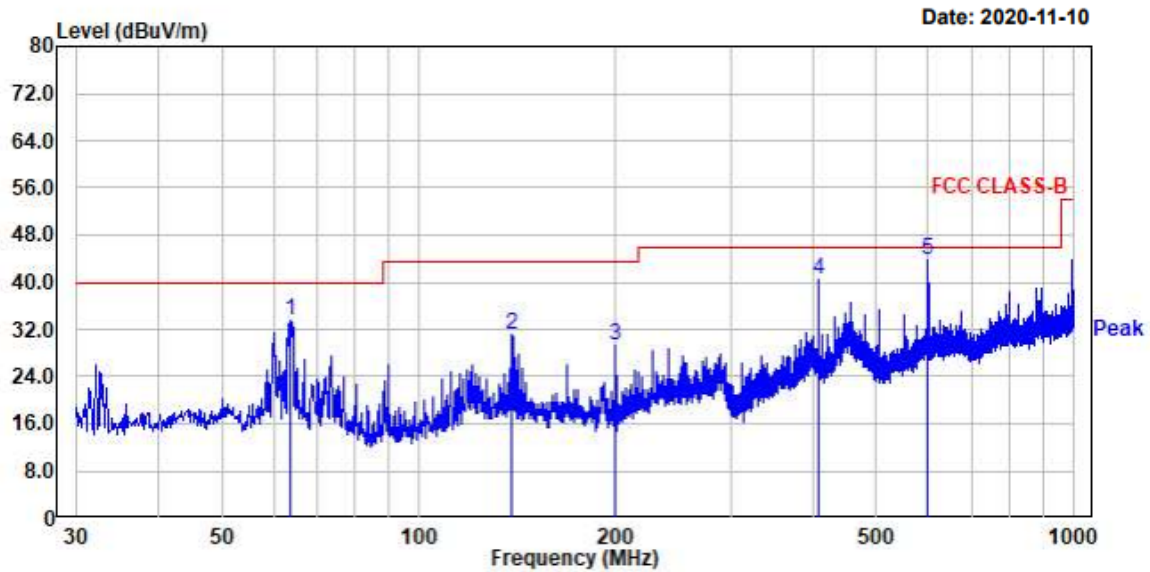

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	63.83	47.00	-13.36	33.64	40.00	6.36	100	0	vertical
2.	139.00	42.48	-11.50	30.98	43.50	12.52	100	0	vertical
3.	199.63	43.41	-14.17	29.24	43.50	14.26	100	116	vertical
4.	408.06	47.48	-7.10	40.38	46.00	5.62	100	184	vertical
5.	600.12	46.33	-2.54	43.79	46.00	2.21	100	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

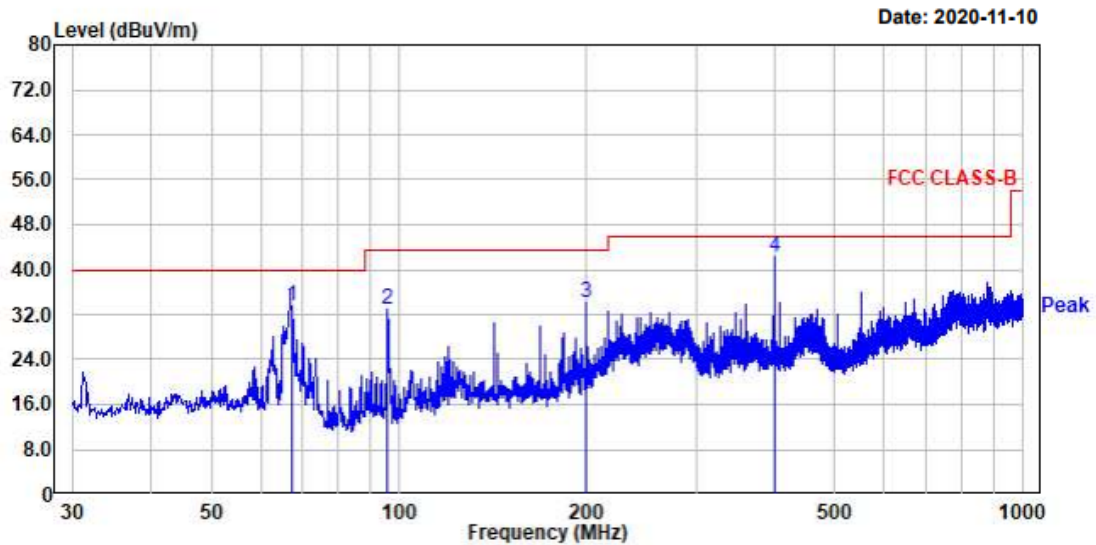

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	67.22	47.39	-13.81	33.58	40.00	6.42	100	144	horizontal
2.	95.96	48.94	-15.95	32.99	43.50	10.51	100	313	horizontal
3.	199.75	48.25	-14.19	34.06	43.50	9.44	100	75	horizontal
4.	400.06	49.66	-7.38	42.28	46.00	3.72	100	196	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

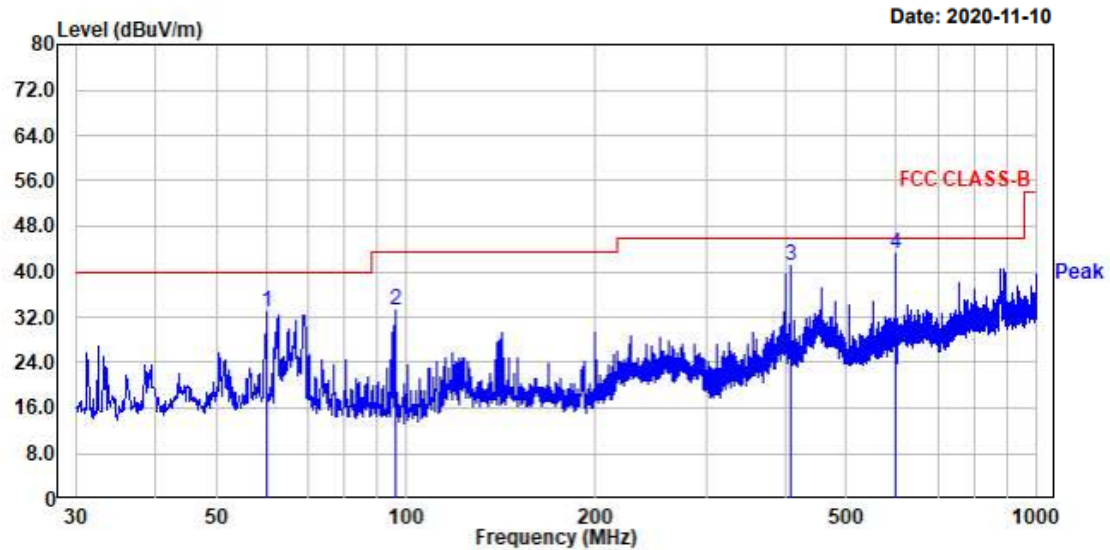

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	60.19	45.83	-13.03	32.80	40.00	7.20	100	360	vertical
2.	96.08	49.01	-15.93	33.08	43.50	10.42	100	251	vertical
3.	407.94	48.09	-7.10	40.99	46.00	5.01	100	167	vertical
4.	600.00	45.83	-2.54	43.29	46.00	2.71	100	148	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

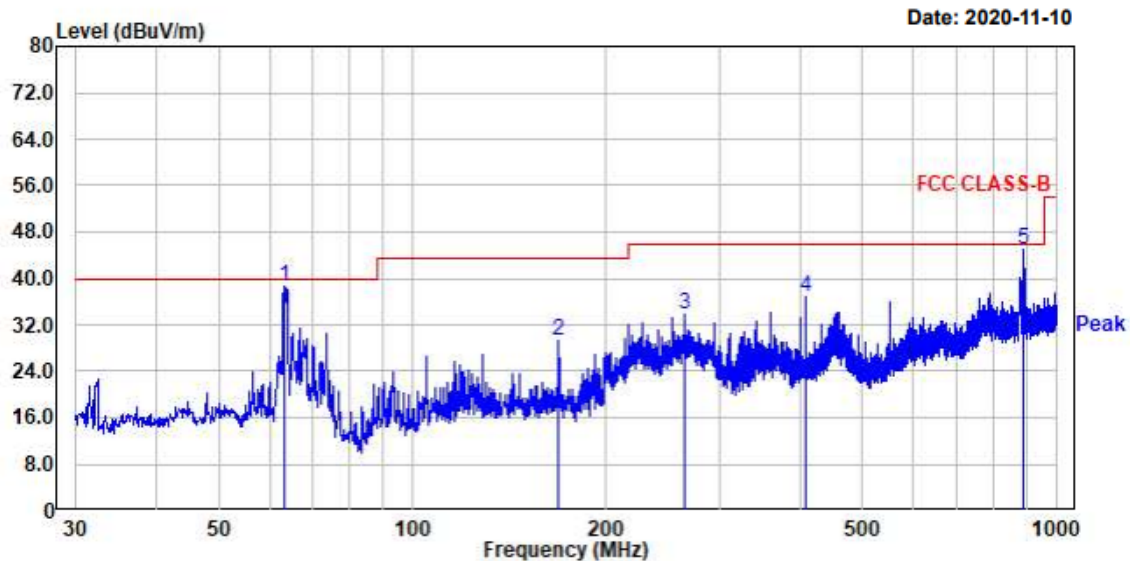

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	63.22	52.00	-13.30	38.70	40.00	1.30	100	108	horizontal
2.	167.98	40.71	-11.53	29.18	43.50	14.32	100	58	horizontal
3.	264.01	45.41	-11.57	33.84	46.00	12.16	100	75	horizontal
4.	408.06	44.02	-7.10	36.92	46.00	9.08	100	262	horizontal
5.	888.09	42.87	2.00	44.87	46.00	1.13	100	161	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

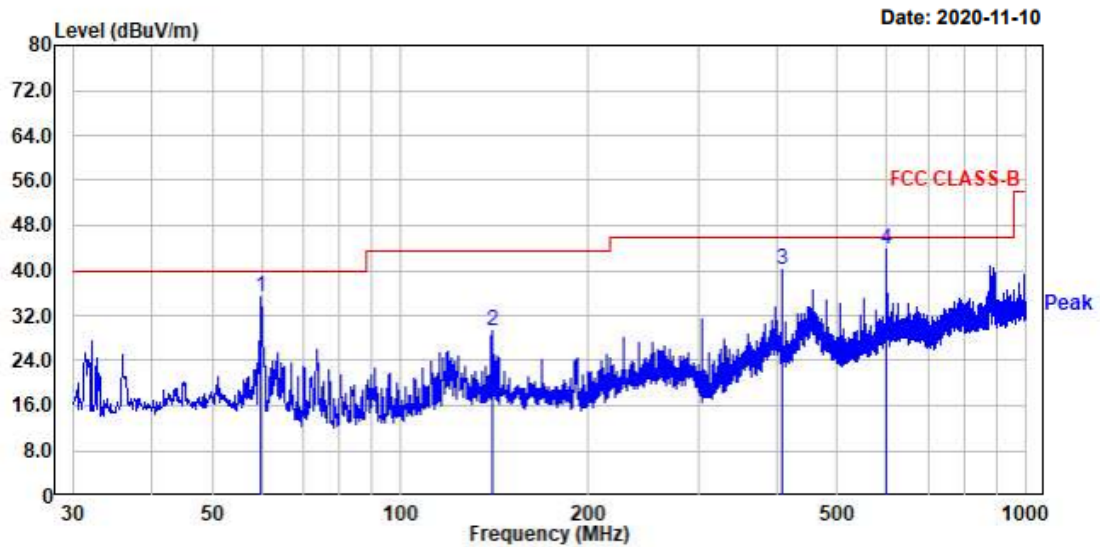

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	59.95	48.19	-13.00	35.19	40.00	4.81	100	82	vertical
2.	140.46	40.68	-11.34	29.34	43.50	14.16	100	0	vertical
3.	408.06	47.38	-7.10	40.28	46.00	5.72	100	166	vertical
4.	600.00	46.35	-2.54	43.81	46.00	2.19	100	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE HIGH

Test Mode : 20 °C / 36 % R.H.

Tested by:

Power :

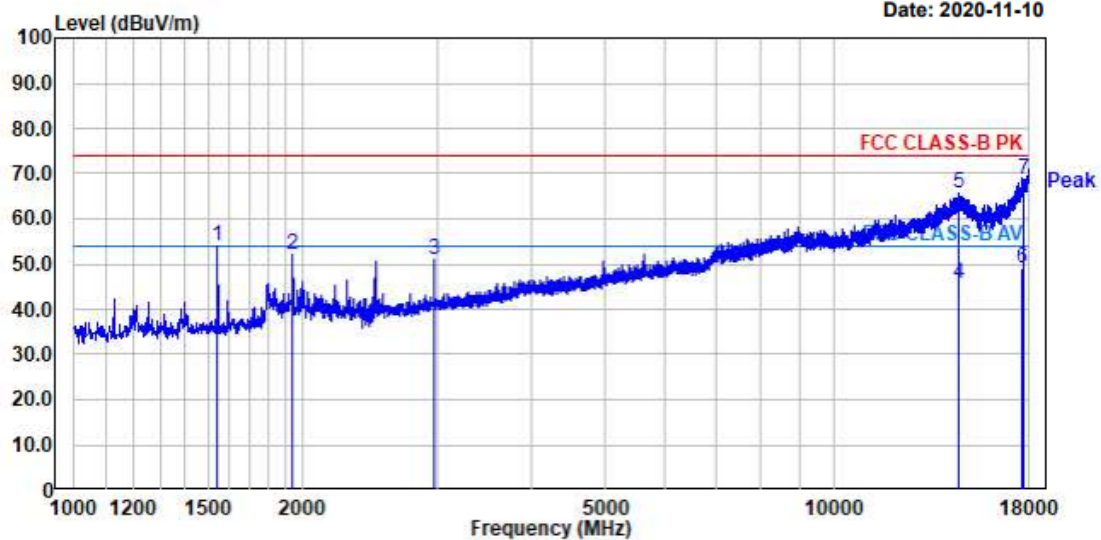

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1546.13	60.36	-6.29	54.07	74.00	19.93	266	272	horizontal
2.	1941.38	55.36	-3.35	52.01	74.00	21.99	170	178	horizontal
3.	2976.25	48.82	2.11	50.93	74.00	23.07	266	272	horizontal
4.	14604.25	21.70	24.11	45.81	54.00	8.19	57	64	horizontal
5.	14604.25	41.70	24.11	65.81	74.00	8.19	57	64	horizontal
6.	17677.00	21.82	27.42	49.24	54.00	4.76	317	322	horizontal
7.	17749.25	40.83	27.82	68.65	74.00	5.35	356	358	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE HIGH

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

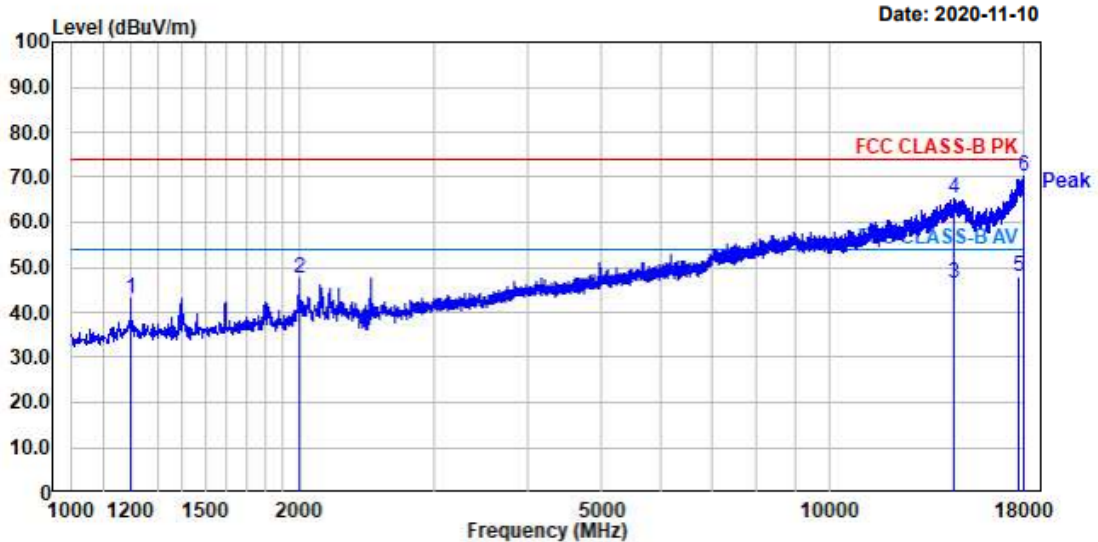

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1197.63	51.78	-8.66	43.12	74.00	30.88	82	74	vertical
2.	1996.63	50.32	-2.92	47.40	74.00	26.60	31	24	vertical
3.	14591.50	22.09	24.14	46.23	54.00	7.77	289	284	vertical
4.	14591.50	41.12	24.14	65.26	74.00	8.74	289	284	vertical
5.	17698.25	20.46	27.54	48.00	54.00	6.00	360	360	vertical
6.	17978.75	41.18	29.08	70.26	74.00	3.74	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

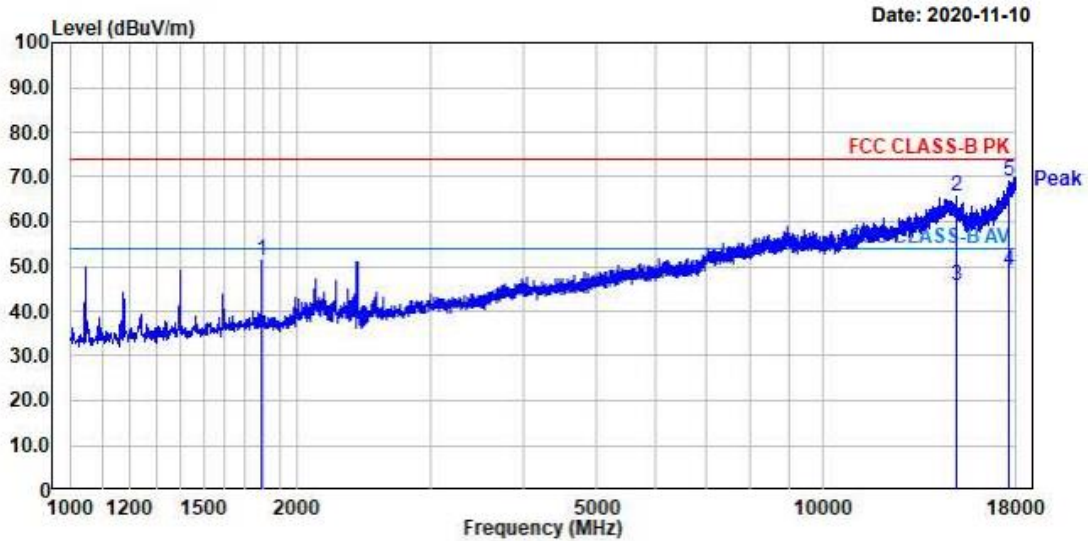

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1790.50	55.69	-4.50	51.19	74.00	22.81	65	59	horizontal
2.	15001.63	42.54	23.06	65.60	74.00	8.40	7	4	horizontal
3.	15001.63	22.54	23.06	45.60	54.00	8.40	7	4	horizontal
4.	17689.75	21.66	27.50	49.16	54.00	4.84	304	298	horizontal
5.	17689.75	41.66	27.50	69.16	74.00	4.84	304	298	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE LOW

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

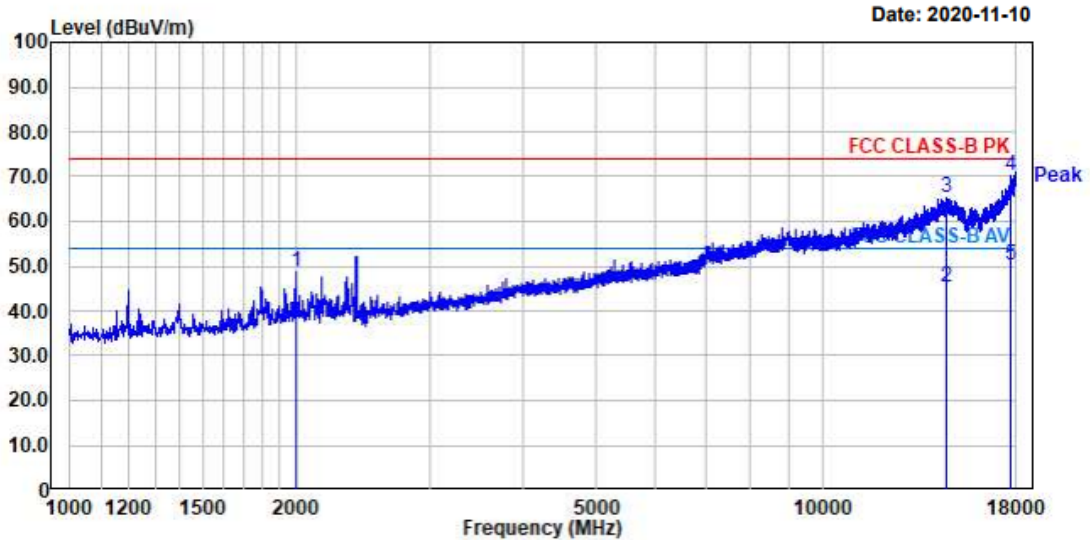

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1994.50	51.53	-2.94	48.59	74.00	25.41	86	90	vertical
2.	14595.75	20.96	24.14	45.10	54.00	8.90	328	333	vertical
3.	14595.75	40.96	24.14	65.10	74.00	8.90	328	333	vertical
4.	17768.38	42.20	27.93	70.13	74.00	3.87	0	0	vertical
5.	17768.38	22.20	27.93	50.13	54.00	3.87	0	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

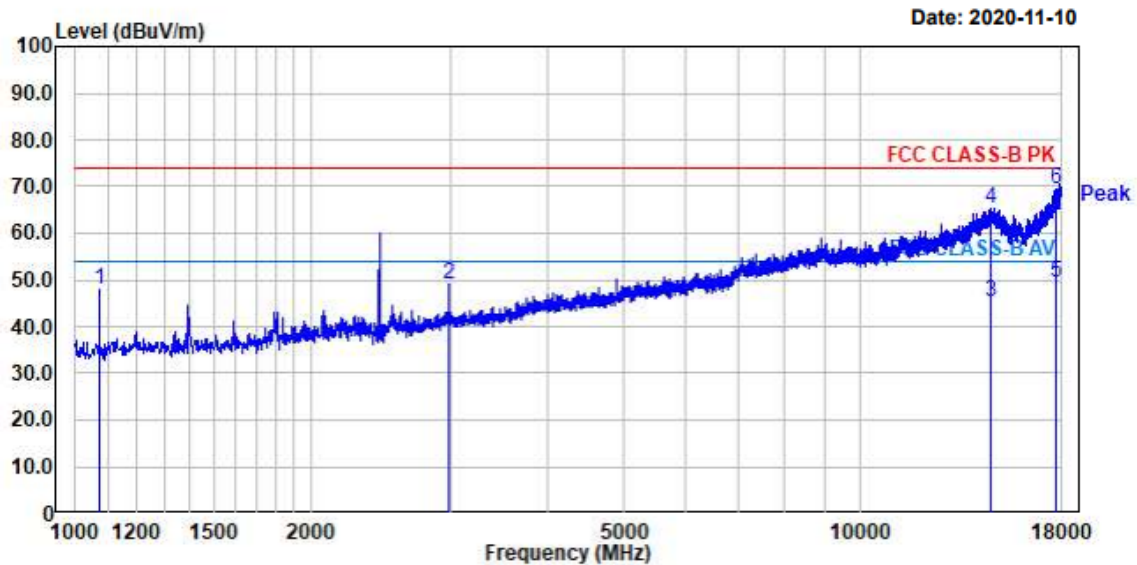

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1074.38	57.63	-9.52	48.11	74.00	25.89	23	28	horizontal
2.	2989.00	47.06	2.16	49.22	74.00	24.78	314	320	horizontal
3.	14634.00	21.09	24.03	45.12	54.00	8.88	355	357	horizontal
4.	14634.00	41.09	24.03	65.12	74.00	8.88	355	357	horizontal
5.	17706.75	21.75	27.59	49.34	54.00	4.66	246	252	horizontal
6.	17706.75	41.75	27.59	69.34	74.00	4.66	246	252	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: RF

Temp/Humi: BLE MID

Test Mode : 20 'C / 36 % R.H.

Tested by:

Power :

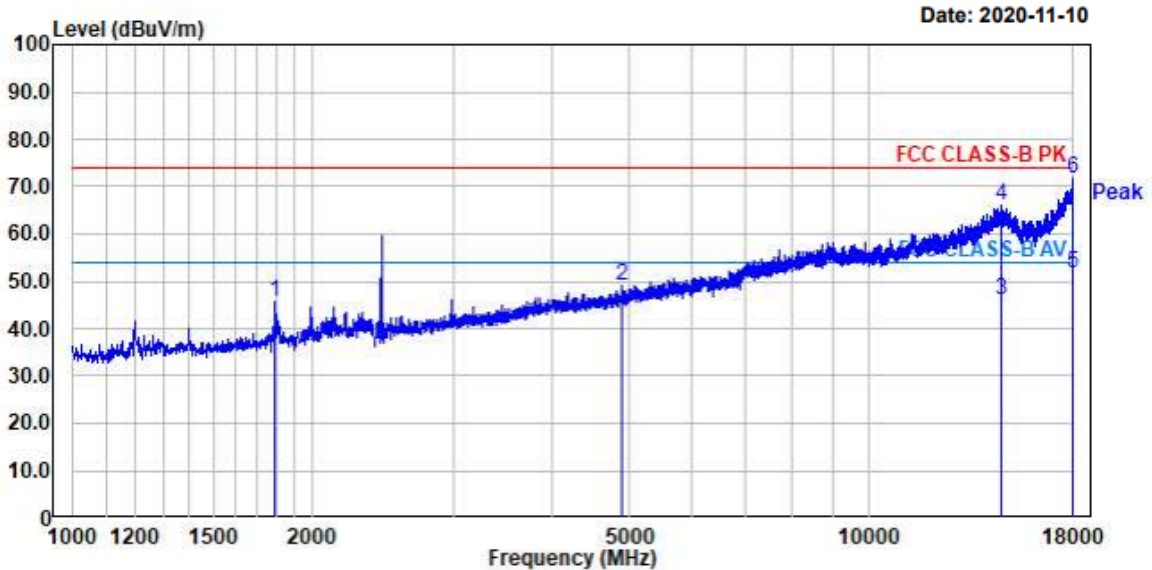

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1792.63	50.02	-4.48	45.54	74.00	28.46	46	39	vertical
2.	4884.50	39.90	9.27	49.17	74.00	24.83	337	331	vertical
3.	14668.00	22.03	23.94	45.97	54.00	8.03	206	199	vertical
4.	14668.00	42.03	23.94	65.97	74.00	8.03	206	199	vertical
5.	17995.75	22.67	29.18	51.85	54.00	2.15	270	264	vertical
6.	17995.75	42.67	29.18	71.85	74.00	2.15	270	264	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.:

Temp/Humi: 24 'C / 51 % R.H.

Test Mode : BLE HIGH

Tested by:

Power :

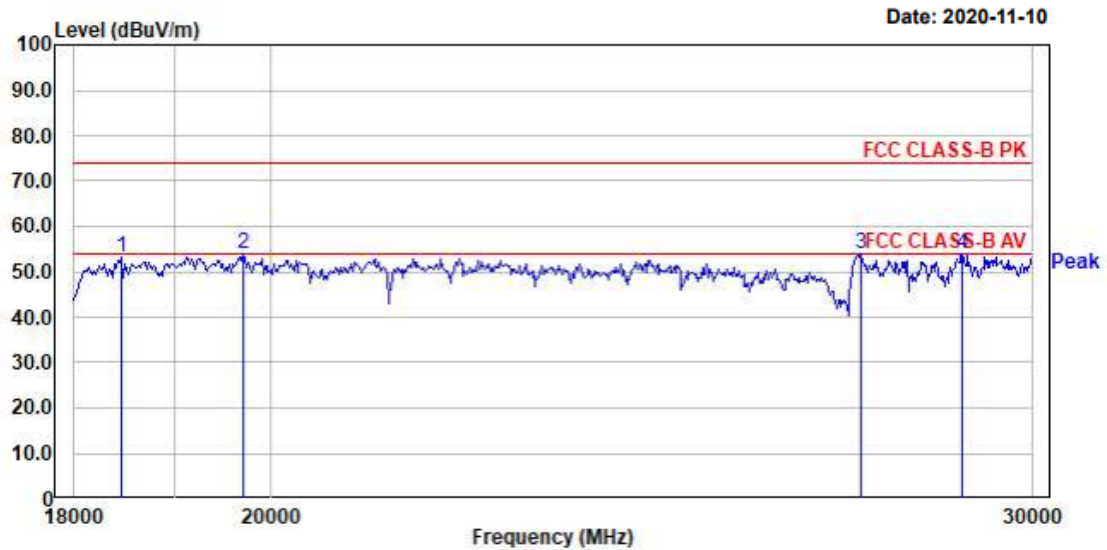


No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	18469.56	36.27	16.90	53.17	74.00	20.83	249	254	horizontal
2.	19704.35	37.84	16.07	53.91	74.00	20.09	315	324	horizontal
3.	27391.30	35.39	18.48	53.87	74.00	20.13	89	97	horizontal
4.	28904.35	33.08	20.95	54.03	74.00	19.97	76	81	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: _____ Temp/Humi: 24 'C / 51 % R.H.
Test Mode : BLE HIGH _____ Tested by: _____
Power : _____

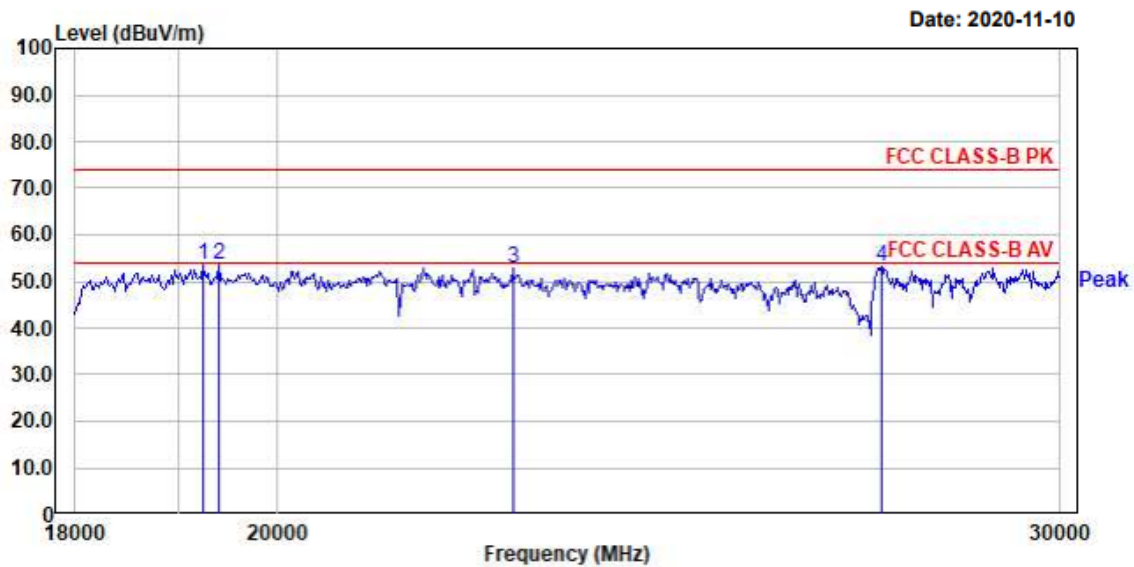


No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1	19234.78	37.16	16.58	53.74	74.00	20.26	0	0	vertical
2	19391.30	36.89	16.51	53.40	74.00	20.60	243	234	vertical
3	22591.30	37.10	15.89	52.99	74.00	21.01	185	180	vertical
4	27356.52	34.65	18.50	53.15	74.00	20.85	224	219	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: _____ Temp/Humi: 24 'C / 51 % R.H.
Test Mode : BLE LOW _____ Tested by: _____
Power : _____

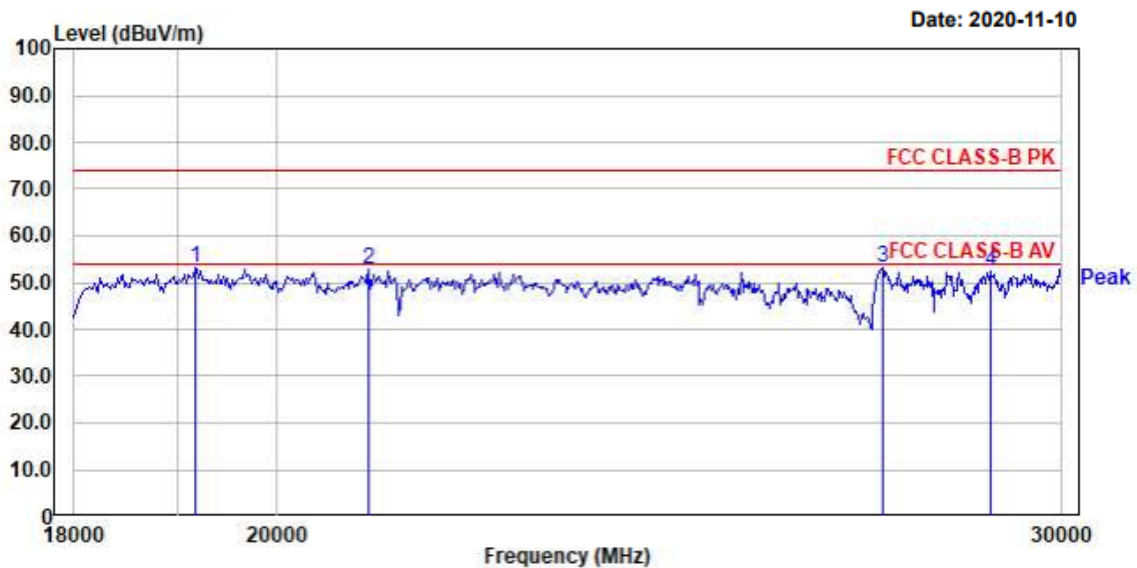


No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1	19165.22	36.69	16.57	53.26	74.00	20.74	359	360	horizontal
2	20973.91	37.15	15.85	53.00	74.00	21.00	248	254	horizontal
3	27356.52	34.68	18.50	53.18	74.00	20.82	134	139	horizontal
4	28921.74	31.67	20.95	52.62	74.00	21.38	0	0	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: _____ Temp/Humi: 24 'C / 51 % R.H.
Test Mode : BLE LOW _____ Tested by: _____
Power : _____

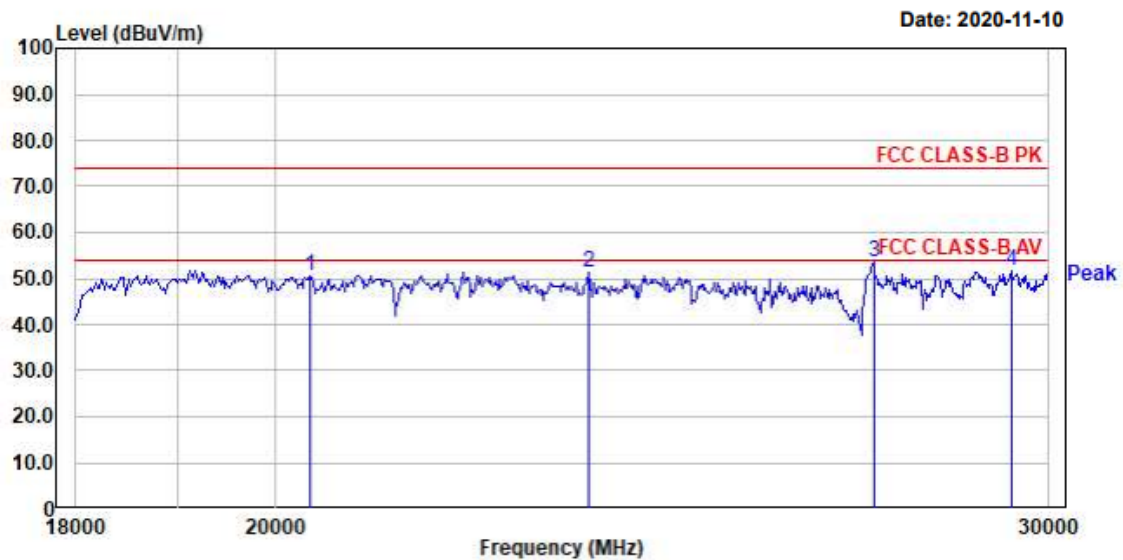


No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	20365.22	35.20	15.33	50.53	74.00	23.47	38	34	vertical
2.	23565.22	35.70	15.64	51.34	74.00	22.66	244	237	vertical
3.	27373.91	35.29	18.48	53.77	74.00	20.23	360	360	vertical
4.	29426.09	30.54	21.29	51.83	74.00	22.17	312	307	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: _____ Temp/Humi: 24 'C / 51 % R.H.
Test Mode : BLE MID _____ Tested by: _____
Power : _____

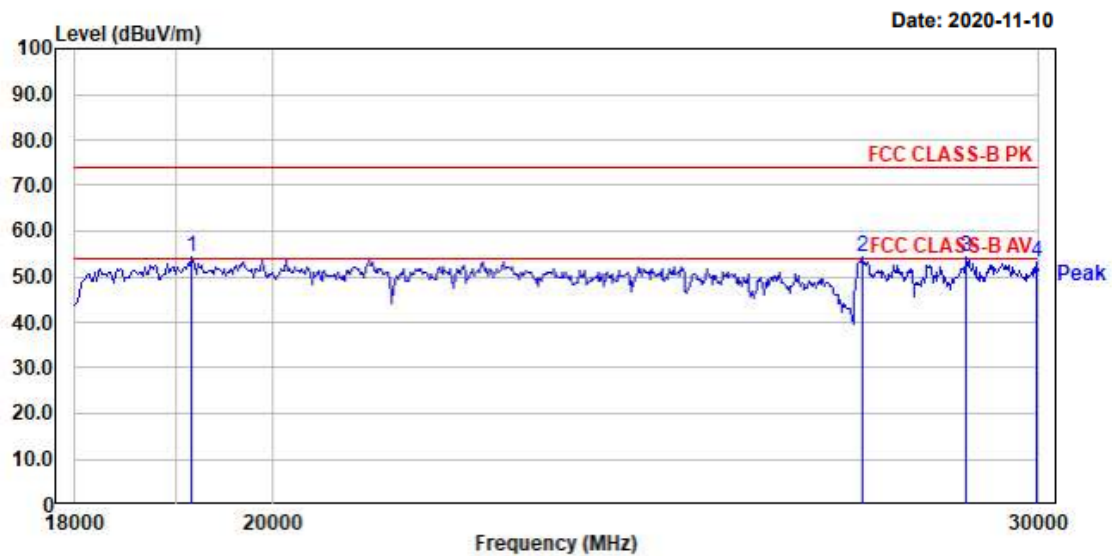


No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	19147.83	37.61	16.57	54.18	74.00	19.82	360	360	horizontal
2.	27321.74	35.73	18.54	54.27	74.00	19.73	360	360	horizontal
3.	28886.96	33.35	20.90	54.25	74.00	19.75	314	322	horizontal
4.	29965.22	31.52	21.66	53.18	74.00	20.82	78	83	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: _____ Temp/Humi: 24 'C / 51 % R.H.
Test Mode : BLE MID _____ Tested by: _____
Power : _____

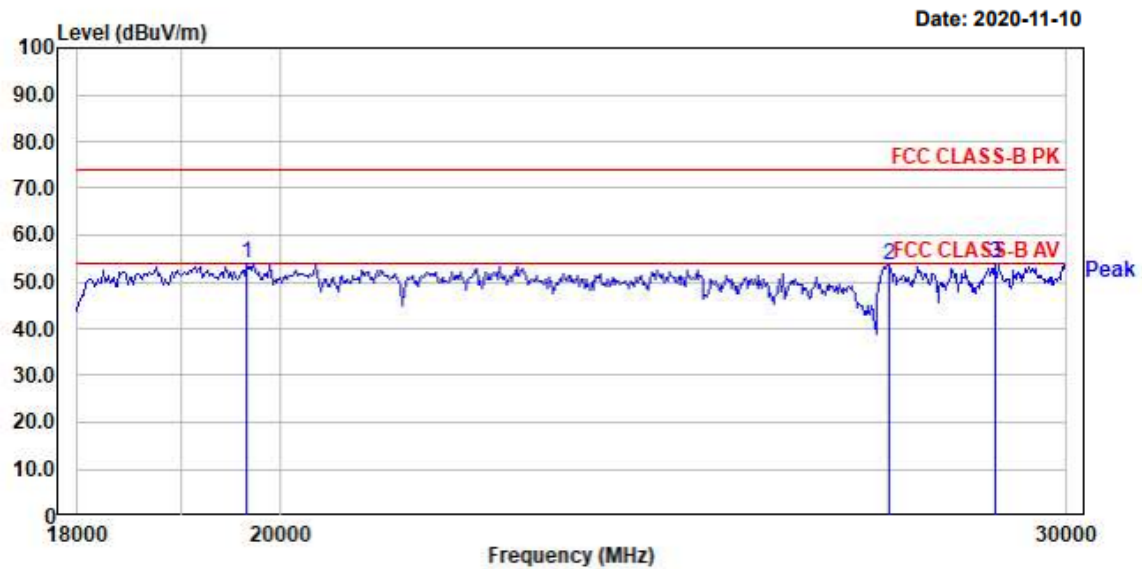

No.	Freq MHz	Reading dB μ V	C.F dB	Result QP dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Angle deg	Polarity
1	19652.17	37.90	16.19	54.09	74.00	19.91	360	360	vertical
2	27373.91	35.14	18.48	53.62	74.00	20.38	188	186	vertical
3	28939.13	33.03	20.95	53.98	74.00	20.02	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.7 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

EUT /Model No. : SDK-0502


Phase : Line

Test Mode : Operating mode

Test Power : 120 V / 60 Hz

Temp./ Humi. : 23 °C / 43 % R.H.

Test Engineer : KIM C B

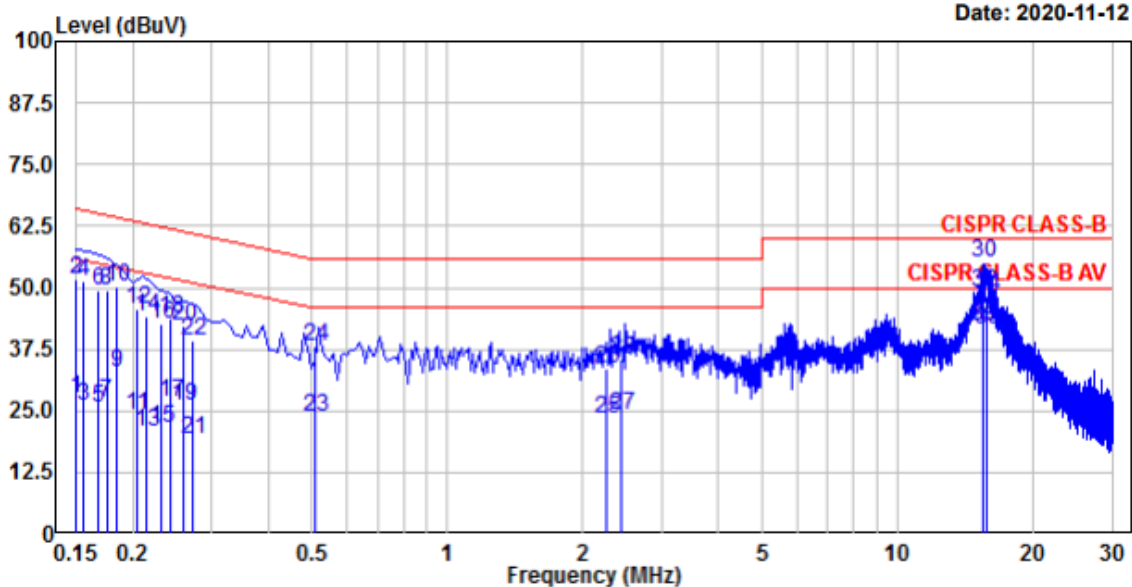

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.150	32.15	8.19	19.47	51.62	27.66	65.99	55.99	14.37	28.33	Line
4.	0.155	31.75	6.62	19.47	51.22	26.09	65.71	55.71	14.49	29.62	Line
6.	0.169	30.06	6.23	19.47	49.53	25.70	65.03	55.03	15.50	29.33	Line
8.	0.175	29.86	7.51	19.47	49.33	26.98	64.71	54.71	15.38	27.73	Line
10.	0.185	30.78	13.21	19.47	50.25	32.68	64.24	54.24	13.99	21.56	Line
12.	0.205	26.34	4.63	19.47	45.81	24.10	63.41	53.41	17.60	29.31	Line
14.	0.215	24.80	1.38	19.47	44.27	20.85	63.01	53.01	18.74	32.16	Line
16.	0.232	23.33	1.97	19.47	42.80	21.44	62.37	52.37	19.57	30.93	Line
18.	0.243	24.28	7.29	19.47	43.75	26.76	62.01	52.01	18.26	25.25	Line
20.	0.259	22.98	6.76	19.47	42.45	26.23	61.46	51.46	19.01	25.23	Line
22.	0.272	19.85	-0.23	19.47	39.32	19.24	61.06	51.06	21.74	31.82	Line
24.	0.508	18.74	4.22	19.49	38.23	23.71	56.00	46.00	17.77	22.29	Line
26.	2.259	13.96	3.86	19.58	33.54	23.44	56.00	46.00	22.46	22.56	Line
28.	2.441	15.77	4.44	19.58	35.35	24.02	56.00	46.00	20.65	21.98	Line
30.	15.429	35.12	22.43	19.97	55.09	42.40	60.00	50.00	4.91	7.60	Line
32.	15.448	29.10	22.39	19.97	49.07	42.36	60.00	50.00	10.93	7.64	Line
34.	15.777	28.25	21.35	19.97	48.22	41.32	60.00	50.00	11.78	8.68	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Windows 저프 이즈

EUT /Model No. : SDK-0502


Phase : Line

Test Mode : Operating mode

Test Power : 120 V / 60 Hz

Temp./ Humi. : 23 °C / 43 % R.H.

Test Engineer : KIM C B

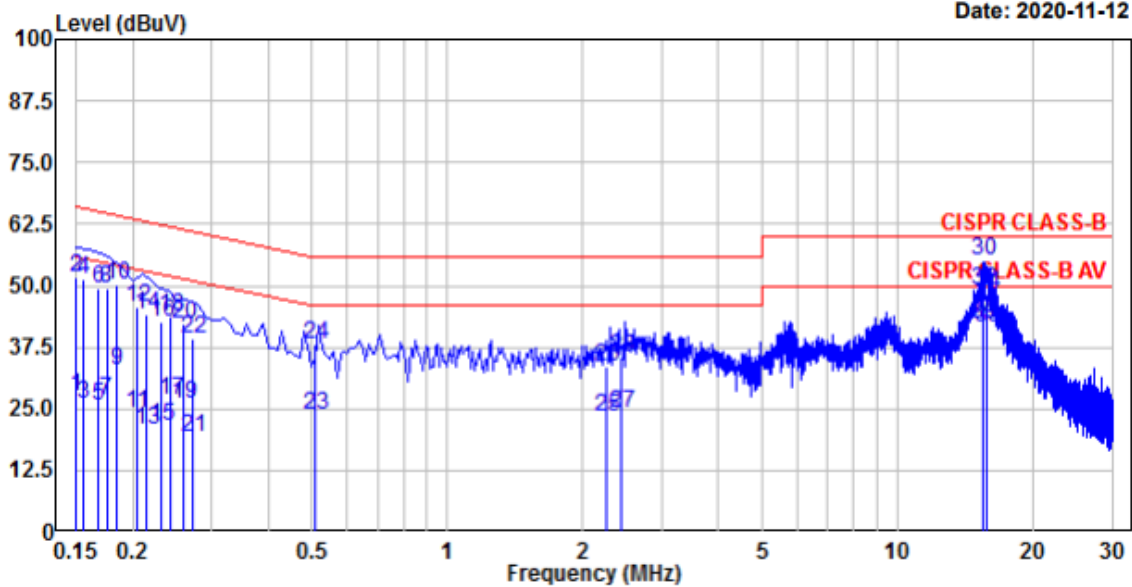

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.150	32.15	8.19	19.47	51.62	27.66	65.99	55.99	14.37	28.33	Line
4.	0.155	31.75	6.62	19.47	51.22	26.09	65.71	55.71	14.49	29.62	Line
6.	0.169	30.06	6.23	19.47	49.53	25.70	65.03	55.03	15.50	29.33	Line
8.	0.175	29.86	7.51	19.47	49.33	26.98	64.71	54.71	15.38	27.73	Line
10.	0.185	30.78	13.21	19.47	50.25	32.68	64.24	54.24	13.99	21.56	Line
12.	0.205	26.34	4.63	19.47	45.81	24.10	63.41	53.41	17.60	29.31	Line
14.	0.215	24.80	1.38	19.47	44.27	20.85	63.01	53.01	18.74	32.16	Line
16.	0.232	23.33	1.97	19.47	42.80	21.44	62.37	52.37	19.57	30.93	Line
18.	0.243	24.28	7.29	19.47	43.75	26.76	62.01	52.01	18.26	25.25	Line
20.	0.259	22.98	6.76	19.47	42.45	26.23	61.46	51.46	19.01	25.23	Line
22.	0.272	19.85	-0.23	19.47	39.32	19.24	61.06	51.06	21.74	31.82	Line
24.	0.508	18.74	4.22	19.49	38.23	23.71	56.00	46.00	17.77	22.29	Line
26.	2.259	13.96	3.86	19.58	33.54	23.44	56.00	46.00	22.46	22.56	Line
28.	2.441	15.77	4.44	19.58	35.35	24.02	56.00	46.00	20.65	21.98	Line
30.	15.429	35.12	22.43	19.97	55.09	42.40	60.00	50.00	4.91	7.60	Line
32.	15.448	29.10	22.39	19.97	49.07	42.36	60.00	50.00	10.93	7.64	Line
34.	15.777	28.25	21.35	19.97	48.22	41.32	60.00	50.00	11.78	8.68	Line

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Windows 저프 이즈

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2021-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2021-03-20
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2021-03-20
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2021-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2021-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2021-09-06
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2021-09-06
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2021-03-20
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-08-04
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2022-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2022-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2021-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2021-03-20
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2021-03-20
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2021-09-06
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2021-09-06
20		Modulation Analyzer	8901B	3749A05878	HP	1 year	2021-09-06
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2021-09-06
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2022-03-18
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2021-09-06
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2021-03-18
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2021-03-18
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2021-03-18
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2021-03-18
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2021-03-18
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2021-03-18
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2021-03-18
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2021-02-26