



# WINNF-TS-0122 Test Report

Applicant	Jaton Technology Limited
Equipment	LTE-A Pro CAT15 B48 Outdoor CPE
Brand Name	JATONTECH/BROADBANDEVOLUTION
Model Name	JT8500D/JT8500H/BE8500D/BE8500H
FCC ID	2AU2O-JT8500D-8500H
Reference	WINNF-TS-0122 Version V1.0.1

The product was received on Mar. 06, 2020 and testing was started from May 15, 2020 and completed on Jun 15, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in WINNF-TS-0122 Version V1.0.1 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>Revision History</b> -----	<b>4</b>
<b>1. Administration Data</b> -----	<b>5</b>
1.1 Testing Laboratory-----	5
1.2 Applicant-----	5
1.3 Manufacturer-----	5
<b>2. General Information</b> -----	<b>6</b>
2.1 Description of Equipment Under Test (EUT)-----	6
2.2 Protocol Test Summary -----	7
2.3 Time test for getting Grant Summary -----	9
2.4 Support Equipment-----	9
2.5 Test Equipment List -----	9
<b>3. Measurement Environment</b> -----	<b>10</b>
3.1 Test configuration without Domain Proxy-----	11
3.2 Standards -----	12
3.3 Protocol test procedure -----	12
3.4 Time test for getting Grant Procedure -----	12
<b>4. Protocol Test Results</b> -----	<b>13</b>
4.1 [WINNF.FT.C.REG.1] Multi-Step registration -----	13
4.2 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data -----	14
4.3 [WINNF.FT.C.REG.7] Registration due to change of an installation parameter -----	15
4.4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102) -----	16
4.5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200) -----	17
4.6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)-----	18
4.7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101) -----	19
4.8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100) -----	20
4.9 [WINNF.FT.C.REG.18] Group Error (responseCode 201) -----	21
4.10 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE) -----	22
4.11 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)-----	23
4.12 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response) -----	24
4.13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (Deregister) -----	26
4.14 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT) -----	27
4.15 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response -----	28
4.16 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response -----	29
4.17 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)-----	31

---

4.18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat) -----	32
4.19 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat) -----	33
4.20 [WINNF.FT.C.HBT.11] Successful Grant Renewal in Heartbeat Test Case-----	34
4.21 [WINNF.FT.C.RLQ.1] Successful Relinquishment-----	36
4.22 [WINNF.FT.C.RLQ.3] Unsuccessful Relinquishment, responseCode=102-----	37
4.23 [WINNF.FT.C.RLQ.5] Unsuccessful Relinquishment, responseCode=103-----	38
4.24 [WINNF.FT.C.DRG.1] Successful Dereistration -----	39
4.25 [WINNF.FT.C.DRG.3] Dereistration responseCode=102-----	40
4.26 [WINNF.FT.C.DRG.5] Dereistration responseCode=103-----	41
4.27 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness -----	42
4.28 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate -----	43
4.29 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate -----	44
4.30 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA	45
4.31 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted -----	46
4.32 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement-----	47
<b>5. Result of Time test for getting Grant-----</b>	<b>49</b>
5.1 1 second within any 10-second period -----	49
5.2 10 seconds within any 300-second period -----	50
5.3 20 seconds within any 3600-second period-----	51
<b>6. UUT register with the SAS irrespective of power levels-----</b>	<b>52</b>
6.1 Test Procedure -----	52
6.2 Result-----	52

#### Appendix A. Setup Plot

#### Appendix B. RF measurement plots



## Revision History



## 1. Administration Data

### 1.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DFS02-HY
Test Engineer	Howard Lin
Temperature	21 ~ 25 °C
Relative Humidity	50 ~ 56 %

### 1.2 Applicant

Company Name	Jaton Technology Limited
Address	FLAT/RM B 5/F GAYLORD COMMERCIAL BUILDING 114-118 LOCKHART ROAD HK

### 1.3 Manufacturer

Company Name	Jaton Technology Limited
Address	FLAT/RM B 5/F GAYLORD COMMERCIAL BUILDING 114-118 LOCKHART ROAD HK



## 2. General Information

### 2.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT Type	LTE-A Pro CAT15 B48 Outdoor CPE
Brand Name	JATONTECH/BROADBANDEVOLUTION
Model Name	JT8500D/JT8500H/BE8500D/BE8500H
FCC ID	2AU2O-JT8500D-8500H
Professional Installation	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
UUT Category	<input type="checkbox"/> Category A <input checked="" type="checkbox"/> Category B
Unit Under Test in Test ID	<input type="checkbox"/> UUT with Domain Proxy <input checked="" type="checkbox"/> UUT without Domain Proxy
UUT HW Version	V1.0
UUT SW Version	V1.5.0
Device Power Class	LTE Band 48: Power Class 3

Sample Information		
Sample 1	JT8500H	With 17 dBi antenna
Sample 2	JT8500D	With 13 dBi antenna

#### Remark:

1. All models are electrically identical except antenna, different model name are for applied antenna and marketing purpose.
2. Sample 2 was selected as a representative one for the final test and only its data was recorded in this report.



## 2.2 Protocol Test Summary

Section	Test Case ID	Test Case Title	Test Result
6.1.4.2.1	WINNF.FT.C.REG.1	Multi-Step registration	PASS
6.1.4.2.3	WINNF.FT.C.REG.5	Single-Step registration for CBSD with CPI signed data	PASS
6.1.4.2.5	WINNF.FT.C.REG.7	Registration due to change of an installation parameter	PASS
6.1.4.2.7	WINNF.FT.C.REG.8	Missing Required parameters (responseCode 102)	PASS
6.1.4.2.9	WINNF.FT.C.REG.10	Pending registration (responseCode 200)	PASS
6.1.4.2.11	WINNF.FT.C.REG.12	Invalid parameter (responseCode 103)	PASS
6.3.4.2.1	WINNF.FT.C.REG.14	Blacklisted CBSD (responseCode 101)	PASS
6.3.4.2.2	WINNF.FT.C.REG.16	Unsupported SAS protocol version (responseCode 100)	PASS
6.4.4.1.1	WINNF.FT.C.REG.18	Group Error (responseCode 201)	PASS
6.4.4.2.1	WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS
6.4.4.2.2	WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	PASS
6.4.4.2.3	WINNF.FT.C.HBT.1	Heartbeat Success Case (first Heartbeat Response)	PASS
6.4.4.2.4	WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DREGISTER)	PASS
6.4.4.2.5	WINNF.FT.C.HBT.4	Heartbeat responseCode=500 (TERMINATED_GRANT)	PASS
6.4.4.3.1	WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS
6.4.4.3.2	WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS
6.4.4.4.1	WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	PASS
6.6.4.1.1	WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS
6.6.4.2.1	WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS
6.6.4.3.1	WINNF.FT.C.HBT.11	Successful Grant Renewal in Heartbeat Test Case	PASS
6.7.4.1.1	WINNF.FT.C.RLQ.1	Successful Relinquishment	PASS
6.1.4.2.1	WINNF.FT.C.RLQ.3	Unsuccessful Relinquishment, responseCode=102	PASS
6.1.4.2.3	WINNF.FT.C.RLQ.5	Unsuccessful Relinquishment, responseCode=103	PASS
6.1.4.2.5	WINNF.FT.C.DRG.1	Successful Dereistration	PASS
6.7.4.2.1	WINNF.FT.C.DRG.3	Dereistration responseCode=102	PASS



Section	Test Case ID	Test Case Title	Test Result
6.7.4.3.1	WINNF.FT.C.DRG.5	Deregistration responseCode=103	PASS
6.8.4.1.1	WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS
6.8.4.2.1	WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS
6.8.4.2.2	WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS
6.8.4.2.3	WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issued by unknown CA	PASS
6.8.4.2.4	WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS
7.1.4.1.1	WINNF.PT.C.HBT	UUT RF Transmit Power Measurement	PASS



### 2.3 Time test for getting Grant Summary

Trail	Time limit	Monitoring time	Measured result	Verdict
1	1 second	10 seconds	1.9ms	PASS
2	10 seconds	300 seconds	42ms	PASS
3	20 seconds	3600 seconds	12.42s	PASS

### 2.4 Support Equipment

Name	Manufacturer	Type/Model	Serial Number	FCC ID
Q710	Ruckus	P01-Q710-US02	991929000175	S9GQ710US02

### 2.5 Test Equipment List

Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
Spectrum Analyzer	Keysight	N9010A	MY57120184	Nov. 20, 2019	Nov. 19, 2020




### 3. Measurement Environment

Measurement Environment Information	
SAS Test Harness version	1.0.0.3
Operating System	Windows 10
TLS version	V 1.2
Python version	V 2.7

Conditional Test Case		
Support (Yes / No)	Condition	Definition
Yes	C1	Mandatory for UUT which supports multi-step registration message
No	C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.
Yes	C3	Mandatory for UUT which supports single-step registration containing CPIsigned data in the registration message.
No	C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type
No	C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.
Yes	C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.

### 3.1 Test configuration without Domain Proxy

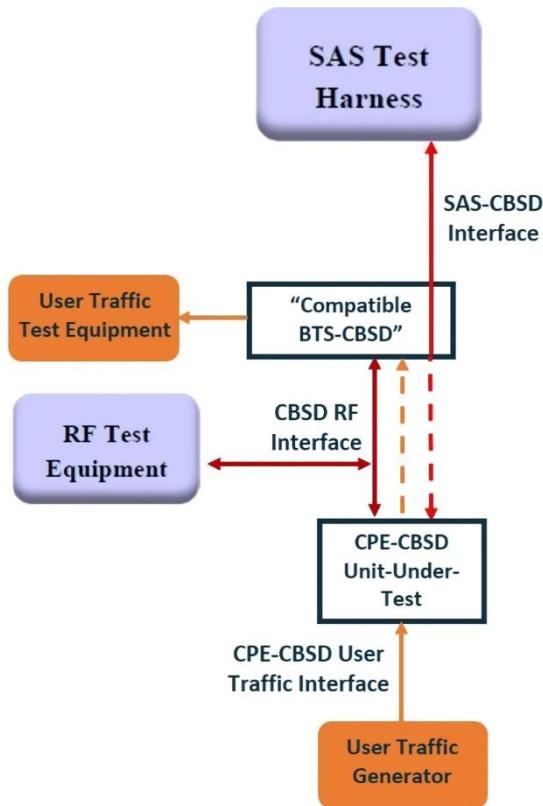



### 3.2 Standards

- [n.1]. FCC KDB 940660 D02 CPE-CBSD Handshake Procedures v02, 22 October 2019
- [n.2]. WINNF-TS-0122 Version 1.0.1, “Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)”, 28 September 2018

### 3.3 Protocol test procedure

The test cases for SAS<->CBSD protocol in [n.2] apply for CPE-CBSD device type. Following the [n.1], when running the test cases in [n.2] for CPE-CBSD device type, verify that

1. CPE-CBSD can begin transmitting its RF only after receiving radio signal from its compatible BTS-CBSD.
2. For all CPE-CBSD RF transmissions, the CPE-CBSD UUT radio frequency range and bandwidth are less or equal to the frequency range and bandwidth of its compatible BTS-CBSD.
3. Judging the last execution step appearing in [n.2] with “User data traffics” instead of “RF transmission.”

### 3.4 Time test for getting Grant Procedure

Use the WinnForum SAS Harness run test case WINNF.FT.C.GRA.1. Without answering the last question in WINNF.FT.C.GRA.1 will keep UUT's grant request being rejected, then measure the time.



## 4. Protocol Test Results

### 4.1 [WINNF.FT.C.REG.1] Multi-Step registration

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	<p>CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness:</p> <ul style="list-style-type: none"><li>• The required userId, fcId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges.</li><li>• Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li></ul> <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	PASS
3	<ul style="list-style-type: none"><li>• SAS Test Harness sends a CBSD Registration Response as follows:<ul style="list-style-type: none"><li>– <i>cbsdId</i> = C</li><li>– <i>measReportConfig</i> shall not be included</li><li>– <i>responseCode</i> = 0</li></ul></li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.2 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li><li>• All of the required and REG-Conditional parameters shall be configured and CPI signature provided</li></ul>	--
2	CBSD sends Registration request to the SAS Test Harness: <ul style="list-style-type: none"><li>• The required userId, fcId and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges.</li></ul>	PASS
	<ul style="list-style-type: none"><li>• Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li></ul>	
3	<ul style="list-style-type: none"><li>• SAS Test Harness sends a CBSD Registration Response as follows:<ul style="list-style-type: none"><li>– <i>cbsdId</i> = C</li><li>– <i>measReportConfig</i> shall not be included.</li><li>– <i>responseCode</i> = 0</li></ul></li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.3 [WINNF.FT.C.REG.7] Registration due to change of an installation parameter

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li></ul>	--
2	UUT has successfully registered with SAS Test Harness	--
3	Change an installation parameters at the UUT (time T) Tester needs to record the current time at which the parameter change is executed.	--
4	Monitor the SAS-CBSD interface. UUT sends a deregistrationRequest to the SAS Test Harness The deregistration request shall be sent within (T + 60 seconds) from step 3.	PASS

**4.4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS



#### 4.5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =200) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =103) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =101) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =100) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.9 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =201) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

**4.10[WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId</i> = C</li></ul>	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"><li>• <i>cbsdId</i>=C</li><li>• <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

**4.11[WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT\_CONFLICT)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId</i> = C</li></ul>	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"><li>• <i>cbsdId</i>=C</li><li>• <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =401) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

**4.12[WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId</i> = C</li></ul>	--
2	UUT sends a message: <ul style="list-style-type: none"><li>• If message is type Spectrum Inquiry Request, go to step 3, or</li><li>• If message is type Grant Request, go to step 5</li></ul>	--
3	UUT sends Spectrum Inquiry Request. Validate: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• List of frequencyRange objects sent by UUT are within the CBRS frequency range</li></ul>	PASS
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>availableChannel</i> is an array of <i>availableChannel</i> objects</li><li>• <i>responseCode</i> = 0</li></ul>	--
5	UUT sends Grant Request message. Validate: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>maxEIRP</i> is at or below the limit appropriate for CBSD category as defined by Part 96</li><li>• <i>operationFrequencyRange</i>, F, sent by UUT is a valid range within the CBRS band</li></ul>	PASS
6	SAS Test Harness sends a Grant Response message, including the parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G = a valid grant ID</li><li>• <i>grantExpireTime</i> = UTC time greater than duration of the test</li><li>• <i>responseCode</i> = 0</li></ul>	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul>	PASS



8	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--
9	<p>For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul> <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	PASS
10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify:</p> <ul style="list-style-type: none"><li>• UUT does not transmit at any time prior to completion of the first heartbeat response</li><li>• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F.</li></ul>	PASS

**4.13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DREGISTER)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = <i>T</i> = Current UTC time</li><li>• <i>responseCode</i> = 105 (DREGISTER)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"><li>• UUT shall stop transmission within (<i>T</i> + 60 seconds) of completion of step 3</li></ul>	PASS



## 4.14[WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED\_GRANT)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = current UTC time</li><li>• <i>responseCode</i> = 500 (TERMINATED_GRANT)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"><li>• UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li></ul>	PASS



#### 4.15[WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED\_GRANT) in First Heartbeat Response

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = current UTC time</li><li>• <i>responseCode</i> = 501 (SUSPENDED_GRANT)</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbdsId</i> = C</li><li>• <i>grantId</i> = G</li></ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT does not transmit at any time</li></ul>	PASS

#### 4.16[WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED\_GRANT) in Subsequent Heartbeat Response

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = current UTC time</li><li>• <i>responseCode</i> = 501 (SUSPENDED_GRANT)</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--



#	Test Execution Steps	Results
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <math>cbsdId = C</math></li><li>• <math>grantId = G</math></li><li>• <math>operationState = "GRANTED"</math></li></ul> <p>B. UUT sends a Relinquishment Request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <math>cbdsId = C</math></li><li>• <math>grantId = G</math></li></ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop transmission within <math>(T + 60</math> seconds) of completion of step 3</li></ul>	PASS



## 4.17[WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC\_OP\_PARAM)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i> , and is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = Current UTC Time</li><li>• <i>responseCode</i> = 502 (UNSYNC_OP_PARAM)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	Monitor the SAS-CBSD interface. Verify: <ul style="list-style-type: none"><li>• UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters:<ul style="list-style-type: none"><li>◦ <i>cbdsId</i> = C</li><li>◦ <i>grantId</i> = G</li></ul></li></ul> Monitor the RF output of the UUT. Verify: <ul style="list-style-type: none"><li>• UUT shall stop transmission within (T+60) seconds of completion of step 3.</li></ul>	PASS

**4.18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	PASS
	<ul style="list-style-type: none"><li>• <i>operationState</i> = "GRANTED"</li></ul>	
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3.</p> <p>Verify:</p> <ul style="list-style-type: none"><li>• At any time during the test, UUT shall not transmit on RF interface</li></ul>	PASS

**4.19[WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop all transmission on RF interface within (<i>transmitExpireTime</i> + 60 seconds), using the <i>transmitExpireTime</i> sent in Step 3.</li></ul>	PASS

**4.20[WINNF.FT.C.HBT.11] Successful Grant Renewal in Heartbeat Test Case**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface.</li><li>• Grant has the following parameters at the start of the test:<ul style="list-style-type: none"><li>◦ <i>grantExpireTime</i> = UTC time equal to time at start of test + 300 seconds = T<sub>grant_expire</sub></li><li>◦ <i>transmitExpireTime</i> = UTC time equal to time at start of test + 200 seconds</li><li>◦ <i>heartbeatInterval</i> = 60 seconds</li></ul></li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>If Heartbeat Request message contains grantRenew = TRUE, go to Step 6, else go to Step 3.</p>	--
3	<p>Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
4	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC + 200 seconds</li><li>• <i>grantExpireTime</i> = same as Step 1</li><li>• <i>responseCode</i> = 0</li></ul>	--
5	Go to Step 2	--



#	Test Execution Steps	Results
6	Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	PASS
	<ul style="list-style-type: none"><li>• <i>operationState</i> = "AUTHORIZED"</li><li>• <i>grantRenew</i> = TRUE</li></ul>	
7	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>grantExpireTime</i> = UTC time set far in the future</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--
8	Continue to respond to any subsequentHeartbeat Request from CBSD with Heartbeat Response with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = same as Step 7</li><li>• <i>responseCode</i> = 0</li></ul>	--
9	Monitor RF transmission of UUT from start of test until <i>Tgrant_expire</i> + 60 seconds and ensure UUT continues to transmit throughout the time period.	PASS



#### 4.21 [WINNF.FT.C.RLQ.1] Successful Relinquishment

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	PASS
3	<p>SAS Test Harness shall approve the request with a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none"><li>– <i>cbsdId</i> = C</li><li>– <i>grantId</i> = G</li><li>– <i>responseCode</i> = 0</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode</i>=0) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS

**4.22 [WINNF.FT.C.RLQ.3] Unsuccessful Relinquishment, responseCode=102**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul>	--
	Invoke trigger to Relinquish UUT Grant from the SAS Test Harness	
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	--
3	<p>SAS Test Harness shall send a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• No <i>grantId</i></li><li>• <i>responseCode</i> = R</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i>=0) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS

**4.23 [WINNF.FT.C.RLQ.5] Unsuccessful Relinquishment, responseCode=103**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul>	--
	Invoke trigger to Relinquish UUT Grant from the SAS Test Harness	
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	--
3	<p>SAS Test Harness shall send a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• No <i>grantId</i></li><li>• <i>responseCode</i> = R</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i>=103) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS

#### 4.24 [WINNF.FT.C.DRG.1] Successful Deregistration

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> = C.	PASS
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>responseCode</i> = 0</li></ul>	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ol style="list-style-type: none"><li>A. UUT sending a Registration Request message, as this is not mandatory</li><li>B. UUT sending a Deregistration Request message</li></ol></li></ul>	PASS

**4.25 [WINNF.FT.C.DRG.3] Deregistration responseCode=102**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> = C	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"><li>• No <i>cbsdId</i></li><li>• <i>responseCode</i> = 102</li></ul>	--
5	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ol style="list-style-type: none"><li>UUT sending a Registration Request message, as this is not mandatory</li><li>UUT sending a Deregistration Request message</li></ol></li></ul>	PASS

**4.26 [WINNF.FT.C.DRG.5] Deregistration responseCode=103**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> = C	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"><li>• No <i>cbsdId</i></li><li>• <i>responseCode</i> = 103</li></ul>	--
5	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ol style="list-style-type: none"><li>UUT sending a Registration Request message, as this is not mandatory</li><li>UUT sending a Deregistration Request message</li></ol></li></ul>	PASS

**4.27[WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness**

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedure</li><li>The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.</li><li>Configure the SAS Test Harness to accept the security procedure and establish the connection</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that Mutual authentication happens between UUT and the SAS Test Harness.</li><li>Make sure that UUT uses TLS v1.2</li><li>Make sure that cipher suites from one of the following is selected,<ul style="list-style-type: none"><li>TLS_RSA_WITH_AES_128_GCM_SHA256</li><li>TLS_RSA_WITH_AES_256_GCM_SHA384</li><li>TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256</li><li>TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384</li><li>TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256</li></ul></li></ul>	PASS
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"><li>UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with <i>responseCode</i> = 0 and <i>cbsdId</i>.</li></ul>	PASS
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

**4.28[WINNF.FT.C.SCS.2] TLS failure due to revoked certificate**

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

**4.29[WINNF.FT.C.SCS.3] TLS failure due to expired server certificate**

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

#### 4.30[WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

**4.31[WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted**

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>• UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>• Make sure that UUT uses TLS v1.2 for security establishment.</li><li>• Make sure UUT selects the correct cipher suite.</li><li>• UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.32[WINNF.PT.C.HBT] UUT RF Transmit Power Measurement


#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li><li>• UUT has registered with the SAS, with CBSD ID = C</li><li>• UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case</li></ul> <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"><li>• UUT sends Heartbeat Request, including:<ul style="list-style-type: none"><li>○ cbsdId = C</li><li>○ grantId = G</li></ul></li><li>• SAS Test Harness responds with Heartbeat Response, including:<ul style="list-style-type: none"><li>○ cbsdId = C</li><li>○ grantId = G</li><li>○ transmitExpireTime = current UTC time + 200 seconds</li><li>○ responseCode = 0</li></ul></li></ul>	--




#	Test Execution Steps	Results
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	PASS

## 5. Result of Time test for getting Grant

### 5.1 1 second within any 10-second period

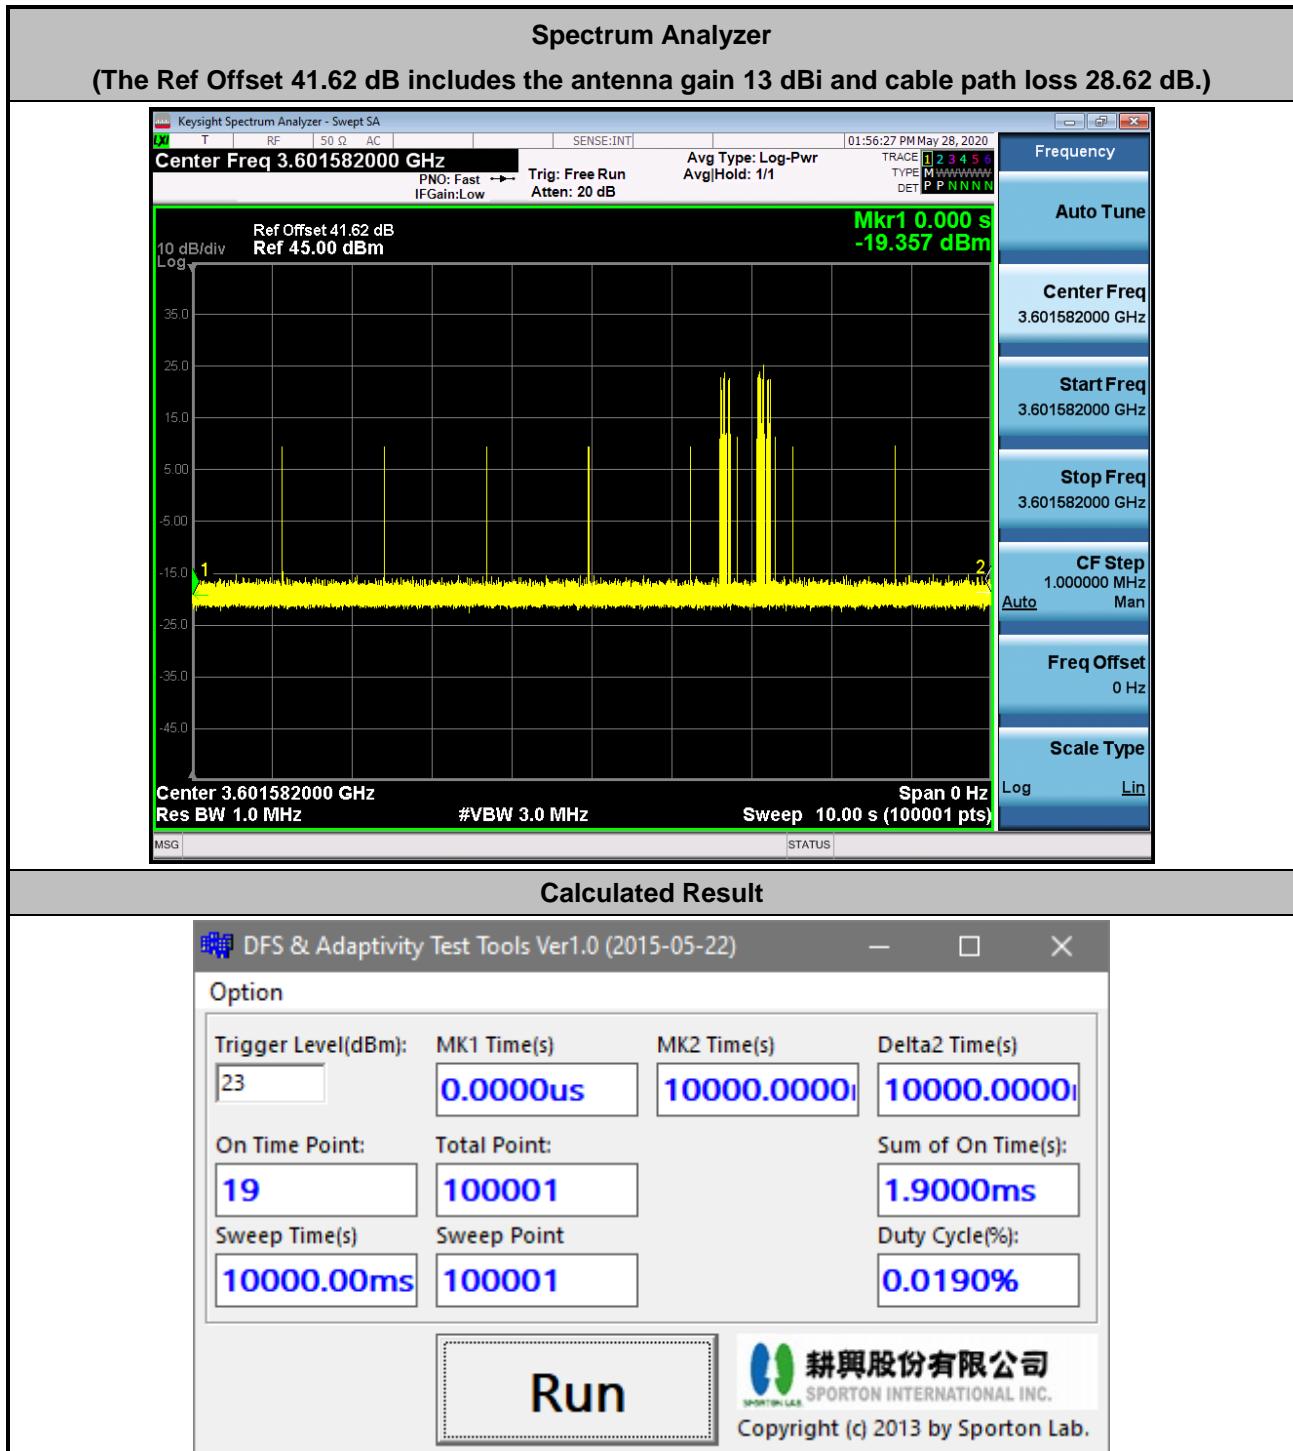

## 5.2 10 seconds within any 300-second period

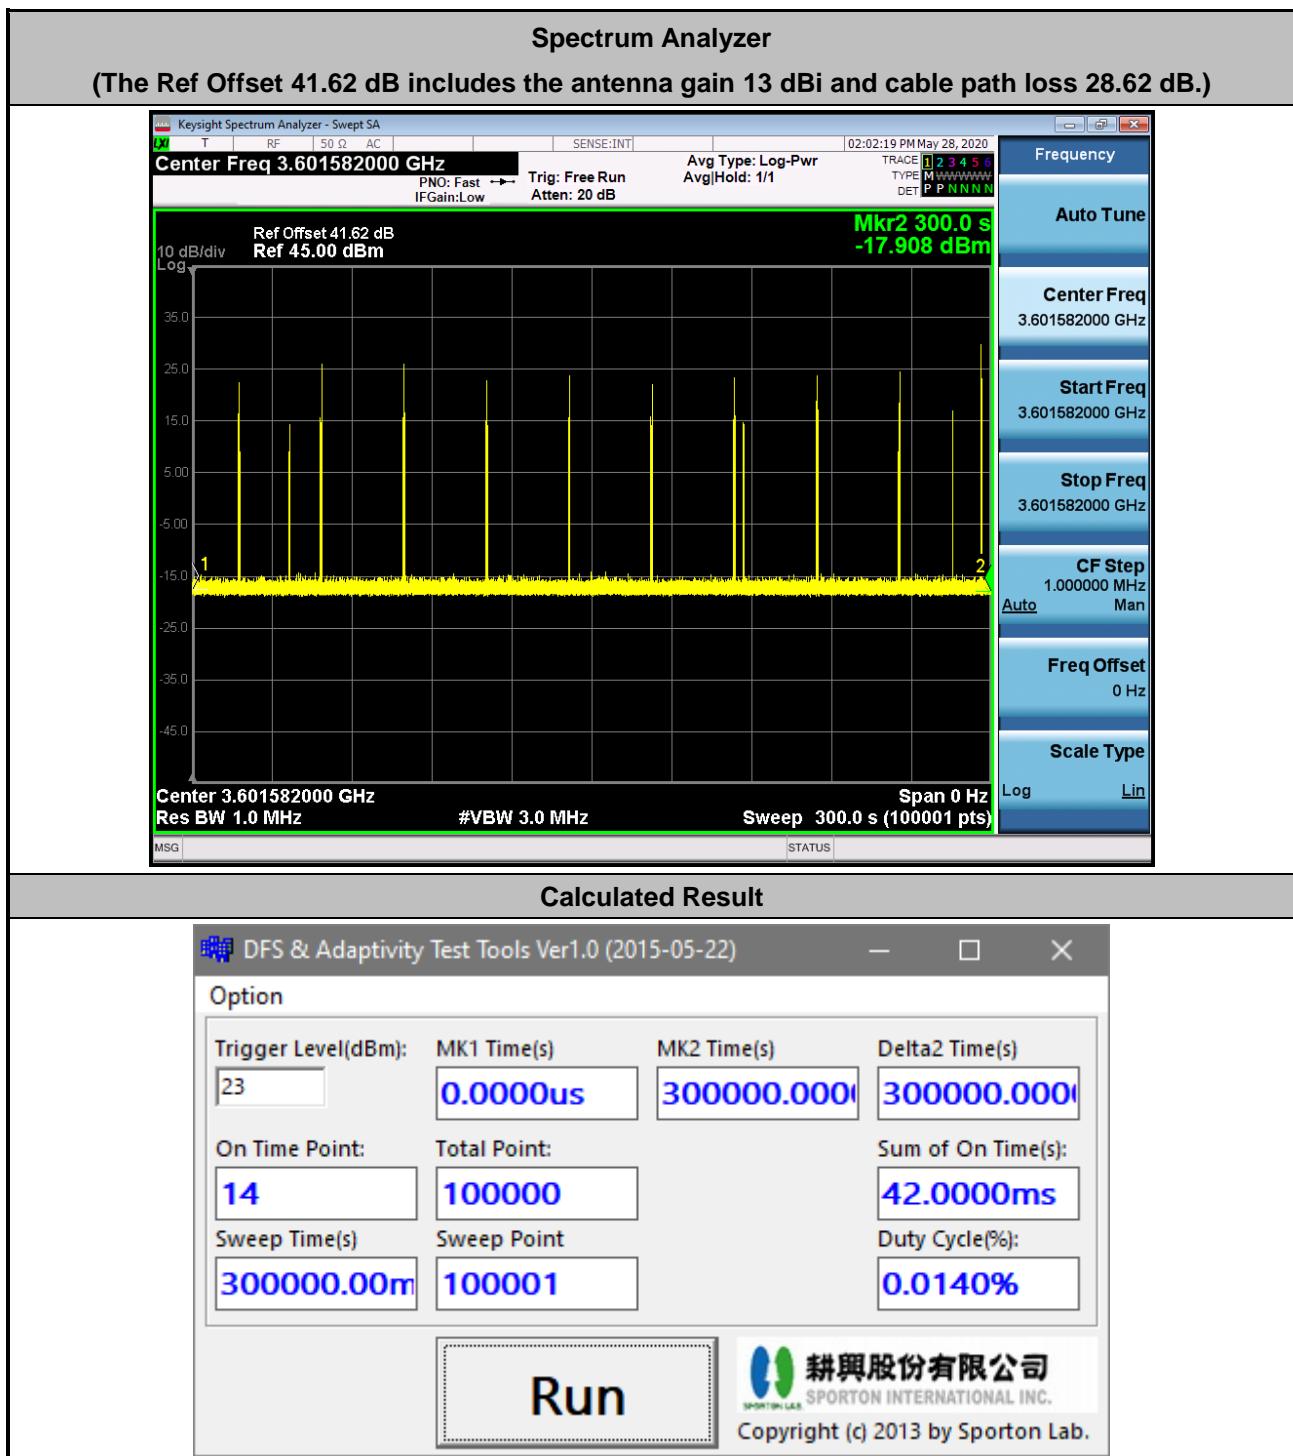

The sum of On Time (aggregated time from marker 1 to 2): 42ms < 10s, Pass.

### 5.3 20 seconds within any 3600-second period

#### Spectrum Analyzer

(The Ref Offset 41.62 dB includes the antenna gain 13 dBi and cable path loss 28.62 dB.)



#### Calculated Result



The sum of On Time (aggregated time from marker 1 to 2): 12.42s < 20s, Pass.


## 6. UUT register with the SAS irrespective of power levels

### 6.1 Test Procedure

1. Ensure the UUT power be below 23 dBm EIRP.
2. Make SAS test harness to grant UUT power level above 23 dBm EIRP.
3. Enable UUT, then check UUT power will follow the power limit that SAS test harness authorized.

### 6.2 Result

The UUT will register with the SAS irrespective of power levels at which the device is set to operate – even below 23 dBm.

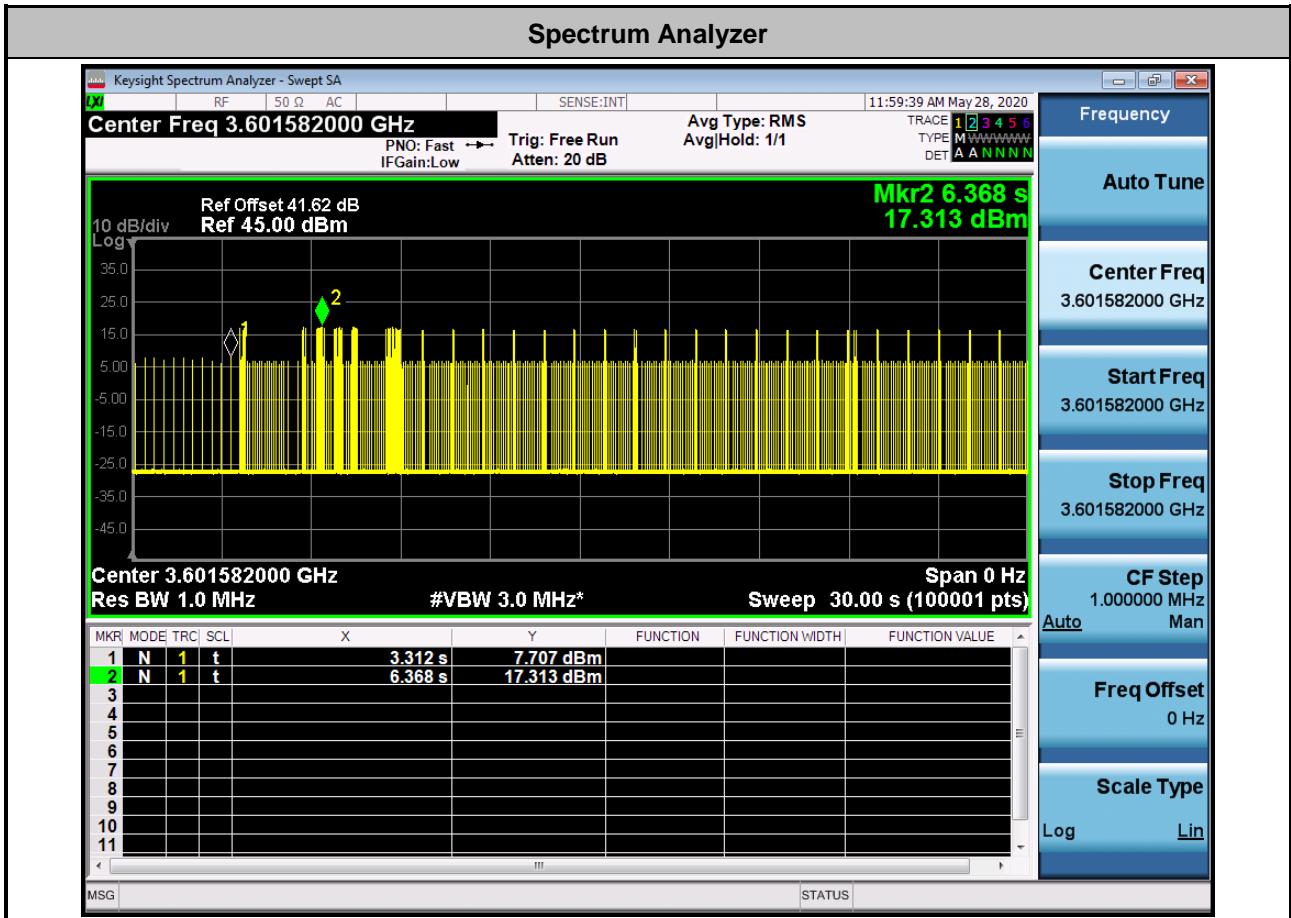

Note : The Ref Offset 41.62 dB includes the antenna gain 13 dBi and cable path loss 28.62 dB.

Marker 1 : Signal power before UUT is authorized by the SAS,

Marker 2 : Signal power after UUT is authorized by the SAS.





## Appendix B. RF measurement plots


Report Clause 4.32 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement


Center Frequency [MHz]	Bandwidth [MHz]	Granted maxEIRP [dBm/MHz]	Conducted PSD [dBm/MHz]	Antenna Gain [dBi]	UUT MaxEIRP [dBm/MHz]
3610	20	23	9.098	13	22.098
		25	11.05		24.05
		27	12.912		25.912
		29	14.796		27.796
		31	16.973		29.973
		33	18.539		31.539
		35	19.859		32.859
		37	21.613		34.613


Note : The Spectrum Analyzer Ref Offset **41.62** dB includes the antenna gain **13** dBi and cable path loss **28.62** dB.

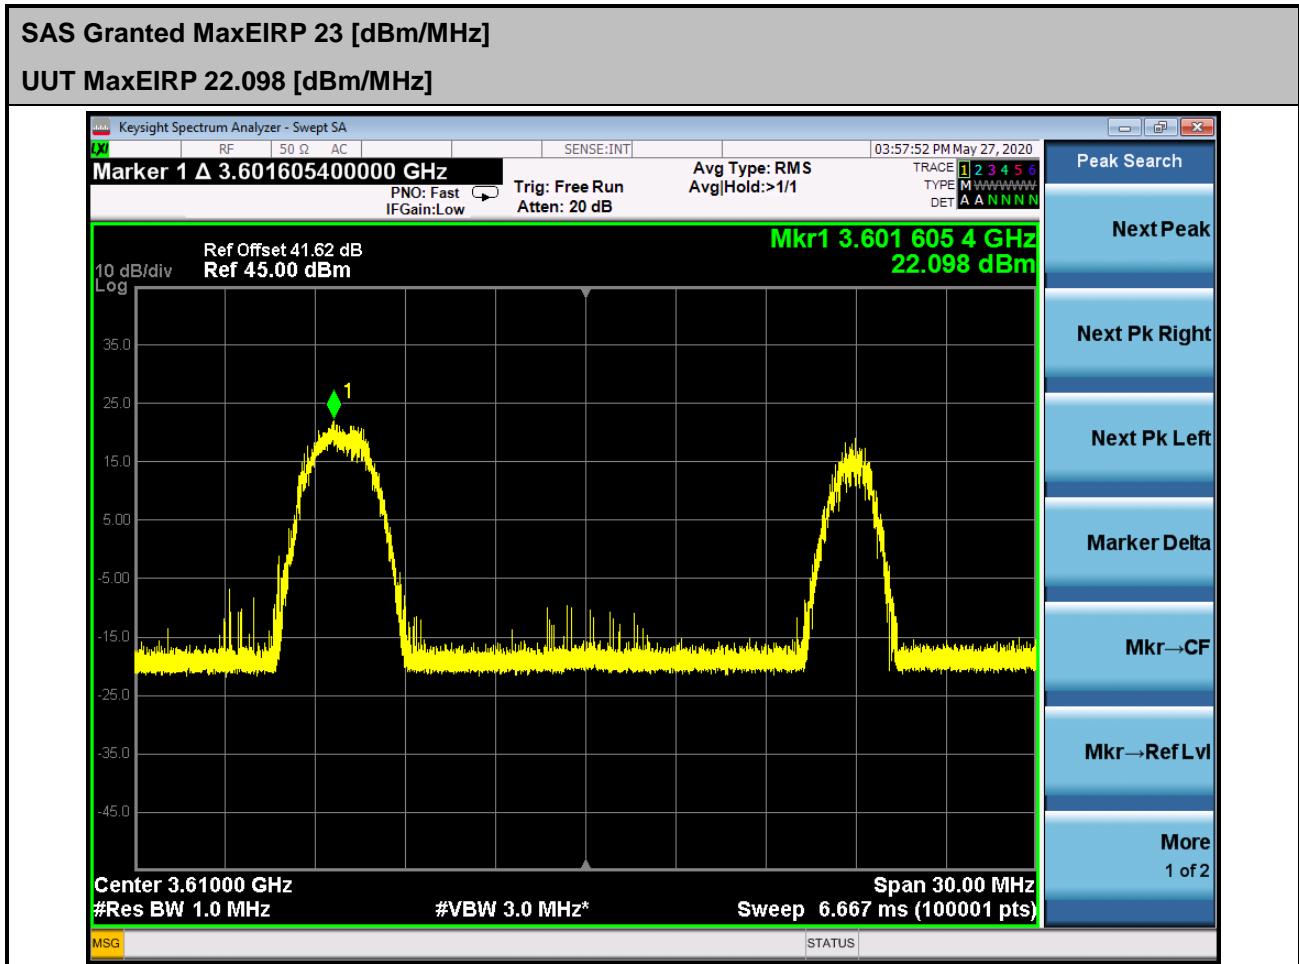


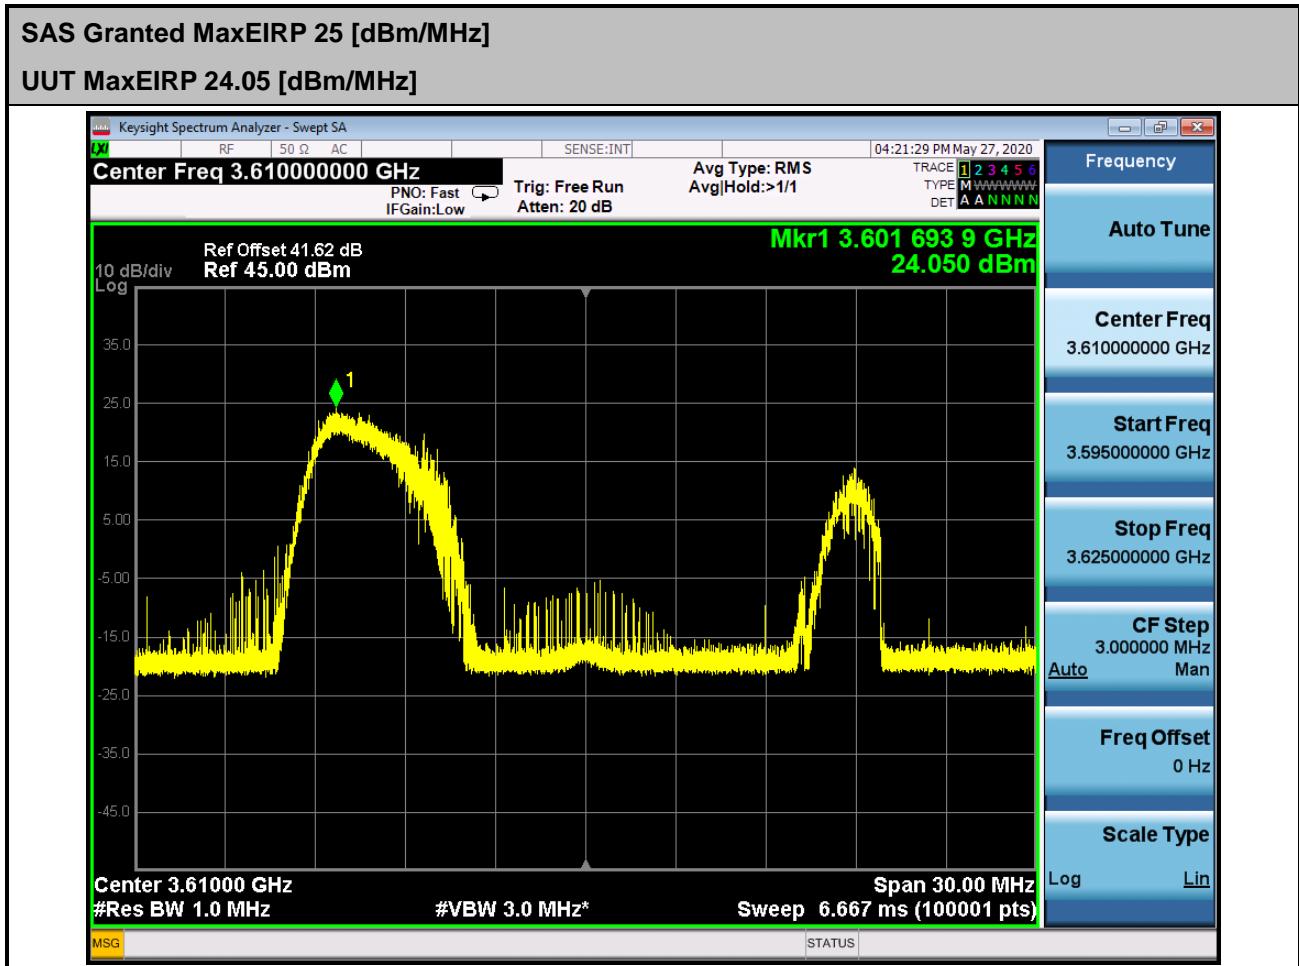


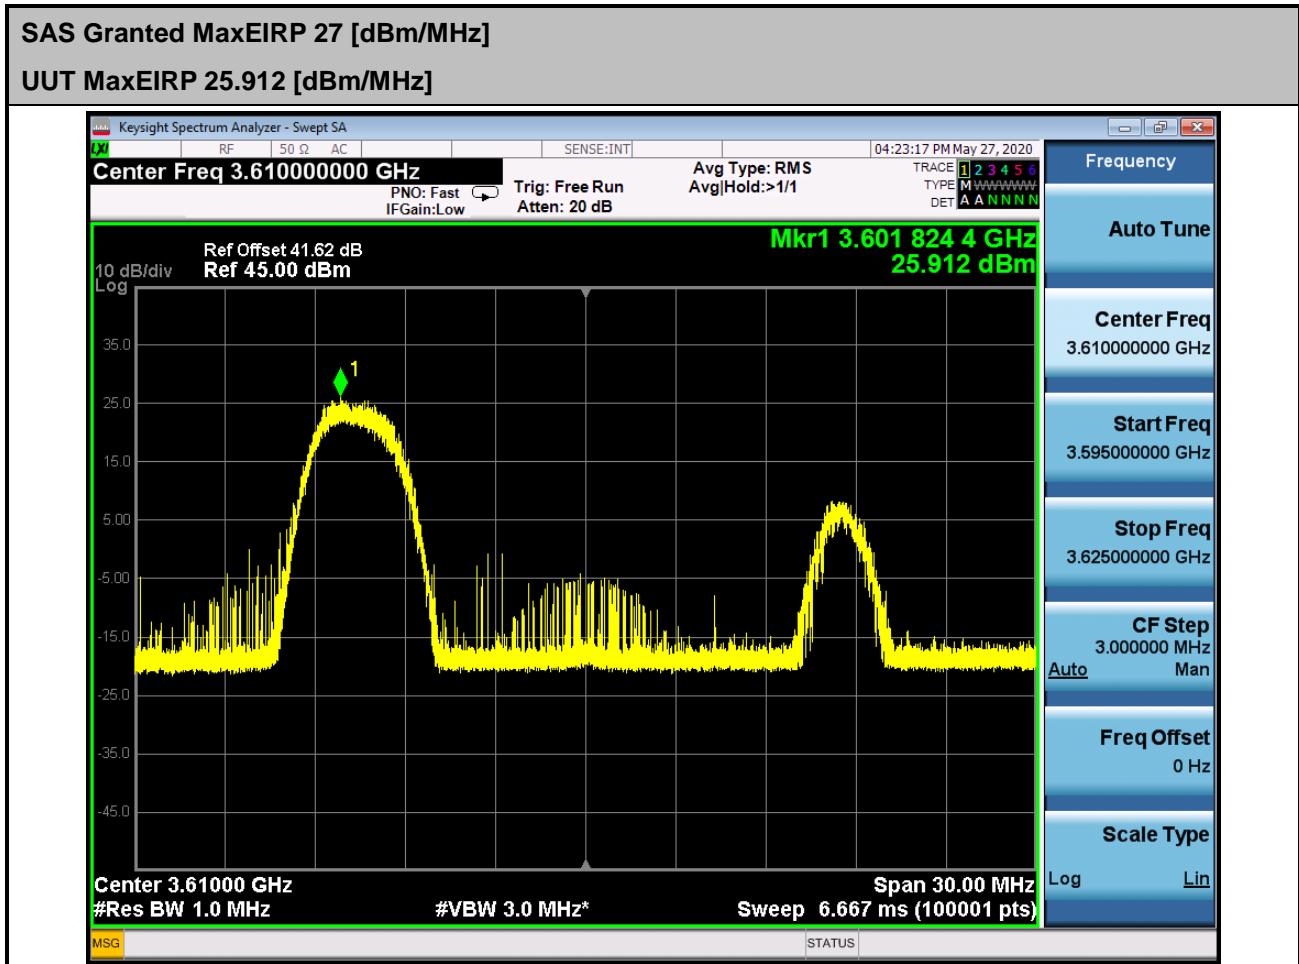


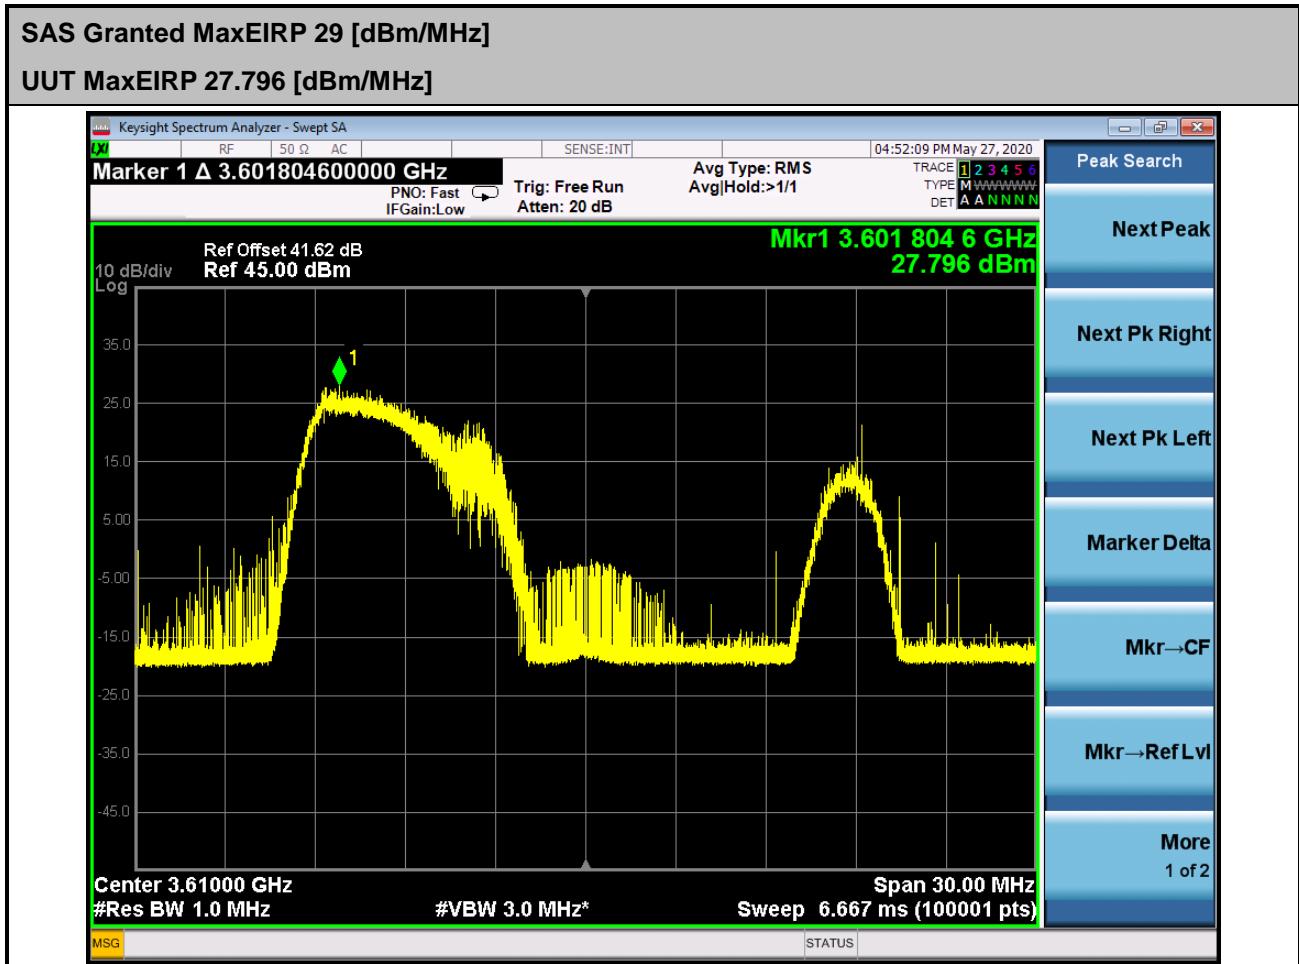

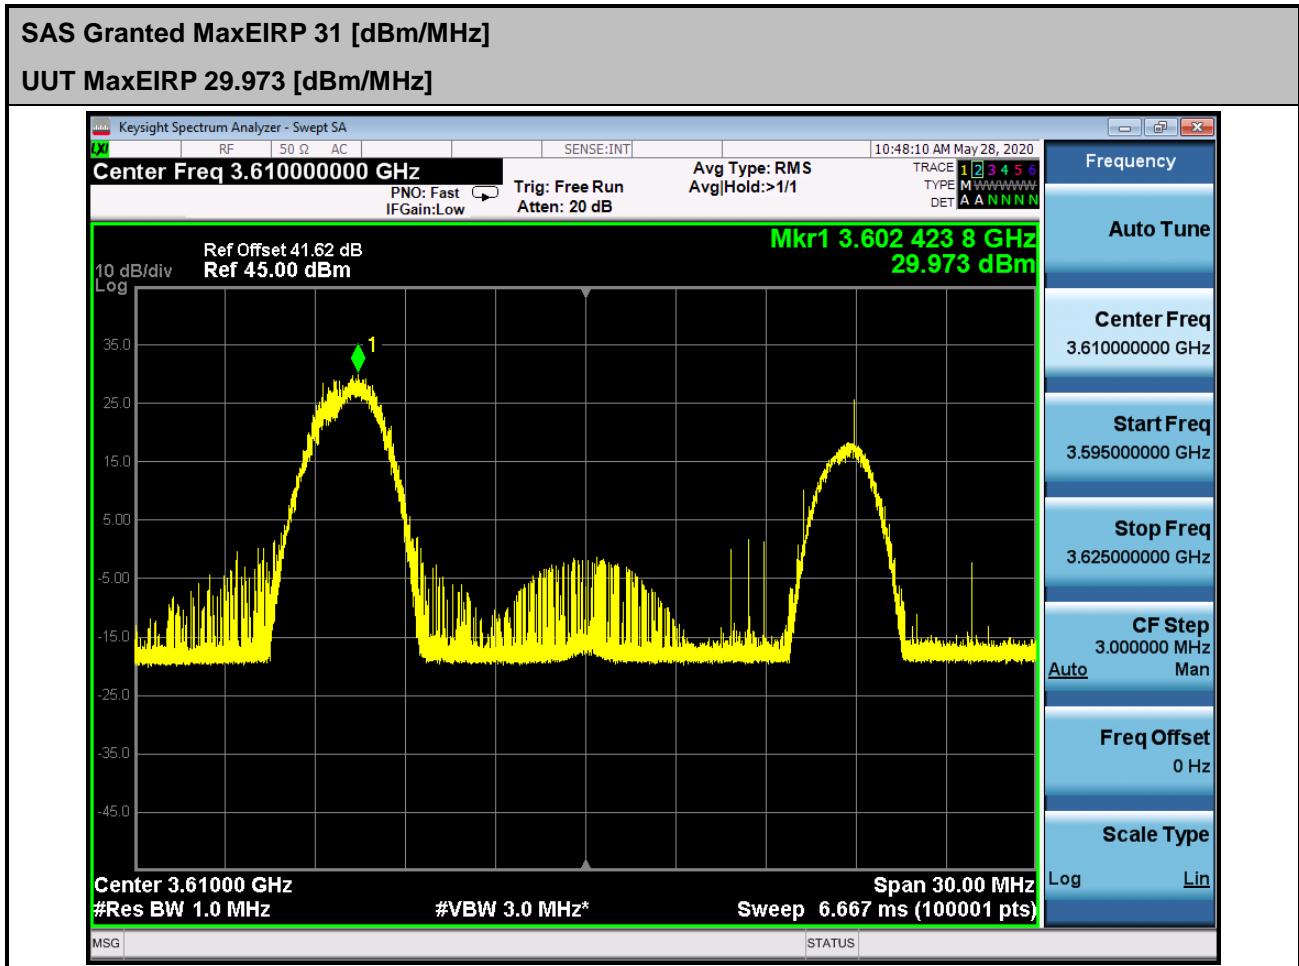

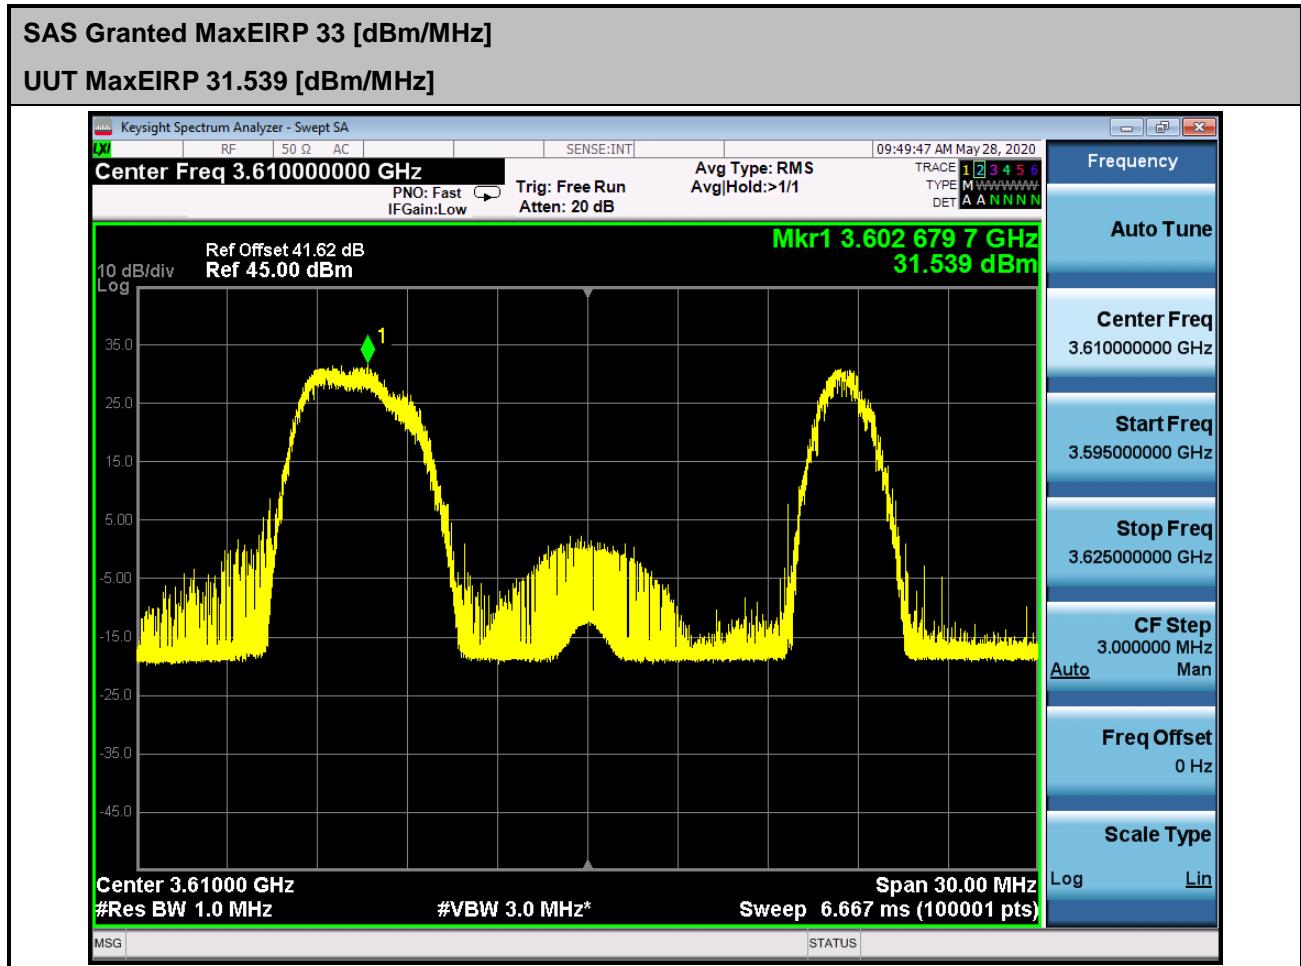

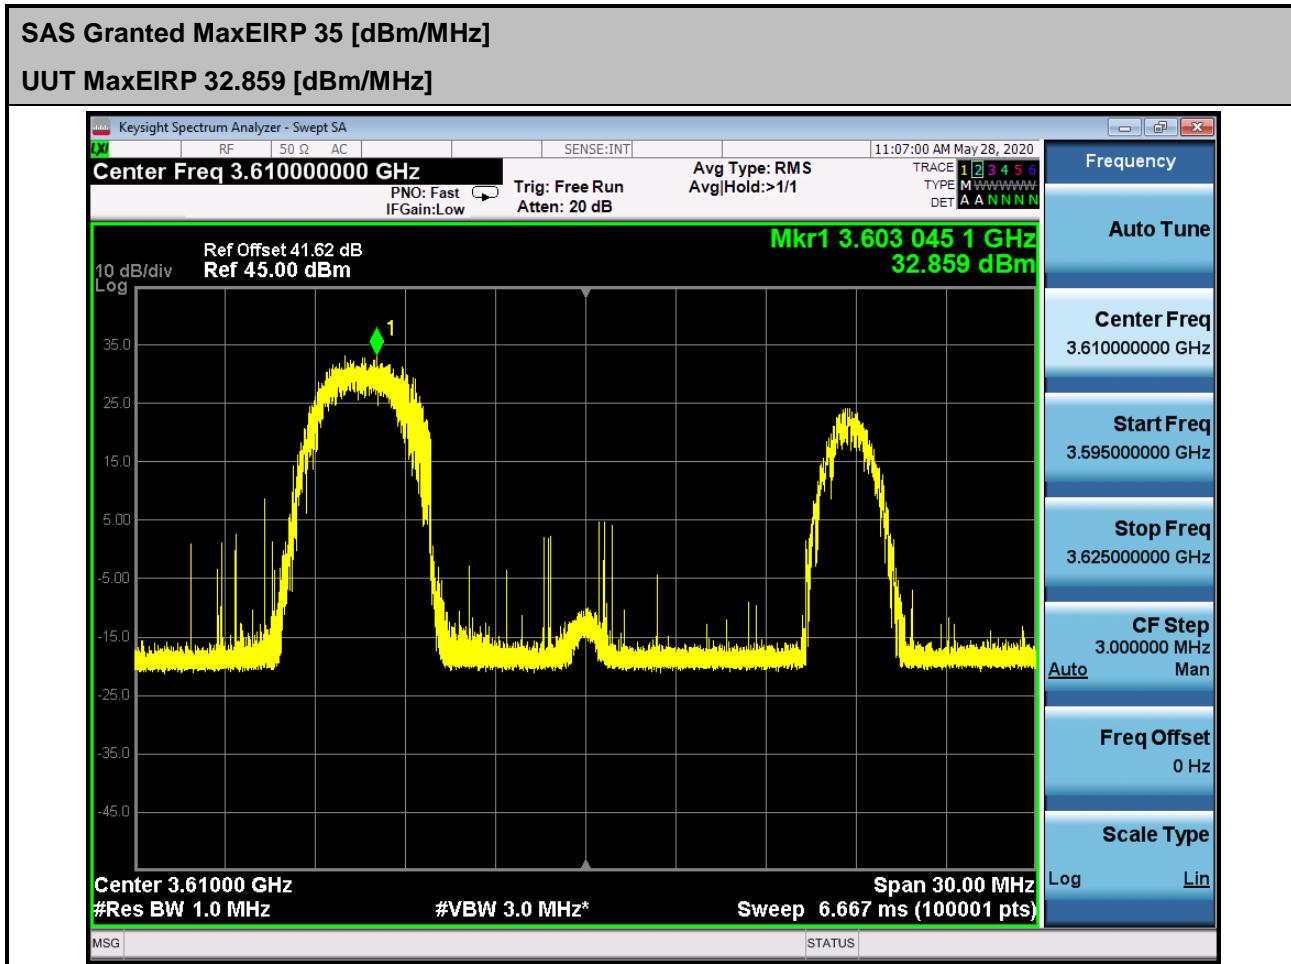

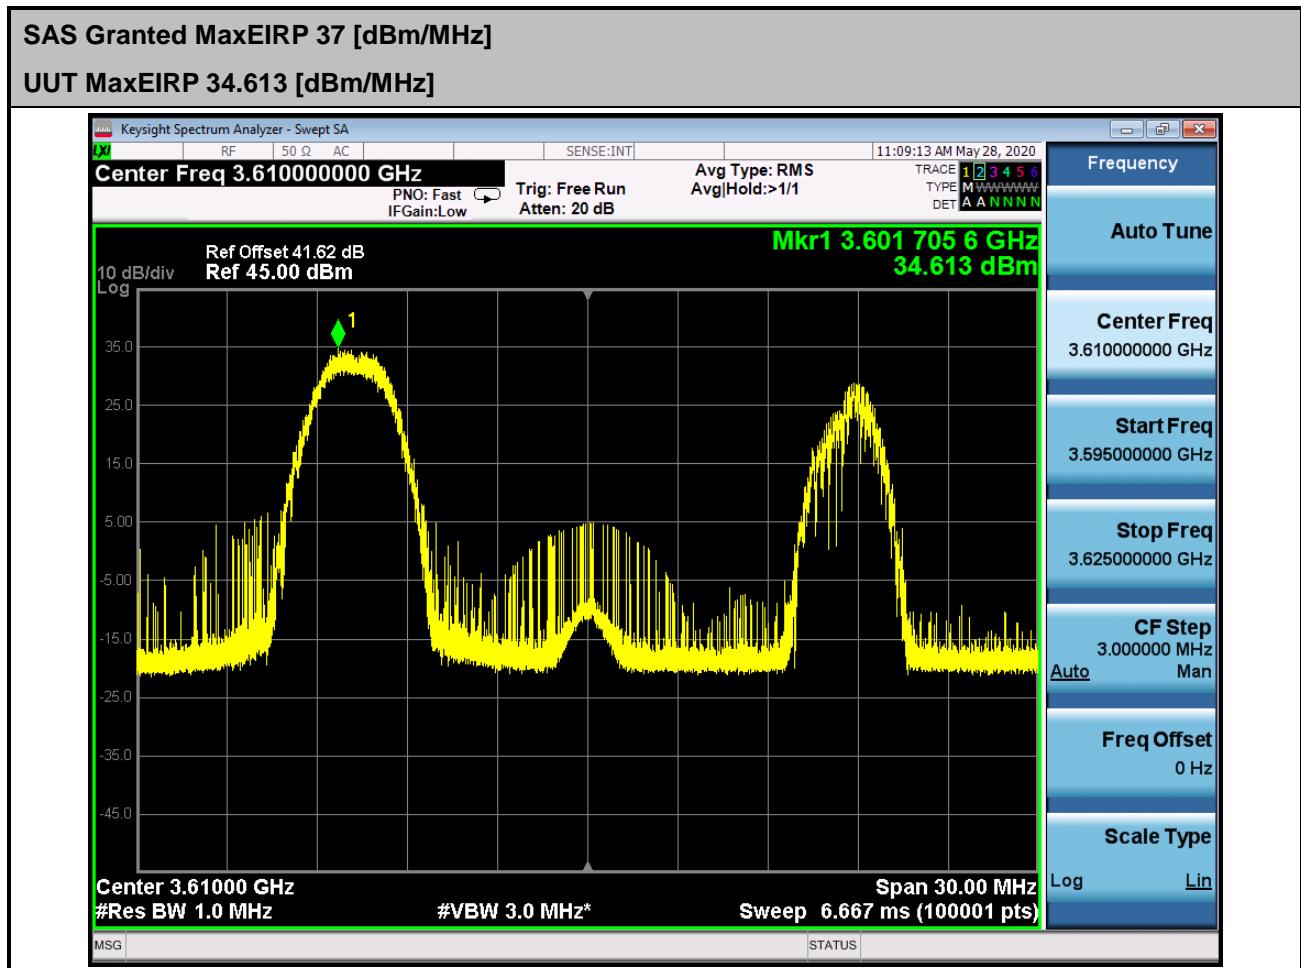

—————THE END—————