



TEST REPORT

Test Report No. : UL-RPT-RP-13697467-1416-FCC

Applicant : Boxine GmbH

Model No. : 03-xxxx (colour coding)

FCC ID : 2AU47-00002

Technology : Intermodulations WLAN5 GHz (802.11 a, n) & RFID – 13.56 MHz

Test Standard(s) : FCC Parts 15.205,15.209(a),15.225(d) & 15.407(b)

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**

Prepared by: Usta, Sercan
Title: Laboratory Engineer
Date: 09 July 2021

Approved by: Ajit, Phadtare
Title: Lead Test Engineer
Date: 09 July 2021



Deutsche
Akkreditierungsstelle
D-PL-19381-02-00

This laboratory is accredited by DAkkS.
The tests reported herein have been performed in
accordance with its' terms of accreditation.

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
1.1. Applicant Information	4
1.2. Manufacturer Information	4
2. Summary of Testing.....	5
2.1. General Information	5
Applied Standards	5
Location	5
Date information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	9
A. Support Equipment (In-house)	9
B. Support Equipment (Manufacturer supplied)	9
4. Operation and Monitoring of the EUT during Testing	10
4.1. Operating Modes	10
4.2. Configuration and Peripherals	10
5. Measurements, Examinations and Derived Results	11
5.1. General Comments	11
5.2. Test Results	12
5.2.1. Transmitter Radiated Emissions	12
6. Measurement Uncertainty	22
7. Used equipment.....	23
8. Report Revision History	24

1. Customer Information

1.1.Applicant Information

Company Name:	Boxine GmbH
Company Address:	Grafenberger Allee 120, 40237 Düsseldorf, GERMANY
Company Phone No.:	+49 211 73710100
Company E-Mail:	impressum@tonies.com
Contact Person:	Andrej Henkel
Contact E-Mail Address:	andrei.henkel@boxine.de
Contact Phone No.:	+49 211 542540-49

1.2.Manufacturer Information

Company Name:	Boxine GmbH
Company Address:	Grafenberger Allee 120, 40237 Düsseldorf, GERMANY
Company Phone No.:	+49 211 73710100
Company E-Mail:	impressum@tonies.com
Contact Person:	Andrej Henkel
Contact E-Mail Address:	andrei.henkel@boxine.de
Contact Phone No.:	+49 211 542540-49

2. Summary of Testing

2.1. General Information

Applied Standards

Specification Reference:	47CFR15.407
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Section 15.407
Specification Reference:	47CFR15.225
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.225
Specification Reference:	47CFR15.205 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.205 and 15.209

Location

Location of Testing:	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
Test Firm Registration:	399704

Date information

Order Date:	29 January 2021
EUT arrived:	06 April 2021
Test Dates:	21 May 2021
EUT returned:	-/-

2.2. Summary of Test Results

Clause	Measurement	Complied	Did not comply	Not performed	Not applicable
Part 15.407(b),15.225(d), 15.209(a)(c) & 15.205	Transmitter Radiated Emissions ⁽¹⁾	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note(s):

1. Intermodulation tests of WLAN5 GHz (802.11 a, n) & RFID – 13.56 MHz.

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Title:	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Toniebox Starterset
Model Name or Number:	03-xxxx (colour coding)
Serial Number:	EMV 5 (Radiated Test Sample)
MAC ID:	90-E2-02-20-70-35 (TB 1.5 EMV US 1)
Hardware Version Number:	1.5
Software Version Number:	4.0.0
FCC ID:	2AU47-00002

Brand Name:	Boxine
Model Name or Number:	Tonie Figure
Serial Number:	Not stated
Hardware Version Number:	Not Stated
Firmware Version Number:	Not Stated
Additional Details:	Passive RFID-13.56 MHz Key

Brand Name:	Tonies
Model Name or Number:	DYS619-090150W-2
Serial Number:	DYS619-090150-16917A
Hardware Version Number:	1.0
Additional Details:	AC-DC Adapter- Switching Mode Power Supply 100-240 V AC / 0.5 A / 50Hz to 9 V DC / 1.5 A

3.2. Description of EUT

The equipment under test was a Toniebox Starterset consists of the Toniebox itself, a power supply including docking station DYS 619 and Tonie Lauscher (headset). Toniebox Starterset is an Audio system for children. Tonie figures to be purchased separately are placed on the Toniebox (TB).

An RFID receiver in the Toniebox reads the product ID from the figure (passive RFID chip in the Tonie figure). Via the WLAN module in the TB, the audio content is downloaded from the Boxine-Tonie cloud to the TB's internal memory (flash drive) via the Internet and played back via the TB speaker or Headphone.

This device supports WLAN 2.4 GHz 802.11 b-, g-, n-modes, operations in 2.4 – 2.4835 GHz ISM & WLAN 5GHz a-, n-modes, operations in U-NII-1 5 GHz bands.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11 a,n) & RFID -13.56MHz	
Type of Unit:	Transceiver	
Power Supply Type 1:	AC-DC Adapter- Switching Mode Power Supply	
Power Supply Requirement(s):	100-240 V AC / 0.5 A / 50 Hz to 9 V DC / 1.5 A	
Power Supply Type 2:	Internal Rechargeable Battery via AC /DC Adapter	
Power Supply Requirement(s):	3.6 V DC / 0.1 A	
Temperature Requirement(s):	T_{nom}	20°C
	T_{min}	5°C
	T_{max}	35°C

WLAN 5 GHz

Type of Radio Device:	Transceiver		
Supported Data Rate(s):	802.11a	54 Mbps	
	802.11n	MCS7 (65 Mbps)	
Supported Modulation Type(s):	802.11a	64QAM	
	802.11n	64QAM	
Worst Case Data Rate(s):	802.11a	54 Mbps ^(Note 1)	
Worst Case Modulation Type(s):	802.11a	64QAM ^(Note 1)	
Nominal Channel Bandwidth:	20 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz [U-NII-1 Band] ^(Note 1)		
Transmit Frequency Range:	5180 MHz to 5240 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Top	48	5240 ^(Note 2)

RFID – 13.56 MHz

Category of Equipment:	Short Range Device		
Transmit Frequency Range:	13.56 MHz		
Channel Spacing:	Single channel device		

Intermodulation Transmit Channels Tested:	RFID 13.56 MHz	WLAN 5 GHz 802.11a	
	Channel Frequency (MHz)	Channel Number	Channel Frequency (MHz)
	13.56	48	5240 ^(Note 2)
(Note 1)			
As per applicant's declaration the EUT implements 802.11a mode 54 Mbps and 802.11n mode MCS7 operations only in 5150 MHz to 5250 MHz [U-NII-1 Band].			
Multiple supported modulation schemes, nominal channel bandwidths were initially investigated to determine the above mentioned worst case data rates (terms highest output power, highest output power spectral density).			
(Note 2)			
<ul style="list-style-type: none"> • In accordance with FCC Part 15.407 & ANSI C63.10-2013 Section 5.6, the certification tests of the WLAN 5 GHz (802.11 a, n) were performed on 3 channels (Bottom: 5180 MHz Middle :5220 MHz Top: 5240 MHz). • For further details refer Report No: UL-RPT-RP-13697467-216-FCC UL International Germany GmbH • The results from the Top channel: 5240 MHz found to be worst case channel in terms highest output power and highest output power spectral density; therefore in accordance with ANSI C63.10-2013 Section 5.6.2 intermodulation radiated emissions have been performed only with EUT configured to : WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz 			

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

A. Support Equipment (In-house)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	WLAN Router Simulator	Rohde & Schwarz	CMW500	CMW500 166992
2	Horn Antenna	Schaffer	BHA9118	21220
3	RF Cable (DC-18 GHz)	N/A	N/A	N/A

B. Support Equipment (Manufacturer supplied)

Item	Description	Brand Name	Model Name or Number	Serial Number
-/-	-/-	-/-	-/-	-/-

4. Operation and Monitoring of the EUT during Testing

4.1.Operating Modes

The EUT was tested in the following operating mode(s):

- Continuous simultaneous transmissions of WLAN 5 GHz & RFID 13.56 MHz
 - WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz

4.2.Configuration and Peripherals

The EUT was tested in the following configuration(s):

EUT Power Supply:

- The EUT can be powered via either with AC/DC power adapter or rechargeable internal battery.
- The results from AC/DC power adapter found to be worst case (tends to produce maximum emissions); therefore, intermodulation radiated emissions have been performed only with EUT powered via AC/DC power adapter 120 VAC/60 Hz.

Test Mode Activations:

- Rohde & Schwarz CMW500 was used in WLAN Router simulator mode to create a WLAN network. The was EUT connected to this network.
- The WLAN 5 GHz transmitter test modes were configured to maximum supported power settings (PWR 0).
- For RFID 13.56 MHz test mode, the Tonie Figure was placed on the EUT; which then reads the product ID from the Tonie figure & activates the RFID communication.

Radiated Measurements:

- In accordance with ANSI C63.10 section 5.10.7, the EUT allows for the connection of external accessories, including external electrical control signals. Hence emission tests shall be performed with the EUT and accessories configured in a manner that tends to produce maximum emissions; therefore all radiated tests were with EUT powered via AC/DC power adapter 120 VAC / 60 Hz.
- Before starting final radiated spurious emission measurements “worst case verification” with the EUT in Standing-position & Laying-position was performed by Lab.
- The EUT in Laying-position was found to be the worst case therefore this report includes relevant results.
- The radiated measurements below 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the loop antenna height was set to 80 cm.
- The radiated measurements above 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the antenna height varies from 1 to 4 m over the measurement frequency range.
- R&S® EMC32 V10.60.10 Software was used for the Radiated spurious emission measurements.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Radiated Emissions

Test Summary:

Test Engineer:	Sercan Usta	Test Date:	21 May 2021
Test Sample Serial Number:	EMV 5 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

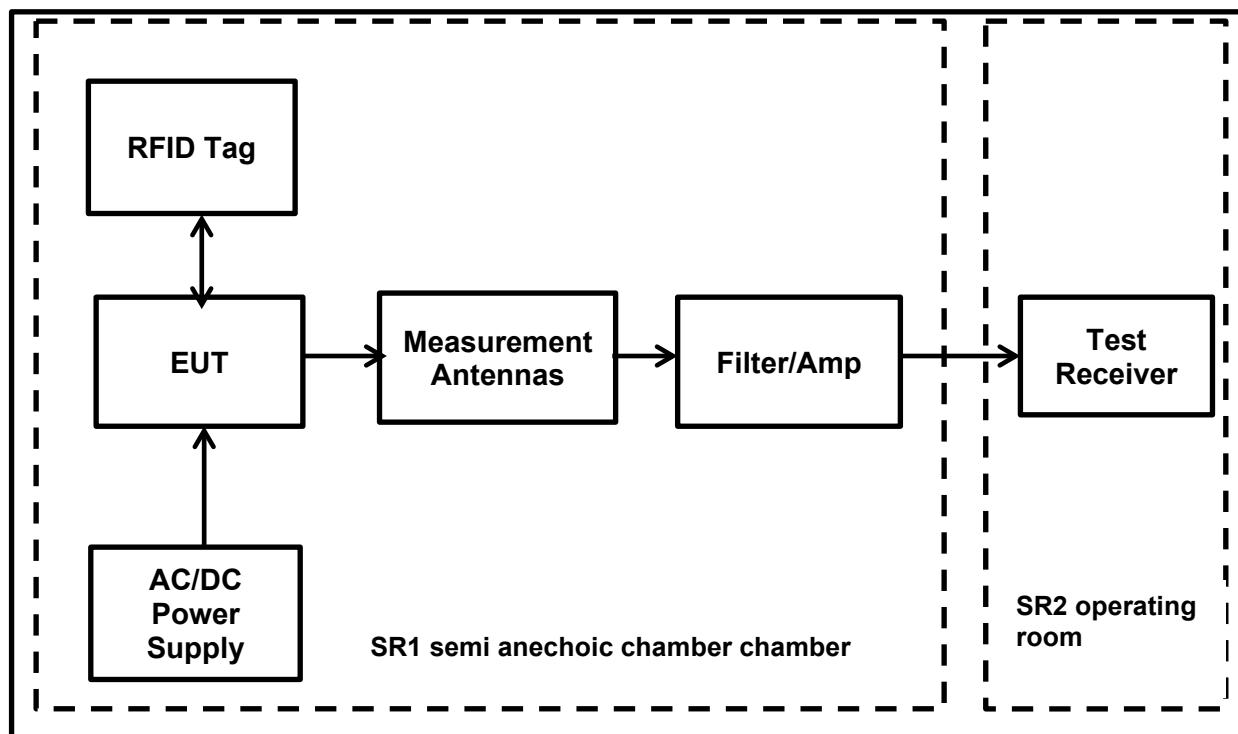
FCC Reference:	Parts 15.407(b)(1),(7),(8), (9), 15.225(d), 15.209(a) & 15.205
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4. & ANSI C63.10:2013 Sections 6.3 and 6.4
Frequency Range	9 kHz to 30 MHz

Environmental Conditions:

Temperature (°C):	23.8
Relative Humidity (%):	40.3

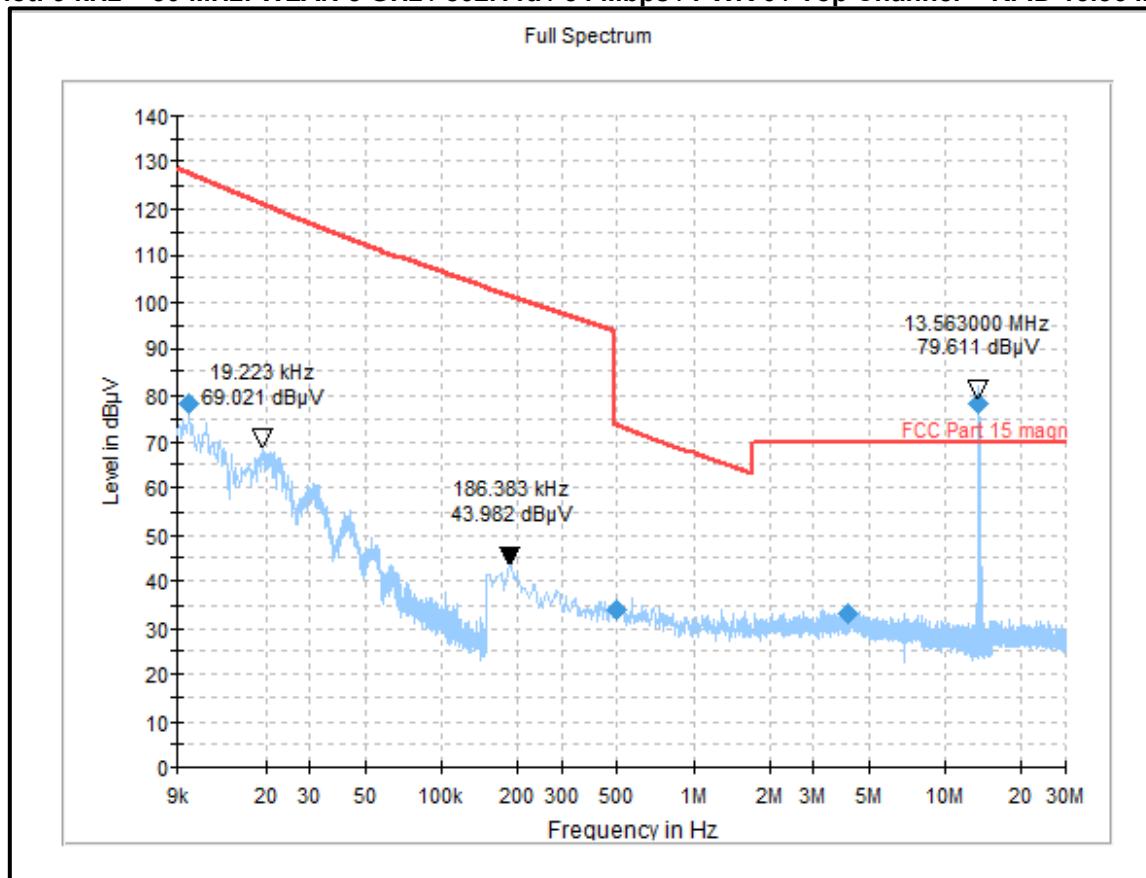
Note(s):

1. In accordance with FCC KDB 414788 D01 Radiated Test Site & ANSI C63.10 clause 5.2 an alternative test site that can demonstrate equivalence to a open area test site may be used. Therefore, the measurement was performed in a Semi Anechoic Chamber. (The OATS / SAC comparison data is available upon request).
2. The limits are specified at a test distances of 30 and 300 metres. However, as specified in FCC Section 15.31 (f)(2) & ANSI C63.10 clause 6.4.3, measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clauses 6.4.4, specifically sub-clause 6.4.4.1 which specifies that the measured level shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade.
3. Therefore, the limit values are extrapolated to a measurement distance of 3 m.
 - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m by adding 80 dB at 40 dB /decade.
 - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB at 40 dB /decade.
4. Measurements below 30 MHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. The measurement loop antenna height was 1 m.
5. Pre-scans were performed and markers placed on the highest measured levels. The test receiver was set to:
 - Frequency range: 9 kHz-150kHz : RBW: 300 Hz /VBW: 1 kHz
 - Frequency range: 150 kHz – 30 MHz: RBW: 10 kHz /VBW: 30 kHz
 - Detector: Max-Peak detector
 - Trace Mode: Max Hold
6. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
7. All other emissions shown on the pre-scans were investigated and found to be > 20 dB below the applicable limits.
8. The emissions shown at frequencies approximately 13.56 MHz on the 9 kHz to 30 MHz plot are the EUT's RFID 13.56 MHz fundamental for the tested channel.

Transmitter Radiated Emissions (continued)**Test Setup:**

Transmitter Radiated Emissions (continued)**Results: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz**

Frequency (MHz)	Loop Antenna Orientation	MaxPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
0.01	0° to EUT	78.01	127.38	49.37	Complied
0.49	0° to EUT	33.79	73.66	39.87	Complied
4.09	0° to EUT	33.24	70.00	36.76	Complied

Plot: 9 kHz – 30 MHz: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz

*Note: This plot is a pre-scan and for indication purposes only.
For final measurements, see accompanying table.*

Result: Pass

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	21 May 2021
Test Sample Serial Number:	EMV 5 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

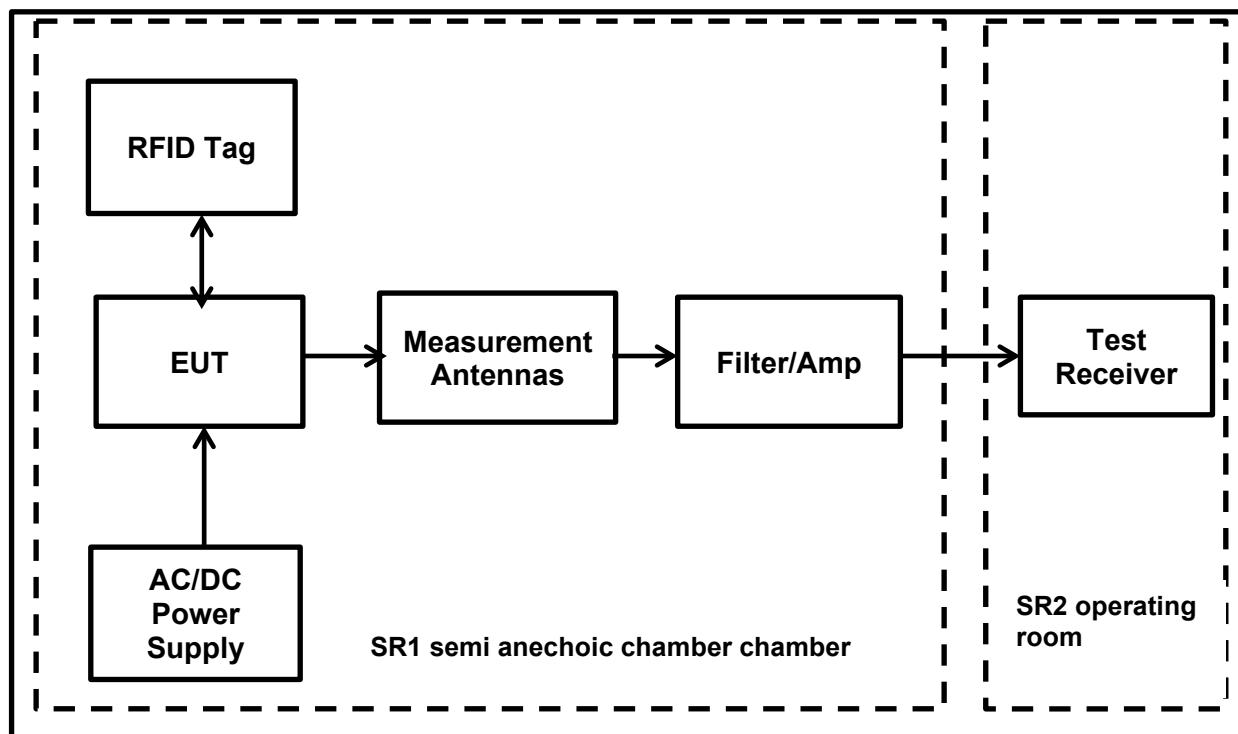
FCC Reference:	Parts 15.407(b)(1),(7),(8), (9), 15.225(d), 15.209(a) & 15.205
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4. & ANSI C63.10:2013 Sections 6.3 and 6.5
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	23.8
Relative Humidity (%):	40.3

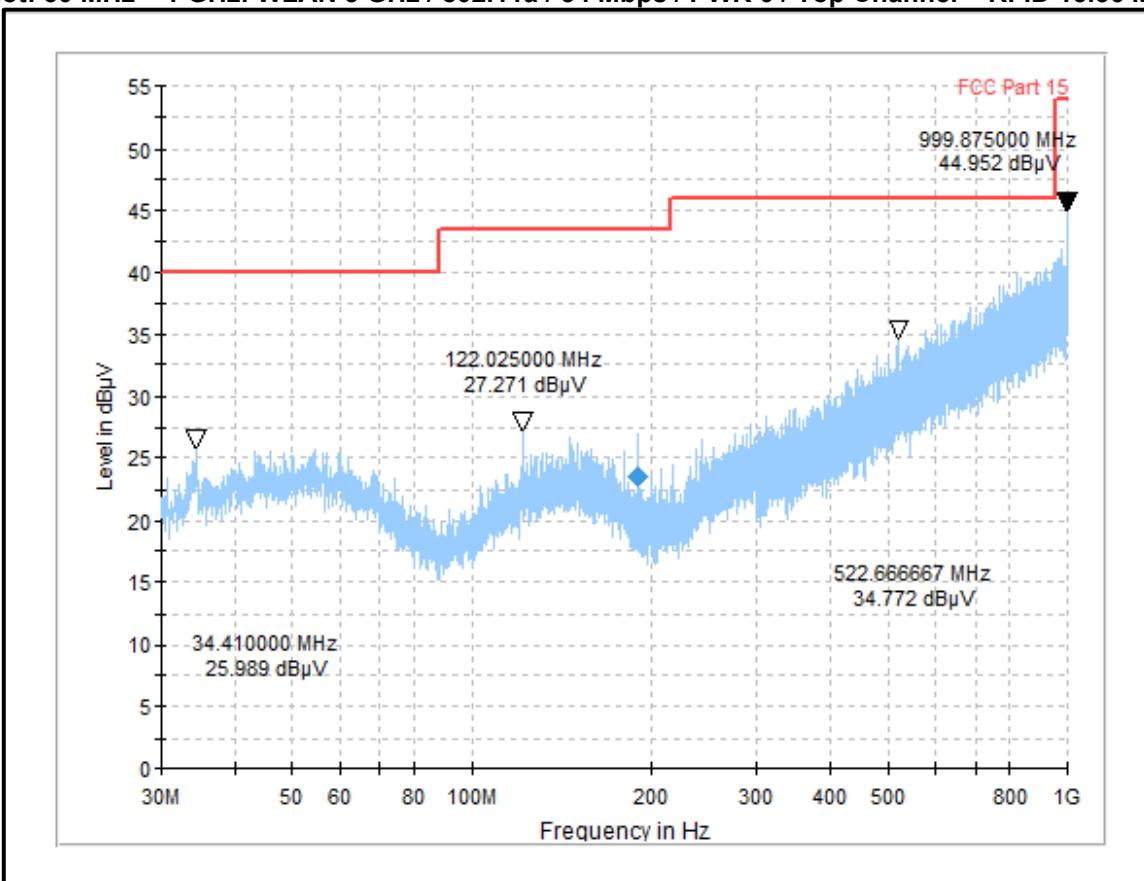
Note(s):

1. Measurements below 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
2. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
3. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
4. All other emissions shown on the pre-scans were investigated and found to be > 20 dB below the applicable limits.

Transmitter Radiated Emissions (continued)**Test Setup:**

Transmitter Radiated Emissions (continued)**Results: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
189.84	Vertical	23.47	43.50	20.03	Complied

Plot: 30 MHz – 1 GHz: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz

*Note: This plot is a pre-scan and for indication purposes only.
For final measurements, see accompanying table.*

Result: Pass

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	21 May 2021
Test Sample Serial Number:	EMV 5 (Radiated Test Sample)		
Test Site Identification	SR 1/2		

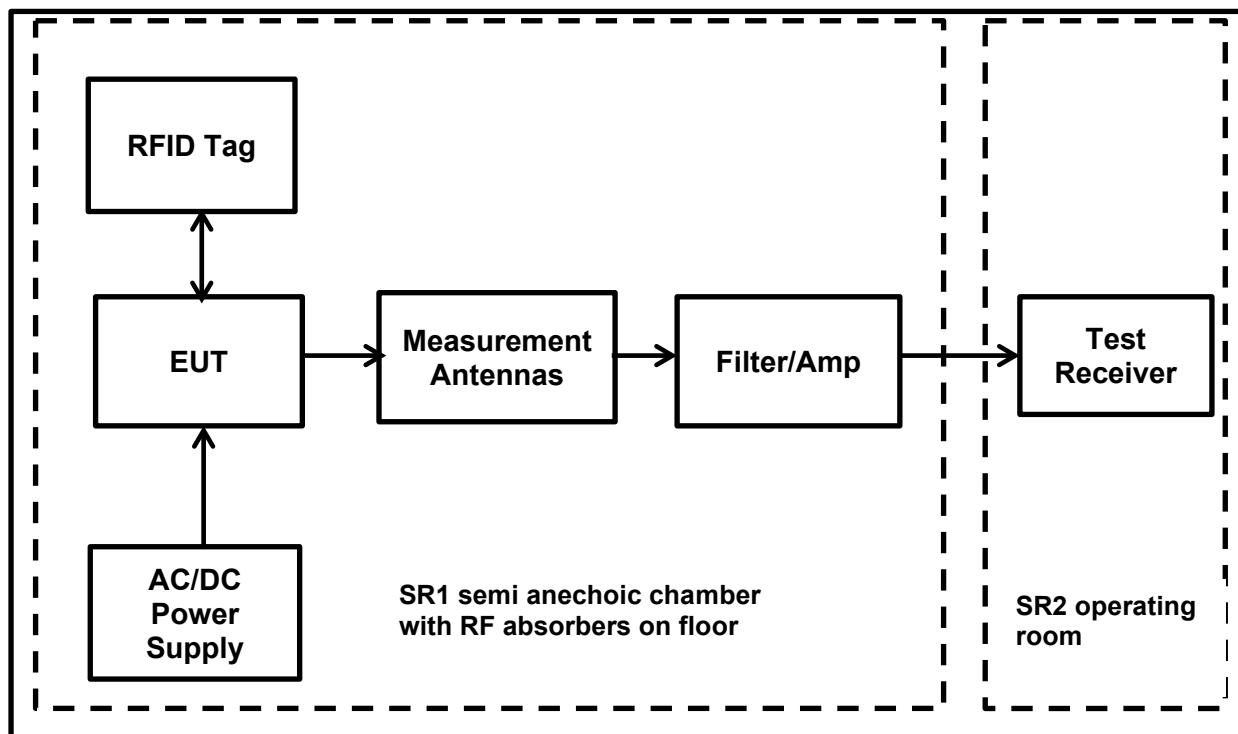
FCC Reference:	Parts 15.407(b)(1),(7),(9), 15.225(d), 15.209(a) & 15.205
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 II .G.5 &, II .G.6. & ANSI C63.10:2013 Sections 6.3 and 6.6
Frequency Range	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	23.8
Relative Humidity (%):	40.3

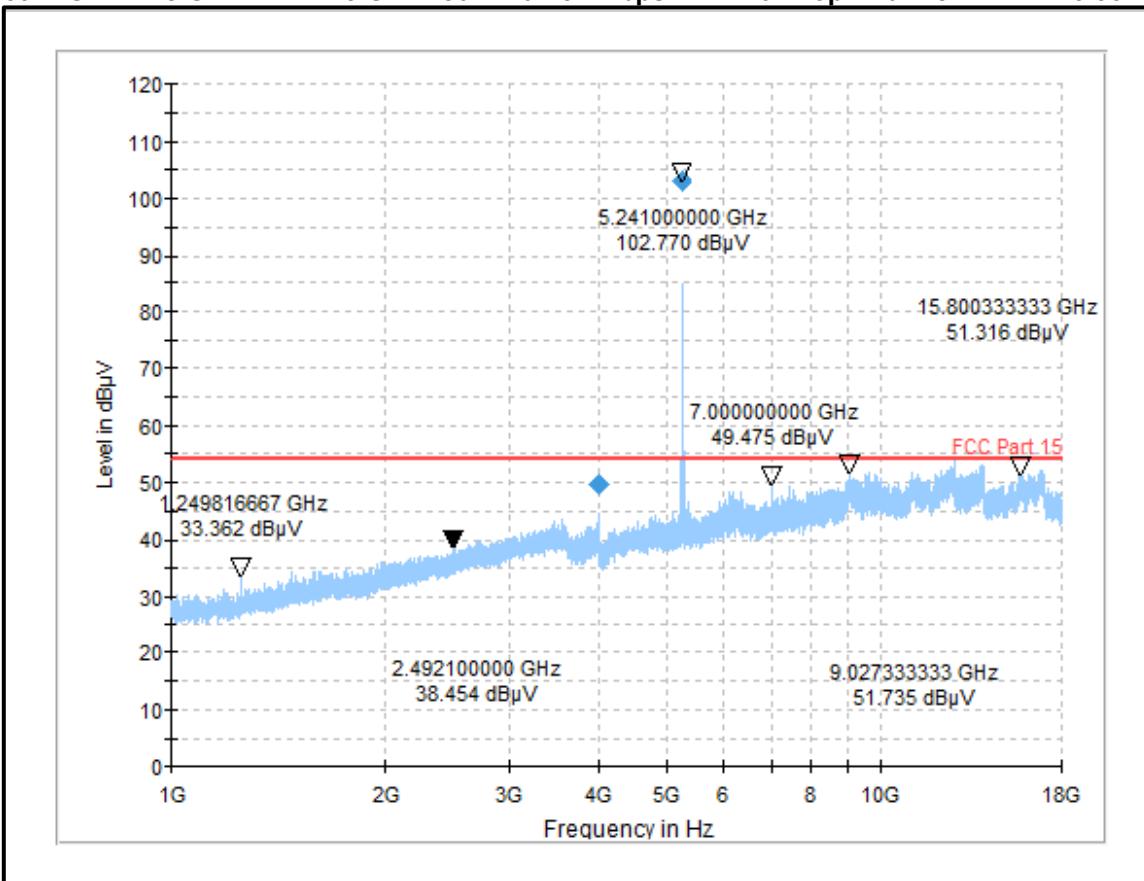
Note(s):

1. Pre-scans above 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorber on the floor at a distance of 3 m. The EUT was placed at a height of 1.5 m above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 m above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorber on the floor at a distance of 3 m. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
2. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto.
3. The emissions shown at frequencies approximately 5.240 GHz on the 1 GHz to 18 GHz plots are the EUT's WLAN 5 GHz for the tested channel.
4. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
5. All other emissions shown on the 1 GHz – 18 GHz pre-scan plot were investigated and found to be below the measurement system noise floor.
6. *In accordance with ANSI C63.10 Section 6.6.4.3 (Note 1), if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. All emissions shown on the above 18 GHz pre-scan plots were investigated and found to be below system noise floor.

Transmitter Radiated Emissions (continued)**Test Setup:**

Transmitter Radiated Emissions (continued)**Results: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4000.00	Vertical	49.69	54.00	4.31	Complied*

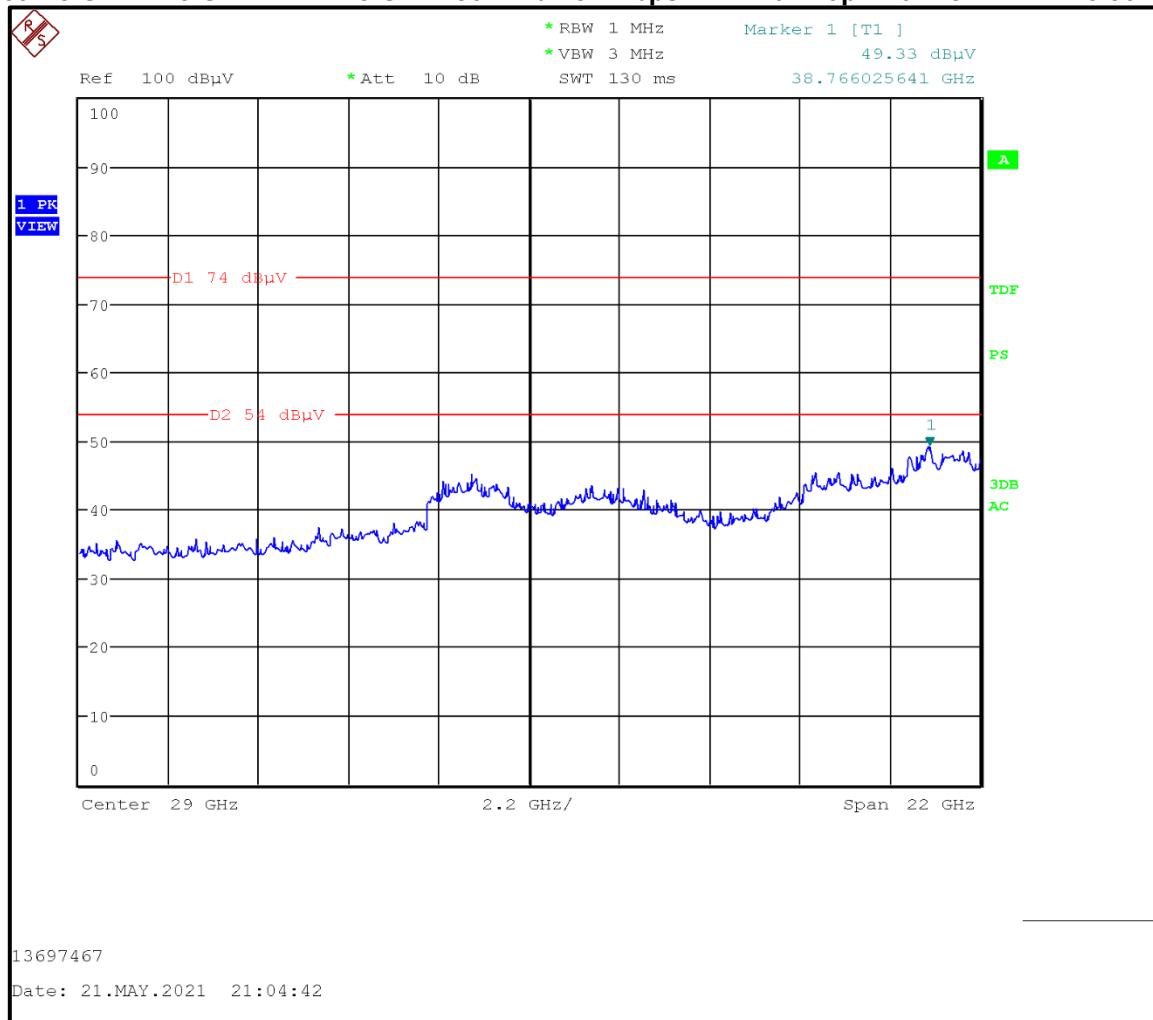
Plot: 1 GHz – 18 GHz: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz

*Note: This plot is a pre-scan and for indication purposes only.
For final measurements, see accompanying table.*

Result: Pass

Transmitter Radiated Emissions (continued)**Results: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No critical spurious emissions were found					

Plot: 18 GHz – 25 GHz: WLAN 5 GHz / 802.11a / 54 Mbps / PWR 0 / Top Channel + RFID 13.56 MHz

*Note: This plot is a pre-scan and for indication purposes only.
For final measurements, see accompanying table.*

Result: Pass

6.Measurement Uncertainty

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	95%	±3.10 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7.Used equipment

Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	10/07/2020	36
377	BONN Elektronik	Amplifier, Low Noise Pre	BLMA 0118-1A	025294B	08/07/2020	12
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	55929	09/07/2020	12
460	Deisel	Turntable	DT 4250 S	n/a	n/a	n/a
452	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	02/09/2020	24
496	Rohde & Schwarz	Antenna, log. - periodical	HL050	100297	05/08/2020	36
607	Schwarzbeck	Antenna broadband horn antenna	BBHA 9170	9170-561	15/10/2019	36
587	Maturo	antenna mast, tilting	TAM 4.0-E	011/7180311	n/a	n/a
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	07/07/2020	12
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	lab verification	n/a
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a
-/-	Testo	Thermo-Hygrometer	608-H1	01	lab verification	n/a
328	SPS	AC/DC power distribution system	PAS 5000	A2464 00/2 0200	lab verification	n/a
1603665	Siemens Matsushita Components	semi-anechoic chamber SR1/2	-/-	B83117-A1421-T161	n/a	n/a

8. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	24	-	Initial Version

--- END OF REPORT ---