

CHARGE BATTERY PACK

- 1 Select proper AC adapter and attach to battery charger.
- 2 Plug battery charger into battery.
- 3 Plug in AC adapter to electrical outlet.
- 4 Charge the battery until the LED indicator turns green, indicating full charge.

CONNECT BATTERY TO CAMERA

- 1 Insert the barrel connector into the battery receiver.
- 2 Turn the screw collar finger tight.
- 3 Align the witness mark on the cable with the witness mark on OPSIN.
- 4 To disconnect the power cable, pull up on the connector metal collar.

ASSEMBLE SWING ARM

- 1 Assemble appropriate flip mount, mating the connector if necessary.
- 2 Align the mini rail receiver of the swing arm to the mini rail on OPSIN.
- 3 Depress lever on the swing arm and slide straight back until the arm locks into place.
- 4 Use the set screw to adjust interpupillary distance as needed.
- 5 To remove the swing arm from OPSIN, press the quick release button and slide swing arm off.

POWER CAMERA ON

- 1 Connect camera to the battery pack.
- 2 Turn the power switch counter-clockwise (past click) to power the camera on.
- 3 Continue turning switch to adjust viewfinder brightness.
- 4 Turn the power switch clockwise (past click) to power camera off.

ADJUST FOCUS + DIOPTER

- 1 Turn the diopter adjustment to focus the viewfinder until the on-screen menu appears sharp.
- 2 Turn the lens focus to optimize the image sharpness of the scene.

WARNING

Failure to properly set up, use, and care for this product can increase the risk of serious injury, death, property damage, or damage to the product or related accessories. Exercise caution when using a SIONYX product as part of your active lifestyle. Always be aware of your surroundings to avoid injury to yourself and others.

1 Product shall be used in accordance with all manufacturing instruction and limits.

2 Read all provided documentation, and keep it for future reference.

3 Follow all instructions and heed all warnings.

4 Properly install, use, and maintain all power and data cable as per manufacturing specification.

5 Only use attachments and accessories specified and/or approved by SIONYX.

6 SIONYX OPSIN is designed to be serviced only by qualified service personal. Visit SIONYX.com for more information.

7 Use, maintain, and store battery in accordance with manufacturing instructions.

INCLUDED

OPSIN | Eye Cup | EyeBumper | SwingArm
Battery | Battery Charger with International PlugAdapters

Power

Cable

Adjustment

Tool

Kit

MOLLE

Carry

Bag

Helmet

Mounting

Kit

REGISTER YOUR DEVICE

Register your device and stay up to date by visiting the URL or scanning the QR code below.

NEED HELP?

ONLINE CHAT www.sionyx.com

SUBMIT A TICKET www.sionyx.com/contact

24/7 SUPPORT www.support.sionyx.com



FOLLOW US

Share your SIONYX content and be sure to tag us!



www.sionyx.com/register

SIONYX

OPSIN

ON VM1

QUICK START GUIDE

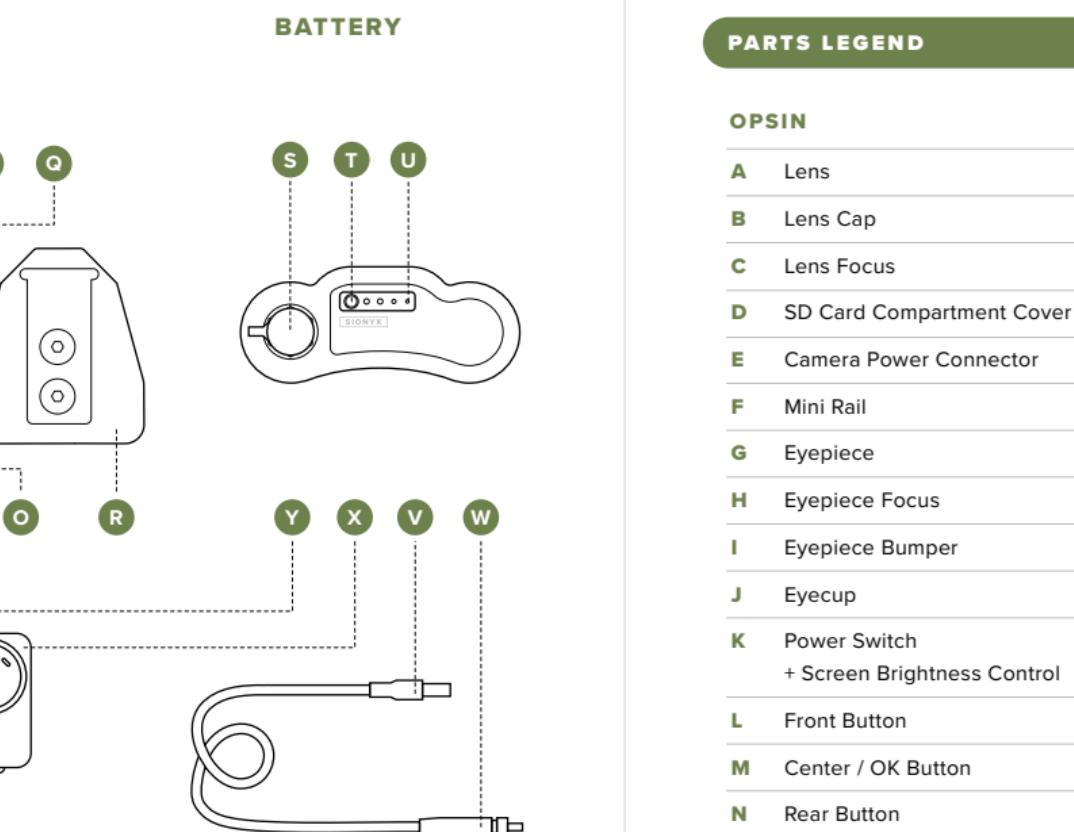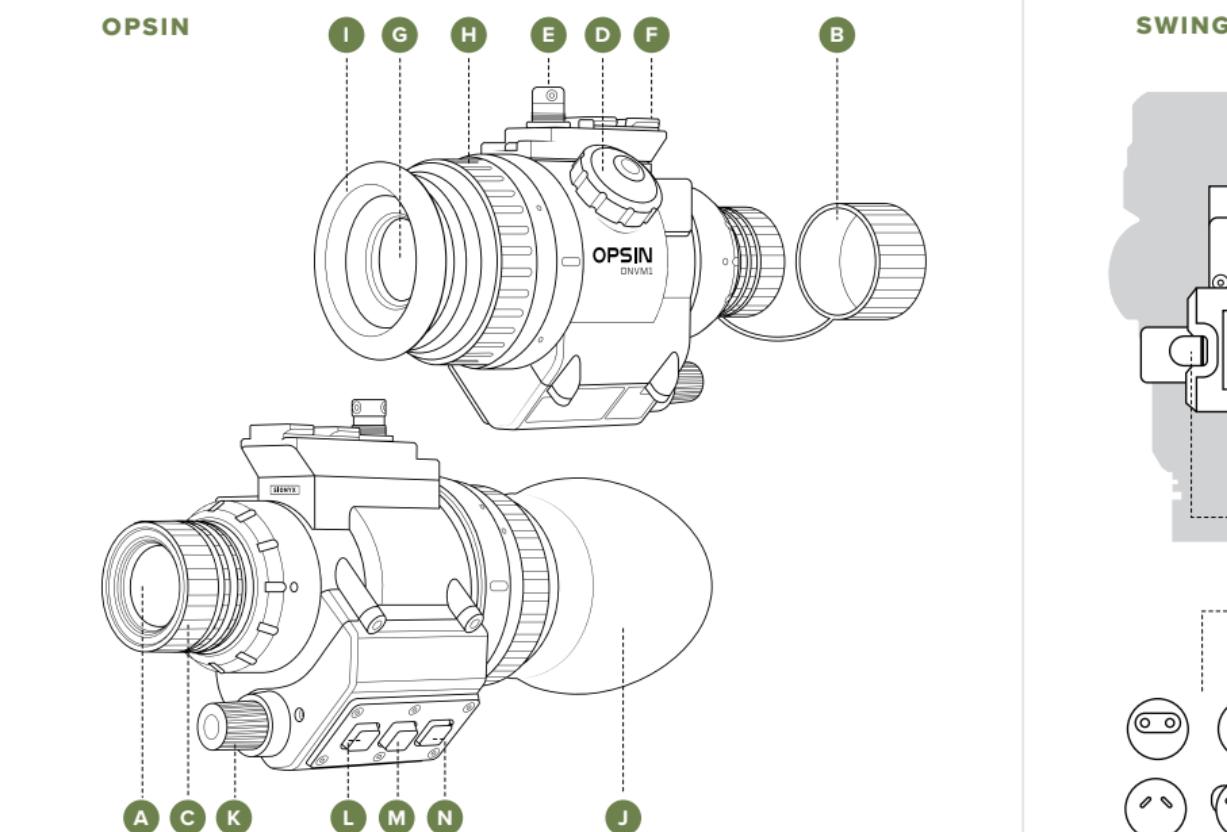

PARTS LEGEND		
OPSIN		
SWING ARM		
BATTERY		
OPSIN		
SWING ARM		
FRONT	Short Press	Long Press
CENTER	Take Still Image	Enter Capture Settings Menu
REAR	Turns Overlay On + Off	Enter General Settings Menu
	Start Video Recording	Enter Capture Settings Menu
SWING ARM		
FRONT	Short Press	Long Press
CENTER	Focus on Previous Menu Item	-
REAR	If no submenu exists: Set Current Value If submenu exists: Go To Next Submenu Level	Exit Settings
BATTERY		
FRONT	Short Press	Long Press
CENTER	Focus on Next Menu Item	-
REAR		
FRONT		
CENTER		
REAR		

BASIC BUTTON FUNCTIONALITY		
BUTTON	SHORT PRESS	LONG PRESS
FRONT	Take Still Image	Enter Capture Settings Menu
CENTER	Turns Overlay On + Off	Enter General Settings Menu
REAR	Start Video Recording	Enter Capture Settings Menu

CAPTURE / GENERAL MENU BUTTON FUNCTIONALITY		
BUTTON	SHORT PRESS	LONG PRESS
FRONT	Focus on Previous Menu Item	-
CENTER	If no submenu exists: Set Current Value If submenu exists: Go To Next Submenu Level	Exit Settings
REAR	Focus on Next Menu Item	-



E Full Documentation
F Documentation Complète
I Documentazione Completa
S Documentación Completa
D Vollständige Dokumentation

Printed in INDONESIA
1AG-16P137657 -- R11