

Acceptance Letter

CUSTOMER: _____

CUST P/N: _____

ZD P/N: _____ ZD-Double coil lead-out

Product name: _____

Product model: _____

DATE: _____ 2025-5-9

Version: _____ A.0


Drafted	Audit	Approval	
Tian Peng	Li Xiaoqi	Duan Renliang	

Shenzhen Zhide Electronics Co., LTD

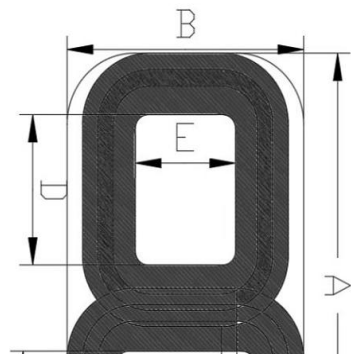
Factory Address: 6th Floor, Building A, Shangmugu Jinli Industrial Park, Pinghu
Sub-district, Shenzhen City

TEL: 13316968872

E-mail: 914996326@qq.com

[illegible]

Zhide Double Coil Specification Sheet

		Version number	Customer	
		A. 0	Zhide Material Number	ZD-Double coil lead-out
一.Coil size 			A	83±0.5
			B	46±0.5
			C	80±0.5
			D	27±3
			E	19±1
			F	26±0.5
			G	20±0.5
			Magnetic sheet thickness	0.8±0.1
			Total thickness	3.6±0.5

Remarks:

- Wire diameter: 0.08*105P silk-covered wire
- Winding turns :9TS
- Whether the starting and ending lines cross: W1 does; W2 is not
- Stick double-sided tape on the bottom of the magnetic sheet
- The coil is attached at the middle position of the magnetic sheet

Ii. Winding parameters

Specification		Test conditions	Testing instrument	Specification		Test conditions	Testing instrument	
L (W1)	L (W2)	100KHz/1V	■ TH1816B	DCR (W1)	DCR (W2)	@ 25℃	■ CH-502BC	
$6.8 \mu\text{H} \pm 10\%$	$6.8 \mu\text{H} \pm 10\%$			$41.8 \text{Max-m } \Omega$	$44 \text{Max-m } \Omega$			