



No.I19Z61444-SEM04



**No. I19Z61444-SEM04**

**For**

**Micromax Informatics Ltd**

**LTE Mobile Phone**

**Model name: T5542**

**With**

**Hardware Version: MMX\_T5542\_V3.0**

**Software Version: MMX\_T5542\_SW\_V03\_20191106**

**FCC ID: 2ANCWT5542**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.


**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

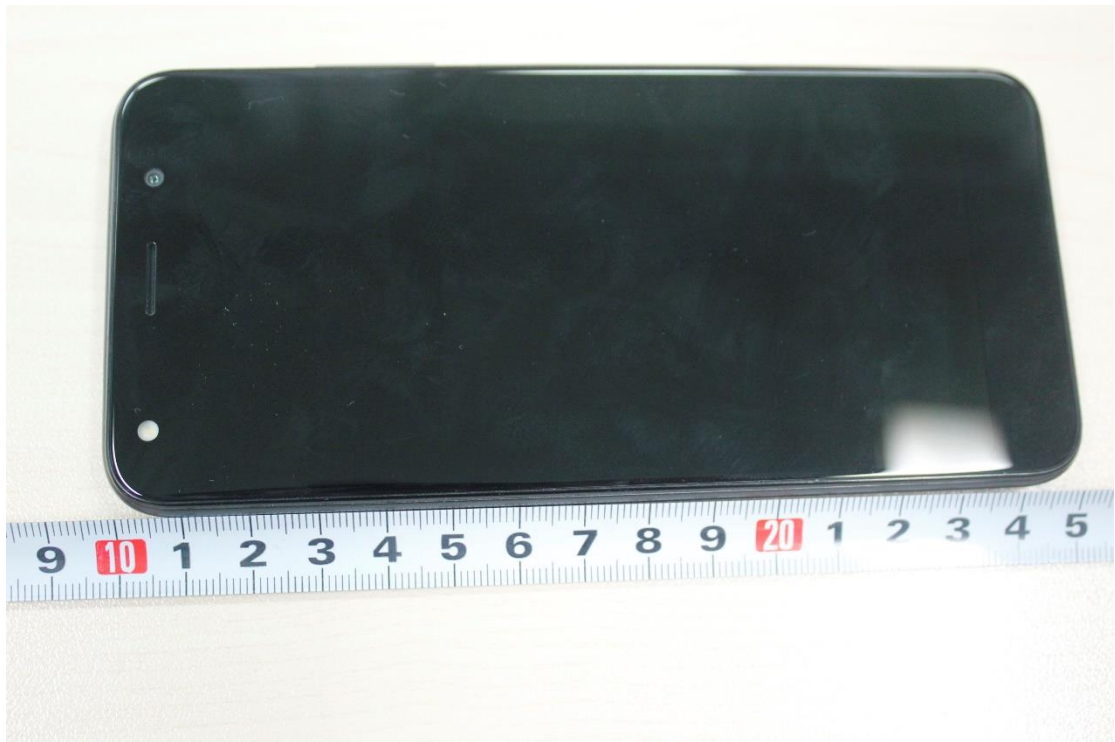


**Picture 1: Constituents of the sample**

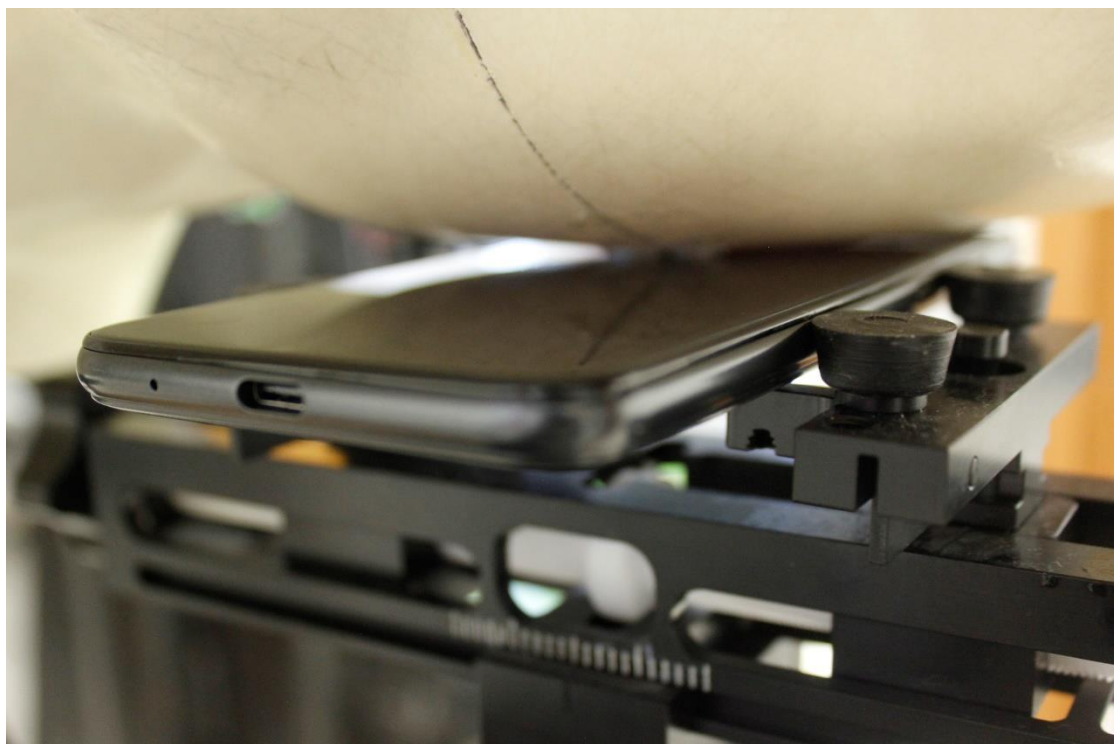


**Picture 2: Left Hand Touch Cheek Position**



**Picture 3: Left Hand Tilt 15° Position**

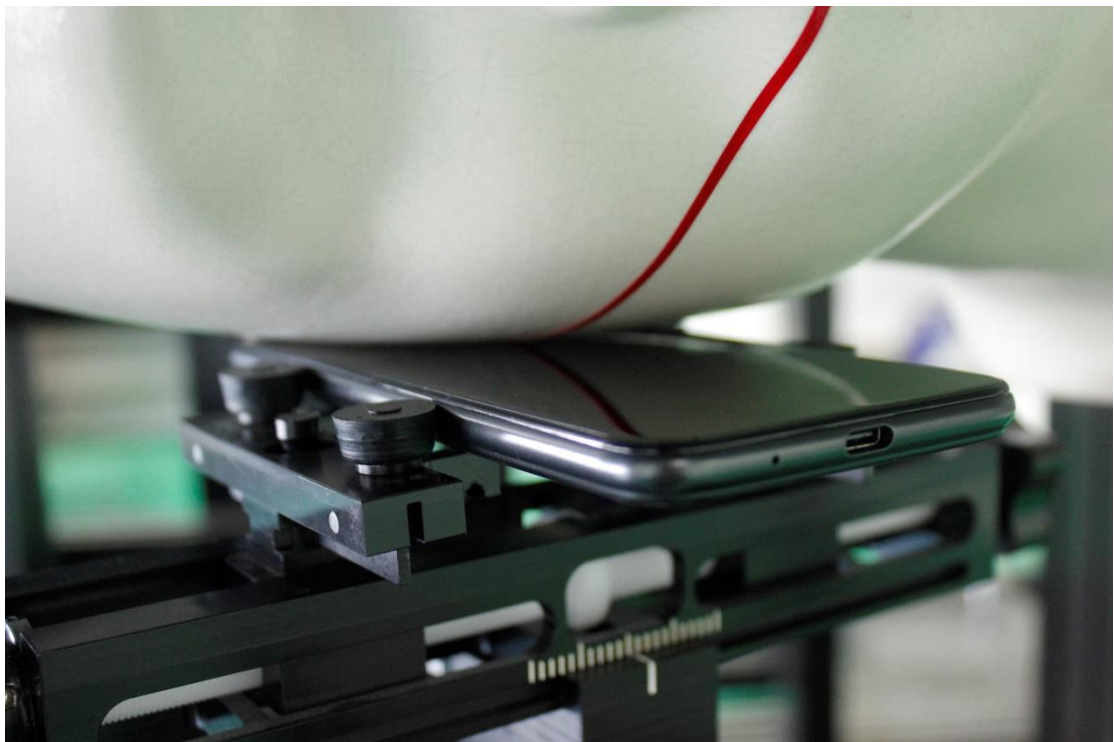


**Picture 4: Right Hand Touch Cheek Position**

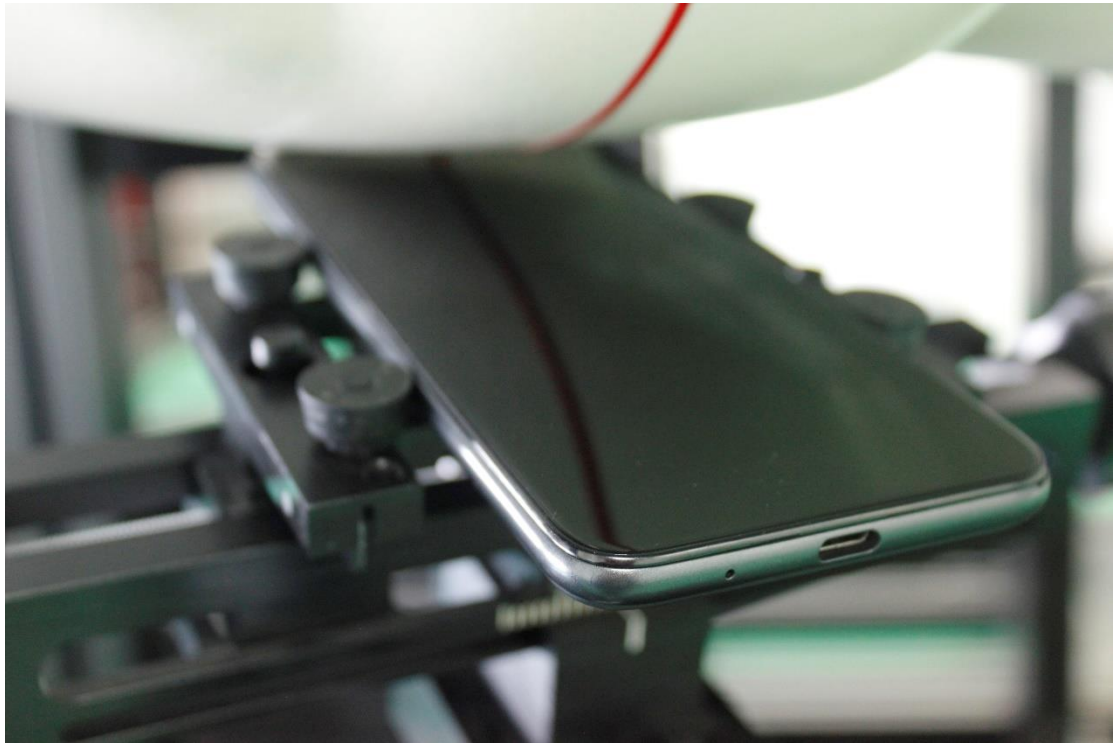

**Picture 5: Right Hand Tilt 15° Position**

**Test positions for body:**

The Body SAR is tested at the following 12 test positions all with the distance =0/10/15mm between the EUT and the phantom bottom:

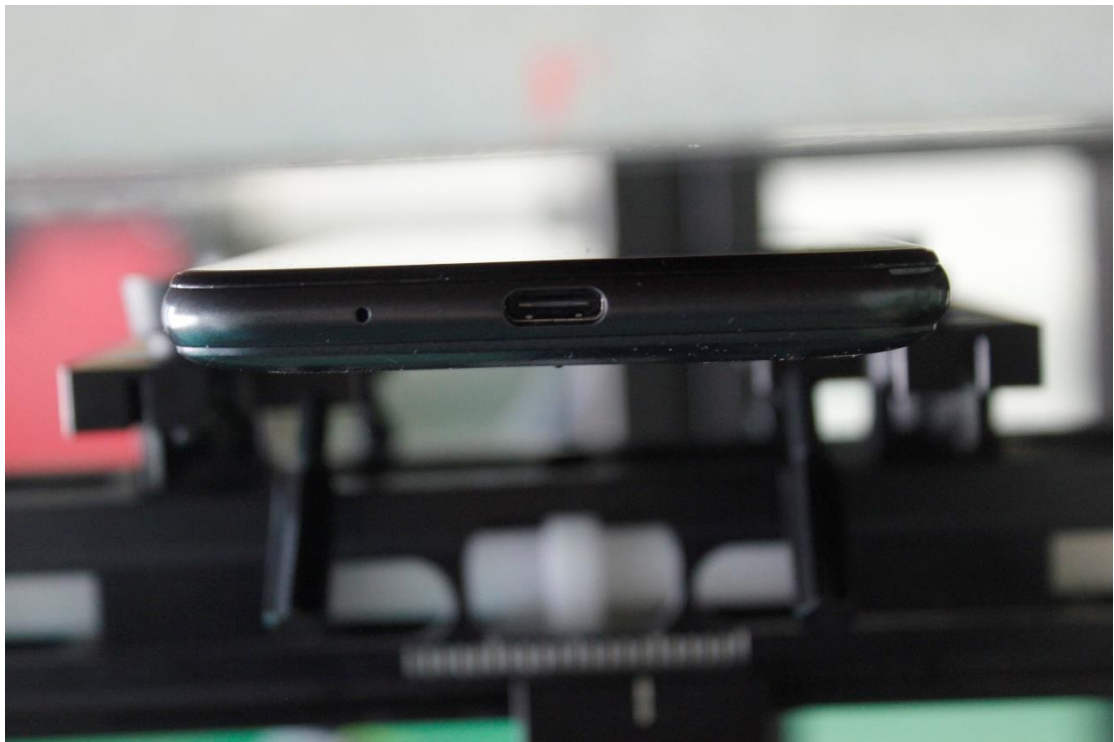

**Picture 6: Front 10mm**






**Picture 7: Front 15mm**




**Picture 8: Rear 10mm**



**Picture 9: Rear 15mm**

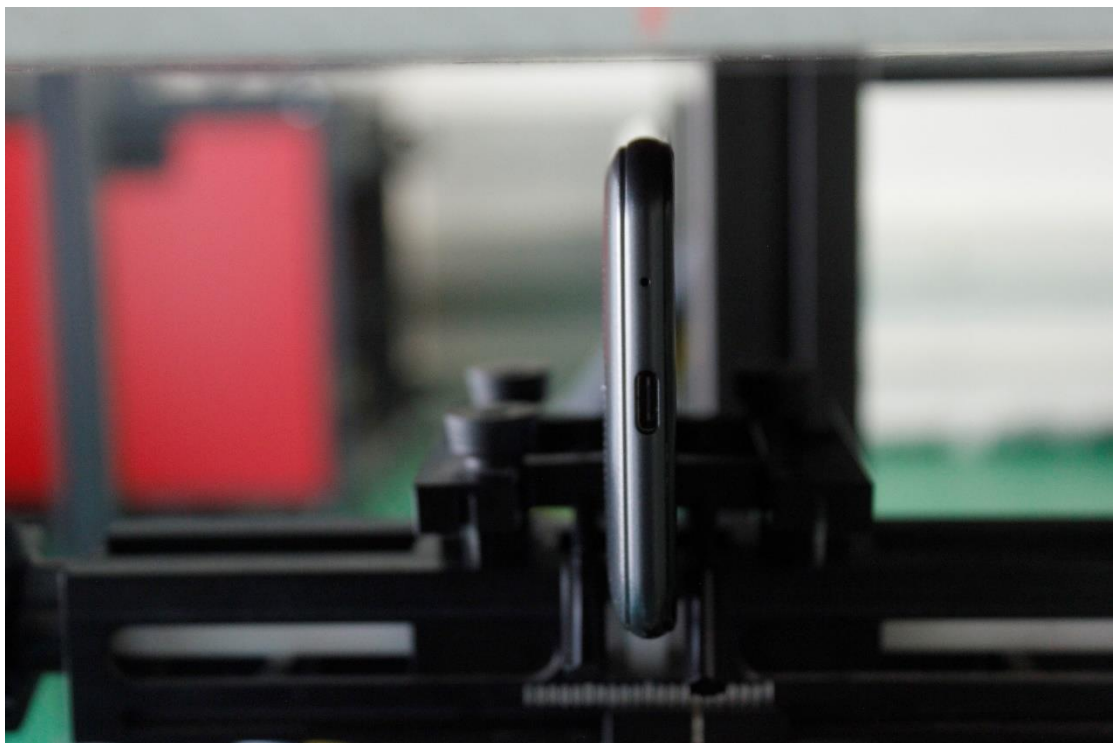

**Picture 10: Left 10mm**

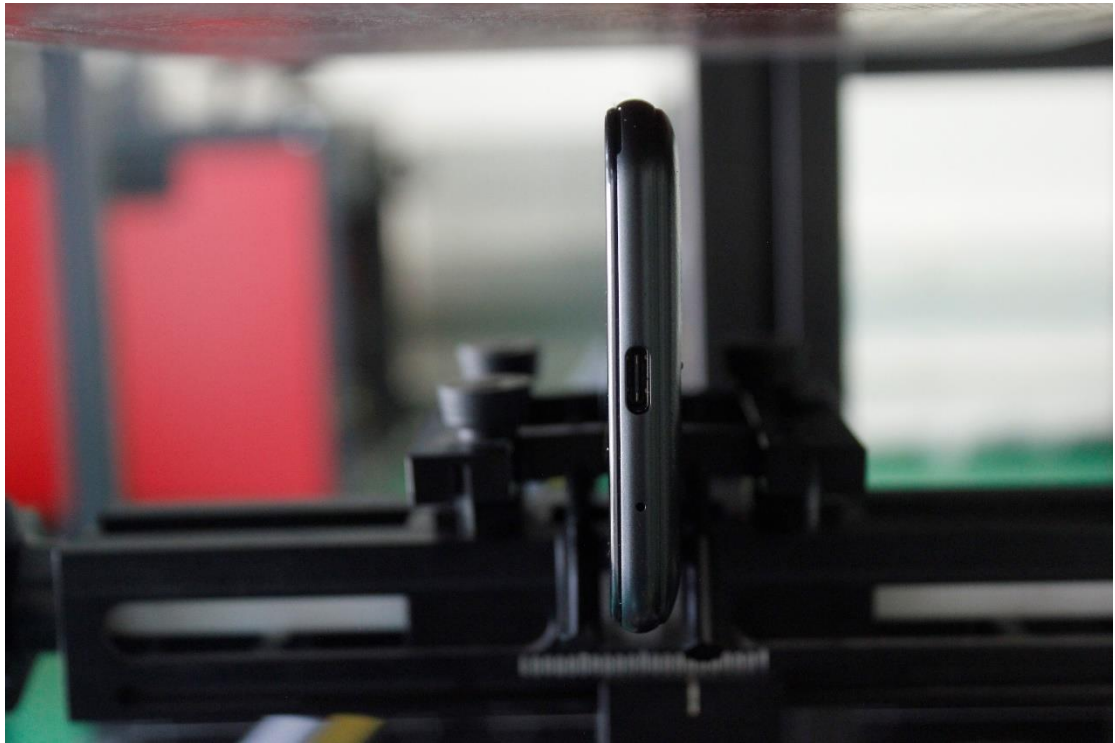


**Picture 11: Right 10mm**



**Picture 12: Top 10mm**



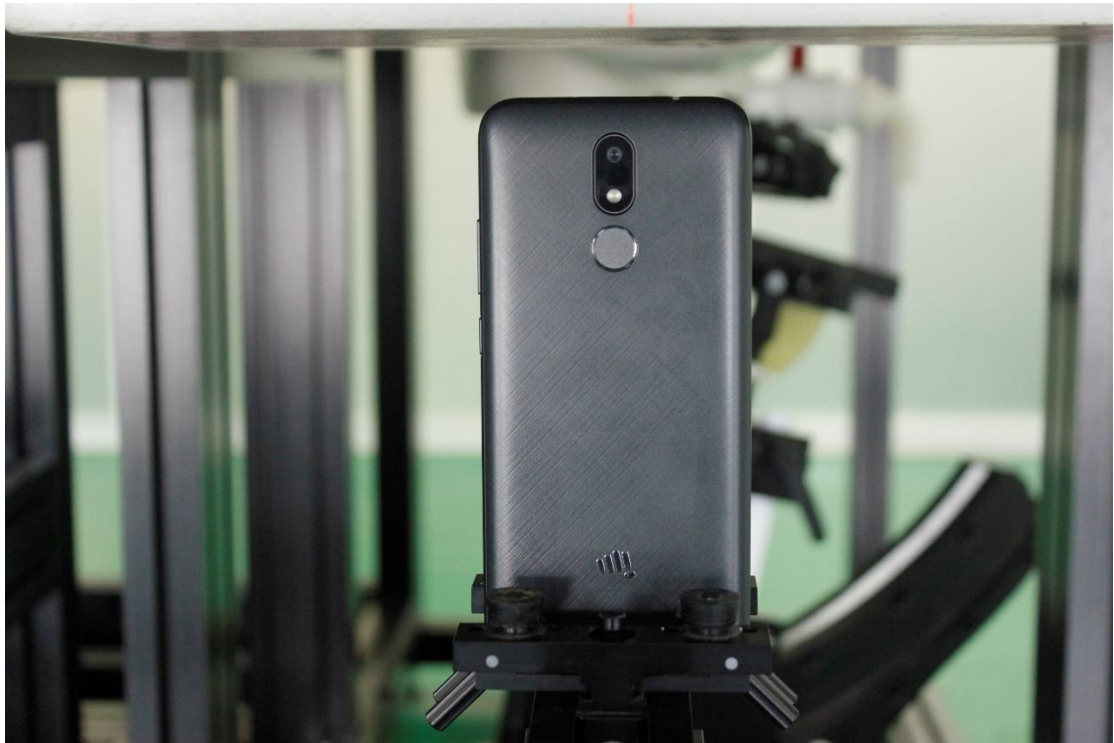


**Picture 13: Top 15mm**




**Picture 14: Bottom 10mm**




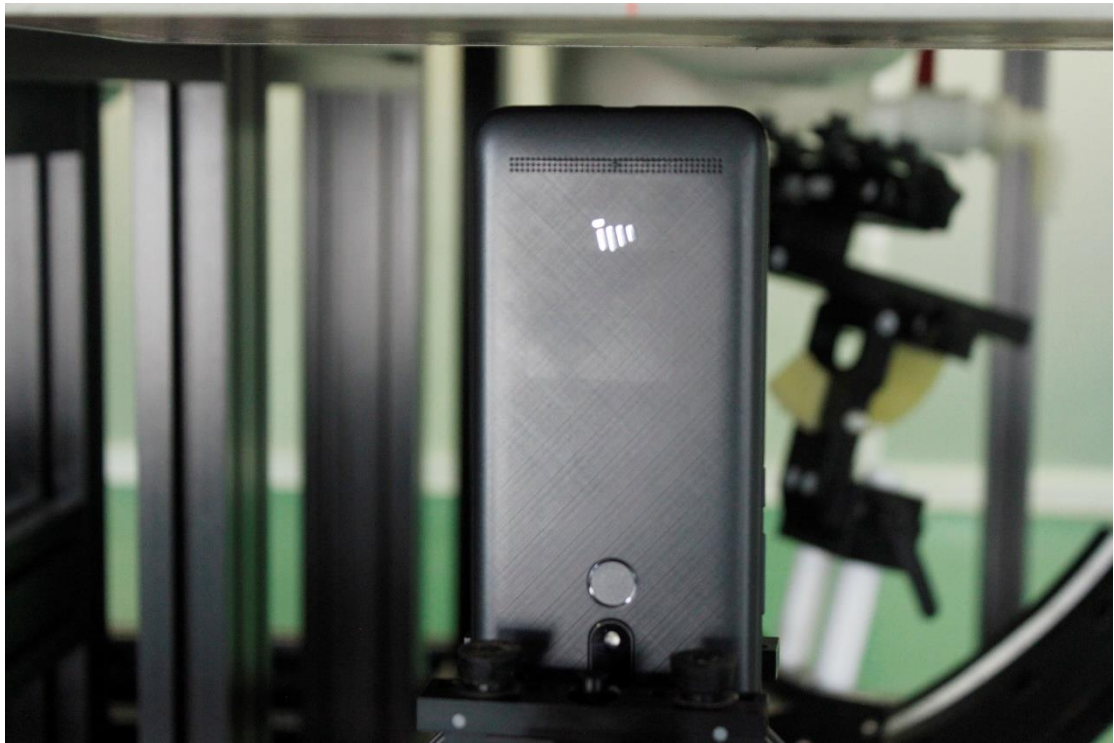

**Picture 15: Bottom 15mm**

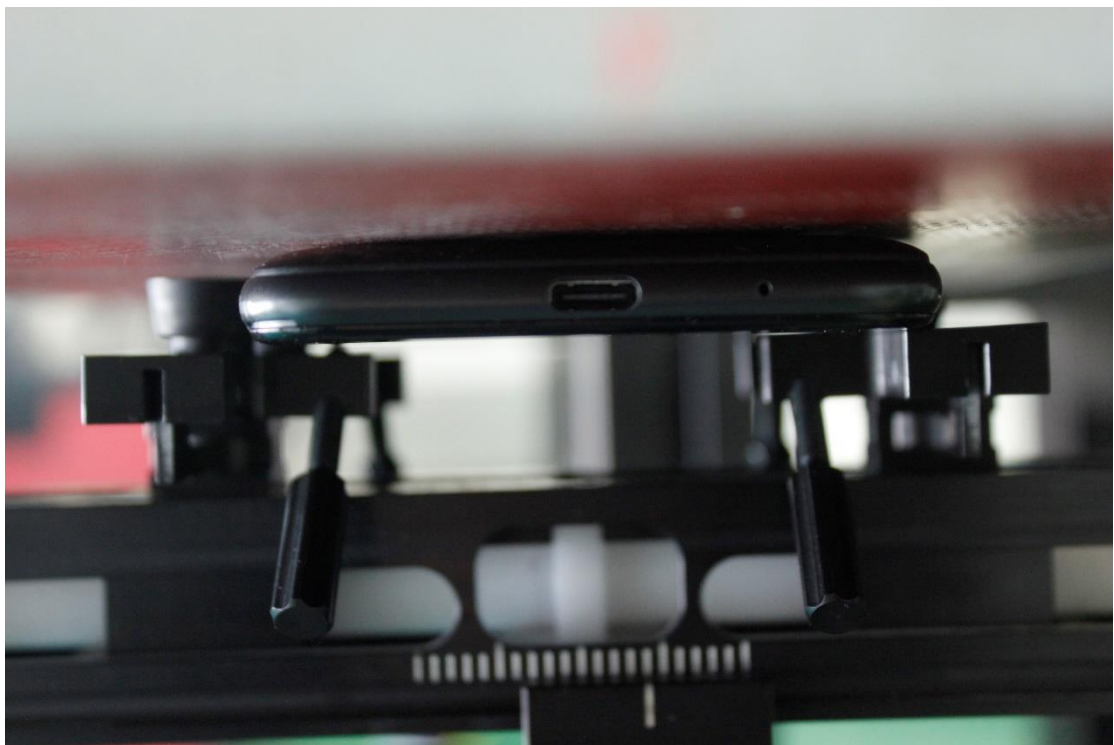

**Picture 16: Rear 0mm**

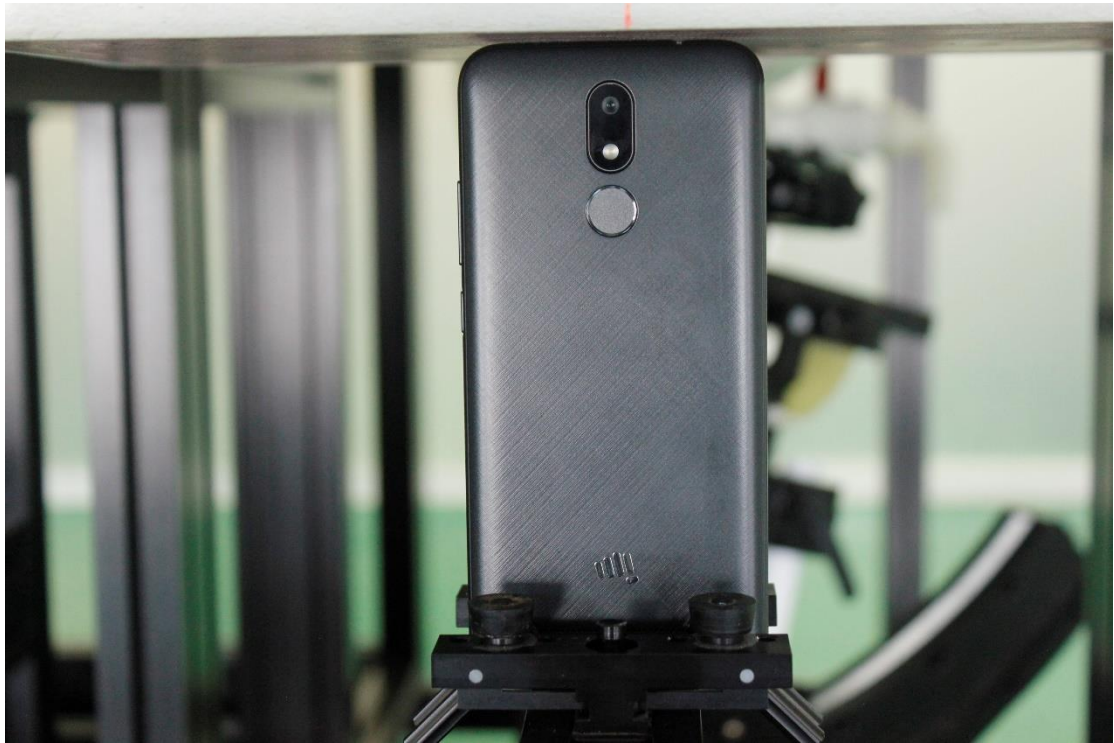

**Picture 17: Top 0mm**