

Appendix C: Test results. Proprietary protocol DM

INDEX

TEST CONDITIONS54

Occupied Bandwidth56

Section 15.249 Subclause (a) / RSS-210 B.10. (a) Field strength of fundamental and harmonics emissions58

Section 15.249 Subclause (d) / RSS-210 B.10. (b) Emissions radiated outside of the specific frequency bands61

TEST CONDITIONS

POWER SUPPLY (V):

V nominal: 3.7 Vdc
Type of power supply: DC voltage from battery.
Type of antenna: Integral antenna.
Declared antenna gain: - 7 dBi

TEST FREQUENCIES:

Low Channel: 2402 MHz
Middle Channel: 2440 MHz
High Channel: 2480 MHz

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the spectrum analyser using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-26 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz:

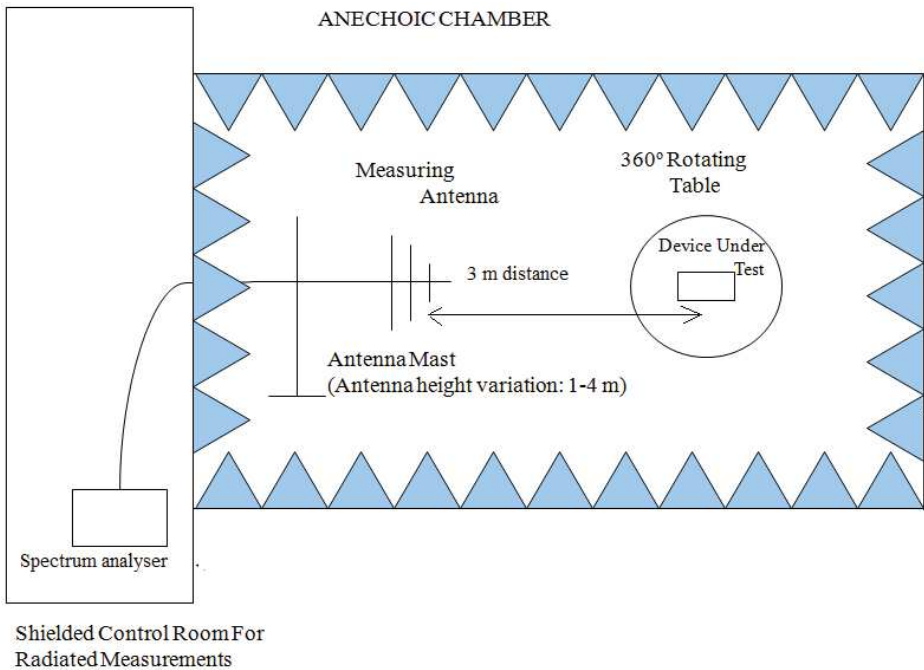

Radiated measurements setup $f > 1$ GHz:

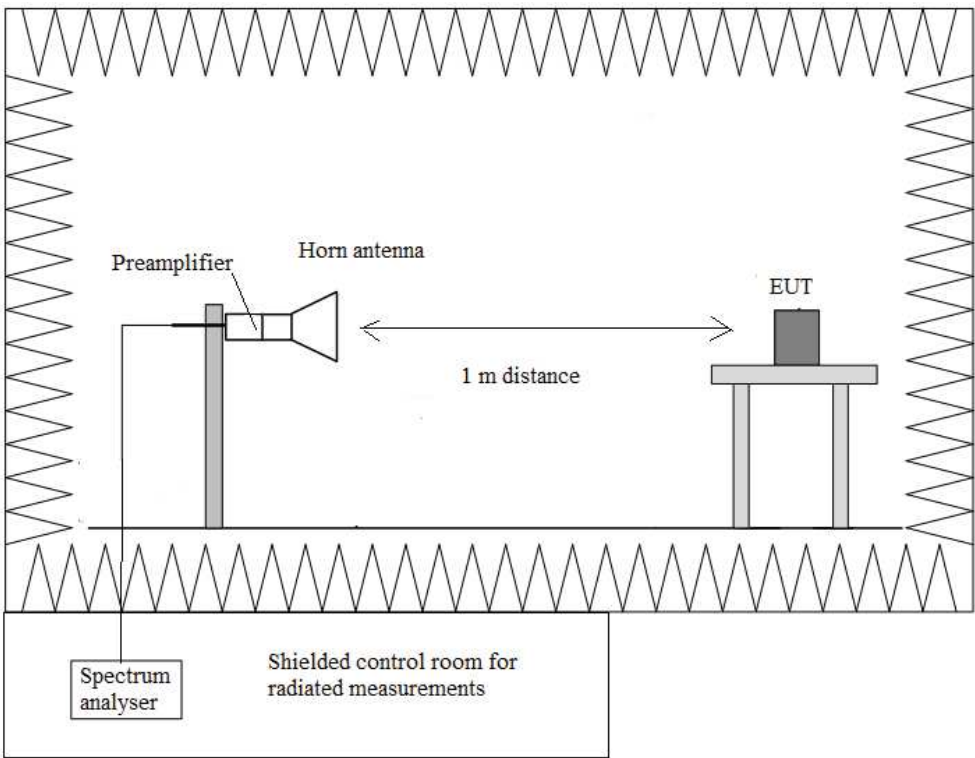


Occupied Bandwidth


RESULTS:

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
99% Bandwidth (MHz)	1.7315	1.7355	1.7345
Measurement Uncertainty (kHz)	<±5.00		


- Low Channel:

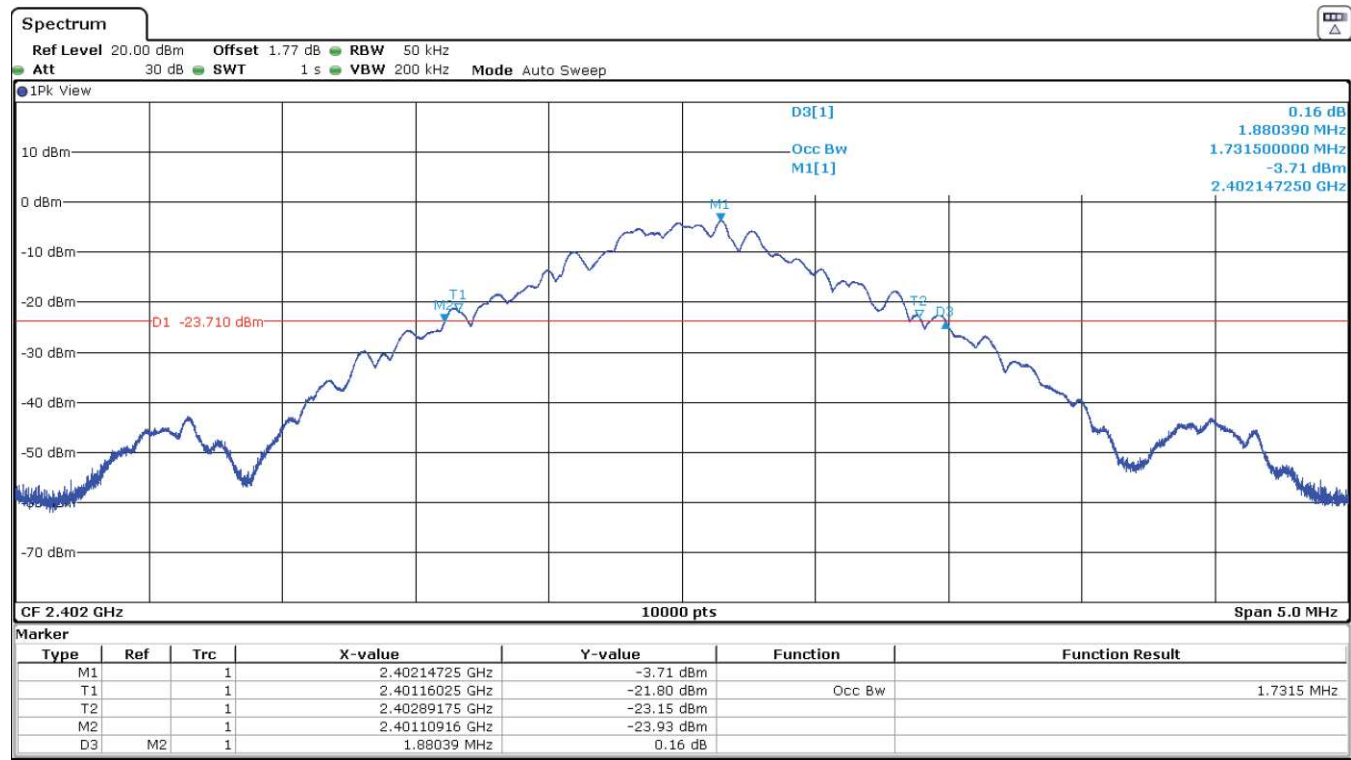

- Middle Channel:

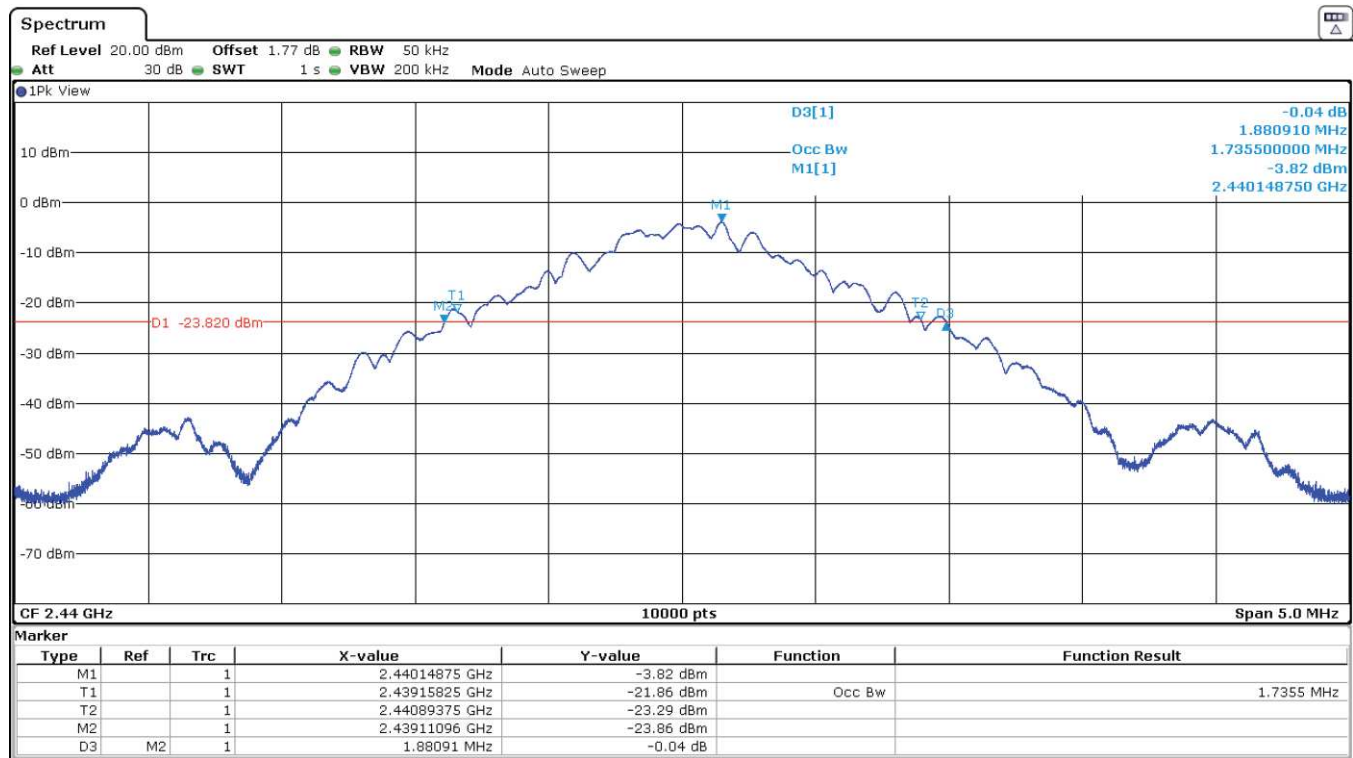

- High Channel:

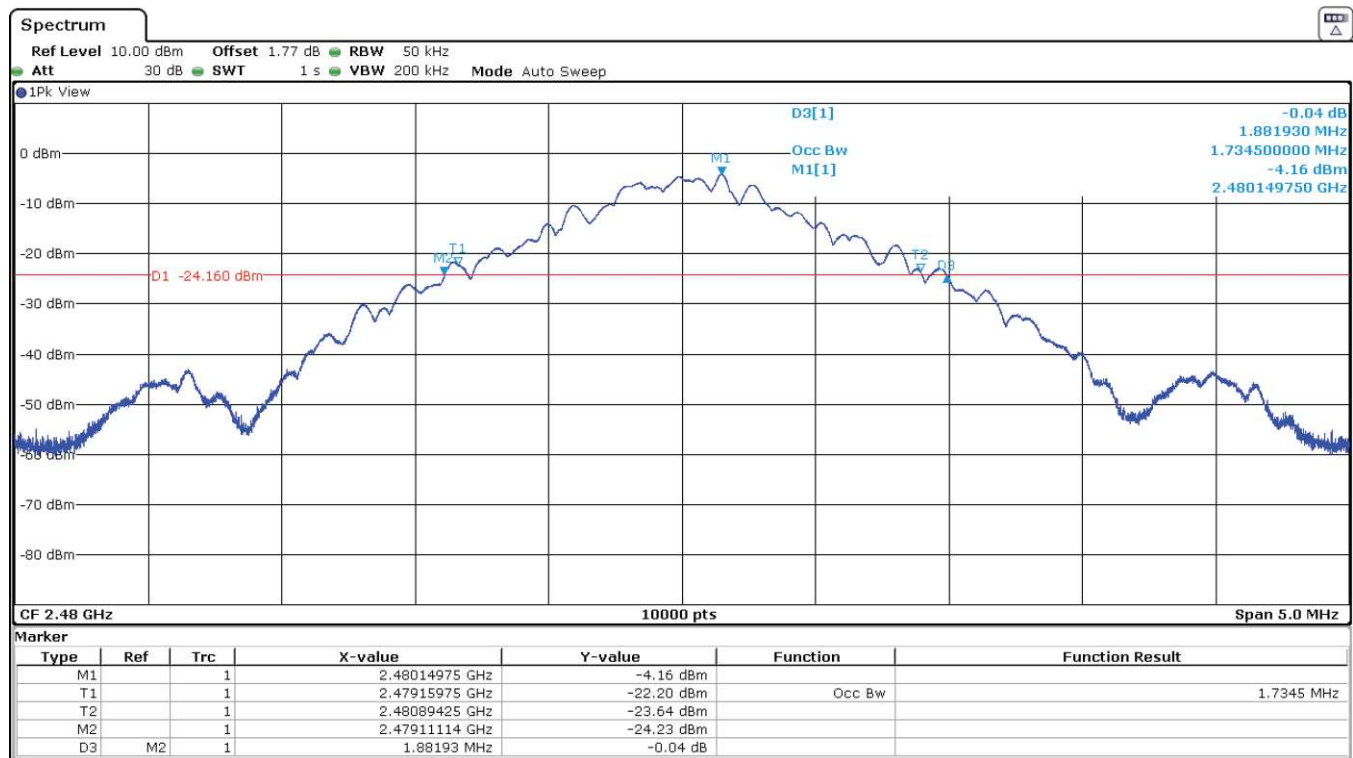

Section 15.249 Subclause (a) / RSS-210 B.10. (a) Field strength of fundamental and harmonics emissions

SPECIFICATION:

The field strength of emissions from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of fundamental (mV/m)	Field strength (dB μ V/m)	Measurement distance (m)
902 - 928	50	93.98	3
2400 – 2483.5	50	93.98	3
5725 - 5875	50	93.98	3
24000-24250	250	107.96	3


For frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

RESULTS:


	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Average Field Strength (dB μ V/m)	79.83	78.53	77.31
Peak Field Strength (dB μ V/m)	81.22	80.14	79.36
Measurement Uncertainty (dB)	< $\pm$ 3.05		

Verdict: PASS


- Low Channel:

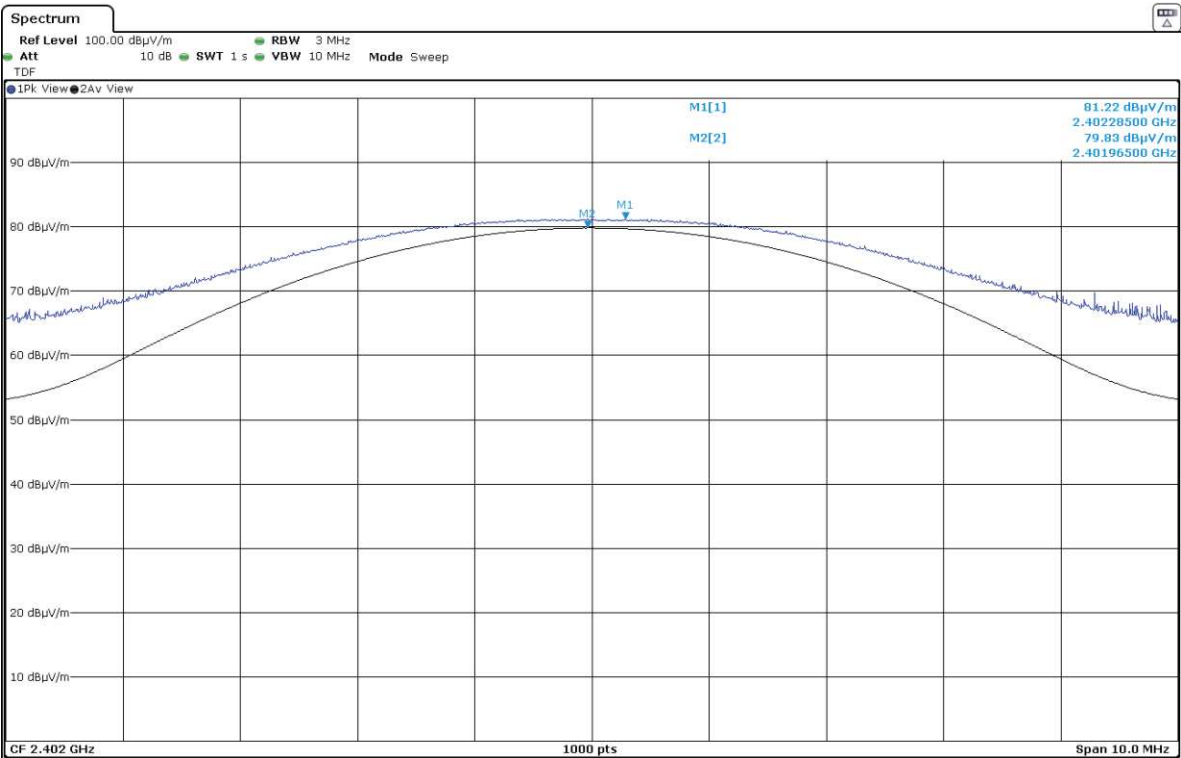

- Middle Channel:

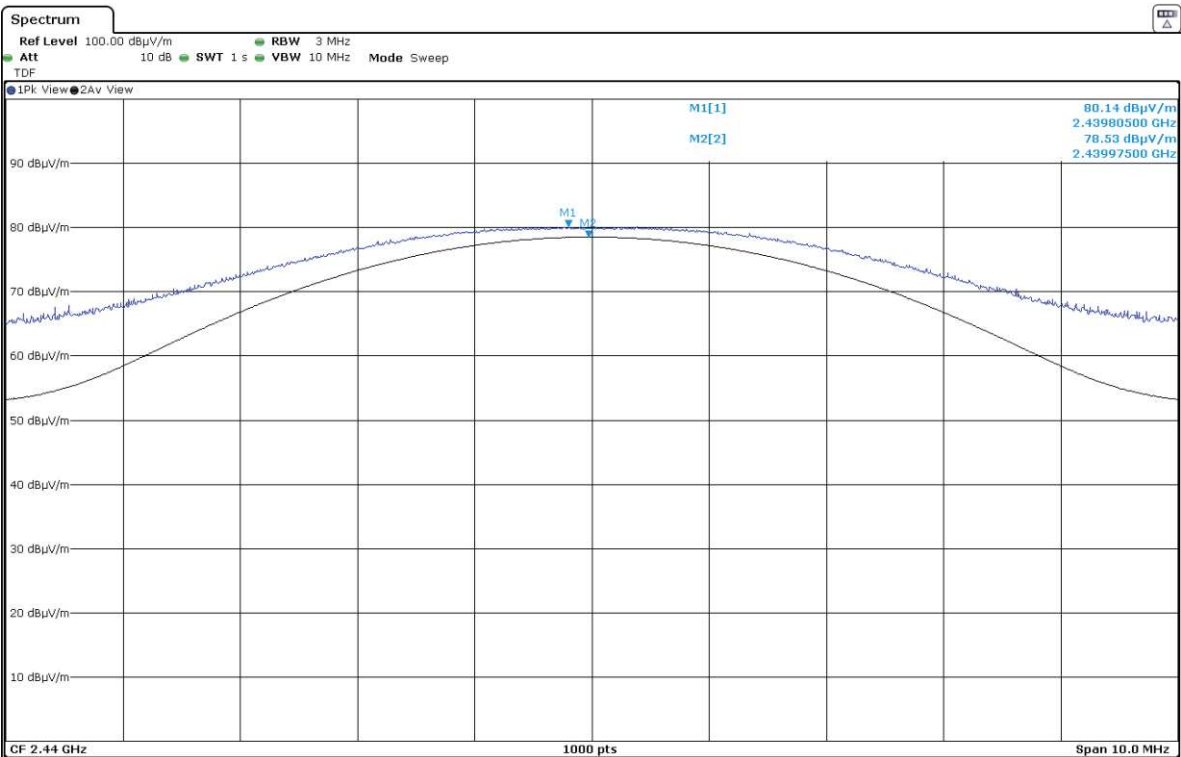

- High Channel:

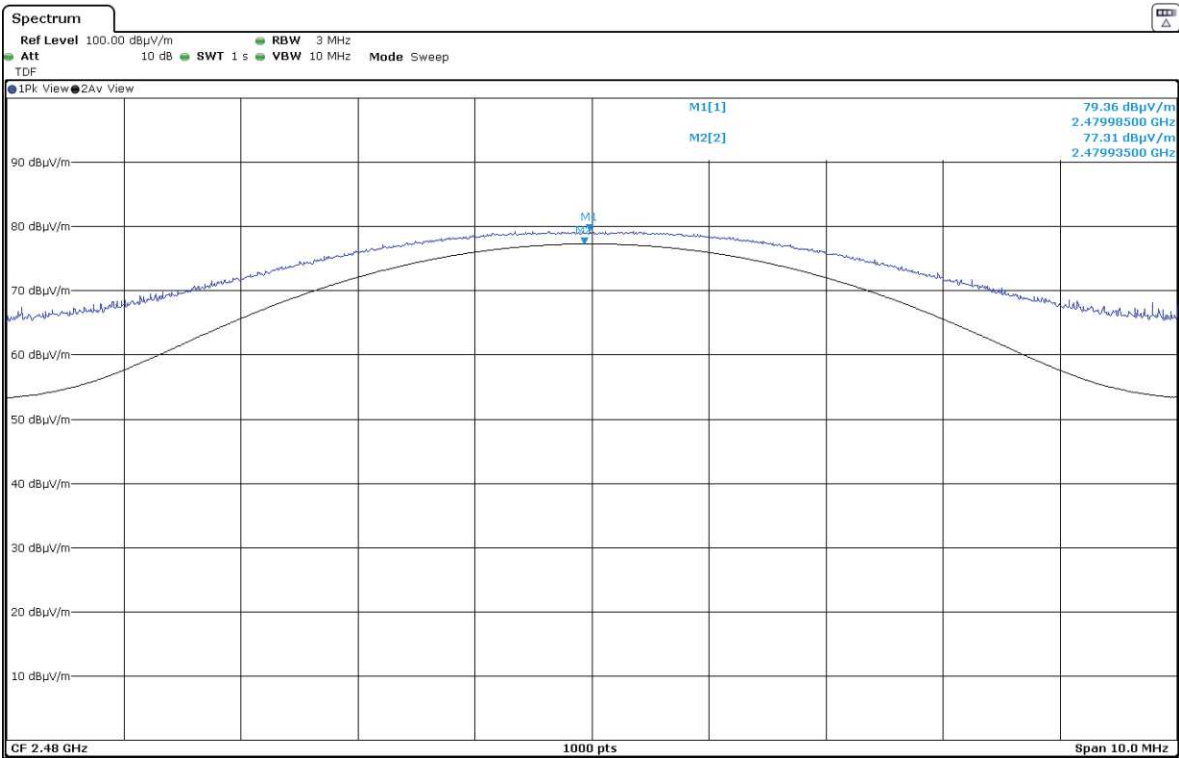

Section 15.249 Subclause (d) / RSS-210 B.10. (b) Emissions radiated outside of the specific frequency bands

SPECIFICATION:

The field strength of harmonics from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of harmonics ($\mu\text{V/m}$)	Field strength of harmonics ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
902 - 928	500	54	3
2400 – 2483.5	500	54	3
5725 - 5875	500	54	3
24000-24250	2500	67.96	3

Emissions radiated outside of the specific frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits specified in section 15.209:

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	$2400/F(\text{kHz})$	-	300
0.490-1.705	$24000/F(\text{kHz})$	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

Whichever is the lesser attenuation.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz.

The spurious signals detected do not depend on the operating channel.

No spurious emissions were found at less than 20 dB from the limit.

Frequency range 1 - 26 GHz.

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- Low Channel (2402 MHz):

No spurious emissions were found at less than 20 dB of the limit.

- Middle Channel (2440 MHz):

No spurious emissions were found at less than 20 dB of the limit.


- High Channel (2480 MHz):

Spurious frequency (GHz)	Detector	Emission Level (dBμV/m)	Polarization	Measurement Uncertainty (dB)
2.48355500	Peak	56.32	H	<±3.70
	Average	40.21		
2.48362500	Peak	56.10	V	
	Average	40.05		
2.48380500	Peak	54.82	V	
	Average	40.50		

Verdict: PASS


FREQUENCY RANGE 30 MHz - 1 GHz

The spurious signals detected do not depend on the operating channel, so this plot is valid for Low, Middle and High Channels.

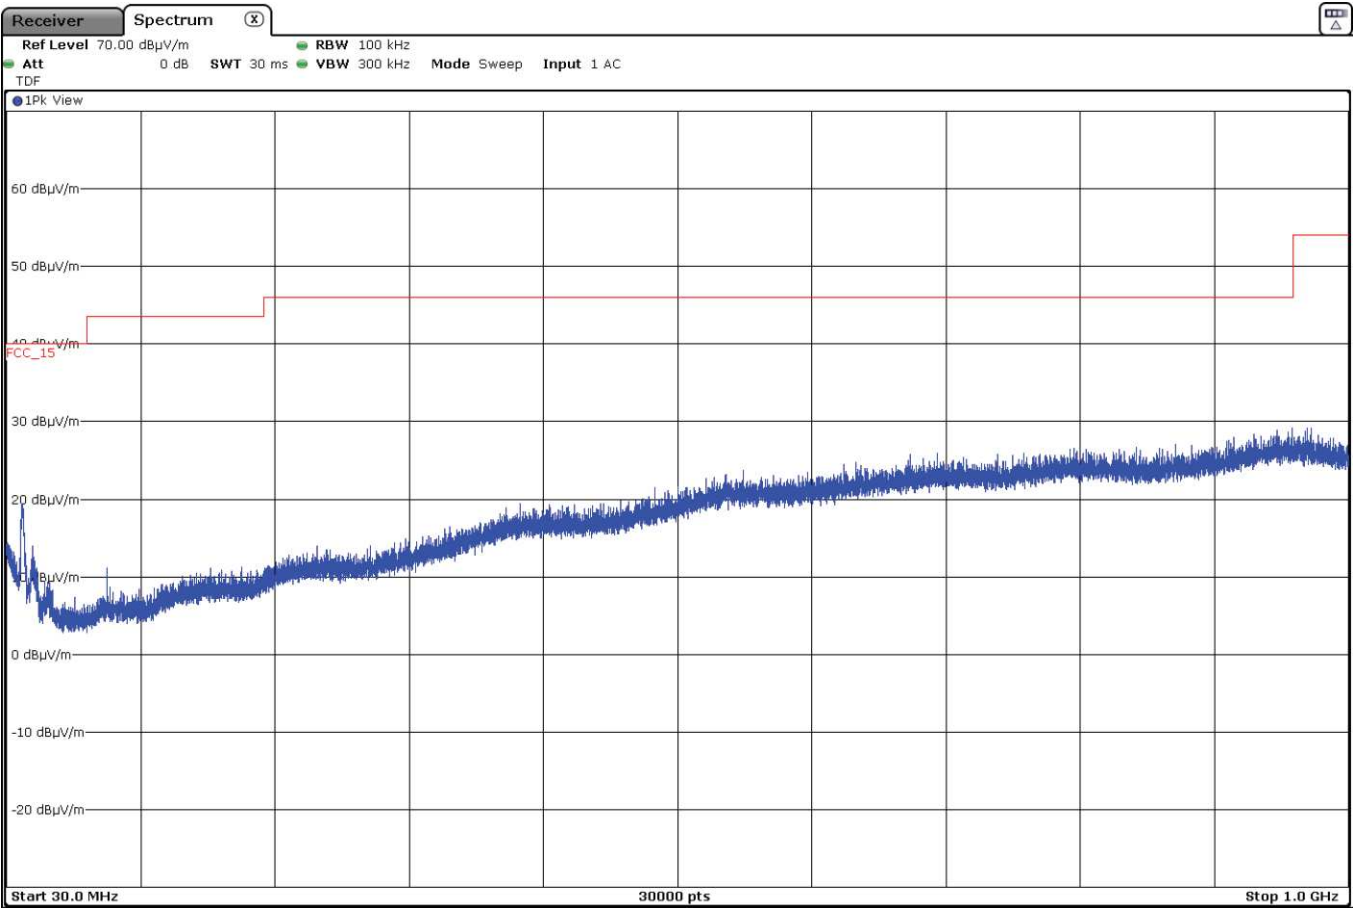


FREQUENCY RANGE 1 - 3 GHz

- Low Channel:

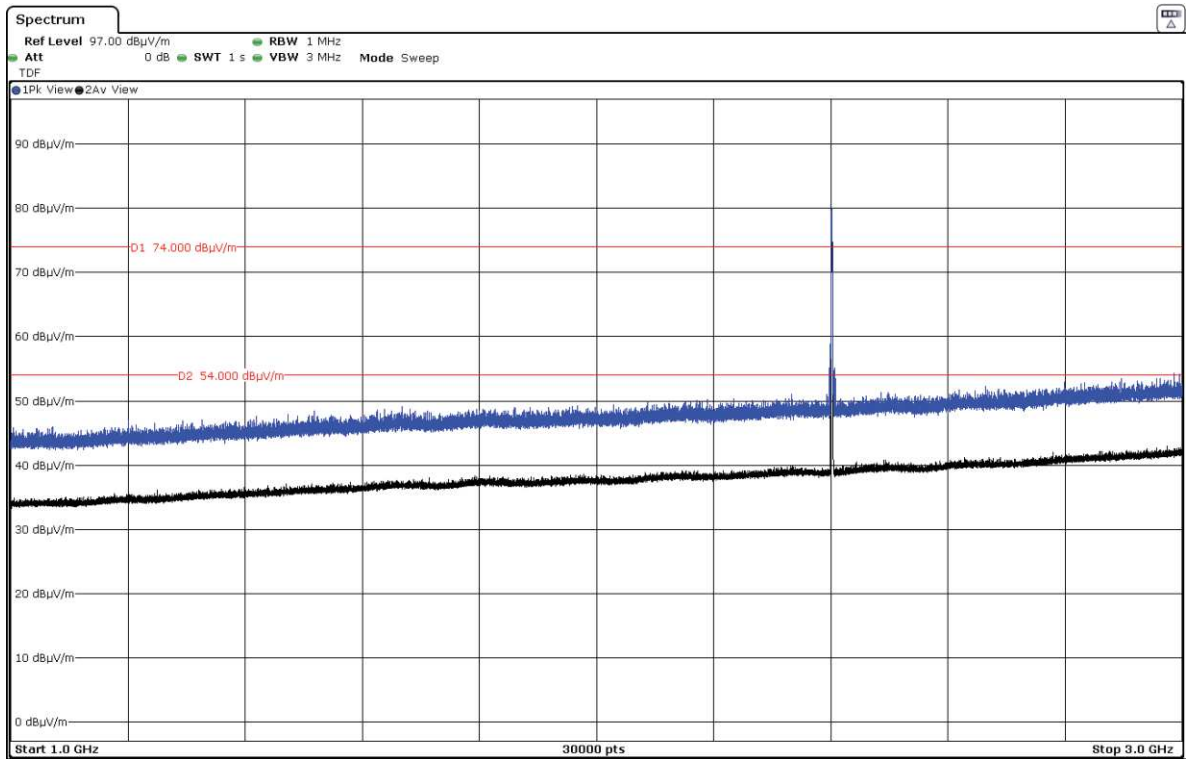


The peak shown in the plot above the limit is the carrier frequency.

- Middle Channel:

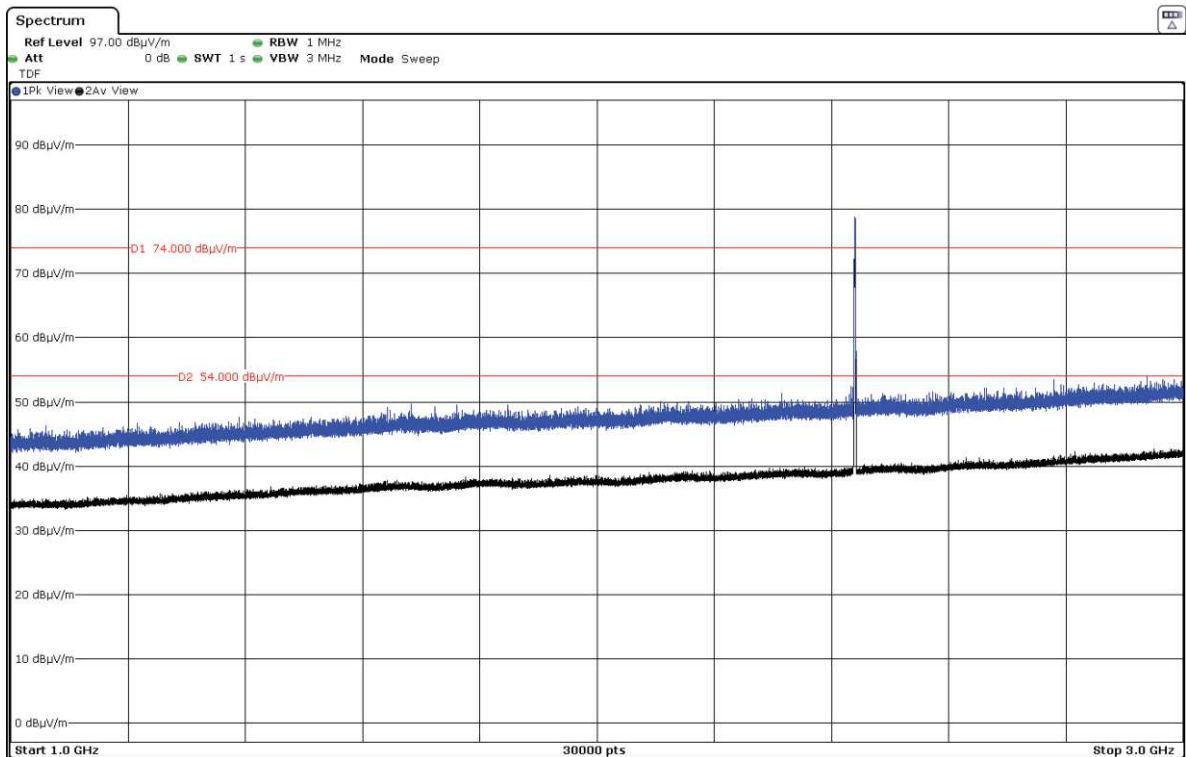

The peak shown in the plot above the limit is the carrier frequency.


- High Channel:

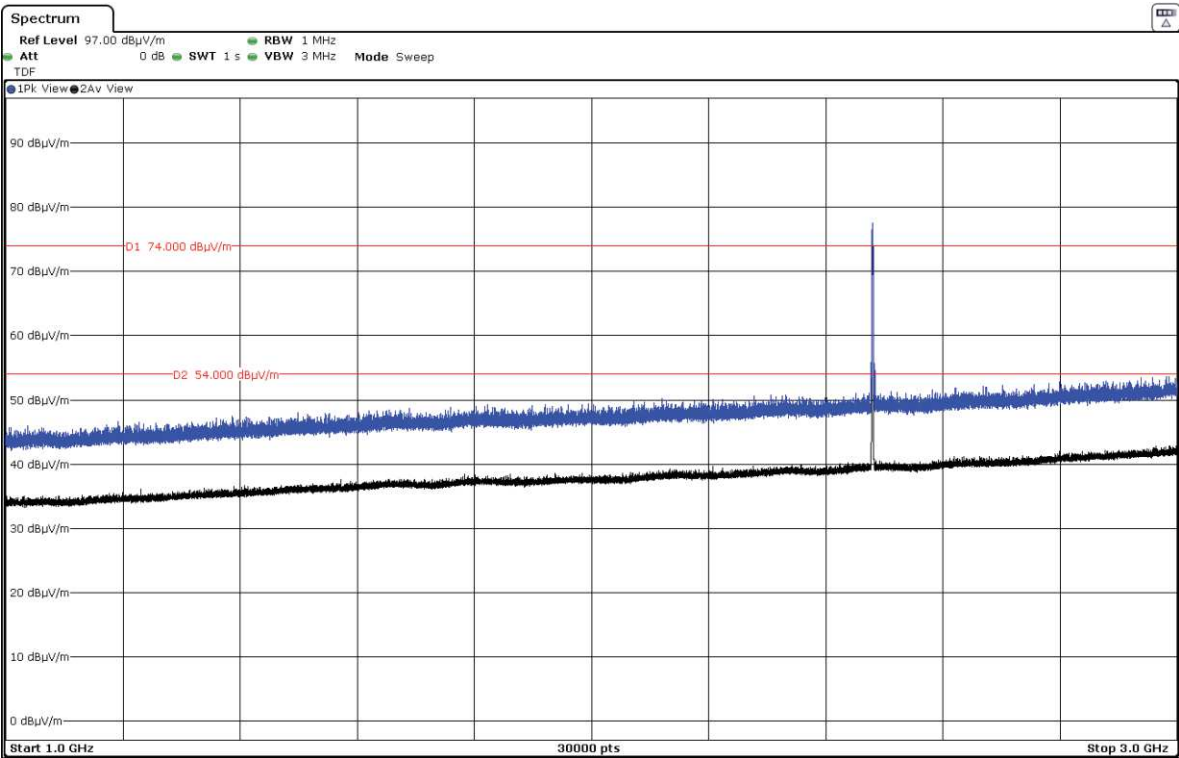


The peak shown in the plot above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz


- Low Channel:

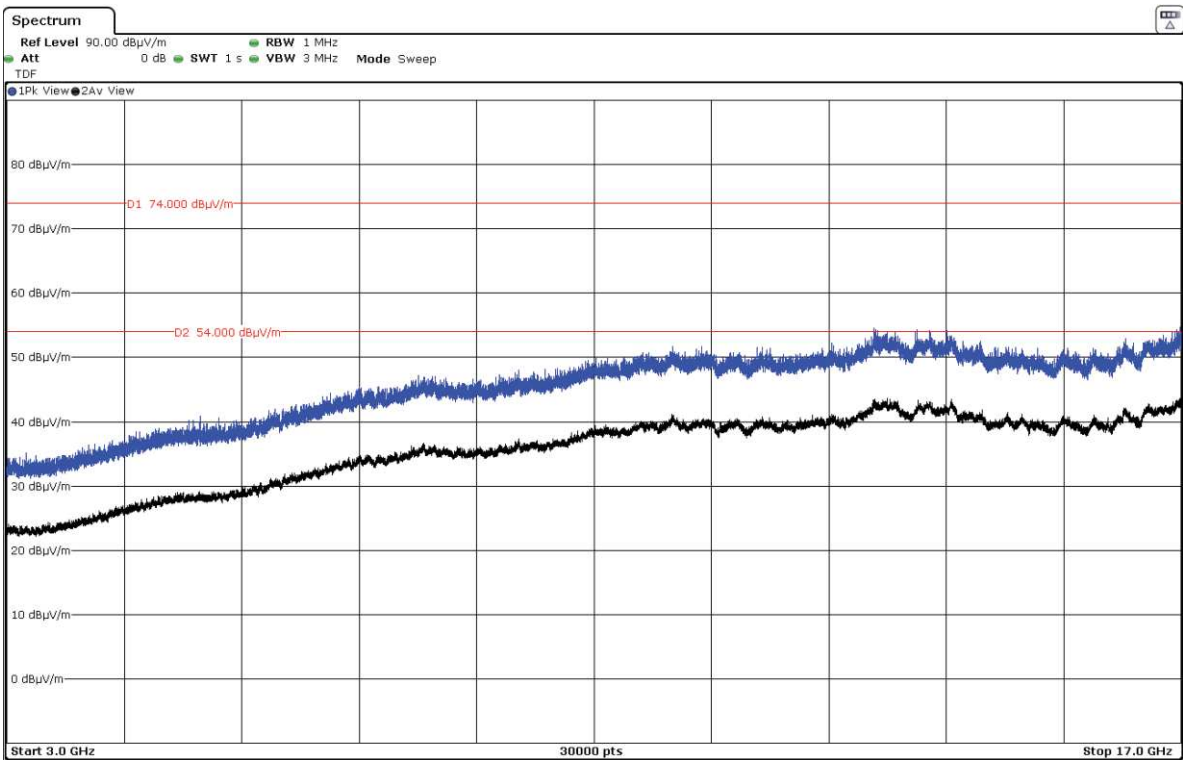

- Middle Channel:

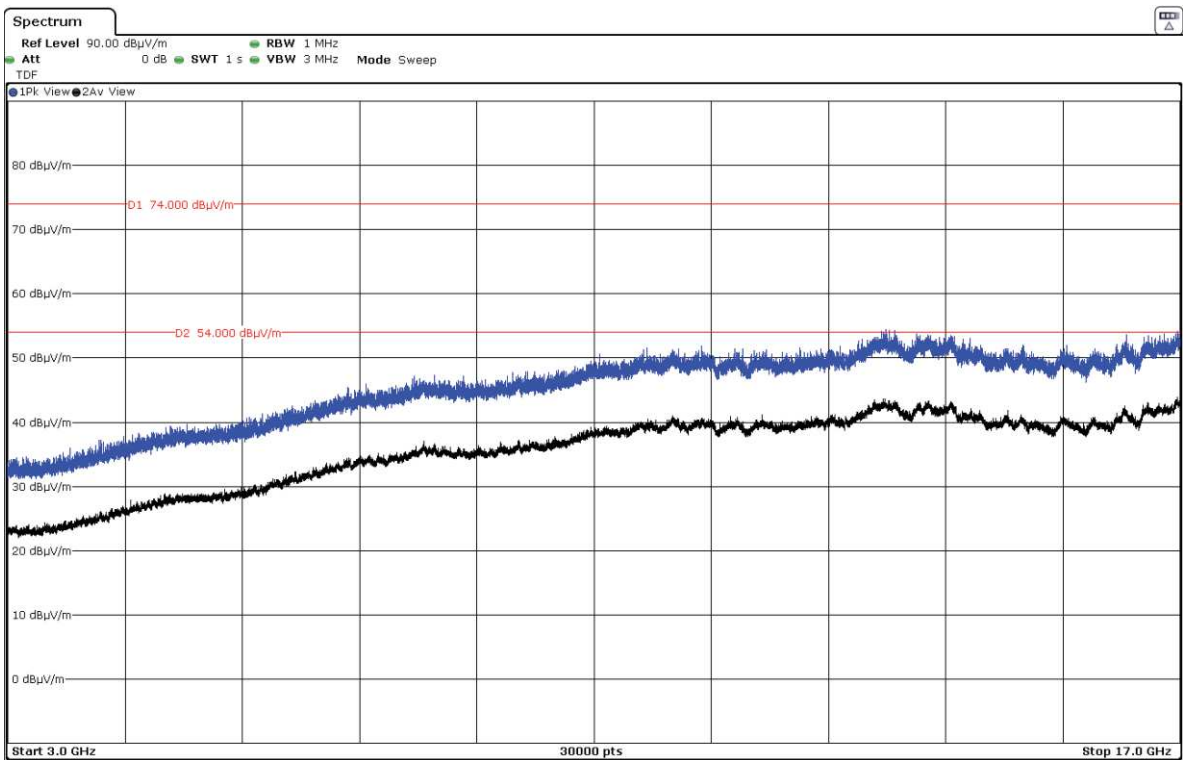


- High Channel:

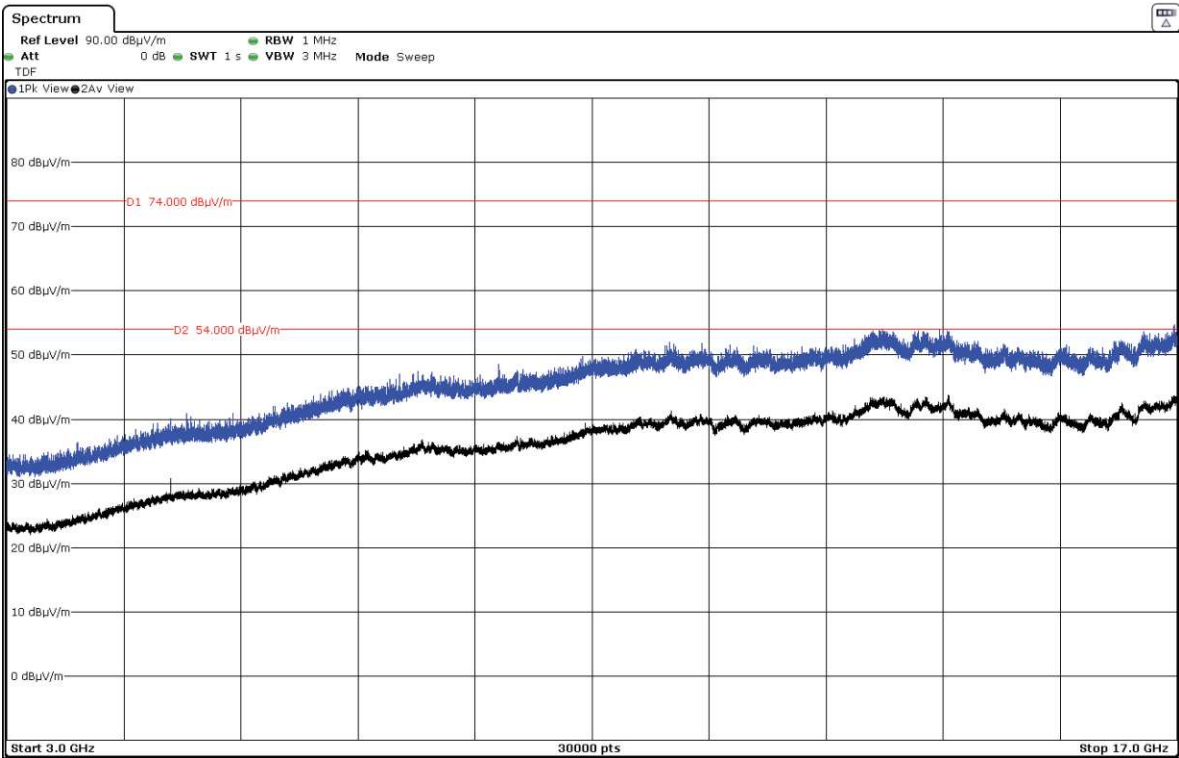


FREQUENCY RANGE 17 - 26 GHz

The spurious signals detected do not depend on the operating channel, so this plot is valid for Low, Middle and High Channels.

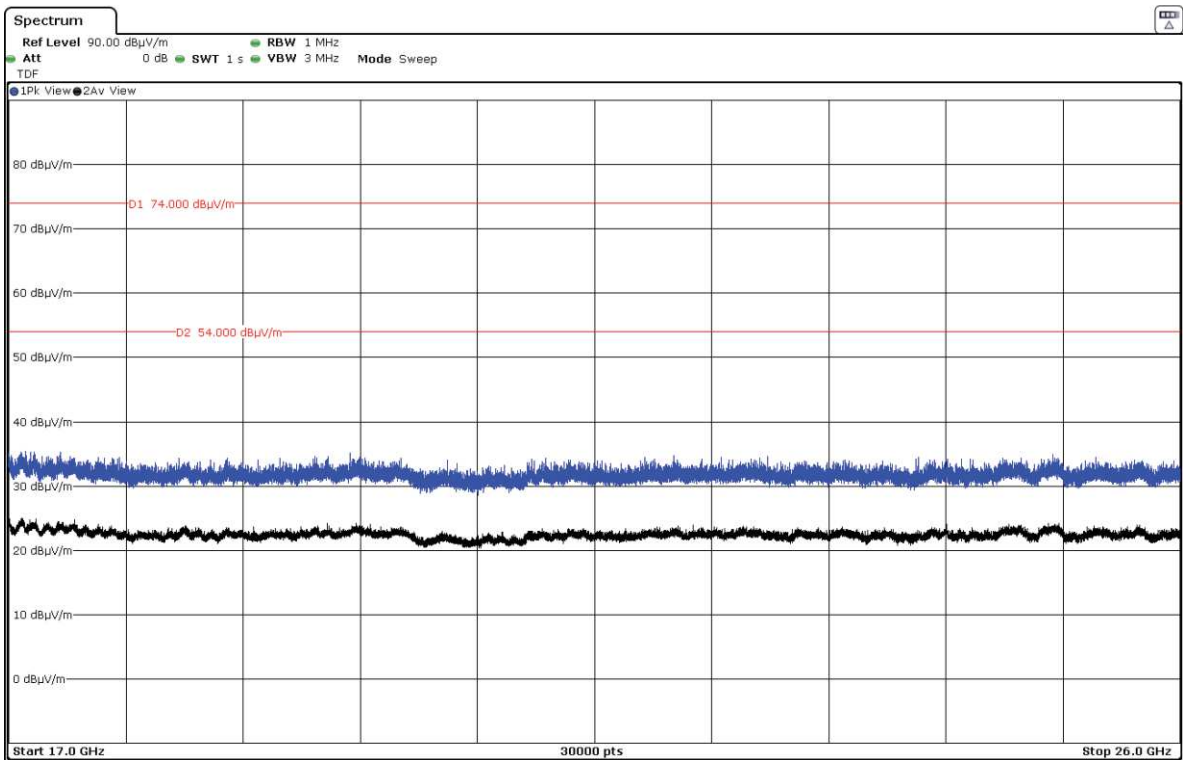


FREQUENCY RANGE 2.31 - 2.39 GHz


- Low Channel:

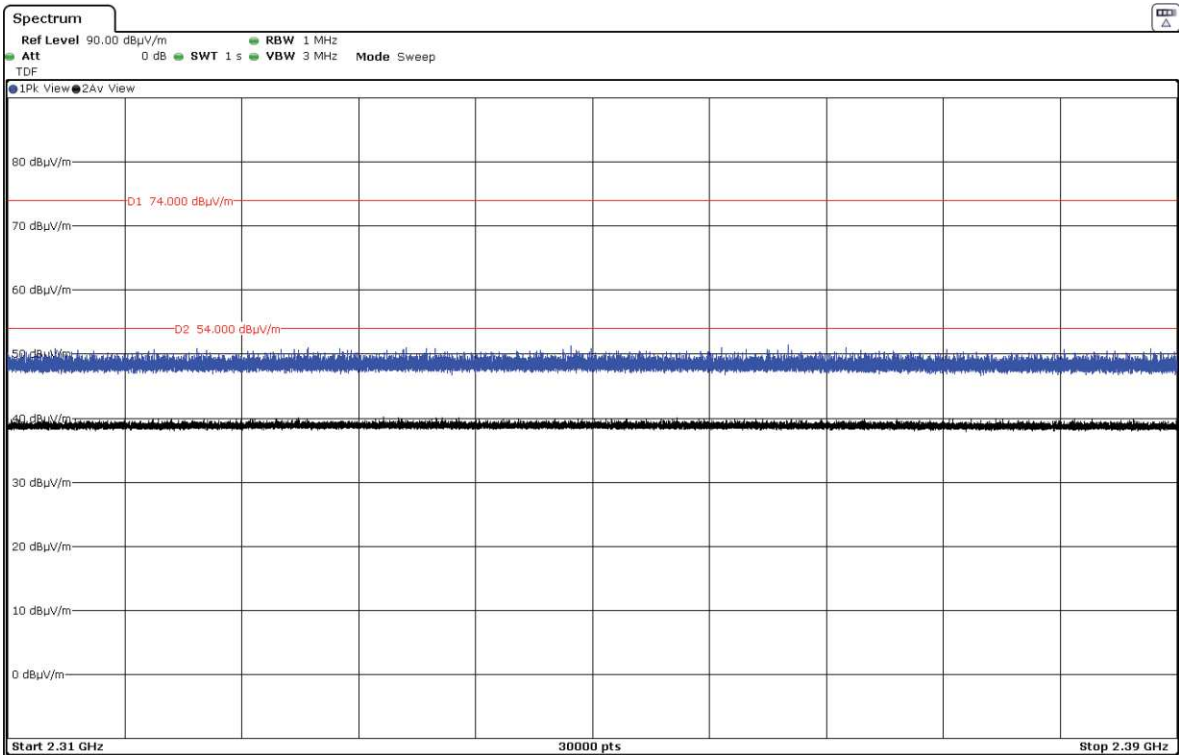

- Middle Channel:

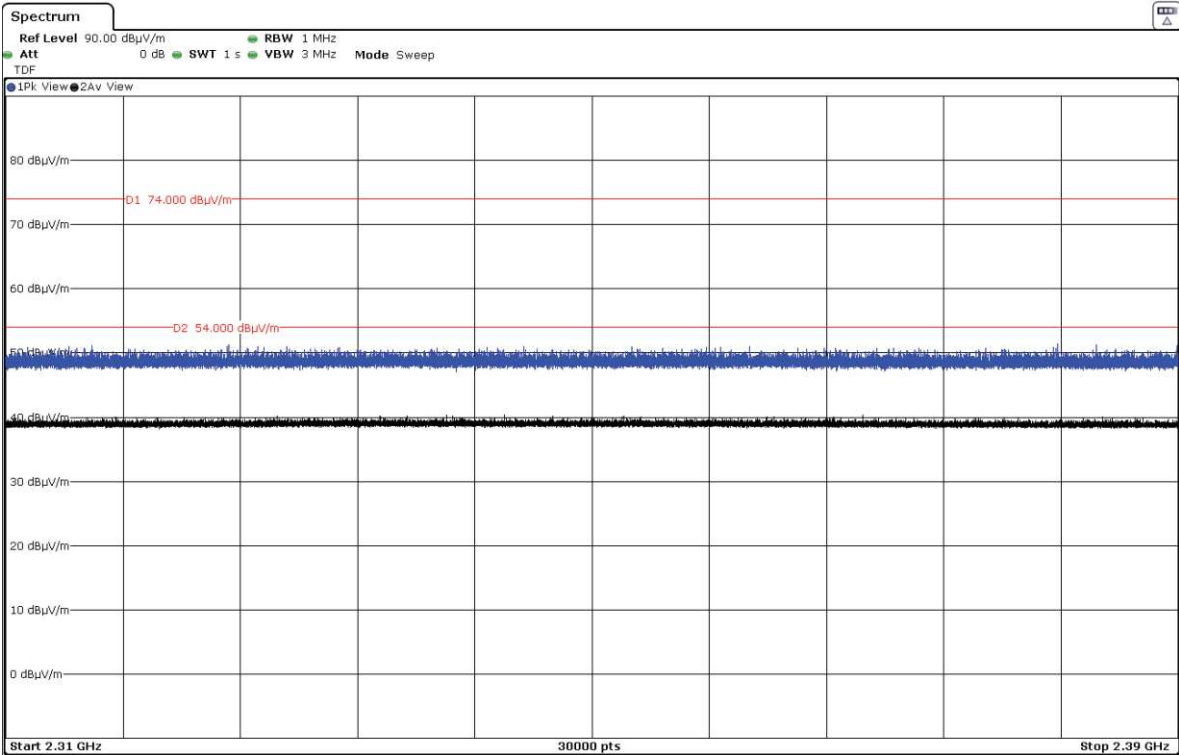


- High Channel:

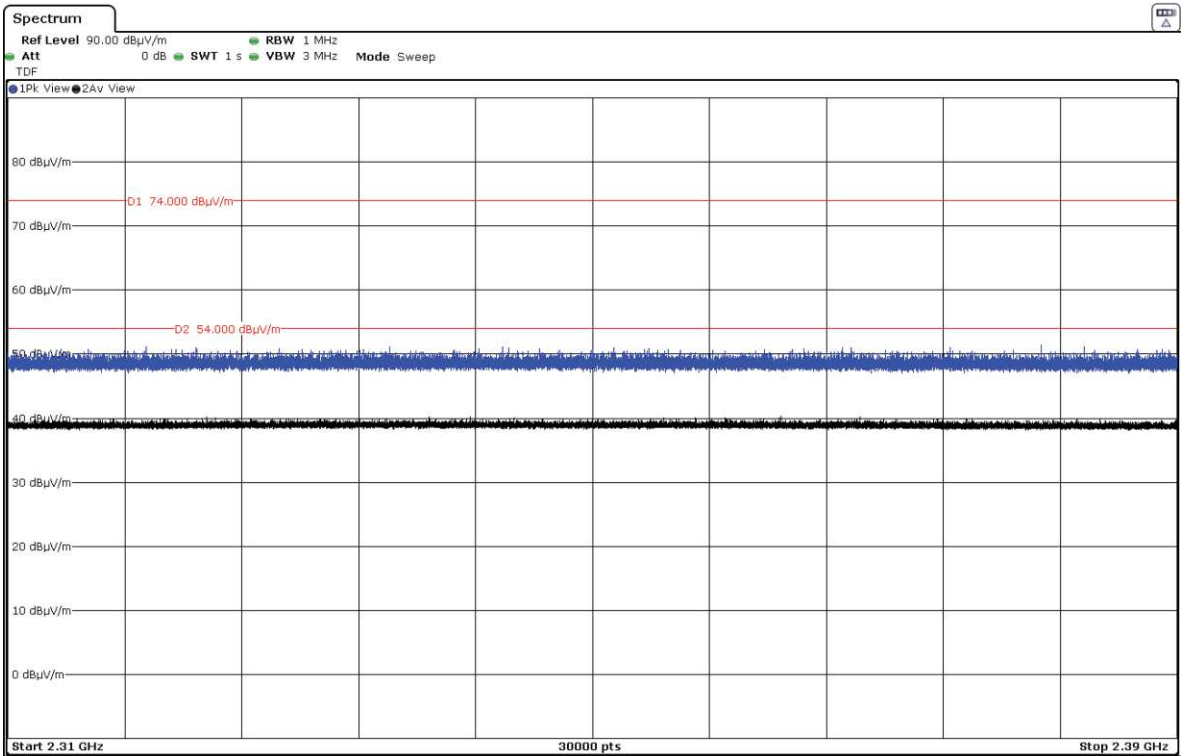


FREQUENCY RANGE 2.4835 - 2.5 GHz


- Low Channel:

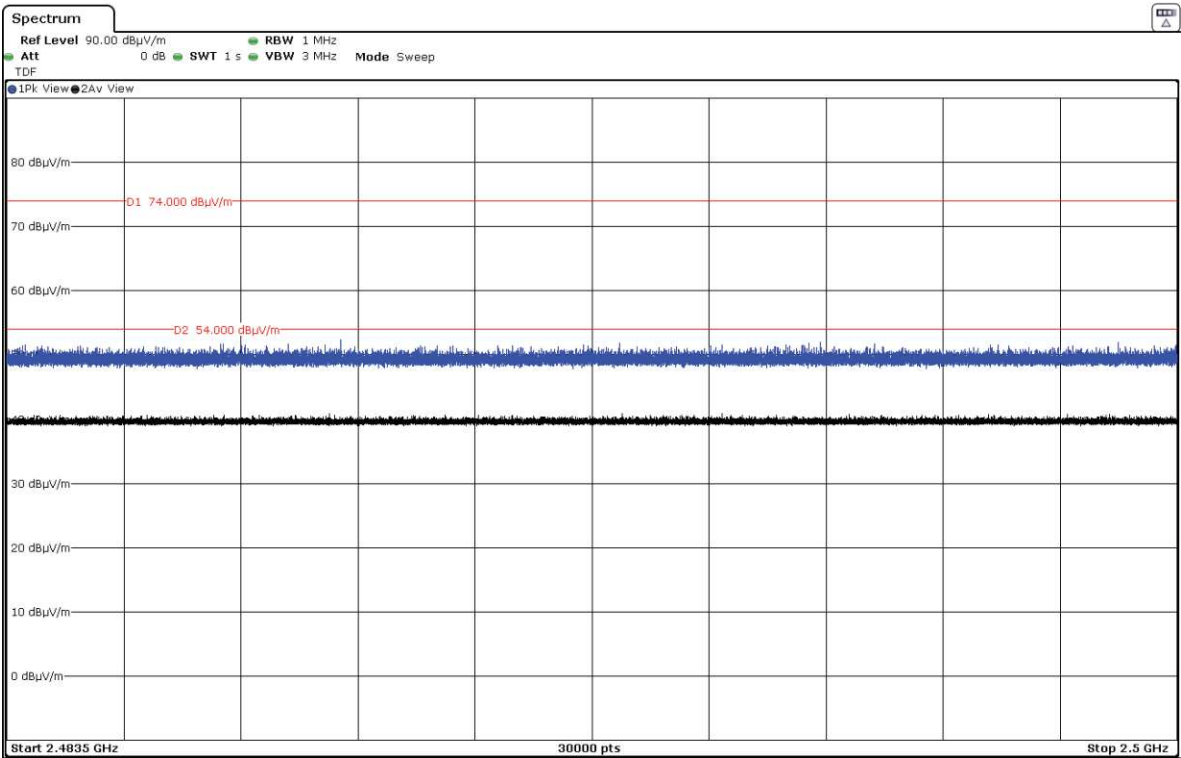

- Middle Channel:

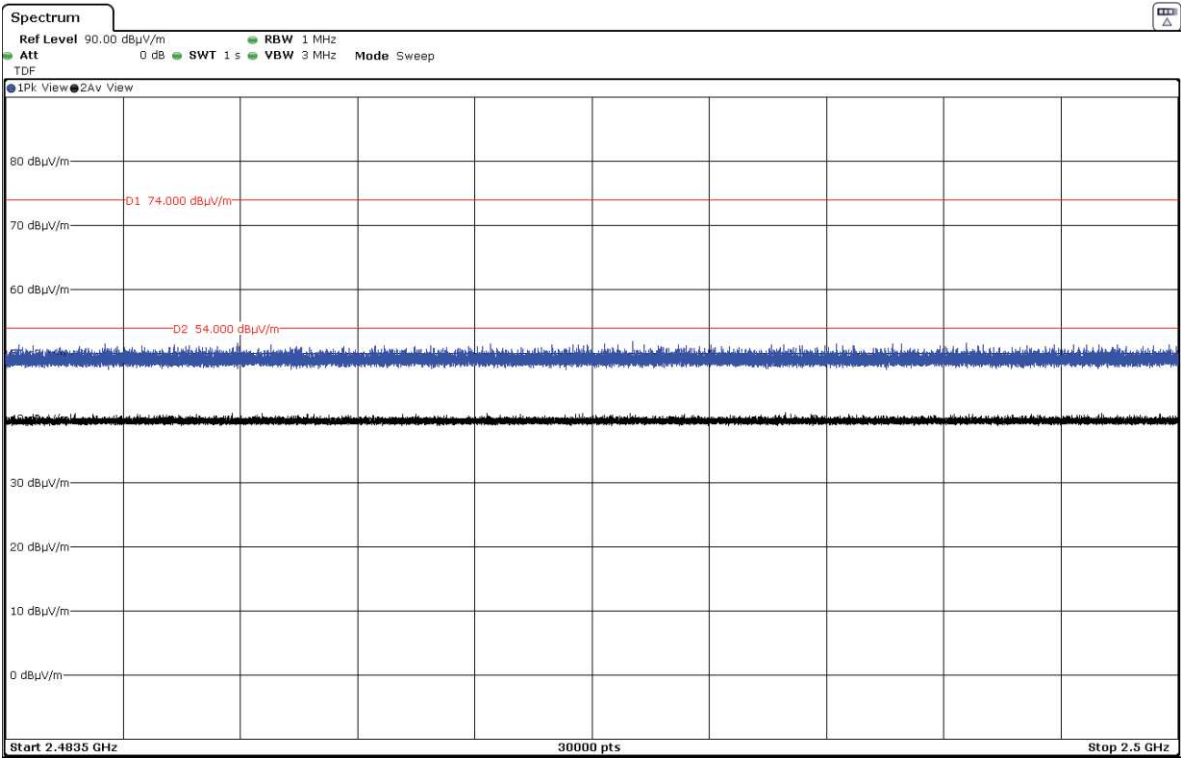

- High Channel:

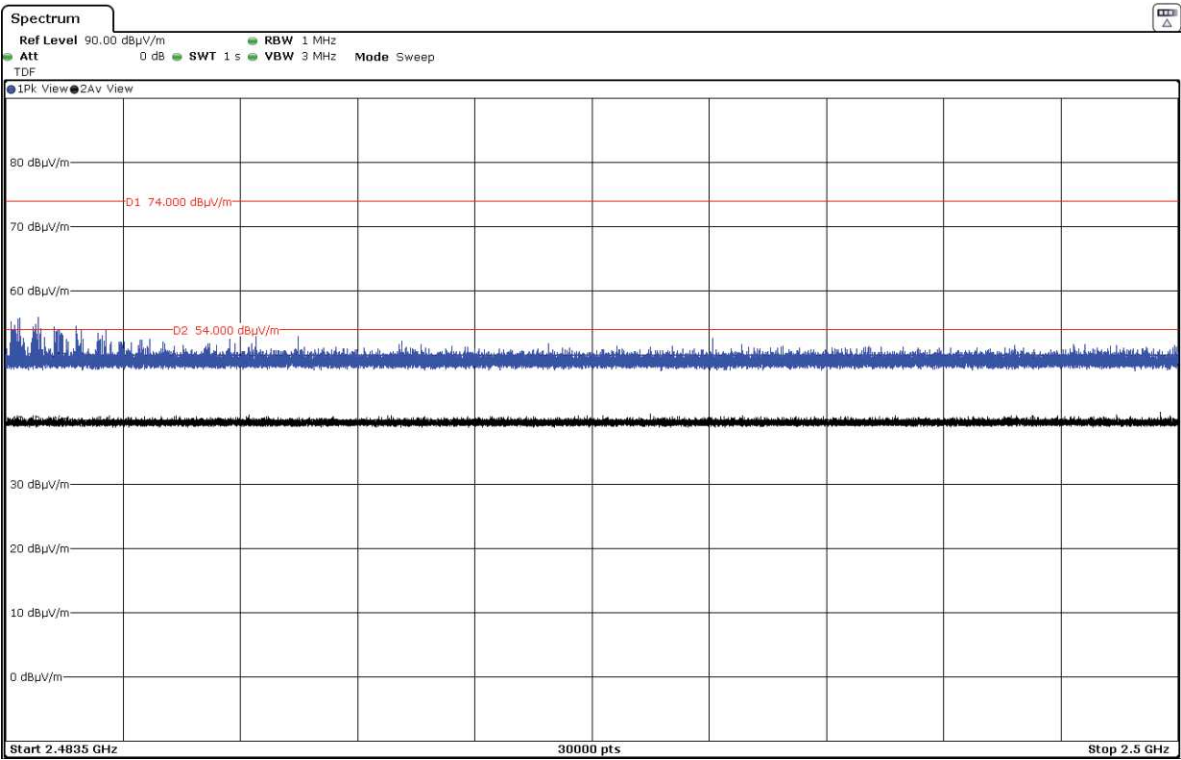

Appendix D: Test results. Proprietary protocol Flora

INDEX

TEST CONDITIONS75

Occupied Bandwidth77

Section 15.249 Subclause (a) / RSS-210 B.10. (a) Field strength of fundamental and harmonics emissions79

Section 15.249 Subclause (d) / RSS-210 B.10. (b) Emissions radiated outside of the specific frequency bands82

TEST CONDITIONS

POWER SUPPLY (V):

V nominal: 3.7 Vdc
Type of power supply: DC voltage from battery.
Type of antenna: Integral antenna.
Declared antenna gain: - 7 dBi

TEST FREQUENCIES:

Low Channel: 2402 MHz
Middle Channel: 2440 MHz
High Channel: 2480 MHz

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the spectrum analyser using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-26 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz:

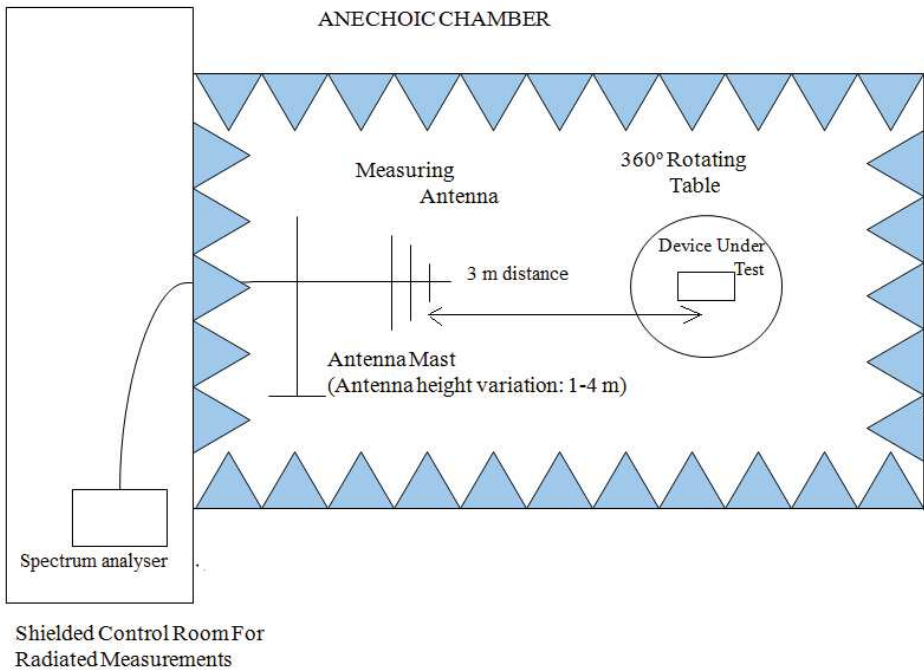

Radiated measurements setup $f > 1$ GHz:

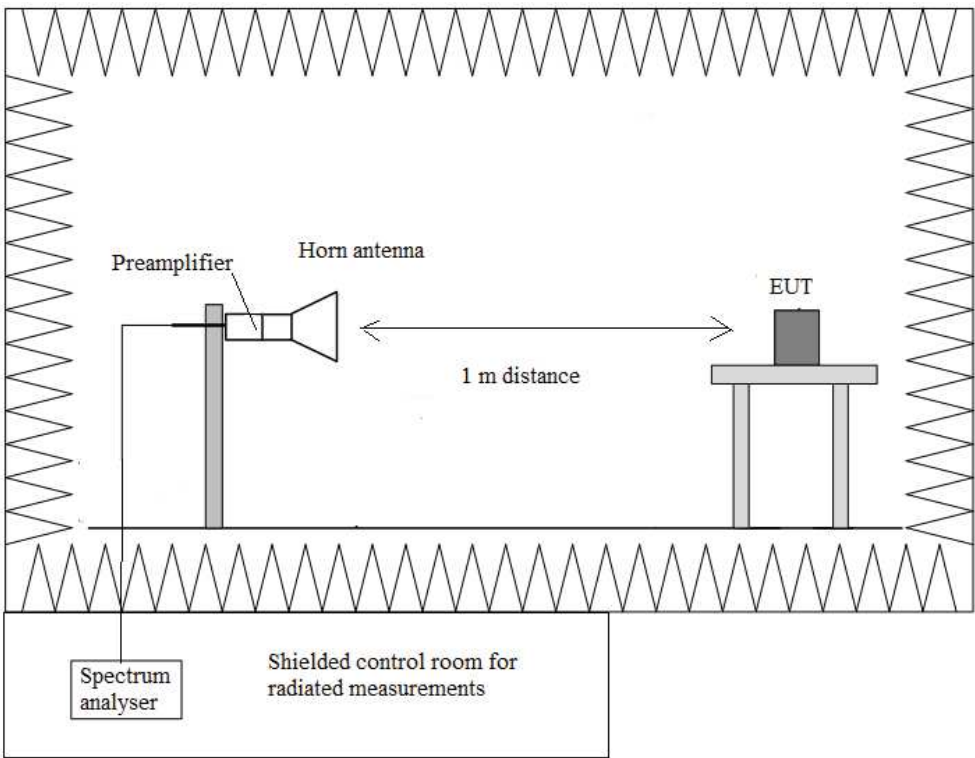


Occupied Bandwidth


RESULTS:

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
99% Bandwidth (MHz)	2.6614	2.6656	2.6642
Measurement Uncertainty (kHz)	<±5.00		


- Low Channel:

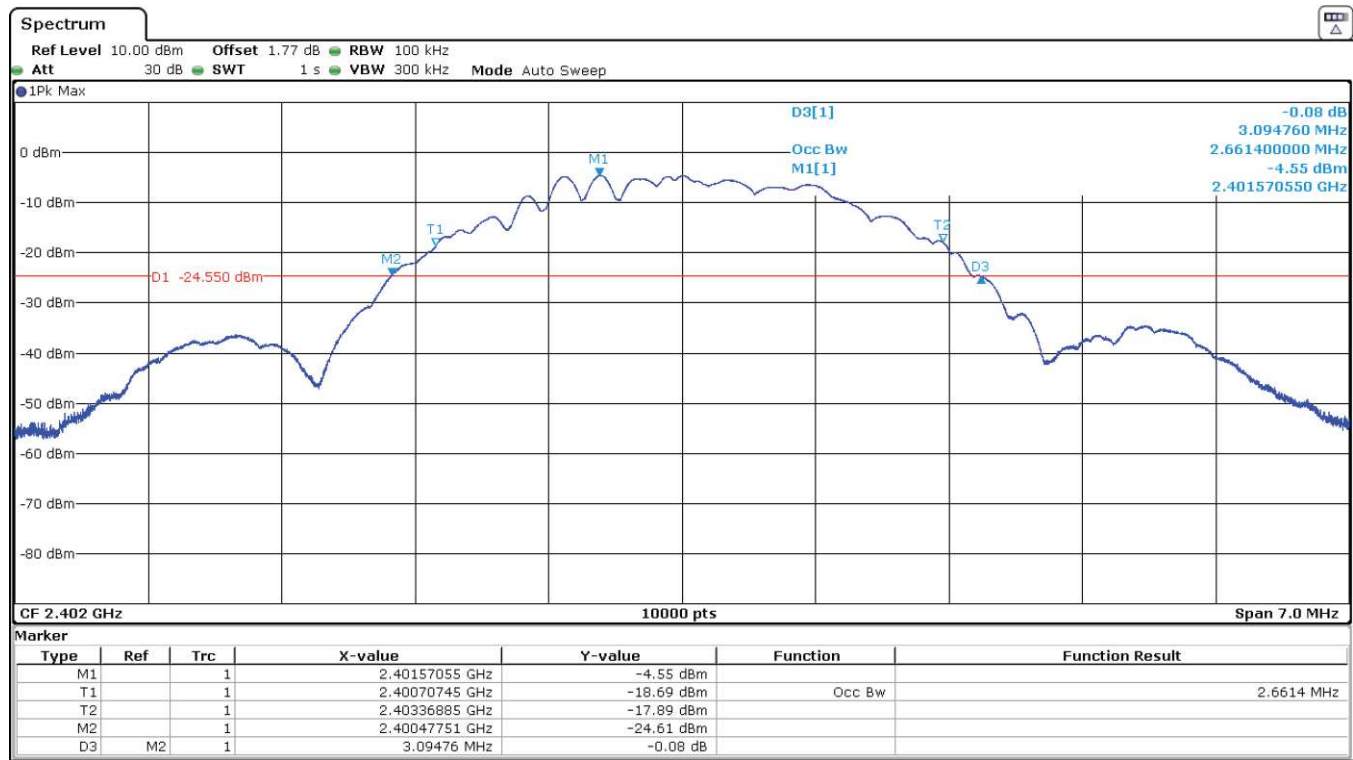

- Middle Channel:

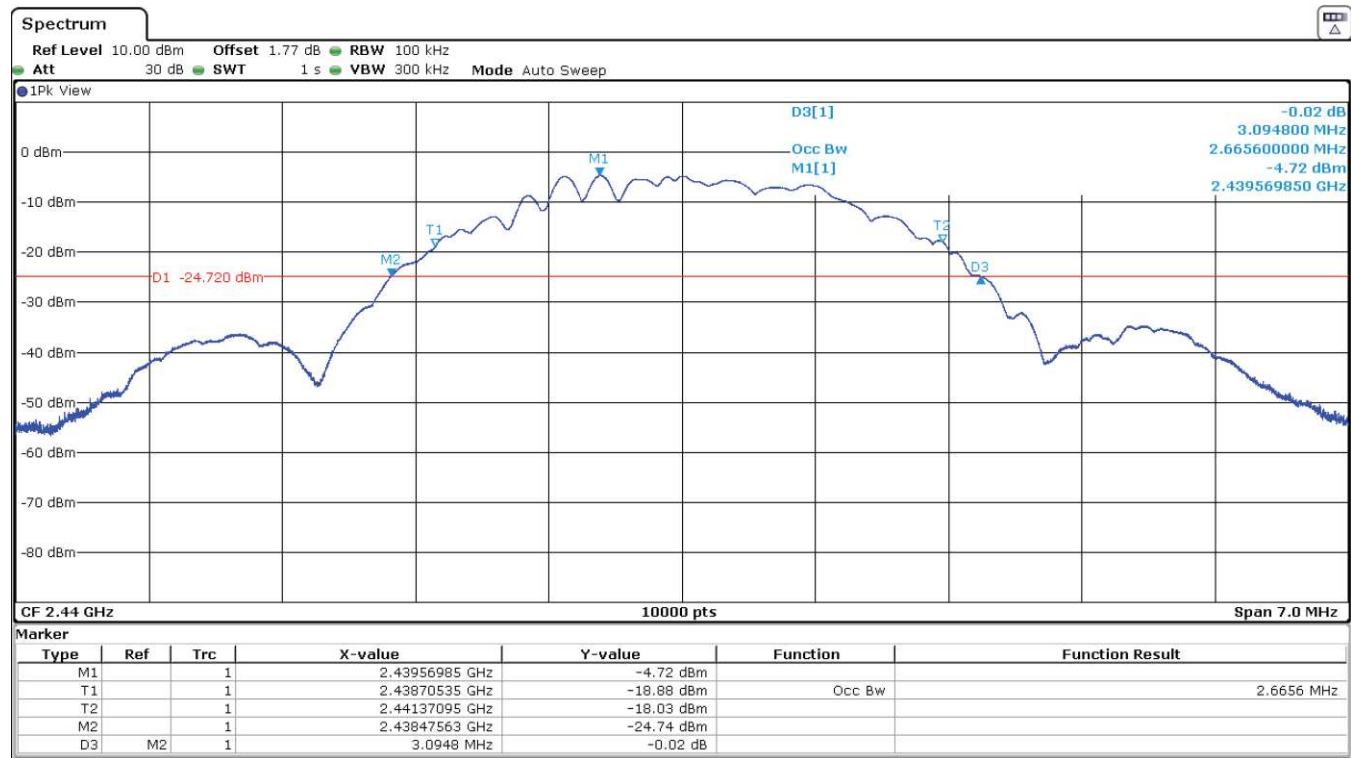

- High Channel:

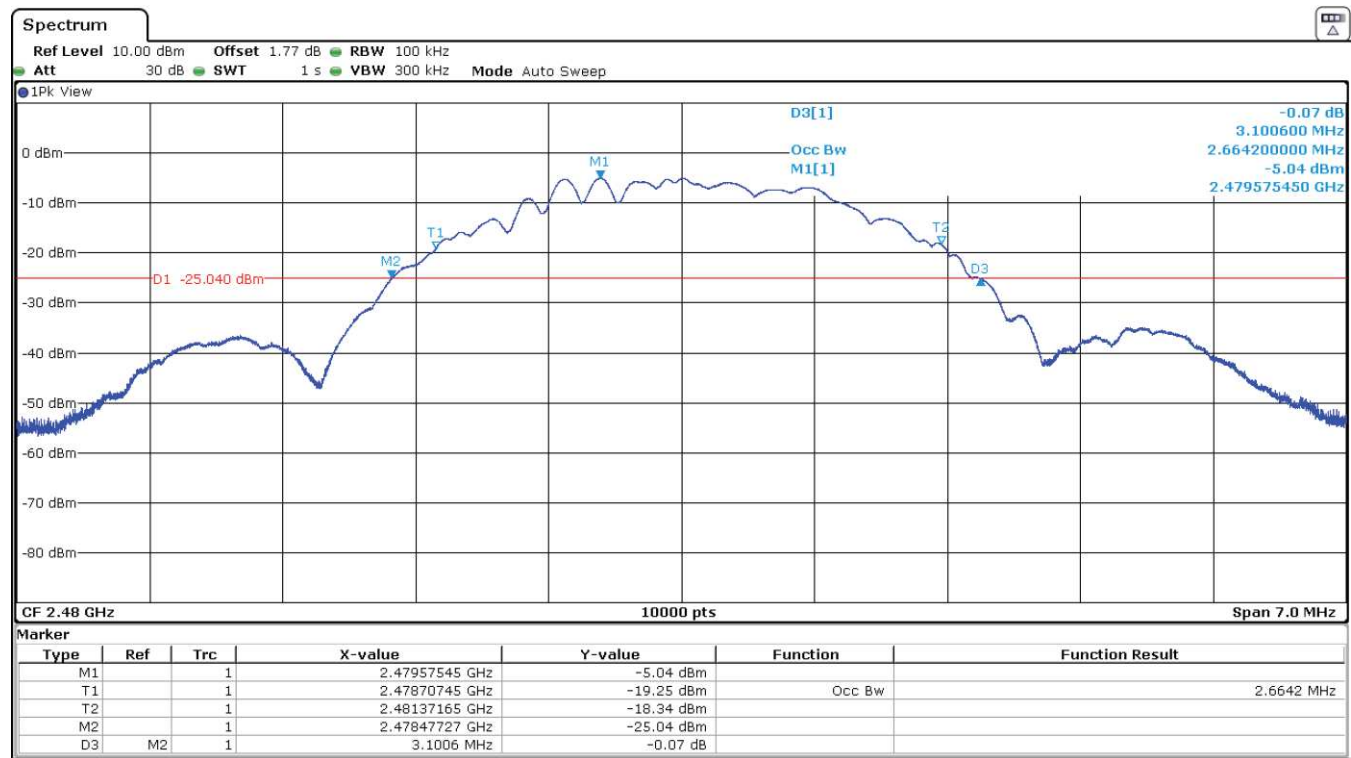

Section 15.249 Subclause (a) / RSS-210 B.10. (a) Field strength of fundamental and harmonics emissions

SPECIFICATION:

The field strength of emissions from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of fundamental (mV/m)	Field strength (dB μ V/m)	Measurement distance (m)
902 - 928	50	93.98	3
2400 – 2483.5	50	93.98	3
5725 - 5875	50	93.98	3
24000-24250	250	107.96	3


For frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

RESULTS:


	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Average Field Strength (dB μ V/m)	78.16	78.54	77.08
Peak Field Strength (dB μ V/m)	79.92	80.46	79.16
Measurement Uncertainty (dB)	< $\pm$ 3.05		

Verdict: PASS


- Low Channel:

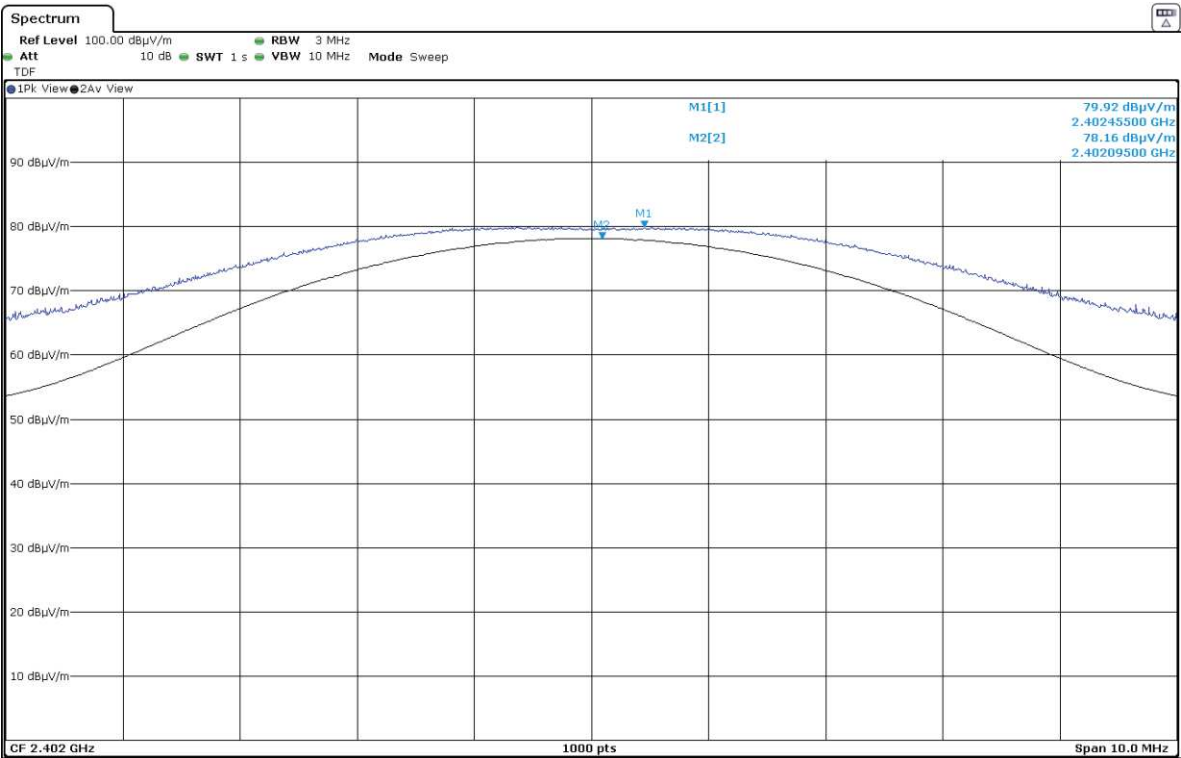

- Middle Channel:

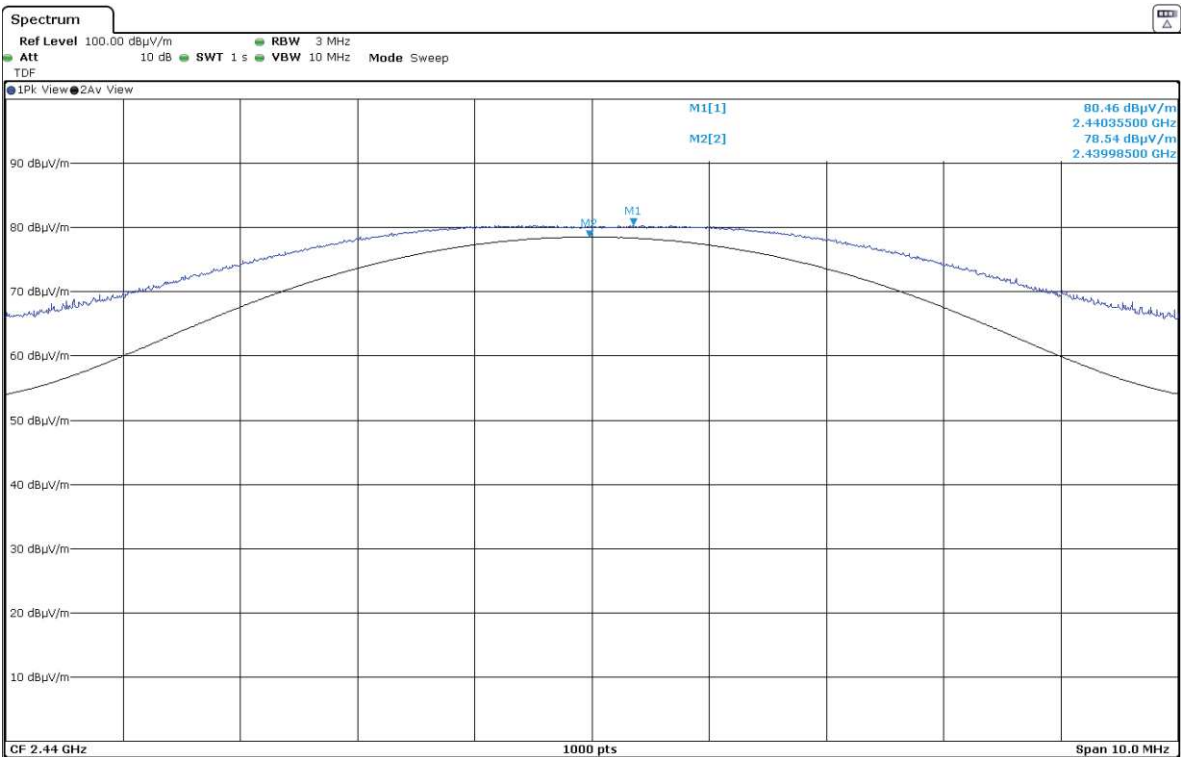

- High Channel:

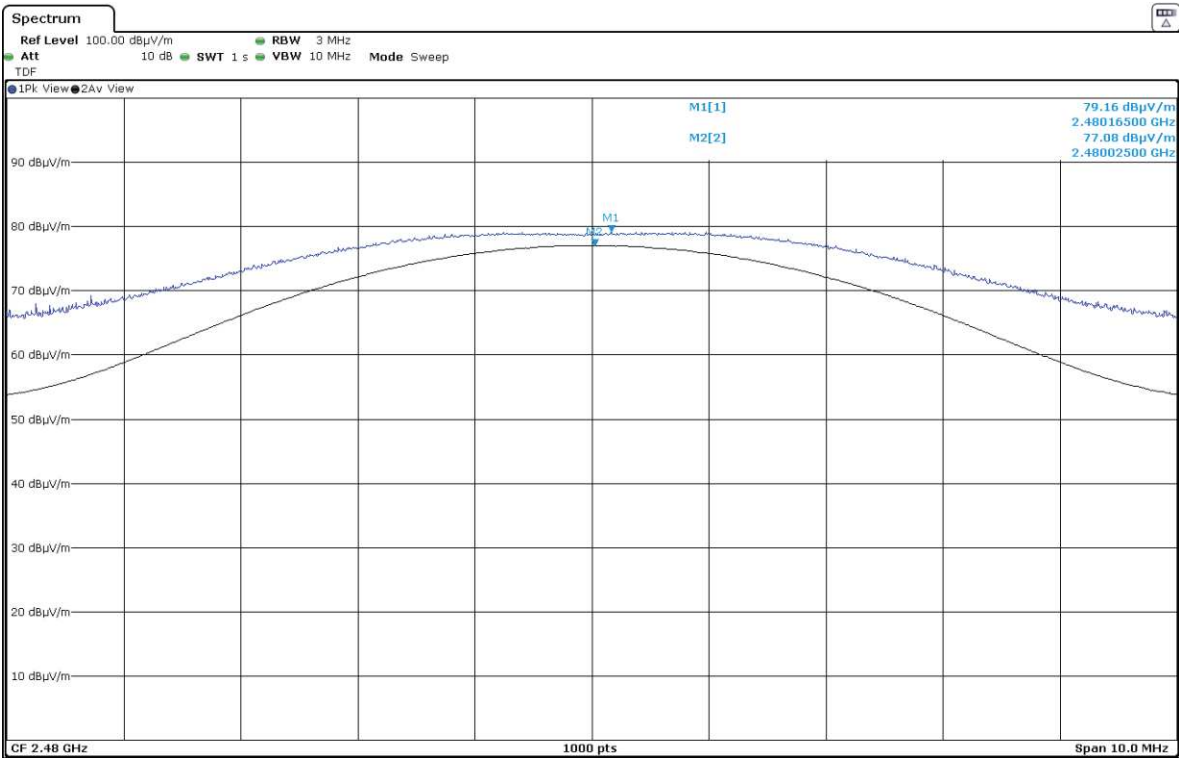

Section 15.249 Subclause (d) / RSS-210 B.10. (b) Emissions radiated outside of the specific frequency bands

SPECIFICATION:

The field strength of harmonics from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of harmonics ($\mu\text{V/m}$)	Field strength of harmonics ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
902 - 928	500	54	3
2400 – 2483.5	500	54	3
5725 - 5875	500	54	3
24000-24250	2500	67.96	3

Emissions radiated outside of the specific frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits specified in section 15.209:

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	$2400/F(\text{kHz})$	-	300
0.490-1.705	$24000/F(\text{kHz})$	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

Whichever is the lesser attenuation.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz.

The spurious signals detected do not depend on the operating channel.

No spurious emissions were found at less than 20 dB of the limit.

Frequency range 1 - 26 GHz.

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- Low Channel (2402 MHz):

No spurious emissions were found at less than 20 dB of the limit.

- Middle Channel (2440 MHz):

No spurious emissions were found at less than 20 dB of the limit.


- High Channel (2480 MHz):

Spurious frequency (GHz)	Detector	Emission Level (dBμV/m)	Polarization	Measurement Uncertainty (dB)
2.48356300	Peak	56.52	H	<±3.70
	Average	40.10		
2.48361000	Peak	56.11	V	
	Average	40.05		
2.48383350	Peak	56.52	V	
	Average	40.10		

Verdict: PASS


FREQUENCY RANGE 30 MHz - 1 GHz

The spurious signals detected do not depend on the operating channel, so this plot is valid for Low, Middle and High Channels.

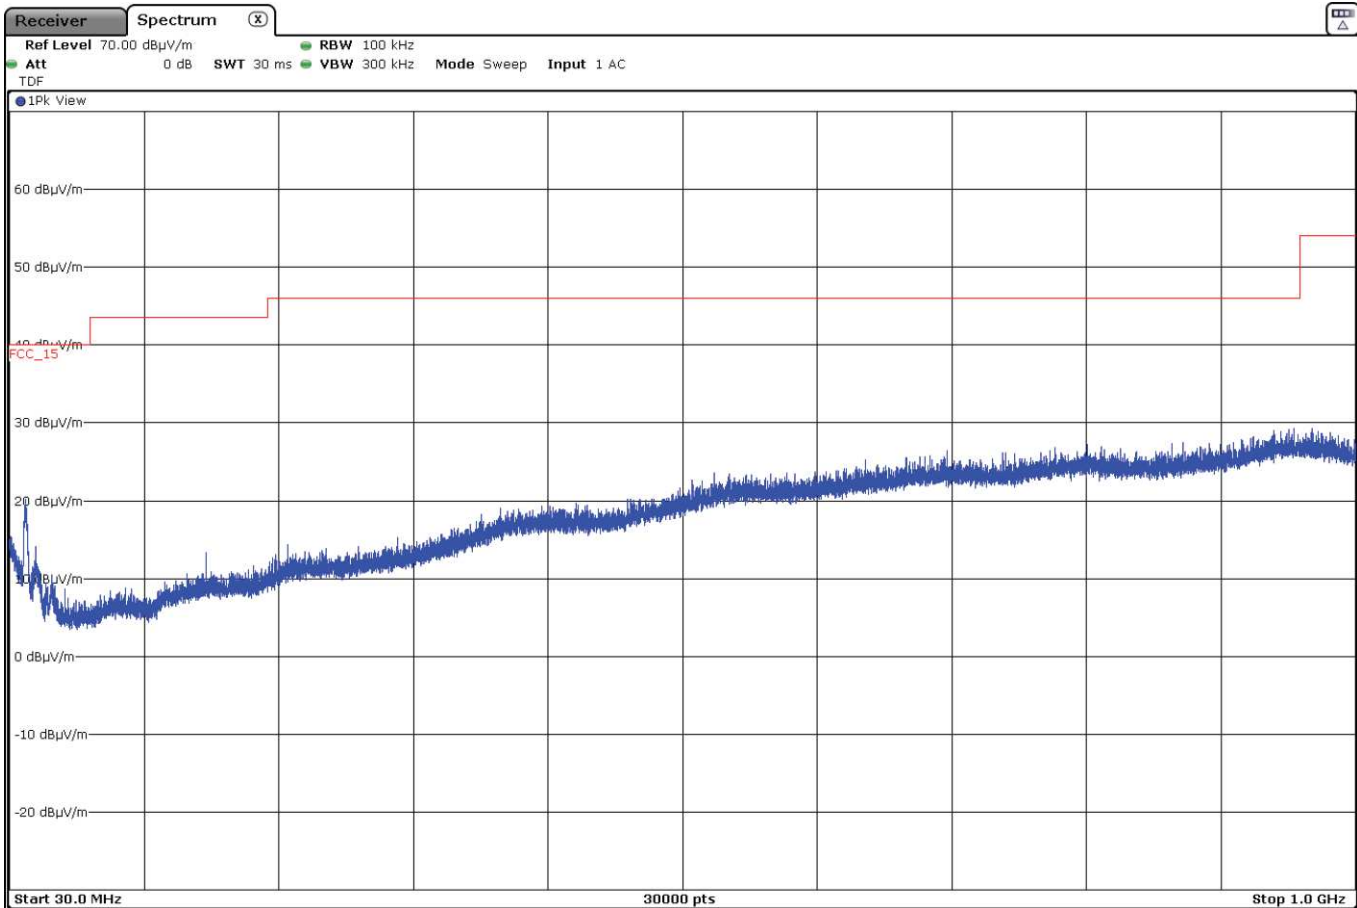


FREQUENCY RANGE 1 - 3 GHz

- Low Channel:

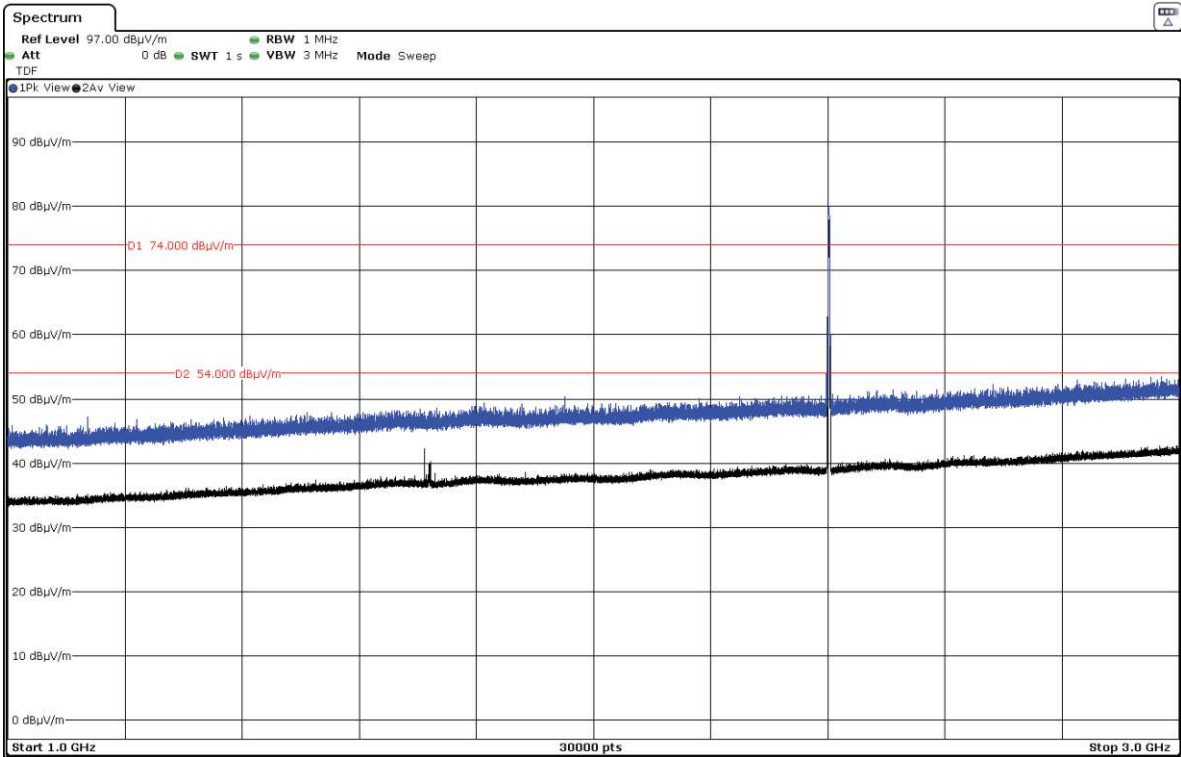


The peak shown in the plot above the limit is the carrier frequency.

- Middle Channel:

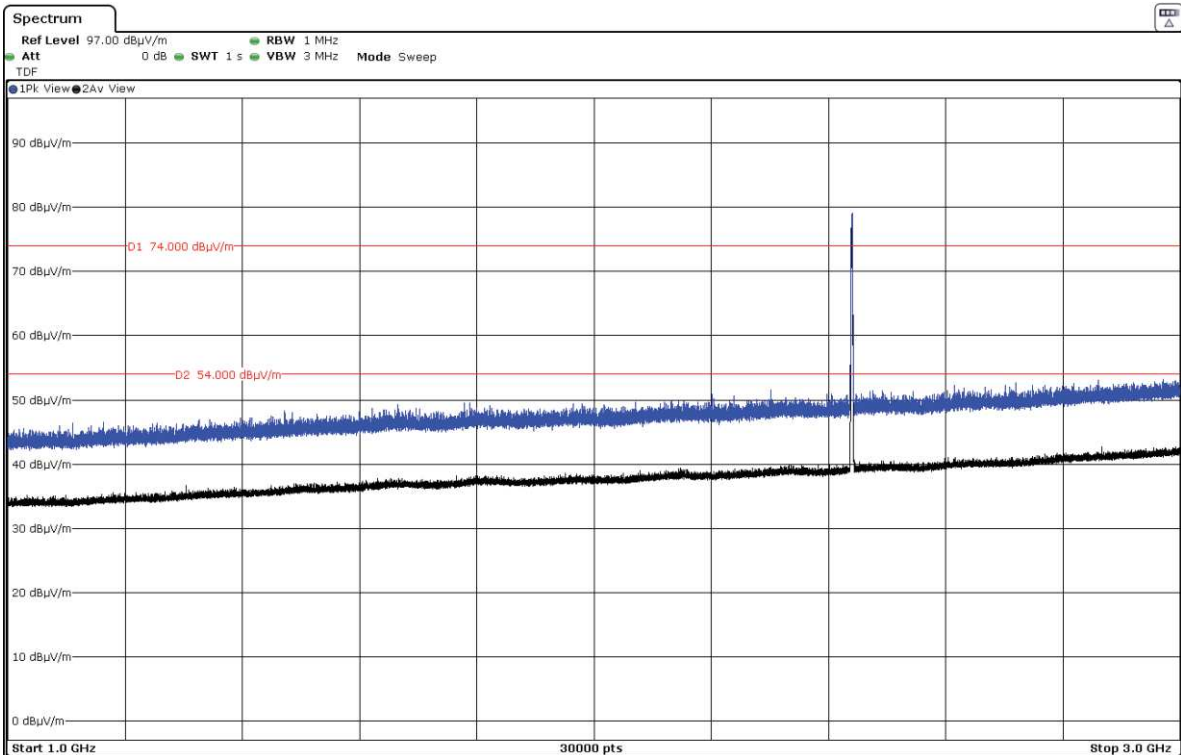

The peak shown in the plot above the limit is the carrier frequency.


- High Channel:

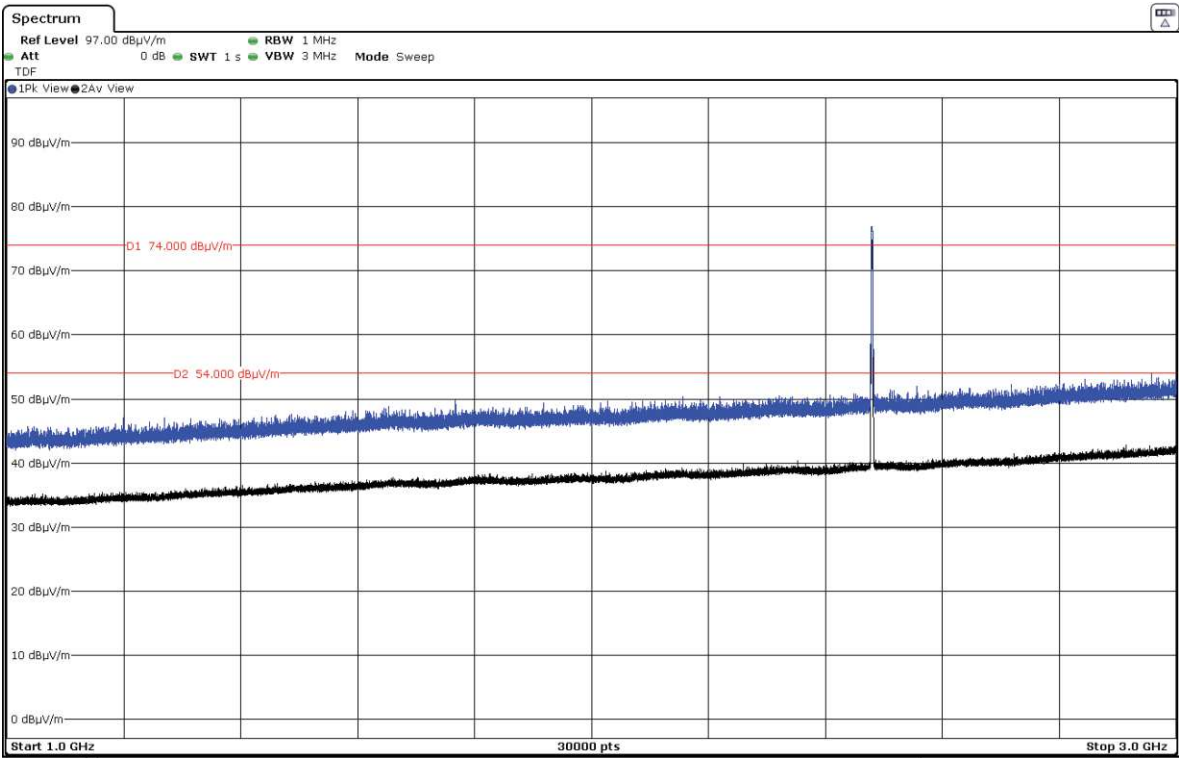


The peak shown in the plot above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz


- Low Channel:

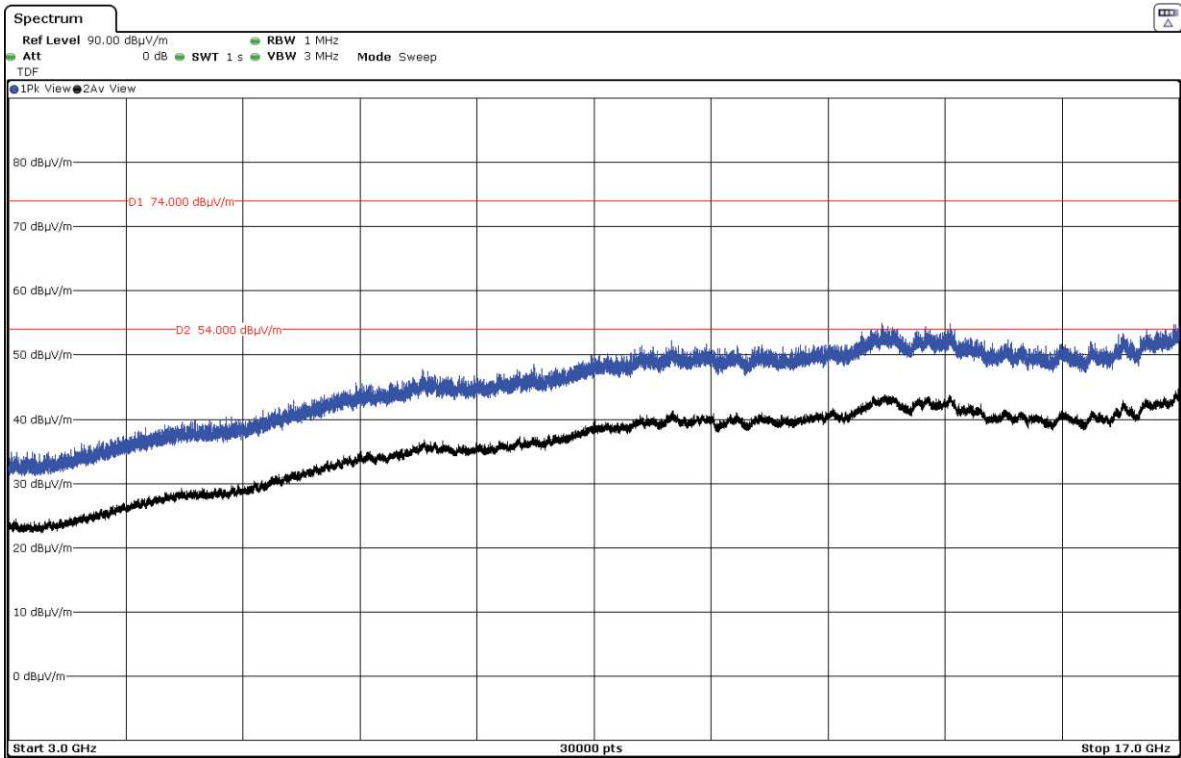

- Middle Channel:

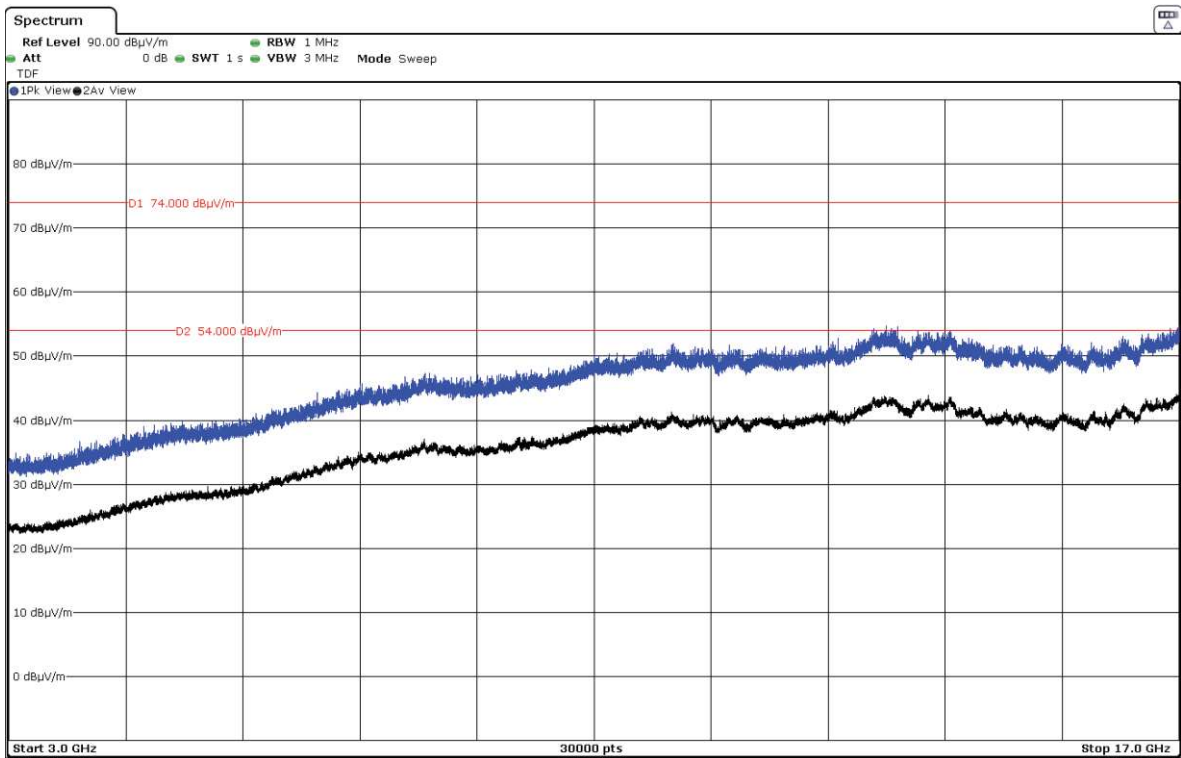


- High Channel:

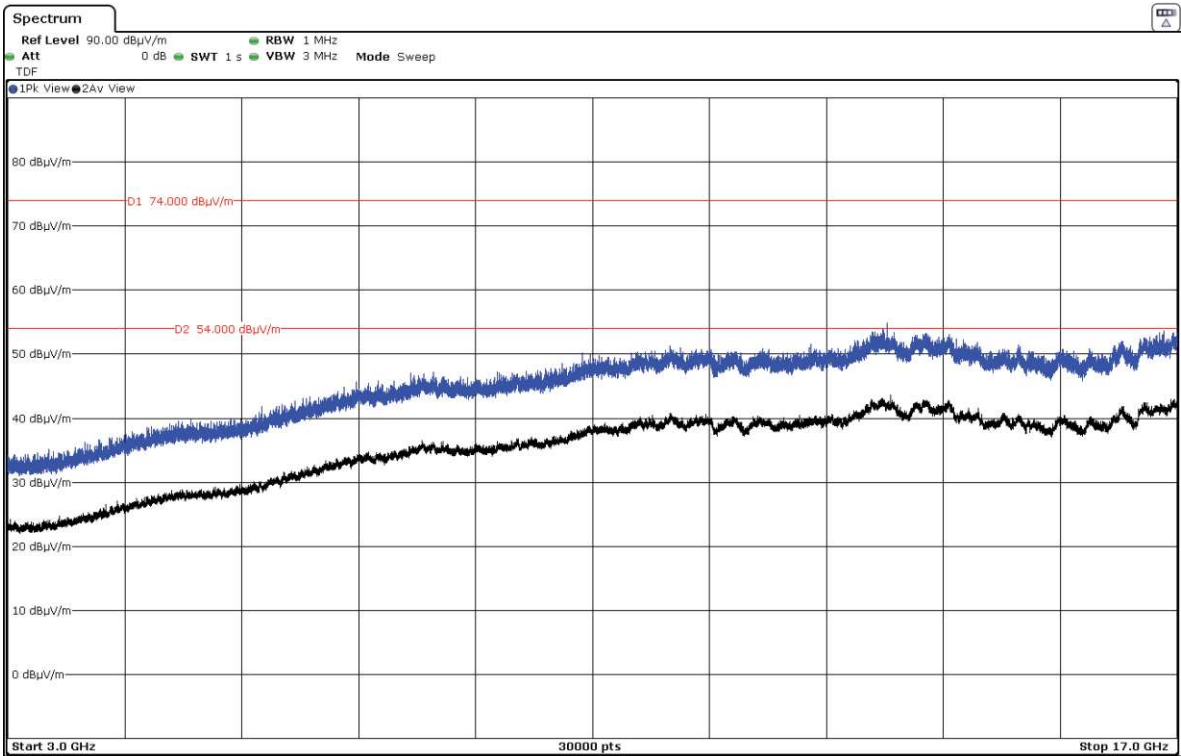


FREQUENCY RANGE 17 - 26 GHz

The spurious signals detected do not depend on the operating channel, so this plot is valid for Low, Middle and High Channels.

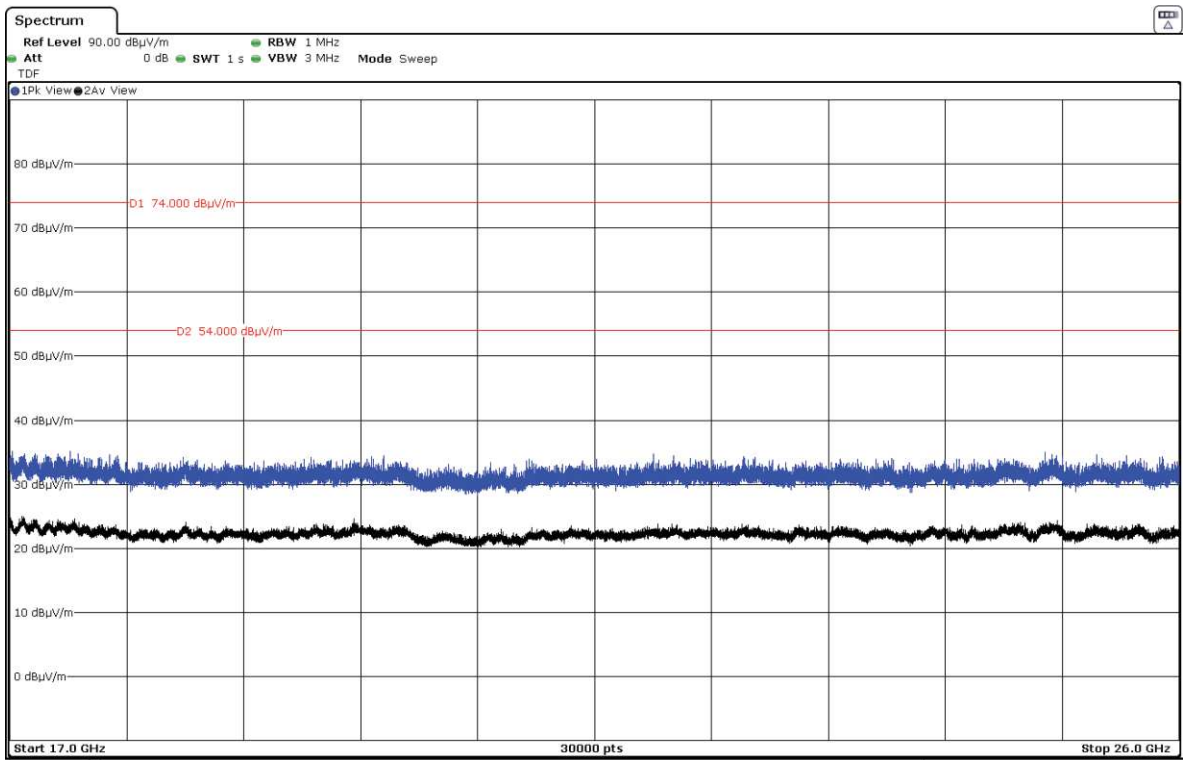


FREQUENCY RANGE 2.31 - 2.39 GHz


- Low Channel:

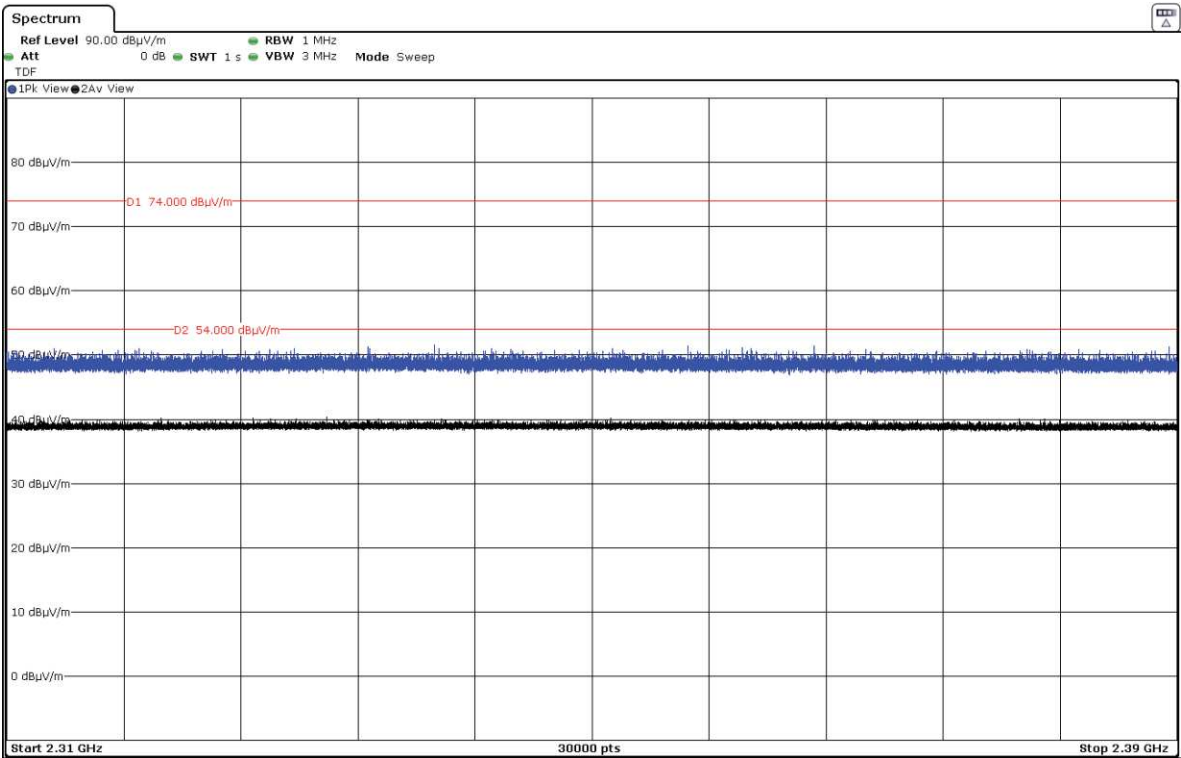

- Middle Channel:

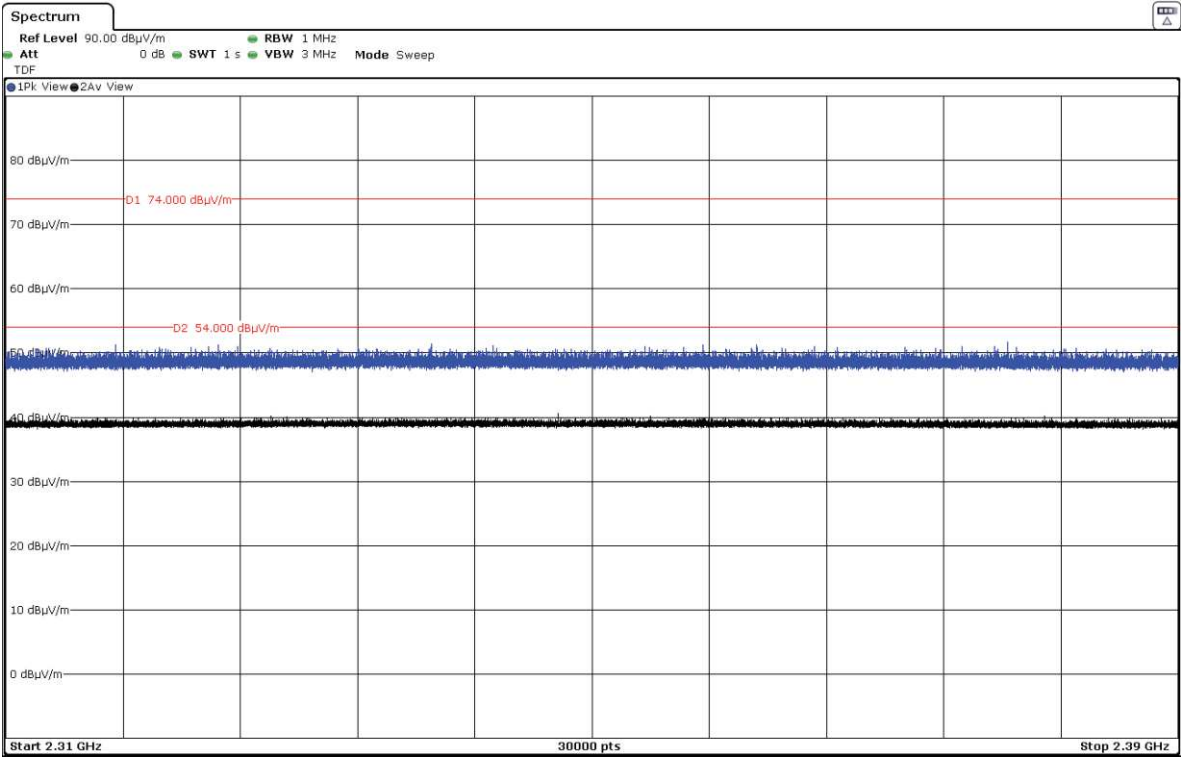


- High Channel:

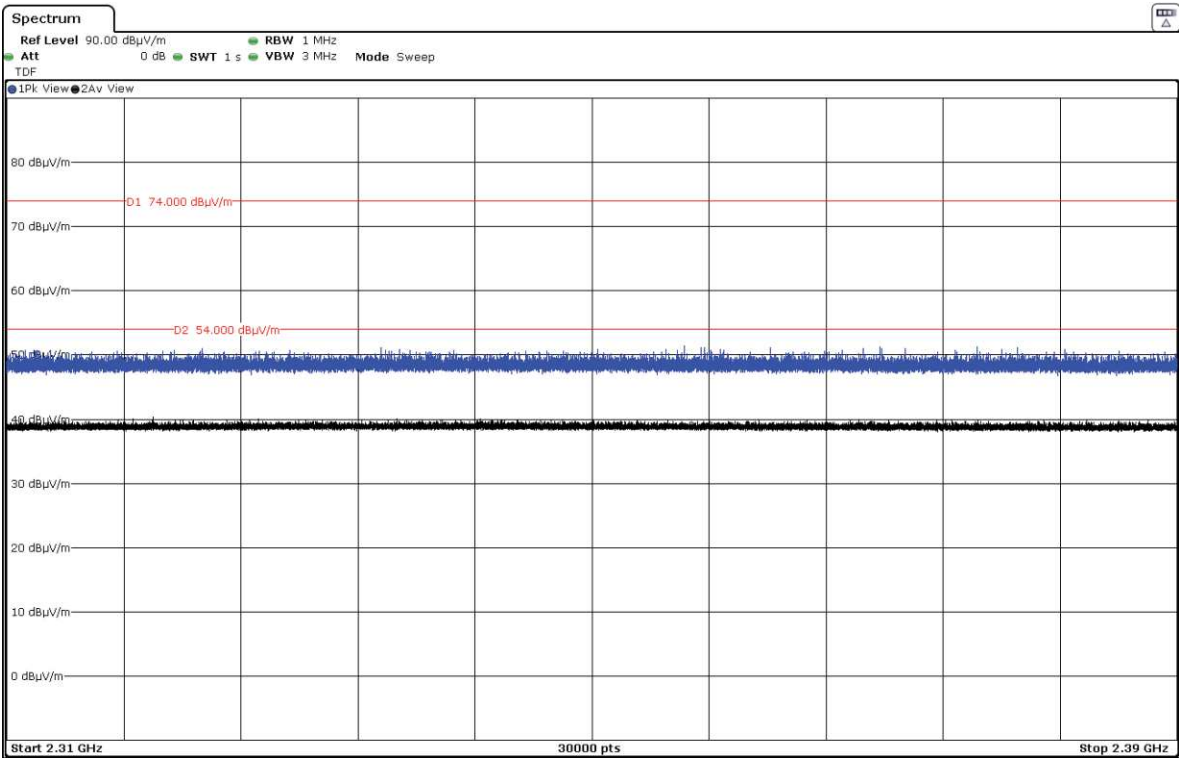


FREQUENCY RANGE 2.4835 - 2.5 GHz

- Low Channel:

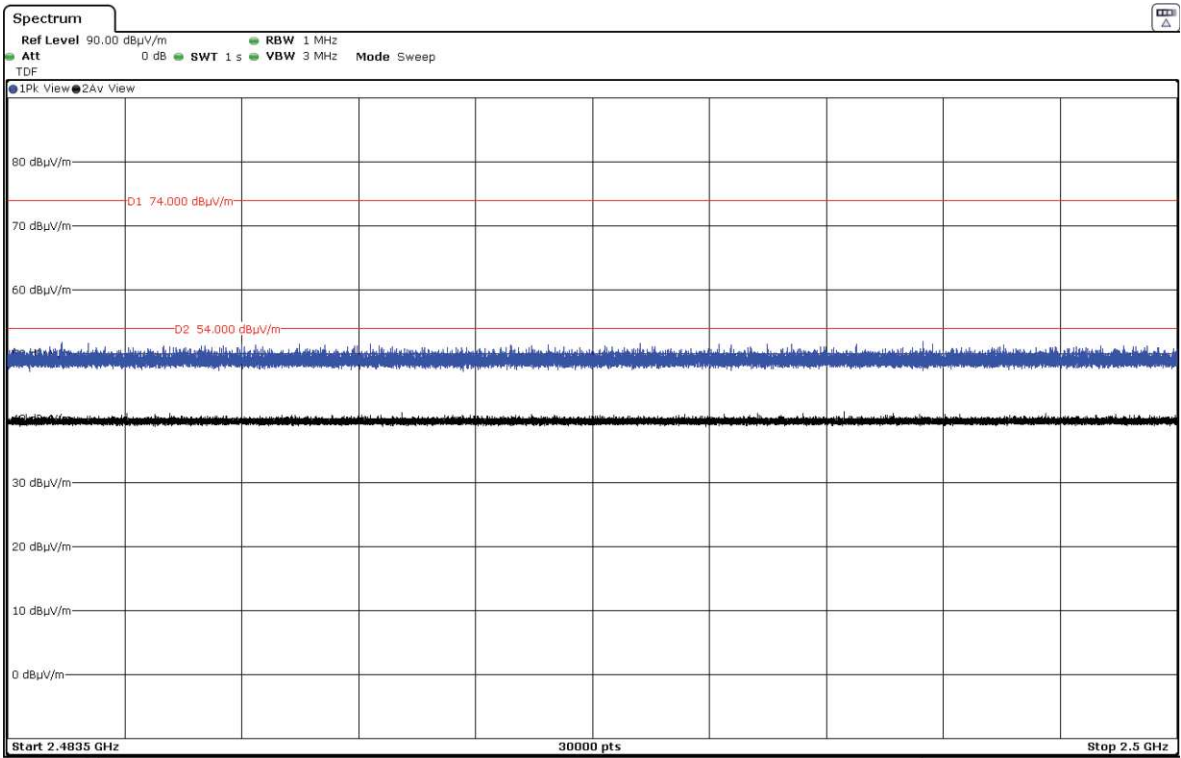

- Middle Channel:

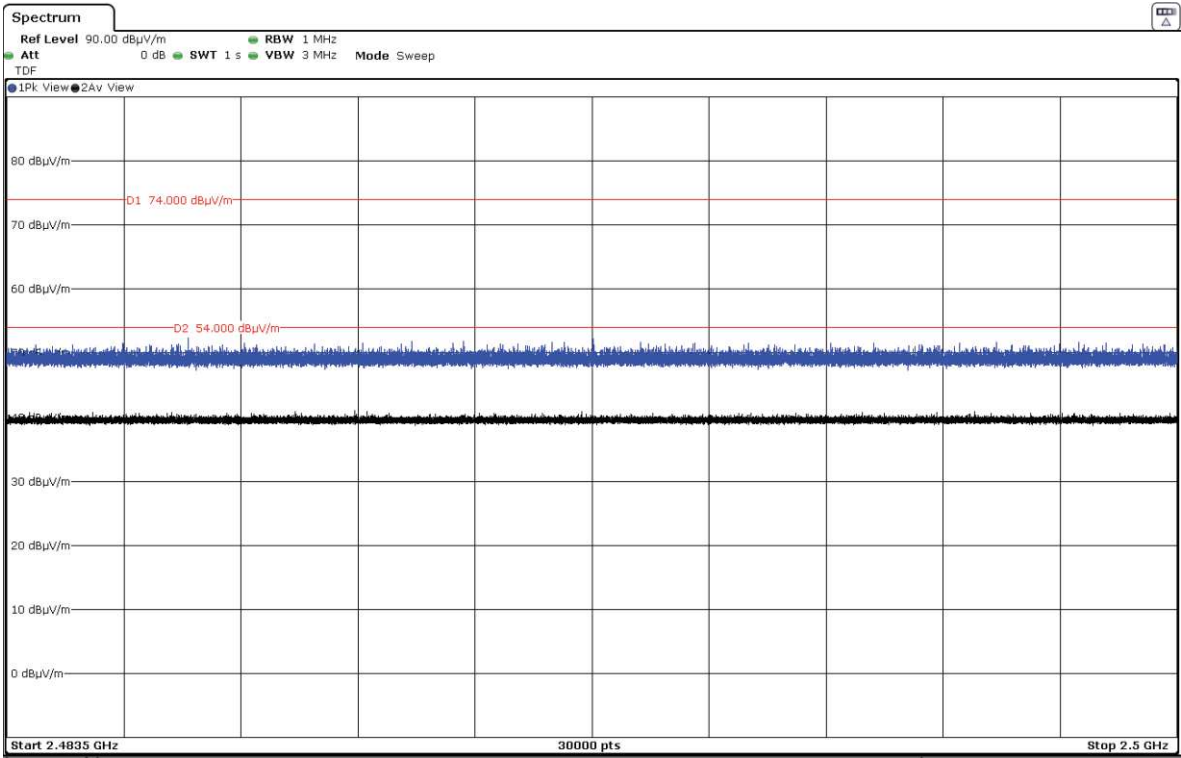

- High Channel:

