

FCC RADIO TEST REPORT

FCC ID: 2AU6P-OA2RS

Product : Loudspeaker

Trade Name : N/A

Model Name : TS-OA2RS-GRY

Serial Model : TS-OA2RS-SND,BT-107,BT-108

Report No. : UNIA19120917ER-01

Prepared for

Sun Acoustic Vina Co.,Ltd

Lot B2-3, Cong Hoa industry park, Cong Hoa ward, Chi Linh
city, Hai Duong province, Vietnam

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name: Sun Acoustic Vina Co.,Ltd
Address: Lot B2-3, Cong Hoa industry park, Cong Hoa ward,
Chi Linh city, Hai Duong province, Vietnam
Manufacture's Name: Sun Acoustic Vina Co.,Ltd
Address: Lot B2-3, Cong Hoa industry park, Cong Hoa ward,
Chi Linh city, Hai Duong province, Vietnam
Product description
Product name.....: Loudspeaker
Trade Mark.....: N/A
Model and/or type reference .: TS-OA2RS-GRY,TS-OA2RS-SND,BT-107,BT-108
Standards.....: FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10: 2013

This device described above has been tested by United, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of United, this document may be altered or revised by United, personnel only, and shall be noted in the revision of the document.

Date of Test:
Date (s) of performance of tests.....: Dec. 05, 2019 - Dec. 14, 2019
Date of Issue.....: Dec. 14, 2019
Test Result.....: Pass

Prepared by:

Bob Liao

Bob Liao/Editor

Reviewer:



Kahn yang/Supervisor

Approved & Authorized Signer:

Liuze

Liuze/Manager

Table of Contents

Page

11. TEST SUMMARY	4
2. GENERAL INFORMATION	5
GENERAL DESCRIPTION OF EUT	5
Carrier Frequency of Channels	6
Operation of EUT during testing	7
DESCRIPTION OF TEST SETUP	7
2.5 MEASUREMENT INSTRUMENTS LIST	8
3. CONDUCTED EMISSIONS TEST	9
3.1 Conducted Power Line Emission Limit	9
3.2 Test Setup	9
3.3 Test Procedure	9
3.4 Test Result	9
4 RADIATED EMISSION TEST	11
4.1 Radiation Limit	11
4.2 Test Setup	11
4.3 Test Procedure	12
4.4 Test Result	12
5 BAND EDGE	29
5.1 Limits	29
5.2 Test Procedure	29
5.3 Test Result	29
6 OCCUPIED BANDWIDTH MEASUREMENT	42
6.1 Test Setup	42
6.2 Test Procedure	42
6.3 Measurement Equipment Used	42
6.4 Test Result	42
7 ANTENNA REQUIREMENT	49
8 PHOTOGRAPH OF TEST	50

12. TEST SUMMARY

3 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT	STANGARD
CONDUCTED EMISSIONS TEST	COMPLIANT	FCC Part 15.207
RADIATED EMISSION TEST	COMPLIANT	FCC Part15.209/15.249
BAND EDGE	COMPLIANT	FCC Part15.249(d)
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT	FCC Part15.215
ANTENNA REQUIREMENT	COMPLIANT	FCC Part15.203

4 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address :2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd,Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

5 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2

21. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Loudspeaker
Trade Mark	N/A
Model Name	TS-OA2RS-GRY
Serial No.	TS-OA2RS-SND,BT-107,BT-108
Model Difference	Model name are different inside is the same
FCC ID	2AU6P-OA2RS
Antenna Type	FPC Antenna
Antenna Gain	-0.58 dBi
Frequency Range	2402-2480MHz
Number of Channels	BR+EDR:79CH BLE:40CH
Modulation Type	BR+EDR:GFSK, $\pi/4$ DQPSK, 8DPSK BLE: GFSK
Battery	DC12V
Power Source	DC12V by Battery
Adapter Model	N/A

Note:

- 1.The EUT consists of a pair of headphones, divided into left and right headphone. The software and electric circuit of the two headphones are the same.
- 2.This report shows the right headphone.

Table for auxiliary equipment:

Equipment Description	Manufacturer	Model	Calibration Due Date
N/A	N/A	N/A	N/A

1.2 Carrier Frequency of Channels

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		

BLE Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442	31	2462
02	2404	12	2424	22	2444	32	2464
03	2406	13	2426	23	2446	33	2466
04	2408	14	2428	24	2448	34	2468
05	2410	15	2430	25	2450	35	2470
06	2412	16	2432	26	2452	36	2472
07	2414	17	2434	27	2454	37	2474
08	2416	18	2436	28	2456	38	2476
09	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

1.3 Operation of EUT during testing

Operating Mode BR+EDR

The mode is used: Transmitting mode

Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Operating Mode BLE

The mode is used: Transmitting mode

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

1.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation testing:



2.5 1.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2020.09.06
2	AMN	ETS	3810/2	00020199	2020.09.06
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2020.09.06
4	AAN	TESEQ	TS-OA2RS-GRY-Cat6	38888	2020.09.06
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2020.09.06
2	BiconiLog Antenna	Sunol	JB1 Antenna	A090215	2020.09.06
3	PREAMP	HP	8449B	3008A00160	2020.09.06
4	PREAMP	HP	8447D	2944A07999	2020.09.06
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2020.09.06
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2020.09.06
7	Signal Generator	Agilent	E4421B	MY4335105	2020.09.06
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2020.09.06
9	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2020.09.06
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2020.09.06
11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2020.09.06
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2020.09.06
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2020.3.14
14	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2020.3.14
15	RF power divider	Anritsu	K241B	992289	2020.09.06
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2020.09.06
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2020.09.06
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2020.09.06
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2020.09.06
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2020.1.12
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2020.11.02
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2020.03.14
23	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2020.09.06
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2020.05.10
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2020.05.10
26	Frequency Meter	VICTOR	VC2000	997406086	2020.05.10
27	DC Power Source	HYELEC	HY5020E	055161818	2020.05.10

32. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

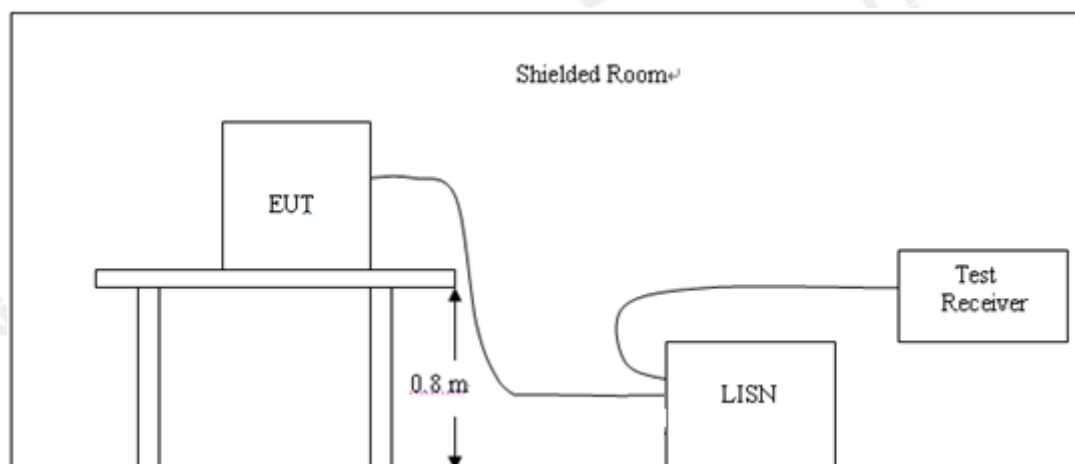

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

3.4 Test Result

N/A

Temperature:	26°C	Relative Humidity:	48%
Test Date:	N/A	Pressure:	N/A
Test Voltage:	N/A	Phase:	N/A
Test Mode:	N/A		

This test is not applicable to the product

4 RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


1. Radiated Emission Test-Up Frequency Below 30MHz

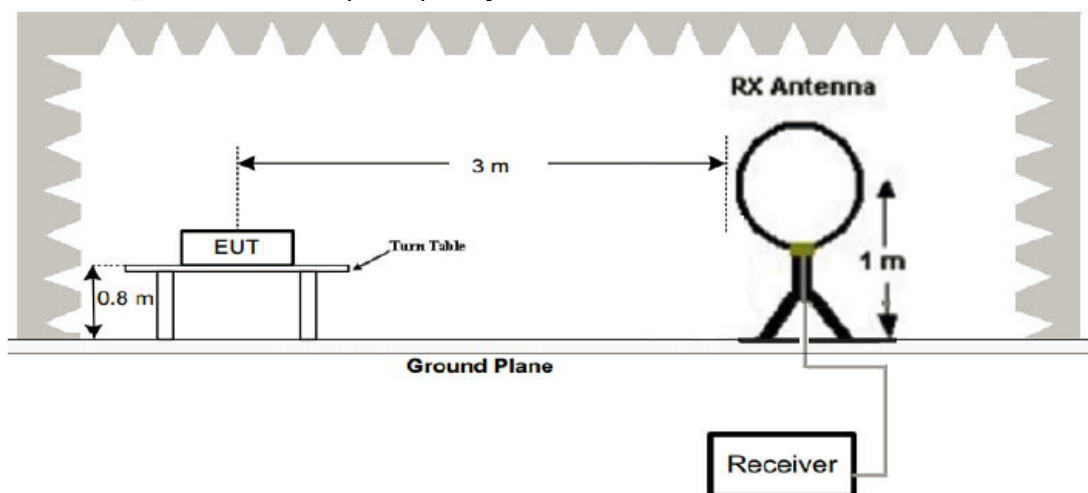

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

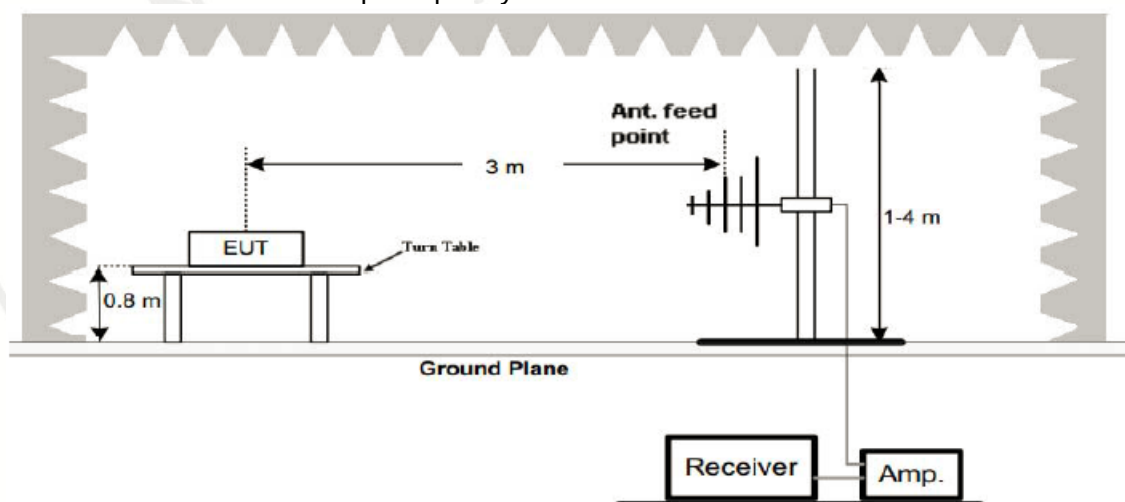

3. Radiated Emission Test-Up Frequency Above 1GHz

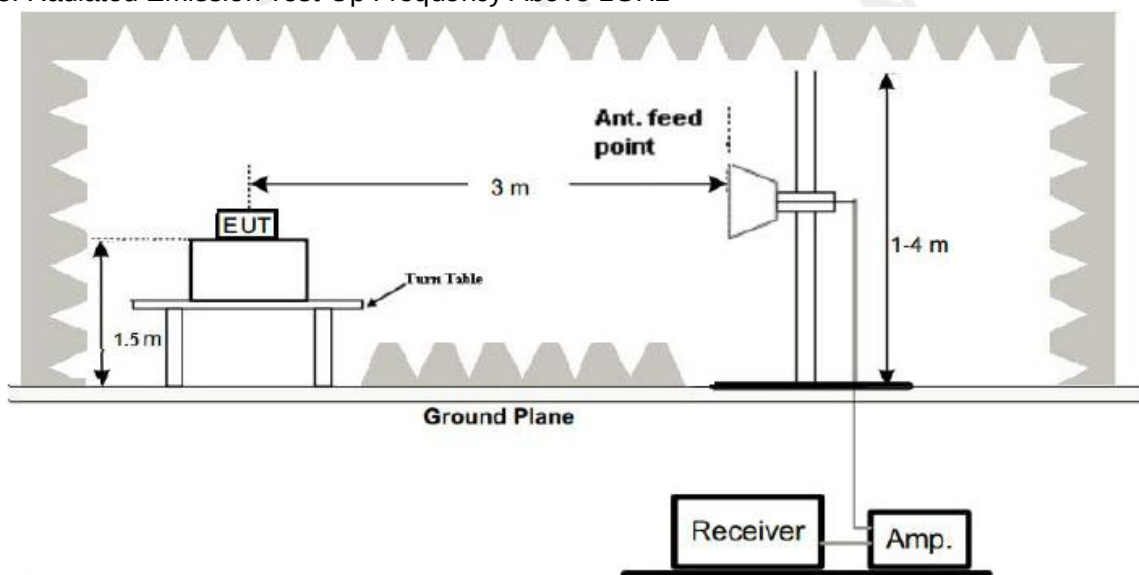

4.3 Test Procedure

- Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until the measurements for all frequencies are complete.
- The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result


PASS

Remark:

- All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK High Channel was reported for below 1GHz test.
- For BT3.0 above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, and 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:


Temperature:	22°C	Relative Humidity:	48%
Test Date:	Dec. 10, 2019	Pressure:	1010hPa
Test Voltage:	DC 12V from Battery	Polarization:	Horizontal
Test Mode:	BT BR CH1		

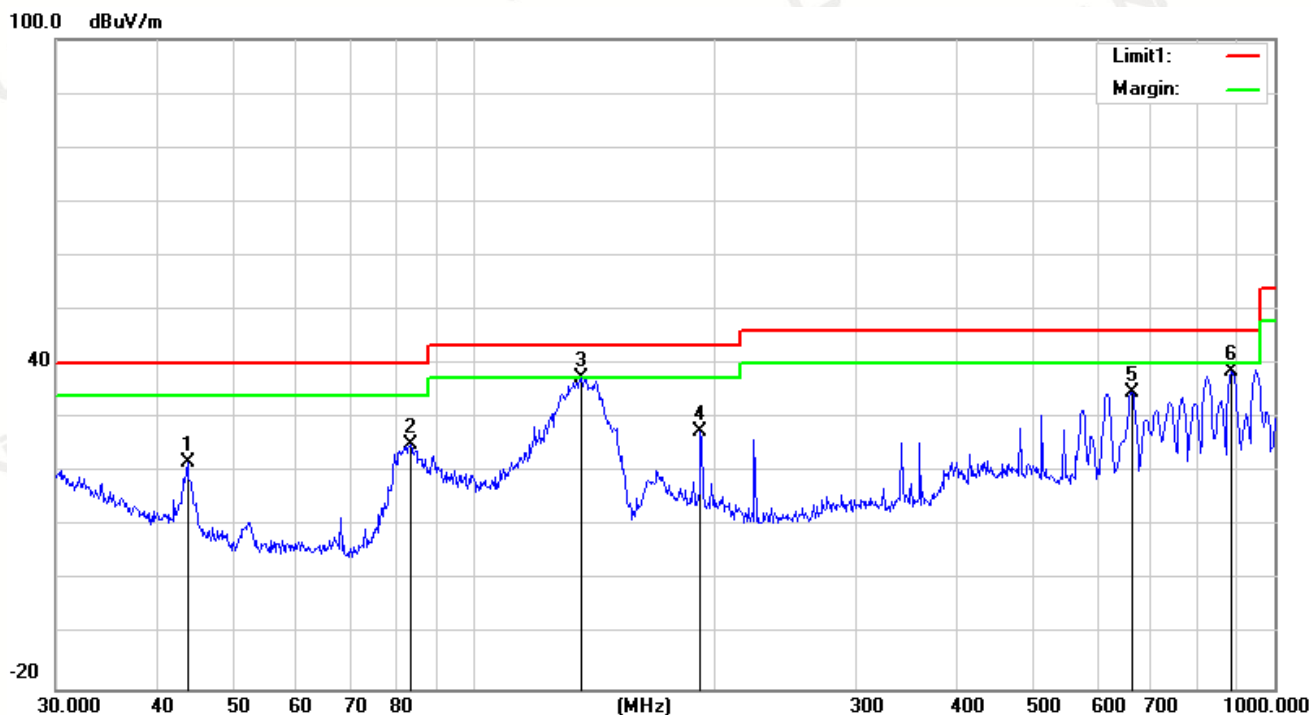

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	43.812	40.33	-18.35	21.98	40	-18.02	34	100	peak
2	83.2297	45.79	-20.7	25.09	40	-14.91	45	100	peak
3*	135.9822	52.93	-15.52	37.41	43.5	-6.09	98	100	peak
4	191.745	44.74	-17.25	27.49	43.5	-16.01	102	100	peak
5	663.4728	44.04	-9.18	34.86	46	-11.14	115	100	peak
6	884.5028	46	-7.23	38.77	46	-7.23	158	100	peak

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier


Temperature:	22°C	Relative Humidity:	48%
Test Date:	Dec. 10, 2019	Pressure:	1010hPa
Test Voltage:	DC 12V from Battery	Polarization:	Vertical
Test Mode:	BT BR CH1		

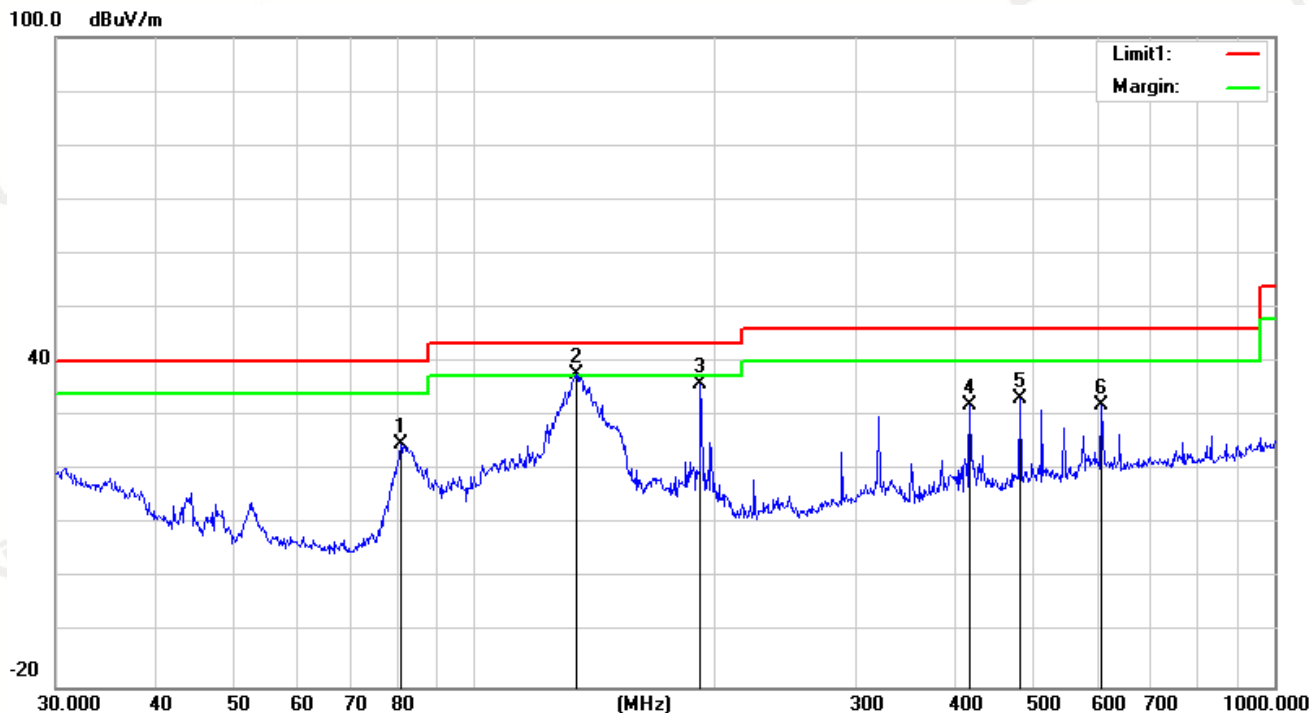

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	80.9275	45.04	-20.17	24.87	40	-15.13	45	100	peak
2*	134.0882	52.04	-14.34	37.7	43.5	-5.8	58	100	peak
3	191.745	51.74	-15.82	35.92	43.5	-7.58	155	100	peak
4	416.1791	43.21	-11.17	32.04	46	-13.96	108	100	peak
5	480.5276	43.11	-9.89	33.22	46	-12.78	120	100	peak
6	607.7867	39.87	-7.77	32.1	46	-13.9	97	100	peak

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier


Temperature:	22°C	Relative Humidity:	48%
Test Date:	Dec. 10, 2019	Pressure:	1010hPa
Test Voltage:	DC 12V from Battery	Polarization:	Horizontal
Test Mode:	BLE 2480MHz		

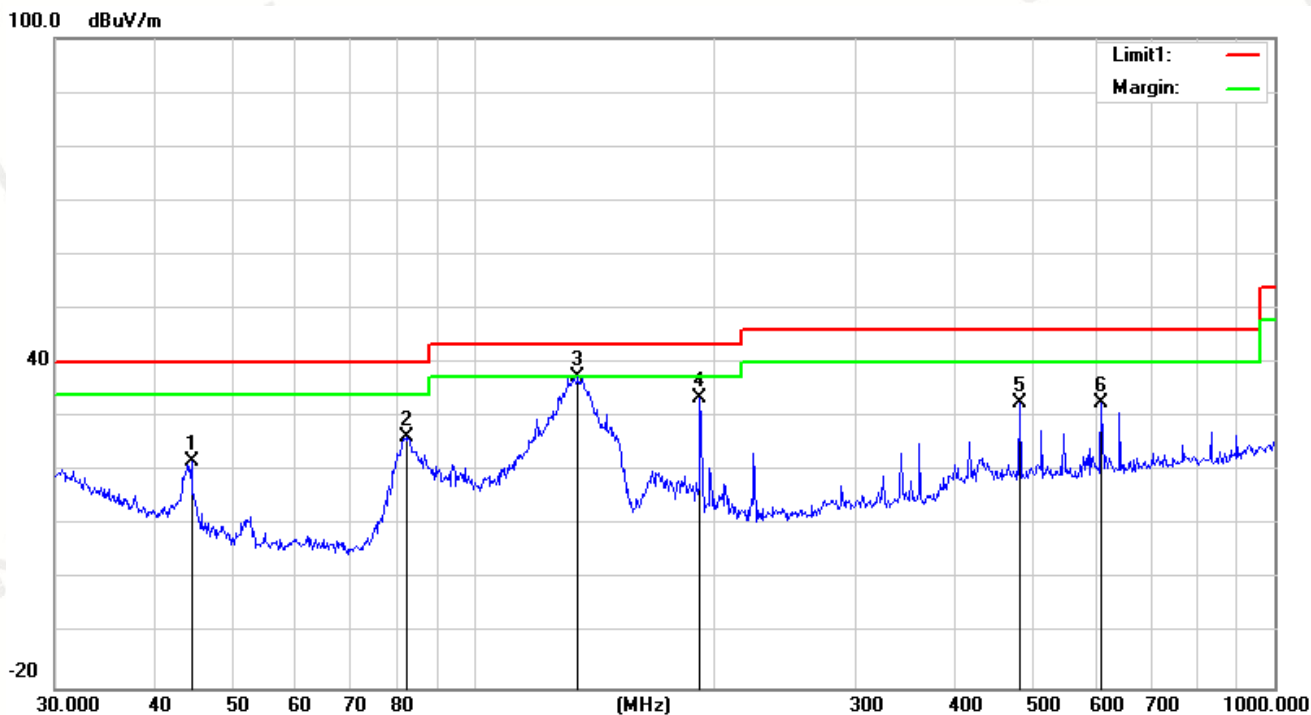

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	44.4308	40.17	-18.19	21.98	40	-18.02	46	100	peak
2	82.3589	46.2	-19.95	26.25	40	-13.75	55	100	peak
3*	135.0319	51.91	-14.39	37.52	43.5	-5.98	108	100	peak
4	191.745	49.35	-15.82	33.53	43.5	-9.97	100	100	peak
5	480.5276	42.41	-9.89	32.52	46	-13.48	120	100	peak
6	607.7867	40.37	-7.77	32.6	46	-13.4	145	100	peak

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	22°C	Relative Humidity:	48%
Test Date:	Dec. 10, 2019	Pressure:	1010hPa
Test Voltage:	DC 12V from Battery	Polarization:	Vertical
Test Mode:	BLE 2480MHz		

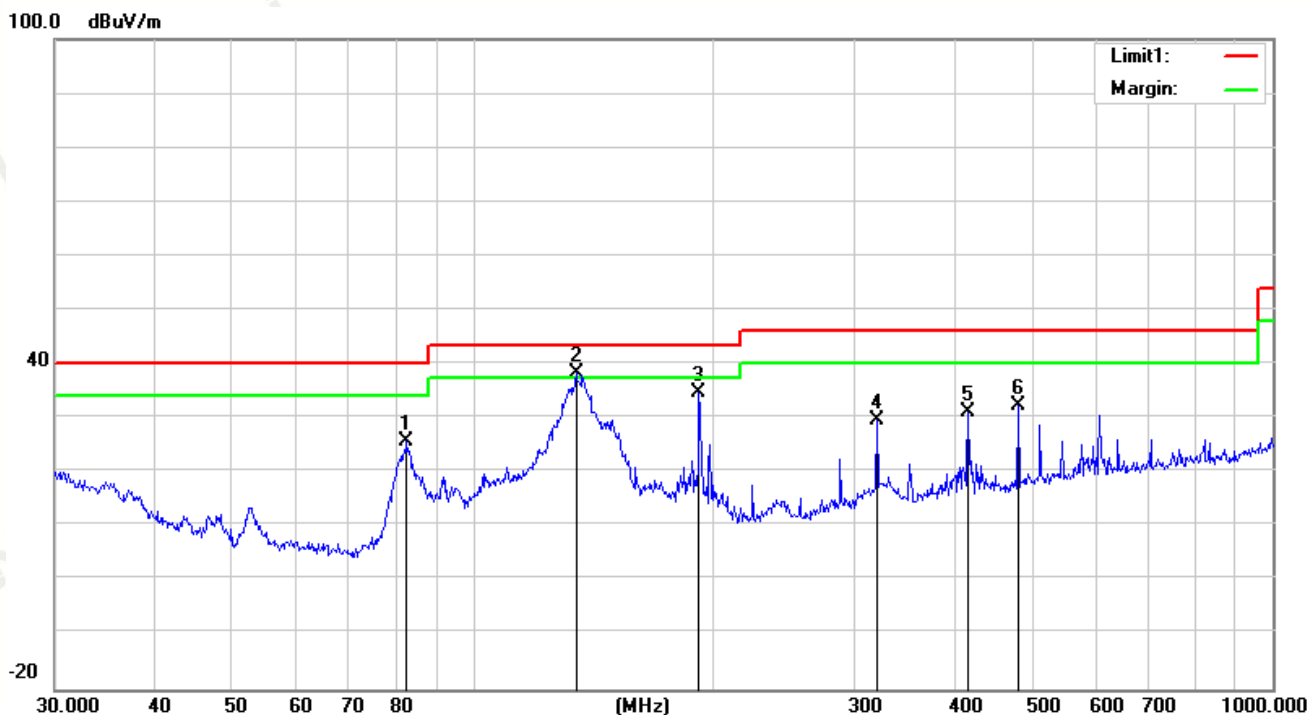

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	82.6482	45.59	-19.89	25.7	40	-14.3	15	100	peak
2*	134.5592	52.68	-14.36	38.32	43.5	-5.18	20	100	peak
3	191.745	50.48	-15.82	34.66	43.5	-8.84	100	100	peak
4	319.937	41.74	-12.08	29.66	46	-16.34	180	100	peak
5	416.1791	42.36	-11.17	31.19	46	-14.81	180	100	peak
6	480.5276	42.24	-9.89	32.35	46	-13.65	175	100	peak

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results (BR GFSK Mode):
CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	114.06	-5.84	108.22	114	-5.78	PK
2402	93.47	-5.84	87.63	94	-6.37	AV
4804	59.46	-3.64	55.82	74	-18.18	PK
4804	47.52	-3.64	43.88	54	-10.12	AV
7206	58.67	-0.95	57.72	74	-16.28	PK
7206	47.18	-0.95	46.23	54	-7.77	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	113.69	-5.84	107.85	114	-6.15	PK
2402	92.18	-5.84	86.34	94	-7.66	AV
4804	58.76	-3.64	55.12	74	-18.88	PK
4804	48.29	-3.64	44.65	54	-9.35	AV
7206	57.61	-0.95	56.66	74	-17.34	PK
7206	48.32	-0.95	47.37	54	-6.63	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2441	114.59	-5.71	108.88	114	-5.12	PK
2441	91.28	-5.71	85.57	94	-8.43	AV
4882	61.37	-3.51	57.86	74	-16.14	PK
4882	49.55	-3.51	46.04	54	-7.96	AV
7323	60.34	-0.82	59.52	74	-14.48	PK
7323	49.71	-0.82	48.89	54	-5.11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2441	113.28	-5.71	107.57	114	-6.43	PK
2441	90.25	-5.71	84.54	94	-9.46	AV
4882	59.74	-3.51	56.23	74	-17.77	PK
4882	48.13	-3.51	44.62	54	-9.38	AV
7323	58.71	-0.82	57.89	74	-16.11	PK
7323	48.96	-0.82	48.14	54	-5.86	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	113.52	-5.65	107.87	114	-6.13	PK
2480	90.47	-5.65	84.82	94	-9.18	AV
4960	58.36	-3.43	54.93	74	-19.07	PK
4960	47.28	-3.43	43.85	54	-10.15	AV
7440	57.69	-0.75	56.94	74	-17.06	PK
7440	48.02	-0.75	47.27	54	-6.73	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	112.48	-5.65	106.83	114	-7.17	PK
2480	89.61	-5.65	83.96	94	-10.04	AV
4960	58.47	-3.43	55.04	74	-18.96	PK
4960	48.52	-3.43	45.09	54	-8.91	AV
7440	57.86	-0.75	57.11	74	-16.89	PK
7440	47.95	-0.75	47.2	54	-6.8	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.The resolution bandwidth of test receiver/spectrum analyzer is 1MHzand video bandwidth is 3MHz for peak measurement with peak detectorat frequency above 1GHz.The resolution bandwidth of test receiver/spectrum analyzer is 1MHzand video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissionsare reported.

π /4 DQPSK 2402

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	110.36	-5.84	104.52	114	-9.48	PK
2402	89.27	-5.84	83.43	94	-10.57	AV
4804	59.76	-3.64	56.12	74	-17.88	PK
4804	48.27	-3.64	44.63	54	-9.37	AV
7206	58.19	-0.95	57.24	74	-16.76	PK
7206	47.66	-0.95	46.71	54	-7.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	109.86	-5.84	104.02	114	-9.98	PK
2402	88.05	-5.84	82.21	94	-11.79	AV
4804	58.72	-3.64	55.08	74	-18.92	PK
4804	48.13	-3.64	44.49	54	-9.51	AV
7206	59.75	-0.95	58.8	74	-15.2	PK
7206	49.36	-0.95	48.41	54	-5.59	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

2441
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2441	112.83	-5.71	107.12	114	-6.88	PK
2441	90.45	-5.71	84.74	94	-9.26	AV
4882	58.76	-3.51	55.25	74	-18.75	PK
4882	49.37	-3.51	45.86	54	-8.14	AV
7323	59.13	-0.82	58.31	74	-15.69	PK
7323	49.75	-0.82	48.93	54	-5.07	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2441	111.96	-5.71	106.25	114	-7.75	PK
2441	89.65	-5.71	83.94	94	-10.06	AV
4882	58.43	-3.51	54.92	74	-19.08	PK
4882	48.71	-3.51	45.2	54	-8.8	AV
7323	58.64	-0.82	57.82	74	-16.18	PK
7323	48.19	-0.82	47.37	54	-6.63	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

2480

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	113.47	-5.65	107.82	114	-6.18	PK
2480	90.84	-5.65	85.19	94	-8.81	AV
4960	57.62	-3.43	54.19	74	-19.81	PK
4960	48.39	-3.43	44.96	54	-9.04	AV
7440	57.15	-0.75	56.4	74	-17.6	PK
7440	47.13	-0.75	46.38	54	-7.62	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	112.75	-5.65	107.1	114	-6.9	PK
2480	89.43	-5.65	83.78	94	-10.22	AV
4960	56.85	-3.43	53.42	74	-20.58	PK
4960	47.9	-3.43	44.47	54	-9.53	AV
7440	57.12	-0.75	56.37	74	-17.63	PK
7440	46.83	-0.75	46.08	54	-7.92	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.The resolution bandwidth of test receiver/spectrum analyzer is 1MHzand video bandwidth is 3MHz for peak measurement with peak detectorat frequency above 1GHz.The resolution bandwidth of test receiver/spectrum analyzer is 1MHzand video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7)All modes of operation were investigated and the worst-case emissionsare reported.

8DPSK

Horizontal: 2402

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	110.83	-5.84	104.99	114	-9.01	PK
2402	89.66	-5.84	83.82	94	-10.18	AV
4804	59.74	-3.64	56.1	74	-17.9	PK
4804	49.83	-3.64	46.19	54	-7.81	AV
7206	58.65	-0.95	57.7	74	-16.3	PK
7206	48.14	-0.95	47.19	54	-6.81	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	110.27	-5.84	104.43	114	-9.57	PK
2402	88.84	-5.84	83	94	-11	AV
4804	58.39	-3.64	54.75	74	-19.25	PK
4804	48.72	-3.64	45.08	54	-8.92	AV
7206	57.63	-0.95	56.68	74	-17.32	PK
7206	47.92	-0.95	46.97	54	-7.03	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Horizontal: 2441

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2441	112.37	-5.71	106.66	114	-7.34	PK
2441	90.07	-5.71	84.36	94	-9.64	AV
4882	59.48	-3.51	55.97	74	-18.03	PK
4882	49.36	-3.51	45.85	54	-8.15	AV
7323	59.12	-0.82	58.3	74	-15.7	PK
7323	48.97	-0.82	48.15	54	-5.85	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2441	111.85	-5.71	106.14	114	-7.86	PK
2441	79.43	-5.71	73.72	94	-20.28	AV
4882	58.94	-3.51	55.43	74	-18.57	PK
4882	48.72	-3.51	45.21	54	-8.79	AV
7323	58.63	-0.82	57.81	74	-16.19	PK
7323	48.71	-0.82	47.89	54	-6.11	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Horizontal: 2480

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	113.45	-5.65	107.8	114	-6.2	PK
2480	90.11	-5.65	84.46	94	-9.54	AV
4960	57.82	-3.43	54.39	74	-19.61	PK
4960	47.93	-3.43	44.5	54	-9.5	AV
7440	57.89	-0.75	57.14	74	-16.86	PK
7440	47.26	-0.75	46.51	54	-7.49	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	112.53	-5.65	106.88	114	-7.12	PK
2480	89.74	-5.65	84.09	94	-9.91	AV
4960	57.19	-3.43	53.76	74	-20.24	PK
4960	47.51	-3.43	44.08	54	-9.92	AV
7440	57.28	-0.75	56.53	74	-17.47	PK
7440	47.03	-0.75	46.28	54	-7.72	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

BLE Above 1 GHz Test Results: CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	113.2	-5.84	107.36	114	-6.64	PK
2402	91.52	-5.84	85.68	94	-8.32	AV
4804	56.43	-3.64	52.79	74	-21.21	PK
4804	45.79	-3.64	42.15	54	-11.85	AV
7206	55.87	-0.95	54.92	74	-19.08	PK
7206	46.13	-0.95	45.18	54	-8.82	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	112.05	-5.84	106.21	114	-7.79	PK
2402	90.37	-5.84	84.53	94	-9.47	AV
4804	55.28	-3.64	51.64	74	-22.36	PK
4804	46.35	-3.64	42.71	54	-11.29	AV
7206	54.92	-0.95	53.97	74	-20.03	PK
7206	45.76	-0.95	44.81	54	-9.19	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Note: For fundamental frequency, RBW and VBW set to be 1.5MHz , PK detector for PK value , RMS detector for AV value

CH Middle (2440MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2440	112.46	-5.71	106.75	114	-7.25	PK
2440	89.35	-5.71	83.64	94	-10.36	AV
4880	55.16	-3.51	51.65	74	-22.35	PK
4880	45.92	-3.51	42.41	54	-11.59	AV
7320	54.73	-0.82	53.91	74	-20.09	PK
7320	44.29	-0.82	43.47	54	-10.53	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2440	113.07	-5.71	107.36	114	-6.64	PK
2440	90.43	-5.71	84.72	94	-9.28	AV
4880	55.74	-3.51	52.23	74	-21.77	PK
4880	45.38	-3.51	41.87	54	-12.13	AV
7320	55.29	-0.82	54.47	74	-19.53	PK
7320	45.78	-0.82	44.96	54	-9.04	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Note: For fundamental frequency, RBW and VBW set to be 1.5MHz , PK detector for PK value , RMS detector for AV value

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	114.89	-5.65	109.24	114	-4.76	PK
2480	91.43	-5.65	85.78	94	-8.22	AV
4960	56.12	-3.43	52.69	74	-21.31	PK
4960	45.34	-3.43	41.91	54	-12.09	AV
7440	55.09	-0.75	54.34	74	-19.66	PK
7440	45.22	-0.75	44.47	54	-9.53	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	114.03	-5.65	108.38	114	-5.62	PK
2480	90.76	-5.65	85.11	94	-8.89	AV
4960	55.24	-3.43	51.81	74	-22.19	PK
4960	44.39	-3.43	40.96	54	-13.04	AV
7440	54.71	-0.75	53.96	74	-20.04	PK
7440	45.83	-0.75	45.08	54	-8.92	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSIC63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

PASS

Remark: All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were tested, only the worst result of GFSK was reported as below:

BR GFSK

Horizontal (Worst case): 2402

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.37	-5.81	49.56	74	-24.44	PK
2310	46.28	-5.81	40.47	54	-13.53	AV
2390	54.39	-5.84	48.55	74	-25.45	PK
2390	45.63	-5.84	39.79	54	-14.21	AV
2400	55.16	-5.84	49.32	74	-24.68	PK
2400	46.03	-5.84	40.19	54	-13.81	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	54.87	-5.81	49.06	74	-24.94	PK
2310	45.62	-5.81	39.81	54	-14.19	AV
2390	55.16	-5.84	49.32	74	-24.68	PK
2390	46.39	-5.84	40.55	54	-13.45	AV
2400	54.28	-5.84	48.44	74	-25.56	PK
2400	45.22	-5.84	39.38	54	-14.62	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Horizontal (Worst case): 2480

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	53.26	-5.65	47.61	74	-26.39	PK
2483.5	42.19	-5.65	36.54	54	-17.46	AV
2500	54.68	-5.72	48.96	74	-25.04	PK
2500	45.32	-5.72	39.6	54	-14.4	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	52.09	-5.65	46.44	74	-27.56	PK
2483.5	43.16	-5.65	37.51	54	-16.49	AV
2500	53.48	-5.72	47.76	74	-26.24	PK
2500	44.05	-5.72	38.33	54	-15.67	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

π /4 DQPSK

Horizontal: 2402

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	53.79	-5.81	47.98	74	-26.02	PK
2310	45.08	-5.81	39.27	54	-14.73	AV
2390	54.37	-5.84	48.53	74	-25.47	PK
2390	45.95	-5.84	40.11	54	-13.89	AV
2400	53.71	-5.84	47.87	74	-26.13	PK
2400	44.86	-5.84	39.02	54	-14.98	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	53.06	-5.81	47.25	74	-26.75	PK
2310	44.72	-5.81	38.91	54	-15.09	AV
2390	53.95	-5.84	48.11	74	-25.89	PK
2390	45.16	-5.84	39.32	54	-14.68	AV
2400	54.28	-5.84	48.44	74	-25.56	PK
2400	45.37	-5.84	39.53	54	-14.47	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Horizontal: 2480

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	53.65	-5.65	48	74	-26	PK
2483.5	44.73	-5.65	39.08	54	-14.92	AV
2500	54.56	-5.72	48.84	74	-25.16	PK
2500	45.82	-5.72	40.1	54	-13.9	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	54.13	-5.65	48.48	74	-25.52	PK
2483.5	45.28	-5.65	39.63	54	-14.37	AV
2500	53.94	-5.72	48.22	74	-25.78	PK
2500	45.17	-5.72	39.45	54	-14.55	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Horizontal: 2402

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	54.11	-5.81	48.3	74	-25.7	PK
2310	45.39	-5.81	39.58	54	-14.42	AV
2390	54.72	-5.84	48.88	74	-25.12	PK
2390	45.86	-5.84	40.02	54	-13.98	AV
2400	55.09	-5.84	49.25	74	-24.75	PK
2400	46.24	-5.84	40.4	54	-13.6	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.42	-5.81	49.61	74	-24.39	PK
2310	46.09	-5.81	40.28	54	-13.72	AV
2390	55.75	-5.84	49.91	74	-24.09	PK
2390	45.63	-5.84	39.79	54	-14.21	AV
2400	55.26	-5.84	49.42	74	-24.58	PK
2400	45.18	-5.84	39.34	54	-14.66	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Horizontal: 2480

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	54.15	-5.65	48.5	74	-25.5	PK
2483.5	46.82	-5.65	41.17	54	-12.83	AV
2500	53.86	-5.72	48.14	74	-25.86	PK
2500	46.21	-5.72	40.49	54	-13.51	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	53.84	-5.65	48.19	74	-25.81	PK
2483.5	46.52	-5.65	40.87	54	-13.13	AV
2500	53.17	-5.72	47.45	74	-26.55	PK
2500	45.23	-5.72	39.51	54	-14.49	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: BLE CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	54.84	-5.81	49.03	74	-24.97	PK
2310	43.52	-5.81	37.71	54	-16.29	AV
2390	53.16	-5.84	47.32	74	-26.68	PK
2390	44.73	-5.84	38.89	54	-15.11	AV
2400	54.29	-5.84	48.45	74	-25.55	PK
2400	43.07	-5.84	37.23	54	-16.77	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.13	-5.81	49.32	74	-24.68	PK
2310	44.28	-5.81	38.47	54	-15.53	AV
2390	54.19	-5.84	48.35	74	-25.65	PK
2390	43.73	-5.84	37.89	54	-16.11	AV
2400	54.82	-5.84	48.98	74	-25.02	PK
2400	44.31	-5.84	38.47	54	-15.53	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2480MHz)


Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	54.92	-5.65	49.27	74	-24.73	PK
2483.5	44.18	-5.65	38.53	54	-15.47	AV
2500	53.17	-5.72	47.45	74	-26.55	PK
2500	43.65	-5.72	37.93	54	-16.07	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	54.26	-5.65	48.61	74	-25.39	PK
2483.5	43.74	-5.65	38.09	54	-15.91	AV
2500	53.89	-5.72	48.17	74	-25.83	PK
2500	43.27	-5.72	37.55	54	-16.45	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


GFSK 2402

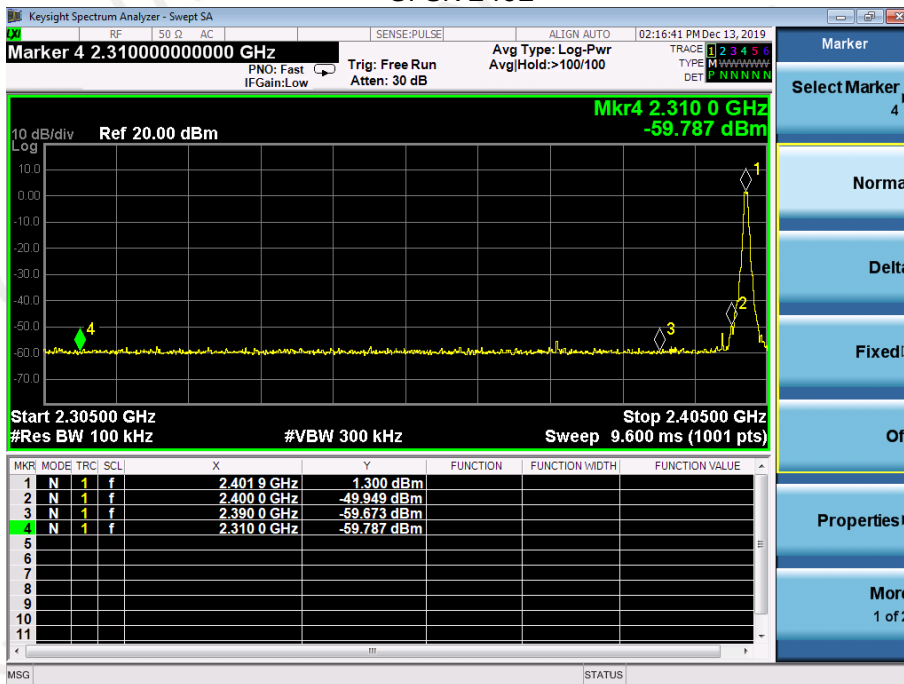


GFSK 2480

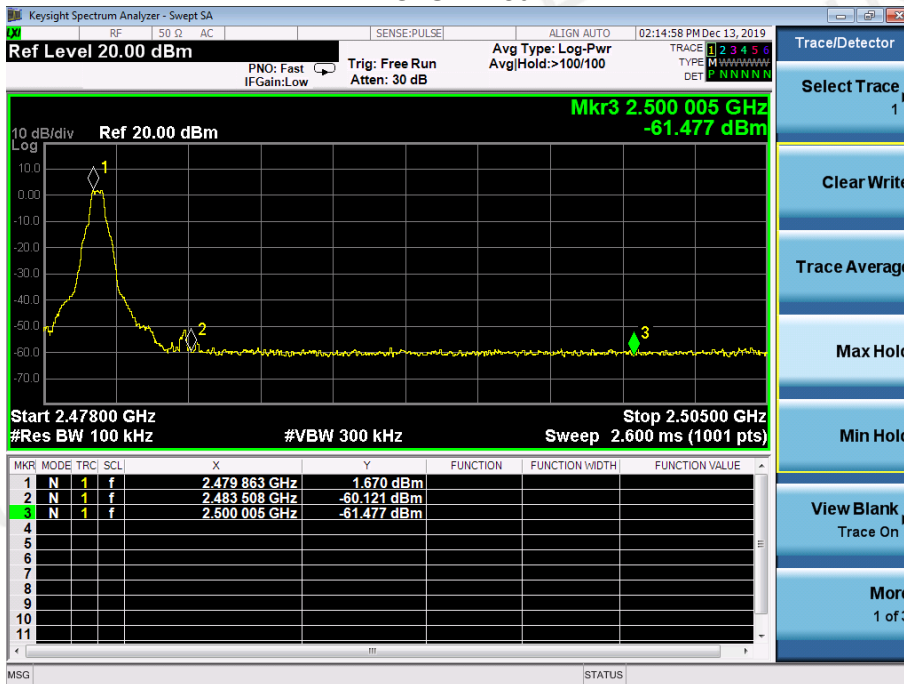


$\pi/4$ DQPSK 2402

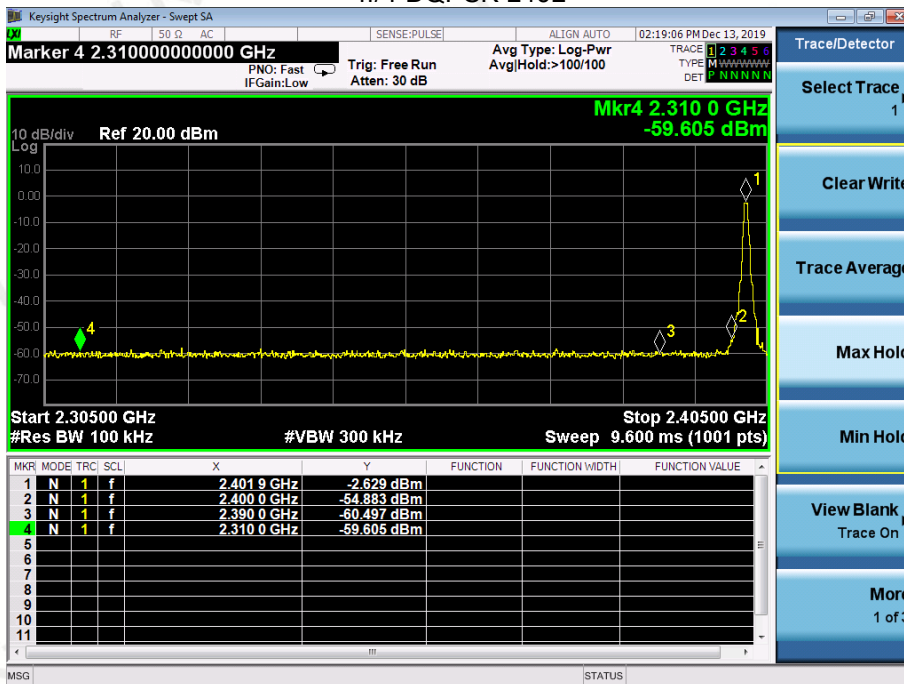


$\pi/4$ DQPSK 2480

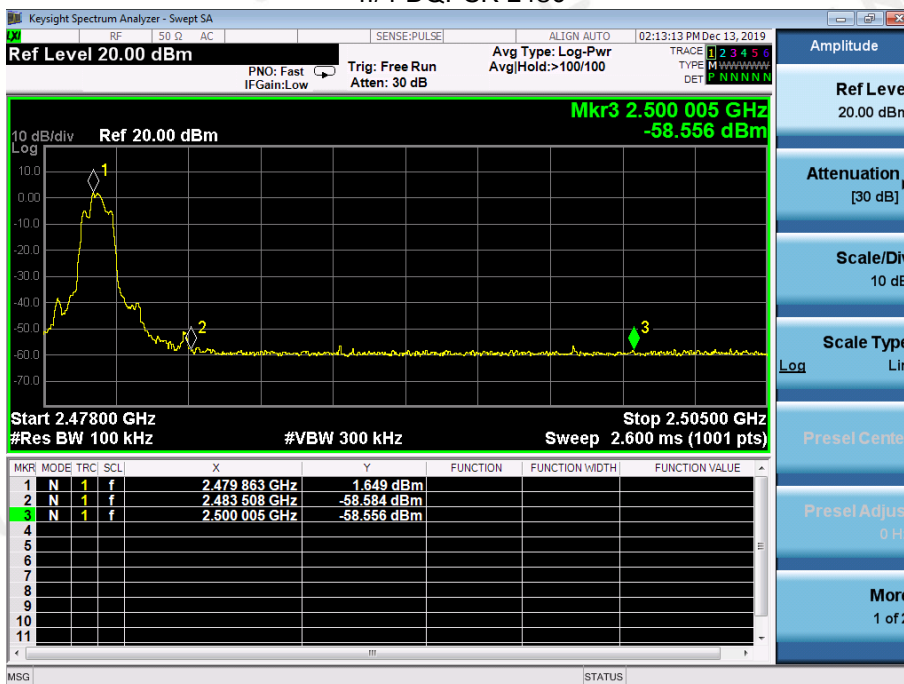

8DPSK 2402

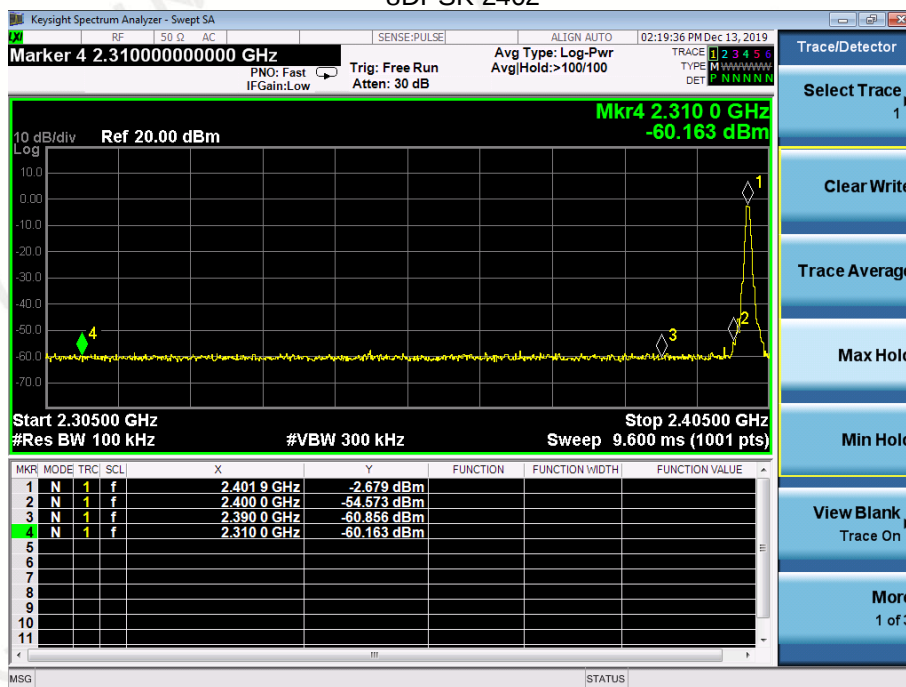


8DPSK 2480

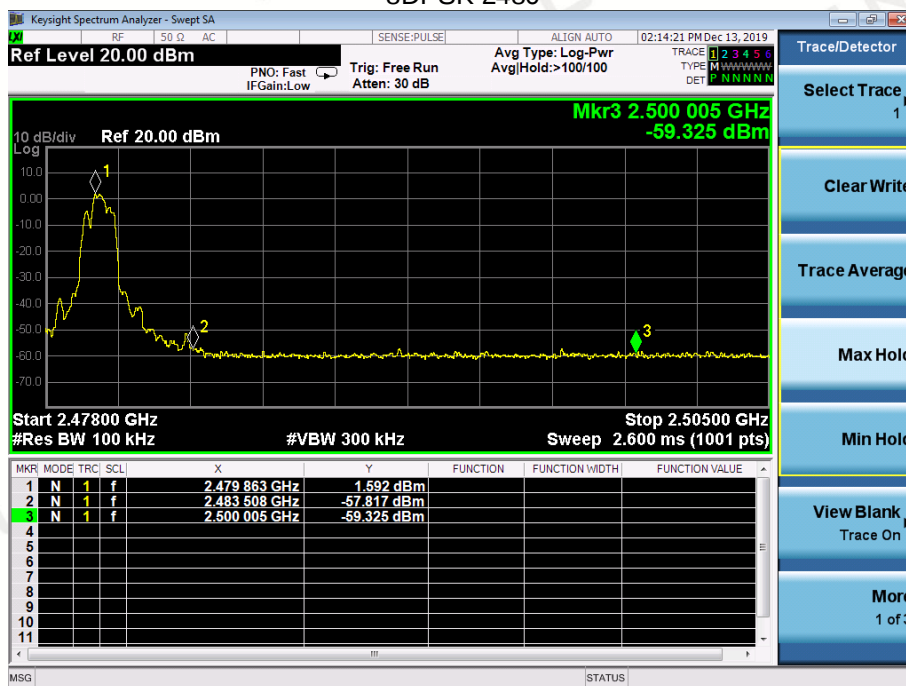


BLE MODE

2402

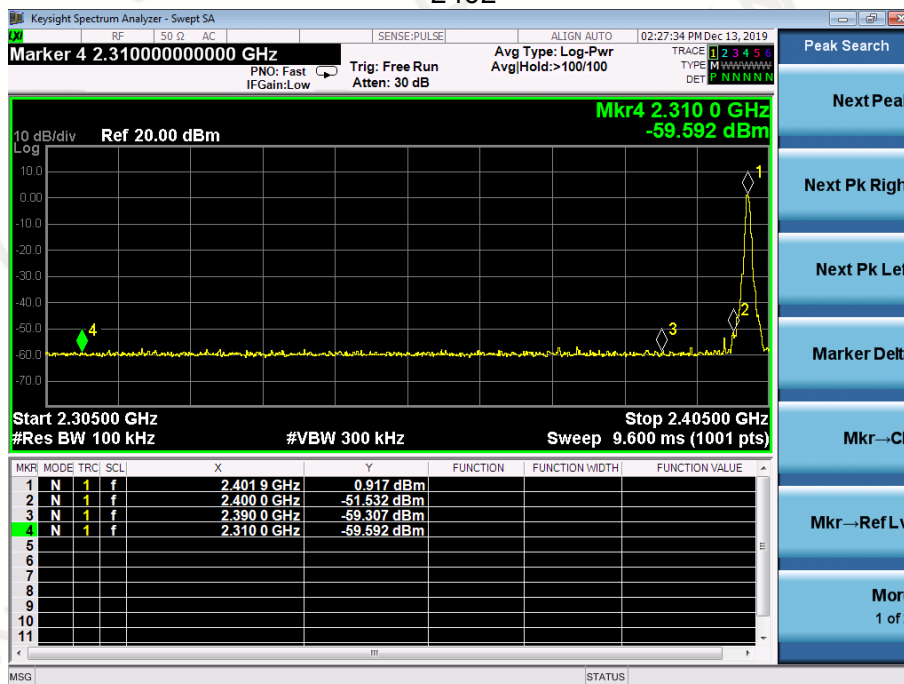

2480

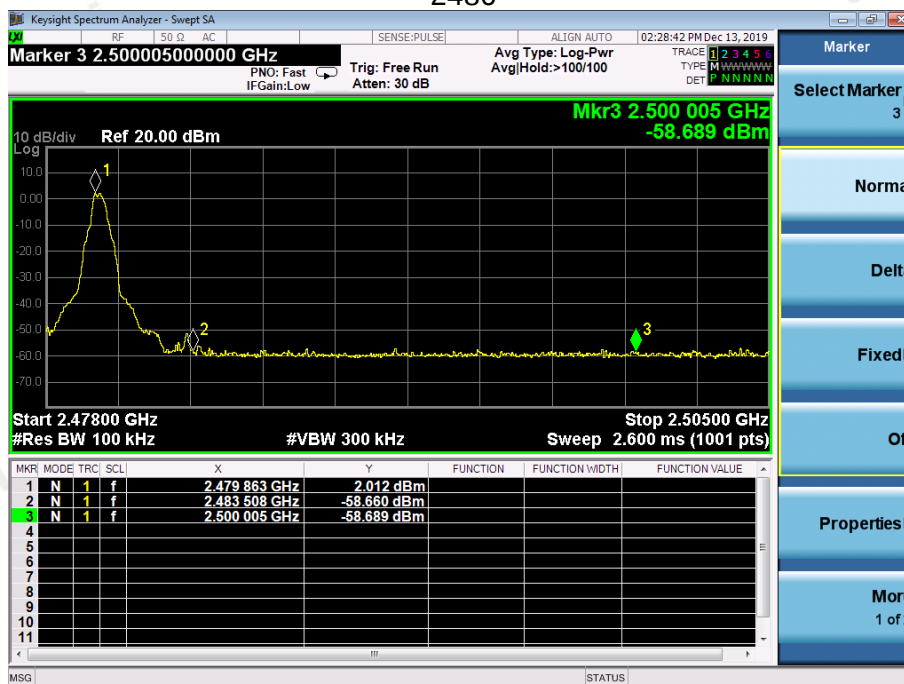

6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=30KHz, VBW=100KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3 Measurement Equipment Used

Same as Radiated Emission Measurement

6.4 Test Result

PASS

GFSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	0.759	PASS
2441	0.774	PASS
2480	0.776	PASS

CH: 2402MHz



CH: 2441MHz



CH: 2480MHz



$\pi/4$ DQPSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.104	PASS
2441	1.102	PASS
2480	1.101	PASS

CH: 2402MHz



CH: 2441MHz



CH: 2480MHz



8DPSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.149	PASS
2441	1.150	PASS
2480	1.150	PASS

CH: 2402MHz



CH: 2441MHz



CH: 2480MHz



Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	0.760	PASS
2440	0.733	PASS
2480	0.760	PASS

CH:2402MHz



CH:2440MHz



CH:2480MHz



7 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is an FPC, The directional gains of antenna used for transmitting is -0.58dBi.

ANTENNA:

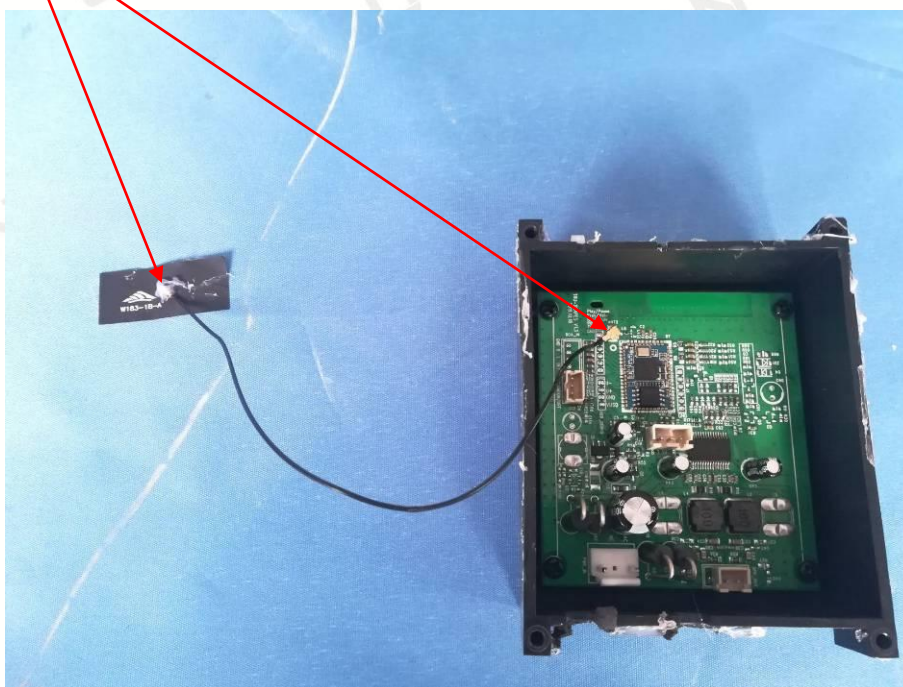

8 PHOTOGRAPH OF TEST


RE





EUT








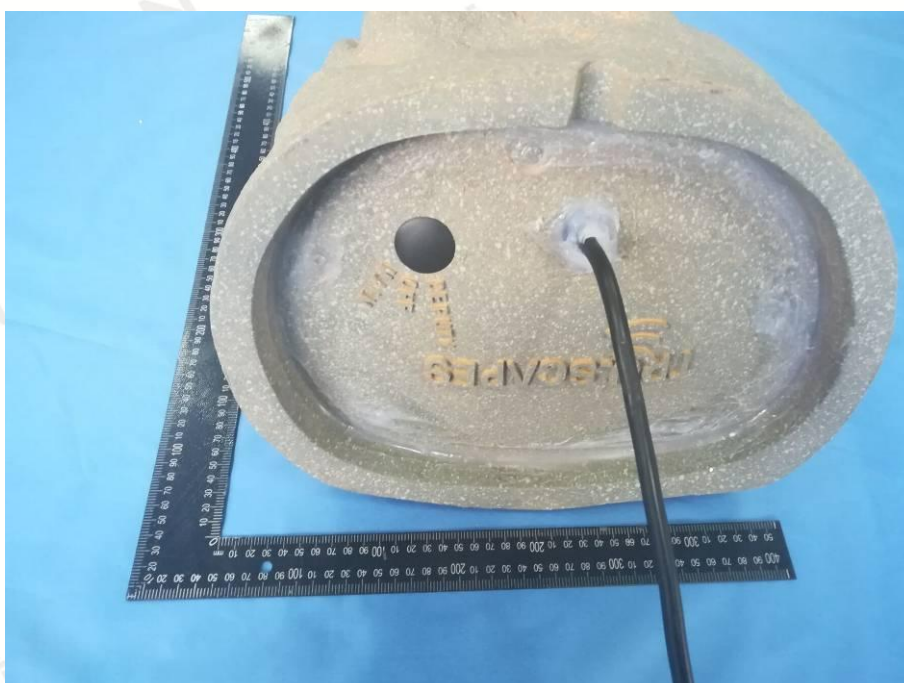



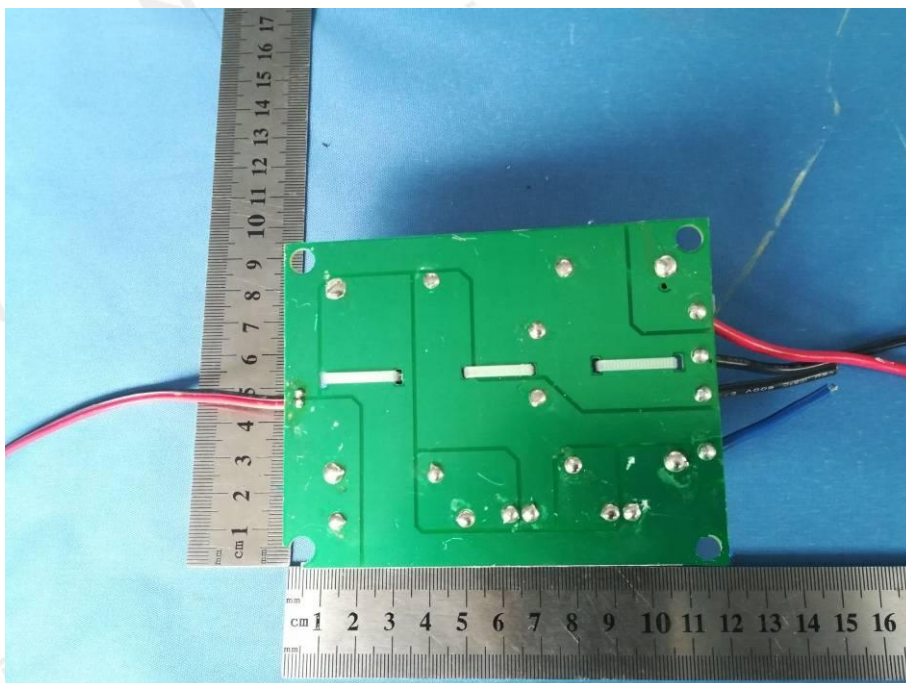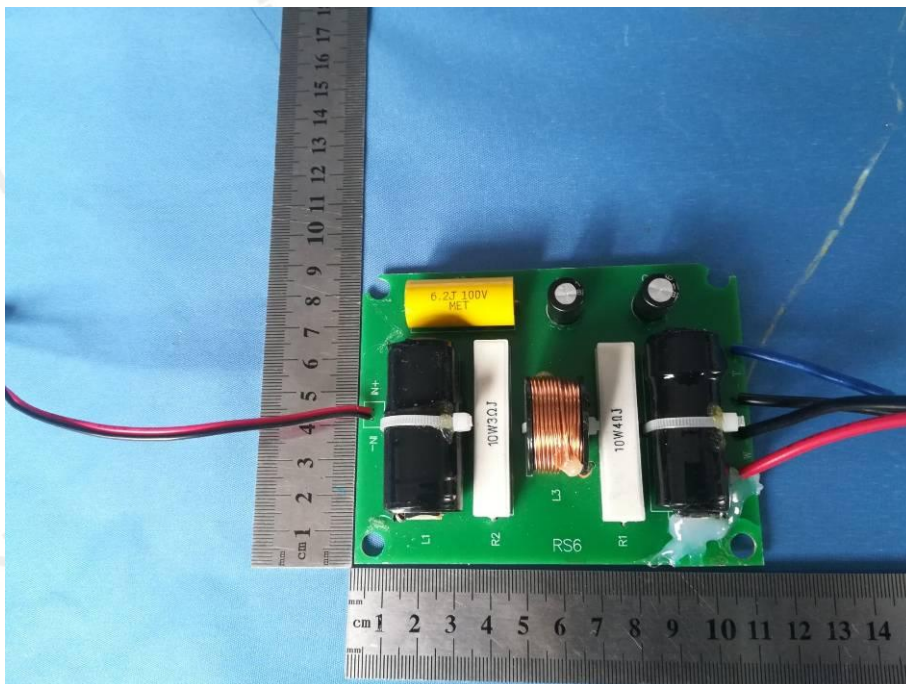

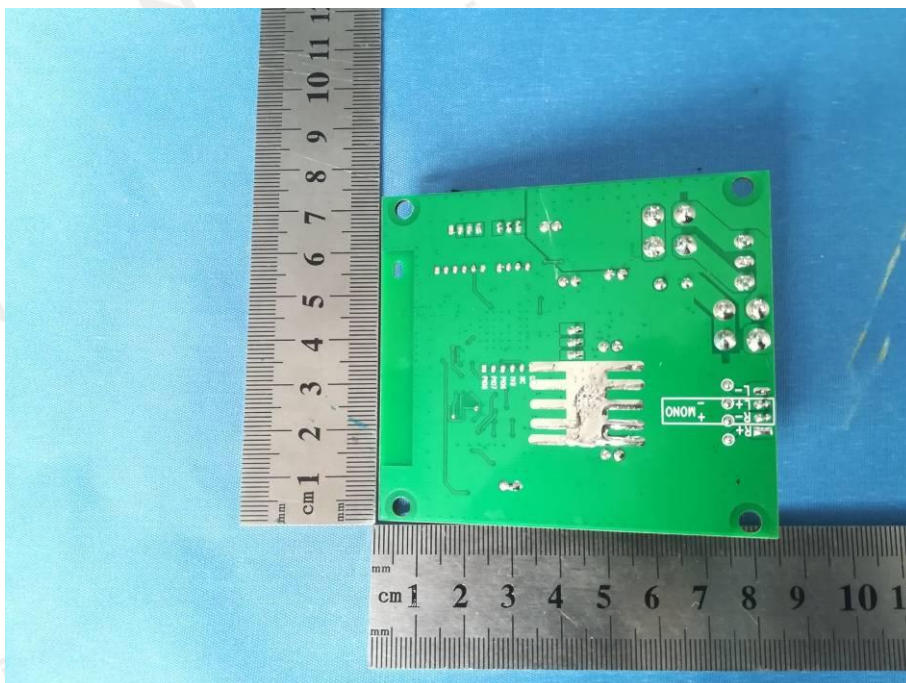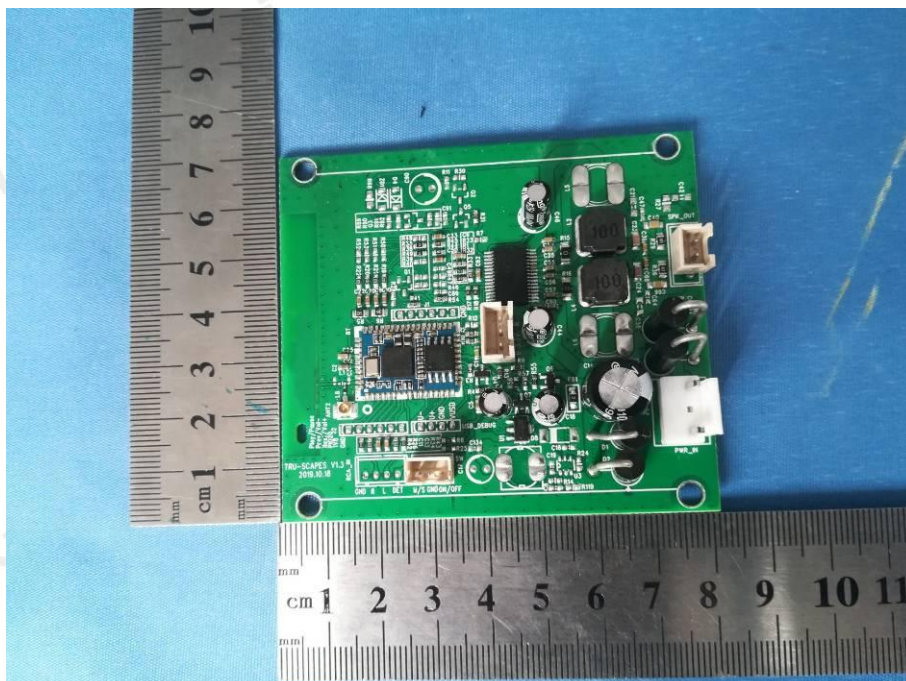

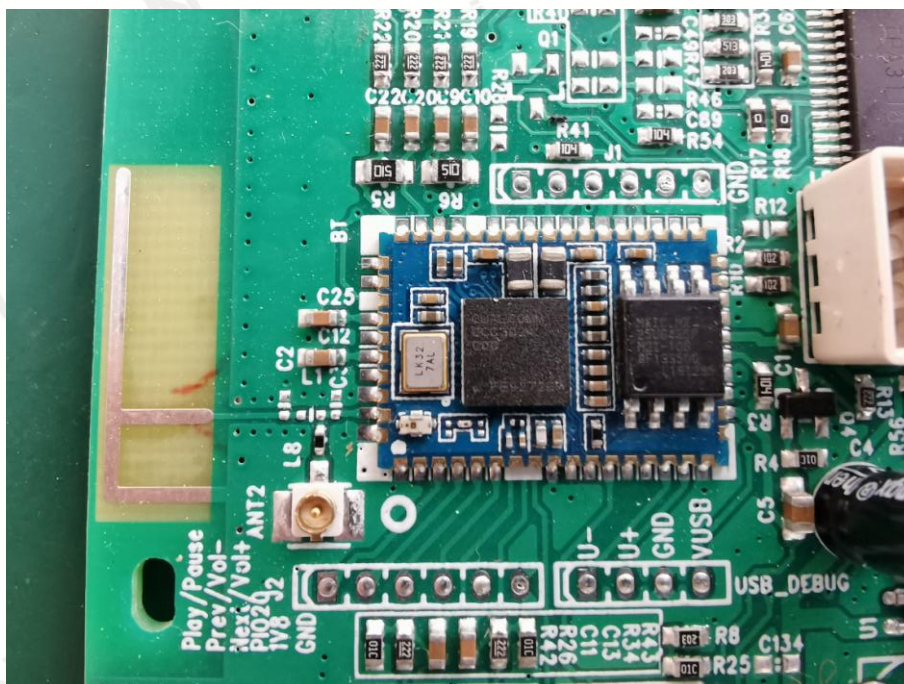

End of Report