

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	23.43M	19.13M	19M1D1D	22.572M	19.04M
802.11be EHT40_Nss4,(MCS0)_4TX	44.88M	38.081M	38M1D1D	43.692M	38.021M
802.11be EHT80_Nss4,(MCS0)_4TX	90.552M	77.961M	78M0D1D	87.648M	77.721M
802.11be EHT160_Nss4,(MCS0)_4TX	175.296M	157.361M	157MD1D	170.016M	157.121M
802.11be EHT320_Nss4,(MCS0)_4TX	484.704M	318.753M	319MD1D	338.976M	316.642M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	23.694M	19.1M	19M1D1D	22.44M	19.04M
802.11be EHT40_Nss4,(MCS0)_4TX	44.88M	38.081M	38M1D1D	43.428M	38.021M
802.11be EHT80_Nss4,(MCS0)_4TX	89.76M	77.961M	78M0D1D	87.648M	77.721M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	23.496M	19.1M	19M1D1D	22.374M	19.04M
802.11be EHT40_Nss4,(MCS0)_4TX	45.012M	38.141M	38M1D1D	43.296M	38.021M
802.11be EHT80_Nss4,(MCS0)_4TX	90.288M	78.105M	78M1D1D	87.912M	77.577M
802.11be EHT160_Nss4,(MCS0)_4TX	175.296M	157.361M	157MD1D	170.544M	157.121M
802.11be EHT320_Nss4,(MCS0)_4TX	343.2M	317.697M	318MD1D	337.92M	316.642M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	23.43M	19.13M	19M1D1D	22.374M	19.04M
802.11be EHT40_Nss4,(MCS0)_4TX	44.748M	38.201M	38M2D1D	43.296M	37.961M
802.11be EHT80_Nss4,(MCS0)_4TX	90.816M	77.961M	78M0D1D	87.912M	77.577M
802.11be EHT160_Nss4,(MCS0)_4TX	174.768M	157.793M	158MD1D	170.016M	156.642M
802.11be EHT320_Nss4,(MCS0)_4TX	343.2M	317.697M	318MD1D	336.864M	315.586M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Minimum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5935MHz	Pass	Inf	23.034M	19.13M	23.1M	19.13M	22.704M	19.1M	22.77M	19.1M
5955MHz	Pass	Inf	22.902M	19.07M	22.704M	19.07M	23.43M	19.07M	23.364M	19.07M
6175MHz	Pass	Inf	22.902M	19.1M	22.638M	19.04M	23.034M	19.07M	22.836M	19.1M
6415MHz	Pass	Inf	22.968M	19.07M	22.572M	19.1M	23.232M	19.07M	22.968M	19.07M
6435MHz	Pass	Inf	22.968M	19.1M	22.77M	19.07M	23.694M	19.07M	22.968M	19.04M
6475MHz	Pass	Inf	22.704M	19.04M	22.44M	19.1M	23.1M	19.07M	23.166M	19.07M
6515MHz	Pass	Inf	22.77M	19.07M	22.836M	19.07M	23.034M	19.07M	22.704M	19.07M
6535MHz	Pass	Inf	23.496M	19.1M	23.034M	19.07M	22.968M	19.04M	23.1M	19.07M
6715MHz	Pass	Inf	23.232M	19.1M	22.374M	19.07M	23.1M	19.07M	23.034M	19.07M
6855MHz	Pass	Inf	22.77M	19.1M	22.836M	19.07M	23.43M	19.07M	23.364M	19.07M
6875MHz Straddle 6.875-7.125GHz	Pass	Inf	22.638M	19.064M	22.968M	19.13M	23.43M	19.064M	23.364M	19.064M
6895MHz	Pass	Inf	22.968M	19.13M	22.902M	19.07M	23.364M	19.07M	22.374M	19.04M
7015MHz	Pass	Inf	22.836M	19.1M	22.704M	19.1M	22.968M	19.1M	23.298M	19.04M
7095MHz	Pass	Inf	22.968M	19.1M	22.506M	19.04M	23.166M	19.1M	22.902M	19.07M
7115MHz	Pass	Inf	22.902M	19.1M	22.704M	19.07M	22.968M	19.07M	22.968M	19.07M
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	44.616M	38.081M	44.88M	38.021M	43.956M	38.081M	44.088M	38.021M
6165MHz	Pass	Inf	43.956M	38.081M	44.484M	38.021M	44.484M	38.081M	43.824M	38.021M
6405MHz	Pass	Inf	44.616M	38.081M	43.692M	38.021M	44.088M	38.081M	44.88M	38.081M
6445MHz	Pass	Inf	44.088M	38.081M	44.22M	38.081M	44.88M	38.081M	43.428M	38.021M
6485MHz	Pass	Inf	44.484M	38.081M	43.692M	38.021M	43.824M	38.081M	43.428M	38.081M
6525MHz Straddle 6.525-6.875GHz	Pass	Inf	44.58M	38.141M	43.8M	38.081M	44.04M	38.081M	44.52M	38.081M
6565MHz	Pass	Inf	44.352M	38.081M	43.956M	38.141M	44.484M	38.081M	43.296M	38.081M
6725MHz	Pass	Inf	44.616M	38.081M	44.484M	38.081M	45.012M	38.081M	44.352M	38.021M
6845MHz	Pass	Inf	44.748M	38.141M	43.56M	38.021M	43.956M	38.021M	43.956M	38.081M
6885MHz Straddle 6.875-7.125GHz	Pass	Inf	43.56M	37.997M	43.956M	38.129M	44.088M	38.129M	44.352M	38.129M
6925MHz	Pass	Inf	43.692M	38.021M	43.956M	38.021M	44.748M	38.081M	43.692M	38.021M
7005MHz	Pass	Inf	43.956M	38.201M	44.088M	38.141M	43.428M	38.081M	43.296M	38.081M
7085MHz	Pass	Inf	43.56M	38.081M	44.22M	38.081M	44.748M	37.961M	43.956M	38.081M
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	89.76M	77.841M	90.288M	77.841M	90.024M	77.841M	87.648M	77.961M
6145MHz	Pass	Inf	90.552M	77.841M	89.496M	77.721M	88.704M	77.721M	88.968M	77.721M
6385MHz	Pass	Inf	88.44M	77.841M	89.232M	77.841M	87.648M	77.721M	88.704M	77.721M
6465MHz	Pass	Inf	89.76M	77.961M	87.648M	77.841M	88.44M	77.841M	88.704M	77.721M
6545MHz Straddle 6.525-6.875GHz	Pass	Inf	87.912M	78.105M	88.704M	78.105M	90.288M	77.577M	89.232M	78.105M
6625MHz	Pass	Inf	89.496M	77.961M	88.968M	77.841M	89.76M	77.721M	88.968M	77.841M
6705MHz	Pass	Inf	90.288M	77.961M	89.496M	77.841M	88.968M	77.961M	89.76M	77.721M
6785MHz	Pass	Inf	88.968M	77.841M	89.496M	77.841M	89.496M	77.841M	88.968M	77.961M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6865MHz Straddle 6.875-7.125GHz	Pass	Inf	88.968M	77.841M	89.76M	77.577M	87.912M	77.841M	88.44M	77.841M
6945MHz	Pass	Inf	88.968M	77.841M	89.232M	77.961M	88.44M	77.721M	89.496M	77.841M
7025MHz	Pass	Inf	90.816M	77.841M	88.704M	77.841M	88.44M	77.841M	88.968M	77.841M
802.11be EHT160_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	172.128M	157.361M	171.6M	157.121M	172.656M	157.121M	172.656M	157.361M
6185MHz	Pass	Inf	174.24M	157.361M	173.712M	157.121M	174.768M	157.361M	171.072M	157.361M
6345MHz	Pass	Inf	175.296M	157.361M	170.016M	157.121M	171.6M	157.361M	171.072M	157.361M
6505MHz Straddle 6.525-6.875GHz	Pass	Inf	175.296M	157.265M	172.656M	157.265M	170.544M	157.265M	171.072M	157.265M
6665MHz	Pass	Inf	172.656M	157.361M	172.128M	157.121M	171.6M	157.121M	172.128M	157.361M
6825MHz Straddle 6.875-7.125GHz	Pass	Inf	174.768M	157.265M	172.656M	157.265M	171.6M	157.793M	172.656M	157.265M
6985MHz	Pass	Inf	172.128M	157.121M	173.184M	157.121M	171.072M	156.882M	170.016M	156.642M
802.11be EHT320_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	484.704M	317.601M	483.648M	317.121M	344.256M	317.121M	352.704M	317.601M
6265MHz	Pass	Inf	342.144M	316.642M	343.2M	317.121M	343.2M	317.121M	338.976M	317.601M
6425MHz Straddle 5.925-6.425GHz	Pass	Inf	340.032M	318.753M	340.032M	318.753M	340.032M	317.697M	342.144M	317.697M
6585MHz Straddle 6.525-6.875GHz	Pass	Inf	343.2M	317.697M	343.2M	317.697M	337.92M	316.642M	340.032M	316.642M
6745MHz Straddle 6.875-7.125GHz	Pass	Inf	341.088M	317.697M	340.032M	317.697M	341.088M	317.697M	343.2M	316.642M
6905MHz Straddle 6.875-7.125GHz	Pass	Inf	340.032M	316.642M	336.864M	315.586M	336.864M	316.642M	338.976M	316.642M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth



5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


5935MHz

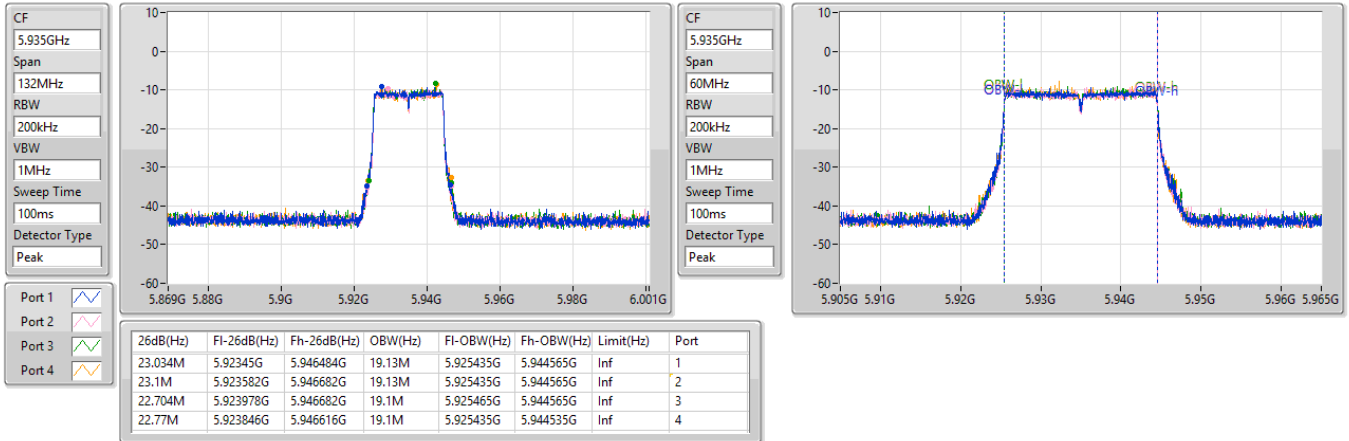

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

5955MHz

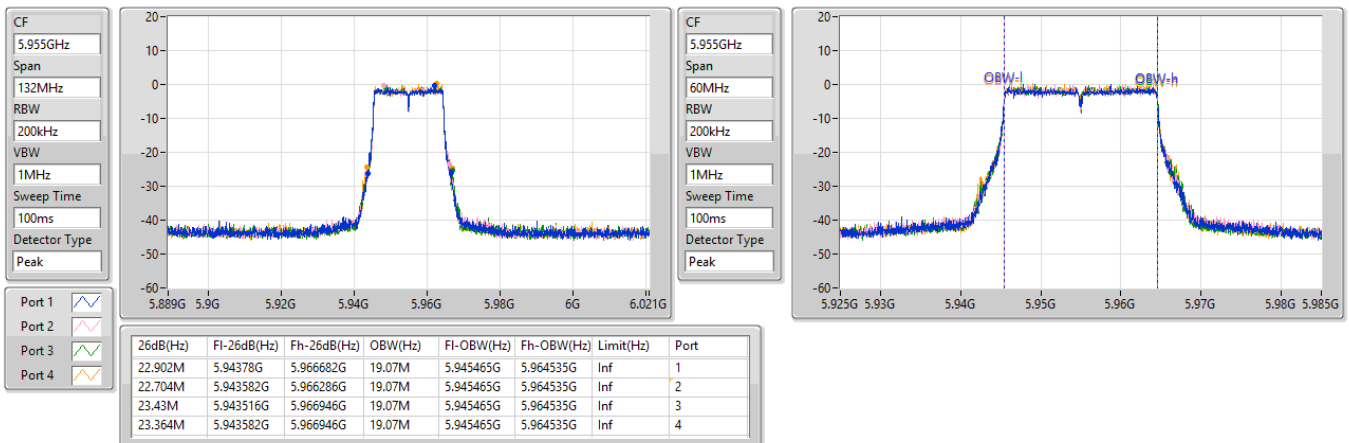




5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

6175MHz


CF
6.175GHz
Span
132MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

Port 1
Port 2
Port 3
Port 4

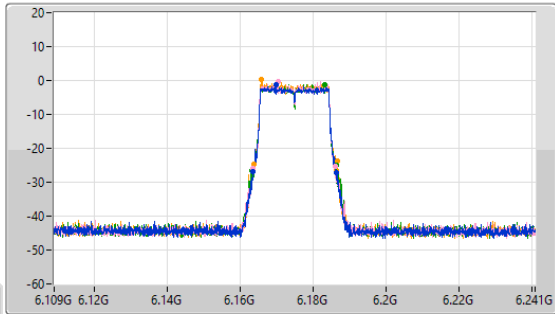

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.902M	6.163648G	6.18655G	19.1M	6.165435G	6.184535G	Inf	1
22.638M	6.163582G	6.18622G	19.04M	6.165465G	6.184505G	Inf	2
23.034M	6.163384G	6.186418G	19.07M	6.165465G	6.184535G	Inf	3
22.836M	6.16378G	6.186616G	19.1M	6.165435G	6.184535G	Inf	4

CF
6.175GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

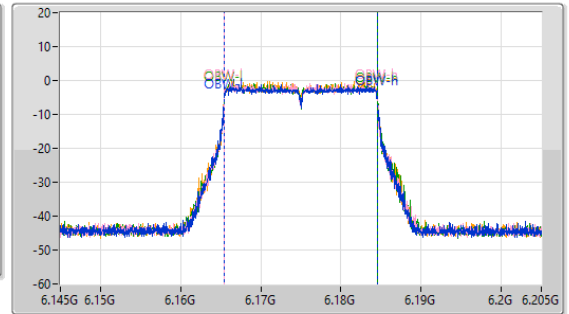


5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

6415MHz


CF
6.415GHz
Span
132MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

Port 1
Port 2
Port 3
Port 4

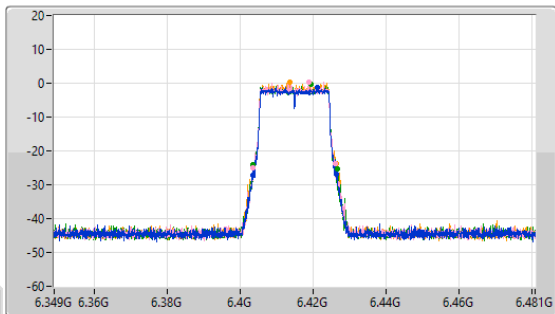

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.968M	6.403582G	6.42655G	19.07M	6.405465G	6.424535G	Inf	1
22.572M	6.403648G	6.42622G	19.1M	6.405435G	6.424535G	Inf	2
23.232M	6.403648G	6.42688G	19.07M	6.405465G	6.424535G	Inf	3
22.968M	6.403582G	6.42655G	19.07M	6.405465G	6.424535G	Inf	4

CF
6.415GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

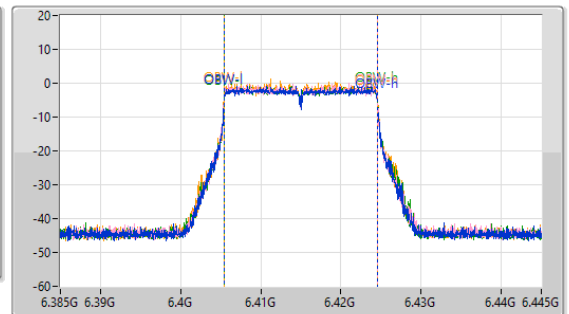




6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


6435MHz

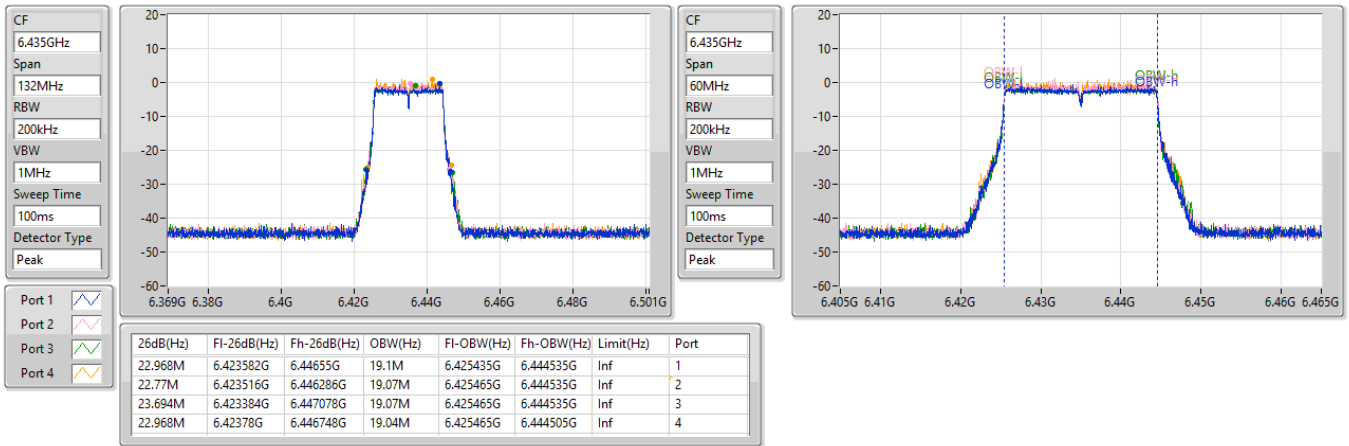

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

6475MHz

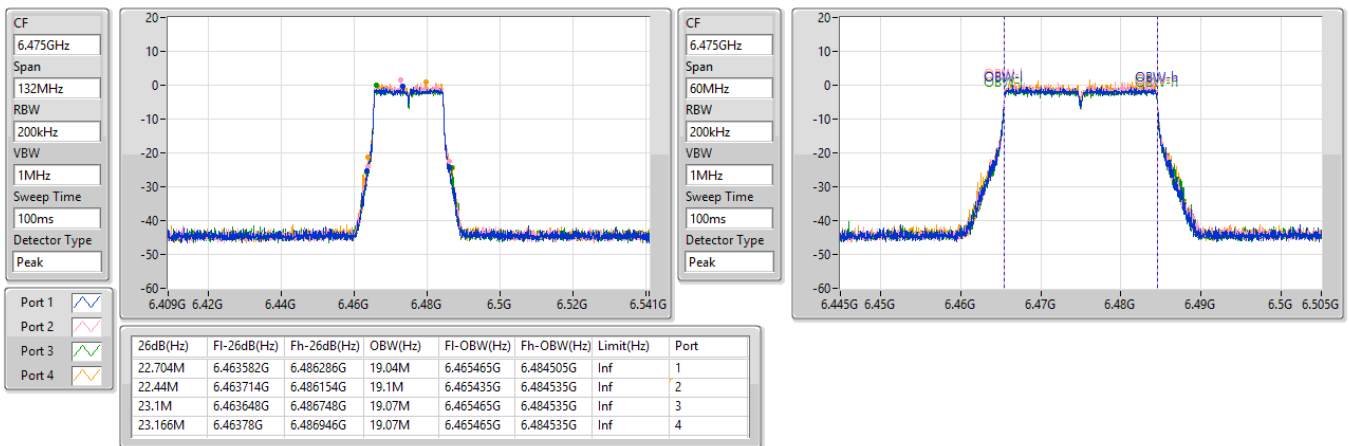




6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


6515MHz

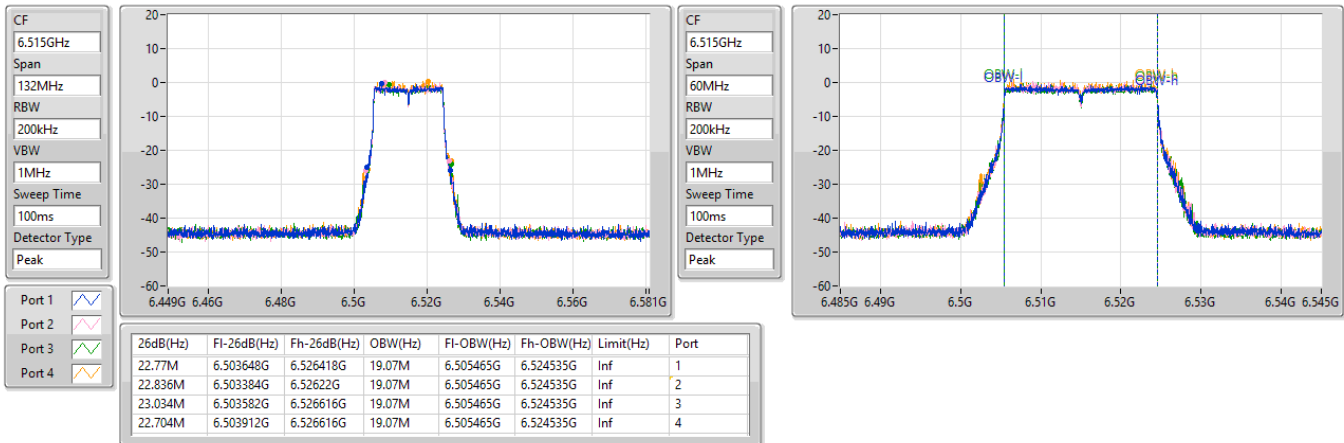

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

6535MHz

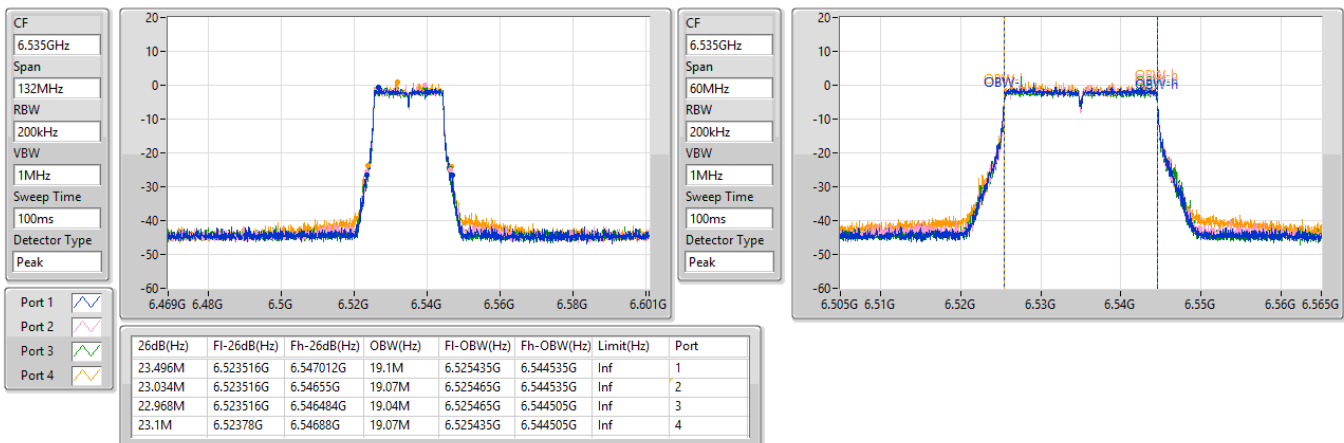




6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


6715MHz

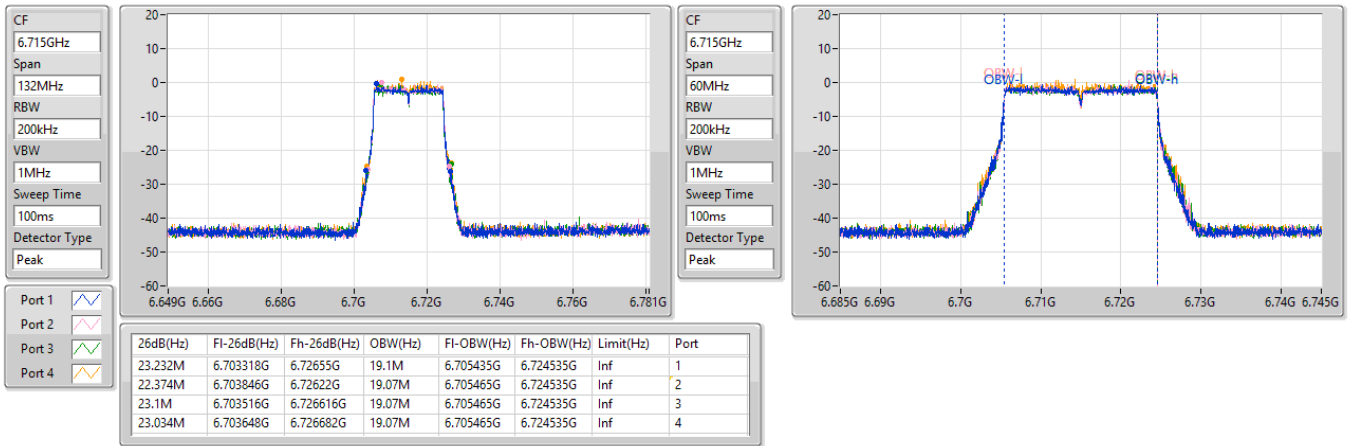

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

6855MHz

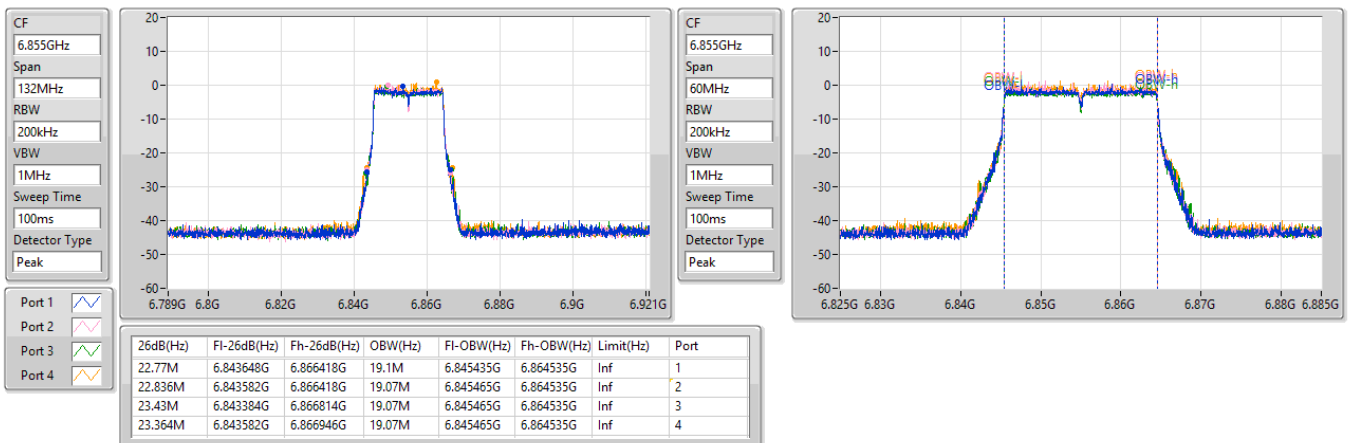




6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


6875MHz Straddle 6.875-7.125GHz

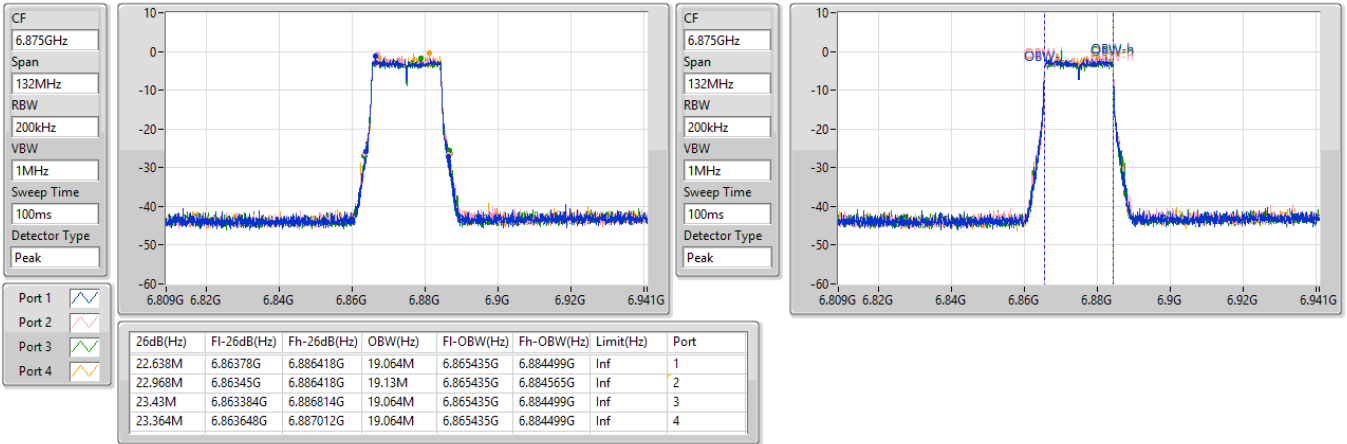

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

6895MHz

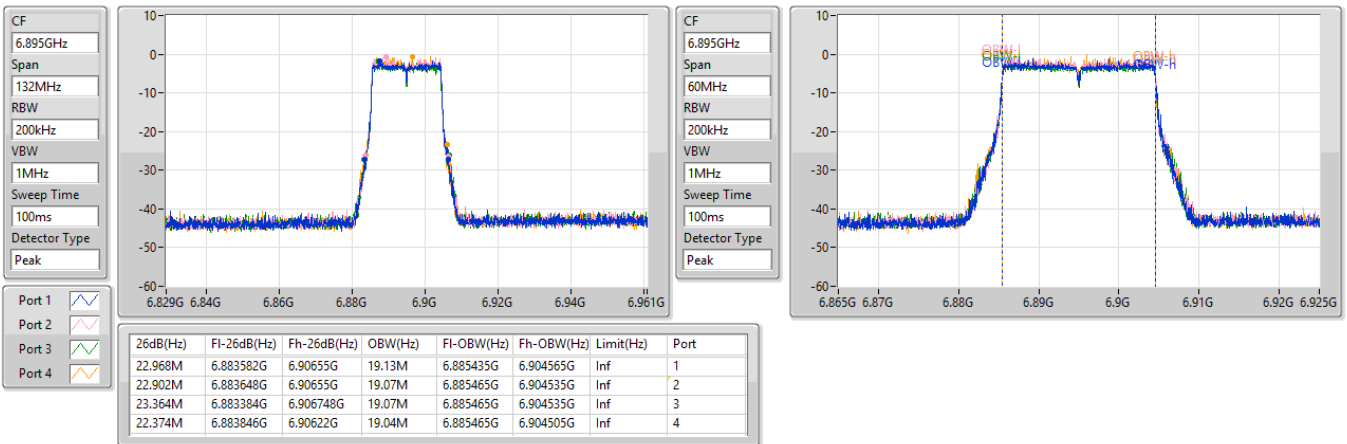




6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


7015MHz

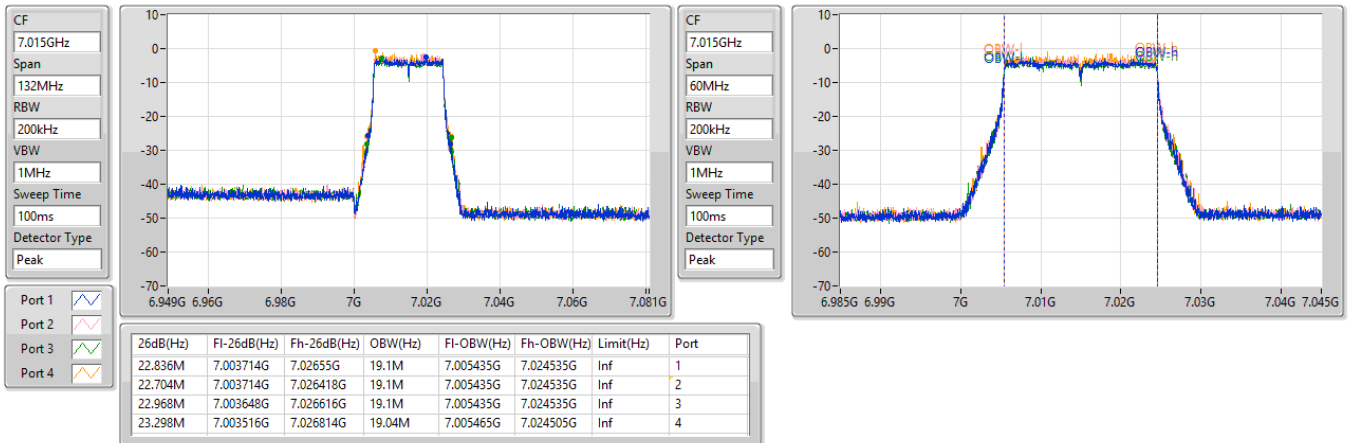

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW

7095MHz

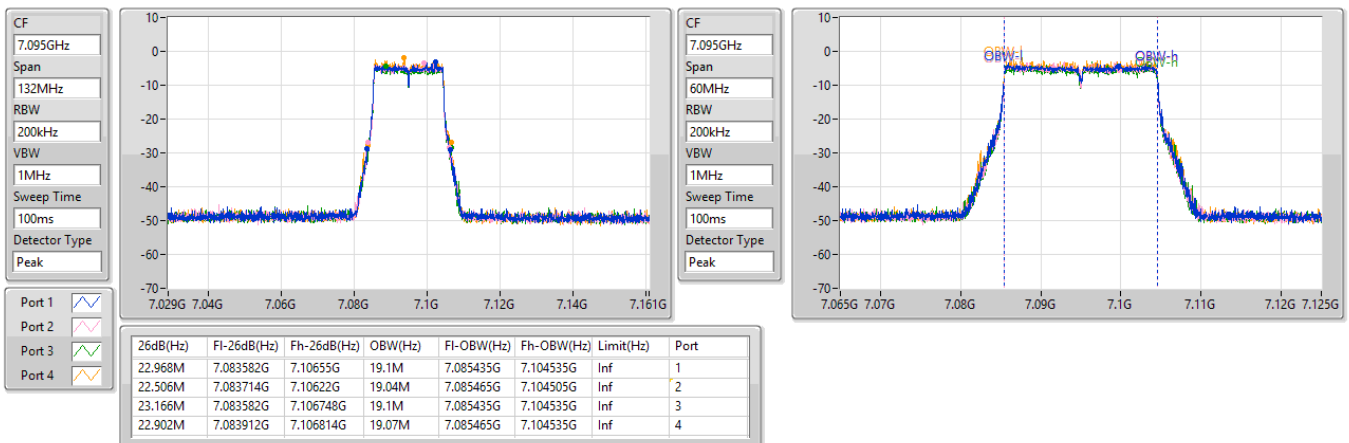




6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

EBW


7115MHz

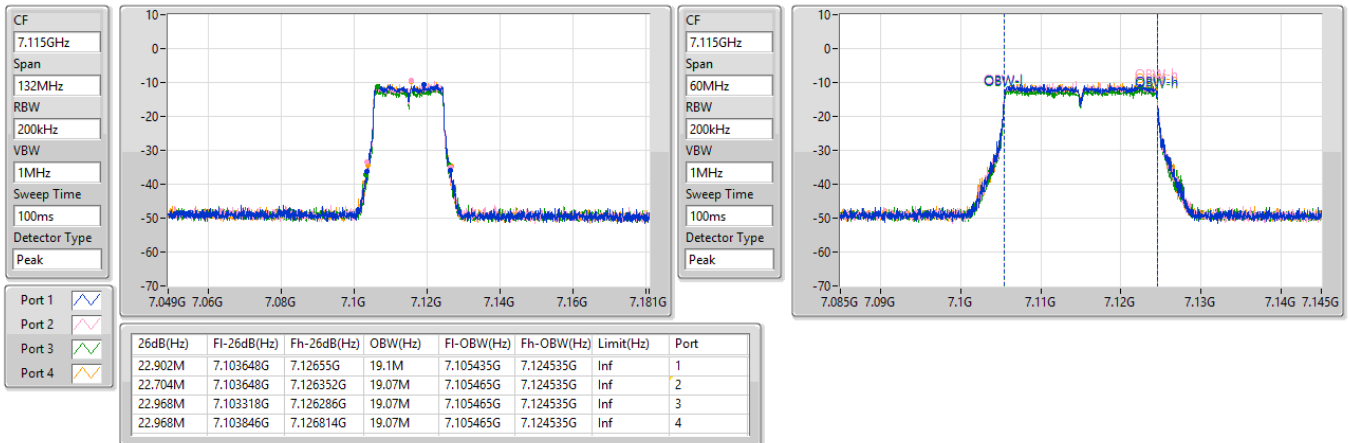

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

5965MHz


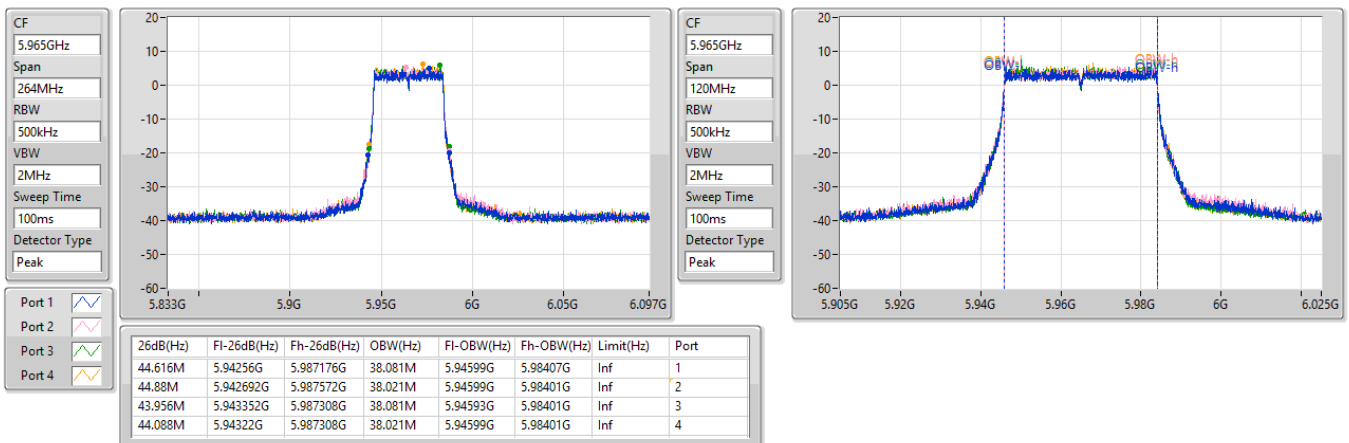




5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW



6165MHz

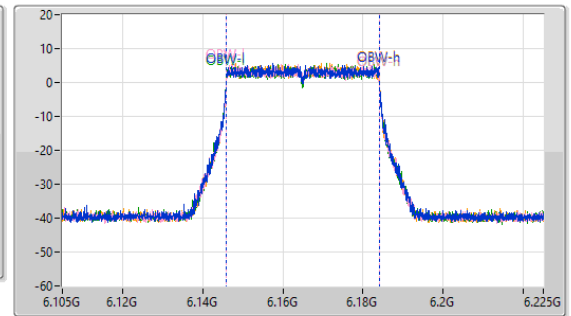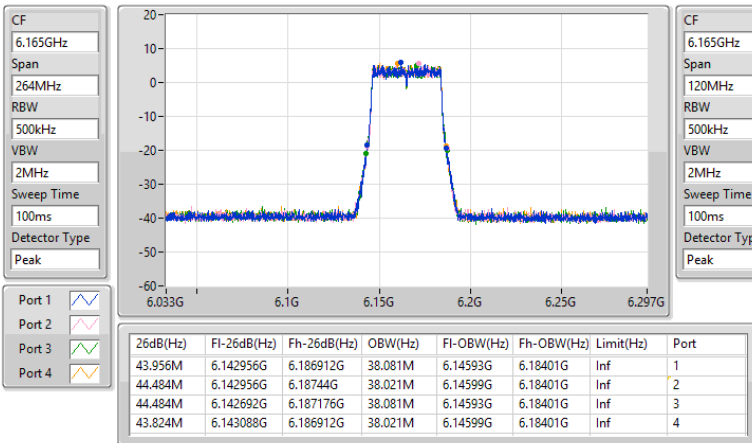

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

6405MHz

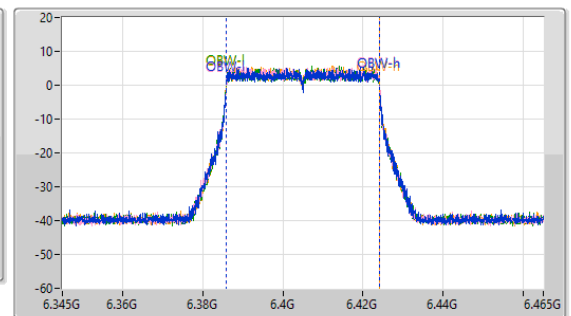
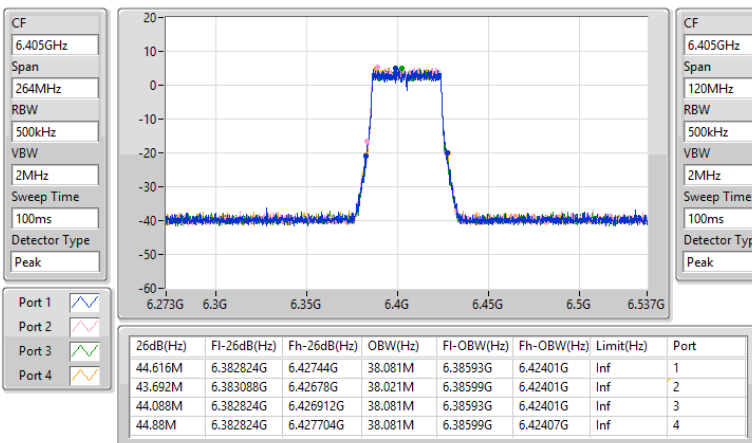




6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW



6445MHz

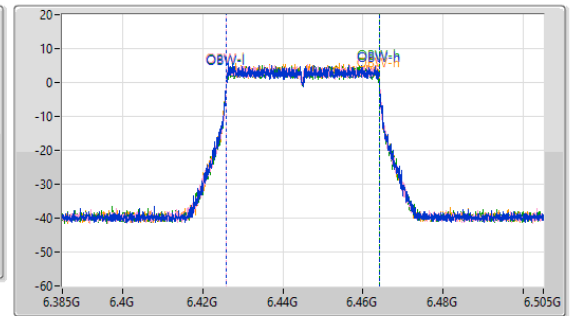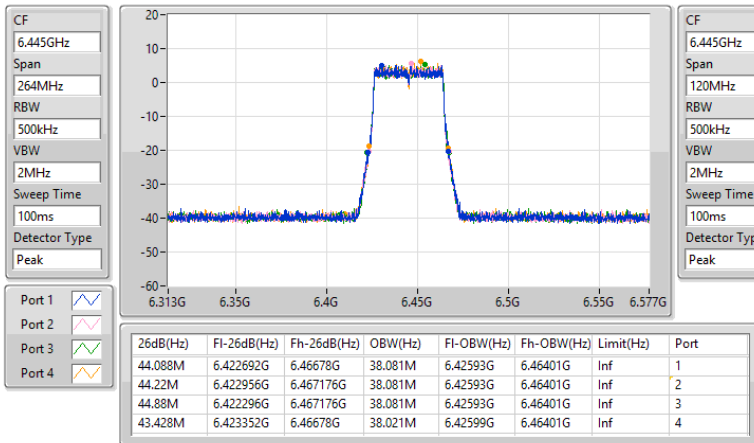

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

6485MHz

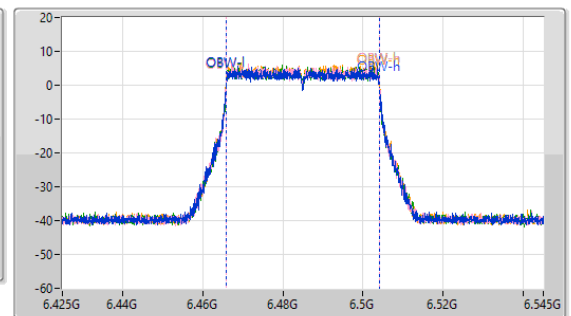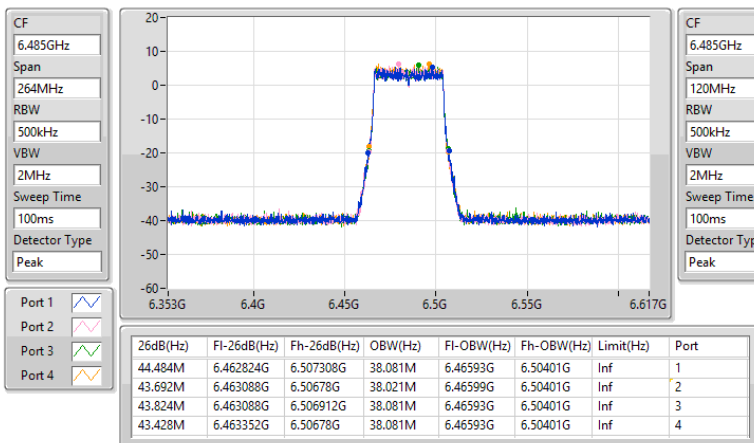




6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW


6525MHz Straddle 6.525-6.875GHz

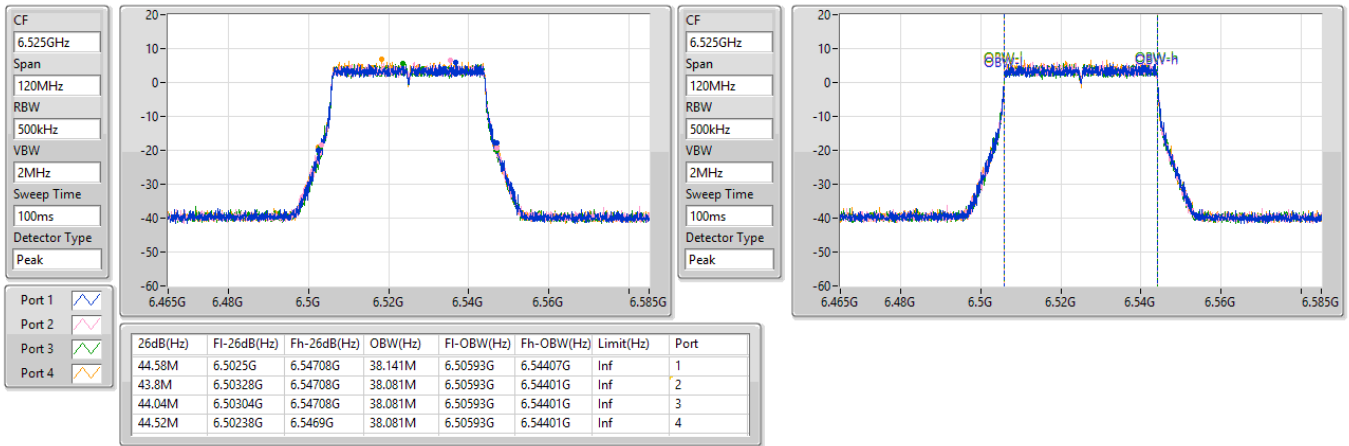

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

6565MHz


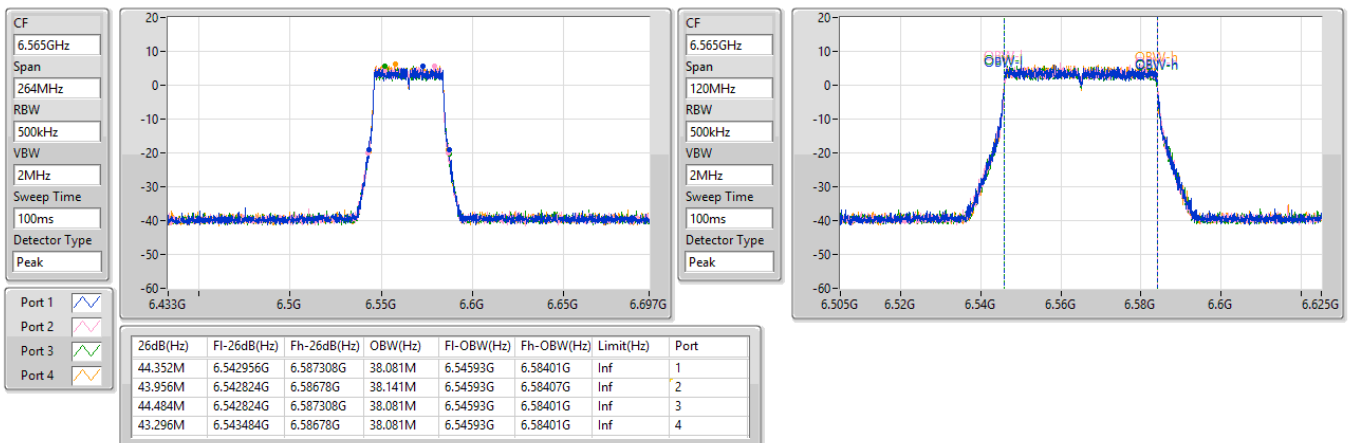




6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW



6725MHz

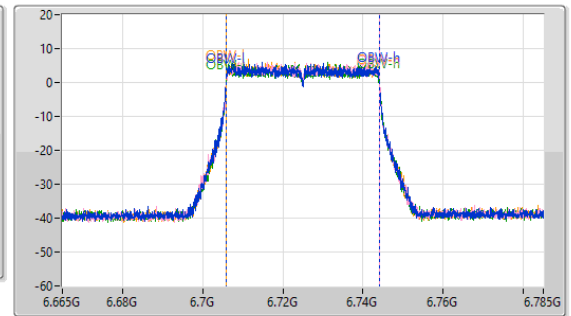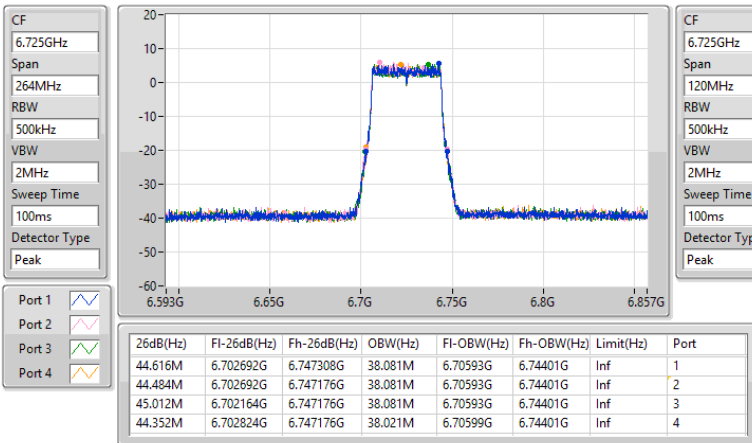

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

6845MHz

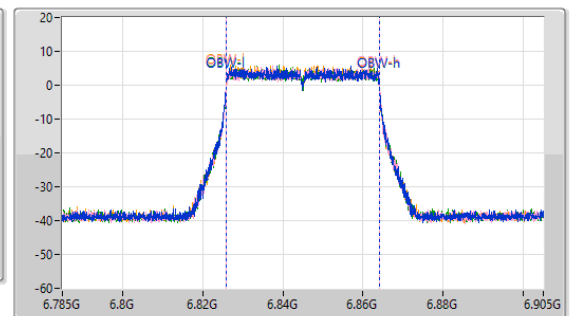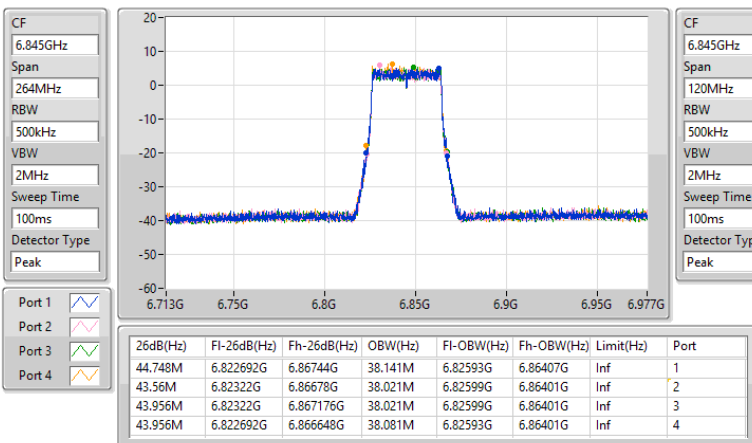




6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW


6885MHz Straddle 6.875-7.125GHz

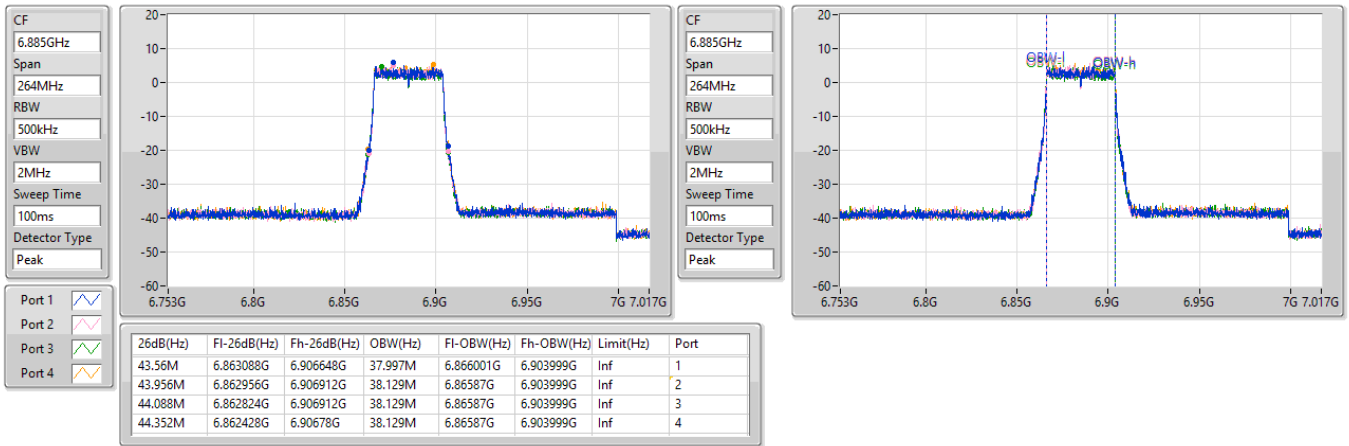

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

6925MHz


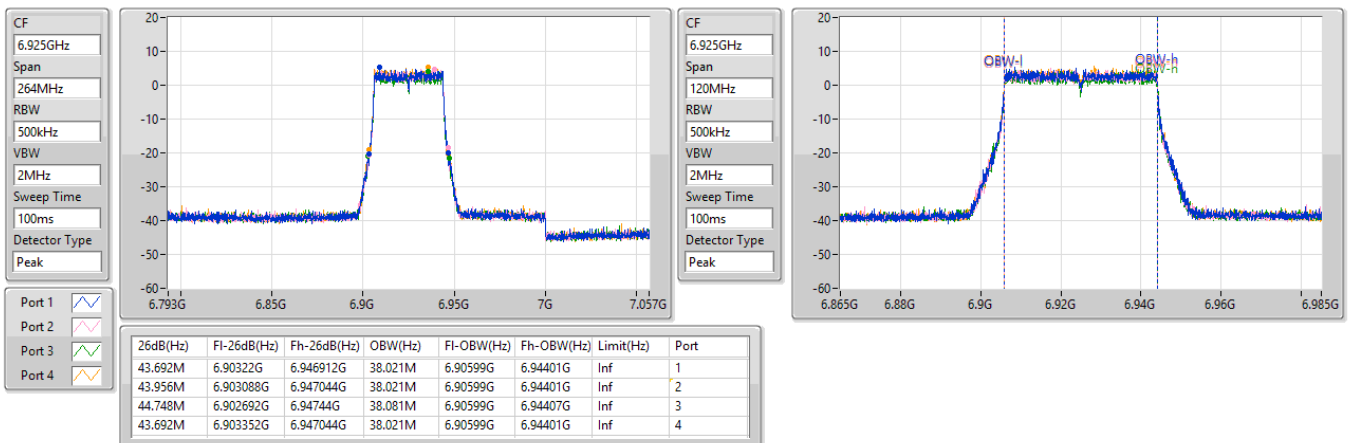




6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW



7005MHz

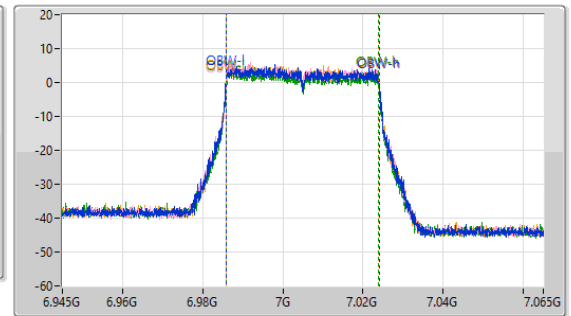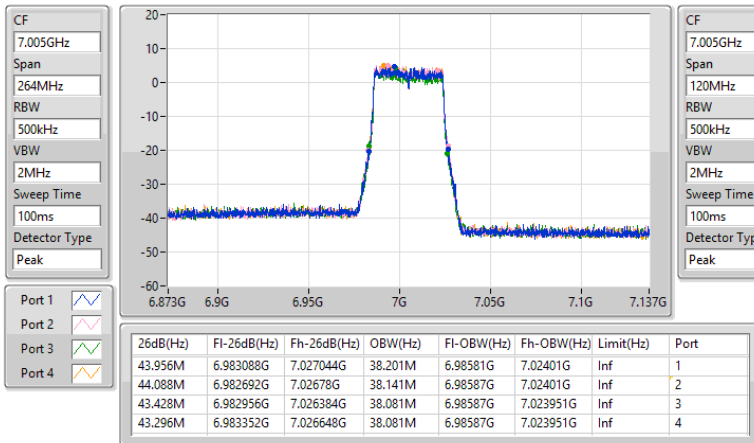

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

EBW

7085MHz

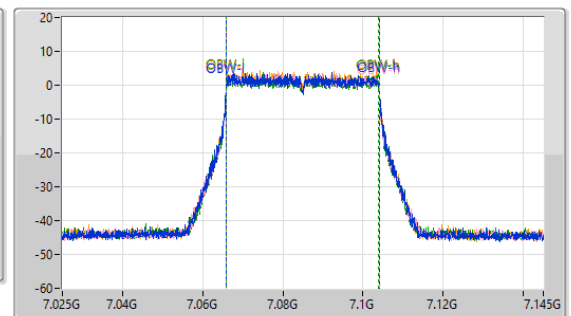
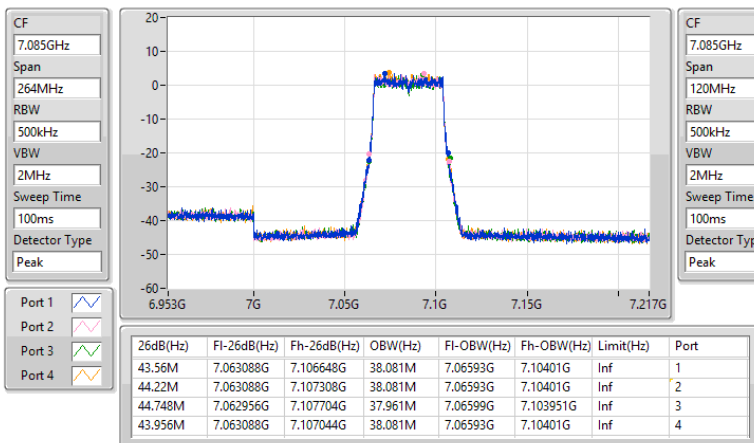




5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW



5985MHz

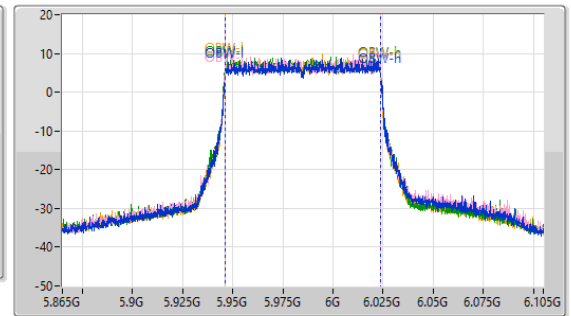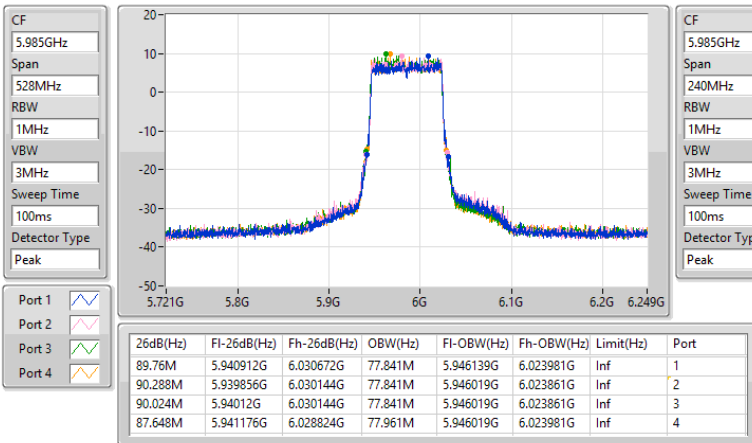

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

6145MHz

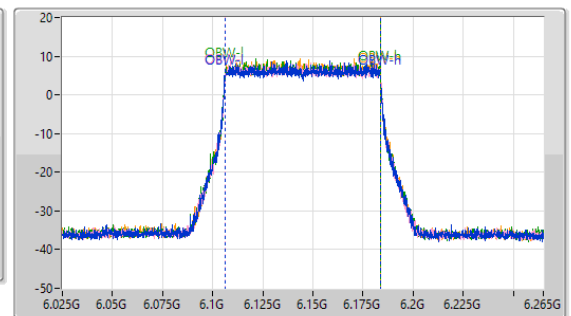
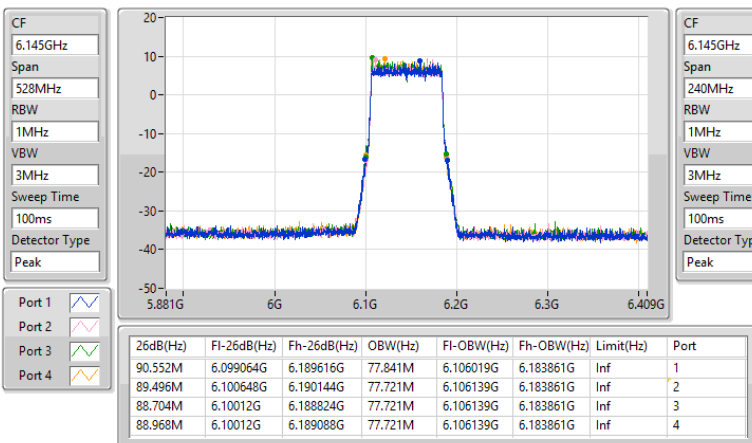




5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW



6385MHz

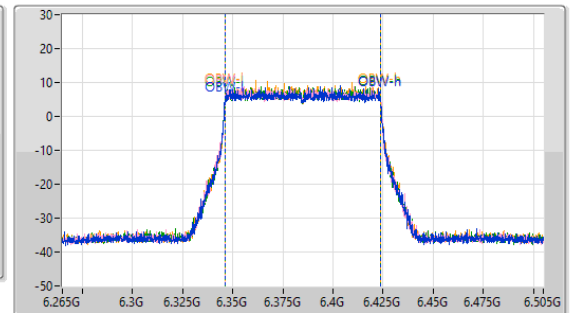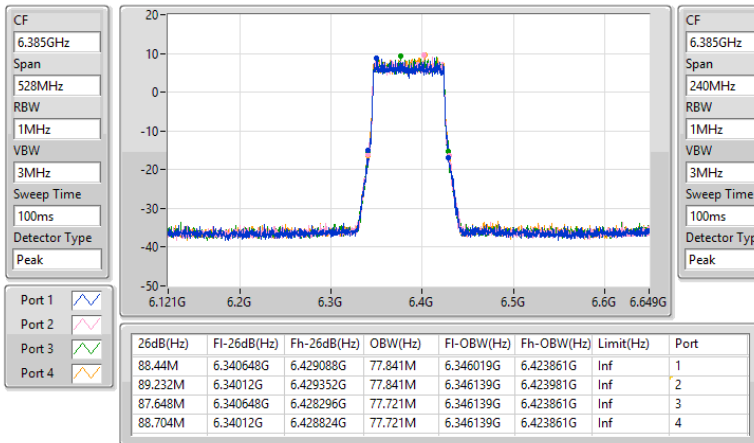

6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

6465MHz

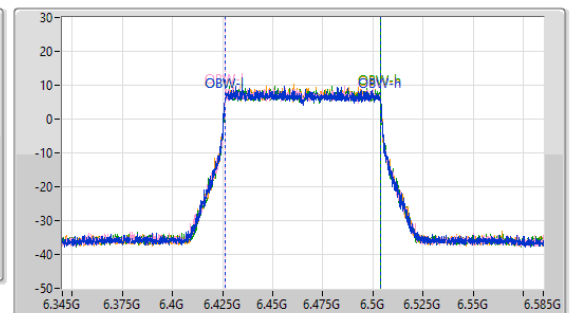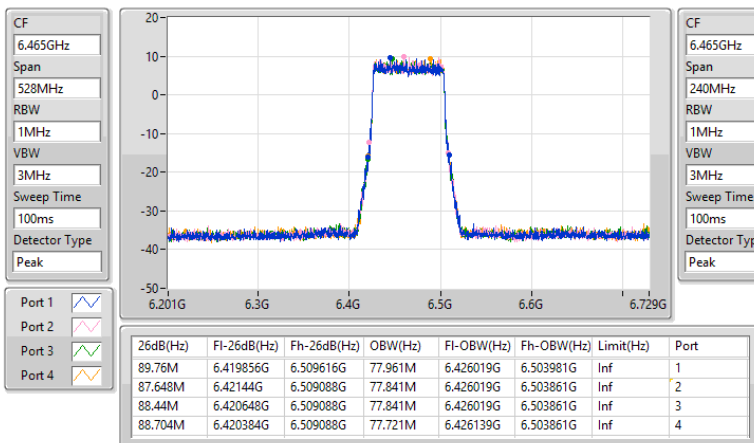




6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW


6545MHz Straddle 6.525-6.875GHz

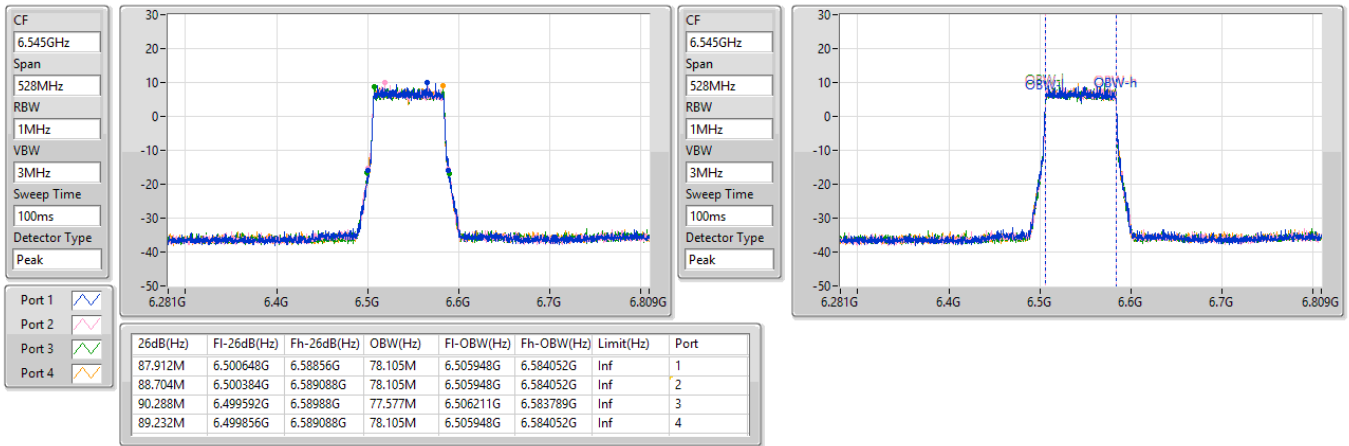

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

6625MHz


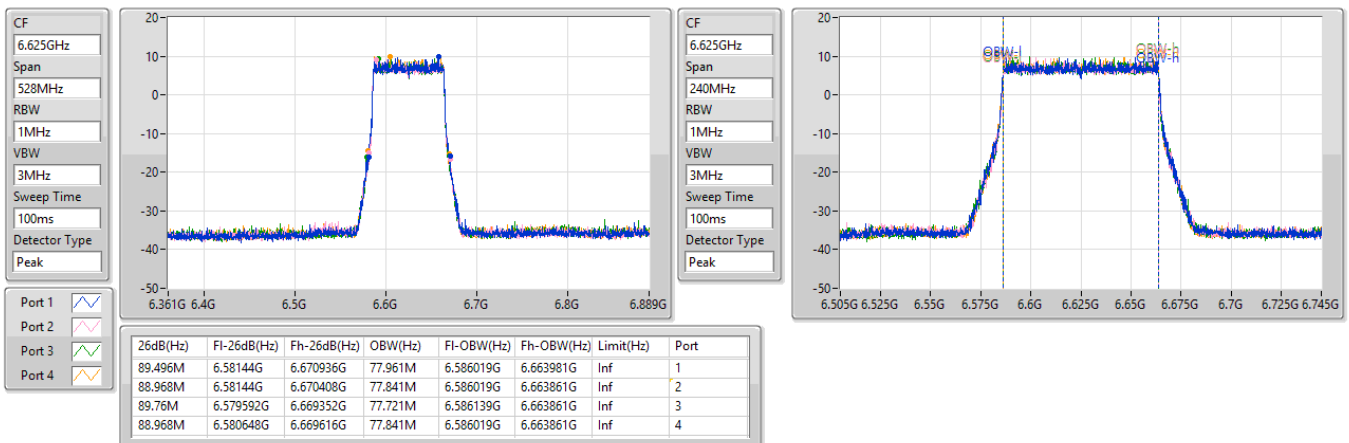




6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW



6705MHz

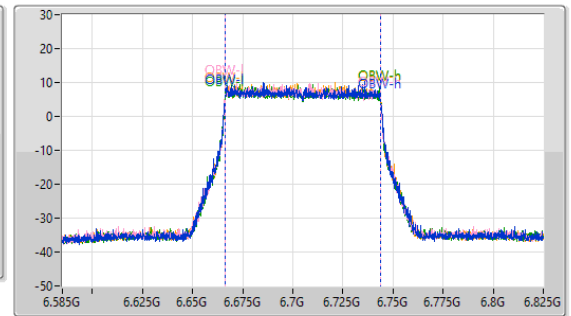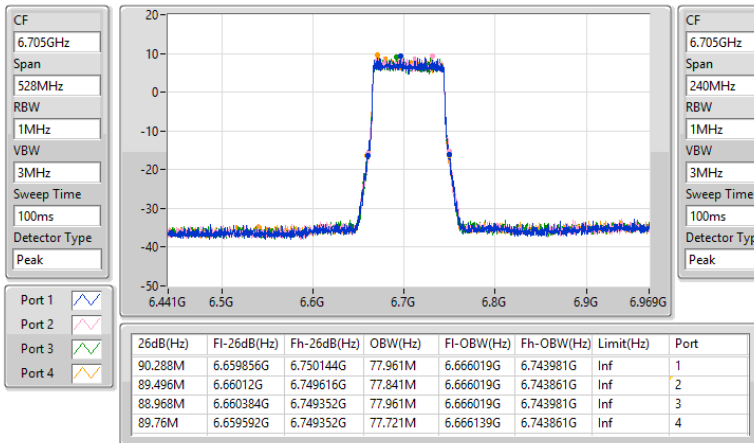

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

6785MHz

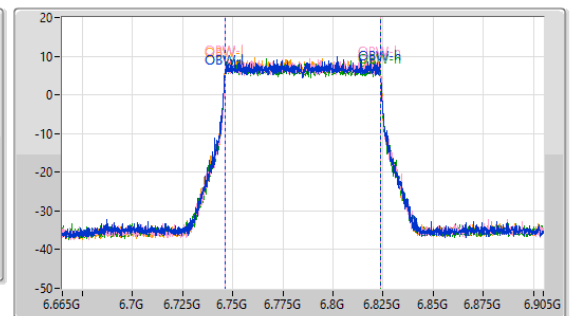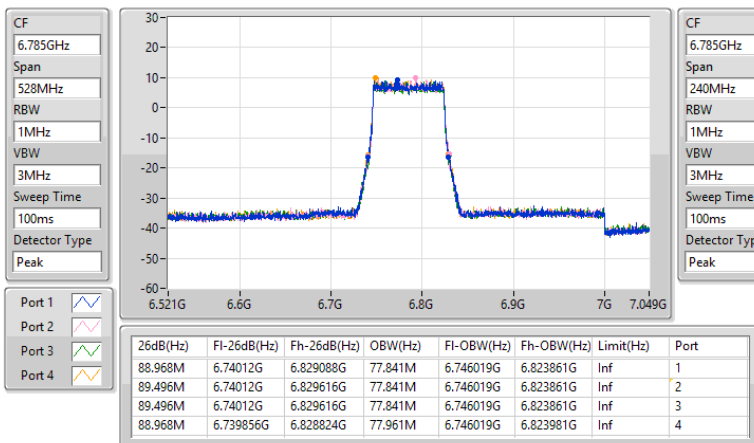




6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW


6865MHz Straddle 6.875-7.125GHz

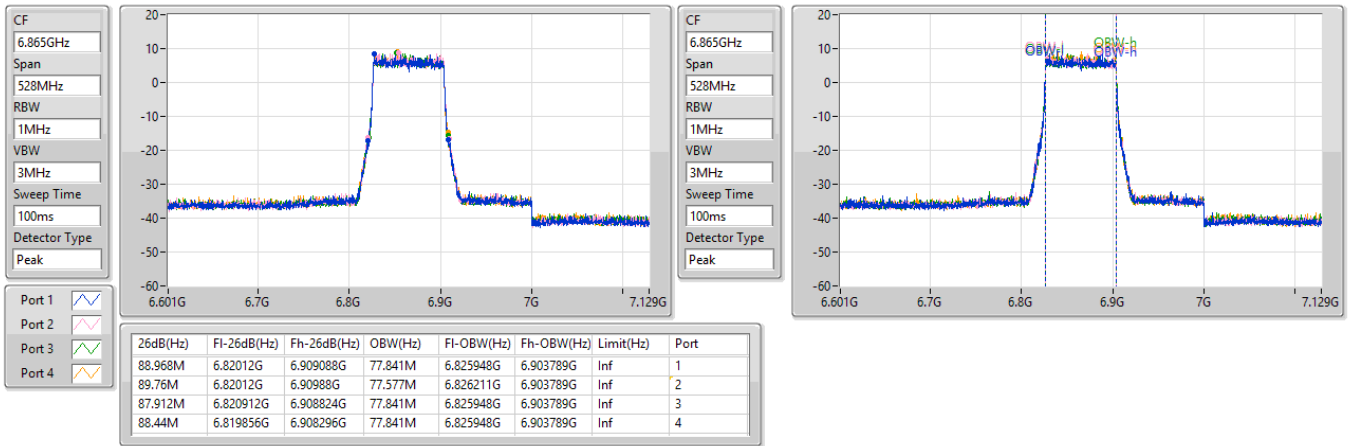

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW

6945MHz


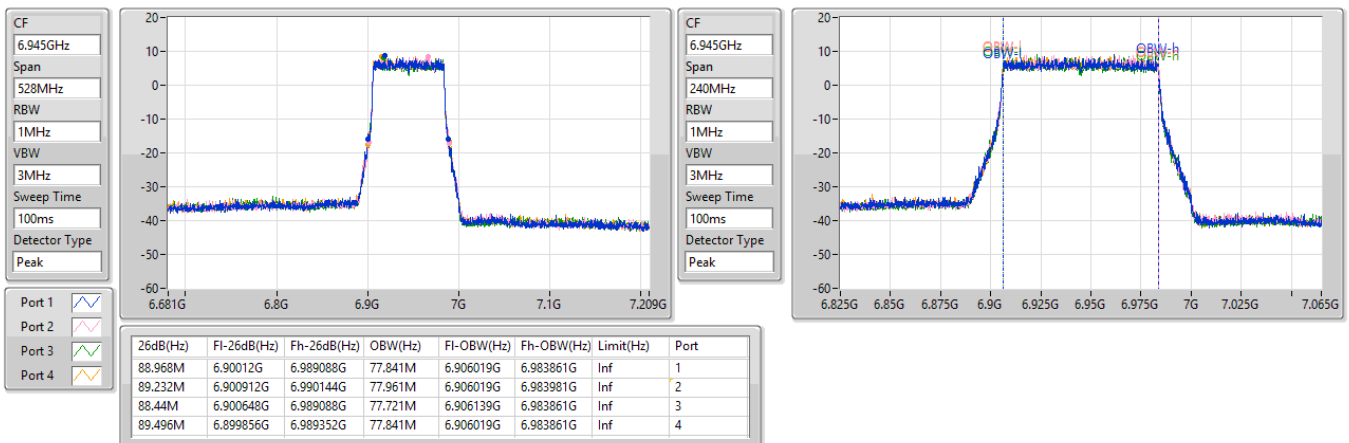




6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

EBW



7025MHz

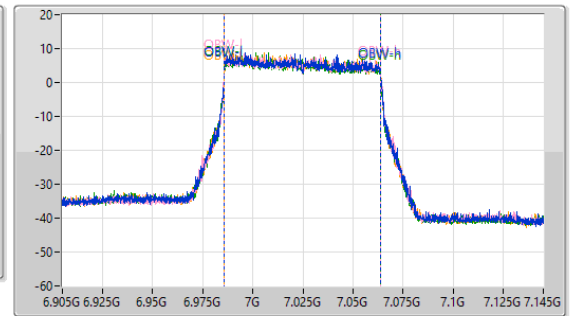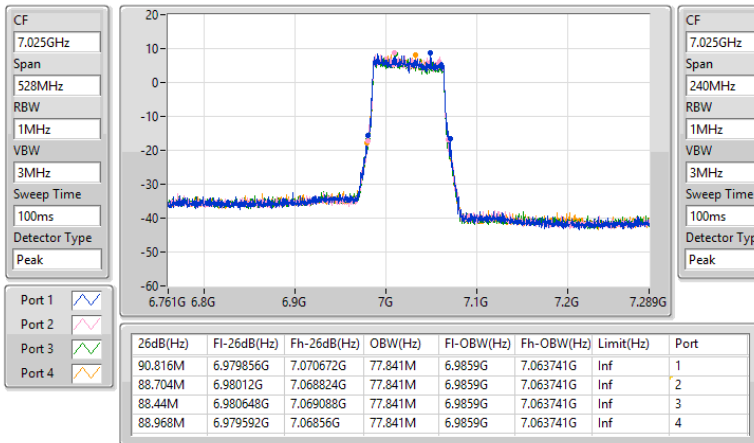

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW



6025MHz

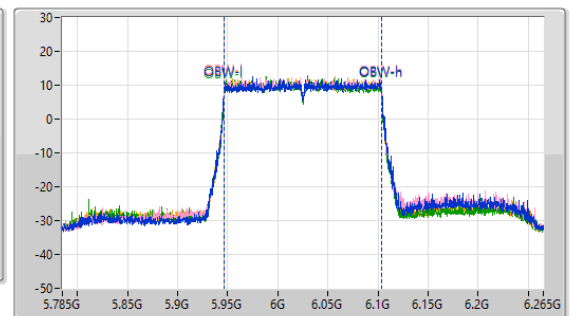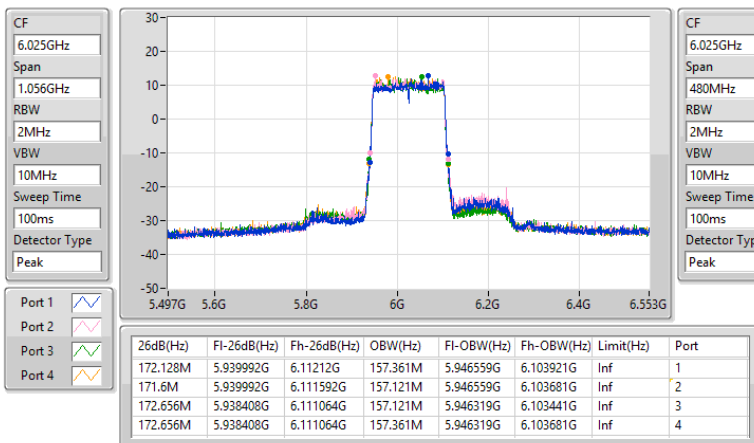

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW



6185MHz

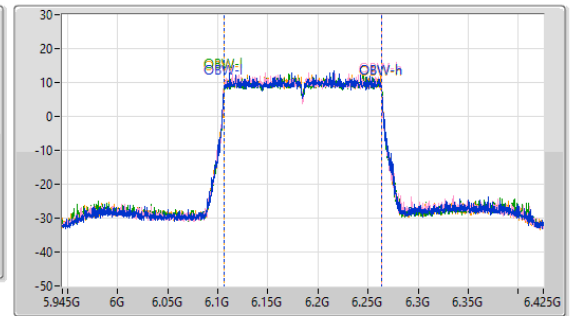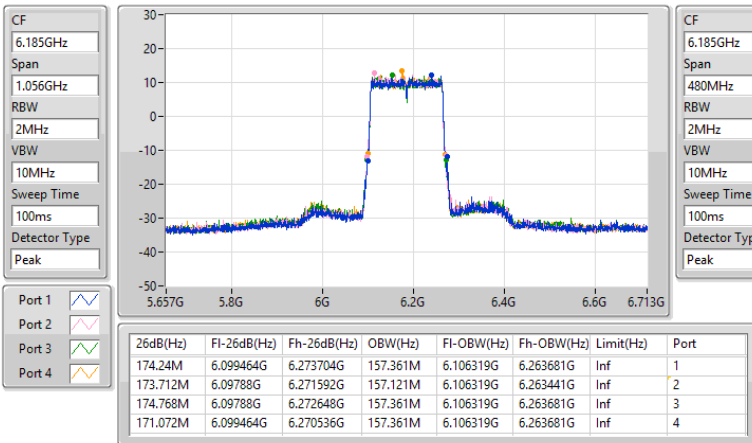

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW

6345MHz

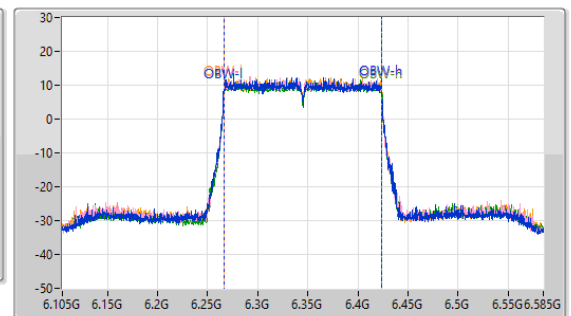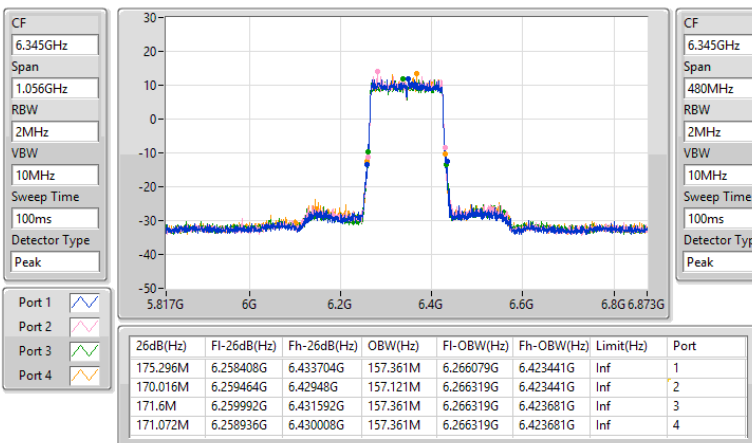




6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW


6505MHz Straddle 6.525-6.875GHz

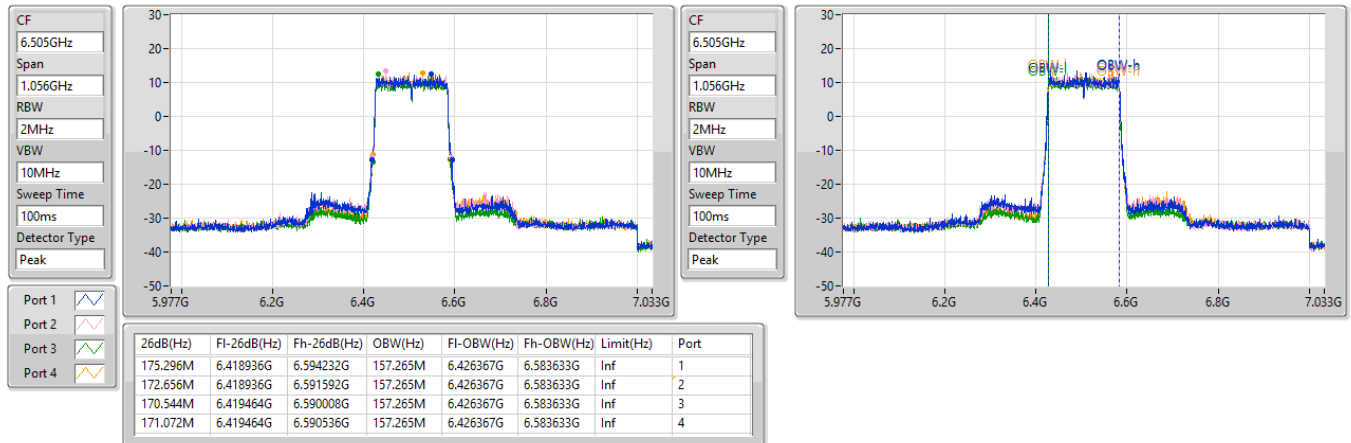

6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW

6665MHz

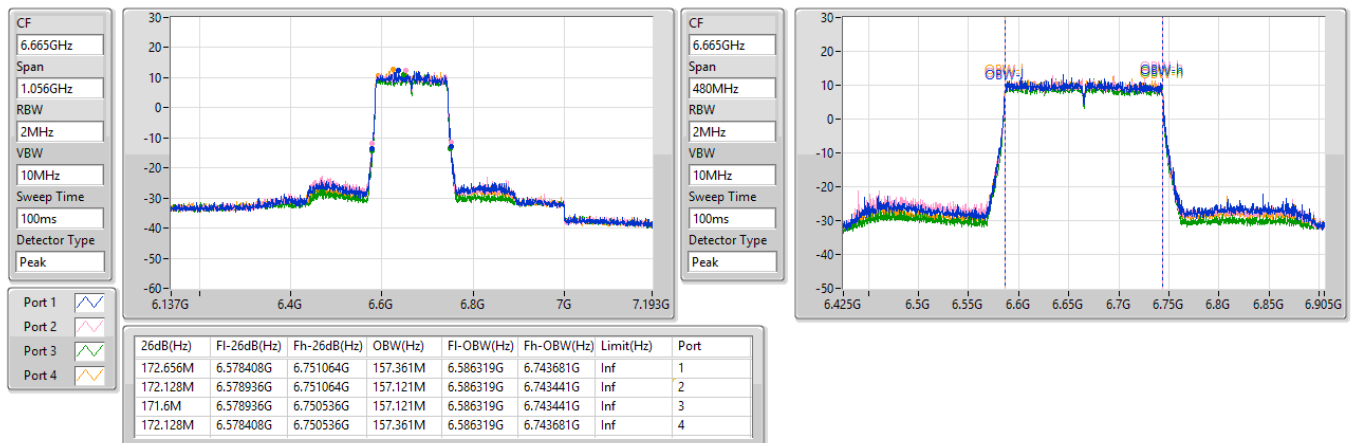




6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW


6825MHz Straddle 6.875-7.125GHz

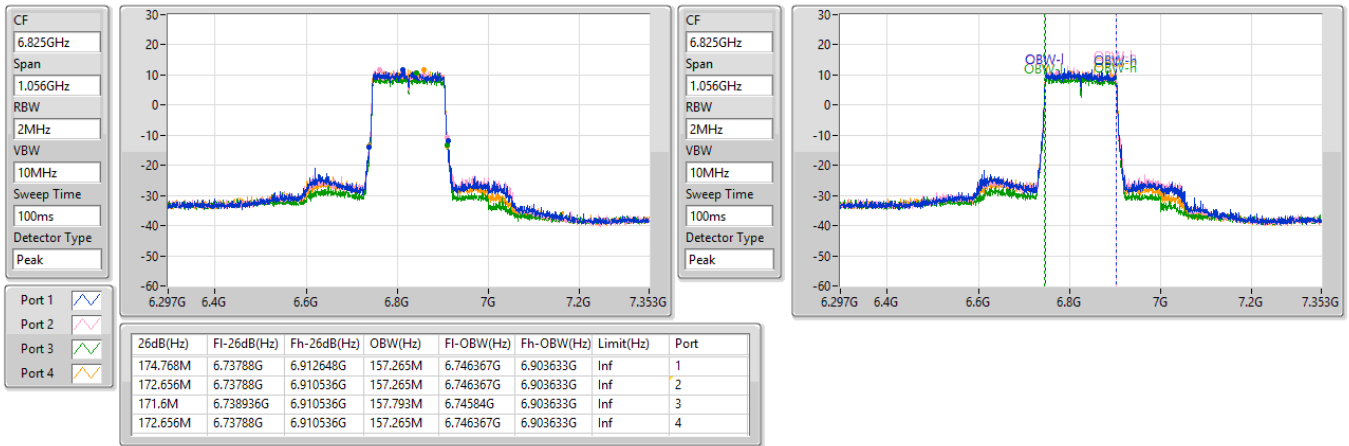

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

EBW

6985MHz


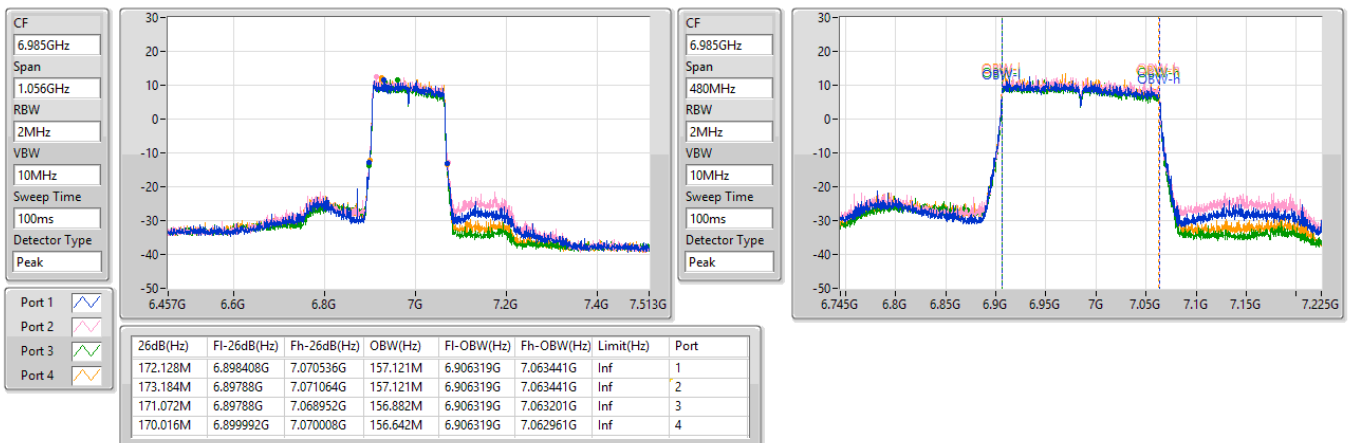




5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

EBW



6105MHz

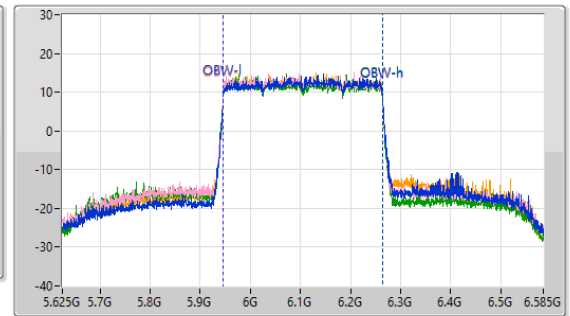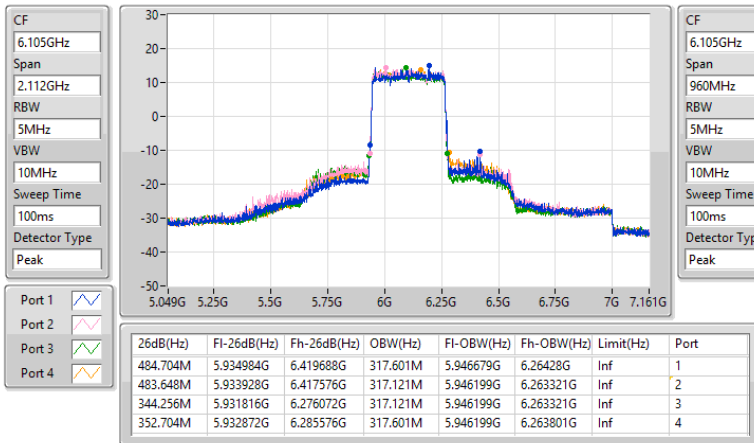

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

EBW

6265MHz

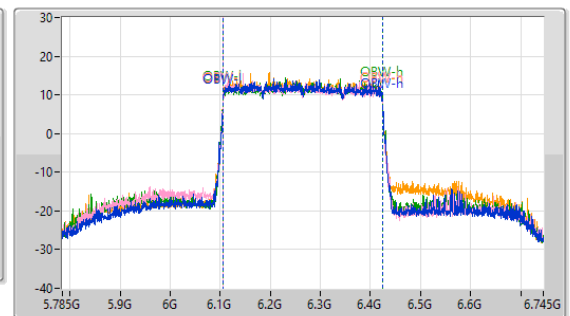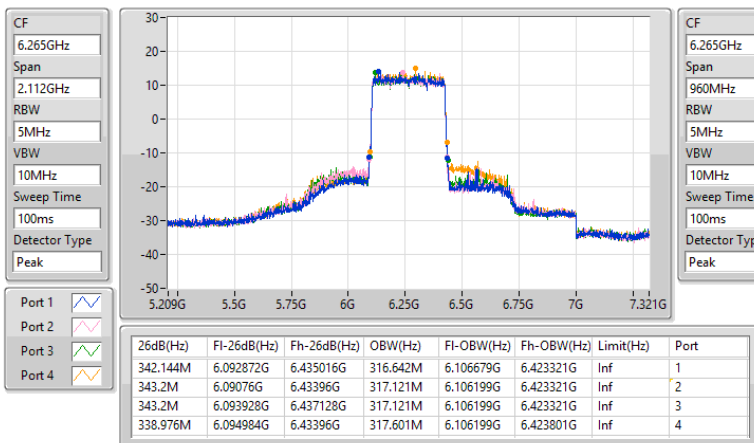




5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

EBW


6425MHz Straddle 5.925-6.425GHz

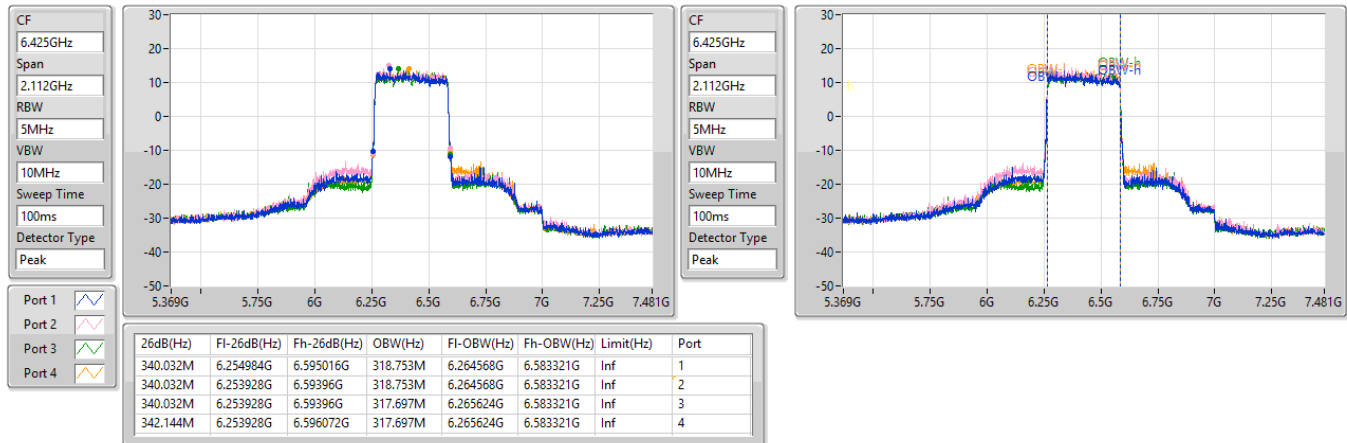

6.525-6.875GHz_802.11be EHT320_Nss4,(MCS0)_4TX

EBW

6585MHz Straddle 6.525-6.875GHz

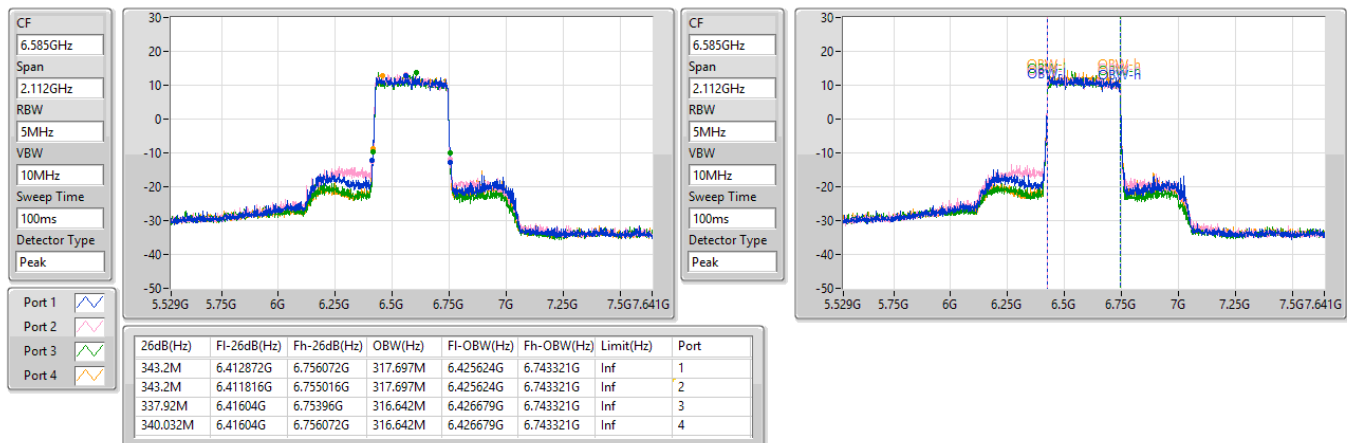




6.875-7.125GHz_802.11be EHT320_Nss4,(MCS0)_4TX

EBW


6745MHz Straddle 6.875-7.125GHz

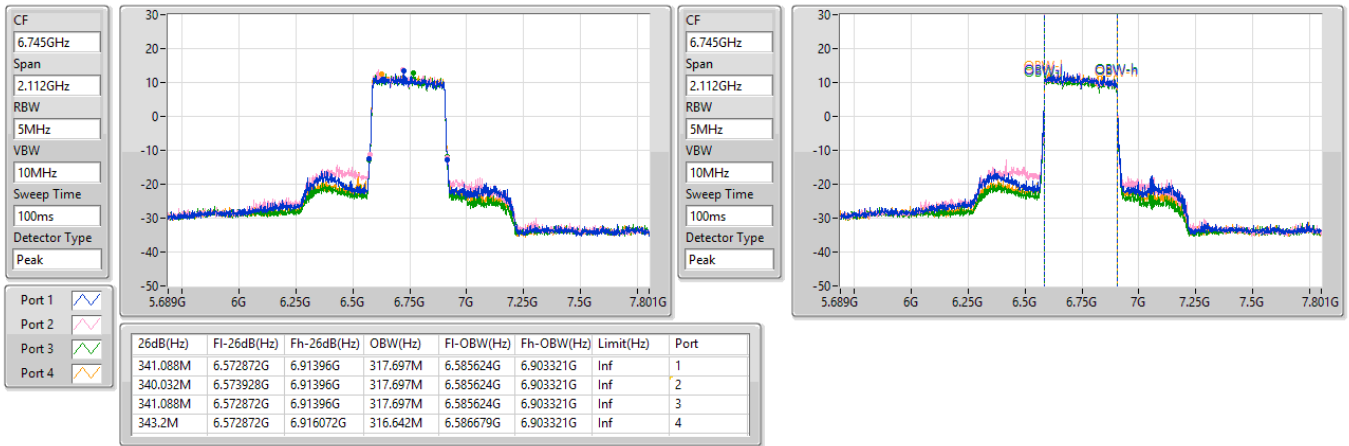

6.875-7.125GHz_802.11be EHT320_Nss4,(MCS0)_4TX

EBW

6905MHz Straddle 6.875-7.125GHz

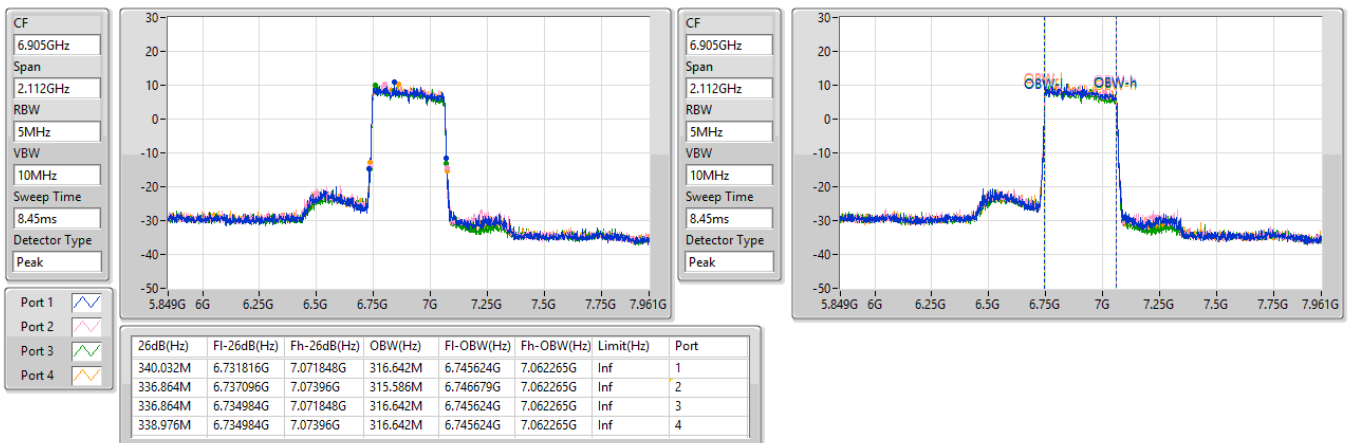

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	15.71	0.03724	18.34	0.06823
802.11be EHT40_Nss4,(MCS0)_4TX	18.73	0.07464	21.36	0.13677
802.11be EHT80_Nss4,(MCS0)_4TX	21.61	0.14488	24.24	0.26546
802.11be EHT160_Nss4,(MCS0)_4TX	24.67	0.29309	27.30	0.53703
802.11be EHT320_Nss4,(MCS0)_4TX	25.69	0.37068	28.32	0.67920
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	16.17	0.04140	18.45	0.06998
802.11be EHT40_Nss4,(MCS0)_4TX	18.99	0.07925	21.27	0.13397
802.11be EHT80_Nss4,(MCS0)_4TX	22.09	0.16181	24.37	0.27353
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	16.24	0.04207	18.61	0.07261
802.11be EHT40_Nss4,(MCS0)_4TX	19.11	0.08147	21.48	0.14060
802.11be EHT80_Nss4,(MCS0)_4TX	22.05	0.16032	24.42	0.27669
802.11be EHT160_Nss4,(MCS0)_4TX	24.85	0.30549	27.22	0.52723
802.11be EHT320_Nss4,(MCS0)_4TX	24.36	0.27290	26.73	0.47098
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	15.41	0.03475	18.58	0.07211
802.11be EHT40_Nss4,(MCS0)_4TX	18.43	0.06966	21.60	0.14454
802.11be EHT80_Nss4,(MCS0)_4TX	21.25	0.13335	24.42	0.27669
802.11be EHT160_Nss4,(MCS0)_4TX	24.09	0.25645	27.26	0.53211
802.11be EHT320_Nss4,(MCS0)_4TX	24.03	0.25293	27.20	0.52481

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5935MHz	Pass	2.63	0.87	1.06	0.92	0.93	6.97	Inf	9.60	30.00
5955MHz	Pass	2.63	9.43	9.62	9.84	9.85	15.71	Inf	18.34	30.00
6175MHz	Pass	2.63	9.56	9.42	9.51	9.89	15.62	Inf	18.25	30.00
6415MHz	Pass	2.63	9.36	9.74	9.52	9.95	15.67	Inf	18.30	30.00
6435MHz	Pass	2.28	9.35	9.72	9.47	10.02	15.67	Inf	17.95	30.00
6475MHz	Pass	2.28	10.01	10.38	9.75	10.43	16.17	Inf	18.45	30.00
6515MHz	Pass	2.28	9.82	9.83	9.35	10.06	15.79	Inf	18.07	30.00
6535MHz	Pass	2.37	9.75	9.76	9.46	10.06	15.78	Inf	18.15	30.00
6715MHz	Pass	2.37	10.27	10.13	9.79	10.66	16.24	Inf	18.61	30.00
6855MHz	Pass	2.37	9.75	10.11	9.32	10.36	15.92	Inf	18.29	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	3.17	8.85	9.39	8.48	9.12	14.99	Inf	18.16	30.00
6895MHz	Pass	3.17	8.86	9.32	8.55	9.16	15.00	Inf	18.17	30.00
7015MHz	Pass	3.17	9.12	9.42	9.53	9.48	15.41	Inf	18.58	30.00
7095MHz	Pass	3.17	9.14	9.16	9.06	9.44	15.22	Inf	18.39	30.00
7115MHz	Pass	3.17	1.82	1.45	1.01	1.24	7.41	Inf	10.58	30.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	2.63	12.52	12.72	12.75	12.84	18.73	Inf	21.36	30.00
6165MHz	Pass	2.63	12.55	12.66	12.59	12.65	18.63	Inf	21.26	30.00
6405MHz	Pass	2.63	12.43	12.84	12.34	12.66	18.59	Inf	21.22	30.00
6445MHz	Pass	2.28	12.82	13.13	12.79	13.13	18.99	Inf	21.27	30.00
6485MHz	Pass	2.28	12.59	12.96	12.87	13.22	18.94	Inf	21.22	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	2.37	12.85	13.14	12.73	13.44	19.07	Inf	21.44	30.00
6565MHz	Pass	2.37	12.95	13.29	12.76	13.33	19.11	Inf	21.48	30.00
6725MHz	Pass	2.37	13.09	13.21	12.59	13.32	19.08	Inf	21.45	30.00
6845MHz	Pass	2.37	12.86	12.94	12.23	13.13	18.82	Inf	21.19	30.00
6885MHz Straddle 6.875-7.125GHz	Pass	3.17	12.38	12.37	11.74	12.62	18.31	Inf	21.48	30.00
6925MHz	Pass	3.17	12.33	12.38	11.33	12.51	18.18	Inf	21.35	30.00
7005MHz	Pass	3.17	12.45	12.83	11.61	12.66	18.43	Inf	21.60	30.00
7085MHz	Pass	3.17	12.29	12.53	12.12	12.67	18.43	Inf	21.60	30.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	2.63	15.31	15.52	15.67	15.62	21.55	Inf	24.18	30.00
6145MHz	Pass	2.63	15.47	15.57	15.66	15.67	21.61	Inf	24.24	30.00
6385MHz	Pass	2.63	15.37	15.62	15.36	15.64	21.52	Inf	24.15	30.00
6465MHz	Pass	2.28	15.97	16.16	15.7	16.43	22.09	Inf	24.37	30.00
6545MHz Straddle	Pass	2.37	15.62	15.68	15.25	15.75	21.60	Inf	23.97	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6.525-6.875GHz										
6625MHz	Pass	2.37	15.96	15.92	15.87	16.28	22.03	Inf	24.40	30.00
6705MHz	Pass	2.37	16.16	16.18	15.29	16.39	22.05	Inf	24.42	30.00
6785MHz	Pass	2.37	16.15	16.05	15.32	16.37	22.01	Inf	24.38	30.00
6865MHz Straddle 6.875-7.125GHz	Pass	3.17	15.03	15.32	14.56	15.52	21.14	Inf	24.31	30.00
6945MHz	Pass	3.17	15.23	15.52	14.55	15.55	21.25	Inf	24.42	30.00
7025MHz	Pass	3.17	15.25	15.34	14.83	15.4	21.23	Inf	24.40	30.00
802.11be EHT160_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	2.63	18.18	18.56	18.11	18.69	24.41	Inf	27.04	30.00
6185MHz	Pass	2.63	18.73	18.68	18.45	18.72	24.67	Inf	27.30	30.00
6345MHz	Pass	2.63	18.36	18.56	18.06	18.46	24.38	Inf	27.01	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	2.37	18.8	18.92	18.18	18.91	24.73	Inf	27.10	30.00
6665MHz	Pass	2.37	19.02	18.89	18.32	19.05	24.85	Inf	27.22	30.00
6825MHz Straddle 6.875-7.125GHz	Pass	3.17	18.19	18.36	17.16	18.46	24.09	Inf	27.26	30.00
6985MHz	Pass	3.17	17.39	17.92	17.01	17.83	23.57	Inf	26.74	30.00
802.11be EHT320_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	2.63	19.64	19.92	19.32	19.79	25.69	Inf	28.32	30.00
6265MHz	Pass	2.63	19.31	19.47	19.24	19.66	25.44	Inf	28.07	30.00
6425MHz Straddle 5.925-6.425GHz	Pass	2.63	18.92	19.11	18.59	19.42	25.04	Inf	27.67	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	2.37	18.43	18.07	18.06	18.76	24.36	Inf	26.73	30.00
6745MHz Straddle 6.875-7.125GHz	Pass	3.17	18.02	18.17	17.69	18.15	24.03	Inf	27.20	30.00
6905MHz Straddle 6.875-7.125GHz	Pass	3.17	15.74	16.1	15.37	16.12	21.86	Inf	25.03	30.00

DG = Directional Gain; Port X = Port X output power

Directional Gain

Antenna	Antenna Gain (dBi)			
	5925~6425 MHz	6425~6525 MHz	6525~6875 MHz	6875~7125 MHz
1	0.99	0.34	1.19	0.75
2	2.43	1.87	1.75	3.48
3	3.25	1.76	1.76	1.66
4	3.86	2.74	3.37	4.5
5	1.02	1.02	0.61	0.82
6	2.76	3.19	3.19	3.12
Directional Gain (Antenna 1/3/5/6)	2.12	1.71	1.80	1.70
Directional Gain (Antenna 2/4/5/6)	2.63	2.28	2.37	3.17
Max Directional Gain	2.63	2.28	2.37	3.17

Note 1: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10})/N_{ANT}]$

Beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss4,(MCS0)_4TX	9.69	0.00931	12.32	0.01706
802.11be EHT40-BF_Nss4,(MCS0)_4TX	12.71	0.01866	15.34	0.03420
802.11be EHT80-BF_Nss4,(MCS0)_4TX	15.59	0.03622	18.22	0.06637
802.11be EHT160-BF_Nss4,(MCS0)_4TX	18.65	0.07328	21.28	0.13428
802.11be EHT320-BF_Nss4,(MCS0)_4TX	19.67	0.09268	22.30	0.16982
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss4,(MCS0)_4TX	10.15	0.01035	12.43	0.01750
802.11be EHT40-BF_Nss4,(MCS0)_4TX	12.97	0.01982	15.25	0.03350
802.11be EHT80-BF_Nss4,(MCS0)_4TX	16.07	0.04046	18.35	0.06839
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss4,(MCS0)_4TX	10.22	0.01052	12.59	0.01816
802.11be EHT40-BF_Nss4,(MCS0)_4TX	13.09	0.02037	15.46	0.03516
802.11be EHT80-BF_Nss4,(MCS0)_4TX	16.03	0.04009	18.40	0.06918
802.11be EHT160-BF_Nss4,(MCS0)_4TX	18.83	0.07638	21.20	0.13183
802.11be EHT320-BF_Nss4,(MCS0)_4TX	18.34	0.06823	20.71	0.11776
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss4,(MCS0)_4TX	9.39	0.00869	12.56	0.01803
802.11be EHT40-BF_Nss4,(MCS0)_4TX	12.41	0.01742	15.58	0.03614
802.11be EHT80-BF_Nss4,(MCS0)_4TX	15.23	0.03334	18.40	0.06918
802.11be EHT160-BF_Nss4,(MCS0)_4TX	18.07	0.06412	21.24	0.13305
802.11be EHT320-BF_Nss4,(MCS0)_4TX	18.01	0.06324	21.18	0.13122

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5935MHz	Pass	2.63	-5.15	-4.96	-5.1	-5.09	0.95	Inf	3.58	30.00
5955MHz	Pass	2.63	3.41	3.6	3.82	3.83	9.69	Inf	12.32	30.00
6175MHz	Pass	2.63	3.54	3.4	3.49	3.87	9.60	Inf	12.23	30.00
6415MHz	Pass	2.63	3.34	3.72	3.5	3.93	9.65	Inf	12.28	30.00
6435MHz	Pass	2.28	3.33	3.7	3.45	4	9.65	Inf	11.93	30.00
6475MHz	Pass	2.28	3.99	4.36	3.73	4.41	10.15	Inf	12.43	30.00
6515MHz	Pass	2.28	3.8	3.81	3.33	4.04	9.77	Inf	12.05	30.00
6535MHz	Pass	2.37	3.73	3.74	3.44	4.04	9.76	Inf	12.13	30.00
6715MHz	Pass	2.37	4.25	4.11	3.77	4.64	10.22	Inf	12.59	30.00
6855MHz	Pass	2.37	3.73	4.09	3.3	4.34	9.90	Inf	12.27	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	3.17	2.83	3.37	2.46	3.1	8.97	Inf	12.14	30.00
6895MHz	Pass	3.17	2.84	3.3	2.53	3.14	8.98	Inf	12.15	30.00
7015MHz	Pass	3.17	3.1	3.4	3.51	3.46	9.39	Inf	12.56	30.00
7095MHz	Pass	3.17	3.12	3.14	3.04	3.42	9.20	Inf	12.37	30.00
7115MHz	Pass	3.17	-4.2	-4.57	-5.01	-4.78	1.39	Inf	4.56	30.00
802.11be EHT40-BF_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	2.63	6.5	6.7	6.73	6.82	12.71	Inf	15.34	30.00
6165MHz	Pass	2.63	6.53	6.64	6.57	6.63	12.61	Inf	15.24	30.00
6405MHz	Pass	2.63	6.41	6.82	6.32	6.64	12.57	Inf	15.20	30.00
6445MHz	Pass	2.28	6.8	7.11	6.77	7.11	12.97	Inf	15.25	30.00
6485MHz	Pass	2.28	6.57	6.94	6.85	7.2	12.92	Inf	15.20	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	2.37	6.83	7.12	6.71	7.42	13.05	Inf	15.42	30.00
6565MHz	Pass	2.37	6.93	7.27	6.74	7.31	13.09	Inf	15.46	30.00
6725MHz	Pass	2.37	7.07	7.19	6.57	7.3	13.06	Inf	15.43	30.00
6845MHz	Pass	2.37	6.84	6.92	6.21	7.11	12.80	Inf	15.17	30.00
6885MHz Straddle 6.875-7.125GHz	Pass	3.17	6.36	6.35	5.72	6.6	12.29	Inf	15.46	30.00
6925MHz	Pass	3.17	6.31	6.36	5.31	6.49	12.16	Inf	15.33	30.00
7005MHz	Pass	3.17	6.43	6.81	5.59	6.64	12.41	Inf	15.58	30.00
7085MHz	Pass	3.17	6.27	6.51	6.1	6.65	12.41	Inf	15.58	30.00
802.11be EHT80-BF_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	2.63	9.29	9.5	9.65	9.6	15.53	Inf	18.16	30.00
6145MHz	Pass	2.63	9.45	9.55	9.64	9.65	15.59	Inf	18.22	30.00
6385MHz	Pass	2.63	9.35	9.6	9.34	9.62	15.50	Inf	18.13	30.00
6465MHz	Pass	2.28	9.95	10.14	9.68	10.41	16.07	Inf	18.35	30.00
6545MHz Straddle	Pass	2.37	9.6	9.66	9.23	9.73	15.58	Inf	17.95	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6.525-6.875GHz										
6625MHz	Pass	2.37	9.94	9.9	9.85	10.26	16.01	Inf	18.38	30.00
6705MHz	Pass	2.37	10.14	10.16	9.27	10.37	16.03	Inf	18.40	30.00
6785MHz	Pass	2.37	10.13	10.03	9.3	10.35	15.99	Inf	18.36	30.00
6865MHz Straddle 6.875-7.125GHz	Pass	3.17	9.01	9.3	8.54	9.5	15.12	Inf	18.29	30.00
6945MHz	Pass	3.17	9.21	9.5	8.53	9.53	15.23	Inf	18.40	30.00
7025MHz	Pass	3.17	9.23	9.32	8.81	9.38	15.21	Inf	18.38	30.00
802.11be EHT160-BF_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	2.63	12.16	12.54	12.09	12.67	18.39	Inf	21.02	30.00
6185MHz	Pass	2.63	12.71	12.66	12.43	12.7	18.65	Inf	21.28	30.00
6345MHz	Pass	2.63	12.34	12.54	12.04	12.44	18.36	Inf	20.99	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	2.37	12.78	12.9	12.16	12.89	18.71	Inf	21.08	30.00
6665MHz	Pass	2.37	13	12.87	12.3	13.03	18.83	Inf	21.20	30.00
6825MHz Straddle 6.875-7.125GHz	Pass	3.17	12.17	12.34	11.14	12.44	18.07	Inf	21.24	30.00
6985MHz	Pass	3.17	11.37	11.9	10.99	11.81	17.55	Inf	20.72	30.00
802.11be EHT320-BF_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	2.63	13.62	13.9	13.3	13.77	19.67	Inf	22.30	30.00
6265MHz	Pass	2.63	13.29	13.45	13.22	13.64	19.42	Inf	22.05	30.00
6425MHz Straddle 5.925-6.425GHz	Pass	2.63	12.9	13.09	12.57	13.4	19.02	Inf	21.65	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	2.37	12.41	12.05	12.04	12.74	18.34	Inf	20.71	30.00
6745MHz Straddle 6.875-7.125GHz	Pass	3.17	12	12.15	11.67	12.13	18.01	Inf	21.18	30.00
6905MHz Straddle 6.875-7.125GHz	Pass	3.17	9.72	10.08	9.35	10.1	15.84	Inf	19.01	30.00

DG = Directional Gain; Port X = Port X output power

Directional Gain for

Antenna	Antenna Gain (dBi)			
	5925~6425 MHz	6425~6525 MHz	6525~6875 MHz	6875~7125 MHz
1	0.99	0.34	1.19	0.75
2	2.43	1.87	1.75	3.48
3	3.25	1.76	1.76	1.66
4	3.86	2.74	3.37	4.5
5	1.02	1.02	0.61	0.82
6	2.76	3.19	3.19	3.12
Directional Gain (Antenna 1/3/5/6)	2.12	1.71	1.80	1.70
Directional Gain** (Antenna 2/4/5/6)	2.63	2.28	2.37	3.17
Max Directional Gain	2.63	2.28	2.37	3.17

Note 1: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10})/N_{ANT}]$

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	2.21	4.84
802.11be EHT40_Nss4,(MCS0)_4TX	2.05	4.68
802.11be EHT80_Nss4,(MCS0)_4TX	1.99	4.62
802.11be EHT160_Nss4,(MCS0)_4TX	2.05	4.68
802.11be EHT320_Nss4,(MCS0)_4TX	0.09	2.72
6.425-6.525GHz	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	2.61	4.89
802.11be EHT40_Nss4,(MCS0)_4TX	2.46	4.74
802.11be EHT80_Nss4,(MCS0)_4TX	2.33	4.61
6.525-6.875GHz	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	2.50	4.87
802.11be EHT40_Nss4,(MCS0)_4TX	2.46	4.83
802.11be EHT80_Nss4,(MCS0)_4TX	2.42	4.79
802.11be EHT160_Nss4,(MCS0)_4TX	2.46	4.83
802.11be EHT320_Nss4,(MCS0)_4TX	-0.53	1.84
6.875-7.125GHz	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	1.68	4.85
802.11be EHT40_Nss4,(MCS0)_4TX	1.72	4.89
802.11be EHT80_Nss4,(MCS0)_4TX	1.69	4.86
802.11be EHT160_Nss4,(MCS0)_4TX	1.68	4.85
802.11be EHT320_Nss4,(MCS0)_4TX	-0.89	2.28

RBW = 1MHz

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss4,(MCS0)_4TX										
5935MHz	Pass	2.63	-12.65	-12.44	-12.61	-12.37	-6.60	Inf	-3.97	5.00
5955MHz	Pass	2.63	-3.69	-3.91	-3.84	-3.19	2.21	Inf	4.84	5.00
6175MHz	Pass	2.63	-3.82	-4.30	-3.83	-3.07	2.07	Inf	4.70	5.00
6415MHz	Pass	2.63	-4.06	-3.64	-3.45	-3.31	2.20	Inf	4.83	5.00
6435MHz	Pass	2.28	-4.00	-3.92	-3.36	-3.15	2.27	Inf	4.55	5.00
6475MHz	Pass	2.28	-3.64	-3.69	-3.04	-2.62	2.61	Inf	4.89	5.00
6515MHz	Pass	2.28	-4.16	-3.83	-3.42	-2.93	2.28	Inf	4.56	5.00
6535MHz	Pass	2.37	-4.06	-3.77	-3.32	-2.96	2.29	Inf	4.66	5.00
6715MHz	Pass	2.37	-3.90	-3.47	-3.14	-2.98	2.50	Inf	4.87	5.00
6855MHz	Pass	2.37	-4.10	-4.01	-3.42	-3.38	2.15	Inf	4.52	5.00
6875MHz Straddle 6.875-7.125GHz	Pass	3.17	-4.49	-4.62	-3.97	-3.87	1.58	Inf	4.75	5.00
6895MHz	Pass	3.17	-4.56	-4.77	-3.99	-3.88	1.54	Inf	4.71	5.00
7015MHz	Pass	3.17	-4.37	-4.47	-4.01	-4.19	1.68	Inf	4.85	5.00
7095MHz	Pass	3.17	-4.21	-4.59	-4.61	-4.50	1.43	Inf	4.60	5.00
7115MHz	Pass	3.17	-12.55	-12.57	-13.49	-12.85	-6.91	Inf	-3.74	5.00
802.11be EHT40_Nss4,(MCS0)_4TX										
5965MHz	Pass	2.63	-3.86	-3.71	-3.78	-3.75	2.04	Inf	4.67	5.00
6165MHz	Pass	2.63	-3.93	-4.05	-3.86	-3.37	2.05	Inf	4.68	5.00
6405MHz	Pass	2.63	-3.78	-3.62	-3.85	-3.73	2.04	Inf	4.67	5.00
6445MHz	Pass	2.28	-3.50	-3.53	-3.71	-3.32	2.34	Inf	4.62	5.00
6485MHz	Pass	2.28	-3.67	-3.66	-3.05	-3.05	2.46	Inf	4.74	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	2.37	-3.62	-3.22	-3.65	-3.13	2.42	Inf	4.79	5.00
6565MHz	Pass	2.37	-3.52	-3.05	-3.77	-3.05	2.42	Inf	4.79	5.00
6725MHz	Pass	2.37	-3.96	-3.40	-3.26	-2.93	2.46	Inf	4.83	5.00
6845MHz	Pass	2.37	-3.34	-3.37	-4.23	-3.24	2.24	Inf	4.61	5.00
6885MHz Straddle 6.875-7.125GHz	Pass	3.17	-4.20	-4.24	-4.85	-3.70	1.56	Inf	4.73	5.00
6925MHz	Pass	3.17	-4.14	-3.96	-5.19	-3.76	1.61	Inf	4.78	5.00
7005MHz	Pass	3.17	-4.37	-4.70	-3.84	-4.16	1.72	Inf	4.89	5.00
7085MHz	Pass	3.17	-4.48	-4.17	-4.53	-3.91	1.69	Inf	4.86	5.00
802.11be EHT80_Nss4,(MCS0)_4TX										
5985MHz	Pass	2.63	-3.91	-3.58	-3.77	-3.82	1.99	Inf	4.62	5.00
6145MHz	Pass	2.63	-4.06	-4.09	-3.98	-3.67	1.88	Inf	4.51	5.00
6385MHz	Pass	2.63	-4.20	-3.92	-3.81	-3.73	1.91	Inf	4.54	5.00
6465MHz	Pass	2.28	-3.63	-3.30	-4.00	-3.30	2.33	Inf	4.61	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	2.37	-3.99	-3.70	-3.25	-3.04	2.28	Inf	4.65	5.00
6625MHz	Pass	2.37	-3.50	-3.50	-3.68	-3.27	2.29	Inf	4.66	5.00
6705MHz	Pass	2.37	-3.31	-3.25	-3.86	-3.11	2.42	Inf	4.79	5.00
6785MHz	Pass	2.37	-3.92	-3.75	-3.09	-2.87	2.42	Inf	4.79	5.00
6865MHz Straddle 6.875-7.125GHz	Pass	3.17	-4.21	-4.05	-4.77	-3.81	1.63	Inf	4.80	5.00
6945MHz	Pass	3.17	-4.34	-4.67	-3.84	-4.10	1.69	Inf	4.86	5.00



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
7025MHz	Pass	3.17	-4.56	-4.28	-4.60	-4.06	1.61	Inf	4.78	5.00
802.11be EHT160_Nss4,(MCS0)_4TX										
6025MHz	Pass	2.63	-3.70	-3.63	-4.08	-3.69	2.05	Inf	4.68	5.00
6185MHz	Pass	2.63	-3.63	-3.62	-3.90	-3.80	2.01	Inf	4.64	5.00
6345MHz	Pass	2.63	-3.88	-3.60	-4.29	-3.68	2.00	Inf	4.63	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	2.37	-3.55	-3.32	-4.38	-3.31	2.14	Inf	4.51	5.00
6665MHz	Pass	2.37	-3.25	-3.36	-4.09	-2.94	2.46	Inf	4.83	5.00
6825MHz Straddle 6.875-7.125GHz	Pass	3.17	-4.12	-4.04	-5.27	-3.72	1.66	Inf	4.83	5.00
6985MHz	Pass	3.17	-4.48	-3.98	-4.69	-3.88	1.68	Inf	4.85	5.00
802.11be EHT320_Nss4,(MCS0)_4TX										
6105MHz	Pass	2.63	-5.54	-5.20	-6.13	-5.56	0.09	Inf	2.72	5.00
6265MHz	Pass	2.63	-5.82	-5.50	-6.02	-5.67	0.06	Inf	2.69	5.00
6425MHz Straddle 5.925-6.425GHz	Pass	2.63	-6.42	-6.12	-6.79	-6.24	-0.63	Inf	2.00	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	2.37	-6.25	-6.22	-6.87	-6.17	-0.53	Inf	1.84	5.00
6745MHz Straddle 6.875-7.125GHz	Pass	3.17	-7.01	-6.66	-6.86	-6.40	-0.89	Inf	2.28	5.00
6905MHz Straddle 6.875-7.125GHz	Pass	3.17	-8.98	-8.86	-8.97	-8.52	-2.95	Inf	0.22	5.00

DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Directional Gain for 802.11be


Antenna	Antenna Gain (dBi)			
	5925~6425 MHz	6425~6525 MHz	6525~6875 MHz	6875~7125 MHz
1	0.99	0.34	1.19	0.75
2	2.43	1.87	1.75	3.48
3	3.25	1.76	1.76	1.66
4	3.86	2.74	3.37	4.5
5	1.02	1.02	0.61	0.82
6	2.76	3.19	3.19	3.12
Directional Gain (Antenna 1/3/5/6)	2.12	1.71	1.80	1.70
Directional Gain** (Antenna 2/4/5/6)	2.63	2.28	2.37	3.17
Max Directional Gain	2.63	2.28	2.37	3.17

Note 1: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10})/N_{ANT}]$

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5935MHz

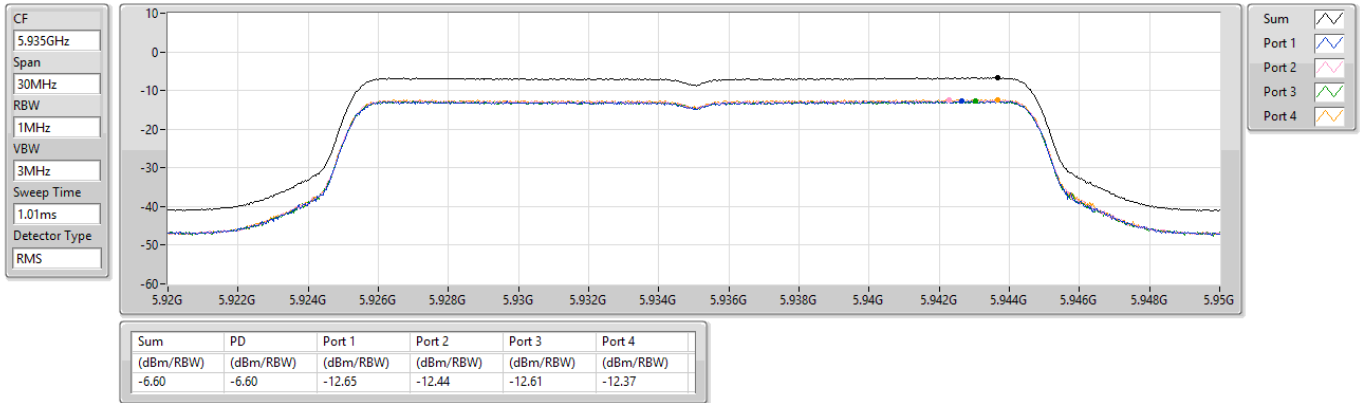

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5955MHz

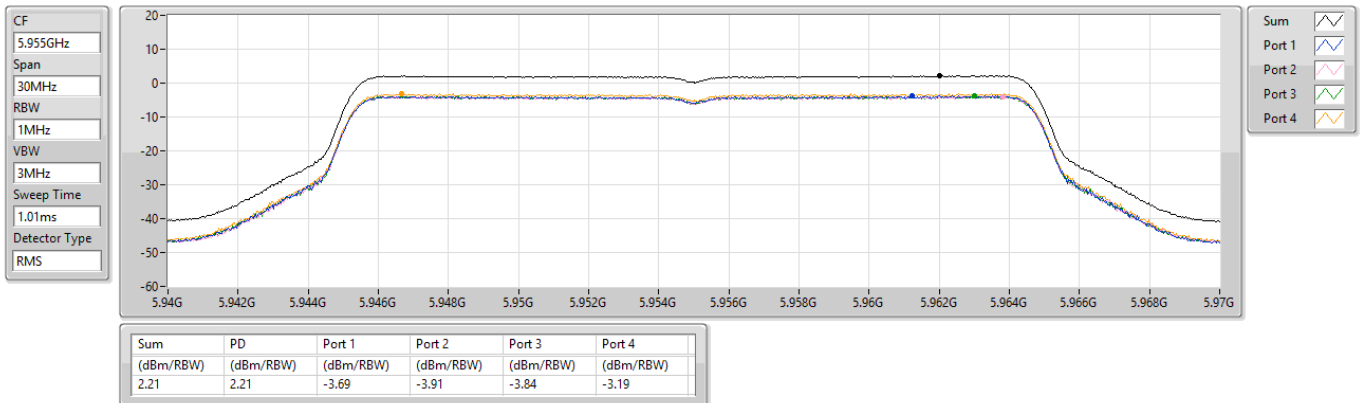

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6175MHz

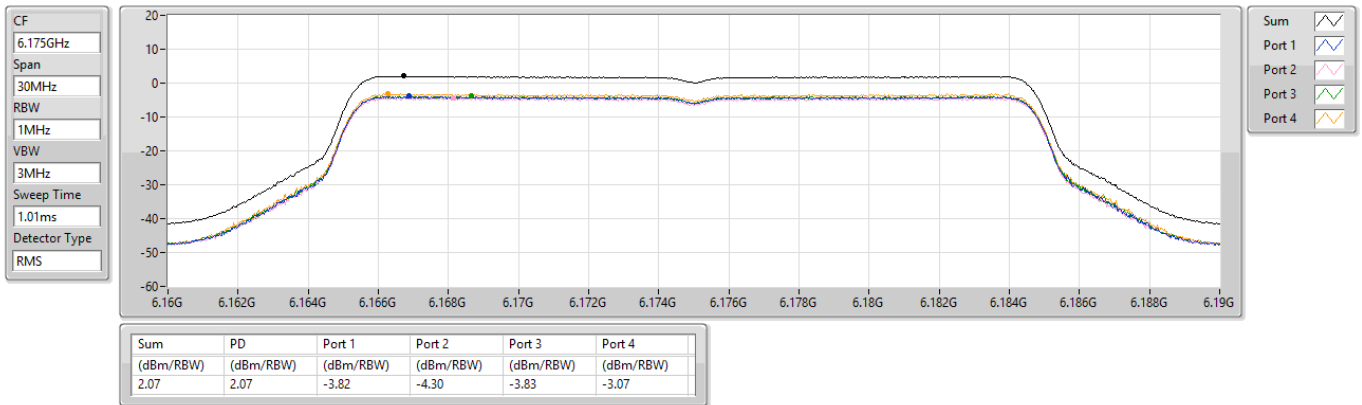

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6415MHz

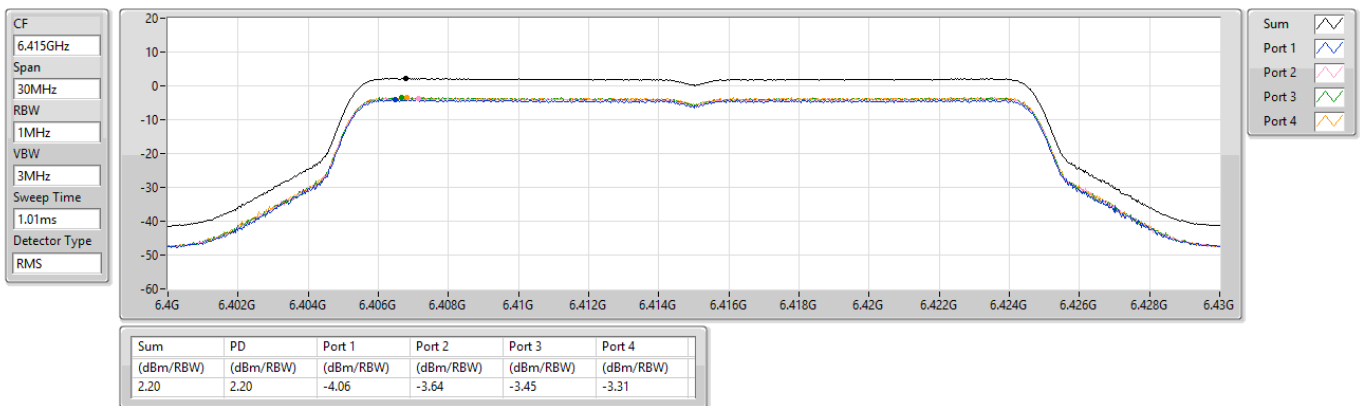

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6435MHz

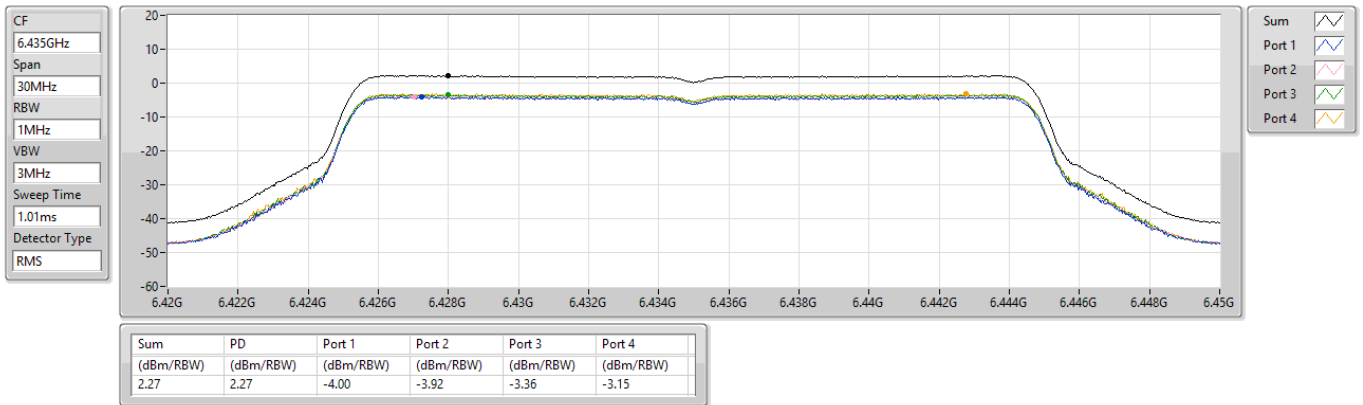

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6475MHz

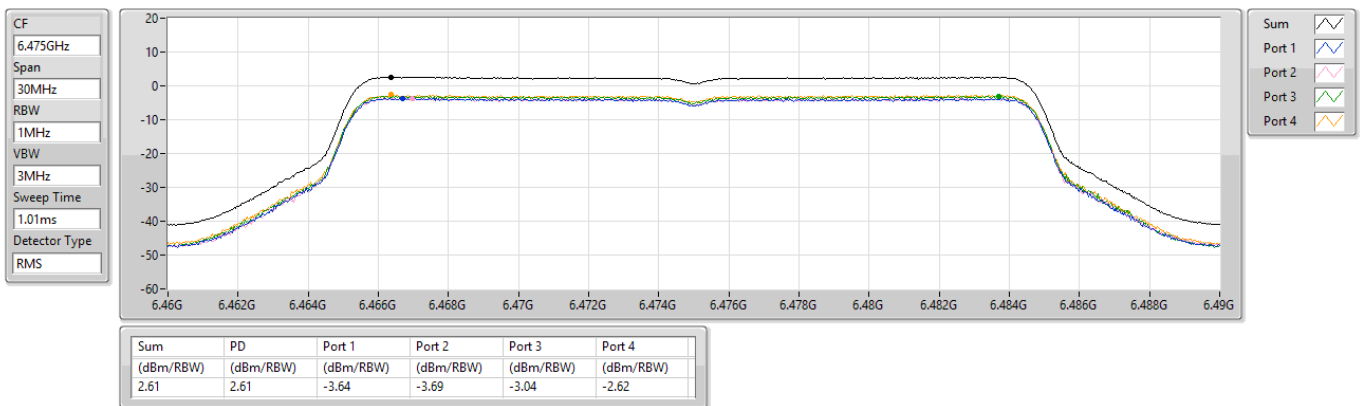

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6515MHz

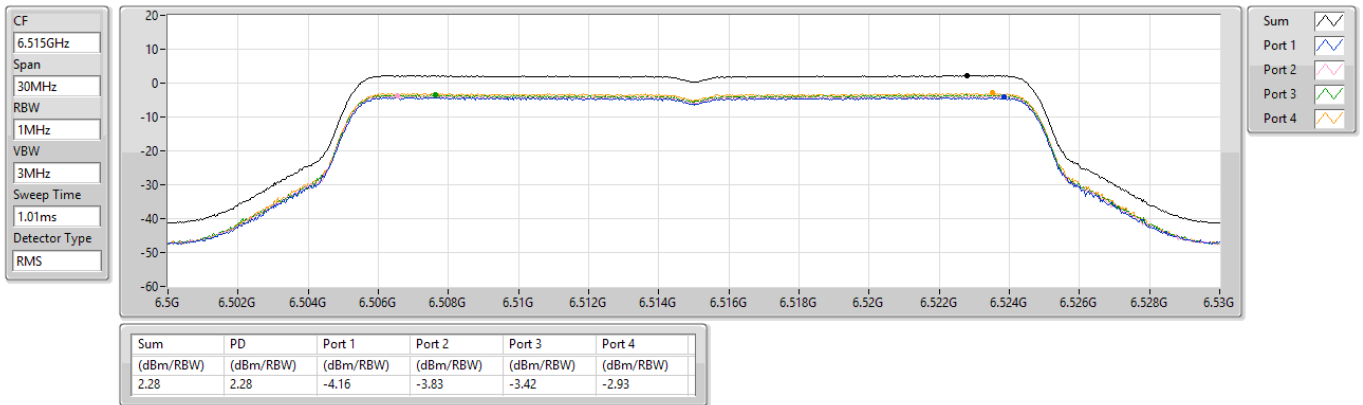

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6535MHz

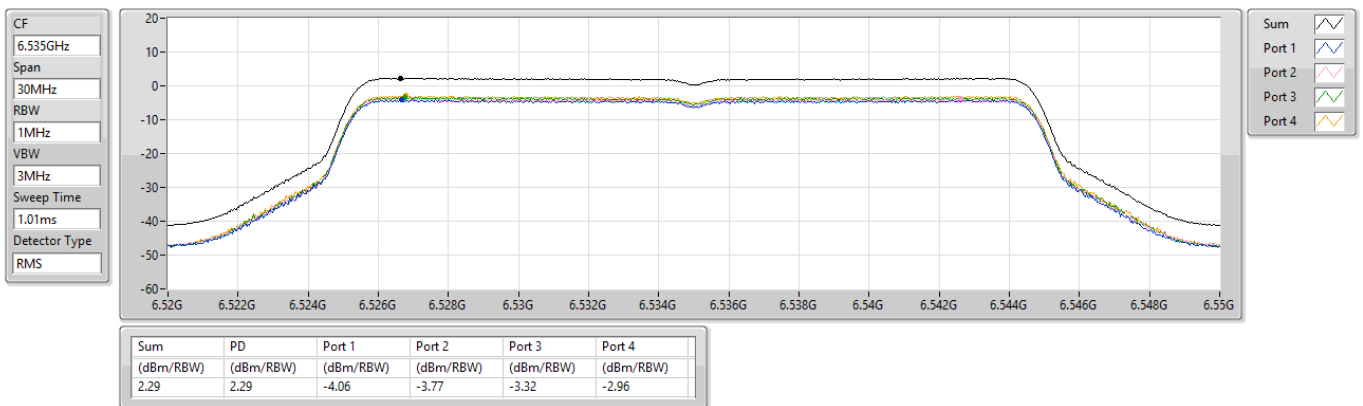

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6715MHz

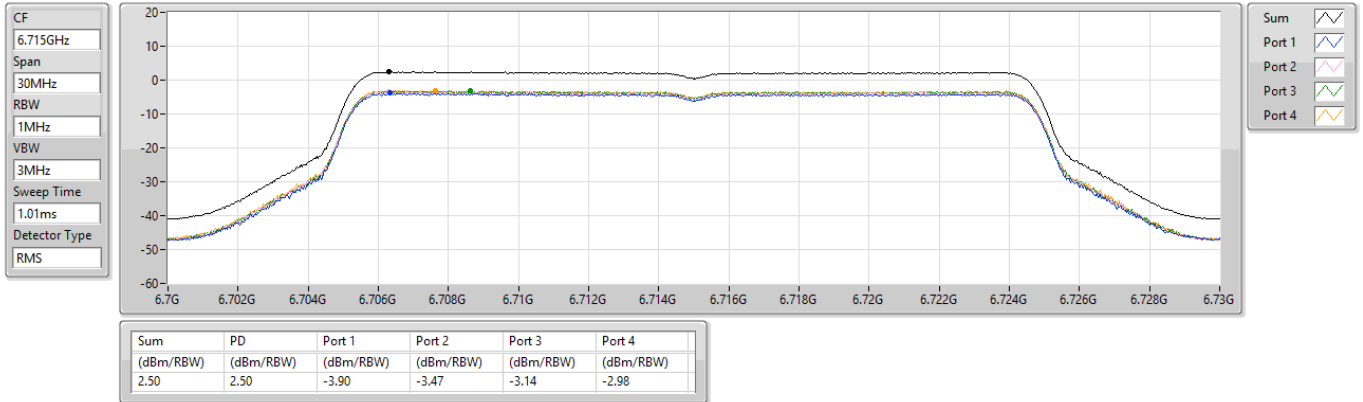

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6855MHz

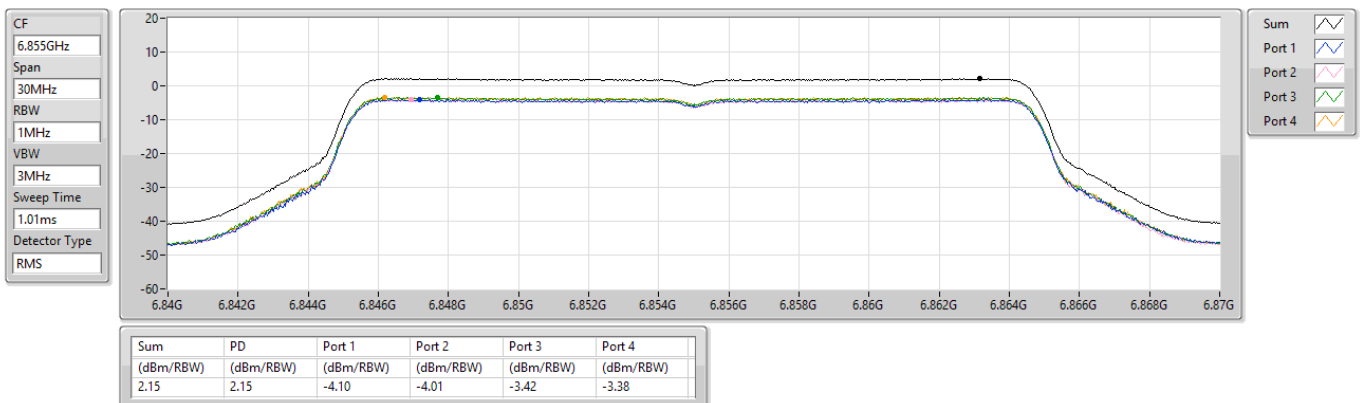

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6875MHz Straddle 6.875-7.125GHz

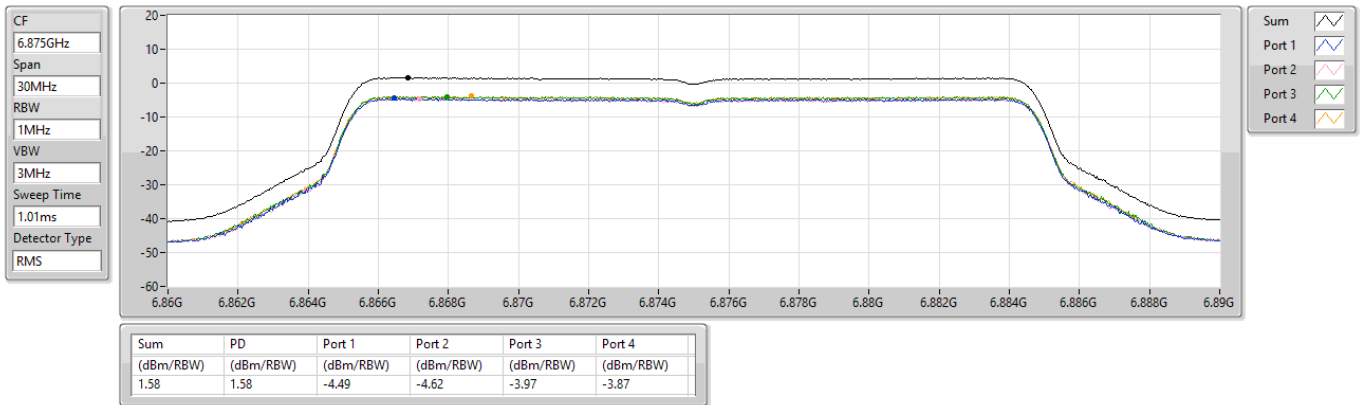

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


6895MHz

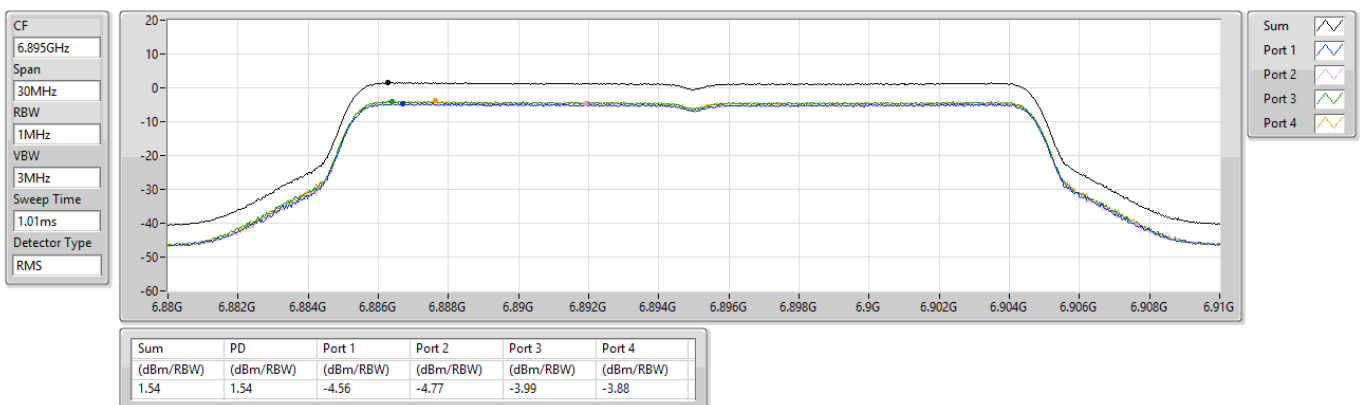

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


7015MHz

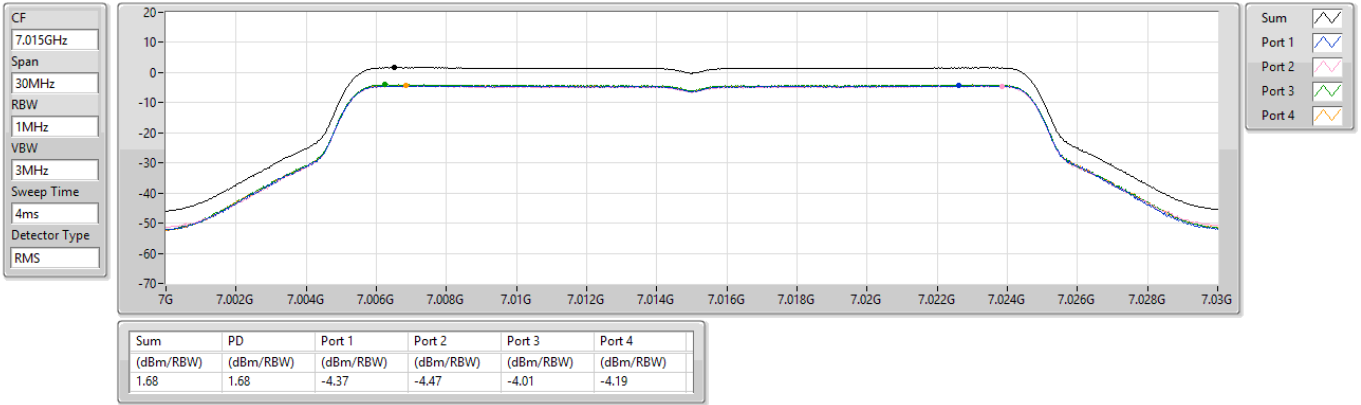

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


7095MHz

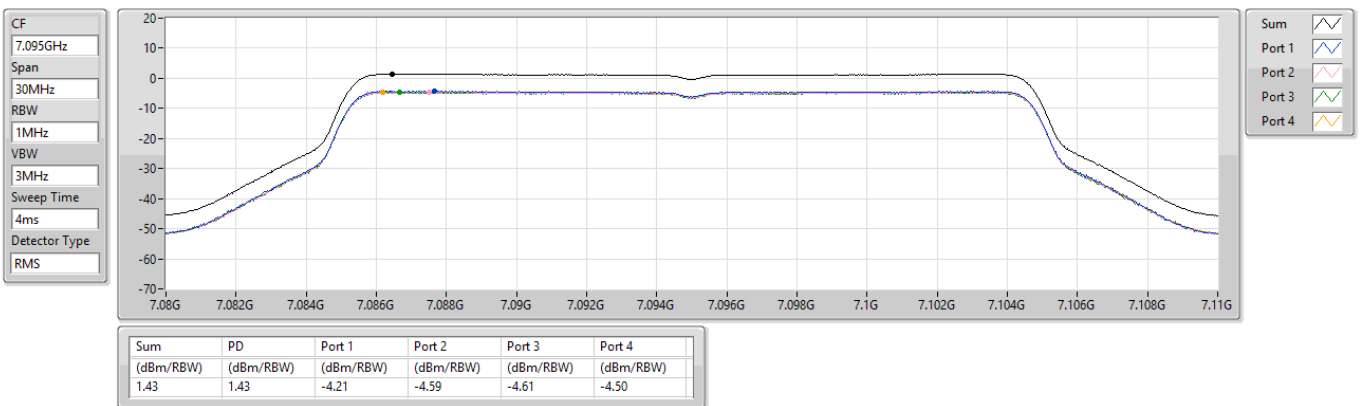

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


7115MHz

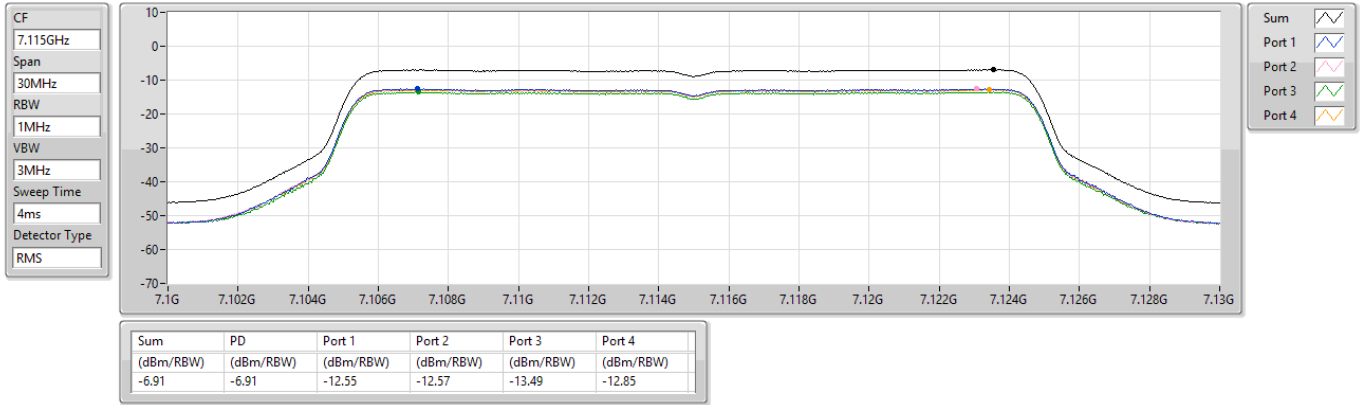

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5965MHz

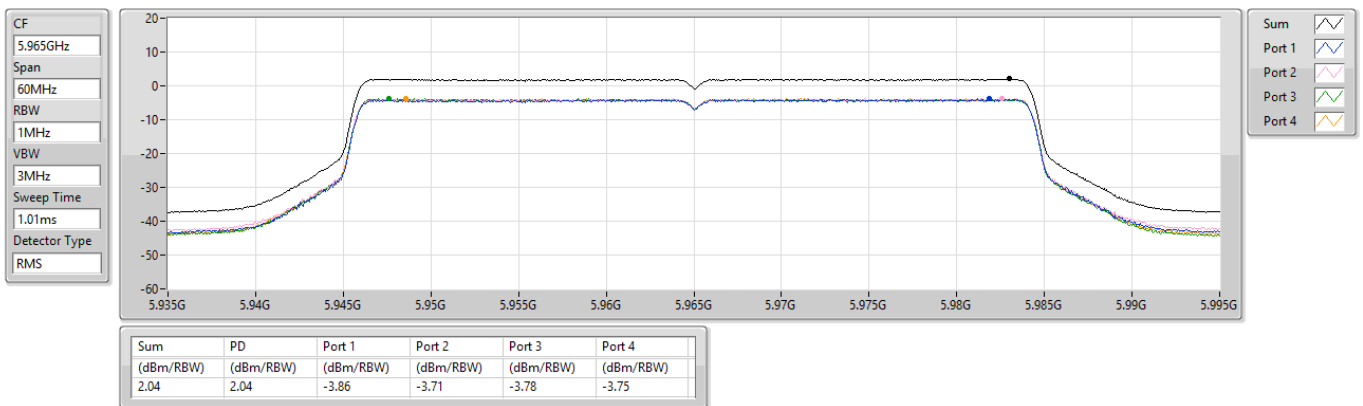

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6165MHz

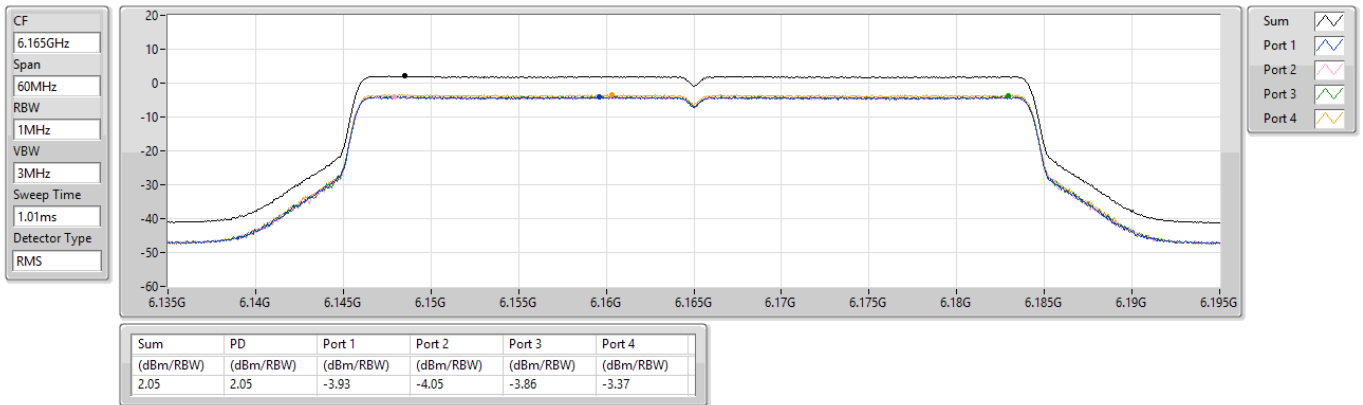

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6405MHz

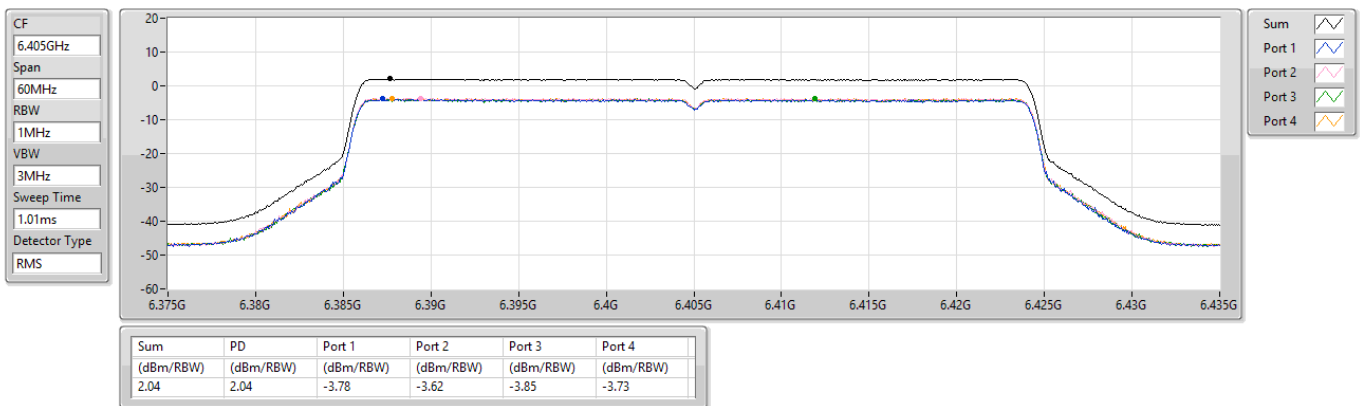

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6445MHz

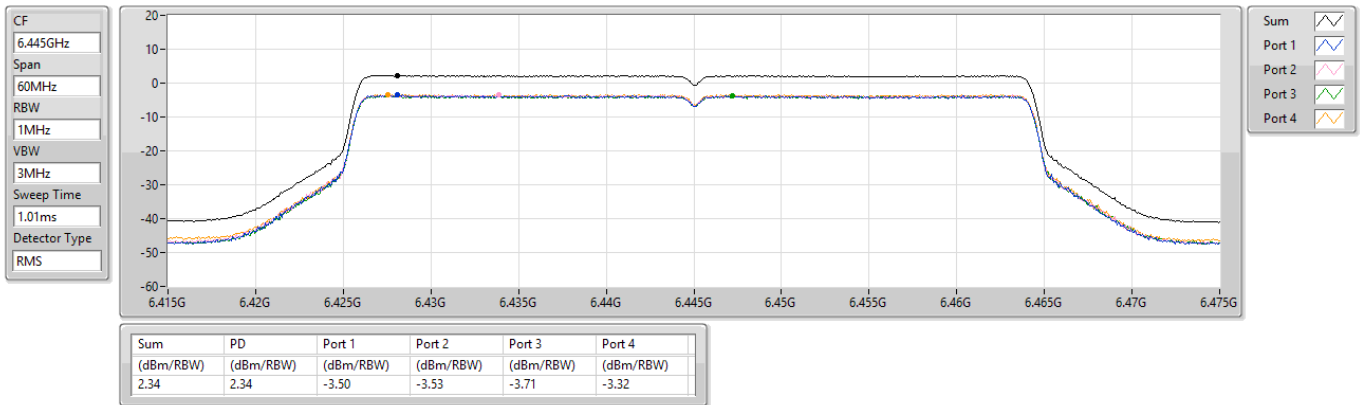

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6485MHz

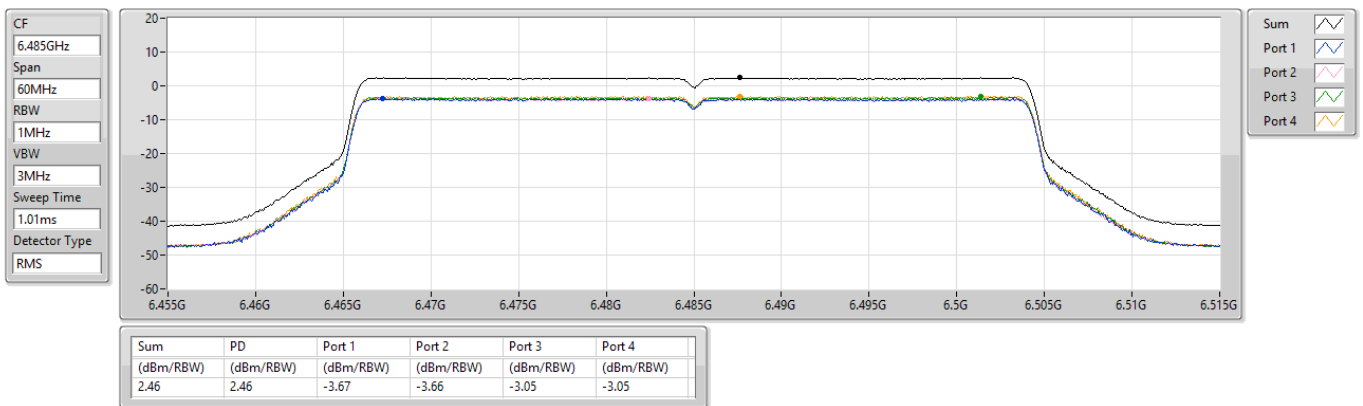

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6525MHz Straddle 6.525-6.875GHz

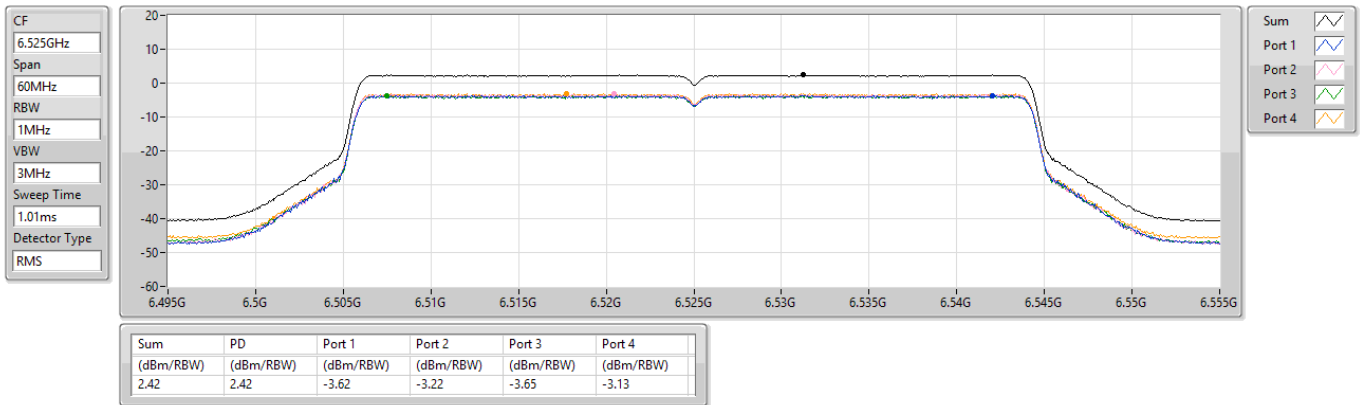

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6565MHz

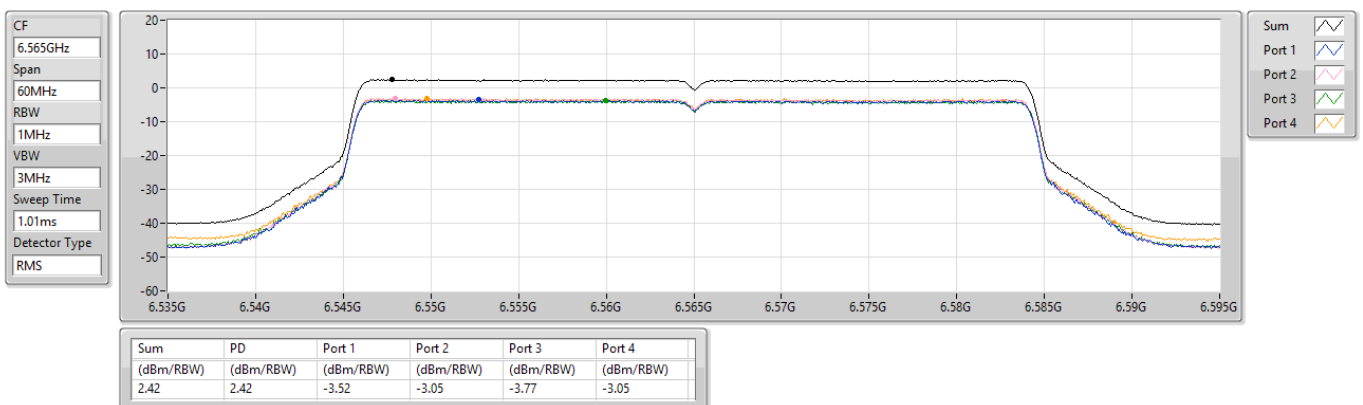

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6725MHz

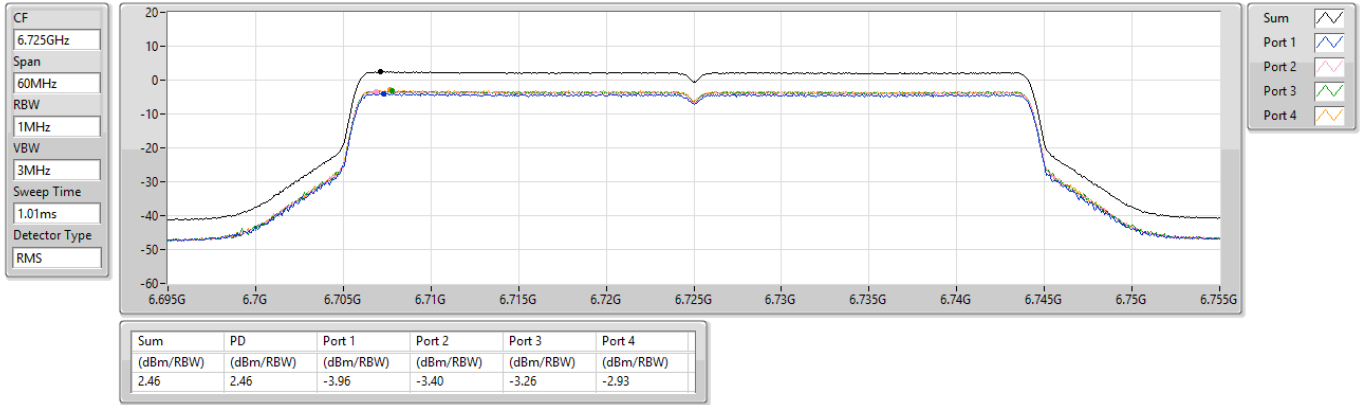

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6845MHz

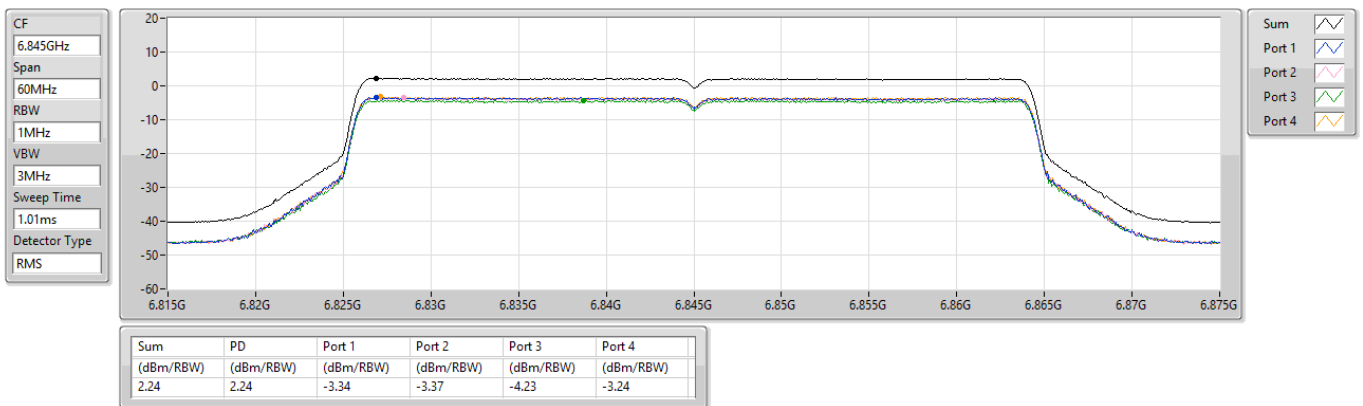

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6885MHz Straddle 6.875-7.125GHz

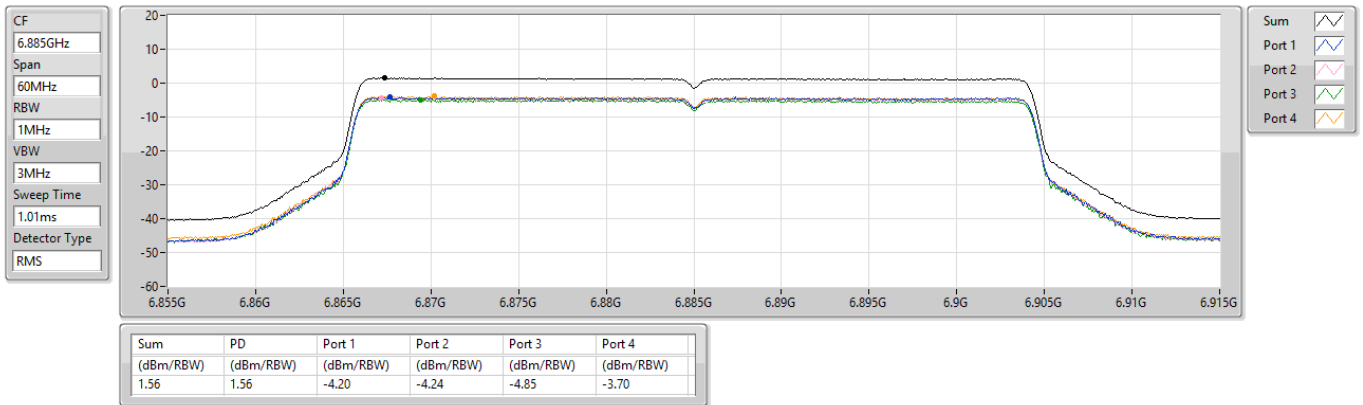

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


6925MHz

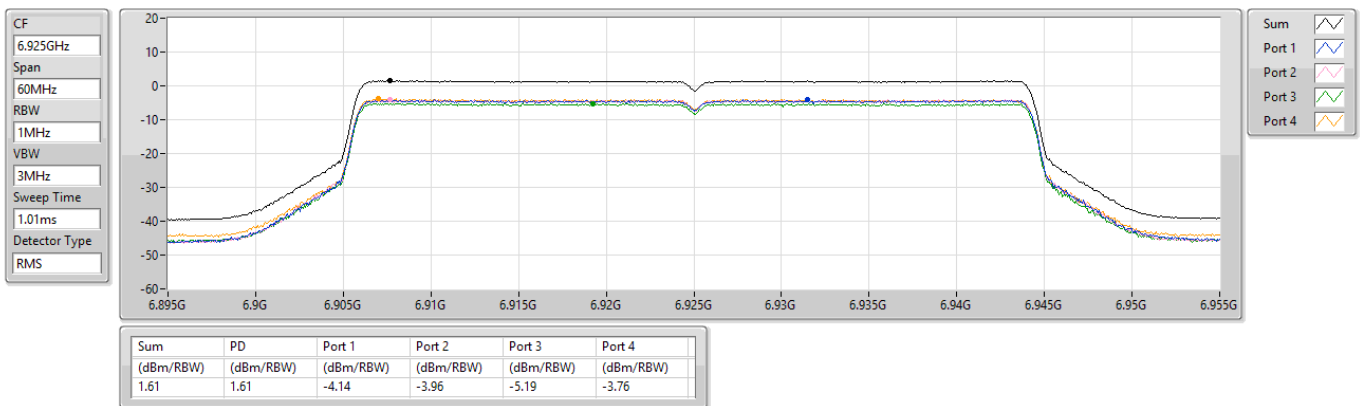

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


7005MHz

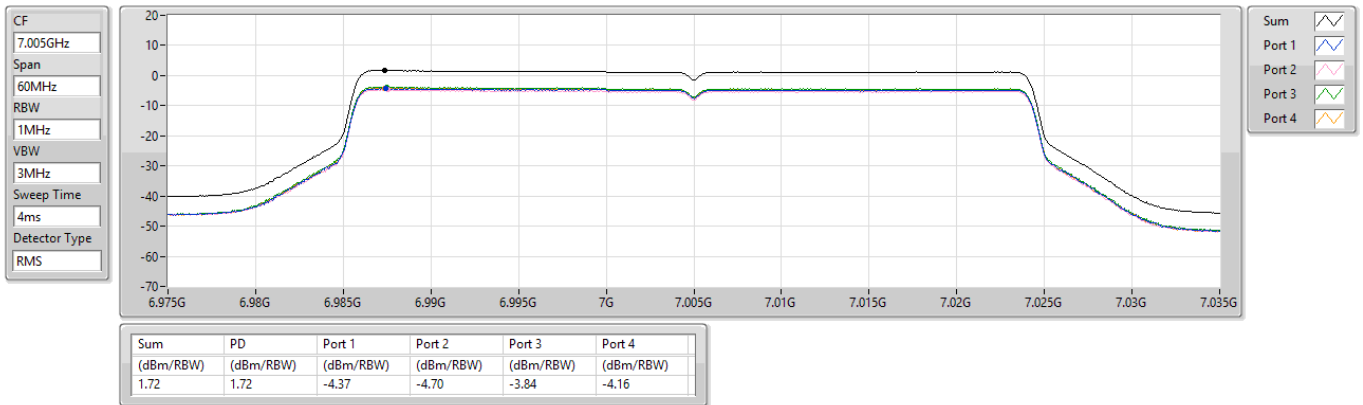

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


7085MHz

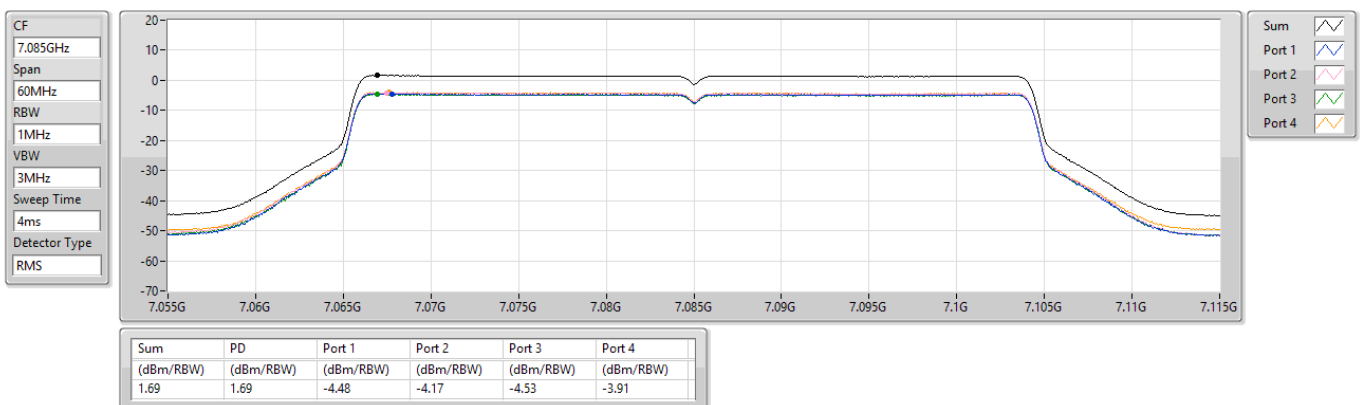

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5985MHz

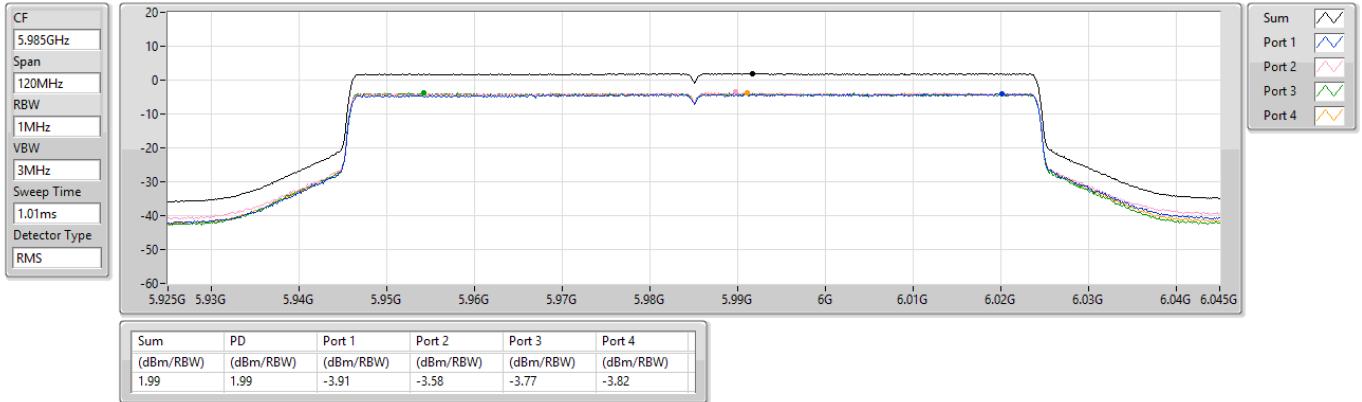

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6145MHz

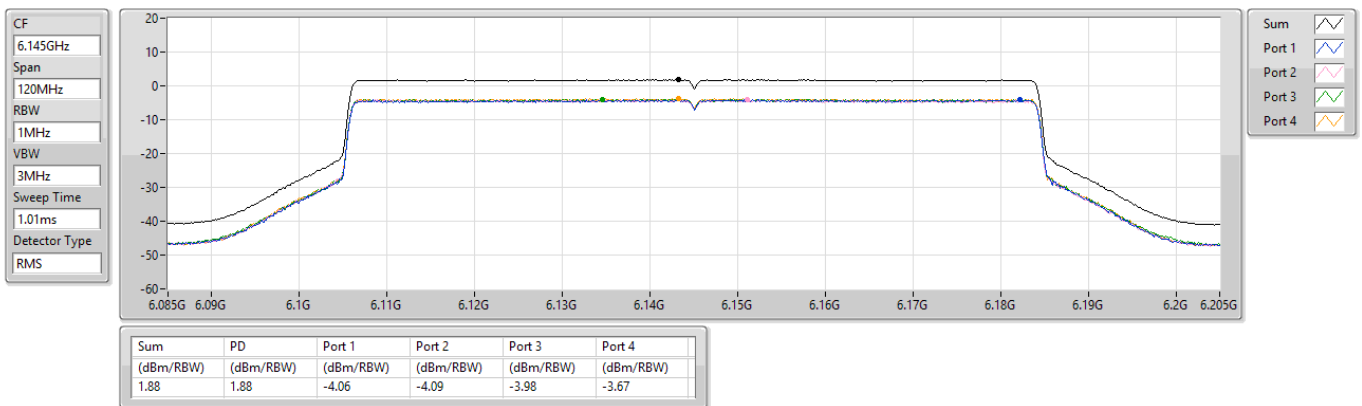

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6385MHz

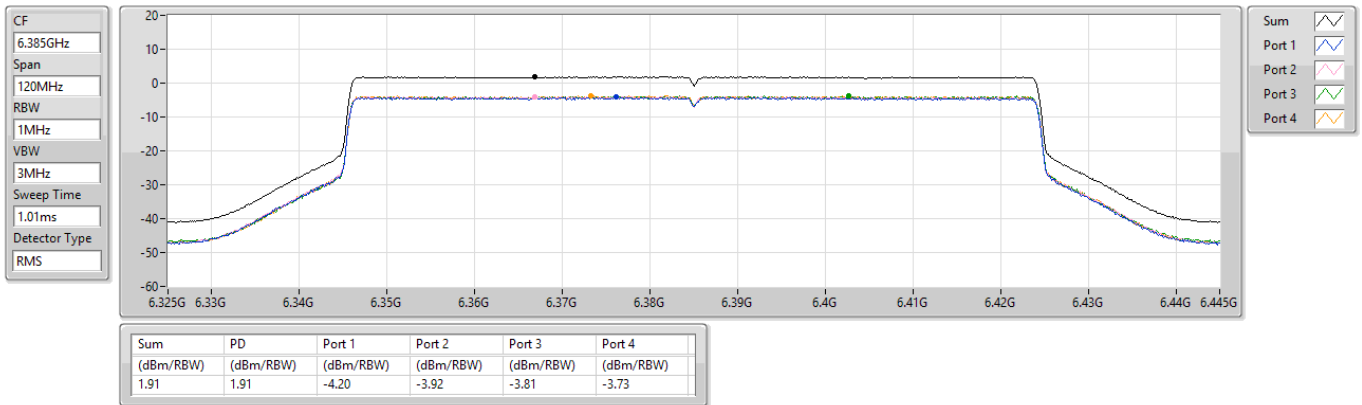

6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

6465MHz

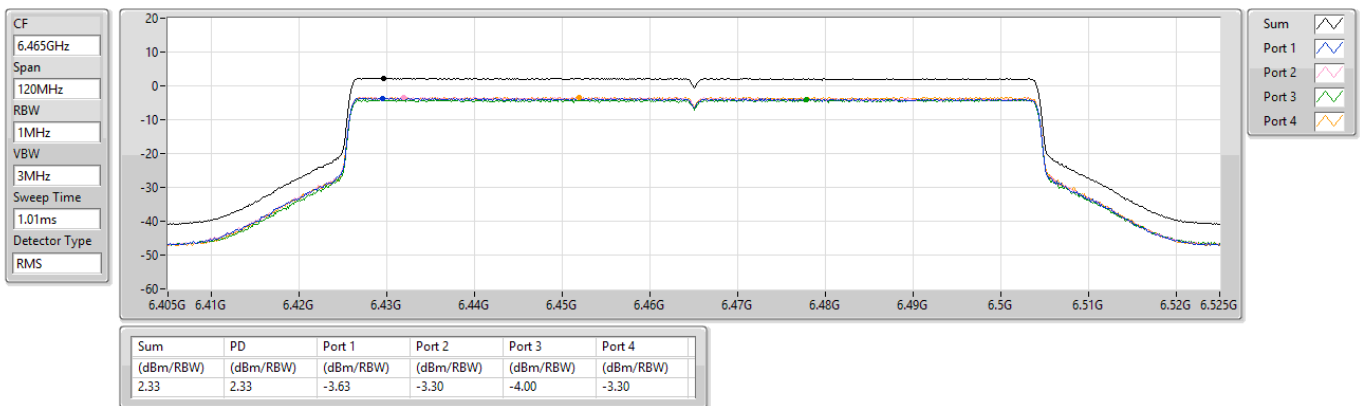




6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6545MHz Straddle 6.525-6.875GHz

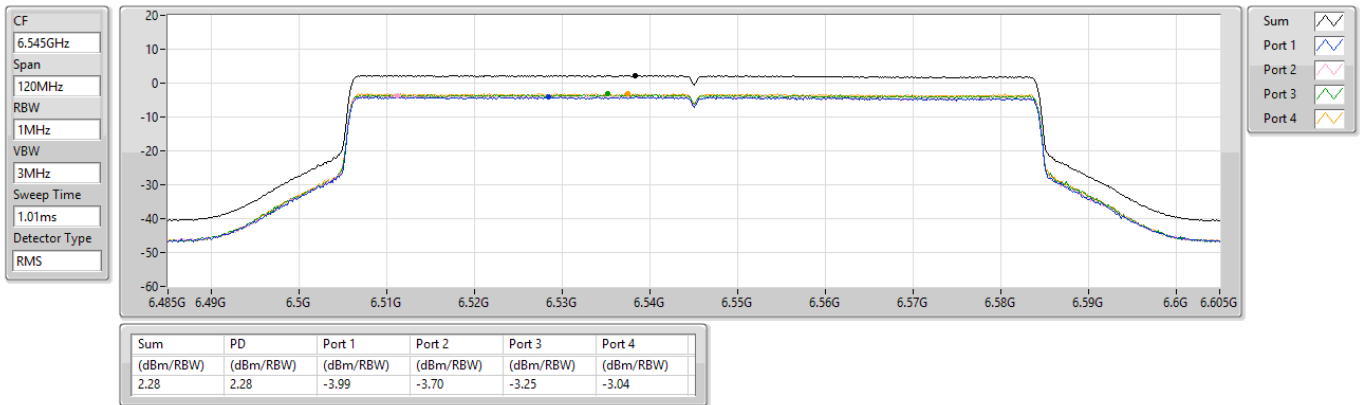

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6625MHz

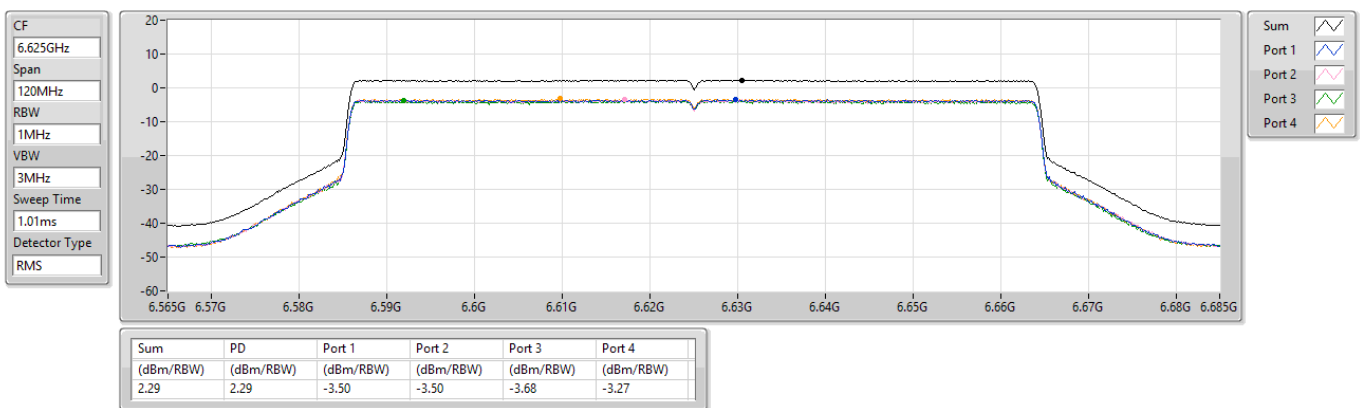

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6705MHz

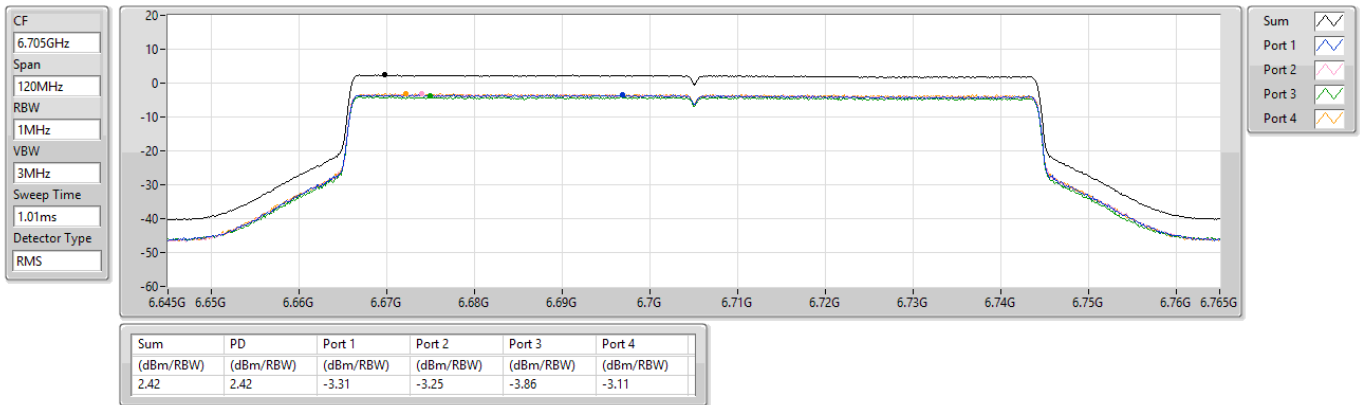

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6785MHz

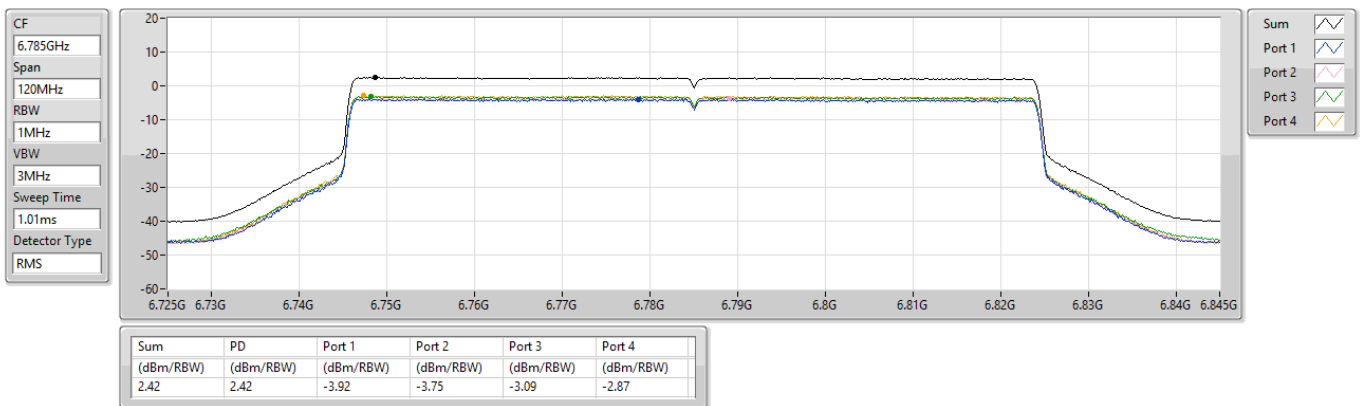

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6865MHz Straddle 6.875-7.125GHz

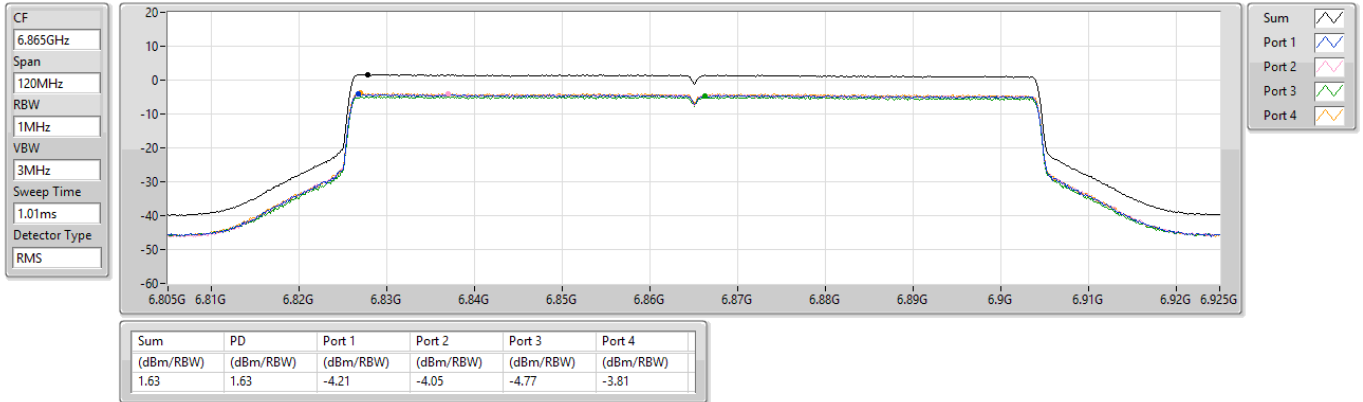

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


6945MHz

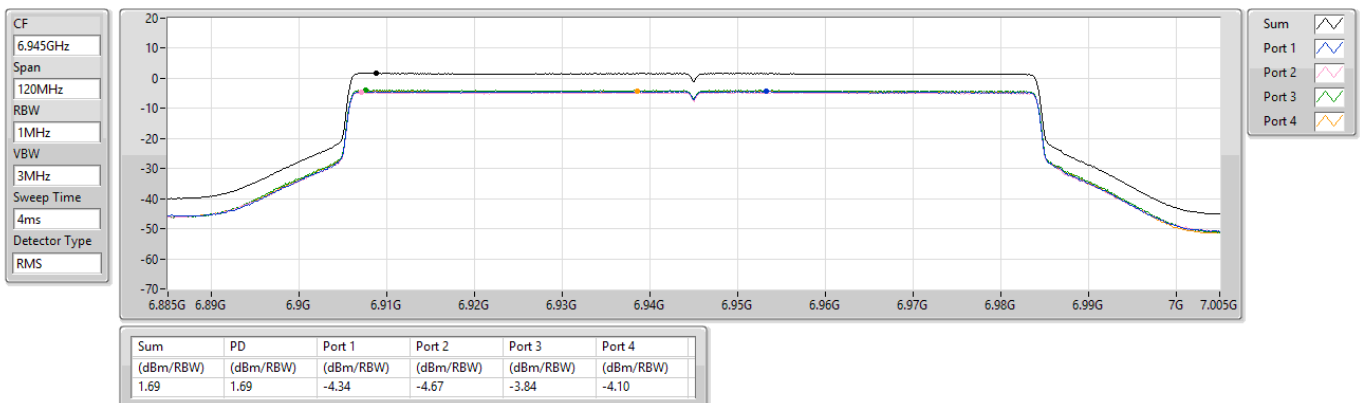

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


7025MHz

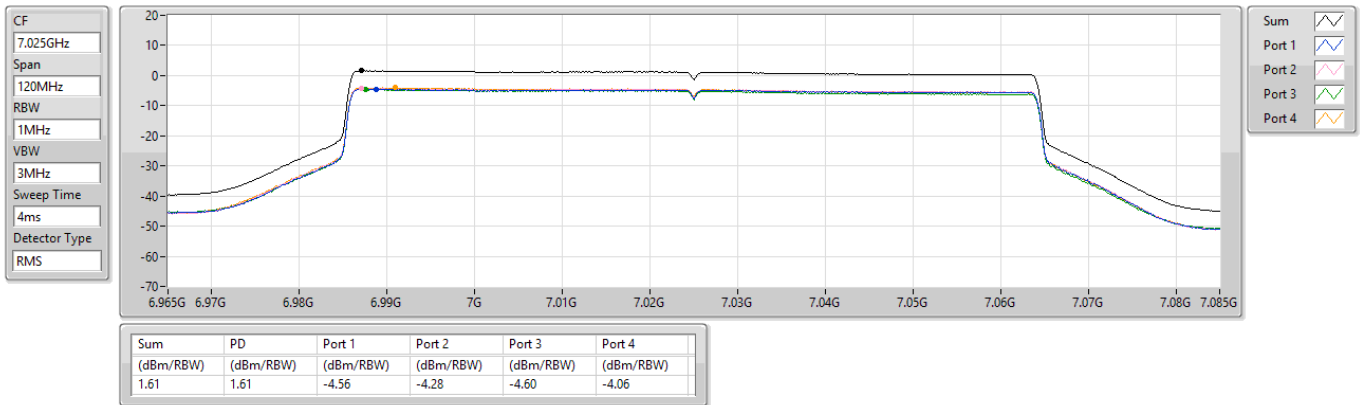

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6025MHz

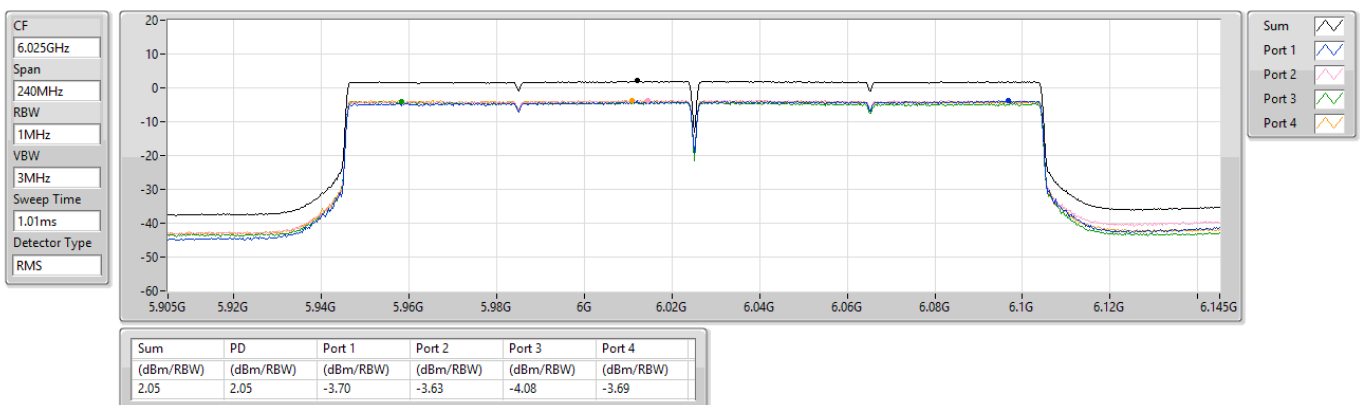

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6185MHz

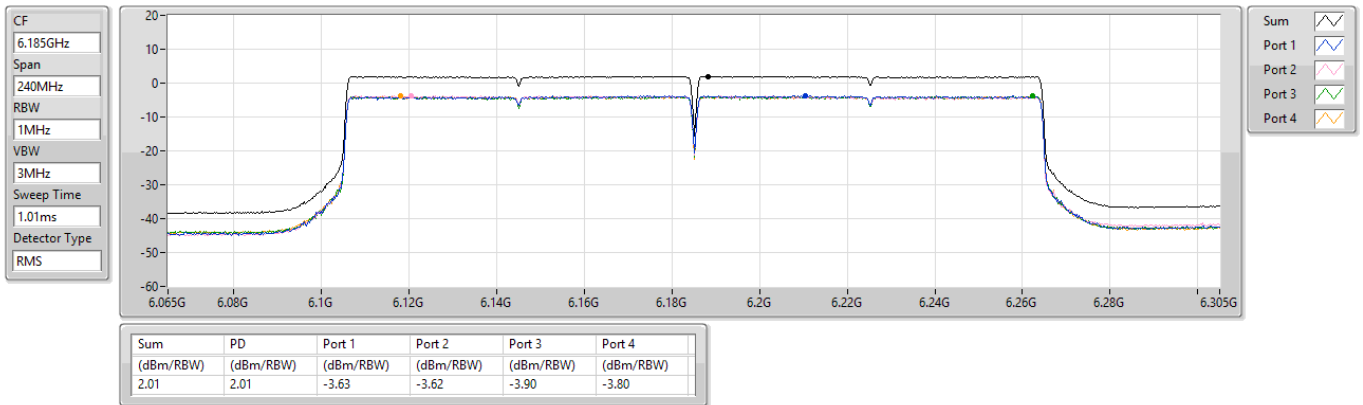

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6345MHz

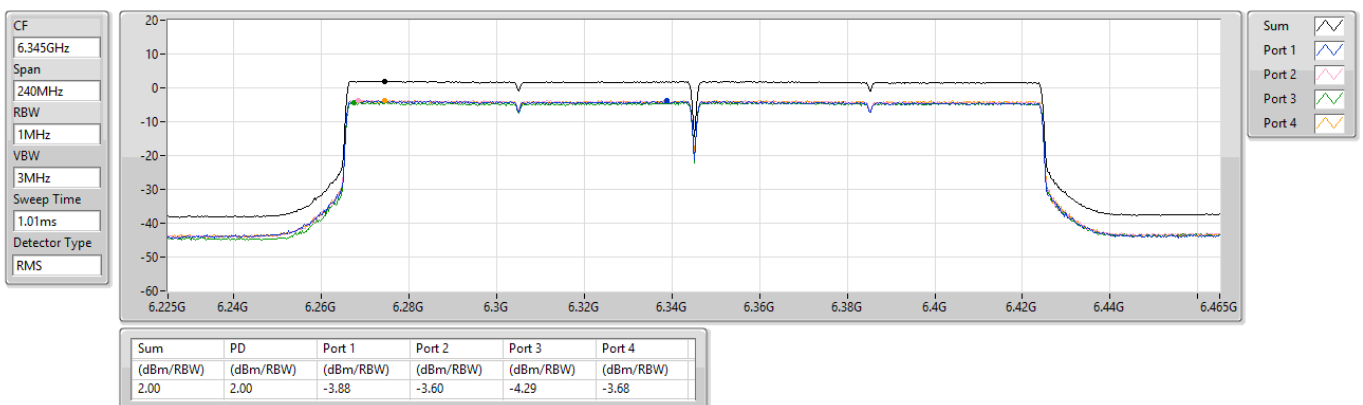

6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6505MHz Straddle 6.525-6.875GHz

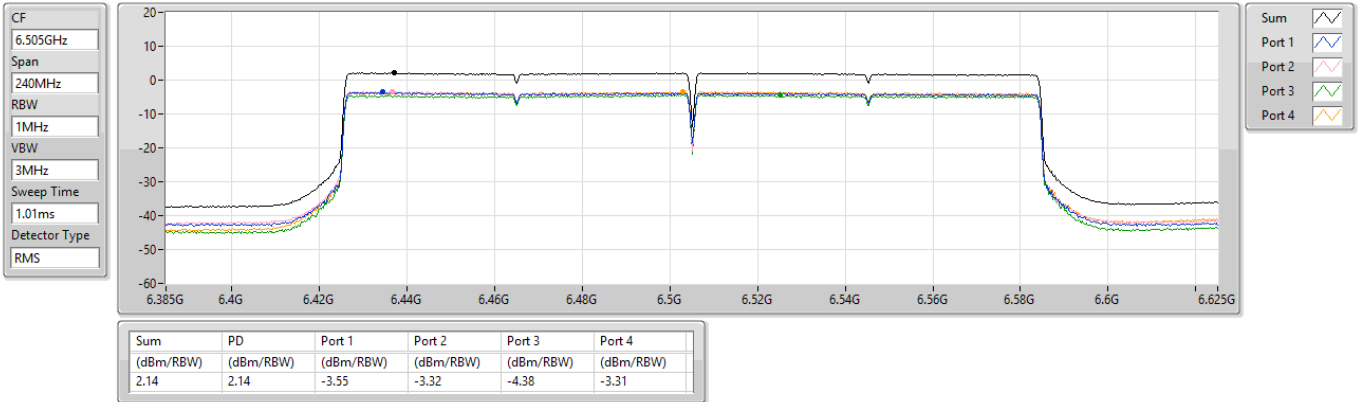

6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6665MHz

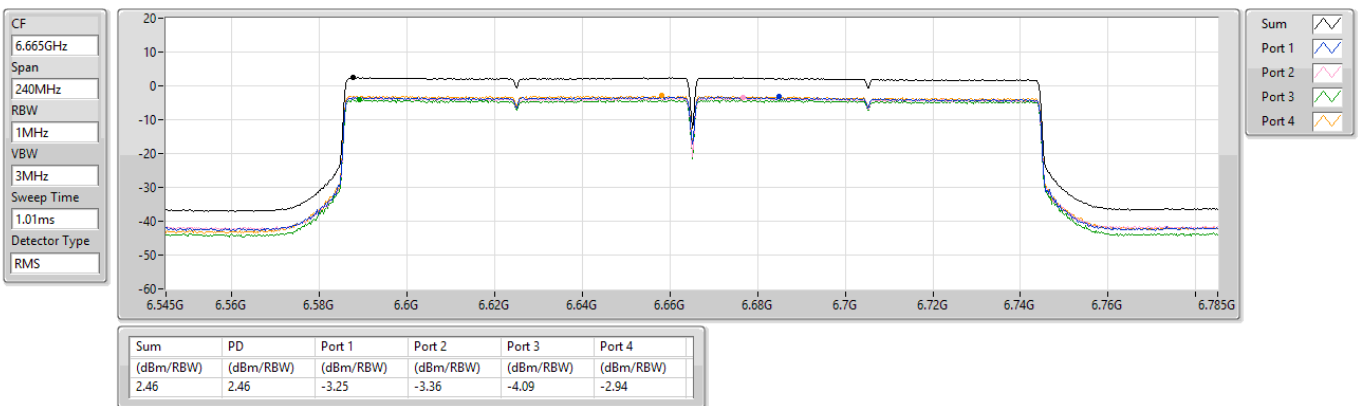

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


6825MHz Straddle 6.875-7.125GHz

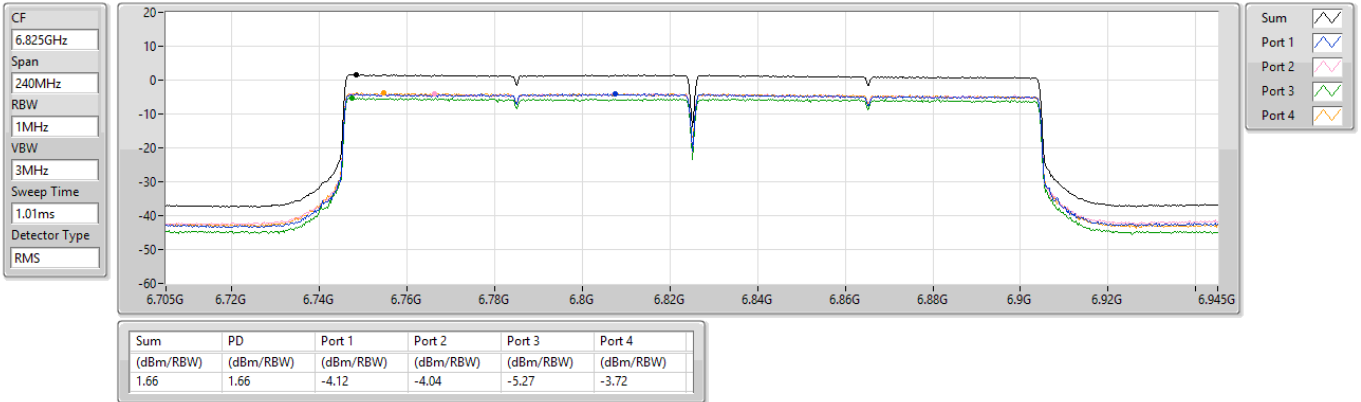

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD

6985MHz

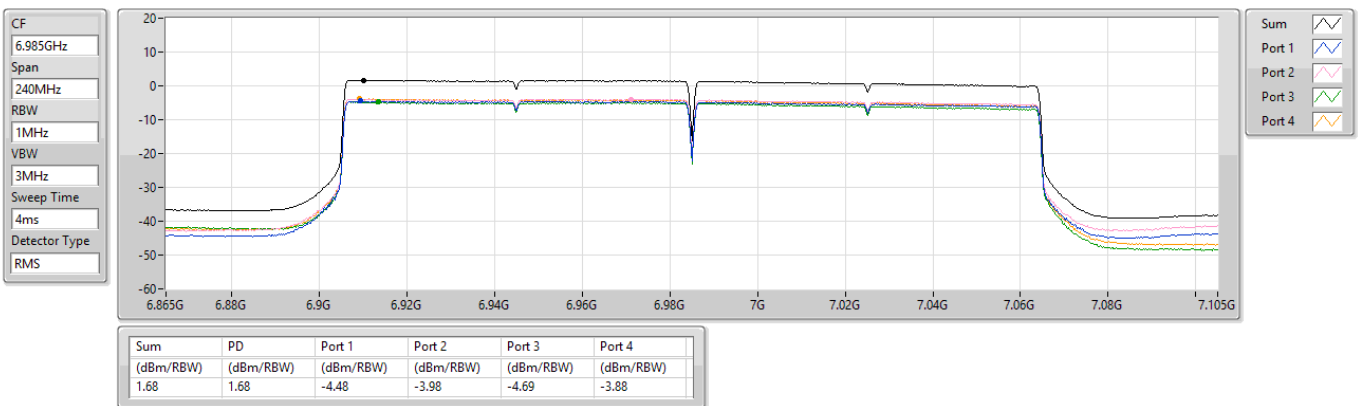


5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD

6105MHz

CF
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

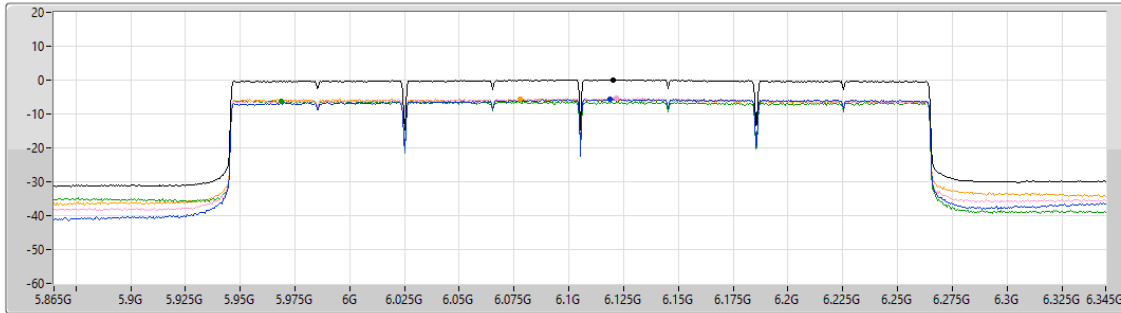

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.09	0.09	-5.54	-5.20	-6.13	-5.56

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD

6265MHz

CF
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

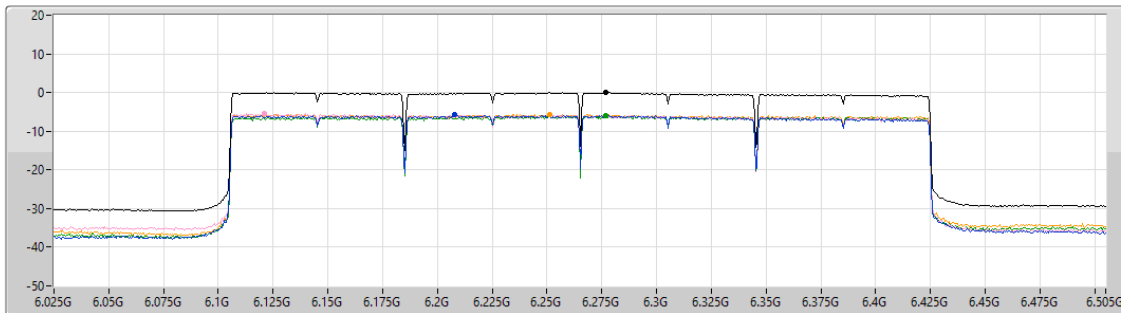


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.06	0.06	-5.82	-5.50	-6.02	-5.67

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6425MHz Straddle 5.925-6.425GHz

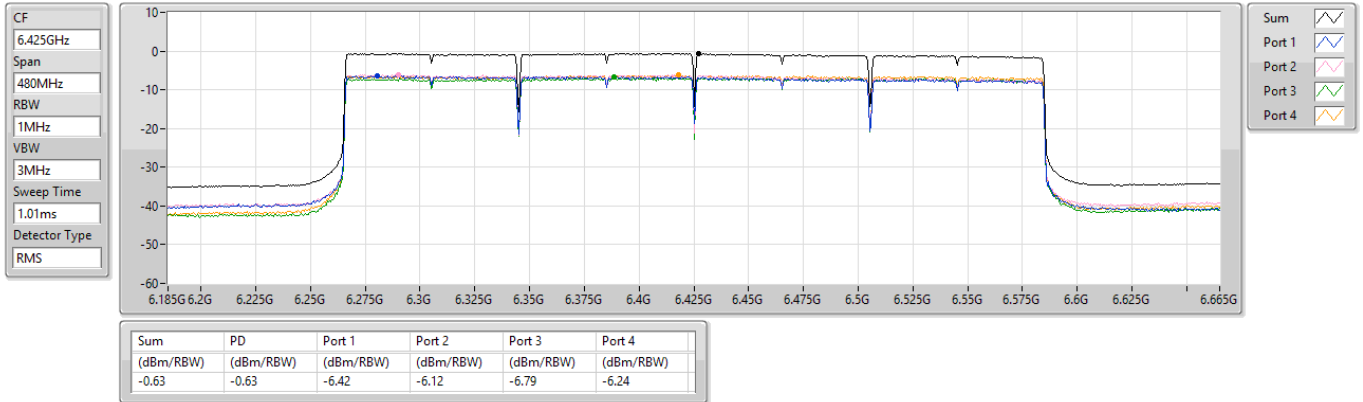

6.525-6.875GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6585MHz Straddle 6.525-6.875GHz

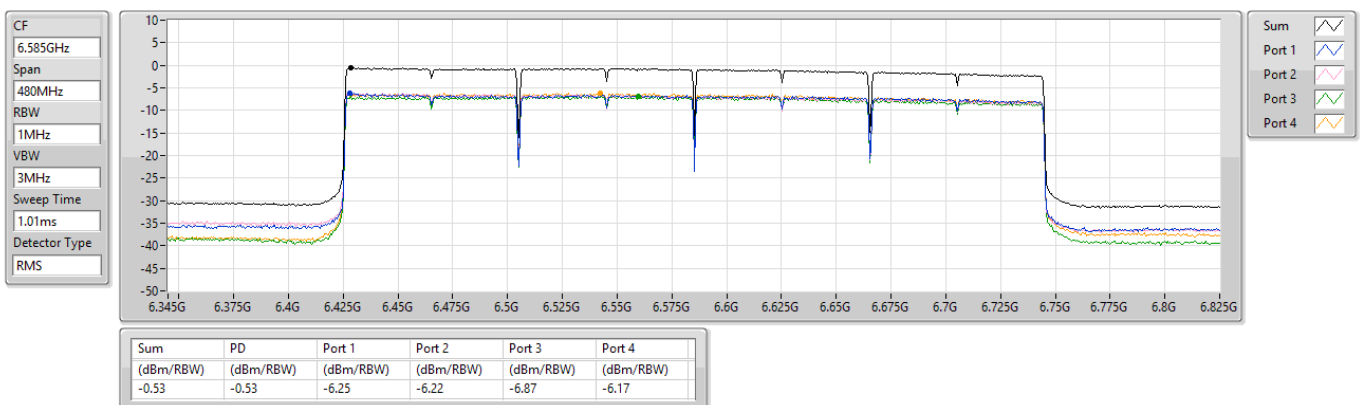

6.875-7.125GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6745MHz Straddle 6.875-7.125GHz

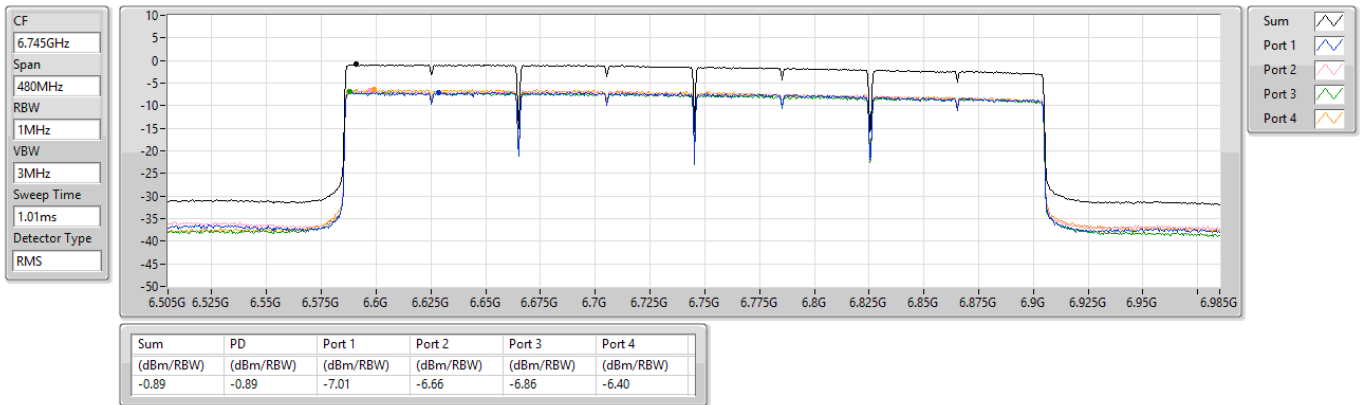

6.875-7.125GHz_802.11be EHT320_Nss4,(MCS0)_4TX

PSD


6905MHz Straddle 6.875-7.125GHz

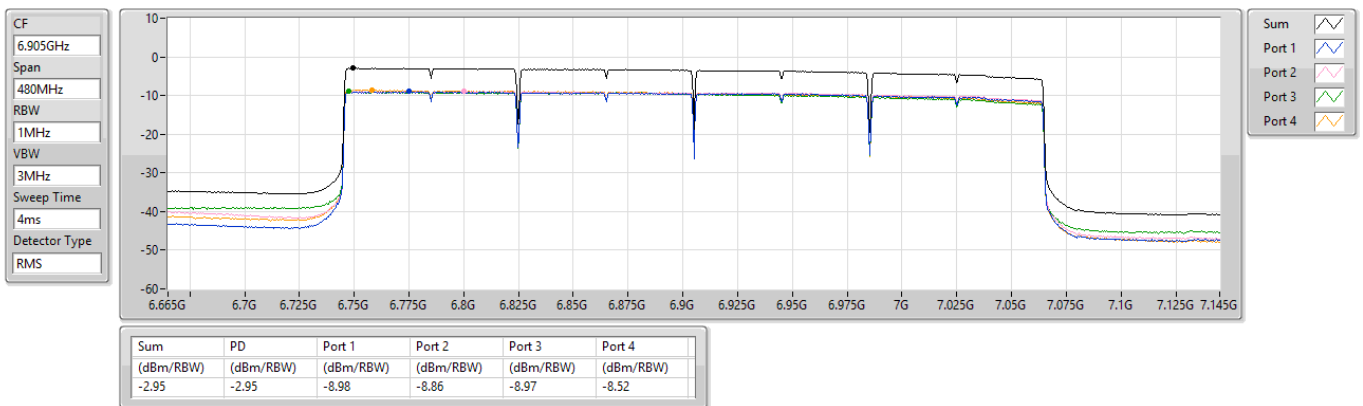



POE mode

Unwanted Emissions (Below 1GHz)

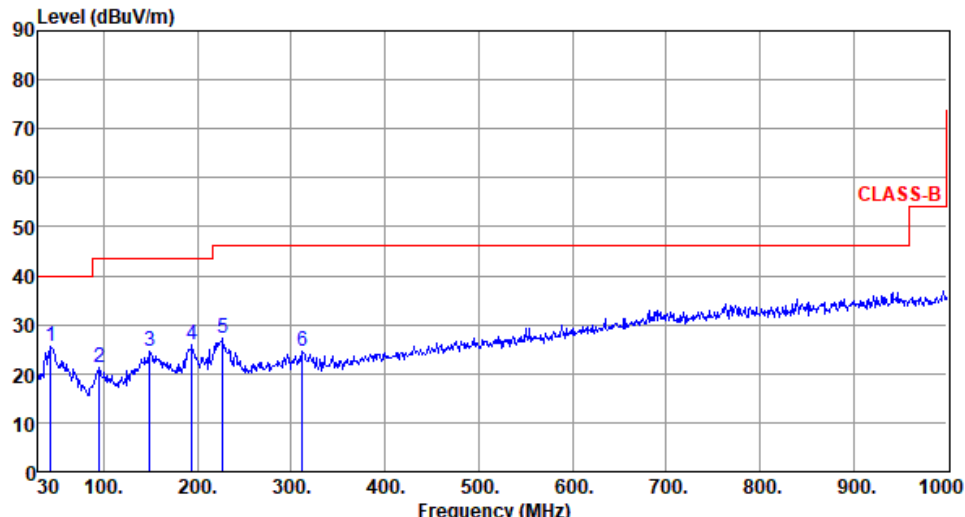Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>43.44</td><td>25.41</td><td>40.00</td><td>-14.59</td><td>34.56</td><td>-9.15</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>94.99</td><td>21.25</td><td>43.50</td><td>-22.25</td><td>35.33</td><td>-14.08</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>149.41</td><td>24.62</td><td>43.50</td><td>-18.88</td><td>33.18</td><td>-8.56</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>193.86</td><td>25.97</td><td>43.50</td><td>-17.53</td><td>37.50</td><td>-11.53</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>226.77</td><td>27.32</td><td>46.00</td><td>-18.68</td><td>39.14</td><td>-11.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>312.24</td><td>24.59</td><td>46.00</td><td>-21.41</td><td>32.32</td><td>-7.73</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	43.44	25.41	40.00	-14.59	34.56	-9.15	Peak	---	---	2	94.99	21.25	43.50	-22.25	35.33	-14.08	Peak	---	---	3	149.41	24.62	43.50	-18.88	33.18	-8.56	Peak	---	---	4	193.86	25.97	43.50	-17.53	37.50	-11.53	Peak	---	---	5	226.77	27.32	46.00	-18.68	39.14	-11.82	Peak	---	---	6	312.24	24.59	46.00	-21.41	32.32	-7.73	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	43.44	25.41	40.00	-14.59	34.56	-9.15	Peak	---	---																																																																
2	94.99	21.25	43.50	-22.25	35.33	-14.08	Peak	---	---																																																																
3	149.41	24.62	43.50	-18.88	33.18	-8.56	Peak	---	---																																																																
4	193.86	25.97	43.50	-17.53	37.50	-11.53	Peak	---	---																																																																
5	226.77	27.32	46.00	-18.68	39.14	-11.82	Peak	---	---																																																																
6	312.24	24.59	46.00	-21.41	32.32	-7.73	Peak	---	---																																																																



Modulation	be EHT320		Test Freq. (MHz)		6585																																																																																														
Polarization	Vertical																																																																																																		
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																																																			
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>44.55</td><td>36.51</td><td>40.00</td><td>-3.49</td><td>45.60</td><td>-9.09</td><td>QP</td><td>100</td><td>312</td></tr><tr><td>2</td><td>92.18</td><td>24.34</td><td>43.50</td><td>-19.16</td><td>38.72</td><td>-14.38</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>155.23</td><td>22.87</td><td>43.50</td><td>-20.63</td><td>31.26</td><td>-8.39</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>191.26</td><td>25.21</td><td>43.50</td><td>-18.29</td><td>36.55</td><td>-11.34</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>225.86</td><td>23.47</td><td>46.00</td><td>-22.53</td><td>35.41</td><td>-11.94</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>545.11</td><td>35.01</td><td>46.00</td><td>-10.99</td><td>37.02</td><td>-2.01</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	44.55	36.51	40.00	-3.49	45.60	-9.09	QP	100	312	2	92.18	24.34	43.50	-19.16	38.72	-14.38	Peak	---	---	3	155.23	22.87	43.50	-20.63	31.26	-8.39	Peak	---	---	4	191.26	25.21	43.50	-18.29	36.55	-11.34	Peak	---	---	5	225.86	23.47	46.00	-22.53	35.41	-11.94	Peak	---	---	6	545.11	35.01	46.00	-10.99	37.02	-2.01	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
					dBuV			cm	deg																																																																																										
1	44.55	36.51	40.00	-3.49	45.60	-9.09	QP	100	312																																																																																										
2	92.18	24.34	43.50	-19.16	38.72	-14.38	Peak	---	---																																																																																										
3	155.23	22.87	43.50	-20.63	31.26	-8.39	Peak	---	---																																																																																										
4	191.26	25.21	43.50	-18.29	36.55	-11.34	Peak	---	---																																																																																										
5	225.86	23.47	46.00	-22.53	35.41	-11.94	Peak	---	---																																																																																										
6	545.11	35.01	46.00	-10.99	37.02	-2.01	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for be EHT20


Modulation	be EHT20	Test Freq. (MHz)	5935																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4844.00</td><td>33.15</td><td>54.00</td><td>-20.85</td><td>32.93</td><td>0.22</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>2</td><td>4844.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>46.17</td><td>0.22</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>3</td><td>5925.00</td><td>67.97</td><td>68.20</td><td>-0.23</td><td>66.45</td><td>1.52</td><td>Average</td><td>218</td><td>298</td></tr><tr><td>4</td><td>5925.00</td><td>78.39</td><td>88.20</td><td>-9.81</td><td>76.87</td><td>1.52</td><td>Peak</td><td>218</td><td>298</td></tr><tr><td>5 *</td><td>5935.00</td><td>89.33</td><td></td><td></td><td>87.81</td><td>1.52</td><td>Average</td><td>218</td><td>298</td></tr><tr><td>6 *</td><td>5935.00</td><td>102.54</td><td></td><td></td><td>101.02</td><td>1.52</td><td>Peak</td><td>218</td><td>298</td></tr><tr><td>7</td><td>11870.00</td><td>45.04</td><td>54.00</td><td>-8.96</td><td>37.60</td><td>7.44</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>8</td><td>11870.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>48.02</td><td>7.44</td><td>Peak</td><td>100</td><td>24</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	33.15	54.00	-20.85	32.93	0.22	Average	100	28	2	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	28	3	5925.00	67.97	68.20	-0.23	66.45	1.52	Average	218	298	4	5925.00	78.39	88.20	-9.81	76.87	1.52	Peak	218	298	5 *	5935.00	89.33			87.81	1.52	Average	218	298	6 *	5935.00	102.54			101.02	1.52	Peak	218	298	7	11870.00	45.04	54.00	-8.96	37.60	7.44	Average	100	24	8	11870.00	55.46	74.00	-18.54	48.02	7.44	Peak	100	24
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	33.15	54.00	-20.85	32.93	0.22	Average	100	28																																																																																				
2	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	28																																																																																				
3	5925.00	67.97	68.20	-0.23	66.45	1.52	Average	218	298																																																																																				
4	5925.00	78.39	88.20	-9.81	76.87	1.52	Peak	218	298																																																																																				
5 *	5935.00	89.33			87.81	1.52	Average	218	298																																																																																				
6 *	5935.00	102.54			101.02	1.52	Peak	218	298																																																																																				
7	11870.00	45.04	54.00	-8.96	37.60	7.44	Average	100	24																																																																																				
8	11870.00	55.46	74.00	-18.54	48.02	7.44	Peak	100	24																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

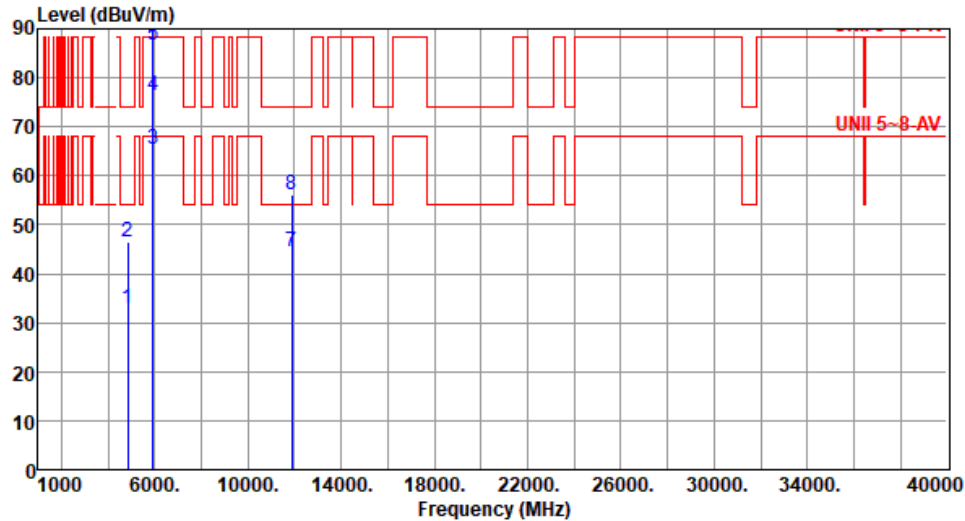


Modulation	be EHT20	Test Freq. (MHz)	5935						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.91	54.00	-21.09	32.69	0.22	Average	100	31
2	4844.00	46.65	74.00	-27.35	46.43	0.22	Peak	100	31
3	5925.00	65.47	68.20	-2.73	63.95	1.52	Average	329	18
4	5925.00	76.23	88.20	-11.97	74.71	1.52	Peak	329	18
5 *	5935.00	86.81			85.29	1.52	Average	329	18
6 *	5935.00	100.04			98.52	1.52	Peak	329	18
7	11870.00	44.35	54.00	-9.65	36.91	7.44	Average	100	21
8	11870.00	56.12	74.00	-17.88	48.68	7.44	Peak	100	21

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

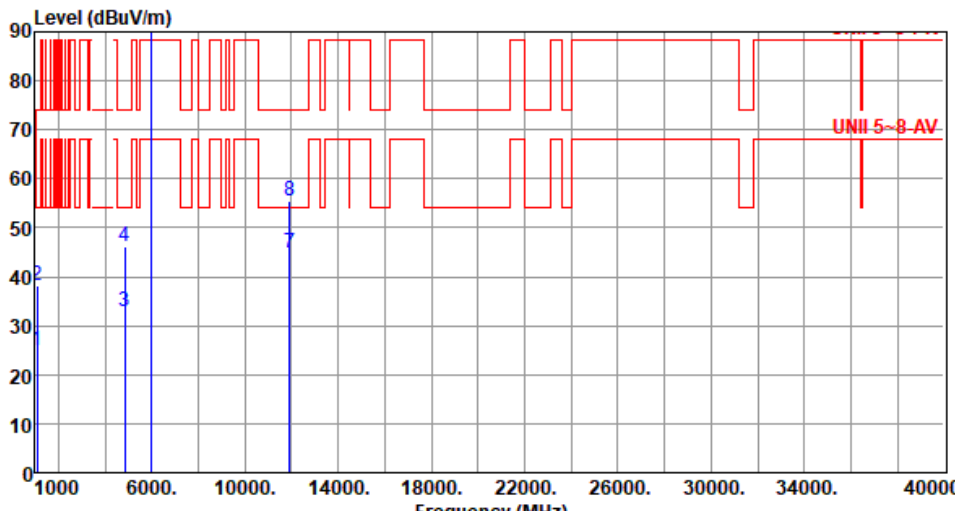


Modulation	be EHT20	Test Freq. (MHz)	5955																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>24.96</td><td>54.00</td><td>-29.04</td><td>32.41</td><td>-7.45</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>2</td><td>1094.00</td><td>38.18</td><td>74.00</td><td>-35.82</td><td>45.63</td><td>-7.45</td><td>Peak</td><td>100</td><td>15</td></tr><tr><td>3</td><td>4844.00</td><td>33.03</td><td>54.00</td><td>-20.97</td><td>32.81</td><td>0.22</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>4</td><td>4844.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>46.06</td><td>0.22</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>5 *</td><td>5955.00</td><td>97.65</td><td></td><td></td><td>96.12</td><td>1.53</td><td>Average</td><td>216</td><td>302</td></tr><tr><td>6 *</td><td>5955.00</td><td>110.72</td><td></td><td></td><td>109.19</td><td>1.53</td><td>Peak</td><td>216</td><td>302</td></tr><tr><td>7</td><td>11910.00</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>37.38</td><td>7.48</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>8</td><td>11910.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>47.87</td><td>7.48</td><td>Peak</td><td>100</td><td>12</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.96	54.00	-29.04	32.41	-7.45	Average	100	15	2	1094.00	38.18	74.00	-35.82	45.63	-7.45	Peak	100	15	3	4844.00	33.03	54.00	-20.97	32.81	0.22	Average	100	26	4	4844.00	46.28	74.00	-27.72	46.06	0.22	Peak	100	26	5 *	5955.00	97.65			96.12	1.53	Average	216	302	6 *	5955.00	110.72			109.19	1.53	Peak	216	302	7	11910.00	44.86	54.00	-9.14	37.38	7.48	Average	100	12	8	11910.00	55.35	74.00	-18.65	47.87	7.48	Peak	100	12
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.96	54.00	-29.04	32.41	-7.45	Average	100	15																																																																																				
2	1094.00	38.18	74.00	-35.82	45.63	-7.45	Peak	100	15																																																																																				
3	4844.00	33.03	54.00	-20.97	32.81	0.22	Average	100	26																																																																																				
4	4844.00	46.28	74.00	-27.72	46.06	0.22	Peak	100	26																																																																																				
5 *	5955.00	97.65			96.12	1.53	Average	216	302																																																																																				
6 *	5955.00	110.72			109.19	1.53	Peak	216	302																																																																																				
7	11910.00	44.86	54.00	-9.14	37.38	7.48	Average	100	12																																																																																				
8	11910.00	55.35	74.00	-18.65	47.87	7.48	Peak	100	12																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

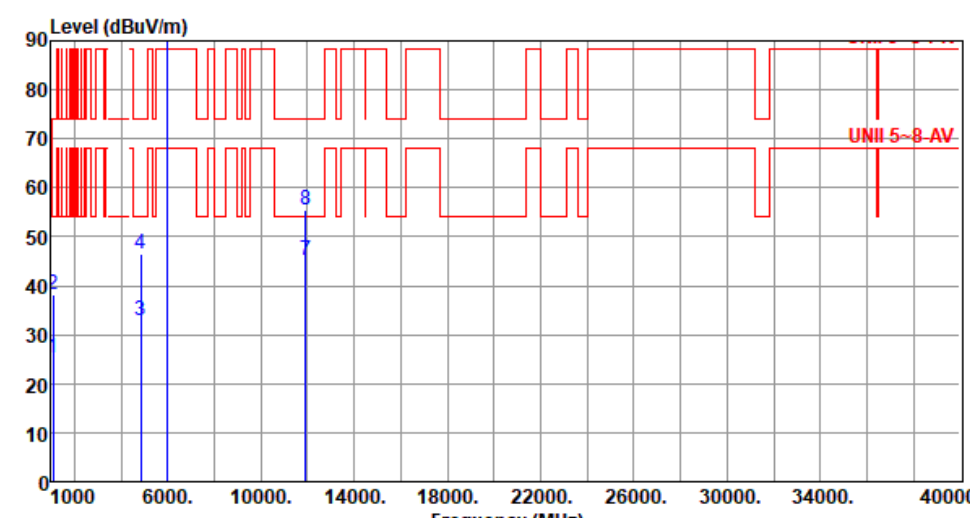


Modulation	be EHT20	Test Freq. (MHz)	5955						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.11	54.00	-28.89	32.56	-7.45	Average	100	35
2	1094.00	38.26	74.00	-35.74	45.71	-7.45	Peak	100	35
3	4844.00	32.88	54.00	-21.12	32.66	0.22	Average	100	24
4	4844.00	46.57	74.00	-27.43	46.35	0.22	Peak	100	24
5 *	5955.00	95.64			94.11	1.53	Average	330	19
6 *	5955.00	109.06			107.53	1.53	Peak	330	19
7	11910.00	45.04	54.00	-8.96	37.56	7.48	Average	100	13
8	11910.00	55.56	74.00	-18.44	48.08	7.48	Peak	100	13
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

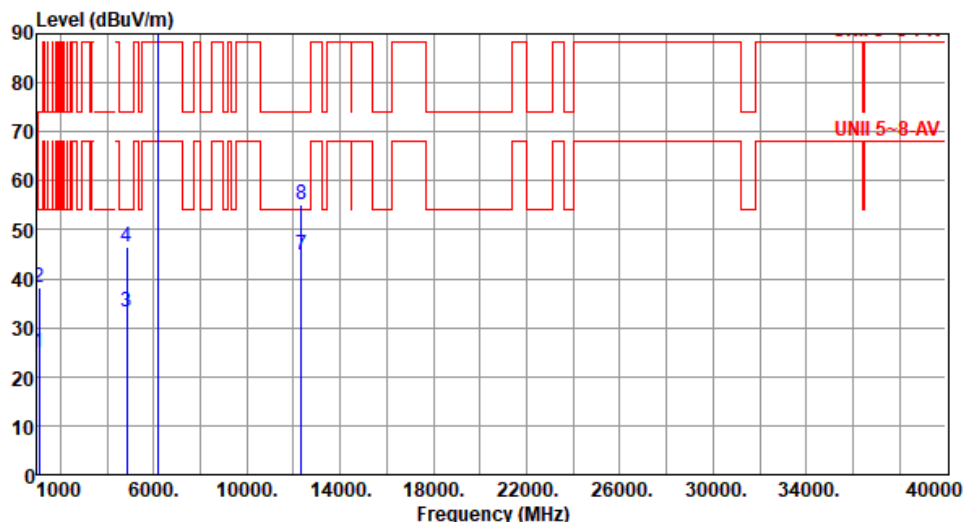

Modulation	be EHT20	Test Freq. (MHz)	6175						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	33
2	1094.00	38.26	74.00	-35.74	45.71	-7.45	Peak	100	33
3	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	19
4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	19
5 *	6175.00	97.46			95.46	2.00	Average	218	304
6 *	6175.00	110.77			108.77	2.00	Peak	218	304
7	12350.00	44.87	54.00	-9.13	37.65	7.22	Average	100	22
8	12350.00	55.29	74.00	-18.71	48.07	7.22	Peak	100	22

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

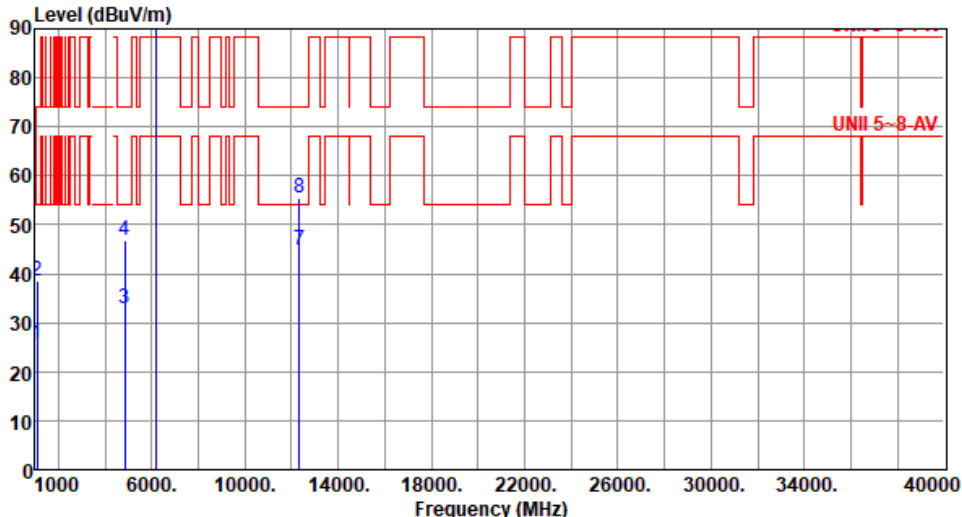

Modulation	be EHT20		Test Freq. (MHz)		6175																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>25.46</td><td>54.00</td><td>-28.54</td><td>32.91</td><td>-7.45</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>2</td><td>1094.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.99</td><td>-7.45</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>3</td><td>4844.00</td><td>33.02</td><td>54.00</td><td>-20.98</td><td>32.80</td><td>0.22</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>4844.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>46.59</td><td>0.22</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5 *</td><td>6175.00</td><td>95.52</td><td></td><td></td><td>93.52</td><td>2.00</td><td>Average</td><td>324</td><td>21</td></tr><tr><td>6 *</td><td>6175.00</td><td>108.96</td><td></td><td></td><td>106.96</td><td>2.00</td><td>Peak</td><td>324</td><td>21</td></tr><tr><td>7</td><td>12350.00</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>37.76</td><td>7.22</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>8</td><td>12350.00</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>48.34</td><td>7.22</td><td>Peak</td><td>100</td><td>46</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	1094.00	25.46	54.00	-28.54	32.91	-7.45	Average	100	21	2	1094.00	38.54	74.00	-35.46	45.99	-7.45	Peak	100	21	3	4844.00	33.02	54.00	-20.98	32.80	0.22	Average	100	47	4	4844.00	46.81	74.00	-27.19	46.59	0.22	Peak	100	47	5 *	6175.00	95.52			93.52	2.00	Average	324	21	6 *	6175.00	108.96			106.96	2.00	Peak	324	21	7	12350.00	44.98	54.00	-9.02	37.76	7.22	Average	100	46	8	12350.00	55.56	74.00	-18.44	48.34	7.22	Peak	100	46
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level			reading			High	Table																																																																																																														
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																														
1	1094.00	25.46	54.00	-28.54	32.91	-7.45	Average	100	21																																																																																																														
2	1094.00	38.54	74.00	-35.46	45.99	-7.45	Peak	100	21																																																																																																														
3	4844.00	33.02	54.00	-20.98	32.80	0.22	Average	100	47																																																																																																														
4	4844.00	46.81	74.00	-27.19	46.59	0.22	Peak	100	47																																																																																																														
5 *	6175.00	95.52			93.52	2.00	Average	324	21																																																																																																														
6 *	6175.00	108.96			106.96	2.00	Peak	324	21																																																																																																														
7	12350.00	44.98	54.00	-9.02	37.76	7.22	Average	100	46																																																																																																														
8	12350.00	55.56	74.00	-18.44	48.34	7.22	Peak	100	46																																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																							




Modulation	be EHT20	Test Freq. (MHz)	6415																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>24.85</td><td>54.00</td><td>-29.15</td><td>32.30</td><td>-7.45</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>1094.00</td><td>38.02</td><td>74.00</td><td>-35.98</td><td>45.47</td><td>-7.45</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>4844.00</td><td>33.45</td><td>54.00</td><td>-20.55</td><td>33.23</td><td>0.22</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>4</td><td>4844.00</td><td>46.66</td><td>74.00</td><td>-27.34</td><td>46.44</td><td>0.22</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>5 *</td><td>6415.00</td><td>97.42</td><td></td><td></td><td>94.21</td><td>3.21</td><td>Average</td><td>215</td><td>296</td></tr><tr><td>6 *</td><td>6415.00</td><td>110.50</td><td></td><td></td><td>107.29</td><td>3.21</td><td>Peak</td><td>215</td><td>296</td></tr><tr><td>7</td><td>12830.00</td><td>44.78</td><td>68.20</td><td>-23.42</td><td>37.46</td><td>7.32</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>12830.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>47.92</td><td>7.32</td><td>Peak</td><td>100</td><td>35</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.85	54.00	-29.15	32.30	-7.45	Average	100	38	2	1094.00	38.02	74.00	-35.98	45.47	-7.45	Peak	100	38	3	4844.00	33.45	54.00	-20.55	33.23	0.22	Average	100	19	4	4844.00	46.66	74.00	-27.34	46.44	0.22	Peak	100	19	5 *	6415.00	97.42			94.21	3.21	Average	215	296	6 *	6415.00	110.50			107.29	3.21	Peak	215	296	7	12830.00	44.78	68.20	-23.42	37.46	7.32	Average	100	35	8	12830.00	55.24	88.20	-32.96	47.92	7.32	Peak	100	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.85	54.00	-29.15	32.30	-7.45	Average	100	38																																																																																				
2	1094.00	38.02	74.00	-35.98	45.47	-7.45	Peak	100	38																																																																																				
3	4844.00	33.45	54.00	-20.55	33.23	0.22	Average	100	19																																																																																				
4	4844.00	46.66	74.00	-27.34	46.44	0.22	Peak	100	19																																																																																				
5 *	6415.00	97.42			94.21	3.21	Average	215	296																																																																																				
6 *	6415.00	110.50			107.29	3.21	Peak	215	296																																																																																				
7	12830.00	44.78	68.20	-23.42	37.46	7.32	Average	100	35																																																																																				
8	12830.00	55.24	88.20	-32.96	47.92	7.32	Peak	100	35																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6415																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.29</td><td>54.00</td><td>-28.71</td><td>32.74</td><td>-7.45</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>2</td><td>1094.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.96</td><td>-7.45</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>3</td><td>4844.00</td><td>32.65</td><td>54.00</td><td>-21.35</td><td>32.43</td><td>0.22</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>4</td><td>4844.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>46.07</td><td>0.22</td><td>Peak</td><td>100</td><td>15</td></tr><tr><td>5 *</td><td>6415.00</td><td>95.48</td><td></td><td></td><td>92.27</td><td>3.21</td><td>Average</td><td>321</td><td>26</td></tr><tr><td>6 *</td><td>6415.00</td><td>108.89</td><td></td><td></td><td>105.68</td><td>3.21</td><td>Peak</td><td>321</td><td>26</td></tr><tr><td>7</td><td>12830.00</td><td>45.06</td><td>68.20</td><td>-23.14</td><td>37.74</td><td>7.32</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>8</td><td>12830.00</td><td>55.52</td><td>88.20</td><td>-32.68</td><td>48.20</td><td>7.32</td><td>Peak</td><td>100</td><td>21</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.29	54.00	-28.71	32.74	-7.45	Average	100	41	2	1094.00	38.51	74.00	-35.49	45.96	-7.45	Peak	100	41	3	4844.00	32.65	54.00	-21.35	32.43	0.22	Average	100	15	4	4844.00	46.29	74.00	-27.71	46.07	0.22	Peak	100	15	5 *	6415.00	95.48			92.27	3.21	Average	321	26	6 *	6415.00	108.89			105.68	3.21	Peak	321	26	7	12830.00	45.06	68.20	-23.14	37.74	7.32	Average	100	21	8	12830.00	55.52	88.20	-32.68	48.20	7.32	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.29	54.00	-28.71	32.74	-7.45	Average	100	41																																																																																				
2	1094.00	38.51	74.00	-35.49	45.96	-7.45	Peak	100	41																																																																																				
3	4844.00	32.65	54.00	-21.35	32.43	0.22	Average	100	15																																																																																				
4	4844.00	46.29	74.00	-27.71	46.07	0.22	Peak	100	15																																																																																				
5 *	6415.00	95.48			92.27	3.21	Average	321	26																																																																																				
6 *	6415.00	108.89			105.68	3.21	Peak	321	26																																																																																				
7	12830.00	45.06	68.20	-23.14	37.74	7.32	Average	100	21																																																																																				
8	12830.00	55.52	88.20	-32.68	48.20	7.32	Peak	100	21																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

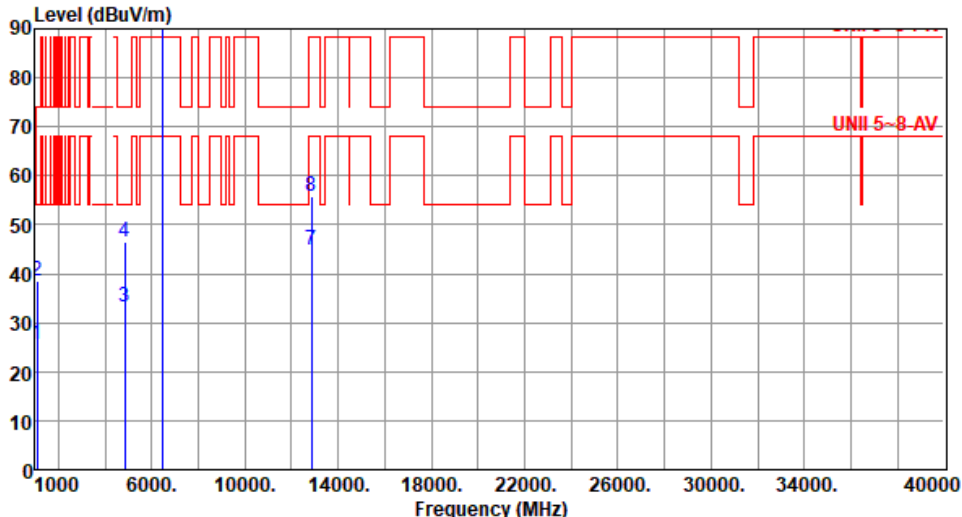

Modulation	be EHT20		Test Freq. (MHz)		6435				
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1094.00	25.45	54.00	-28.55	32.90	-7.45	Average	100	37
2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	37
3	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	22
4	4844.00	46.58	74.00	-27.42	46.36	0.22	Peak	100	22
5 *	6435.00	97.54			94.28	3.26	Average	212	295
6 *	6435.00	110.62			107.36	3.26	Peak	212	295
7	12870.00	44.91	68.20	-23.29	37.66	7.25	Average	100	34
8	12870.00	55.68	88.20	-32.52	48.43	7.25	Peak	100	34

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6435																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.35</td><td>54.00</td><td>-28.65</td><td>32.80</td><td>-7.45</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>2</td><td>1094.00</td><td>38.33</td><td>74.00</td><td>-35.67</td><td>45.78</td><td>-7.45</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>3</td><td>4844.00</td><td>33.25</td><td>54.00</td><td>-20.75</td><td>33.03</td><td>0.22</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>4844.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>46.74</td><td>0.22</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5 *</td><td>6435.00</td><td>95.62</td><td></td><td></td><td>92.36</td><td>3.26</td><td>Average</td><td>321</td><td>19</td></tr><tr><td>6 *</td><td>6435.00</td><td>108.95</td><td></td><td></td><td>105.69</td><td>3.26</td><td>Peak</td><td>321</td><td>19</td></tr><tr><td>7</td><td>12870.00</td><td>44.64</td><td>68.20</td><td>-23.56</td><td>37.39</td><td>7.25</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>8</td><td>12870.00</td><td>55.41</td><td>88.20</td><td>-32.79</td><td>48.16</td><td>7.25</td><td>Peak</td><td>100</td><td>11</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.35	54.00	-28.65	32.80	-7.45	Average	100	39	2	1094.00	38.33	74.00	-35.67	45.78	-7.45	Peak	100	39	3	4844.00	33.25	54.00	-20.75	33.03	0.22	Average	100	25	4	4844.00	46.96	74.00	-27.04	46.74	0.22	Peak	100	25	5 *	6435.00	95.62			92.36	3.26	Average	321	19	6 *	6435.00	108.95			105.69	3.26	Peak	321	19	7	12870.00	44.64	68.20	-23.56	37.39	7.25	Average	100	11	8	12870.00	55.41	88.20	-32.79	48.16	7.25	Peak	100	11
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.35	54.00	-28.65	32.80	-7.45	Average	100	39																																																																																				
2	1094.00	38.33	74.00	-35.67	45.78	-7.45	Peak	100	39																																																																																				
3	4844.00	33.25	54.00	-20.75	33.03	0.22	Average	100	25																																																																																				
4	4844.00	46.96	74.00	-27.04	46.74	0.22	Peak	100	25																																																																																				
5 *	6435.00	95.62			92.36	3.26	Average	321	19																																																																																				
6 *	6435.00	108.95			105.69	3.26	Peak	321	19																																																																																				
7	12870.00	44.64	68.20	-23.56	37.39	7.25	Average	100	11																																																																																				
8	12870.00	55.41	88.20	-32.79	48.16	7.25	Peak	100	11																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													