



RADIO TEST REPORT

FCC ID : 2AU6R04285
Equipment : 802.11be (WiFi 7) Dual-Radio PoE Access Point
Brand Name : ZYXEL
Model Name : NWA50BE PRO, NWA90BE PRO, NWA50BE, NWA90BE
Applicant : Zyxel Networks Corporation
No.2 Industry East RD. IX, Hsinchu Science Park,
Hsinchu 30075, Taiwan, R.O.C
Manufacturer : Zyxel Networks Corporation
No.2 Industry East RD. IX, Hsinchu Science Park,
Hsinchu 30075, Taiwan, R.O.C
Standard : 47 CFR FCC Part 15.407

The product was received on Apr. 24, 2025, and testing was started from May 08, 2025 and completed on Jul. 21, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	15
2.3 EUT Operation during Test	16
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	19
3 Transmitter Test Result	22
3.1 AC Power-line Conducted Emissions	22
3.2 Emission Bandwidth	24
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	25
3.4 Peak Power Spectral Density (E.I.R.P.)	28
3.5 Unwanted Emissions.....	32
3.6 Contention Based Protocol.....	37
4 Test Equipment and Calibration Data	38
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device or non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Muse Chan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20), be (EHT20)	5955-7115	1-233 [59]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

Band	Mode	BWch (MHz)	Nant
5.925-7.125 GHz	802.11ax HEW20	20	2TX
5.925-7.125 GHz	802.11ax HEW20-BF	20	2TX
5.925-7.125 GHz	802.11be EHT20	20	2TX
5.925-7.125 GHz	802.11be EHT20-BF	20	2TX
5.925-7.125 GHz	802.11ax HEW40	40	2TX
5.925-7.125 GHz	802.11ax HEW40-BF	40	2TX
5.925-7.125 GHz	802.11be EHT40	40	2TX
5.925-7.125 GHz	802.11be EHT40-BF	40	2TX
5.925-7.125 GHz	802.11ax HEW80	80	2TX
5.925-7.125 GHz	802.11ax HEW80-BF	80	2TX
5.925-7.125 GHz	802.11be EHT80	80	2TX
5.925-7.125 GHz	802.11be EHT80-BF	80	2TX
5.925-7.125 GHz	802.11ax HEW160	160	2TX
5.925-7.125 GHz	802.11ax HEW160-BF	160	2TX
5.925-7.125 GHz	802.11be EHT160	160	2TX
5.925-7.125 GHz	802.11be EHT160-BF	160	2TX
5.925-7.125 GHz	802.11be EHT320	320	2TX
5.925-7.125 GHz	802.11be EHT320-BF	320	2TX

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- The EUT doesn't support NSS1.

**1.1.2 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	ARISTOTLE ENTERPRISES INC.	13103-27-P1	PIFA Antenna	I-PEX	Note 1
2	ARISTOTLE ENTERPRISES INC.	13103-27-P2	PIFA Antenna	I-PEX	

Note 1:

Ant.	Port		Antenna Gain (dBi)				
	WLAN 2.4GHz	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz			
				UNII 1	UNII 2A	UNII 2C	UNII 3
1	2	1	2.163173	4.49291	3.94728	4.695129	4.864368
2	1	2	3.041951	2.536596	2.929424	2.183749	3.330918

Ant.	Port	Antenna Gain (dBi)			
		WLAN 6GHz			
	WLAN 6GHz	UNII 5	UNII 6	UNII 7	UNII 8
1	1	4.384437	3.733008	3.545851	3.055706
2	2	3.872025	3.363481	4.012242	4.507121

Note 2: The above information was declared by manufacturer.

Note 3: **For 2.4GHz function:****For IEEE 802.11 b/g/n/VHT/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11 a/n/ac/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11 ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} g_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,2) = 10^{G3/20} ; NSS1(g1,2) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

2T1S

$$2.4G \ G1 = 2.163173 \text{ dBi} ; G2 = 3.041951 \text{ dBi} ; DG = 5.623970 \text{ dBi}$$

$$5G \ UNII-1 \ G1 = 4.492910 \text{ dBi} ; G2 = 2.536596 \text{ dBi} ; DG = 6.580010 \text{ dBi}$$

$$5G \ UNII-2A \ G1 = 3.947280 \text{ dBi} ; G2 = 2.929424 \text{ dBi} ; DG = 6.463550 \text{ dBi}$$

$$5G \ UNII-2C \ G1 = 4.695129 \text{ dBi} ; G2 = 2.183749 \text{ dBi} ; DG = 6.540190 \text{ dBi}$$

$$5G \ UNII-3 \ G1 = 4.864368 \text{ dBi} ; G2 = 3.330918 \text{ dBi} ; DG = 7.141740 \text{ dBi}$$

2T2S

$$2.4G \ DG = 2.624750 \text{ dBi}$$

$$5G \ UNII-1 \ DG = 3.623990 \text{ dBi}$$

$$5G \ UNII-2A \ DG = 3.468100 \text{ dBi}$$

$$5G \ UNII-2C \ DG = 3.618500 \text{ dBi}$$

$$5G \ UNII-3 \ DG = 4.164980 \text{ dBi}$$

$$6G \ UNII-5 \ DG = 4.135780 \text{ dBi}$$

$$6G \ UNII-6 \ DG = 3.552170 \text{ dBi}$$

$$6G \ UNII-7 \ DG = 3.785300 \text{ dBi}$$

$$6G \ UNII-8 \ DG = 3.841770 \text{ dBi}$$



1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11be EHT20_Nss 2,(M0)	0.997	0.01	5.452m	10Hz (DC $\geq$ 0.98)
802.11be EHT20-BF_Nss 2,(M0)	0.997	0.01	5.452m	10Hz (DC $\geq$ 0.98)
802.11be EHT40_Nss 2,(M0)	0.976	0.11	5.453m	200
802.11be EHT40-BF_Nss 2,(M0)	0.976	0.11	5.453m	200
802.11be EHT80_Nss 2,(M0)	0.98	0.09	5.453m	10Hz (DC $\geq$ 0.98)
802.11be EHT80-BF_Nss 2,(M0)	0.98	0.09	5.453m	10Hz (DC $\geq$ 0.98)
802.11be EHT160_Nss 2,(M0)	0.973	0.12	5.453m	200
802.11be EHT160-BF_Nss 2,(M0)	0.973	0.12	5.453m	200
802.11be EHT320_Nss 2,(M0)	0.979	0.09	5.457m	200
802.11be EHT320-BF_Nss 2,(M0)	0.979	0.09	5.457m	200

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter or PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.			
Device Type	☒	Indoor Access Point	☐	Subordinate
	☐	Indoor Client	☐	Standard Power Access Point
	☐	Dual Client	☐	Standard Client
	☐	Fixed Client	☐	Very Low Power
Condition of EUT	☒	Indoor	☐	Outdoor
Channel Puncturing Function	☐	Supported Static Puncturing		
	☐	Supported Dynamic Puncturing (Reduce BW)		
	☒	Unsupported		
	Note: The EUT doesn't support puncturing for CBP			
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	QRCT 4.0.152.1			
Software / Firmware Version for CBP	V1.00(0)IT-20250515101023 / 2025-05-15 10:10:25			

Note: The above information was declared by manufacturer.



1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	6GHz function	Description
NWA50BE PRO	V	For Small business
NWA90BE PRO	V	For e-commerce
NWA50BE	X	For Small business
NWA90BE	X	For e-commerce

Note 1: From the above models, model: NWA50BE PRO was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH01-CB	Ken Yeh	21.8~22.4 / 58~61	May 16, 2025~ Jul. 03, 2025
Radiated (below 1GHz)	03CH03-CB	KJ Chang	21.6~23.1 / 58~62	Jun. 04, 2025
Radiated (above 1GHz)	03CH03-CB		21.6~23.1 / 58~62	Jun. 28, 2025
Radiated (Co-location)	03CH03-CB		21.6~23.1 / 58~62	May 08, 2025~ May 13, 2025
AC Conduction	CO02-CB	Joe Chu	22~23 / 55~56	Jul. 21, 2025
RF Conducted (Contention-Based Protocol test)	DF02-CB	Eason chen	21.2~22.7 / 59~64	Jul. 02, 2025~ Jul. 08, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Date Before May 28, 2025

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%

Test Date: Date After May 27, 2025

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20_Nss2,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40_Nss2,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80_Nss2,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz



Mode
6865MHz
6945MHz
7025MHz
802.11be EHT160_Nss2,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320_Nss2,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz
802.11be EHT20-BF_Nss2,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40-BF_Nss2,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz



Mode
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80-BF _Nss2,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160-BF _Nss2,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320-BF _Nss2,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz

Note:

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + WLAN 2.4GHz + WLAN 5GHz + Adapter
2	EUT + WLAN 2.4GHz + WLAN 5GHz + PoE
Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT + WLAN 2.4GHz + WLAN 6GHz + Adapter
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Contention Based Protocol
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX After evaluating, the worst case was found as below from radiated emission above 1GHz. Thus, the measurement will follow this same test configuration.
1	EUT in Y axis + WLAN 2.4GHz + Adapter
2	EUT in Y axis + WLAN 2.4GHz + PoE
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Z axis + WLAN 5GHz + PoE
4	EUT in Y axis + WLAN 6GHz + PoE
For operating mode 3 is the worst case and it was record in this test report.	



Operating Mode > 1GHz	CTX
	After evaluating, the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	After evaluating, the worst case was found as below from radiated emission above 1GHz. Thus, the measurement will follow this same test configuration.
1	EUT in Y axis + WLAN 2.4GHz + WLAN 5GHz
2	EUT in Y axis + WLAN 2.4GHz + WLAN 6GHz
For operating mode 1 is the worst case and it was record in this test report.	
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT + WLAN 2.4GHz + WLAN 5GHz
2	EUT + WLAN 2.4GHz + WLAN 6GHz
Refer to Sporton Test Report No.: FA541626 for Co-location RF Exposure Evaluation.	

Note: The PoE was for measurement only and would not be marketed. Its information is shown as below:

Equipment	Brand Name	Model Name
PoE	ZYXEL	ADH-30AR B

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	DVE	DSA-18PFCA-09	INPUT: 100-240V~50/60Hz, 0.6A OUTPUT: +12.0V, 1.5A, 18.0W
Others			
Plug*1			

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN PC	ASUS	S300TA	TX2-RTL8821CE
B	2.4G NB	DELL	E6430	N/A
C	5G NB	DELL	E6430	N/A

For Radiated:

Below 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE	ZYXEL	ADH-30AR B	N/A

Above 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A


**For RF Conducted (Other tests):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	Lenovo	L440	N/A

For RF Conducted (Contention Based Protocol test):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	NB	DELL	E4300	N/A
C	WLAN module	MediaTek Inc.	MT7927	RAS-MT7927

2.6 Test Setup Diagram

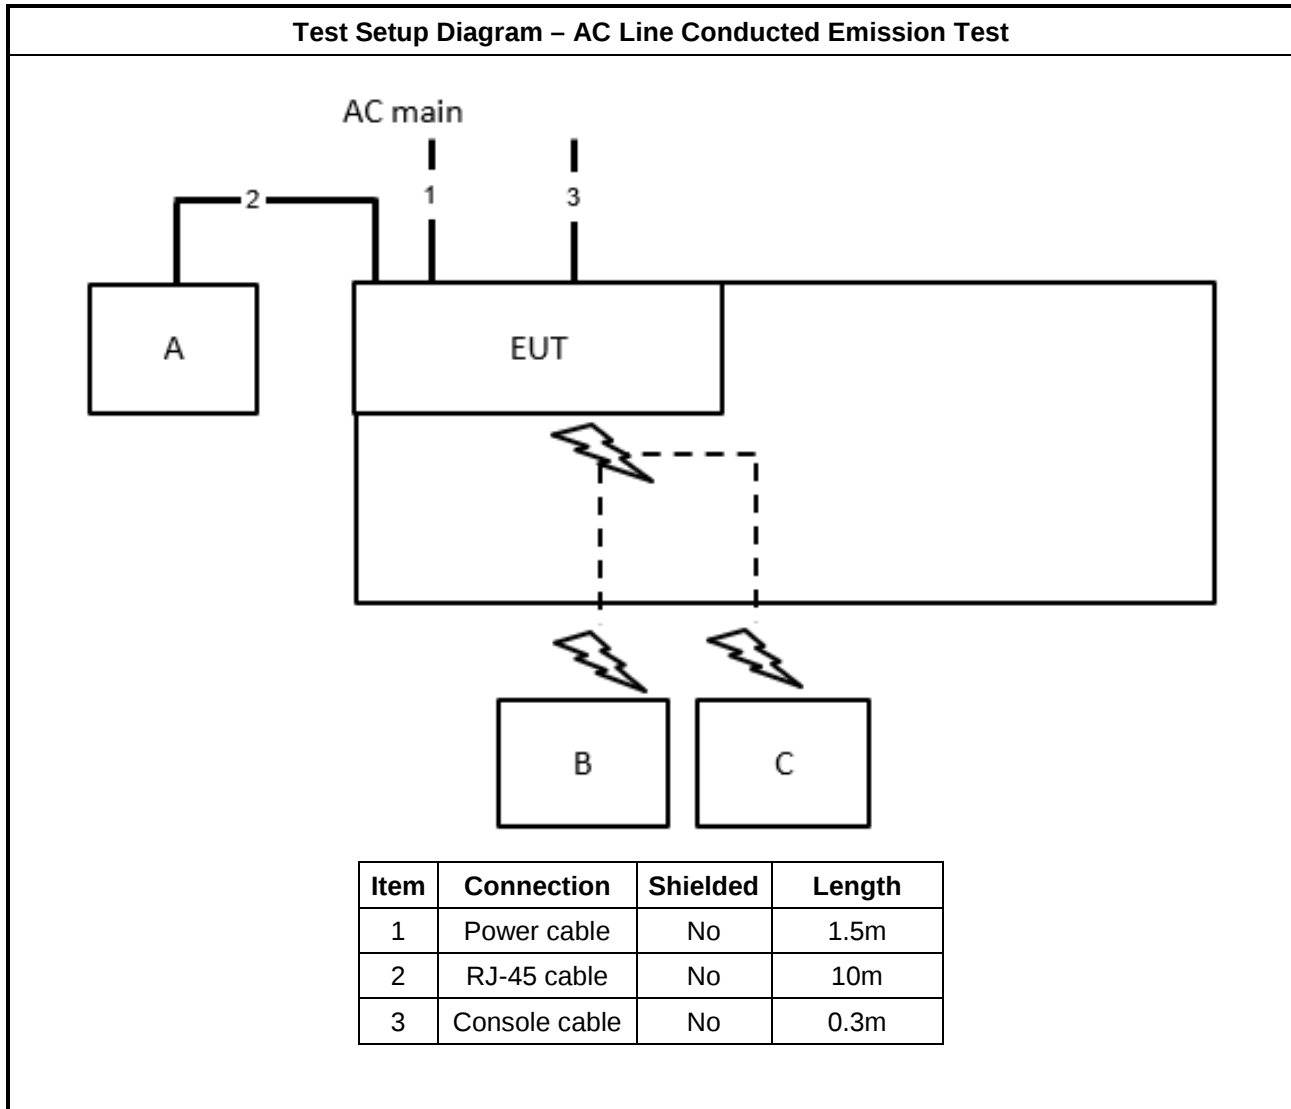

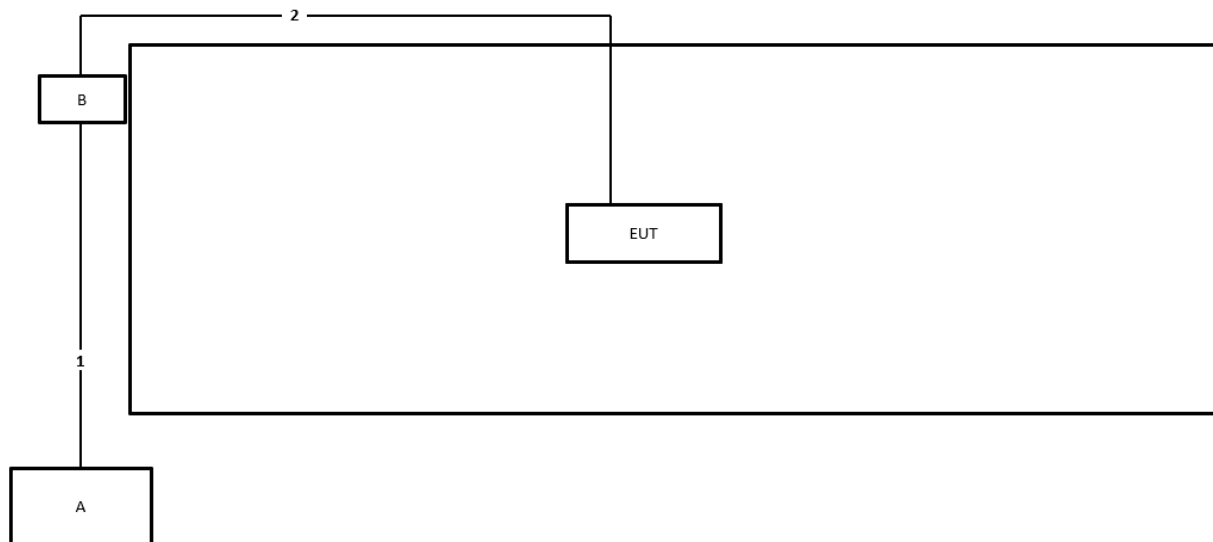Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m

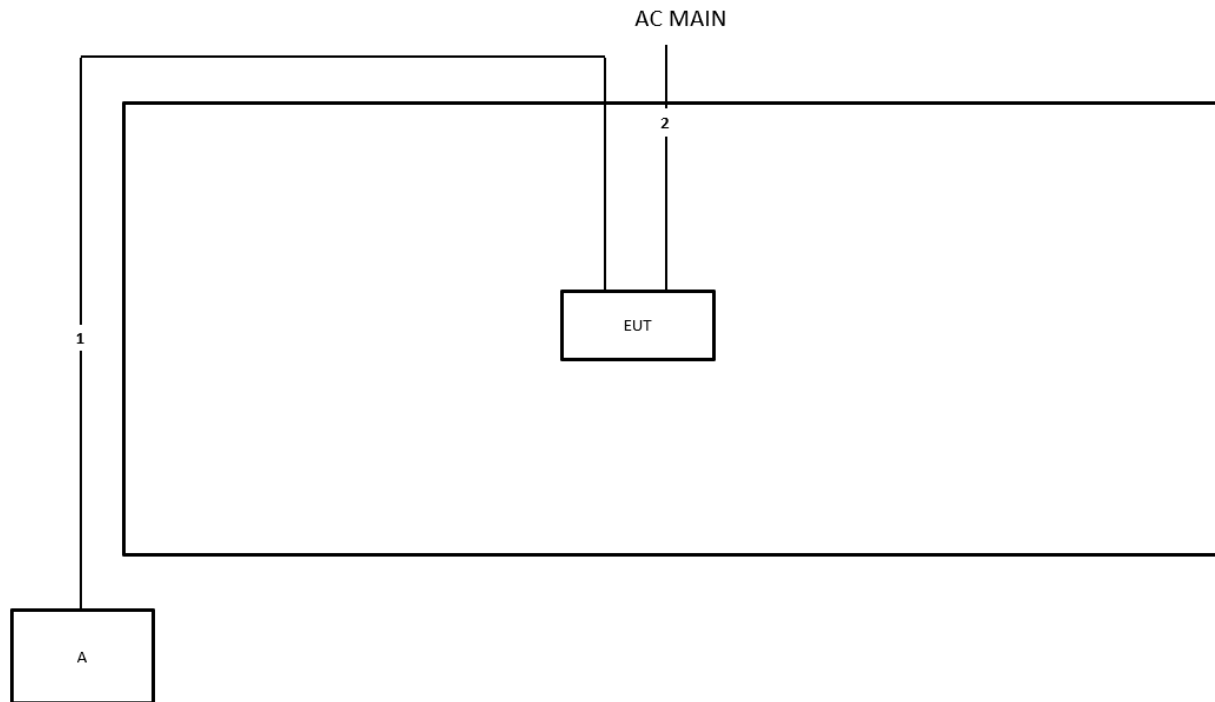Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

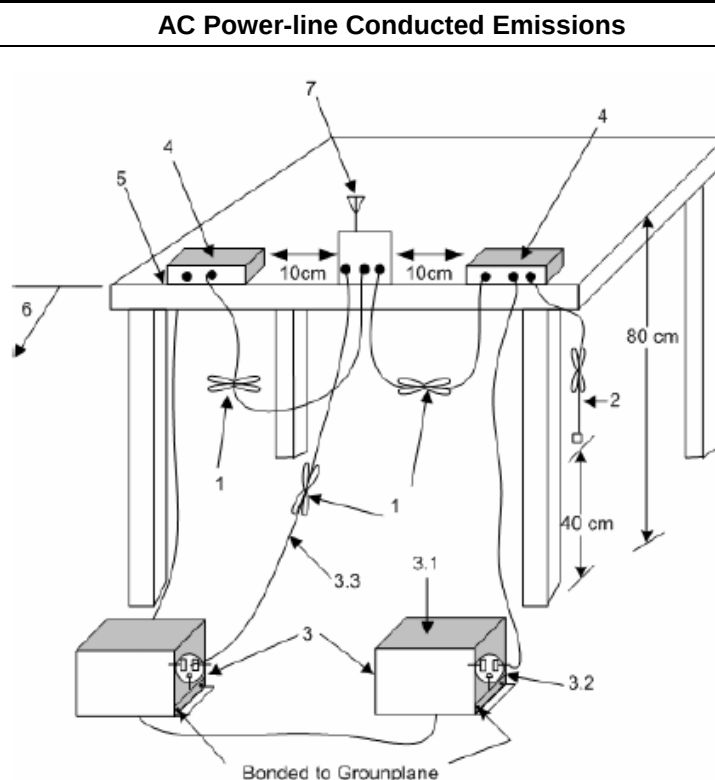

- 1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
- 2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
- 3.1—All other equipment powered from additional LISN(s).
- 3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
- 3.3—LISN at least 80 cm from nearest part of EUT chassis.
- 4—Non-EUT components of EUT system being tested.
- 5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
- 6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
- 7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☒	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☒	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

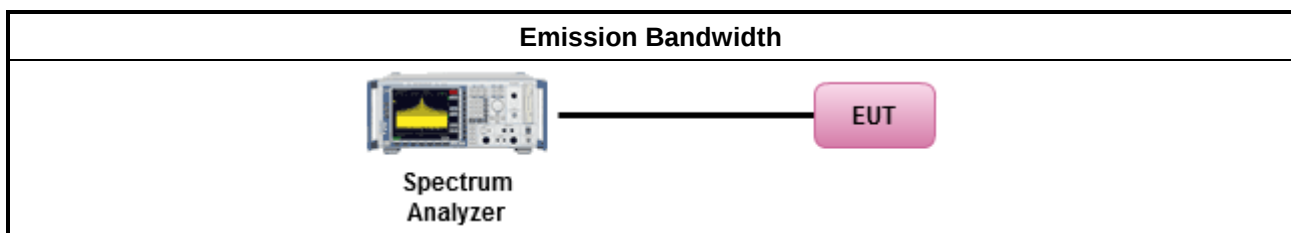

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.



☐	For the 5.925 ~ 6.875 GHz band:
☐	For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
☐	For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☐	According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.
☐	Average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
☐	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

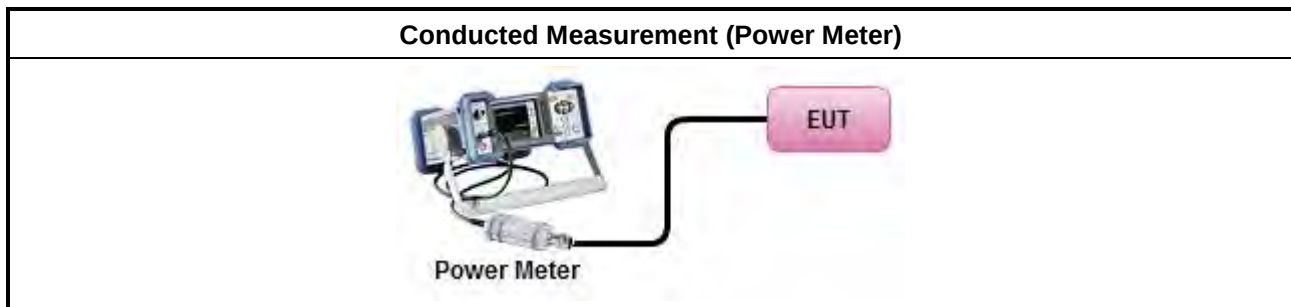

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.




3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.4.4 Test Setup

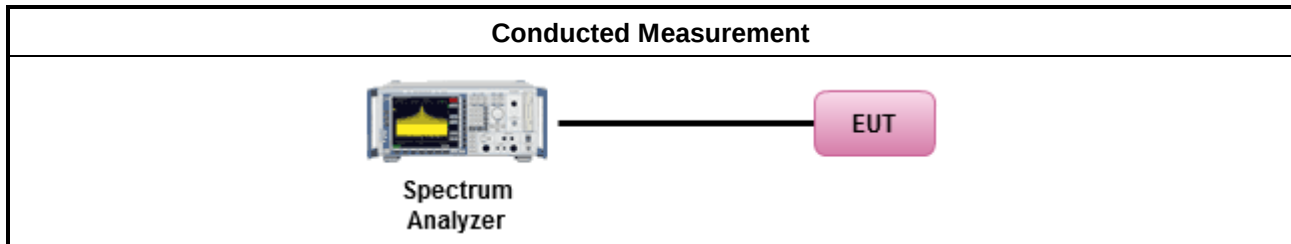

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

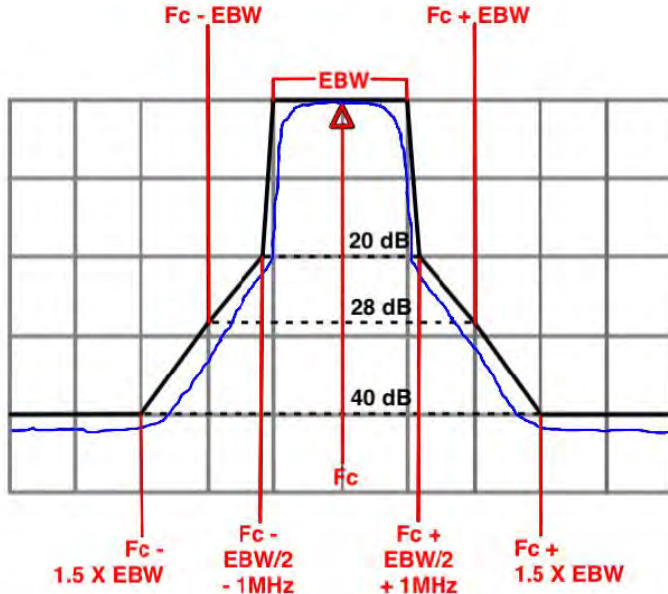Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

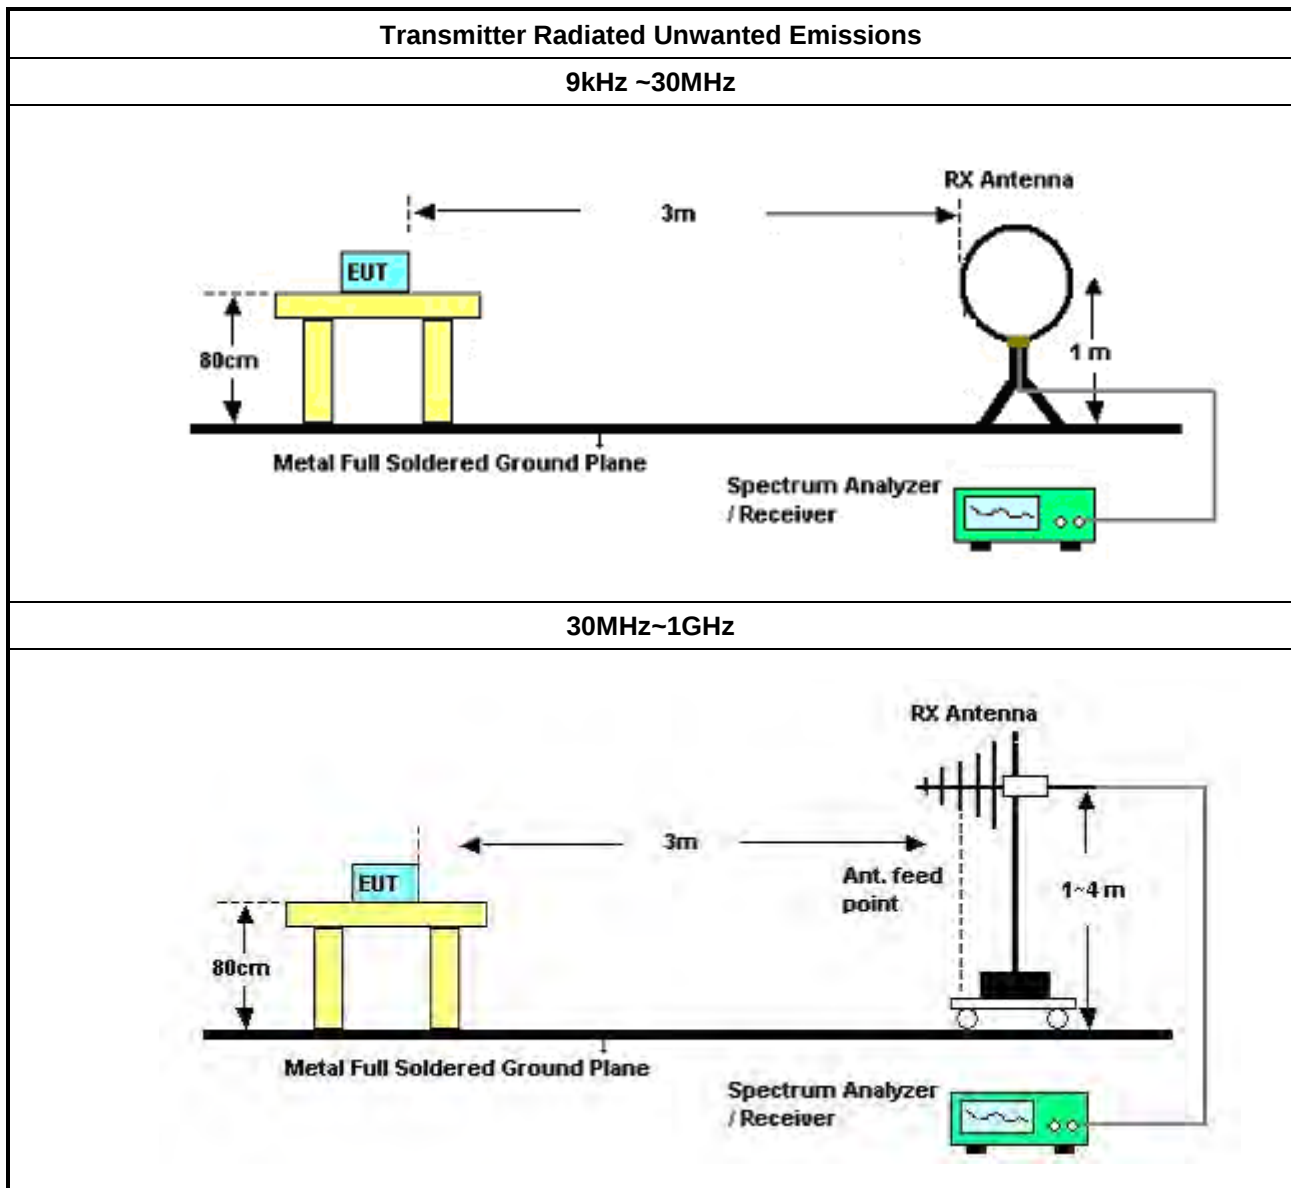

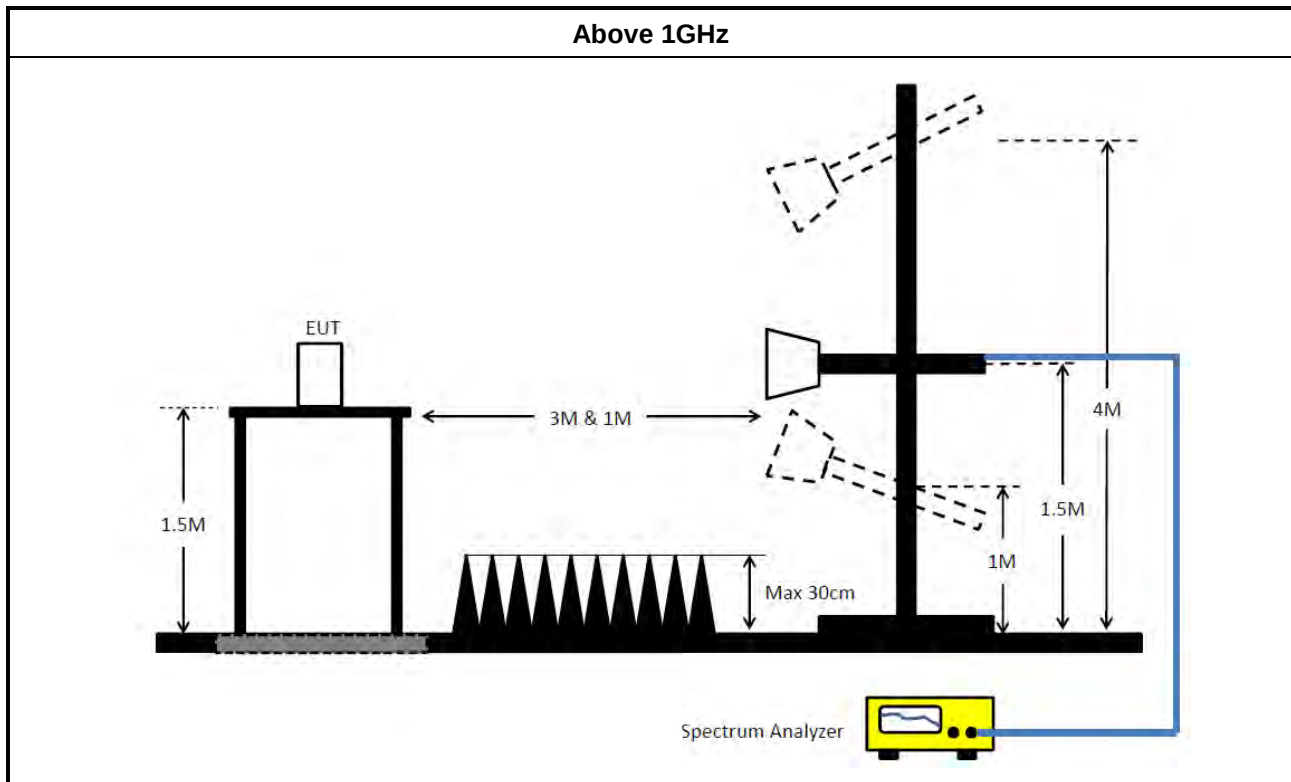

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

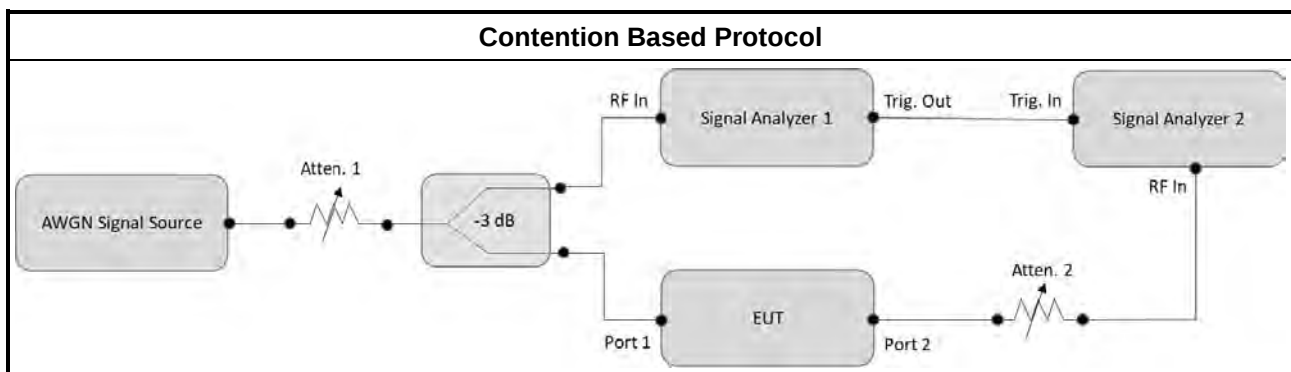

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Apr. 29, 2025	Apr. 28, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 14, 2025	May 13, 2026	Conduction (CO02-CB)
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH03-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH03-CB	30 MHz ~ 1 GHz	Jan. 17, 2025	Jan. 16, 2026	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 02, 2025	May 01, 2026	Radiation (03CH03-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112B& N-6-06	2888&AT-N0605	30MHz ~ 1GHz	Jan. 17, 2025	Jan. 16, 2026	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 20, 2025	Feb. 19, 2026	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH03-CB)
Amplifier	SGH	SGH301	20240606-1	30MHz ~ 1GHz	Jun. 03, 2025	Jun. 02, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 11, 2024	Jul. 10, 2025	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH03-CB)
RF Cable-low	Woken	RG402	Low Cable-02+29	30MHz ~ 1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Signal Analyzer	R&S	FSV3044	101320	9kHz ~ 44GHz	Jul. 27, 2024	Jul. 28, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1 ~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1339408	300MHz~40GHz	Sep. 13, 2024	Sep. 12, 2025	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1517009	300MHz~40GHz	Sep. 13, 2024	Sep. 12, 2025	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 08, 2024	Nov. 07, 2025	Conducted (DF02-CB)
Signal generator	R&S	SMB100A	181239	1MHz-40GHz	Jan. 08, 2025	Jan. 07, 2026	Conducted (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Oct. 28, 2024	Oct. 27, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
100MS/s Digitizer	N.I	USB-5133	F65206	N/A	Mar. 26, 2025	Mar. 25, 2026	Conducted (DF02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	402k	44.79	47.82	-3.03	Neutral

Mode 1

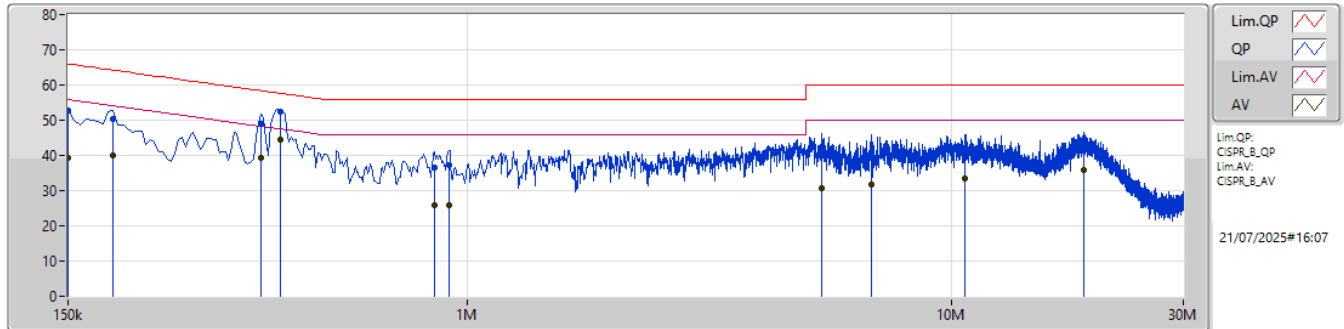

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)					
QP	150k	52.81	66.00	-13.19	10.08	Line	-	42.73	0.06	0.02	0.02	10.02					
AV	150k	39.16	56.00	-16.84	10.08	Line	-	29.08	0.06	0.02	0.02	10.02					
QP	186k	50.47	64.20	-13.73	10.08	Line	-	40.39	0.06	0.02	0.02	10.02					
AV	186k	40.03	54.20	-14.17	10.08	Line	-	29.95	0.06	0.02	0.02	10.02					
QP	375k	48.90	58.39	-9.49	10.10	Line	-	38.80	0.06	0.04	0.03	10.03					
AV	375k	39.43	48.39	-8.96	10.10	Line	-	29.33	0.06	0.04	0.03	10.03					
QP	411k	52.54	57.63	-5.09	10.10	Line	-	42.44	0.06	0.04	0.03	10.03					
AV	411k	44.42	47.63	-3.21	10.10	Line	"Worst"	34.32	0.06	0.04	0.03	10.03					
QP	856.5k	36.52	56.00	-19.48	10.07	Line	-	26.45	0.07	0.02	0.05	10.03					
AV	856.5k	25.74	46.00	-20.26	10.07	Line	-	15.67	0.07	0.02	0.05	10.03					
QP	915k	37.17	56.00	-18.83	10.07	Line	-	27.10	0.07	0.02	0.05	10.03					
AV	915k	25.93	46.00	-20.07	10.07	Line	-	15.86	0.07	0.02	0.05	10.03					
QP	5.388M	41.14	60.00	-18.86	9.80	Line	-	31.34	0.16	0.03	0.43	10.04					
AV	5.388M	30.75	50.00	-19.25	9.80	Line	-	20.95	0.16	0.03	0.43	10.04					
QP	6.806M	40.94	60.00	-19.06	9.65	Line	-	31.29	0.18	0.04	0.60	10.03					
AV	6.806M	31.71	50.00	-18.29	9.65	Line	-	22.06	0.18	0.04	0.60	10.03					
QP	10.622M	41.39	60.00	-18.61	9.30	Line	-	32.09	0.24	0.04	0.99	10.01					
AV	10.622M	33.31	50.00	-16.69	9.30	Line	-	24.01	0.24	0.04	0.99	10.01					
QP	18.749M	42.52	60.00	-17.48	8.25	Line	-	34.27	0.36	0.05	2.17	10.01					
AV	18.749M	35.69	50.00	-14.31	8.25	Line	-	27.44	0.36	0.05	2.17	10.01					

Mode 1

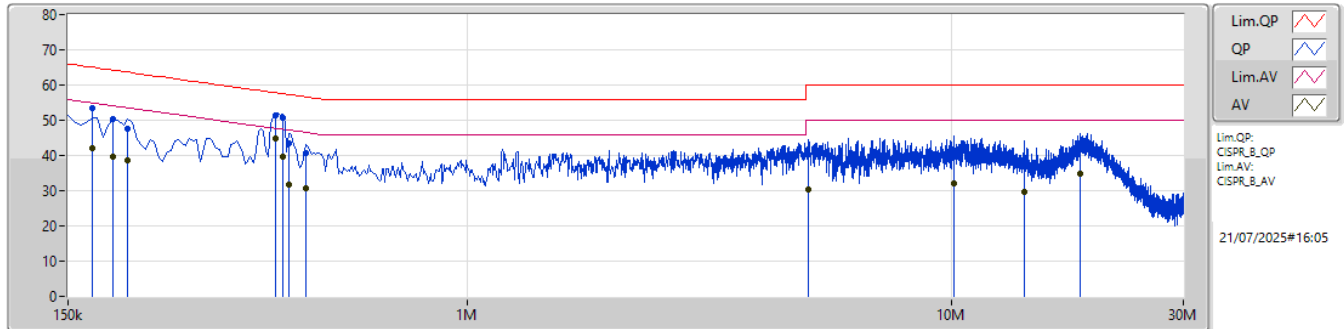

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)					
QP	168k	53.28	65.06	-11.78	10.06	Neutral	-	43.22	0.07	0.02	0.05	10.02					
AV	168k	41.97	55.06	-13.09	10.06	Neutral	-	31.91	0.07	0.02	0.05	10.02					
QP	186k	50.25	64.20	-13.95	10.06	Neutral	-	40.19	0.07	0.02	0.05	10.02					
AV	186k	39.65	54.20	-14.55	10.06	Neutral	-	29.59	0.07	0.02	0.05	10.02					
QP	199.5k	47.74	63.63	-15.89	10.06	Neutral	-	37.68	0.07	0.02	0.05	10.02					
AV	199.5k	38.48	53.63	-15.15	10.06	Neutral	-	28.42	0.07	0.02	0.05	10.02					
QP	402k	51.24	57.82	-6.58	10.08	Neutral	-	41.16	0.07	0.04	0.06	10.03					
AV	402k	44.79	47.82	-3.03	10.08	Neutral	"Worst"	34.71	0.07	0.04	0.06	10.03					
QP	415.5k	50.70	57.53	-6.83	10.08	Neutral	-	40.62	0.07	0.04	0.06	10.03					
AV	415.5k	39.76	47.53	-7.77	10.08	Neutral	-	29.68	0.07	0.04	0.06	10.03					
QP	429k	43.57	57.28	-13.71	10.08	Neutral	-	33.49	0.07	0.04	0.06	10.03					
AV	429k	31.65	47.28	-15.63	10.08	Neutral	-	21.57	0.07	0.04	0.06	10.03					
QP	465k	40.57	56.61	-16.04	10.08	Neutral	-	30.49	0.07	0.04	0.06	10.03					
AV	465k	30.76	46.61	-15.85	10.08	Neutral	-	20.68	0.07	0.04	0.06	10.03					
QP	5.064M	40.39	60.00	-19.61	9.70	Neutral	-	30.69	0.15	0.03	0.53	10.05					
AV	5.064M	30.37	50.00	-19.63	9.70	Neutral	-	20.67	0.15	0.03	0.53	10.05					
QP	10.073M	40.35	60.00	-19.65	9.15	Neutral	-	31.20	0.21	0.04	1.11	10.01					
AV	10.073M	32.01	50.00	-17.99	9.15	Neutral	-	22.86	0.21	0.04	1.11	10.01					
QP	14.078M	37.38	60.00	-22.62	8.38	Neutral	-	29.00	0.23	0.04	1.92	10.03					
AV	14.078M	29.78	50.00	-20.22	8.38	Neutral	-	21.40	0.23	0.04	1.92	10.03					
QP	18.429M	42.02	60.00	-17.98	7.75	Neutral	-	34.27	0.25	0.05	2.57	10.02					
AV	18.429M	34.94	50.00	-15.06	7.75	Neutral	-	27.19	0.25	0.05	2.57	10.02					

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.66M	19.08M	19M1D1D	21.615M	18.984M
802.11be EHT40_Nss2,(MCS0)_2TX	43.89M	38.029M	38M0D1D	41.36M	37.851M
802.11be EHT80_Nss2,(MCS0)_2TX	87.12M	77.722M	77M7D1D	84.7M	77.402M
802.11be EHT160_Nss2,(MCS0)_2TX	174.24M	157.356M	157MD1D	170.72M	156.692M
802.11be EHT320_Nss2,(MCS0)_2TX	346.72M	318.714M	319MD1D	337.92M	316.974M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.33M	19.068M	19M1D1D	21.12M	18.989M
802.11be EHT40_Nss2,(MCS0)_2TX	43.56M	38.041M	38M0D1D	41.91M	37.864M
802.11be EHT80_Nss2,(MCS0)_2TX	88.88M	77.662M	77M7D1D	85.14M	77.529M
802.11be EHT160_Nss2,(MCS0)_2TX	172.92M	157.027M	157MD1D	172.04M	156.868M
802.11be EHT320_Nss2,(MCS0)_2TX	341.44M	316.533M	317MD1D	339.68M	315.838M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	22.88M	19.056M	19M1D1D	21.01M	19.01M
802.11be EHT40_Nss2,(MCS0)_2TX	44.11M	38.079M	38M1D1D	41.58M	37.938M
802.11be EHT80_Nss2,(MCS0)_2TX	87.78M	77.761M	77M8D1D	83.6M	77.502M
802.11be EHT160_Nss2,(MCS0)_2TX	175.12M	157.278M	157MD1D	165M	156.403M
802.11be EHT320_Nss2,(MCS0)_2TX	344.08M	318.018M	318MD1D	341.44M	316.468M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	23.045M	19.067M	19M1D1D	21.89M	19.021M
802.11be EHT40_Nss2,(MCS0)_2TX	44.11M	38.057M	38M1D1D	43.23M	37.985M
802.11be EHT80_Nss2,(MCS0)_2TX	89.32M	77.72M	77M7D1D	86.9M	77.656M
802.11be EHT160_Nss2,(MCS0)_2TX	172.04M	157.051M	157MD1D	170.72M	156.912M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	22.275M	19.068M	22.66M	19.08M
6195MHz	Pass	320M	22.275M	18.984M	21.945M	18.997M
6415MHz	Pass	320M	21.89M	19.011M	21.615M	19.049M
6435MHz	Pass	320M	21.12M	19.023M	22.22M	19.03M
6475MHz	Pass	320M	22.165M	19.068M	22.33M	19.004M
6515MHz	Pass	320M	21.945M	18.989M	21.395M	19.046M
6535MHz	Pass	320M	21.285M	19.049M	22.715M	19.031M
6695MHz	Pass	320M	22.11M	19.019M	22.88M	19.056M
6875MHz	Pass	320M	21.01M	19.027M	21.395M	19.01M
6895MHz	Pass	320M	21.89M	19.067M	22.44M	19.058M
6995MHz	Pass	320M	23.045M	19.035M	22.605M	19.054M
7095MHz	Pass	320M	22.55M	19.058M	22.605M	19.059M
7115MHz	Pass	320M	21.89M	19.021M	22.11M	19.023M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	42.57M	37.851M	42.79M	37.87M
6205MHz	Pass	320M	43.89M	38.029M	43.67M	38.012M
6405MHz	Pass	320M	41.36M	37.942M	42.57M	37.932M
6445MHz	Pass	320M	42.02M	37.864M	41.91M	37.935M
6485MHz	Pass	320M	43.45M	38.041M	43.34M	37.989M
6525MHz	Pass	320M	43.45M	37.992M	43.56M	38.015M
6565MHz	Pass	320M	43.12M	38.079M	44.11M	37.995M
6685MHz	Pass	320M	41.58M	38.029M	42.35M	37.938M
6885MHz	Pass	320M	41.91M	37.963M	42.35M	37.947M
6925MHz	Pass	320M	44.11M	38.029M	43.23M	38.009M
7005MHz	Pass	320M	43.34M	38.037M	43.45M	37.985M
7085MHz	Pass	320M	43.67M	38.057M	43.45M	38.034M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	85.14M	77.52M	86.9M	77.722M
6225MHz	Pass	320M	86.68M	77.482M	84.7M	77.463M
6385MHz	Pass	320M	86.9M	77.606M	87.12M	77.402M
6465MHz	Pass	320M	85.8M	77.629M	88.88M	77.534M
6545MHz	Pass	320M	86.68M	77.662M	85.14M	77.529M
6625MHz	Pass	320M	87.78M	77.761M	87.34M	77.74M
6705MHz	Pass	320M	86.02M	77.623M	85.14M	77.532M
6785MHz	Pass	320M	86.68M	77.636M	84.7M	77.605M
6865MHz	Pass	320M	83.6M	77.502M	86.46M	77.513M
6945MHz	Pass	320M	89.32M	77.707M	86.9M	77.656M
7025MHz	Pass	320M	87.78M	77.72M	87.56M	77.692M
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	173.36M	156.692M	170.72M	156.829M
6185MHz	Pass	320M	174.24M	157.356M	174.24M	157.169M
6345MHz	Pass	320M	170.72M	157.159M	170.72M	156.872M
6505MHz	Pass	320M	172.04M	156.868M	172.92M	157.027M
6665MHz	Pass	320M	165M	156.403M	166.76M	156.942M
6825MHz	Pass	320M	171.16M	157.278M	175.12M	156.942M
6985MHz	Pass	320M	170.72M	156.912M	172.04M	157.051M
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	346.72M	317.821M	342.32M	317.057M
6265MHz	Pass	320M	344.08M	318.101M	337.92M	316.974M
6425MHz	Pass	320M	345.84M	318.399M	344.08M	318.714M
6585MHz	Pass	320M	339.68M	315.838M	341.44M	316.533M
6745MHz	Pass	320M	343.2M	316.638M	341.44M	316.605M
6905MHz	Pass	320M	344.08M	318.018M	344.08M	316.468M





Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
5955MHz

03/07/2025

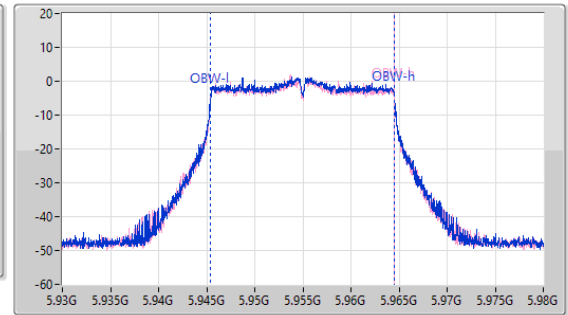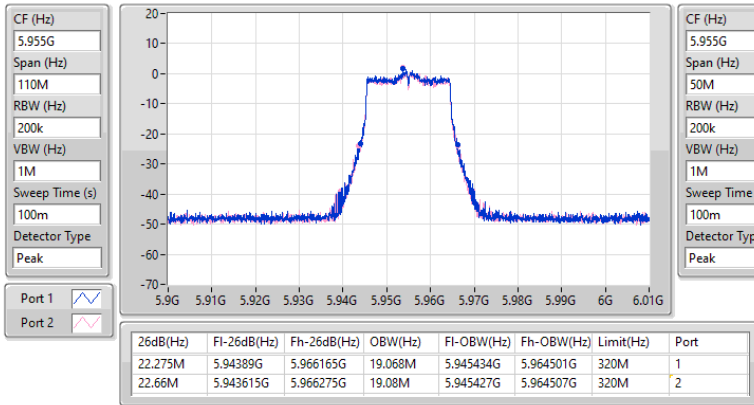

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6195MHz

03/07/2025

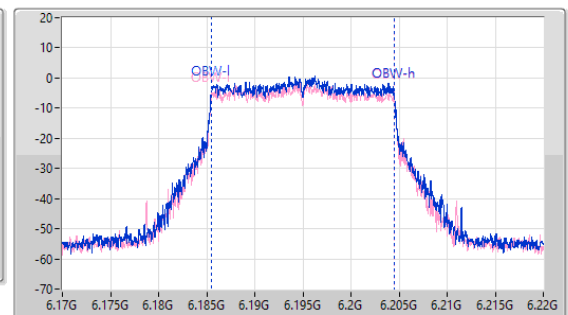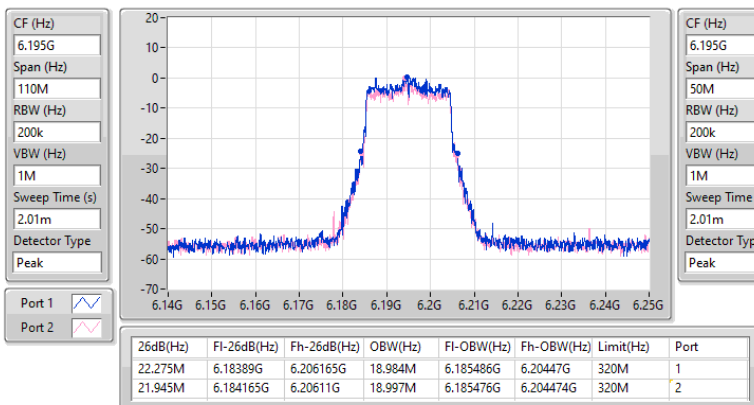


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6415MHz

03/07/2025

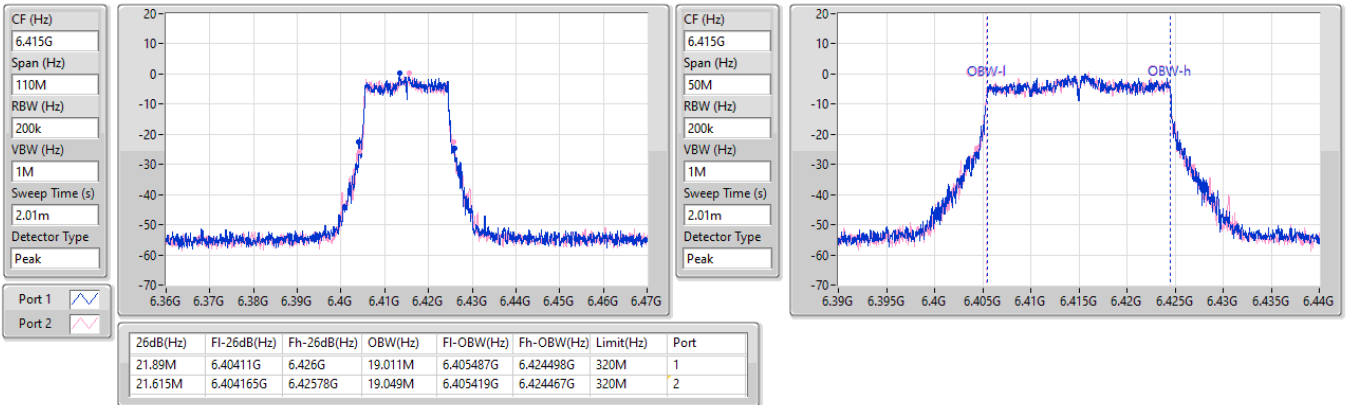
6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6435MHz

03/07/2025

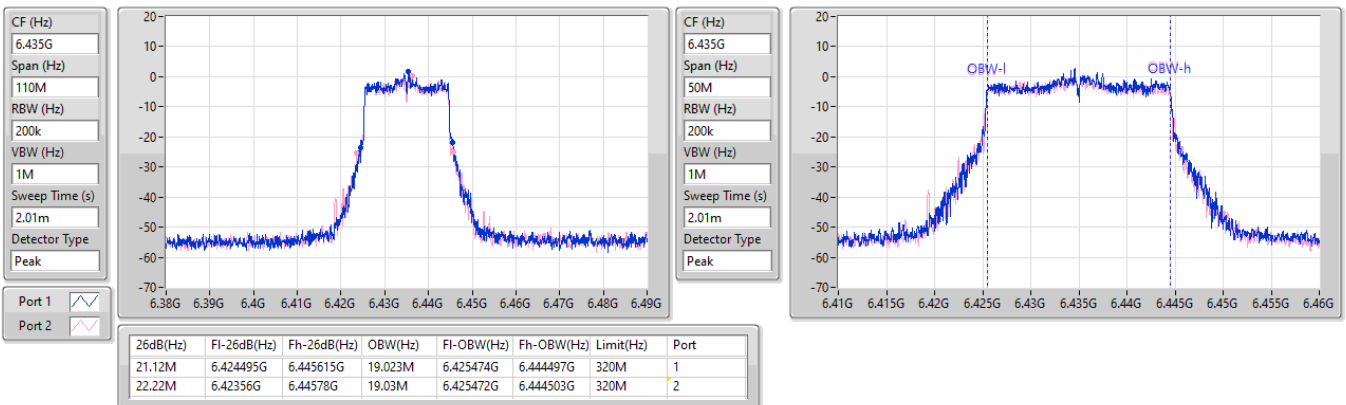


6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6475MHz

03/07/2025

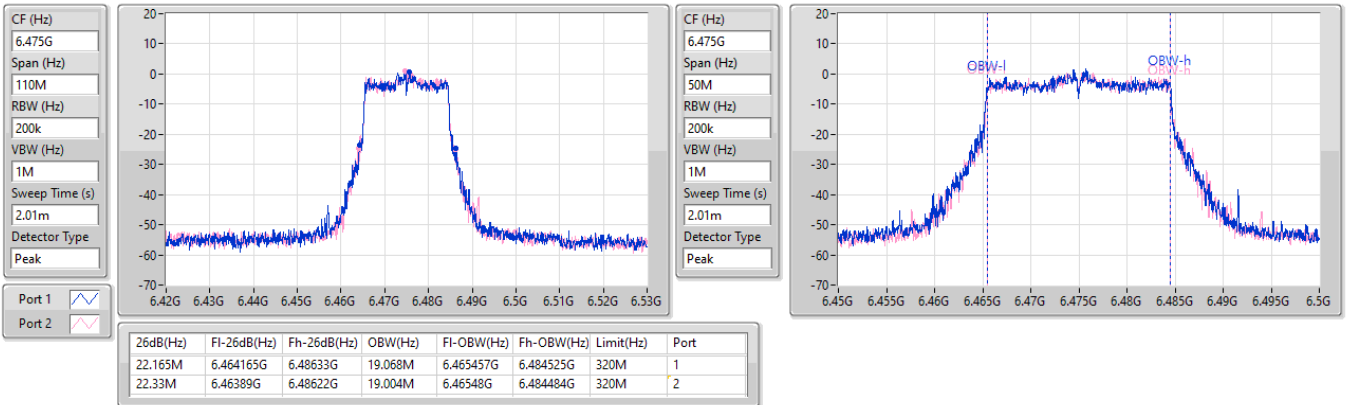


6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6515MHz

03/07/2025

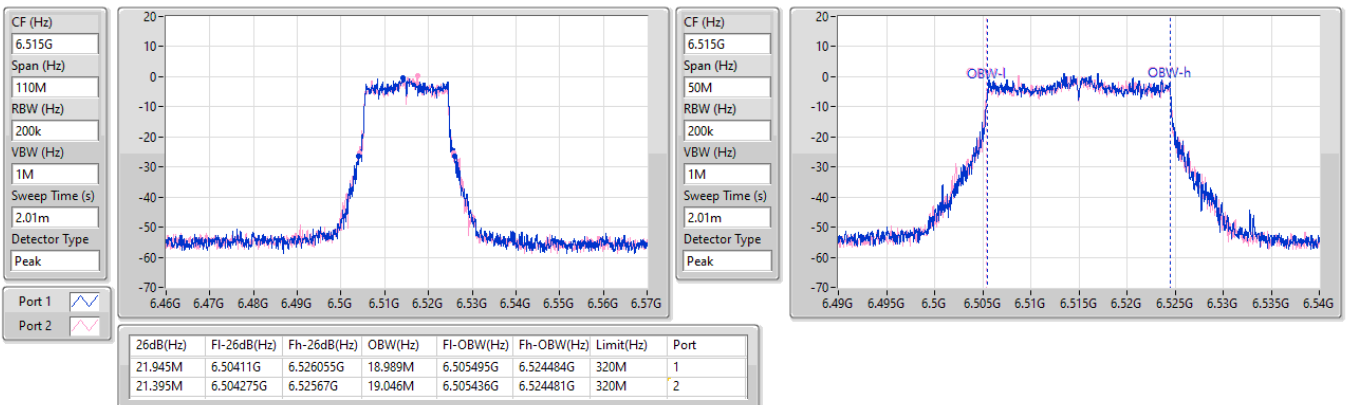


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6535MHz

03/07/2025

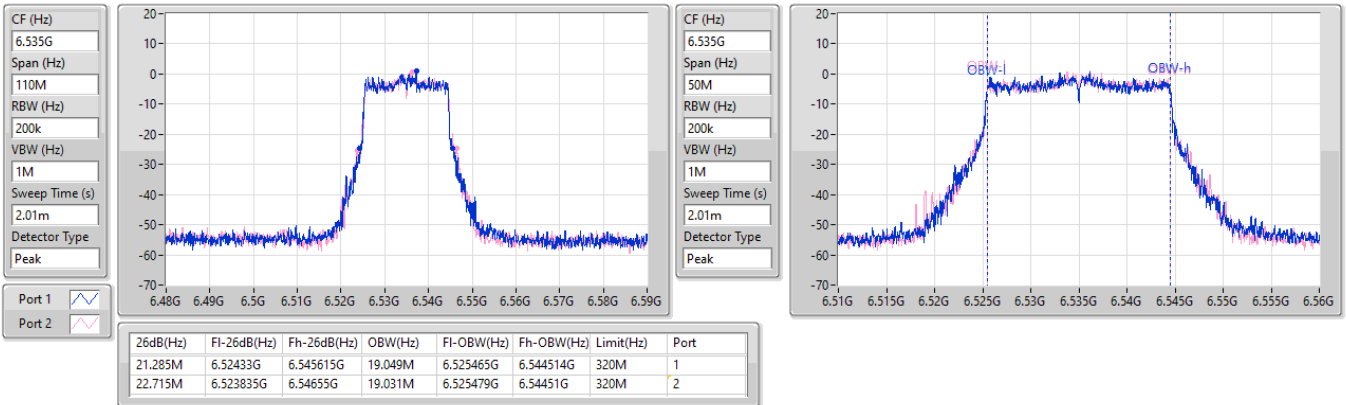


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6695MHz

04/07/2025

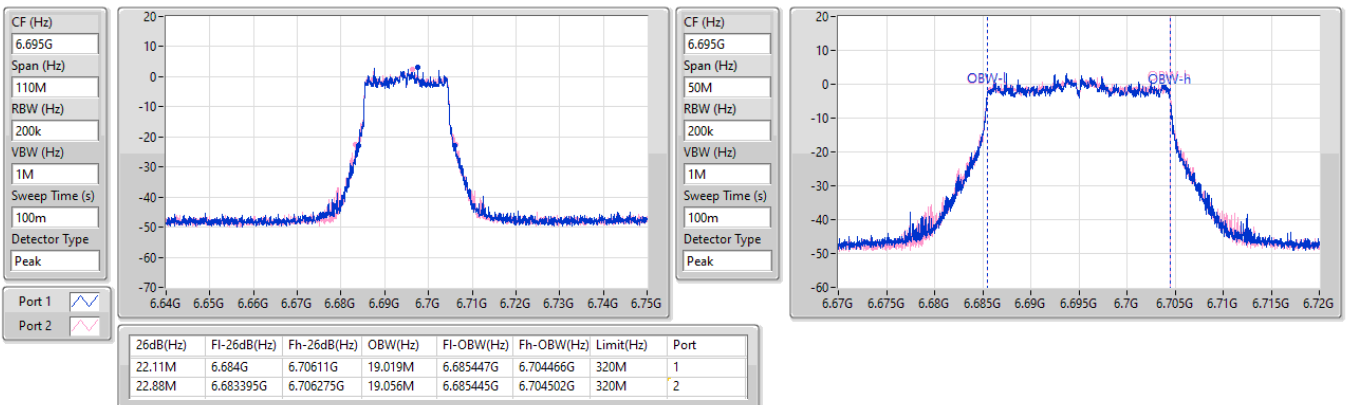


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6875MHz

03/07/2025

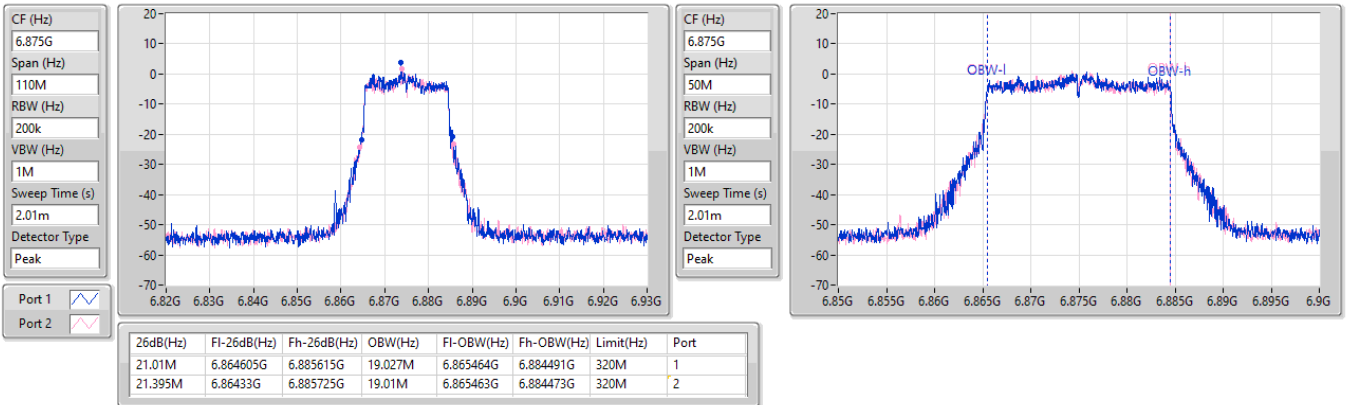


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW


6895MHz

04/07/2025

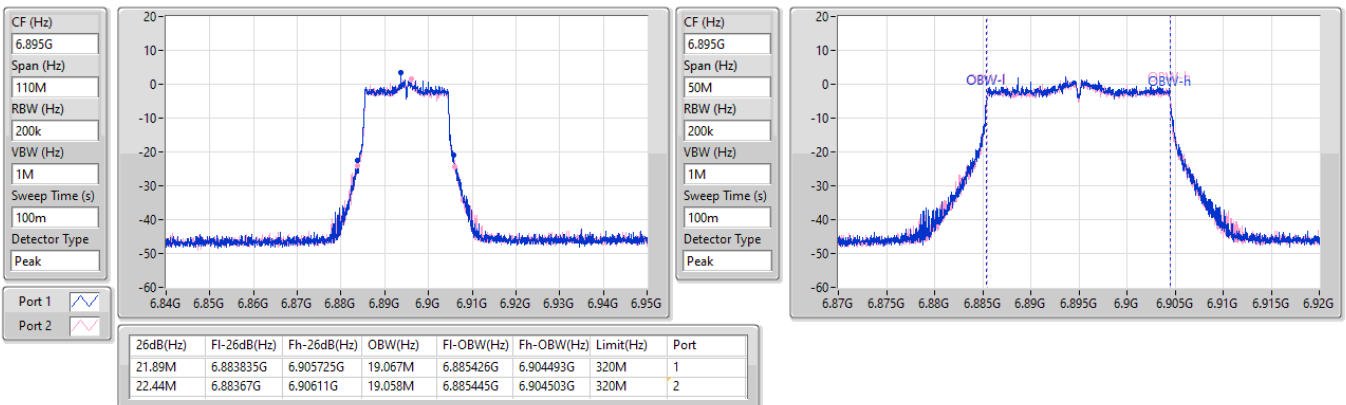


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6995MHz

04/07/2025

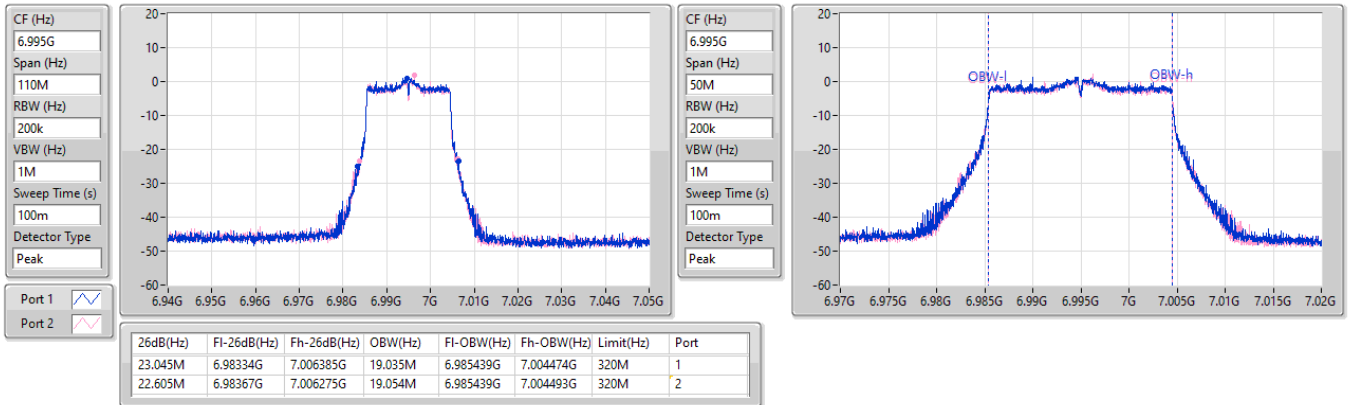

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
7095MHz

04/07/2025

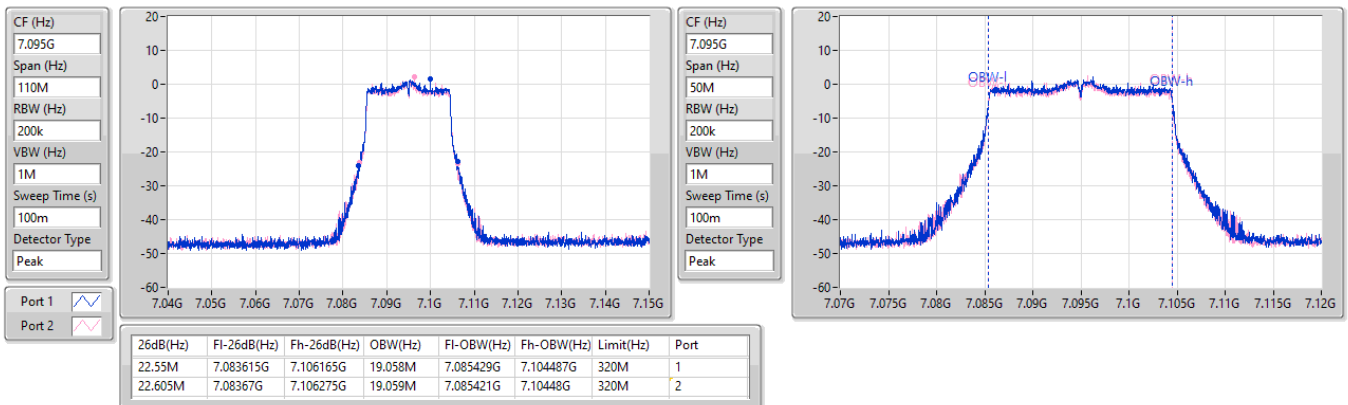


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
7115MHz

03/07/2025

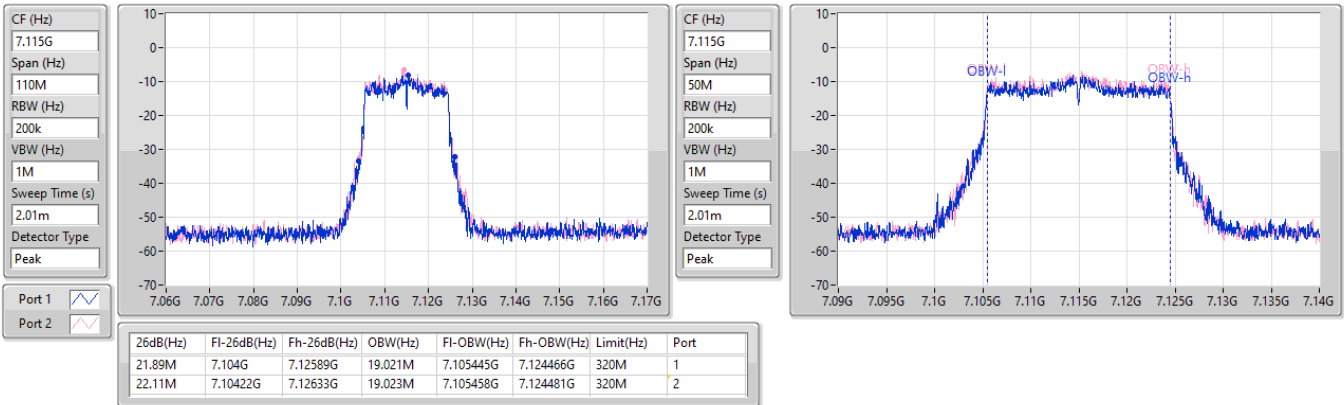
5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
5965MHz

03/07/2025

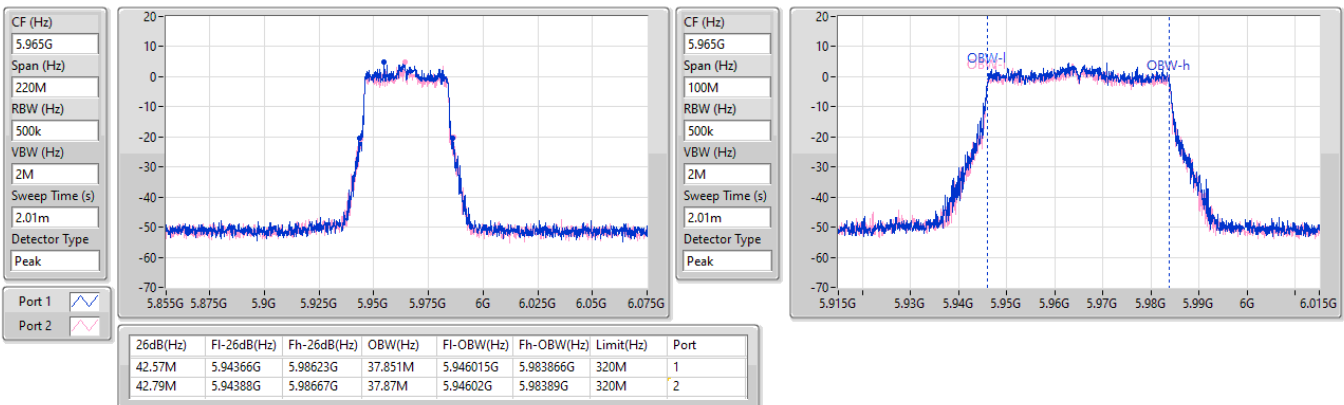


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6205MHz

04/07/2025

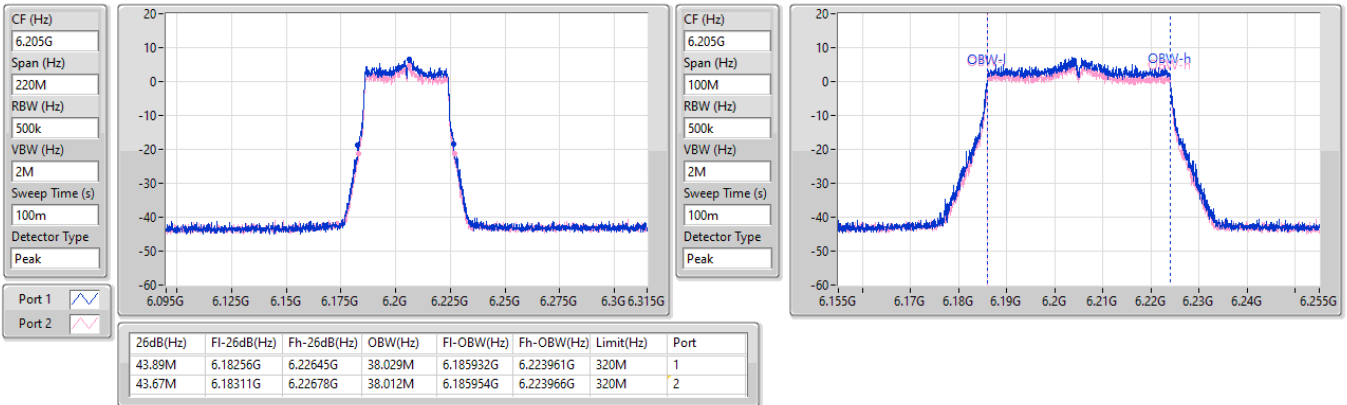


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6405MHz

03/07/2025


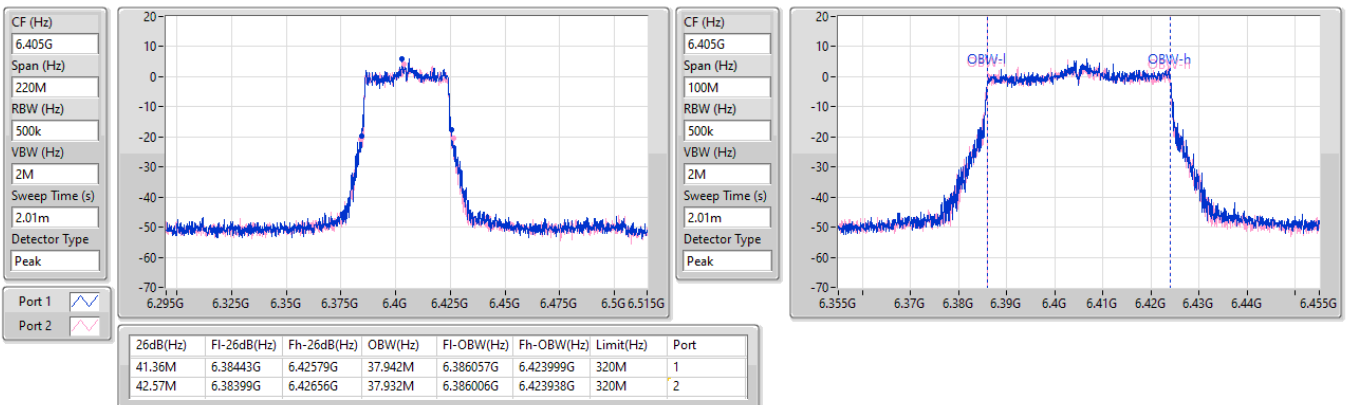


6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6445MHz

03/07/2025

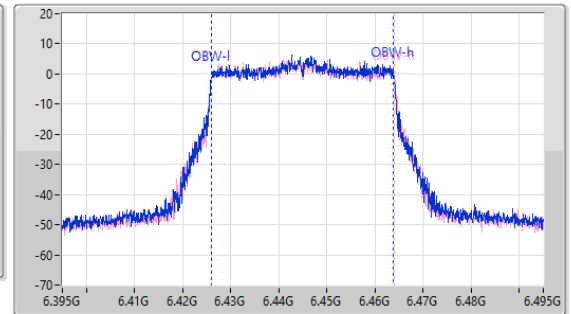
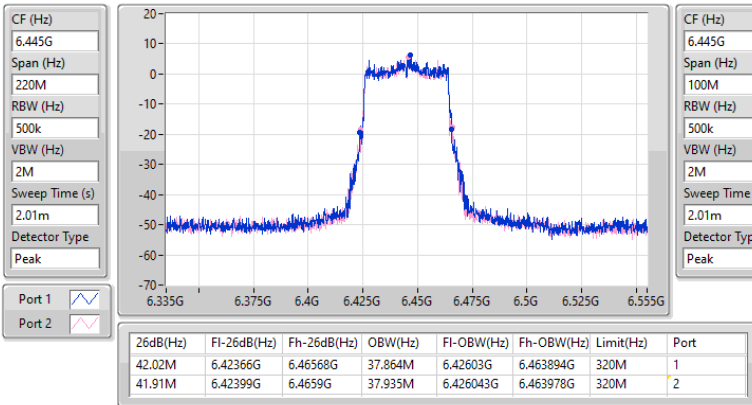


6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6485MHz

04/07/2025

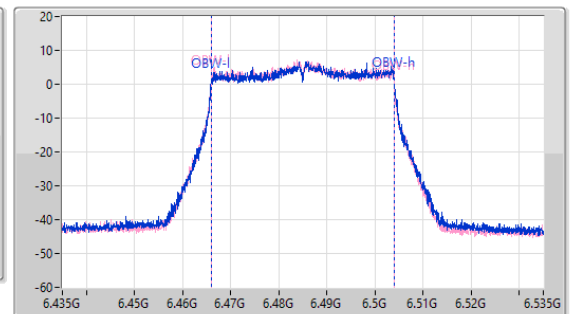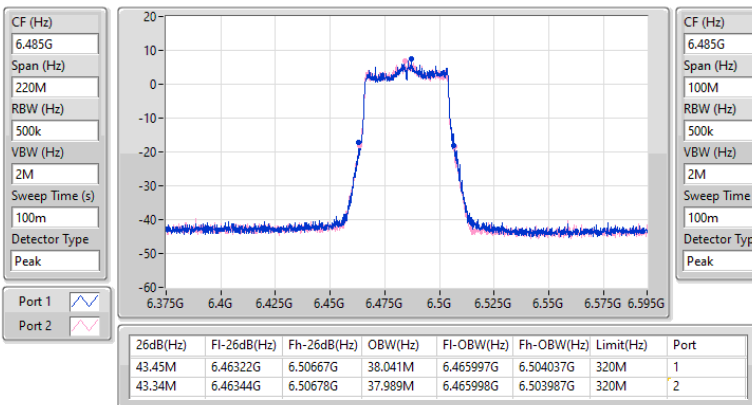


6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6525MHz

04/07/2025

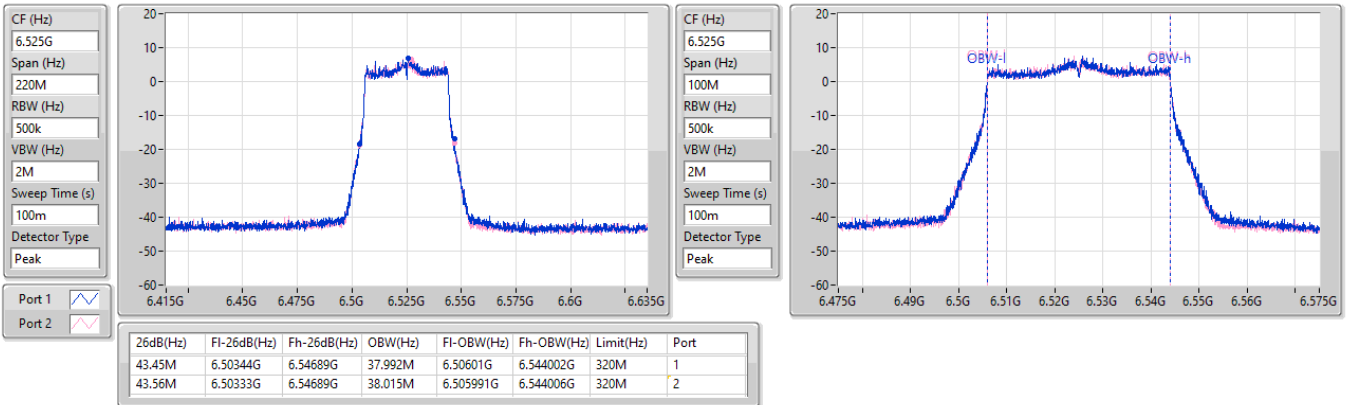


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6565MHz

04/07/2025


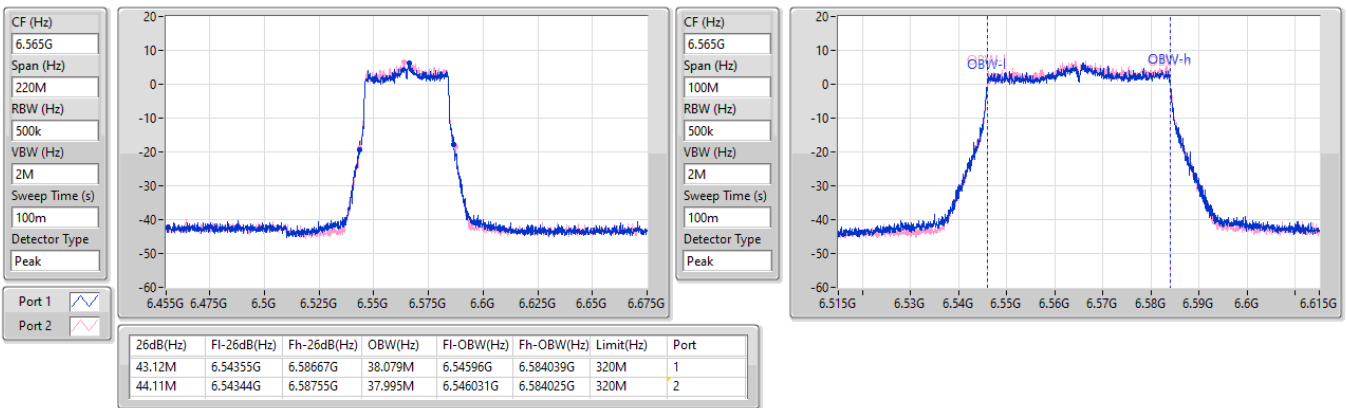


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6685MHz

03/07/2025

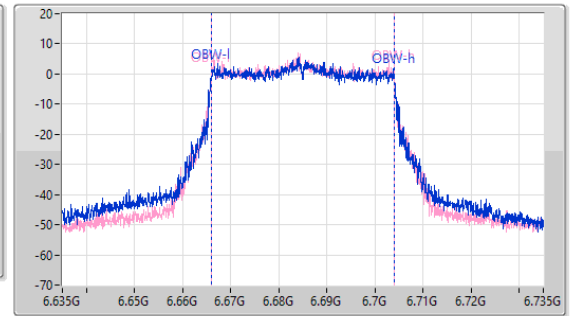
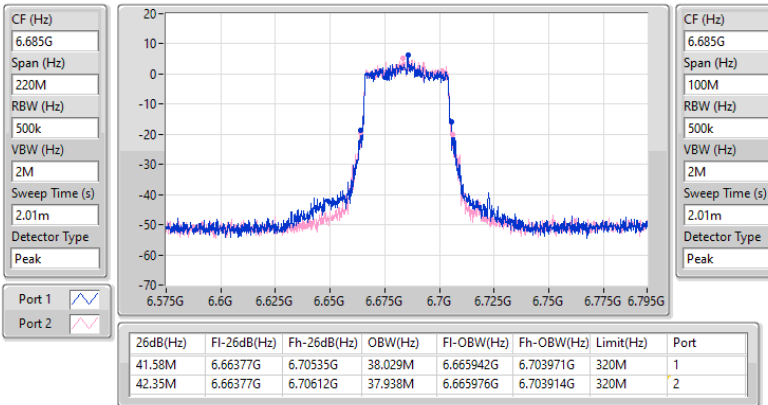


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6885MHz

03/07/2025

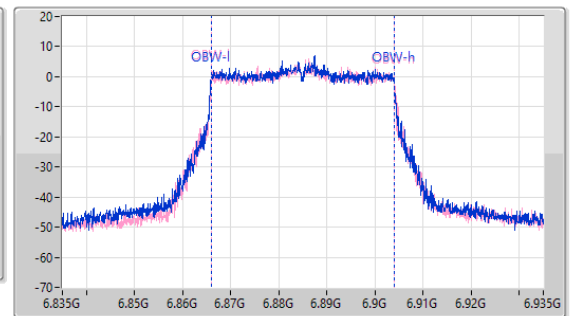
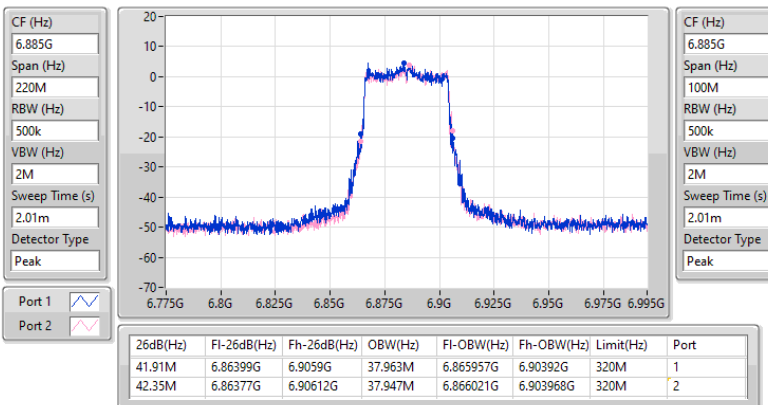


6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
6925MHz

04/07/2025

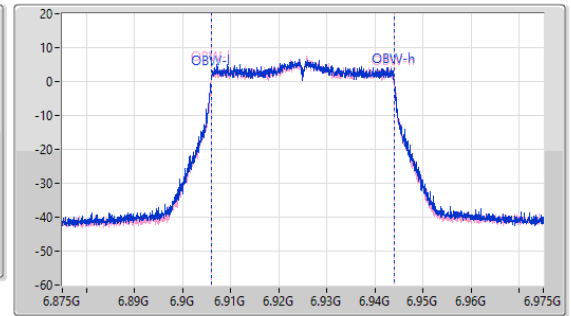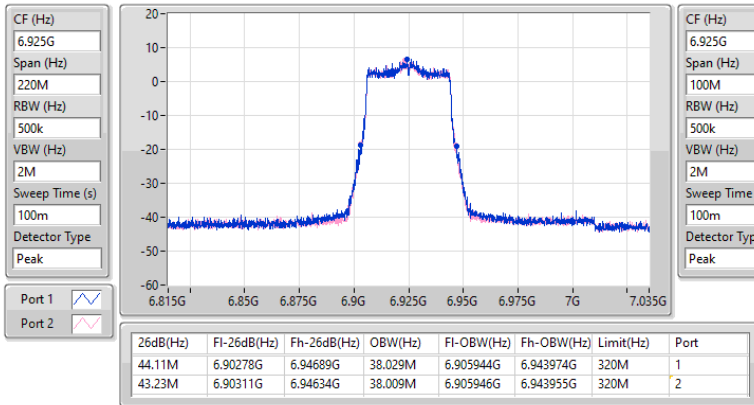
6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
7005MHz

04/07/2025

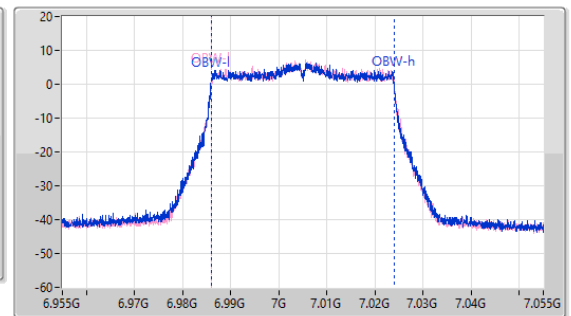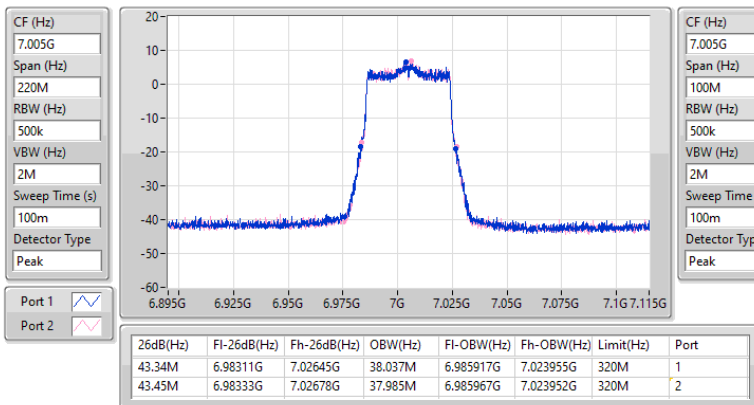


6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

7085MHz

04/07/2025

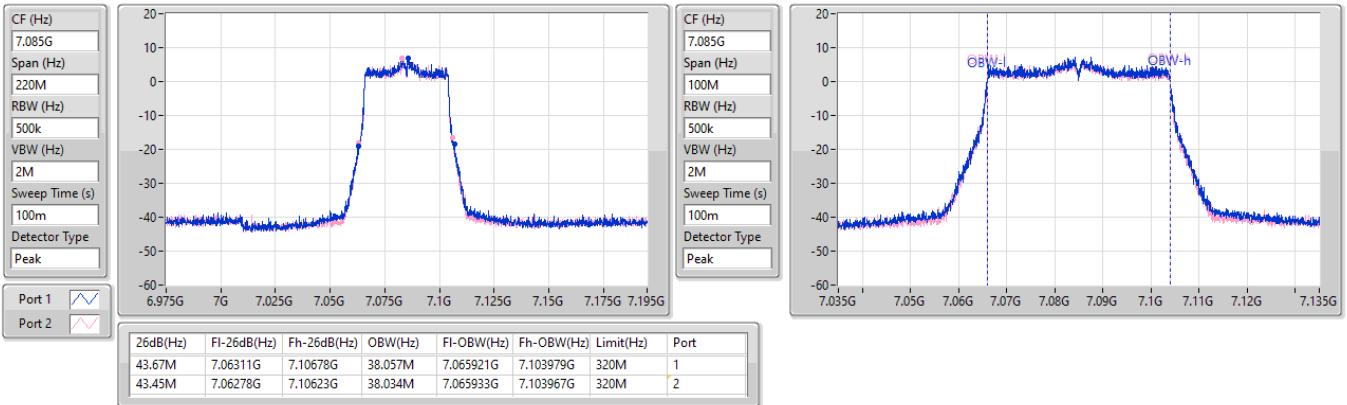


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

5985MHz

03/07/2025

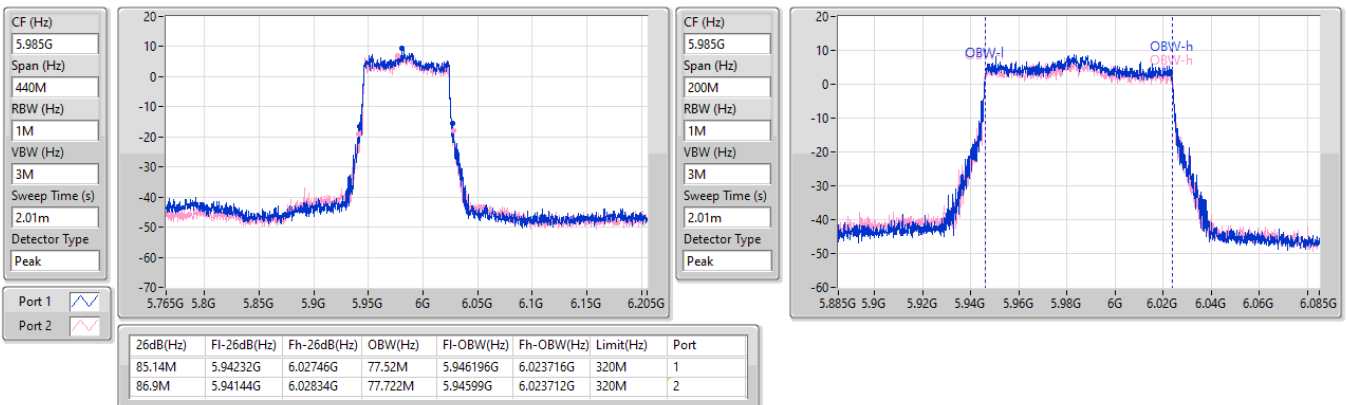


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

6225MHz

03/07/2025

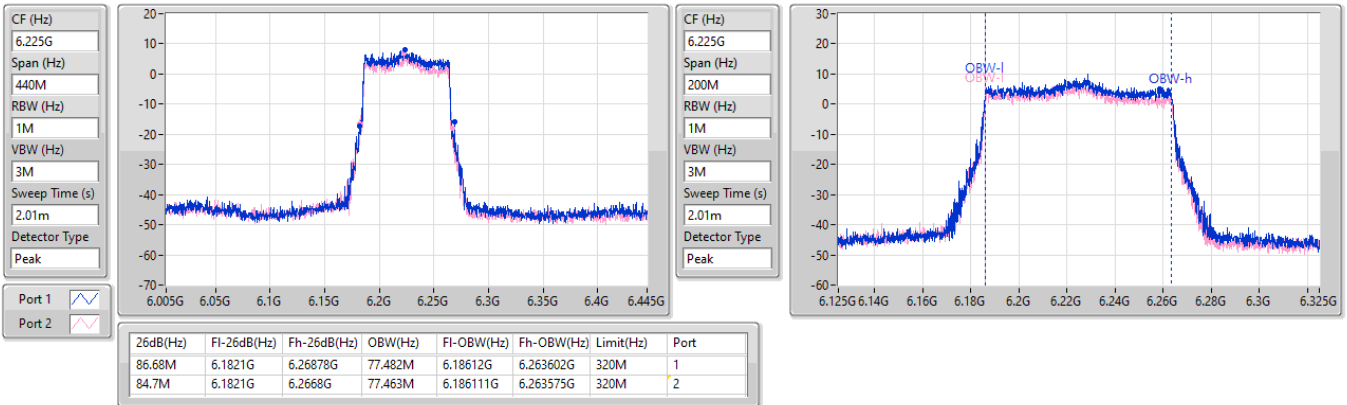


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW


6385MHz

03/07/2025

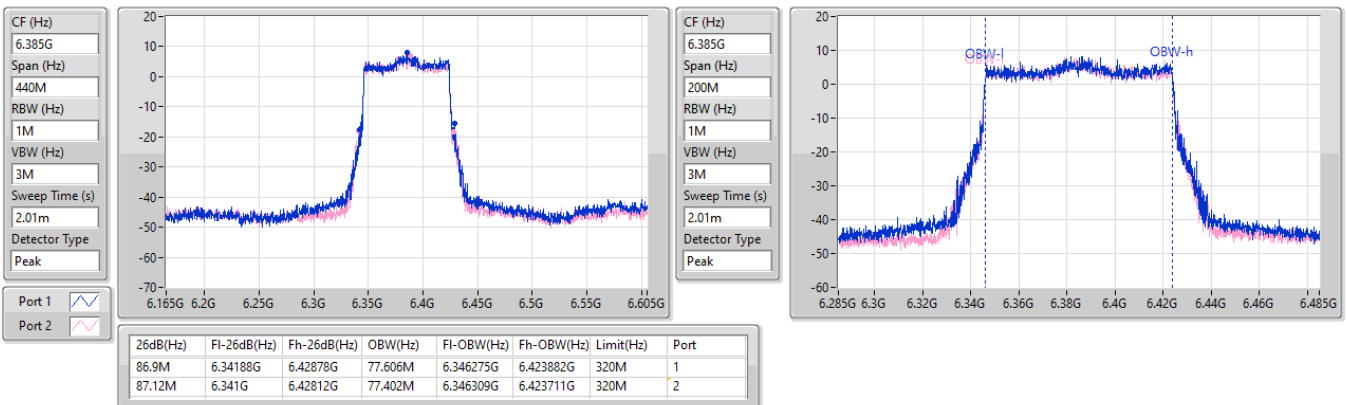


6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6465MHz

03/07/2025

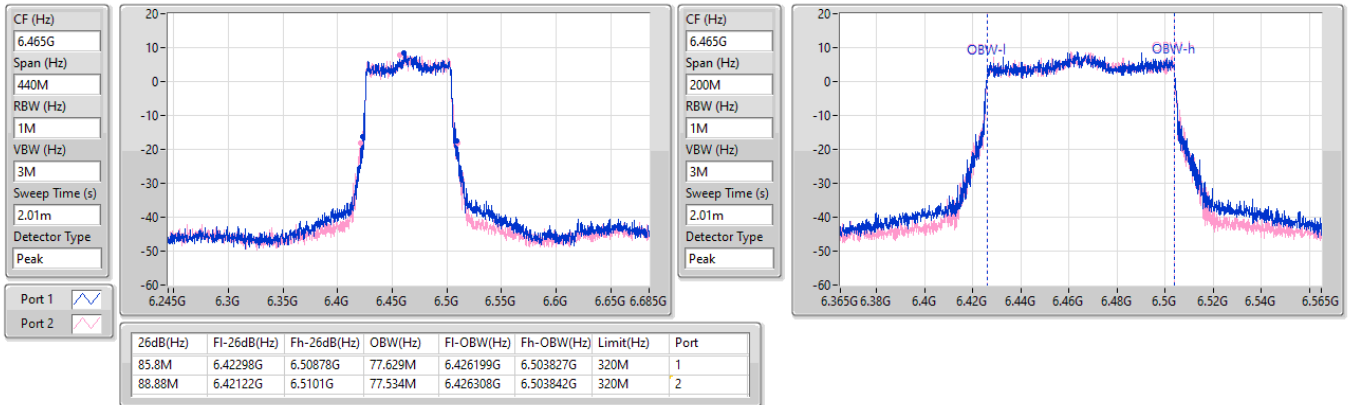
6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6545MHz

03/07/2025


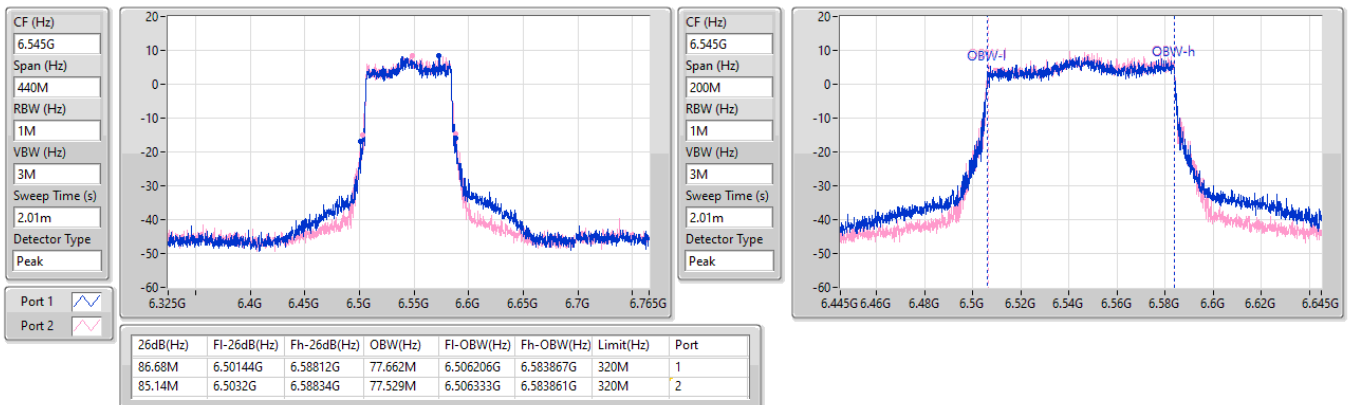


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

6625MHz

04/07/2025

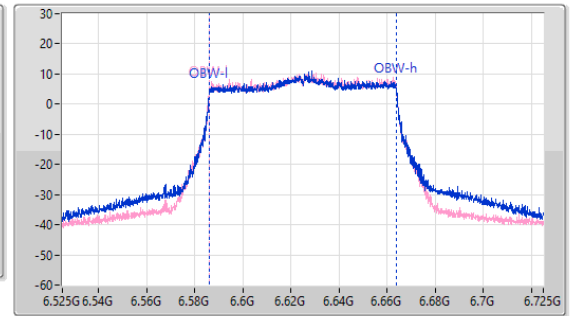
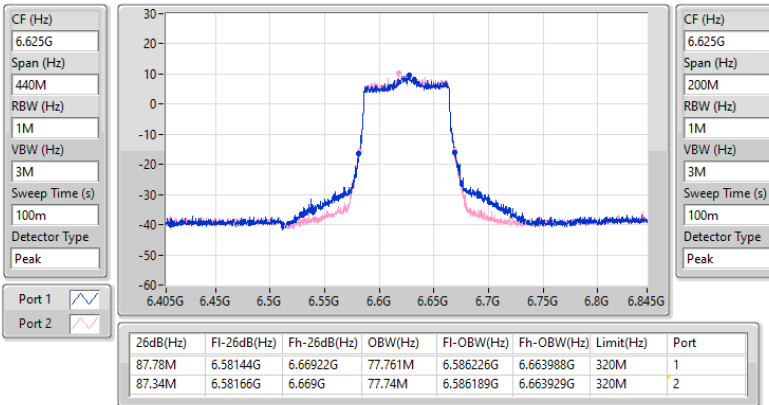


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW


6705MHz

03/07/2025

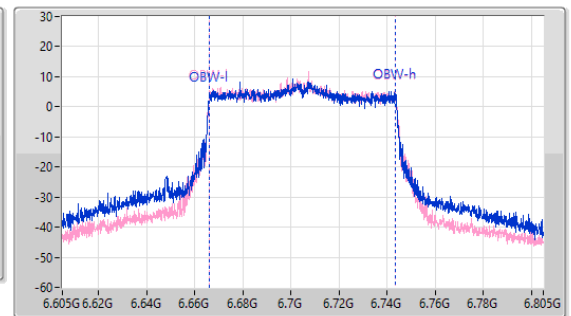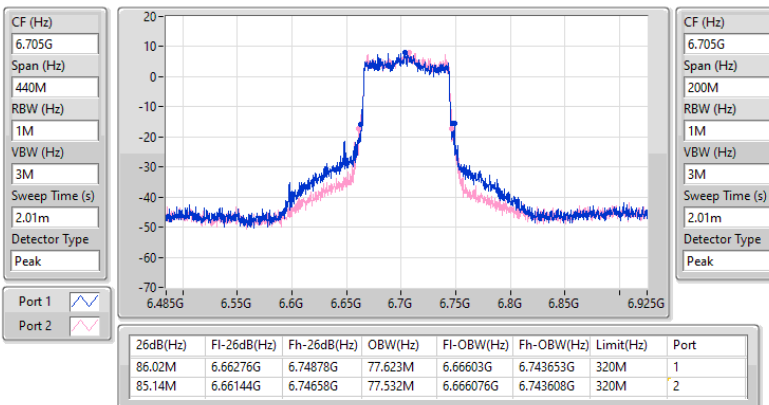


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6785MHz

03/07/2025

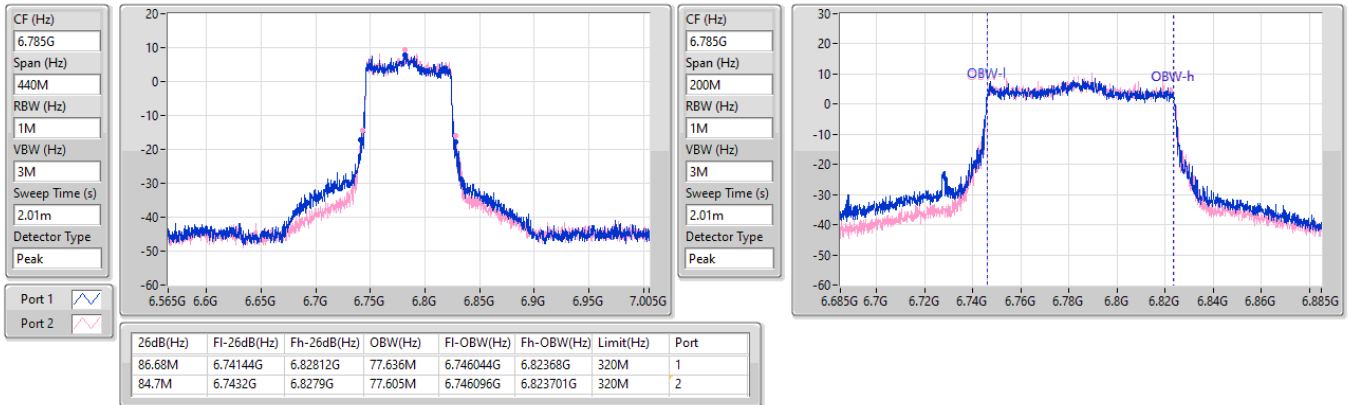
6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6865MHz

03/07/2025


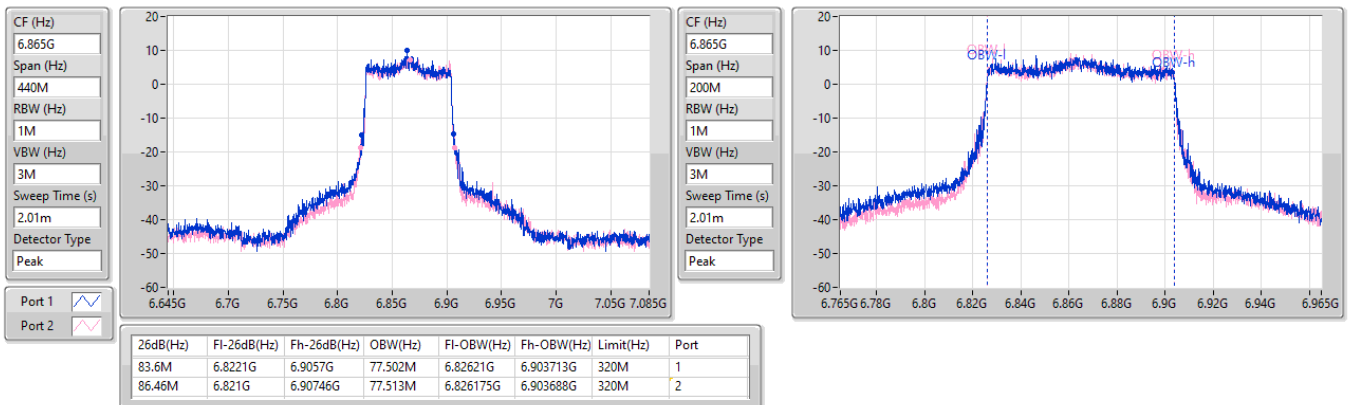


6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

6945MHz

04/07/2025

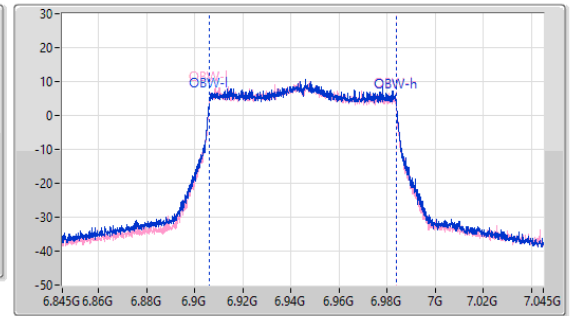
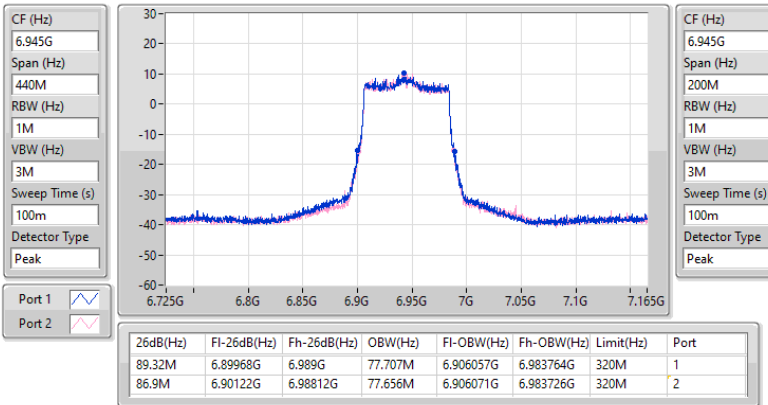


6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

7025MHz

04/07/2025

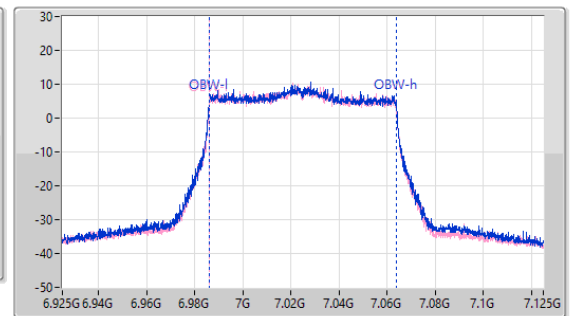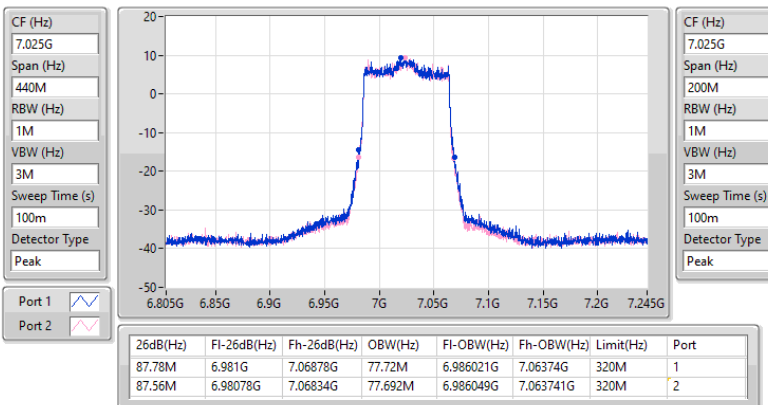


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW

6025MHz

03/07/2025

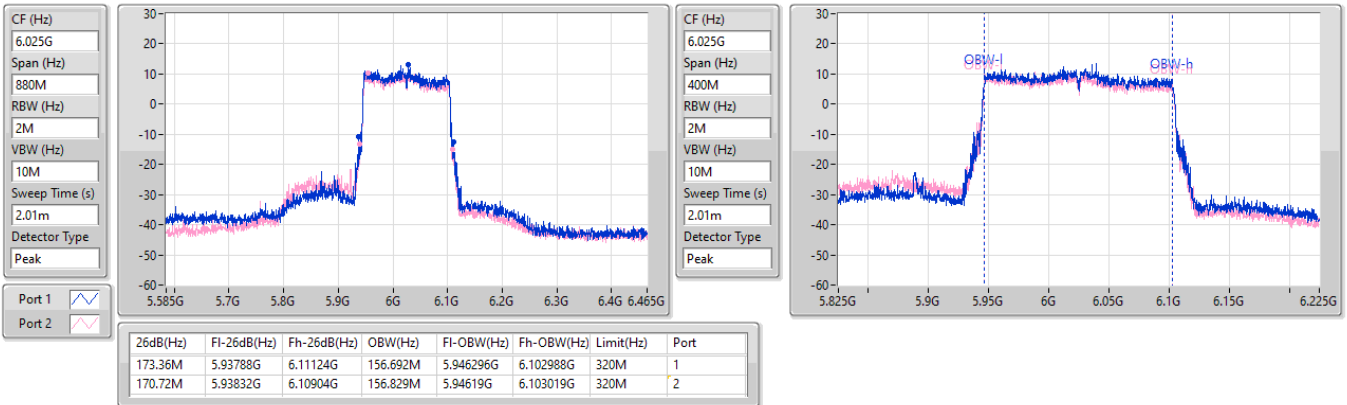


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6185MHz

04/07/2025


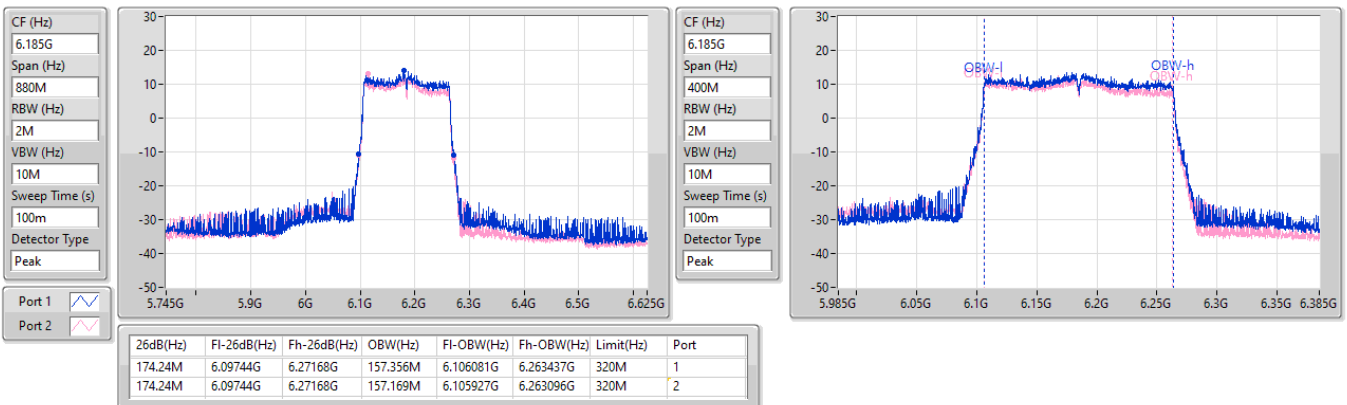


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX
EBW
6345MHz

03/07/2025

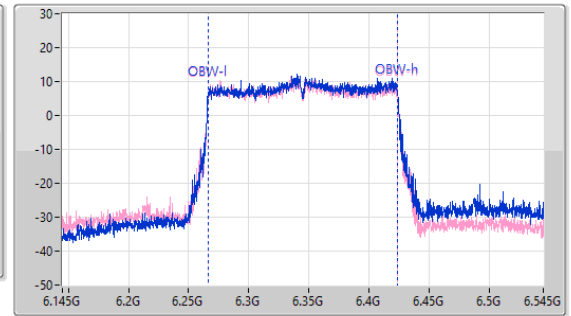
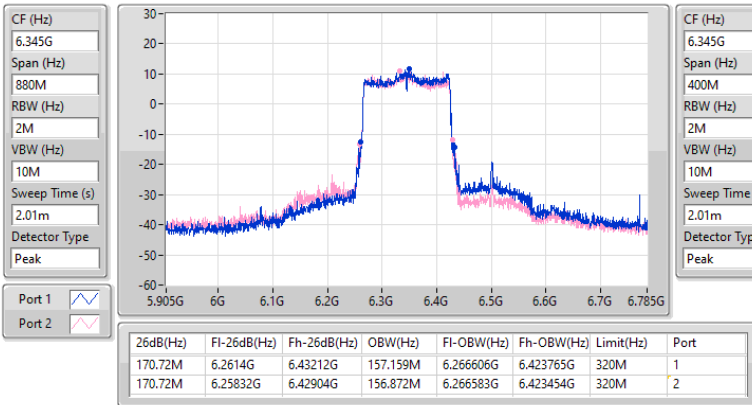

6.425-6.525GHz_802.11be EHT160_Nss2,(MCS0)_2TX
EBW
6505MHz

03/07/2025

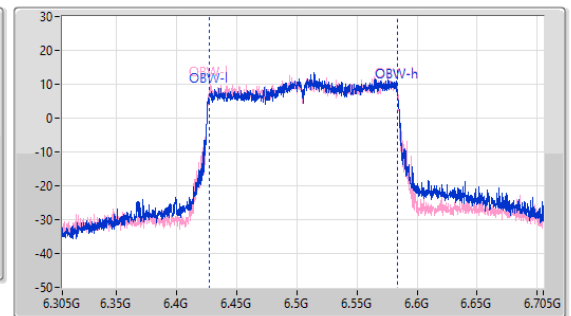
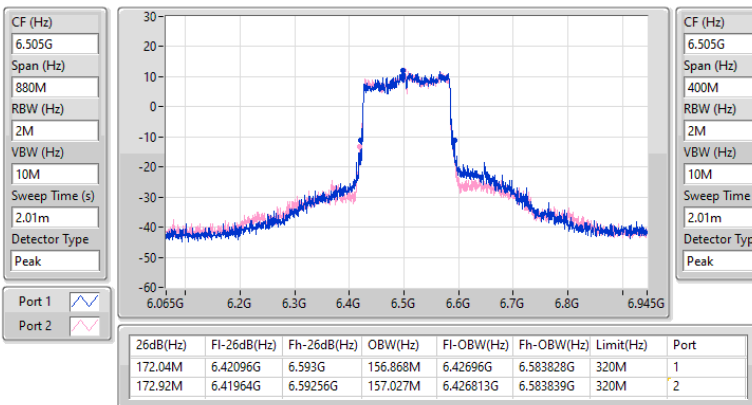


6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX
EBW
6665MHz

03/07/2025

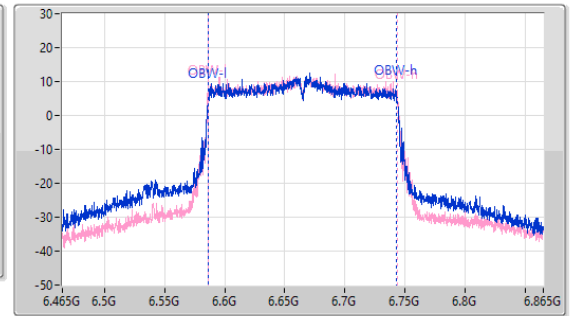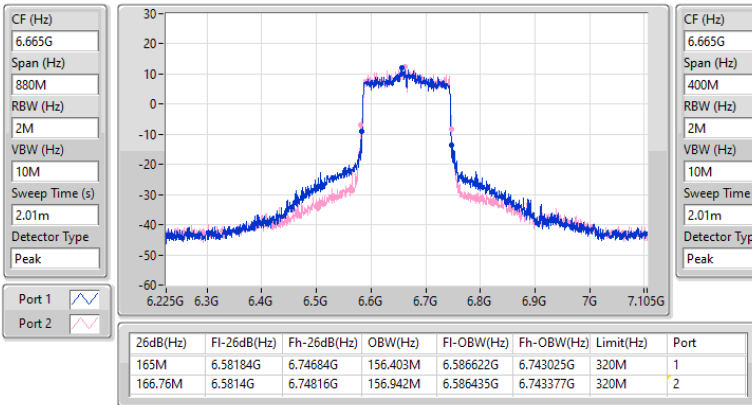
6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX
EBW
6825MHz

03/07/2025

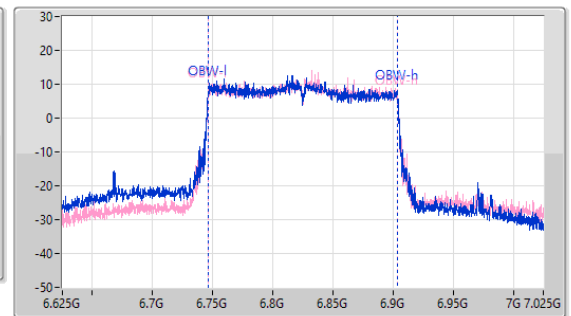
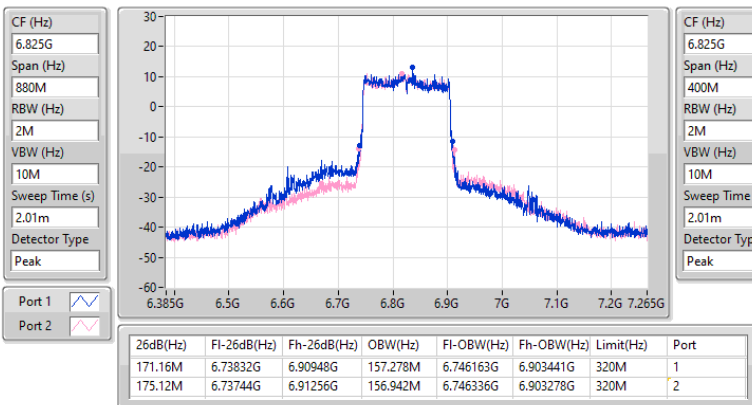


6.875-7.125GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW

6985MHz

03/07/2025

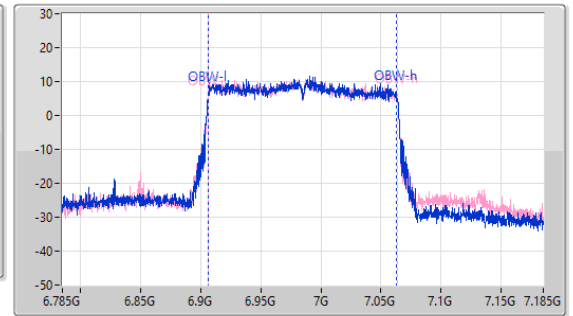
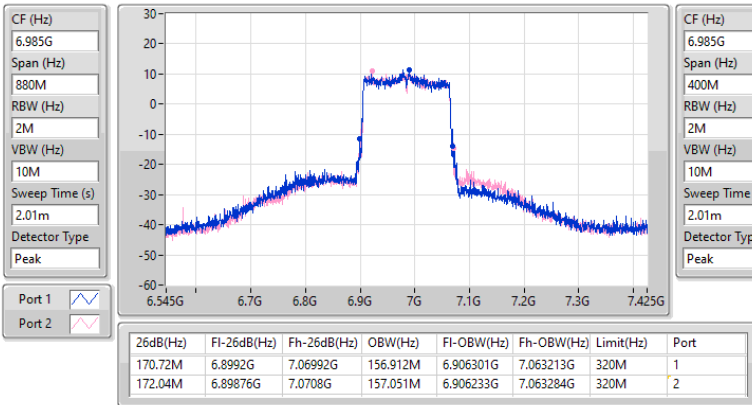


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW


6105MHz

03/07/2025

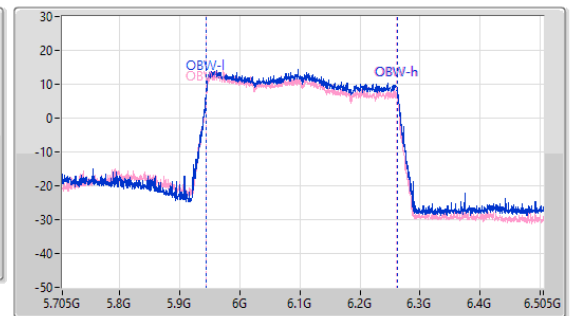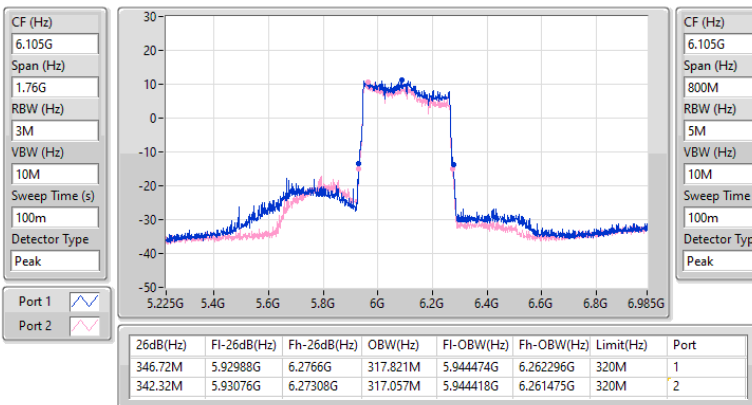


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX
EBW
6265MHz

03/07/2025


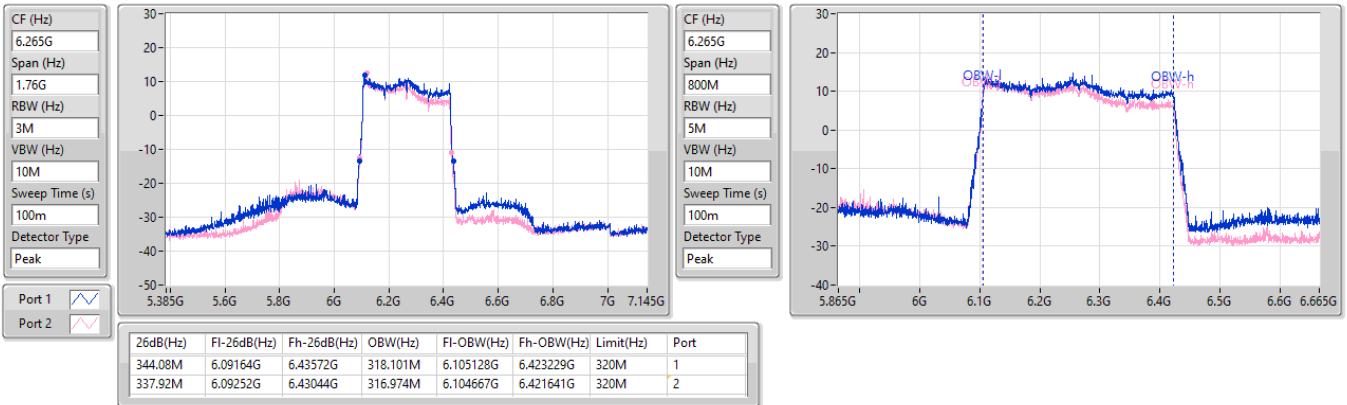

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX
EBW
6425MHz

03/07/2025


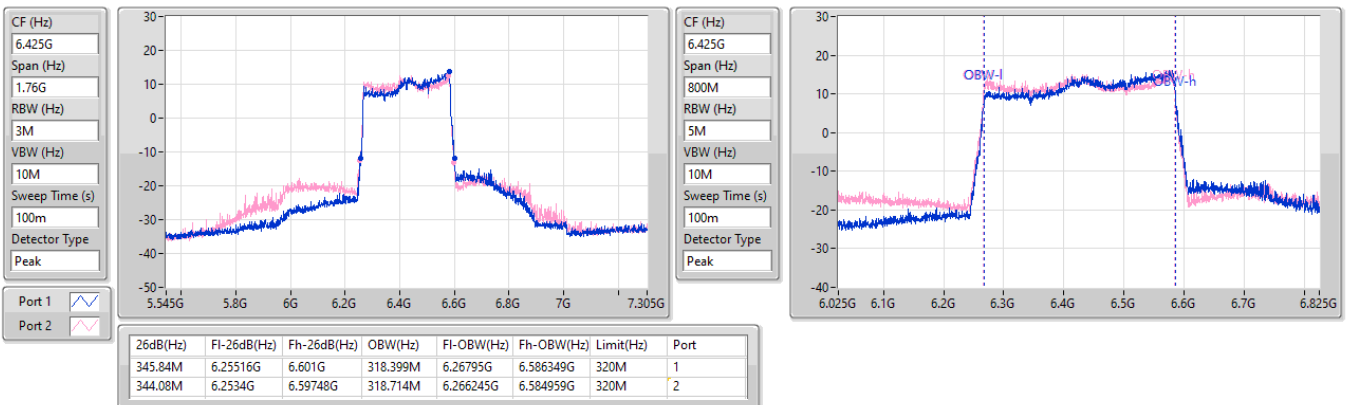


6.425-6.525GHz_802.11be EHT320_Nss2,(MCS0)_2TX
EBW
6585MHz

03/07/2025

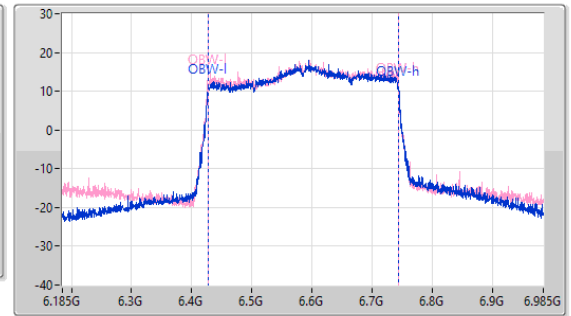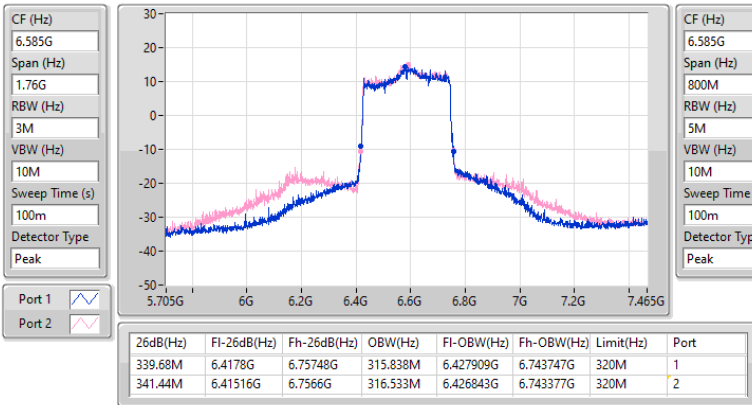
6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX
EBW
6745MHz

03/07/2025

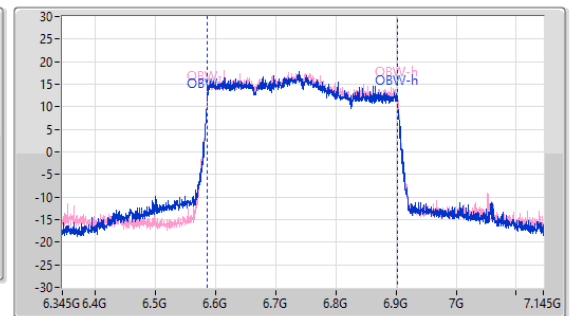
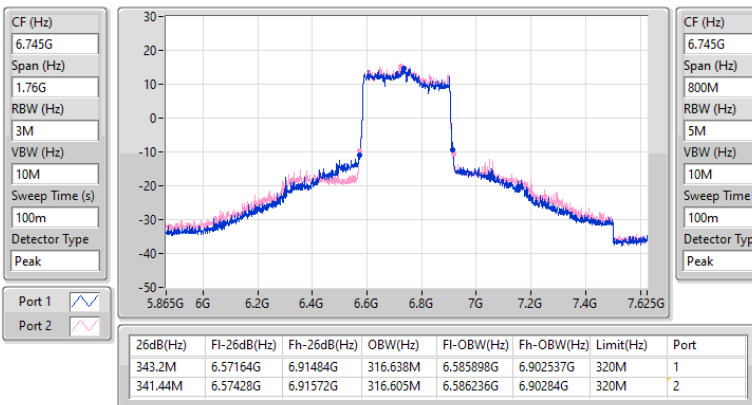


6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW

6905MHz

03/07/2025

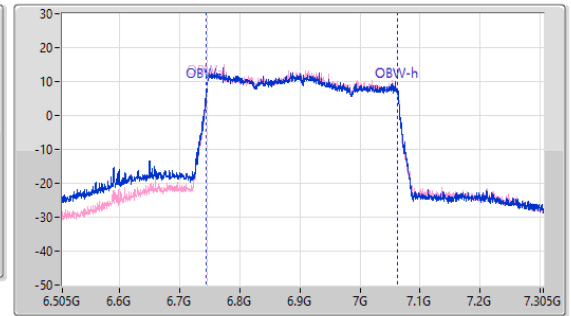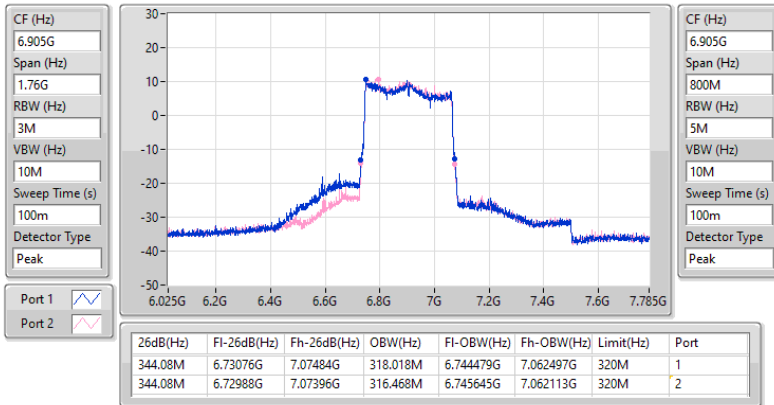

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	13.61	0.02296	17.75	0.05957
802.11be EHT20-BF_Nss2,(MCS0)_2TX	10.60	0.01148	14.74	0.02979
802.11be EHT40_Nss2,(MCS0)_2TX	16.11	0.04083	20.25	0.10593
802.11be EHT40-BF_Nss2,(MCS0)_2TX	13.10	0.02042	17.24	0.05297
802.11be EHT80_Nss2,(MCS0)_2TX	19.43	0.08770	23.57	0.22751
802.11be EHT80-BF_Nss2,(MCS0)_2TX	16.42	0.04385	20.56	0.11376
802.11be EHT160_Nss2,(MCS0)_2TX	21.74	0.14928	25.88	0.38726
802.11be EHT160-BF_Nss2,(MCS0)_2TX	18.73	0.07464	22.87	0.19364
802.11be EHT320_Nss2,(MCS0)_2TX	22.75	0.18836	26.89	0.48865
802.11be EHT320-BF_Nss2,(MCS0)_2TX	19.74	0.09419	23.88	0.24434
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	13.71	0.02350	17.26	0.05321
802.11be EHT20-BF_Nss2,(MCS0)_2TX	10.70	0.01175	14.25	0.02661
802.11be EHT40_Nss2,(MCS0)_2TX	16.31	0.04276	19.86	0.09683
802.11be EHT40-BF_Nss2,(MCS0)_2TX	13.30	0.02138	16.85	0.04842
802.11be EHT80_Nss2,(MCS0)_2TX	19.59	0.09099	23.14	0.20606
802.11be EHT80-BF_Nss2,(MCS0)_2TX	16.58	0.04550	20.13	0.10304
802.11be EHT160_Nss2,(MCS0)_2TX	22.20	0.16596	25.75	0.37584
802.11be EHT160-BF_Nss2,(MCS0)_2TX	19.19	0.08299	22.74	0.18793
802.11be EHT320_Nss2,(MCS0)_2TX	24.34	0.27164	27.89	0.61518
802.11be EHT320-BF_Nss2,(MCS0)_2TX	21.33	0.13583	24.88	0.30761
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	13.82	0.02410	17.61	0.05768
802.11be EHT20-BF_Nss2,(MCS0)_2TX	10.81	0.01205	14.60	0.02884
802.11be EHT40_Nss2,(MCS0)_2TX	16.43	0.04395	20.22	0.10520
802.11be EHT40-BF_Nss2,(MCS0)_2TX	13.42	0.02198	17.21	0.05260
802.11be EHT80_Nss2,(MCS0)_2TX	19.13	0.08185	22.92	0.19588
802.11be EHT80-BF_Nss2,(MCS0)_2TX	16.12	0.04093	19.91	0.09795
802.11be EHT160_Nss2,(MCS0)_2TX	22.52	0.17865	26.31	0.42756
802.11be EHT160-BF_Nss2,(MCS0)_2TX	19.51	0.08933	23.30	0.21380
802.11be EHT320_Nss2,(MCS0)_2TX	24.94	0.31189	28.73	0.74645
802.11be EHT320-BF_Nss2,(MCS0)_2TX	21.93	0.15596	25.72	0.37325
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	13.89	0.02449	17.73	0.05929
802.11be EHT20-BF_Nss2,(MCS0)_2TX	10.88	0.01225	14.72	0.02965
802.11be EHT40_Nss2,(MCS0)_2TX	16.41	0.04375	20.25	0.10593
802.11be EHT40-BF_Nss2,(MCS0)_2TX	13.40	0.02188	17.24	0.05297
802.11be EHT80_Nss2,(MCS0)_2TX	18.82	0.07621	22.66	0.18450
802.11be EHT80-BF_Nss2,(MCS0)_2TX	15.81	0.03811	19.65	0.09226
802.11be EHT160_Nss2,(MCS0)_2TX	22.19	0.16558	26.03	0.40087
802.11be EHT160-BF_Nss2,(MCS0)_2TX	19.18	0.08279	23.02	0.20045

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.135780	10.41	9.73	13.09	17.23	30.00
6195MHz	Pass	4.135780	11.06	10.09	13.61	17.75	30.00
6415MHz	Pass	4.135780	10.21	10.04	13.14	17.28	30.00
6435MHz	Pass	3.552170	10.62	10.57	13.61	17.16	30.00
6475MHz	Pass	3.552170	10.43	10.95	13.71	17.26	30.00
6515MHz	Pass	3.552170	10.6	10.57	13.60	17.15	30.00
6535MHz	Pass	3.785300	10.22	10.66	13.46	17.25	30.00
6695MHz	Pass	3.785300	10.42	11.16	13.82	17.61	30.00
6875MHz	Pass	3.785300	10.45	10.43	13.45	17.24	30.00
6895MHz	Pass	3.841770	10.57	10.3	13.45	17.29	30.00
6995MHz	Pass	3.841770	10.72	10.39	13.57	17.41	30.00
7095MHz	Pass	3.841770	11.17	10.57	13.89	17.73	30.00
7115MHz	Pass	3.841770	2.48	3.36	5.95	9.79	30.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.135780	13.24	12.95	16.11	20.25	30.00
6205MHz	Pass	4.135780	13.52	12.55	16.07	20.21	30.00
6405MHz	Pass	4.135780	13.01	12.78	15.91	20.05	30.00
6445MHz	Pass	3.552170	12.78	12.75	15.78	19.33	30.00
6485MHz	Pass	3.552170	13.23	13.37	16.31	19.86	30.00
6525MHz	Pass	3.552170	13.04	13.27	16.17	19.72	30.00
6565MHz	Pass	3.785300	12.64	13.28	15.98	19.77	30.00
6685MHz	Pass	3.785300	12.12	13.02	15.60	19.39	30.00
6885MHz	Pass	3.785300	13.53	13.31	16.43	20.22	30.00
6925MHz	Pass	3.841770	13.51	13.19	16.36	20.20	30.00
7005MHz	Pass	3.841770	13.44	13.36	16.41	20.25	30.00
7085MHz	Pass	3.841770	13.52	13.23	16.39	20.23	30.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.135780	15.61	14.91	18.28	22.42	30.00
6225MHz	Pass	4.135780	16.82	15.97	19.43	23.57	30.00
6385MHz	Pass	4.135780	16.14	15.83	19.00	23.14	30.00
6465MHz	Pass	3.552170	16.57	16.58	19.59	23.14	30.00
6545MHz	Pass	3.552170	15.65	16.5	19.11	22.66	30.00
6625MHz	Pass	3.785300	15.9	16.33	19.13	22.92	30.00
6705MHz	Pass	3.785300	15.1	16.03	18.60	22.39	30.00
6785MHz	Pass	3.785300	15.43	16.15	18.82	22.61	30.00
6865MHz	Pass	3.785300	15.87	15.89	18.89	22.68	30.00
6945MHz	Pass	3.841770	15.98	15.63	18.82	22.66	30.00
7025MHz	Pass	3.841770	15.96	15.64	18.81	22.65	30.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.135780	19.05	18.13	21.62	25.76	30.00
6185MHz	Pass	4.135780	19.18	18.23	21.74	25.88	30.00
6345MHz	Pass	4.135780	18.74	18.61	21.69	25.83	30.00
6505MHz	Pass	3.552170	19.03	19.34	22.20	25.75	30.00
6665MHz	Pass	3.785300	18.31	18.93	21.64	25.43	30.00
6825MHz	Pass	3.785300	19.45	19.57	22.52	26.31	30.00
6985MHz	Pass	3.841770	19.26	19.09	22.19	26.03	30.00
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	4.135780	18.79	18.23	21.53	25.67	30.00
6265MHz	Pass	4.135780	18.77	18.23	21.52	25.66	30.00
6425MHz	Pass	4.135780	19.71	19.76	22.75	26.89	30.00
6585MHz	Pass	3.552170	21.1	21.54	24.34	27.89	30.00
6745MHz	Pass	3.785300	21.7	22.14	24.94	28.73	30.00
6905MHz	Pass	3.785300	17.57	17.9	20.75	24.54	30.00
802.11be EHT20-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
5955MHz	Pass	4.135780	7.4	6.72	10.08	14.22	30.00
6195MHz	Pass	4.135780	8.05	7.08	10.60	14.74	30.00
6415MHz	Pass	4.135780	7.2	7.03	10.13	14.27	30.00
6435MHz	Pass	3.552170	7.61	7.56	10.60	14.15	30.00
6475MHz	Pass	3.552170	7.42	7.94	10.70	14.25	30.00
6515MHz	Pass	3.552170	7.59	7.56	10.59	14.14	30.00
6535MHz	Pass	3.785300	7.21	7.65	10.45	14.24	30.00
6695MHz	Pass	3.785300	7.41	8.15	10.81	14.60	30.00
6875MHz	Pass	3.785300	7.44	7.42	10.44	14.23	30.00
6895MHz	Pass	3.841770	7.56	7.29	10.44	14.28	30.00
6995MHz	Pass	3.841770	7.71	7.38	10.56	14.40	30.00
7095MHz	Pass	3.841770	8.16	7.56	10.88	14.72	30.00
7115MHz	Pass	3.841770	-0.53	0.35	2.94	6.78	30.00
802.11be EHT40-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.135780	10.23	9.94	13.10	17.24	30.00
6205MHz	Pass	4.135780	10.51	9.54	13.06	17.20	30.00
6405MHz	Pass	4.135780	10	9.77	12.90	17.04	30.00
6445MHz	Pass	3.552170	9.77	9.74	12.77	16.32	30.00
6485MHz	Pass	3.552170	10.22	10.36	13.30	16.85	30.00
6525MHz	Pass	3.552170	10.03	10.26	13.16	16.71	30.00
6565MHz	Pass	3.785300	9.63	10.27	12.97	16.76	30.00
6685MHz	Pass	3.785300	9.11	10.01	12.59	16.38	30.00
6885MHz	Pass	3.785300	10.52	10.3	13.42	17.21	30.00
6925MHz	Pass	3.841770	10.5	10.18	13.35	17.19	30.00
7005MHz	Pass	3.841770	10.43	10.35	13.40	17.24	30.00
7085MHz	Pass	3.841770	10.51	10.22	13.38	17.22	30.00
802.11be EHT80-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.135780	12.6	11.9	15.27	19.41	30.00
6225MHz	Pass	4.135780	13.81	12.96	16.42	20.56	30.00
6385MHz	Pass	4.135780	13.13	12.82	15.99	20.13	30.00
6465MHz	Pass	3.552170	13.56	13.57	16.58	20.13	30.00
6545MHz	Pass	3.552170	12.64	13.49	16.10	19.65	30.00
6625MHz	Pass	3.785300	12.89	13.32	16.12	19.91	30.00
6705MHz	Pass	3.785300	12.09	13.02	15.59	19.38	30.00
6785MHz	Pass	3.785300	12.42	13.14	15.81	19.60	30.00
6865MHz	Pass	3.785300	12.86	12.88	15.88	19.67	30.00
6945MHz	Pass	3.841770	12.97	12.62	15.81	19.65	30.00
7025MHz	Pass	3.841770	12.95	12.63	15.80	19.64	30.00
802.11be EHT160-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.135780	16.04	15.12	18.61	22.75	30.00
6185MHz	Pass	4.135780	16.17	15.22	18.73	22.87	30.00
6345MHz	Pass	4.135780	15.73	15.6	18.68	22.82	30.00
6505MHz	Pass	3.552170	16.02	16.33	19.19	22.74	30.00
6665MHz	Pass	3.785300	15.3	15.92	18.63	22.42	30.00
6825MHz	Pass	3.785300	16.44	16.56	19.51	23.30	30.00
6985MHz	Pass	3.841770	16.25	16.08	19.18	23.02	30.00
802.11be EHT320-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	4.135780	15.78	15.22	18.52	22.66	30.00
6265MHz	Pass	4.135780	15.76	15.22	18.51	22.65	30.00
6425MHz	Pass	4.135780	16.7	16.75	19.74	23.88	30.00
6585MHz	Pass	3.552170	18.09	18.53	21.33	24.88	30.00
6745MHz	Pass	3.785300	18.69	19.13	21.93	25.72	30.00
6905MHz	Pass	3.785300	14.56	14.89	17.74	21.53	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	0.59	4.73
802.11be EHT40_Nss2,(MCS0)_2TX	0.59	4.73
802.11be EHT80_Nss2,(MCS0)_2TX	0.51	4.65
802.11be EHT160_Nss2,(MCS0)_2TX	0.73	4.87
802.11be EHT320_Nss2,(MCS0)_2TX	-0.43	3.71
6.425-6.525GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	1.17	4.72
802.11be EHT40_Nss2,(MCS0)_2TX	1.29	4.84
802.11be EHT80_Nss2,(MCS0)_2TX	1.21	4.76
802.11be EHT160_Nss2,(MCS0)_2TX	0.98	4.53
802.11be EHT320_Nss2,(MCS0)_2TX	0.91	4.46
6.525-6.875GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	1.13	4.92
802.11be EHT40_Nss2,(MCS0)_2TX	0.89	4.68
802.11be EHT80_Nss2,(MCS0)_2TX	1.17	4.96
802.11be EHT160_Nss2,(MCS0)_2TX	0.97	4.76
802.11be EHT320_Nss2,(MCS0)_2TX	0.96	4.75
6.875-7.125GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	1.10	4.94
802.11be EHT40_Nss2,(MCS0)_2TX	1.10	4.94
802.11be EHT80_Nss2,(MCS0)_2TX	0.78	4.62
802.11be EHT160_Nss2,(MCS0)_2TX	0.38	4.22

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.135780	-2.08	-2.75	0.59	4.73	5.00
6195MHz	Pass	4.135780	-1.75	-3.43	0.46	4.60	5.00
6415MHz	Pass	4.135780	-2.31	-2.50	0.58	4.72	5.00
6435MHz	Pass	3.552170	-1.83	-1.88	1.11	4.66	5.00
6475MHz	Pass	3.552170	-2.00	-1.51	1.17	4.72	5.00
6515MHz	Pass	3.552170	-1.97	-1.96	1.05	4.60	5.00
6535MHz	Pass	3.785300	-2.07	-1.97	0.94	4.73	5.00
6695MHz	Pass	3.785300	-2.24	-1.45	1.13	4.92	5.00
6875MHz	Pass	3.785300	-2.13	-2.19	0.79	4.58	5.00
6895MHz	Pass	3.841770	-2.00	-2.41	0.78	4.62	5.00
6995MHz	Pass	3.841770	-1.95	-2.35	0.83	4.67	5.00
7095MHz	Pass	3.841770	-1.57	-2.26	1.10	4.94	5.00
7115MHz	Pass	3.841770	-10.33	-9.44	-6.87	-3.03	5.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.135780	-2.06	-2.99	0.51	4.65	5.00
6205MHz	Pass	4.135780	-1.74	-3.40	0.46	4.60	5.00
6405MHz	Pass	4.135780	-2.10	-2.67	0.59	4.73	5.00
6445MHz	Pass	3.552170	-1.52	-1.99	1.11	4.66	5.00
6485MHz	Pass	3.552170	-1.57	-1.77	1.29	4.84	5.00
6525MHz	Pass	3.552170	-1.70	-1.97	1.13	4.68	5.00
6565MHz	Pass	3.785300	-2.35	-1.80	0.81	4.60	5.00
6685MHz	Pass	3.785300	-2.53	-1.93	0.79	4.58	5.00
6885MHz	Pass	3.785300	-1.89	-2.16	0.89	4.68	5.00
6925MHz	Pass	3.841770	-1.75	-2.01	1.04	4.88	5.00
7005MHz	Pass	3.841770	-1.92	-1.82	1.10	4.94	5.00
7085MHz	Pass	3.841770	-1.82	-2.31	0.86	4.70	5.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.135780	-2.30	-2.88	0.41	4.55	5.00
6225MHz	Pass	4.135780	-1.78	-3.40	0.45	4.59	5.00
6385MHz	Pass	4.135780	-2.36	-2.58	0.51	4.65	5.00
6465MHz	Pass	3.552170	-1.74	-1.87	1.21	4.76	5.00
6545MHz	Pass	3.552170	-2.15	-1.52	1.15	4.70	5.00
6625MHz	Pass	3.785300	-1.84	-1.57	1.17	4.96	5.00
6705MHz	Pass	3.785300	-2.31	-1.78	0.90	4.69	5.00
6785MHz	Pass	3.785300	-2.45	-1.93	0.81	4.60	5.00
6865MHz	Pass	3.785300	-1.97	-2.13	0.96	4.75	5.00
6945MHz	Pass	3.841770	-2.08	-2.36	0.78	4.62	5.00
7025MHz	Pass	3.841770	-2.06	-2.44	0.76	4.60	5.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.135780	-2.14	-3.02	0.40	4.54	5.00
6185MHz	Pass	4.135780	-1.62	-2.99	0.73	4.87	5.00
6345MHz	Pass	4.135780	-2.35	-2.59	0.50	4.64	5.00
6505MHz	Pass	3.552170	-2.04	-1.89	0.98	4.53	5.00
6665MHz	Pass	3.785300	-2.45	-1.60	0.97	4.76	5.00
6825MHz	Pass	3.785300	-2.40	-2.10	0.72	4.51	5.00
6985MHz	Pass	3.841770	-2.58	-2.68	0.38	4.22	5.00
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	4.135780	-5.23	-5.94	-2.60	1.54	5.00
6265MHz	Pass	4.135780	-5.81	-6.21	-3.02	1.12	5.00
6425MHz	Pass	4.135780	-2.85	-4.12	-0.43	3.71	5.00
6585MHz	Pass	3.552170	-2.22	-1.95	0.91	4.46	5.00
6745MHz	Pass	3.785300	-2.33	-1.71	0.96	4.75	5.00
6905MHz	Pass	3.785300	-6.58	-6.47	-3.57	0.22	5.00



DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5955MHz

03/07/2025

CF (Hz)
5.955G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

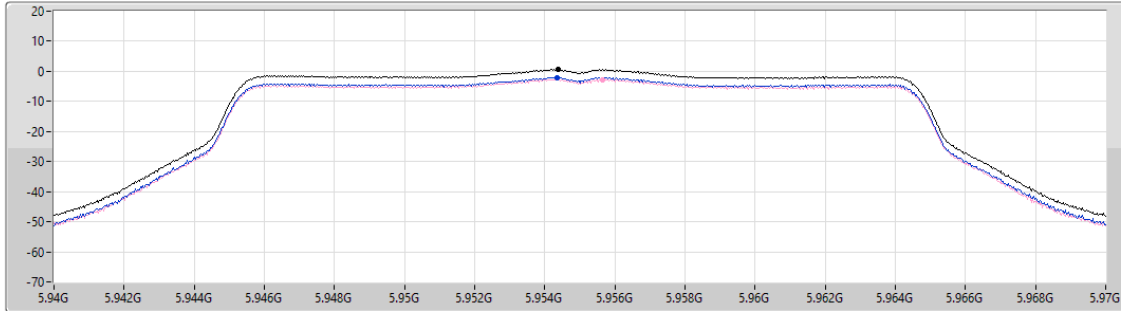

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.59	0.59	-2.08	-2.75


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6195MHz

03/07/2025

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

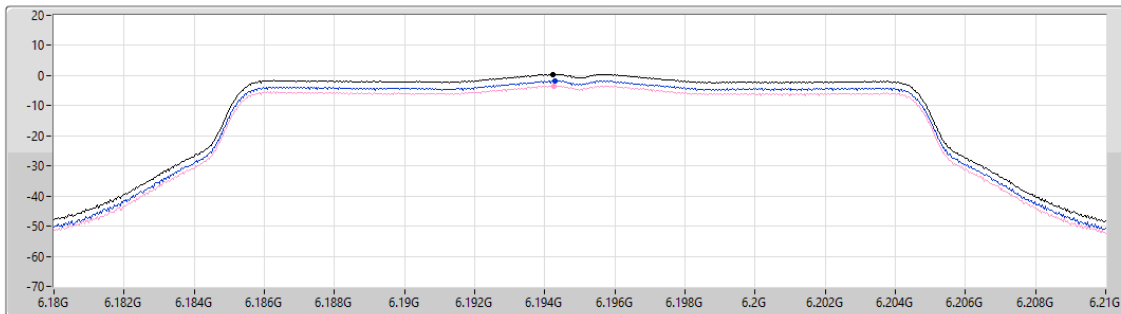

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.46	0.46	-1.75	-3.43


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6415MHz

03/07/2025

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

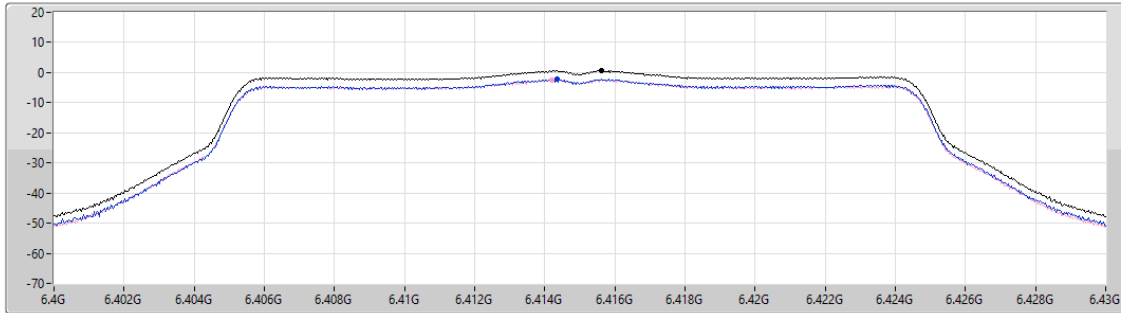

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.58	0.58	-2.31	-2.50

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6435MHz

03/07/2025

CF (Hz)
6.435G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

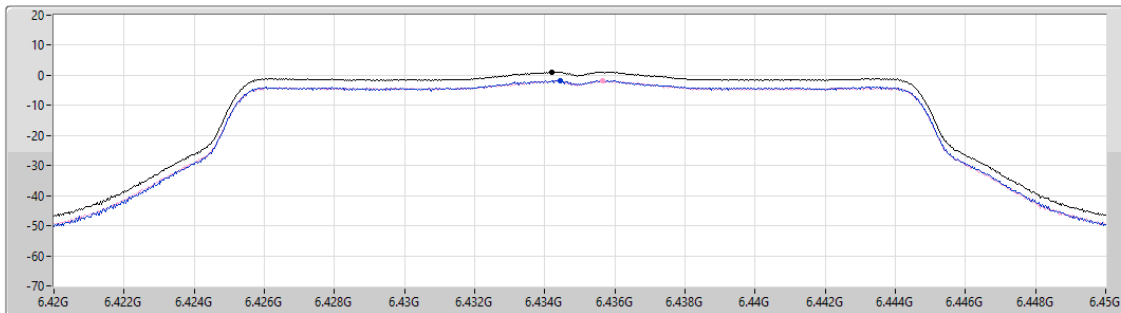

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.11	1.11	-1.83	-1.88

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6475MHz

03/07/2025

CF (Hz)
6.475G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

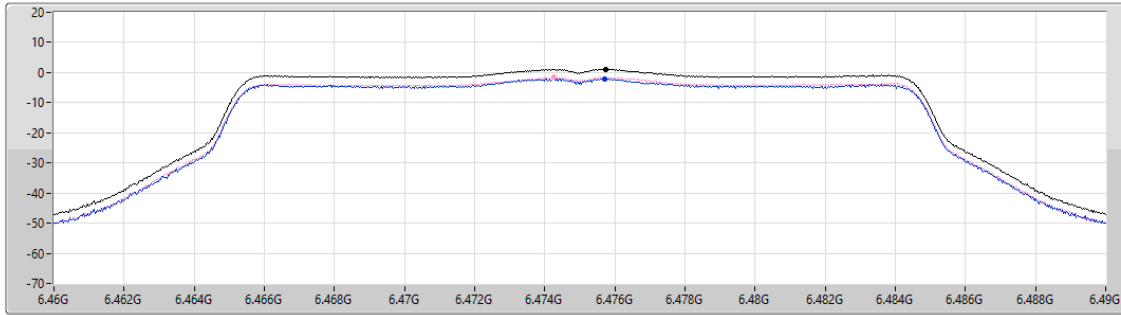

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.17	1.17	-2.00	-1.51

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6515MHz

03/07/2025

CF (Hz)
6.515G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

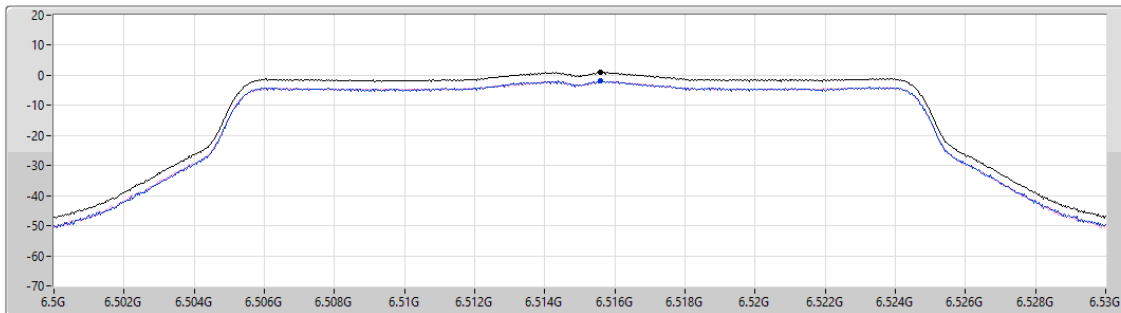

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.05	1.05	-1.97	-1.96

Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6535MHz

03/07/2025

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.749

Detector Type
RMS

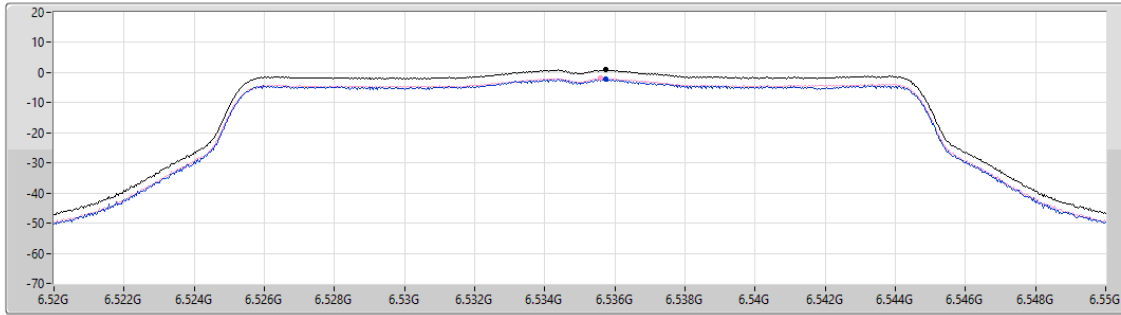

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.94	0.94	-2.07	-1.97

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6695MHz

04/07/2025

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.749

Detector Type
RMS

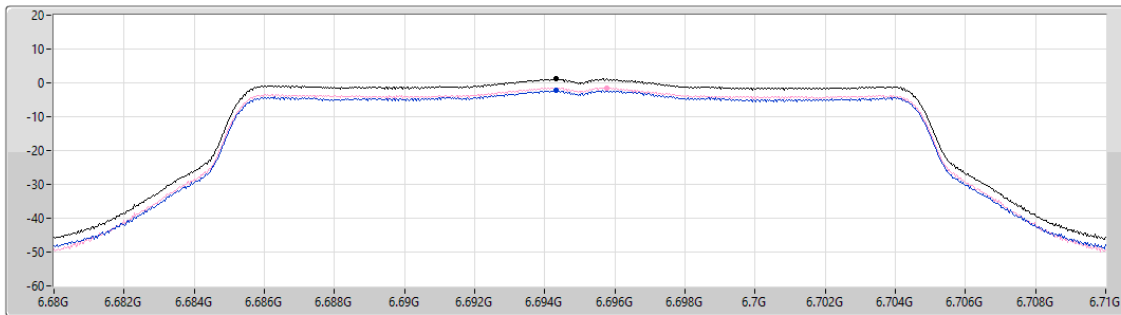

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.13	1.13	-2.24	-1.45

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6875MHz

03/07/2025

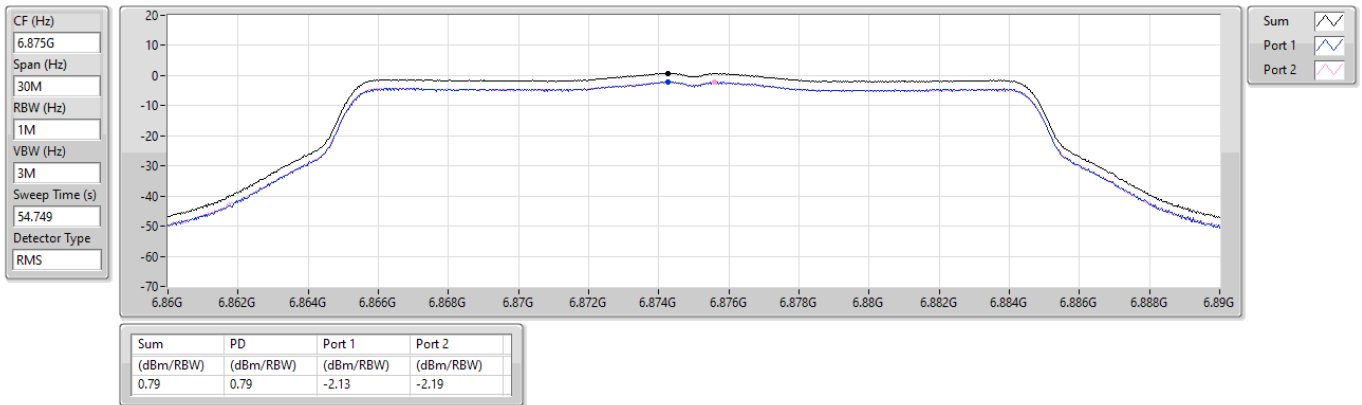


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6895MHz

04/07/2025

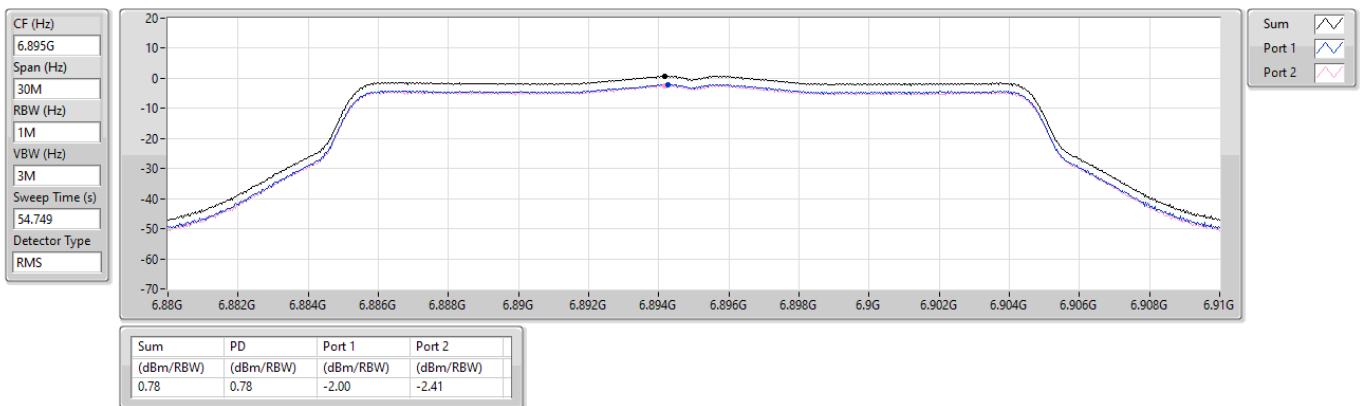


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6995MHz

04/07/2025

CF (Hz)
6.995G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

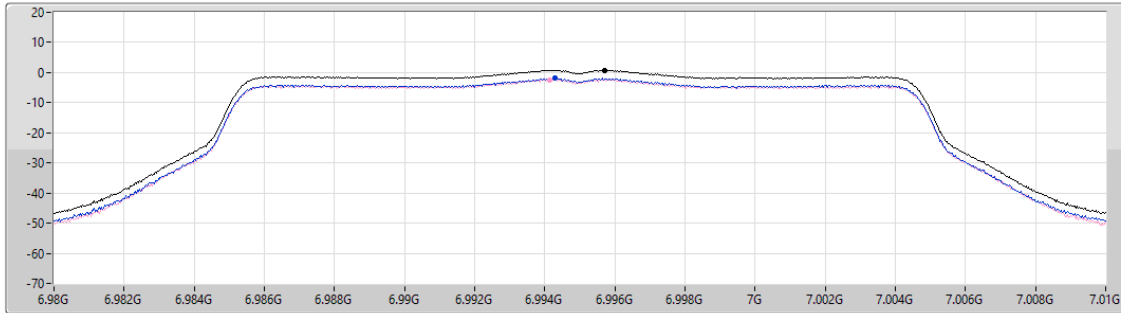

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.83	0.83	-1.95	-2.35


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

7095MHz

04/07/2025

CF (Hz)
7.095G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

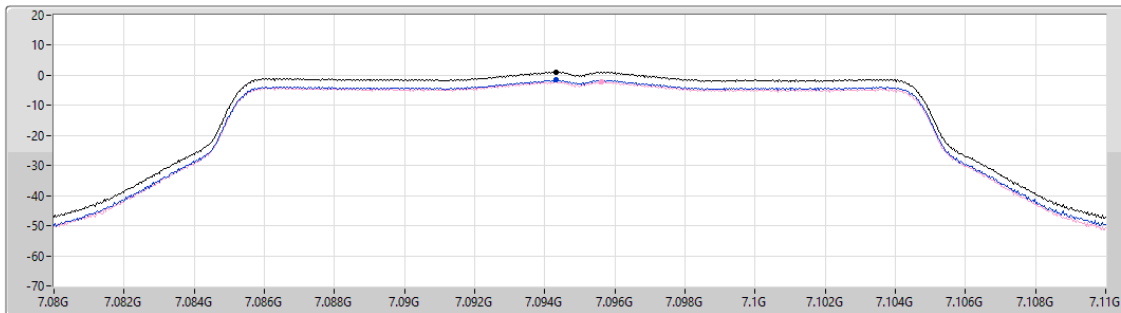

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.10	1.10	-1.57	-2.26


6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

7115MHz

03/07/2025

CF (Hz)
7.115G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.749
Detector Type
RMS

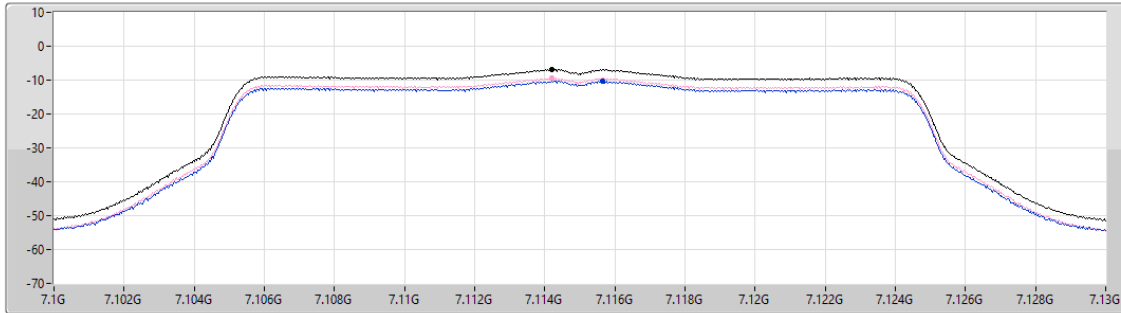

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.87	-6.87	-10.33	-9.44

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5965MHz

03/07/2025

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.103
Detector Type
RMS

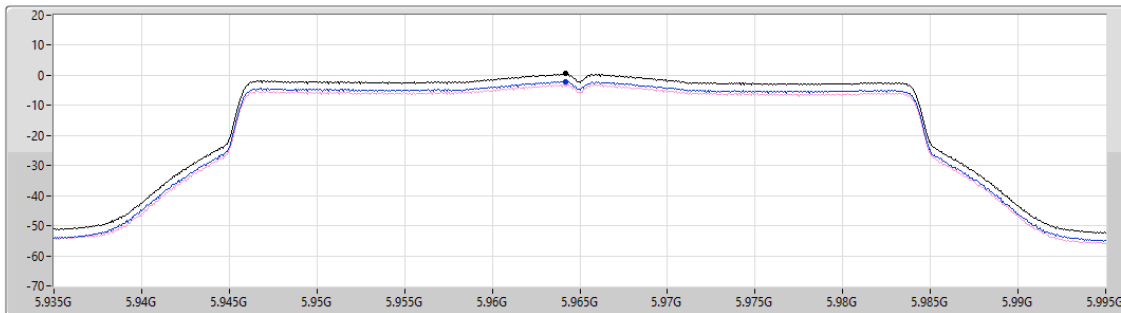

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.51	0.51	-2.06	-2.99

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6205MHz

04/07/2025

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.103
Detector Type
RMS

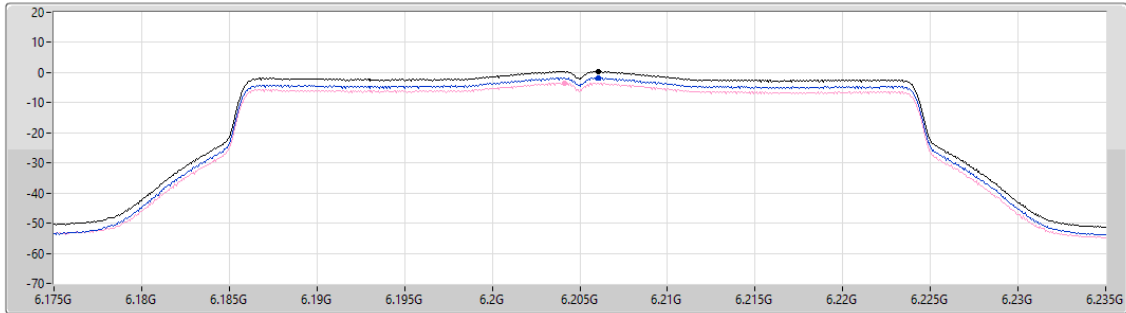

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.46	0.46	-1.74	-3.40

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6405MHz

03/07/2025

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.103
Detector Type
RMS

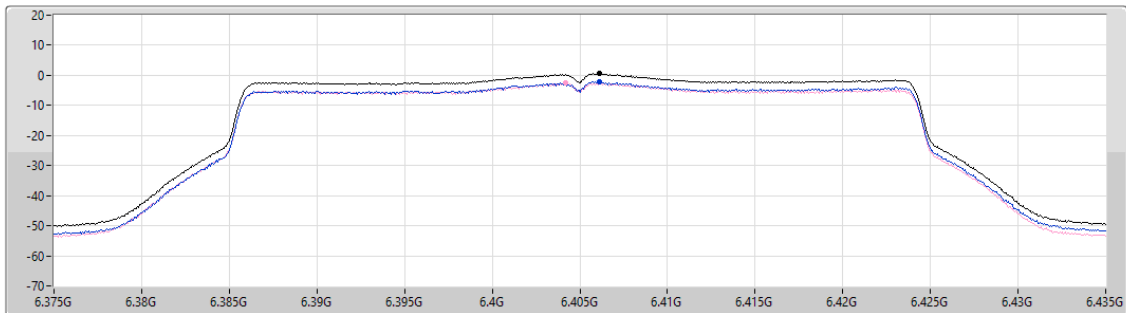

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.59	0.59	-2.10	-2.67


Sum
Port 1
Port 2

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6445MHz

03/07/2025

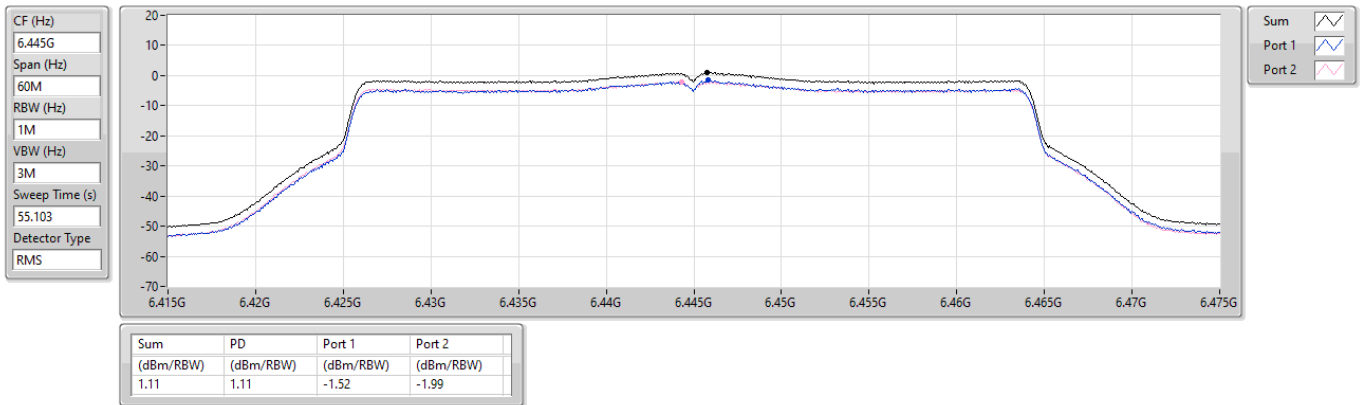


6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6485MHz

04/07/2025

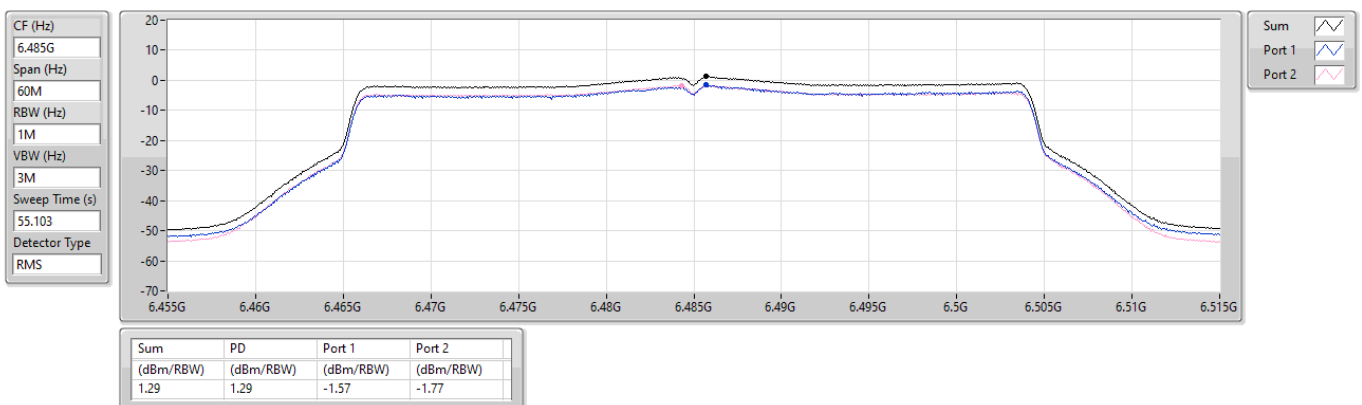


6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6525MHz

04/07/2025

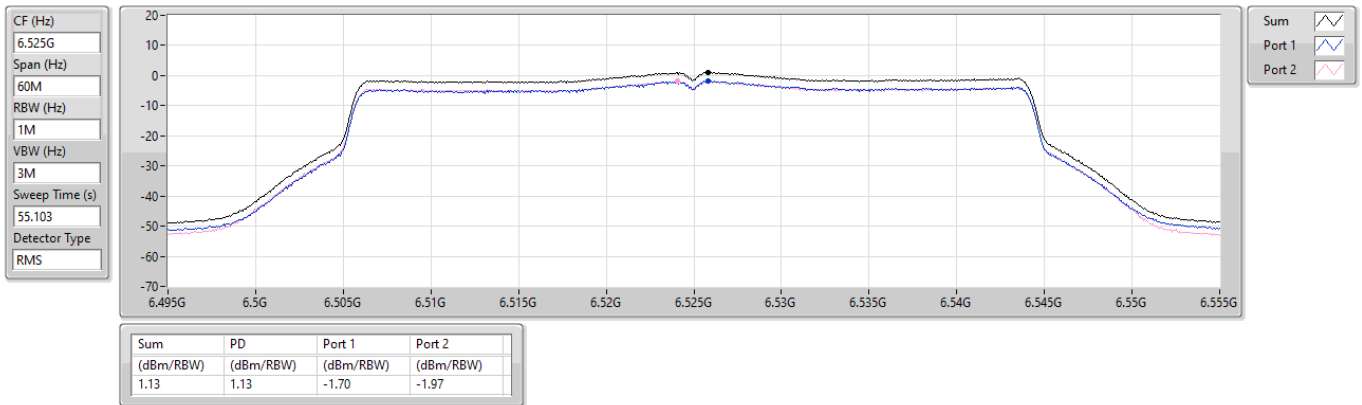


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6565MHz

04/07/2025

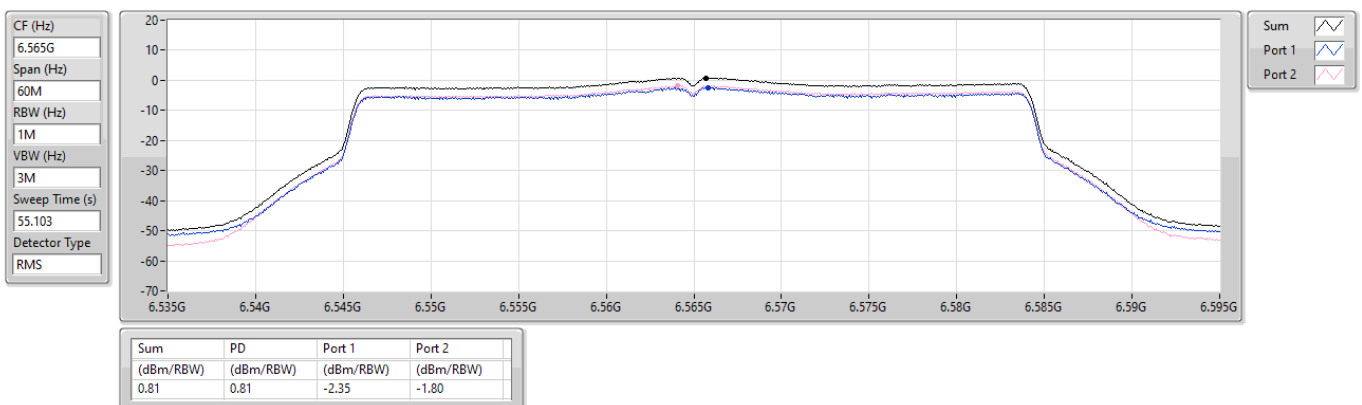


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6685MHz

03/07/2025

CF (Hz)
6.685G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.103
Detector Type
RMS

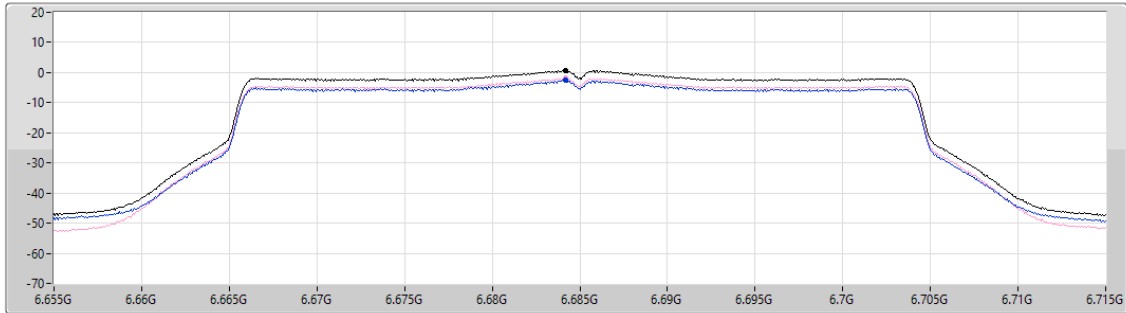

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.79	0.79	-2.53	-1.93

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6885MHz

03/07/2025

CF (Hz)
6.885G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.103
Detector Type
RMS

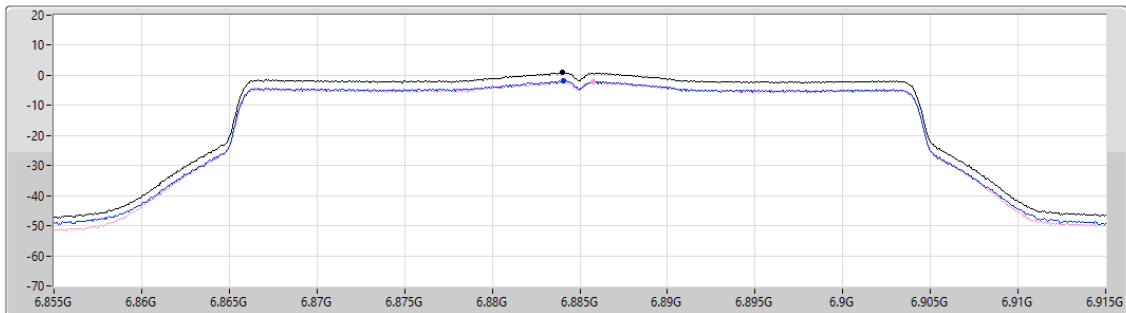

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.89	0.89	-1.89	-2.16


Sum
Port 1
Port 2

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6925MHz

04/07/2025

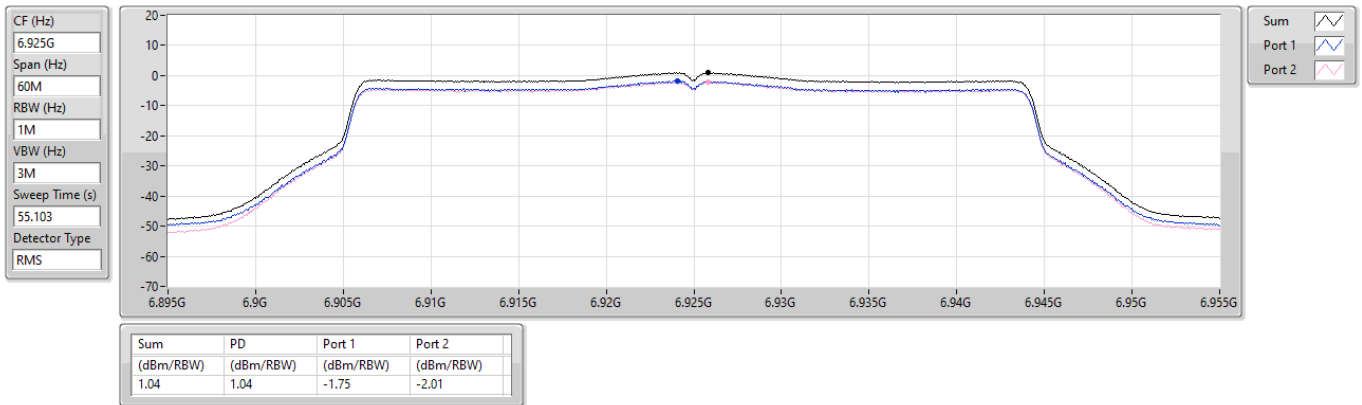


6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

7005MHz

04/07/2025

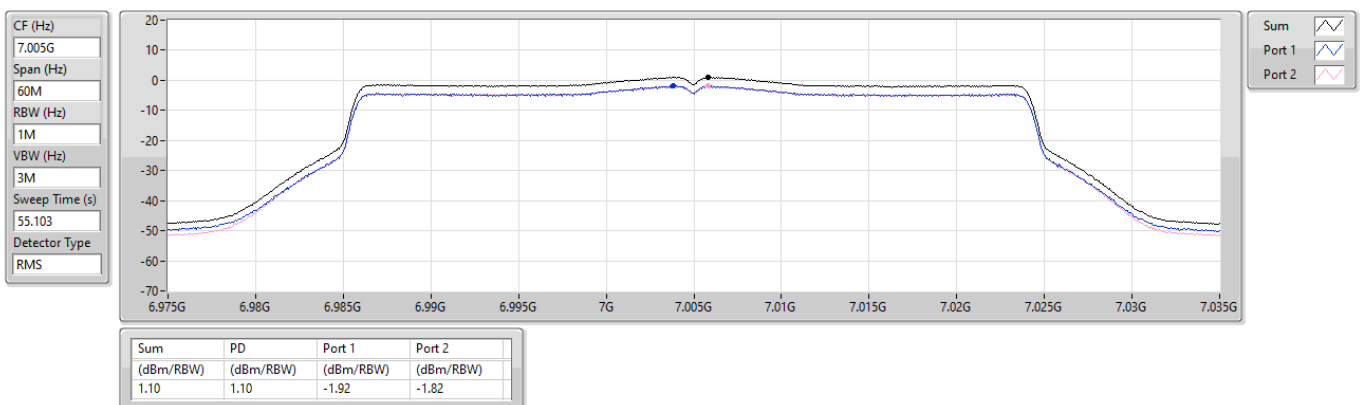


6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

7085MHz

04/07/2025

CF (Hz)
7.085G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.103
Detector Type
RMS

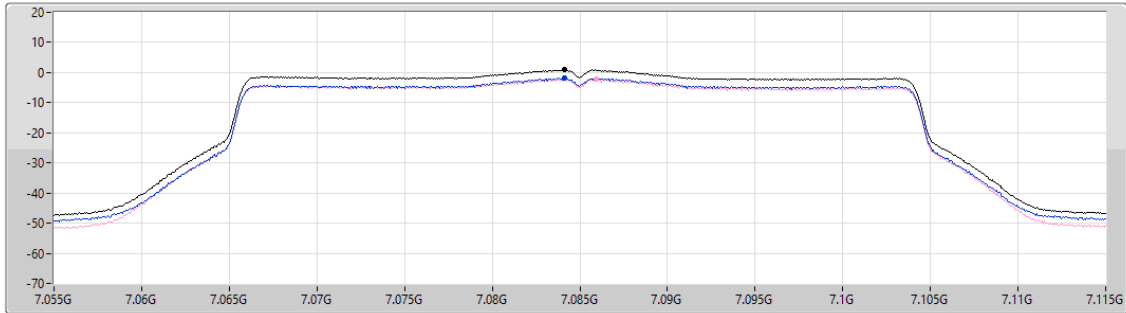

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
0.86	0.86	-1.82	-2.31

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5985MHz

03/07/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

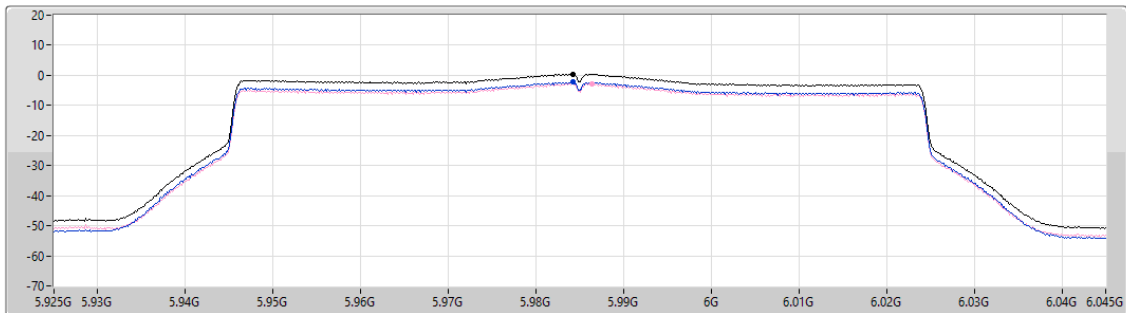

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
0.41	0.41	-2.30	-2.88

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6225MHz

03/07/2025

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

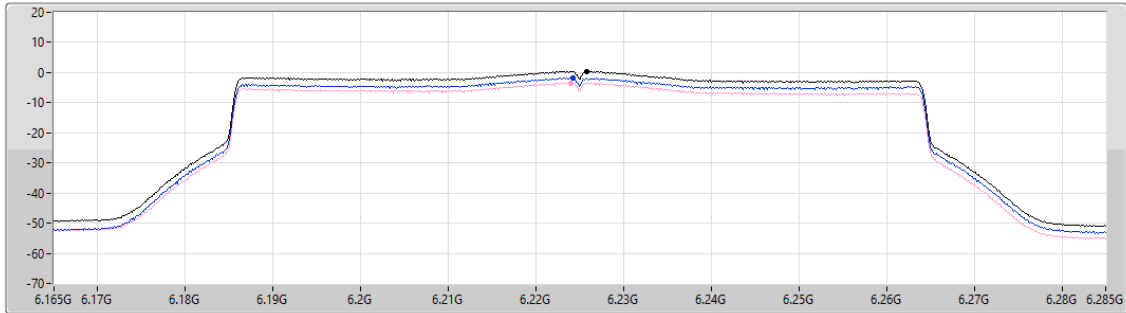

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
0.45	0.45	-1.78	-3.40

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6385MHz

03/07/2025

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

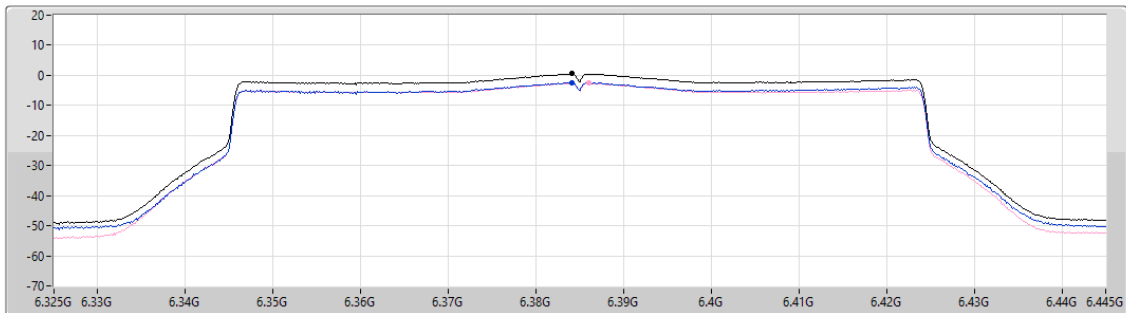

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
0.51	0.51	-2.36	-2.58

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6465MHz

03/07/2025

CF (Hz)
6.465G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

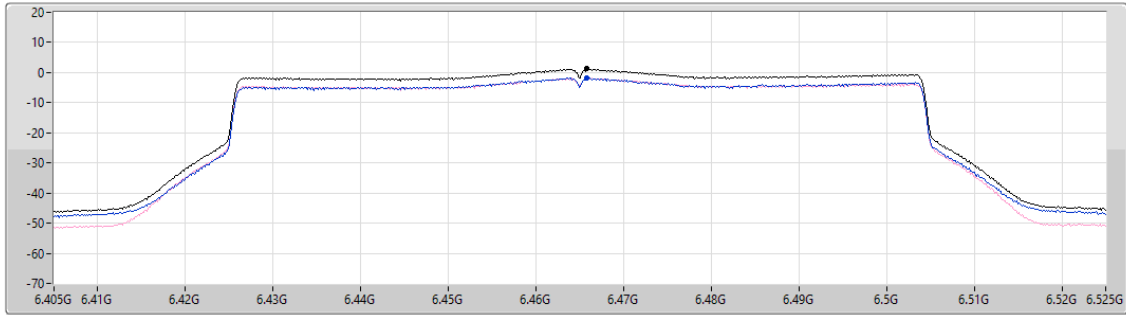

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.21	1.21	-1.74	-1.87


6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6545MHz

03/07/2025

CF (Hz)
6.545G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

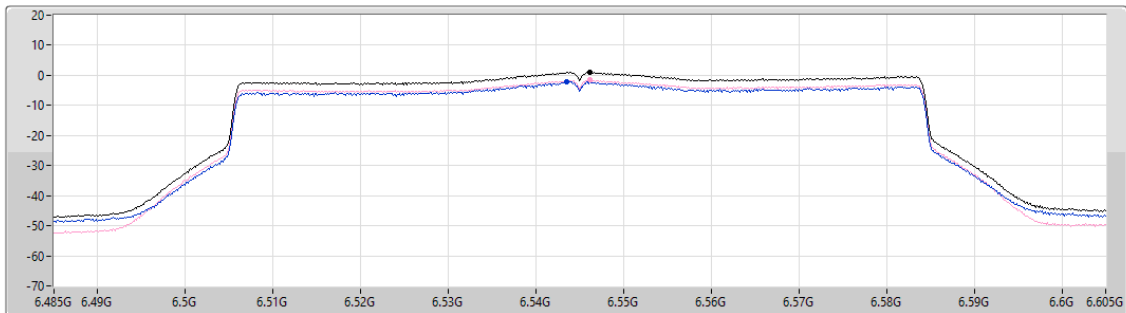

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.15	1.15	-2.15	-1.52


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6625MHz

04/07/2025

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

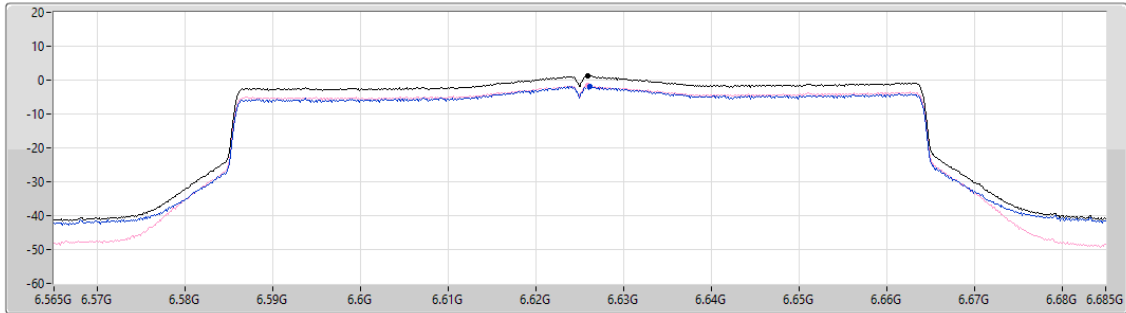

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.17	1.17	-1.84	-1.57

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6705MHz

03/07/2025

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

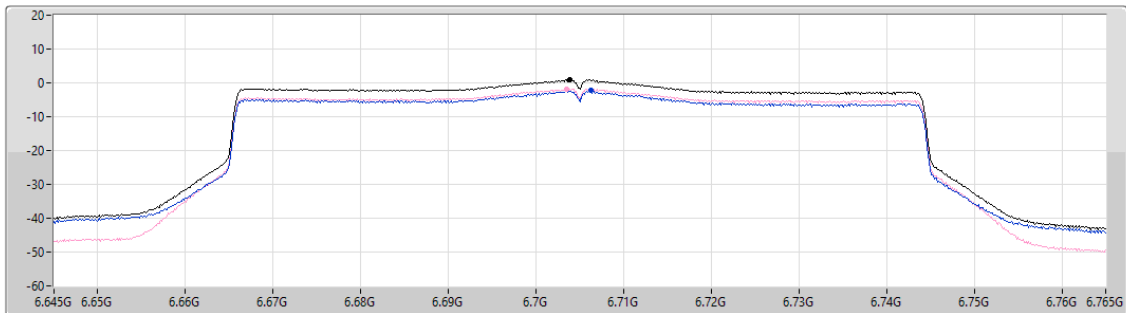

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.90	0.90	-2.31	-1.78

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6785MHz

03/07/2025

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

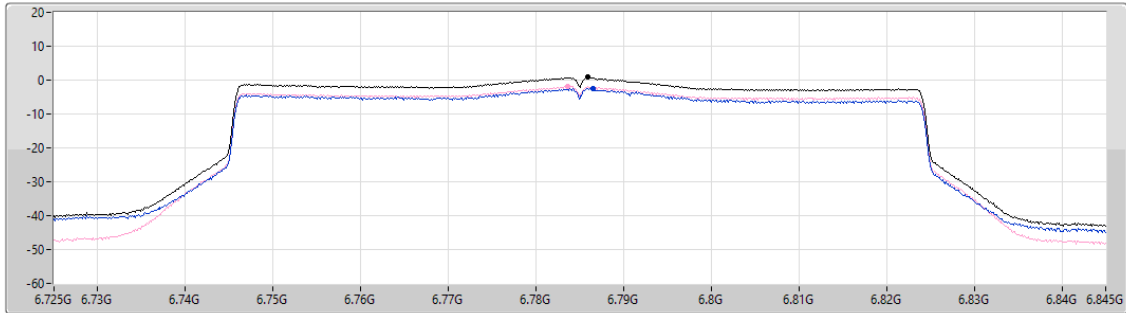

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.81	0.81	-2.45	-1.93

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6865MHz

03/07/2025

CF (Hz)
6.865G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

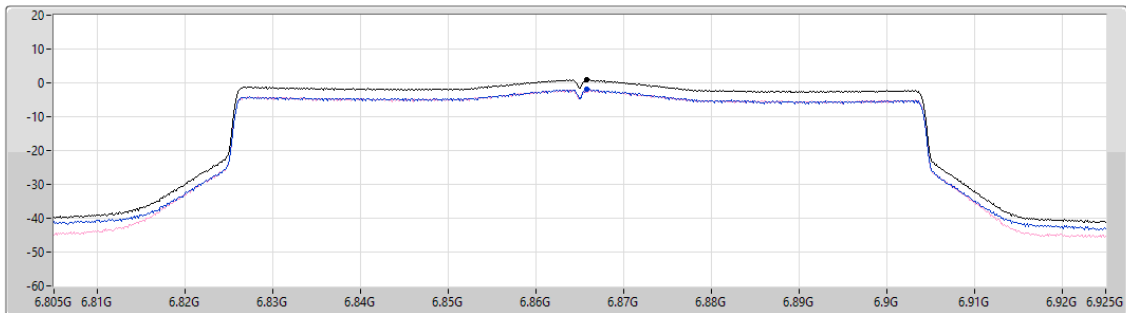

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.96	0.96	-1.97	-2.13

Sum
Port 1
Port 2


6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6945MHz

04/07/2025

CF (Hz)
6.945G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

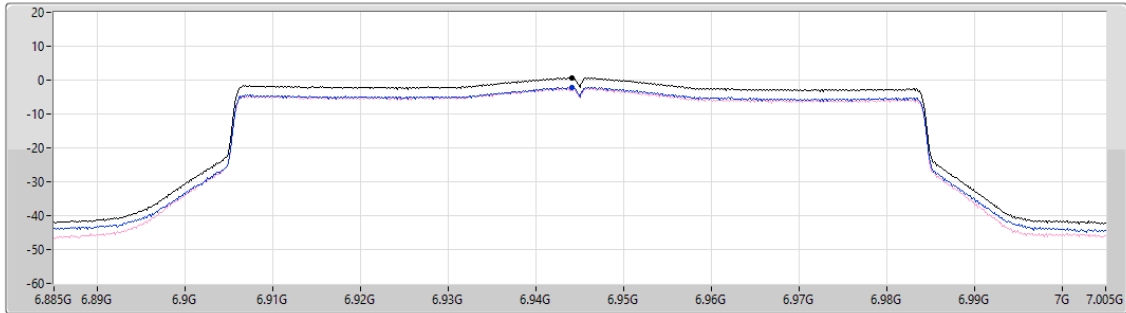

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.78	0.78	-2.08	-2.36

Sum
Port 1
Port 2


6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

7025MHz

04/07/2025

CF (Hz)
7.025G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

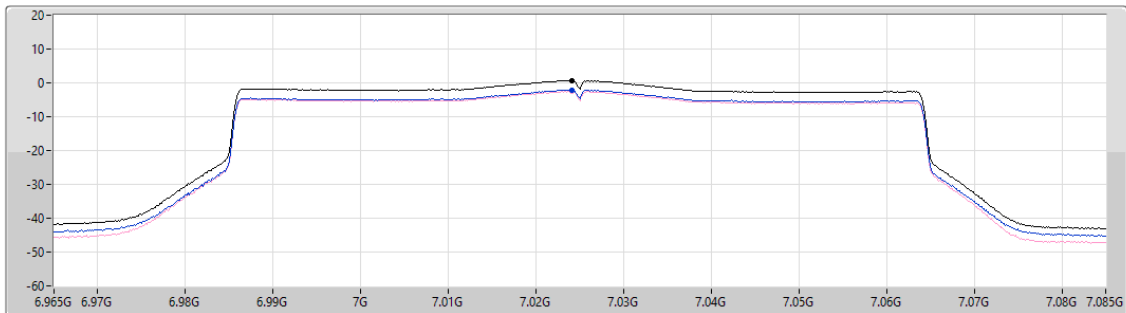

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.76	0.76	-2.06	-2.44

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6025MHz

03/07/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

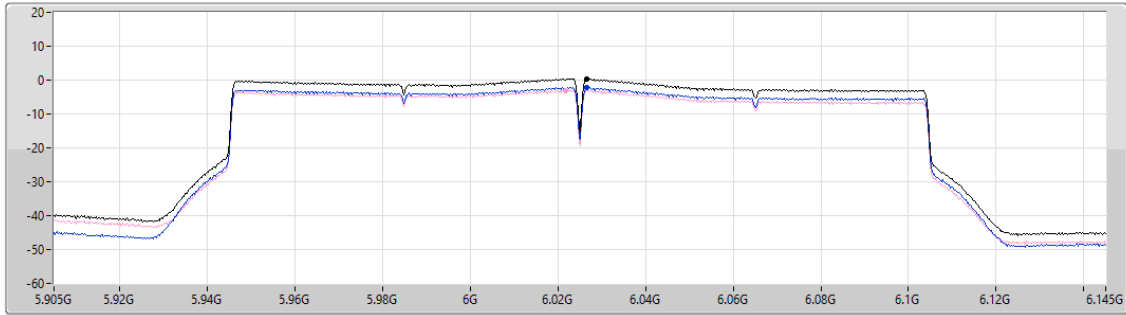

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
0.40	0.40	-2.14	-3.02

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6185MHz

04/07/2025

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

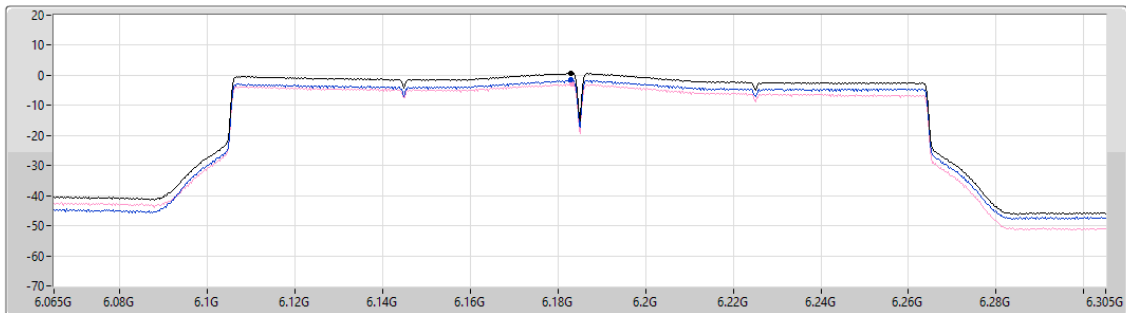

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
0.73	0.73	-1.62	-2.99

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6345MHz

03/07/2025

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

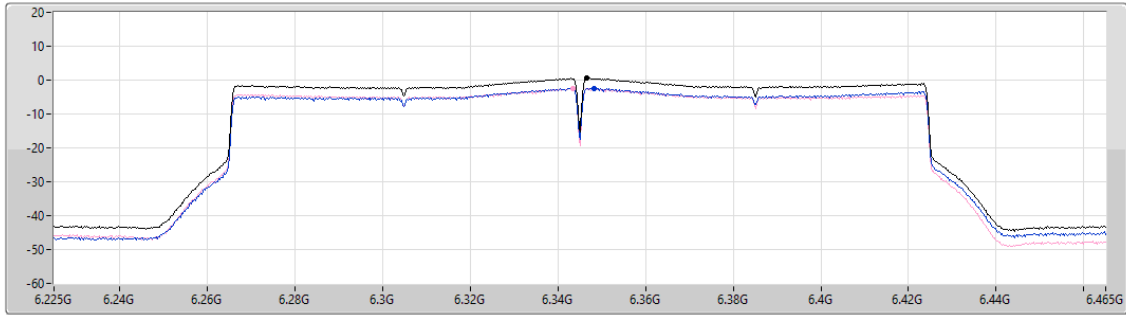

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.50	0.50	-2.35	-2.59

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6505MHz

03/07/2025

CF (Hz)
6.505G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

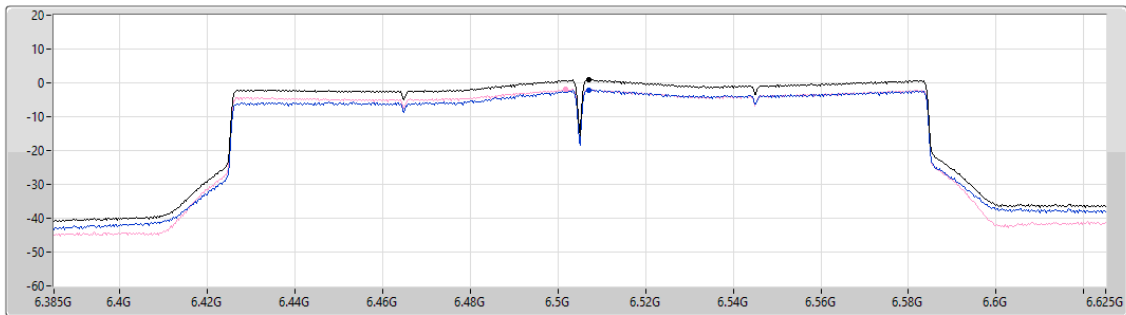

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.98	0.98	-2.04	-1.89

Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6665MHz

03/07/2025

CF (Hz)
6.665G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.372

Detector Type
RMS

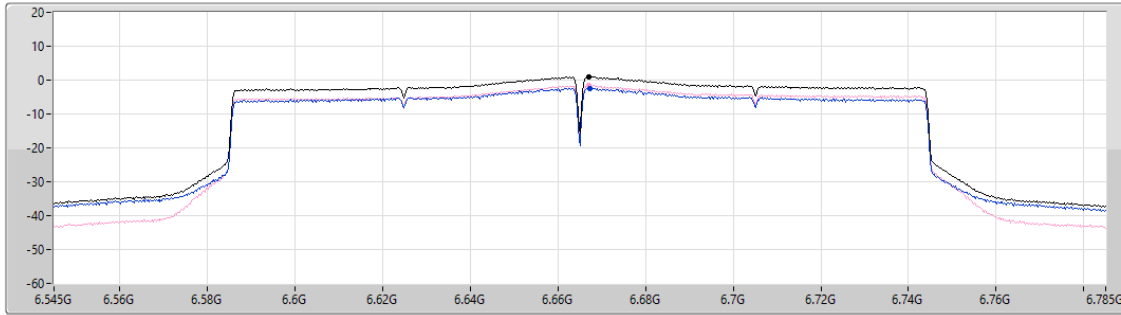

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.97	0.97	-2.45	-1.60

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6825MHz

03/07/2025

CF (Hz)
6.825G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.372

Detector Type
RMS

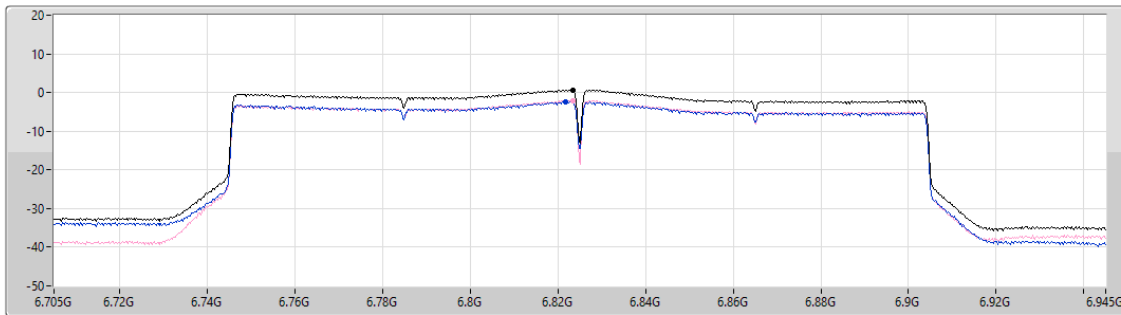

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.72	0.72	-2.40	-2.10


6.875-7.125GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6985MHz

03/07/2025

CF (Hz)
6.985G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.372
Detector Type
RMS

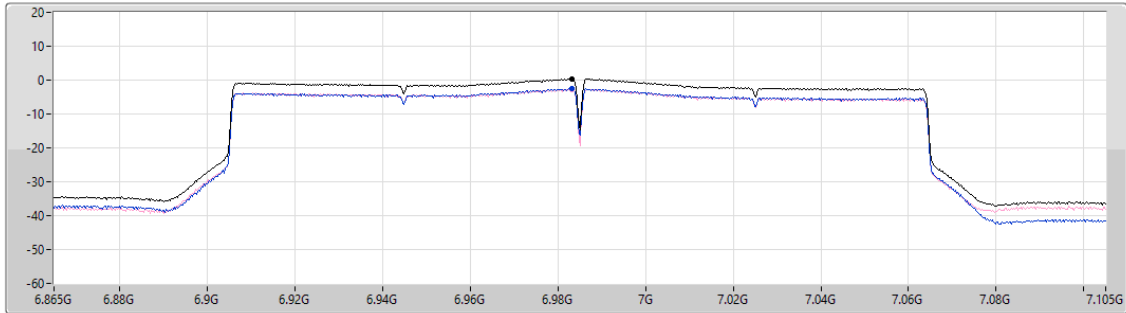

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.38	0.38	-2.58	-2.68

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6105MHz

03/07/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.137
Detector Type
RMS

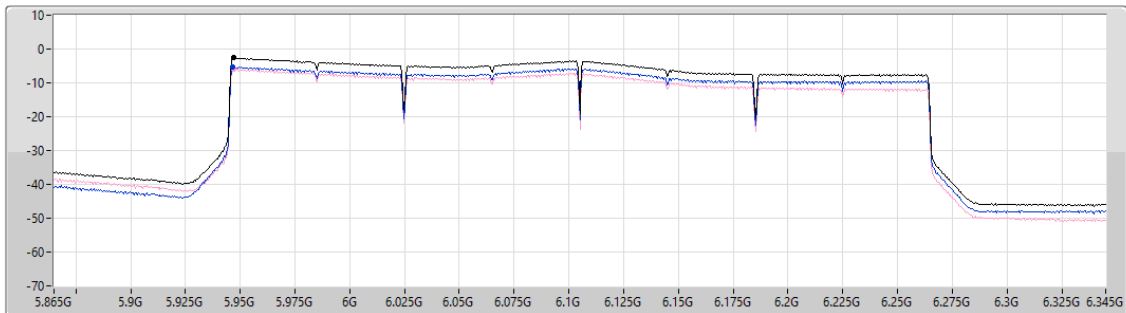

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.60	-2.60	-5.23	-5.94

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6265MHz

03/07/2025

CF (Hz)
6.265G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.137
Detector Type
RMS

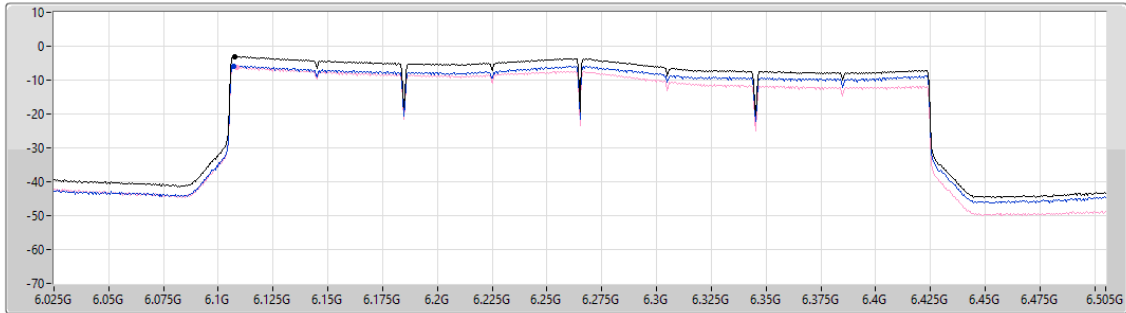

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.02	-3.02	-5.81	-6.21


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6425MHz

03/07/2025

CF (Hz)
6.425G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.137
Detector Type
RMS

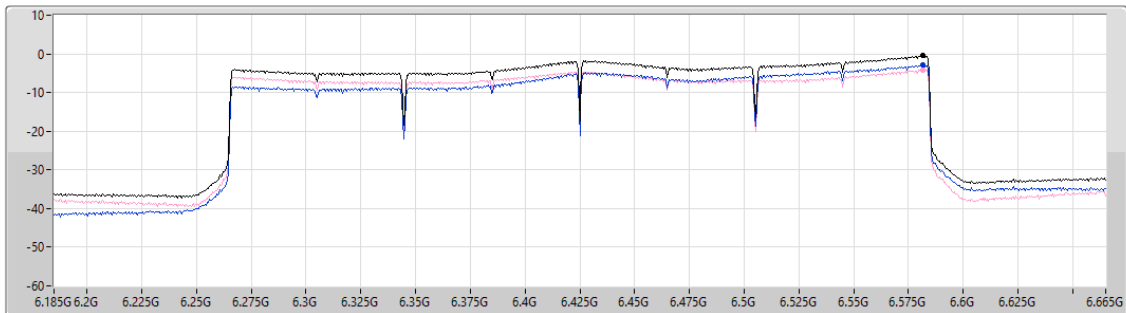

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.43	-0.43	-2.85	-4.12


6.425-6.525GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6585MHz

03/07/2025

CF (Hz)
6.585G
Span (Hz)
10
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.137
Detector Type
RMS

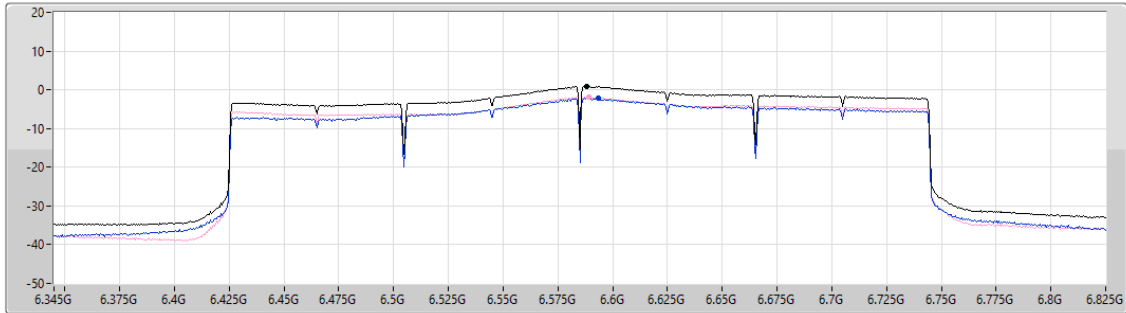

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.91	0.91	-2.22	-1.95

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6745MHz

03/07/2025

CF (Hz)
6.745G
Span (Hz)
10
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.137
Detector Type
RMS

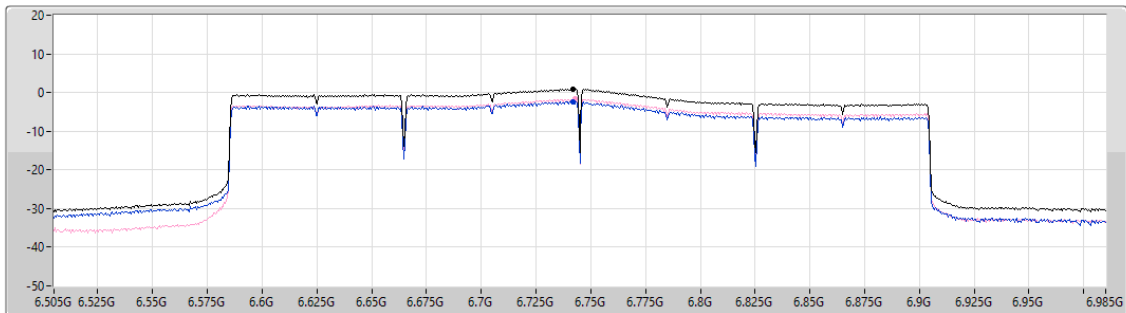

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.96	0.96	-2.33	-1.71


Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6905MHz

03/07/2025

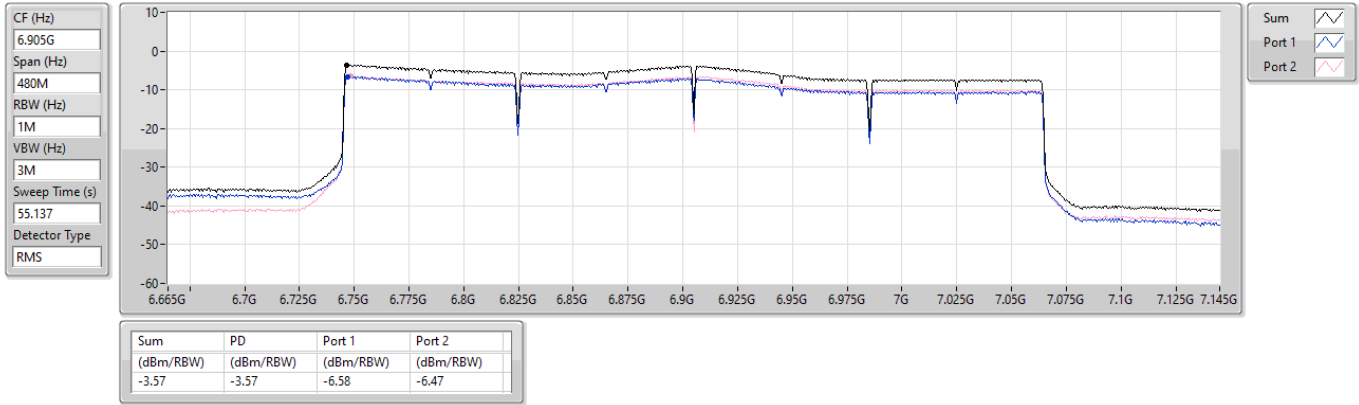




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	QP	35.82M	36.90	40.00	-3.10	Vertical

Mode 3

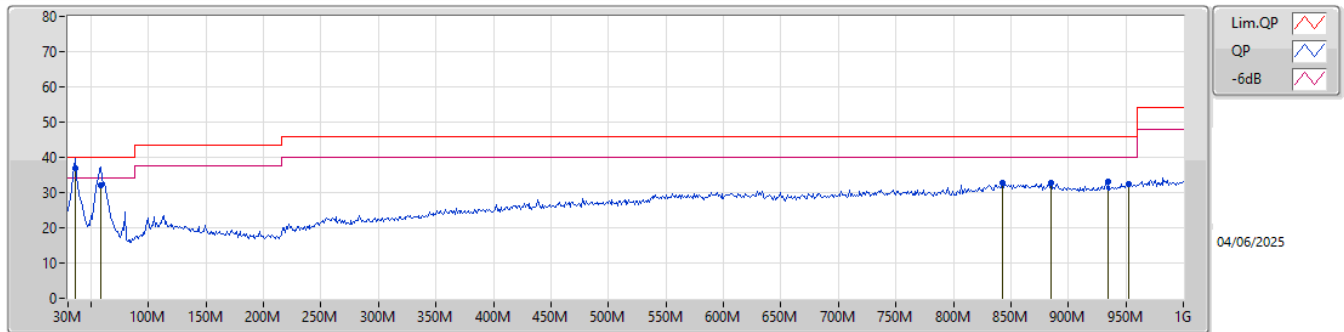

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	35.82M	36.90	40.00	-3.10	-9.26	3	Vertical	360	1.00	"Worst"	46.16	21.23	1.15	31.64		
QP	58.13M	31.95	40.00	-8.05	-17.89	3	Vertical	358	2.00	-	49.84	12.35	1.60	31.84		
PK	842.86M	32.73	46.00	-13.27	0.06	3	Vertical	2	2.00	-	32.67	26.31	6.21	32.46		
PK	884.57M	32.80	46.00	-13.20	0.51	3	Vertical	251	3.00	-	32.29	26.48	6.40	32.37		
PK	935.01M	33.06	46.00	-12.94	0.91	3	Vertical	251	1.25	-	32.15	26.73	6.55	32.37		
PK	952.47M	32.47	46.00	-13.53	1.15	3	Vertical	234	1.25	-	31.32	26.93	6.60	32.38		

Mode 3

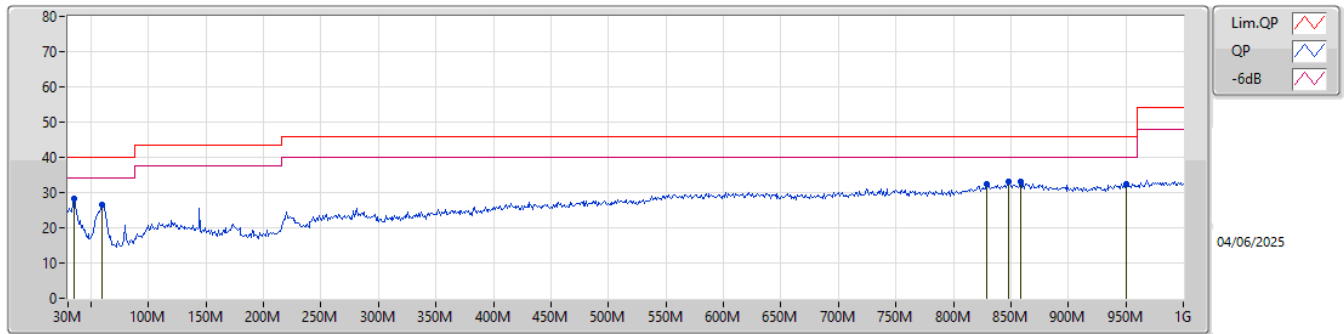

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	34.85M	28.18	40.00	-11.82	-8.94	3	Horizontal	296	1.50	"Worst"	37.12	21.60	1.15	31.69		
PK	60.07M	26.69	40.00	-13.31	-17.87	3	Horizontal	293	3.00	-	44.56	12.34	1.64	31.85		
PK	829.28M	32.47	46.00	-13.53	-0.20	3	Horizontal	152	1.25	-	32.67	26.19	6.14	32.53		
PK	847.71M	33.06	46.00	-12.94	0.18	3	Horizontal	313	1.00	-	32.88	26.38	6.23	32.43		
PK	858.38M	33.03	46.00	-12.97	0.26	3	Horizontal	347	3.00	-	32.77	26.39	6.28	32.41		
PK	950.53M	32.57	46.00	-13.43	1.10	3	Horizontal	63	1.00	-	31.47	26.89	6.59	32.38		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss2,(MCS0)_2TX	Pass	RMS	7.1252G	68.17	68.20	-0.03	3	Horizontal	313	1.80	-

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5955MHz_TX

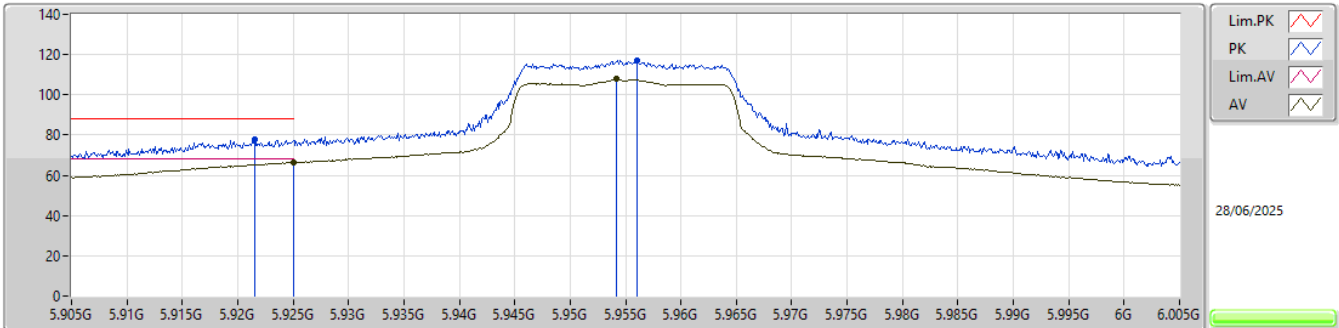


EUT_V_2TX
Setting 23.5
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9215G	77.69	88.20	-10.51	70.63	3	Vertical	19	1.80	-	34.14	8.50	35.58			
RMS	5.925G	66.33	68.20	-1.87	59.25	3	Vertical	19	1.80	-	34.15	8.51	35.58			
PK	5.956G	117.11	Inf	-Inf	109.98	3	Vertical	19	1.80	-	34.20	8.52	35.59			
RMS	5.9542G	107.79	Inf	-Inf	100.66	3	Vertical	19	1.80	-	34.20	8.52	35.59			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5955MHz_TX

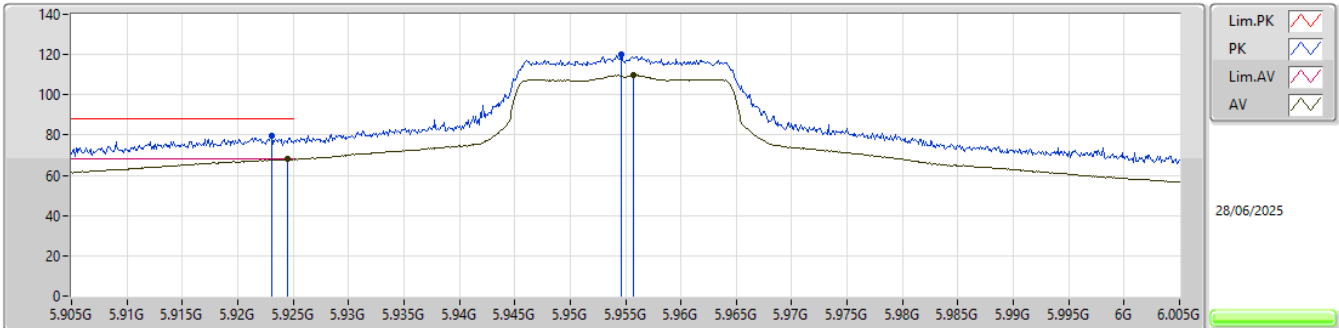


EUT_V_2TX
Setting 23.5
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9231G	79.88	88.20	-8.32	72.80	3	Horizontal	292	1.80	-	34.15	8.51	35.58			
RMS	5.9245G	68.00	68.20	-0.20	60.92	3	Horizontal	292	1.80	-	34.15	8.51	35.58			
PK	5.9546G	120.10	Inf	-Inf	112.97	3	Horizontal	292	1.80	-	34.20	8.52	35.59			
RMS	5.9557G	109.76	Inf	-Inf	102.63	3	Horizontal	292	1.80	-	34.20	8.52	35.59			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5955MHz_TX

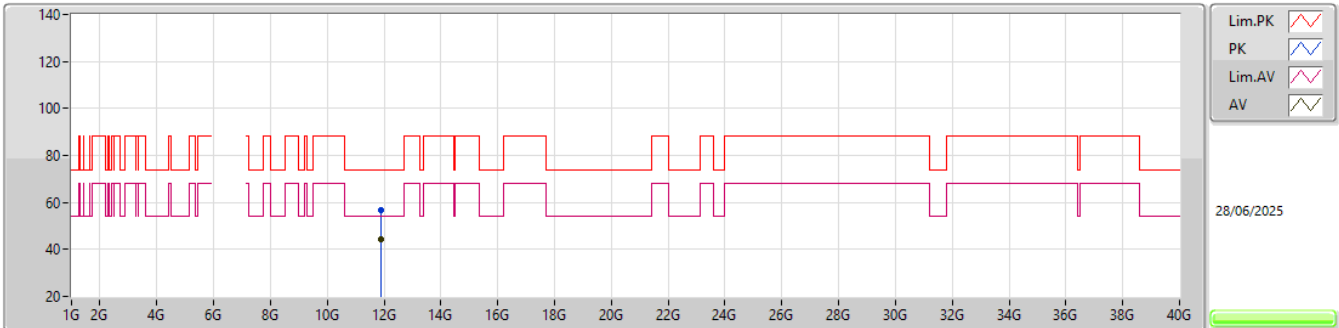


EUT V_2TX
Setting 23.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.91161G	56.64	74.00	-17.36	39.23	3	Vertical	296	2.10	-	38.70	12.08	33.37			
AV	11.90875G	44.28	54.00	-9.72	26.87	3	Vertical	296	2.10	-	38.70	12.08	33.37			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

5955MHz_TX

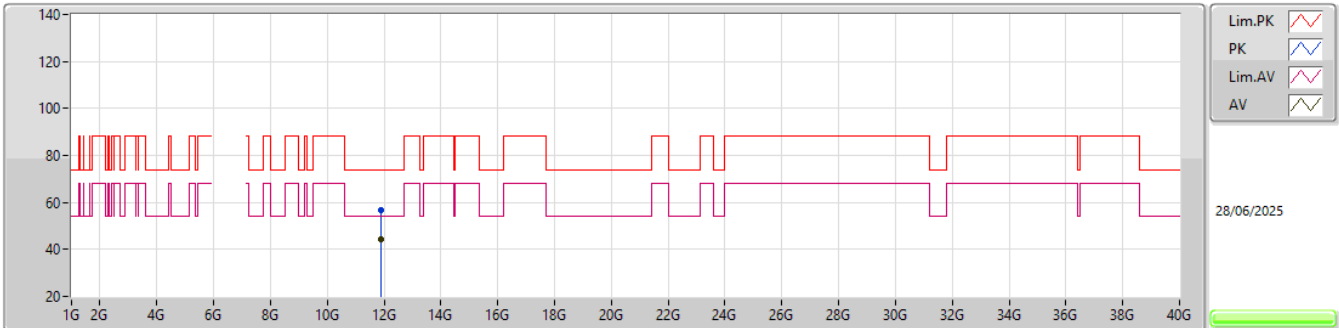


EUT V_2TX
Setting 23.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.90809G	56.72	74.00	-17.28	39.31	3	Horizontal	218	2.03	-	38.70	12.08	33.37			
AV	11.90876G	44.28	54.00	-9.72	26.87	3	Horizontal	218	2.03	-	38.70	12.08	33.37			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5955MHz_TX

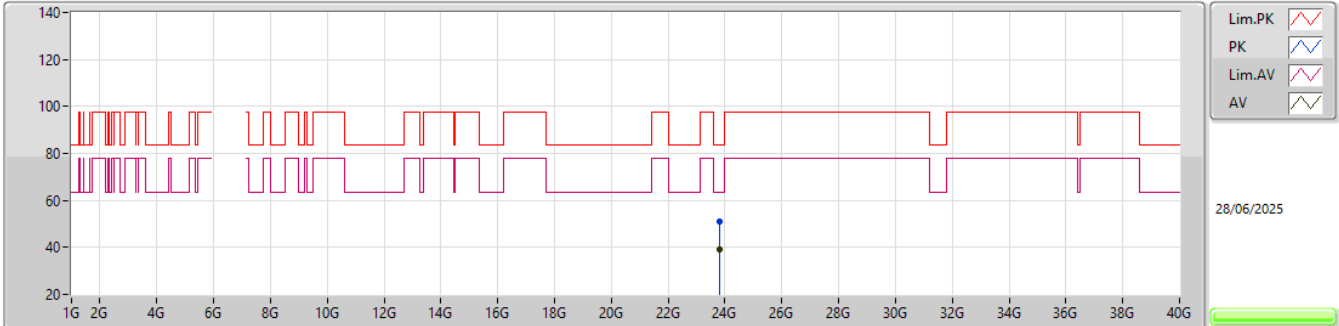EUT V_2TX
Setting 23.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81731G	51.09	83.54	-32.45	36.67	1	Vertical	303	1.60	-	39.10	22.99	47.67			
AV	23.81789G	39.12	63.54	-24.42	24.70	1	Vertical	303	1.60	-	39.10	22.99	47.67			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


5955MHz_TX

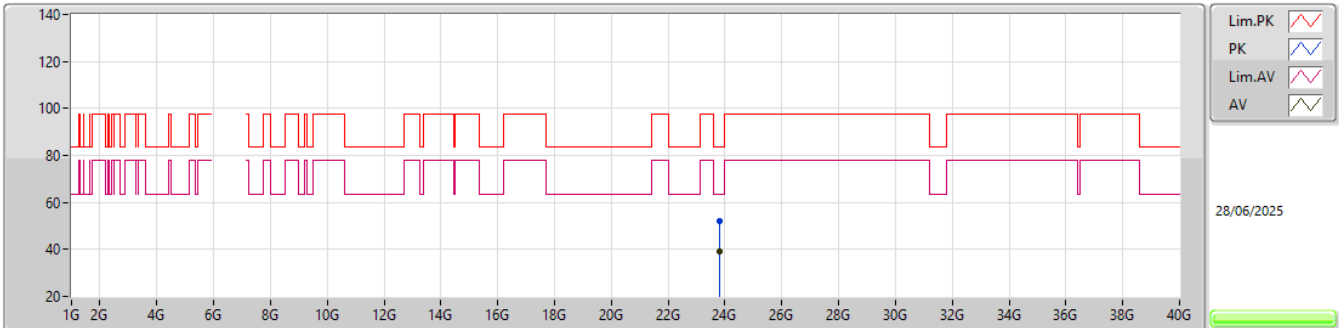EUT V_2TX
Setting 23.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82008G	52.04	83.54	-31.50	37.62	1	Horizontal	271	1.91	-	39.10	22.99	47.67			
AV	23.82004G	39.11	63.54	-24.43	24.69	1	Horizontal	271	1.91	-	39.10	22.99	47.67			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6195MHz_TX

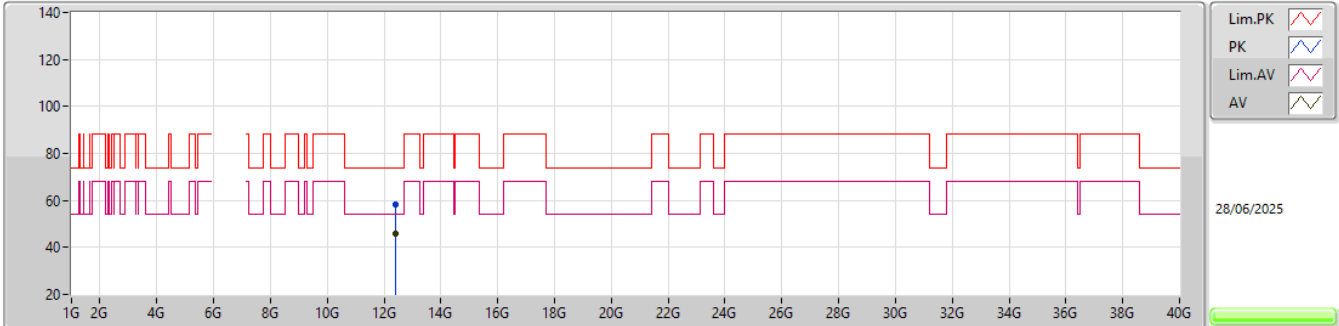


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39035G	58.12	74.00	-15.88	39.70	3	Vertical	259	1.77	-	38.92	12.54	33.04			
AV	12.38943G	45.62	54.00	-8.38	27.20	3	Vertical	259	1.77	-	38.92	12.54	33.04			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6195MHz_TX

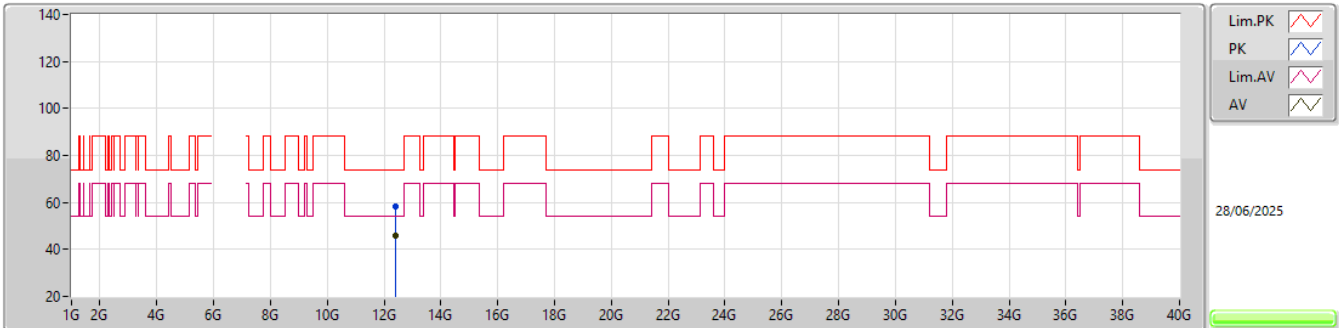


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38869G	58.51	74.00	-15.49	40.10	3	Horizontal	288	1.16	-	38.92	12.53	33.04			
AV	12.39095G	45.62	54.00	-8.38	27.20	3	Horizontal	288	1.16	-	38.92	12.54	33.04			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6195MHz_TX

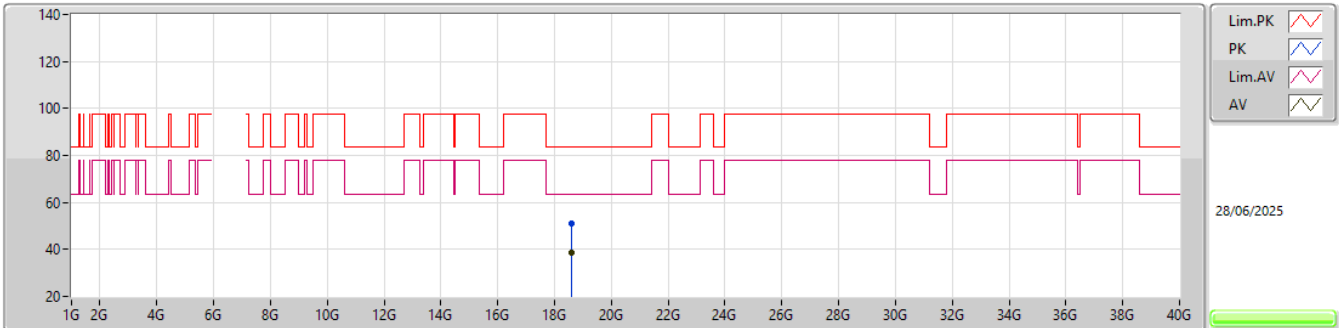EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.58357G	51.04	83.54	-32.50	41.01	1	Vertical	29	2.79	-	37.80	20.61	48.38			
AV	18.58028G	38.57	63.54	-24.97	28.54	1	Vertical	29	2.79	-	37.80	20.61	48.38			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6195MHz_TX

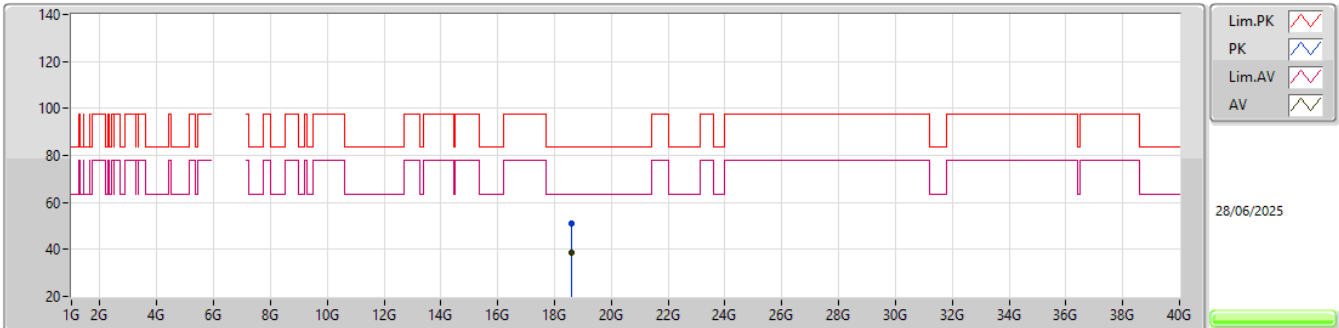EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58167G	51.08	83.54	-32.46	41.05	1	Horizontal	131	2.68	-	37.80	20.61	48.38			
AV	18.5803G	38.57	63.54	-24.97	28.54	1	Horizontal	131	2.68	-	37.80	20.61	48.38			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6415MHz_TX

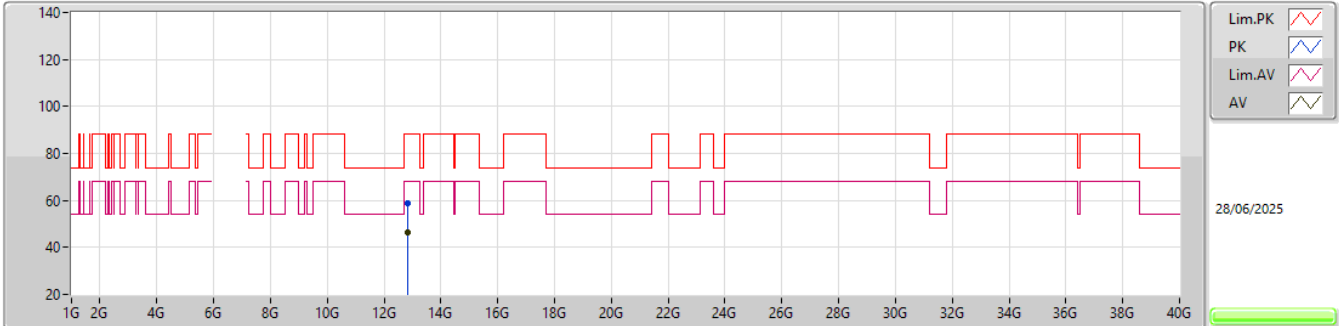


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82896G	58.64	88.20	-29.56	39.20	3	Vertical	11	1.75	-	39.82	12.99	33.37			
RMS	12.82896G	46.23	68.20	-21.97	26.79	3	Vertical	11	1.75	-	39.82	12.99	33.37			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6415MHz_TX

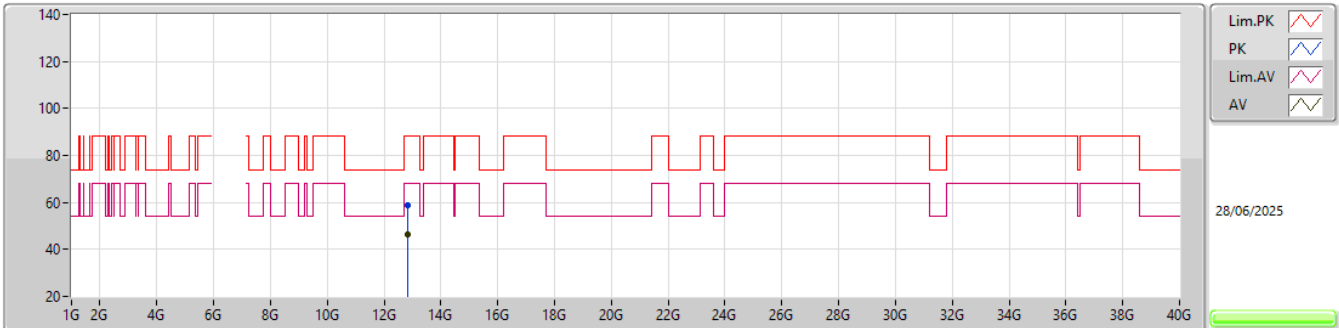


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.82811G	59.02	88.20	-29.18	39.59	3	Horizontal	179	1.74	-	39.81	12.99	33.37			
RMS	12.8289G	46.23	68.20	-21.97	26.79	3	Horizontal	179	1.74	-	39.82	12.99	33.37			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6415MHz_TX

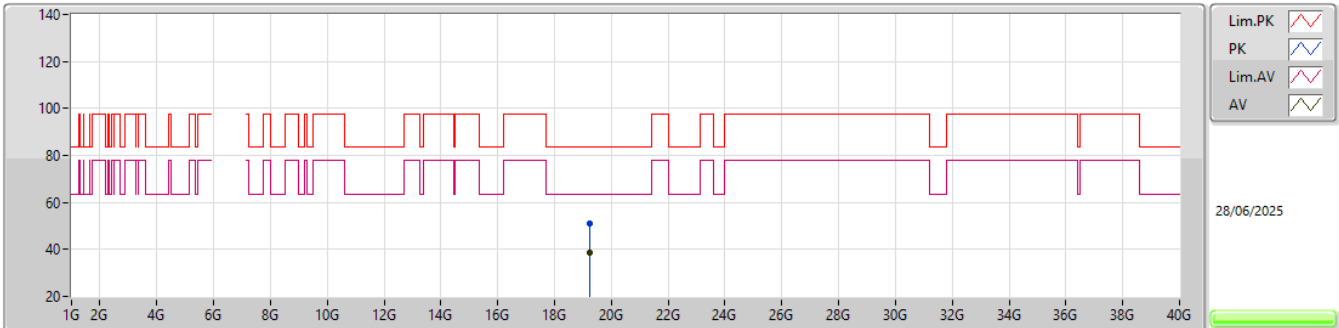


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.24069G	50.78	74.00	-23.22	40.84	1	Vertical	281	2.61	-	37.96	20.78	48.80			
AV	19.24882G	38.73	54.00	-15.27	28.75	1	Vertical	281	2.61	-	38.00	20.78	48.80			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6415MHz_TX

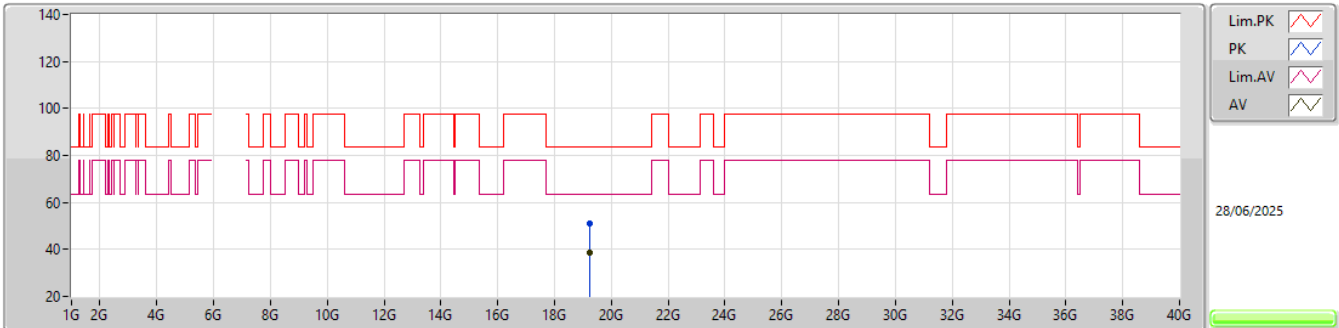EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24473G	50.99	74.00	-23.01	41.03	1	Horizontal	169	2.91	-	37.98	20.78	48.80			
AV	19.2463G	38.63	54.00	-15.37	28.66	1	Horizontal	169	2.91	-	37.99	20.78	48.80			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6435MHz_TX

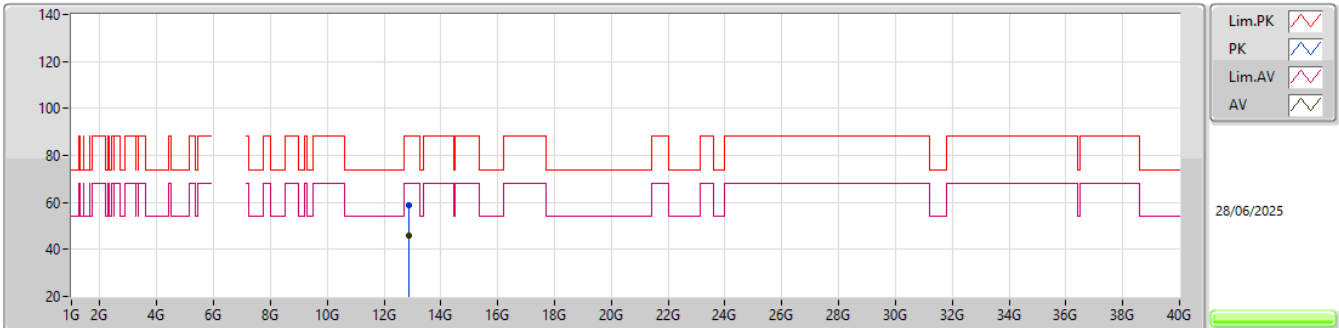


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86873G	58.57	88.20	-29.63	39.06	3	Vertical	91	2.19	-	39.90	13.03	33.42			
RMS	12.8675G	45.67	68.20	-22.53	26.16	3	Vertical	91	2.19	-	39.90	13.03	33.42			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6435MHz_TX

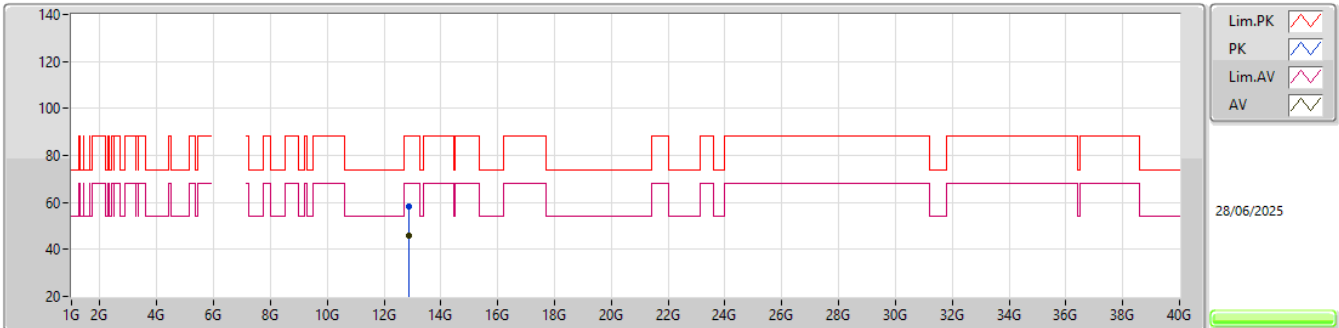EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86904G	58.24	88.20	-29.96	38.73	3	Horizontal	331	1.89	-	39.90	13.03	33.42			
RMS	12.87163G	45.77	68.20	-22.43	26.26	3	Horizontal	331	1.89	-	39.90	13.04	33.43			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6435MHz_TX

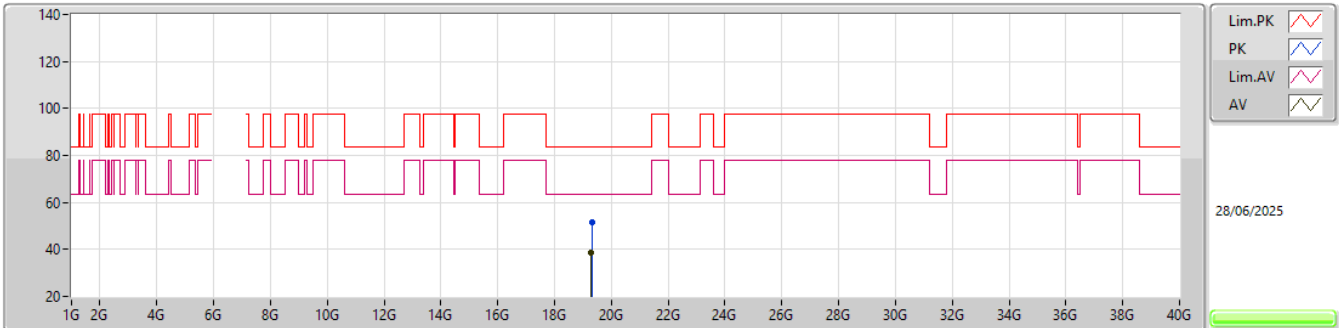EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30958G	51.33	83.54	-32.21	41.52	1	Vertical	166	1.56	-	37.80	20.81	48.80			
AV	19.30091G	38.71	63.54	-24.83	28.90	1	Vertical	166	1.56	-	37.80	20.81	48.80			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6435MHz_TX

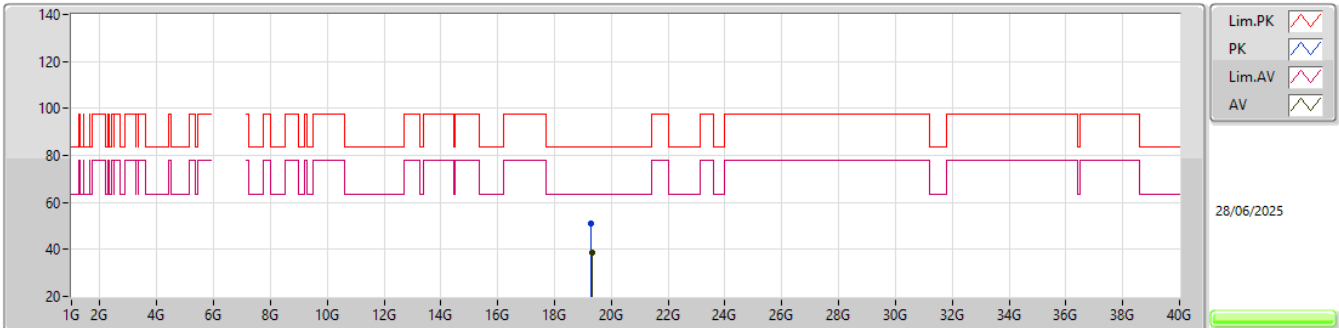EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3035G	51.00	83.54	-32.54	41.19	1	Horizontal	288	1.56	-	37.80	20.81	48.80			
AV	19.30611G	38.80	63.54	-24.74	28.99	1	Horizontal	288	1.56	-	37.80	20.81	48.80			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6475MHz_TX

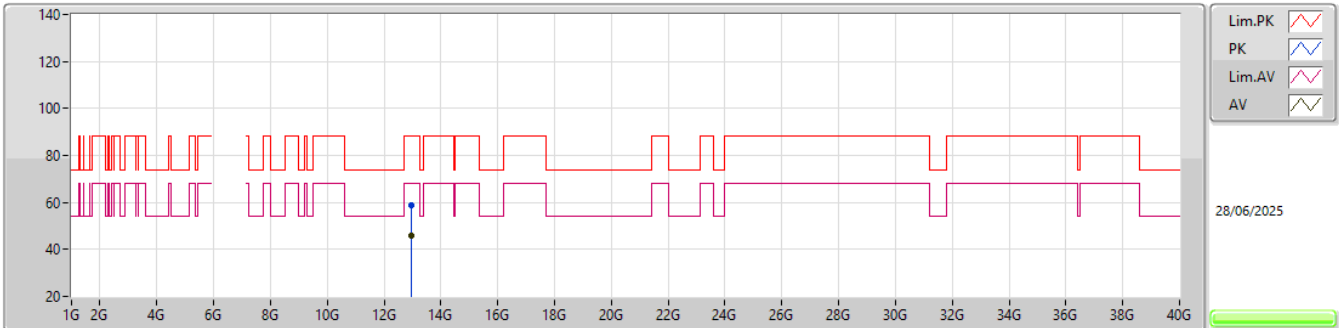EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95249G	58.59	88.20	-29.61	38.81	3	Vertical	239	2.71	-	40.20	13.12	33.54			
RMS	12.9475G	45.87	68.20	-22.33	26.09	3	Vertical	239	2.71	-	40.19	13.12	33.53			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6475MHz_TX

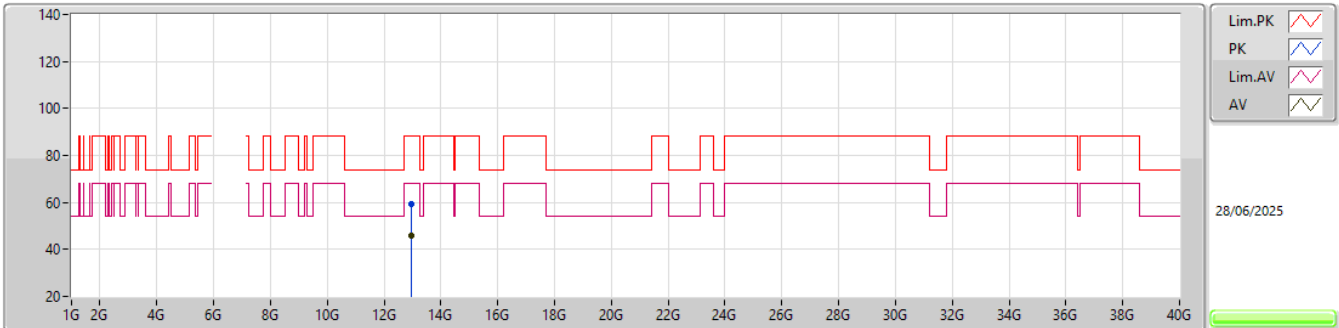EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95035G	59.12	88.20	-29.08	39.33	3	Horizontal	63	2.55	-	40.20	13.12	33.53			
RMS	12.9475G	45.88	68.20	-22.32	26.10	3	Horizontal	63	2.55	-	40.19	13.12	33.53			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6475MHz_TX

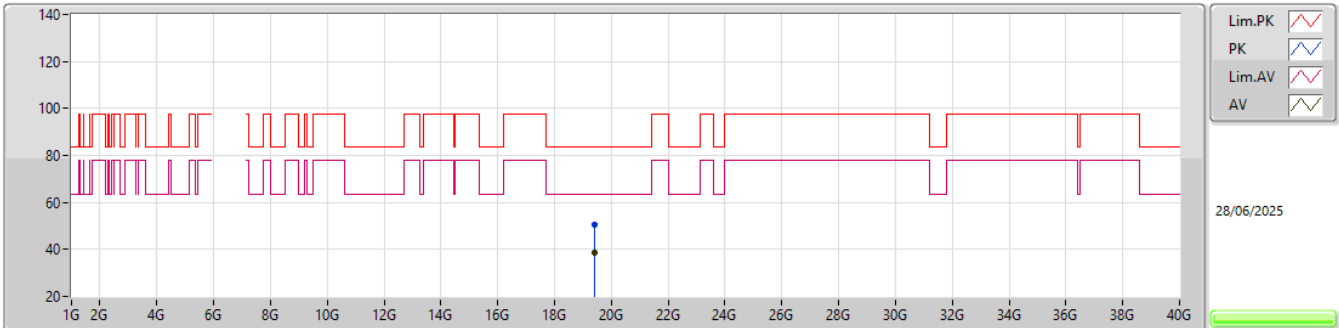


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42359G	50.71	83.54	-32.83	40.83	1	Vertical	79	2.60	-	37.81	20.87	48.80			
AV	19.42274G	38.53	63.54	-25.01	28.65	1	Vertical	79	2.60	-	37.81	20.87	48.80			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6475MHz_TX

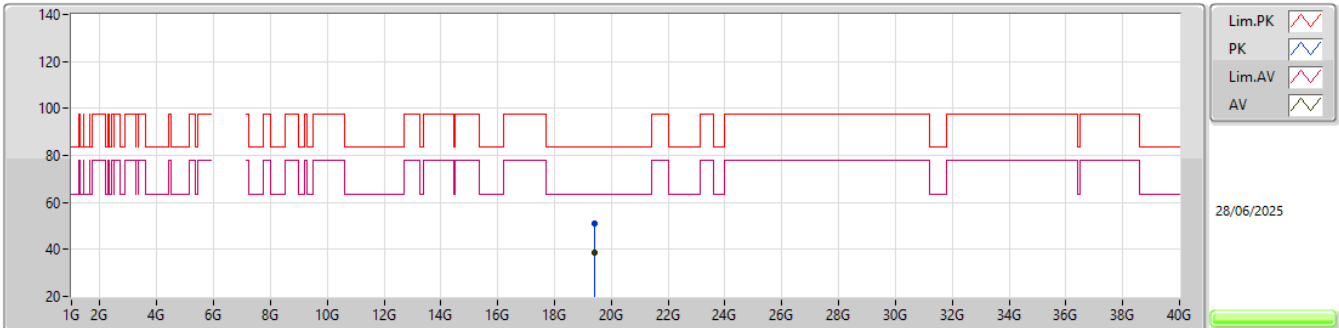EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42751G	51.08	83.54	-32.46	41.22	1	Horizontal	322	1.81	-	37.79	20.87	48.80			
AV	19.42252G	38.53	63.54	-25.01	28.65	1	Horizontal	322	1.81	-	37.81	20.87	48.80			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6515MHz_TX

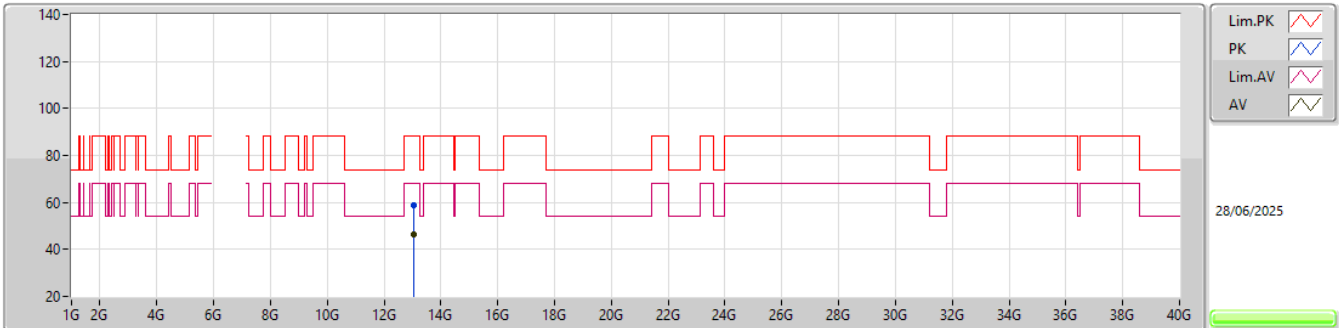


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.02927G	58.57	88.20	-29.63	38.98	3	Vertical	93	1.45	-	39.98	13.20	33.59			
RMS	13.02752G	46.25	68.20	-21.95	26.65	3	Vertical	93	1.45	-	39.99	13.20	33.59			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6515MHz_TX

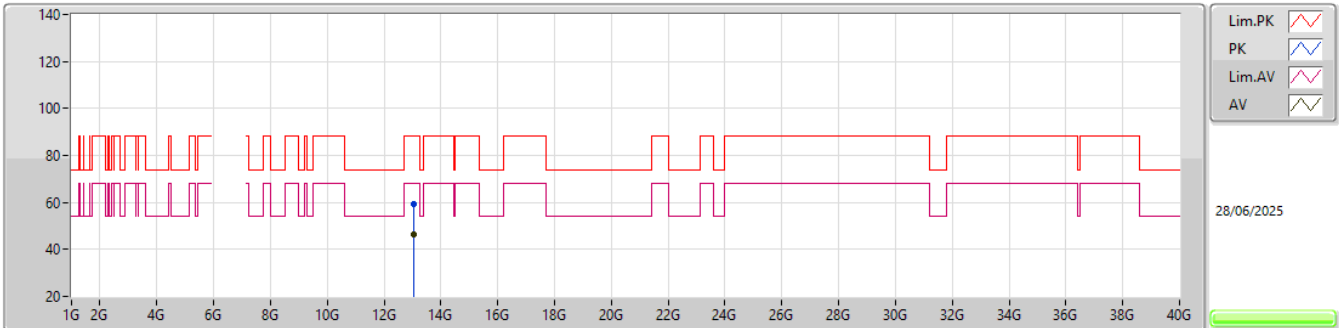


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03094G	59.26	88.20	-28.94	39.67	3	Horizontal	28	2.26	-	39.98	13.20	33.59			
RMS	13.02782G	46.14	68.20	-22.06	26.54	3	Horizontal	28	2.26	-	39.99	13.20	33.59			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6515MHz_TX

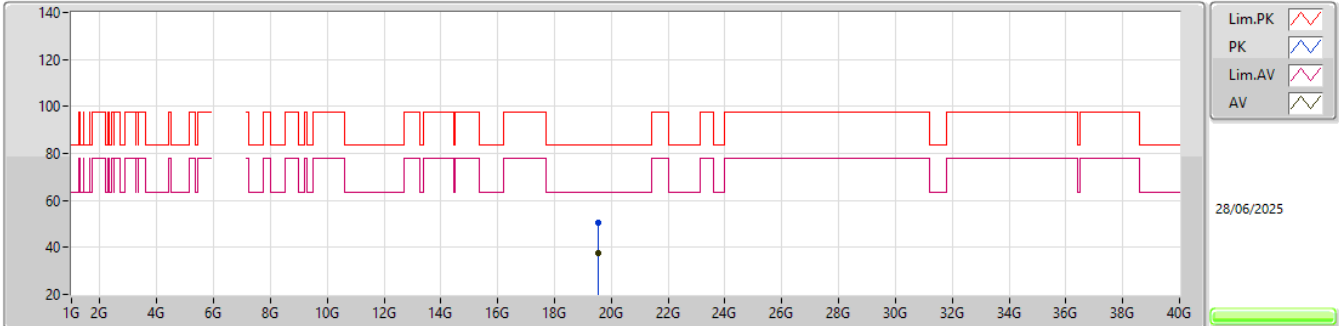EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5444G	50.47	83.54	-33.07	40.68	1	Vertical	233	2.02	-	37.71	20.88	48.80			
AV	19.54162G	37.43	63.54	-26.11	27.63	1	Vertical	233	2.02	-	37.72	20.88	48.80			

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6515MHz_TX

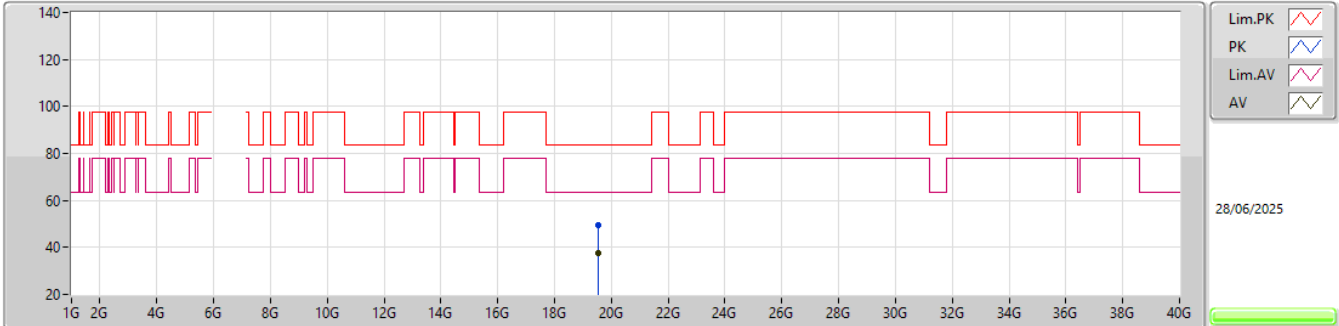


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54348G	49.64	83.54	-33.90	39.85	1	Horizontal	64	2.22	-	37.71	20.88	48.80			
AV	19.54124G	37.43	63.54	-26.11	27.63	1	Horizontal	64	2.22	-	37.72	20.88	48.80			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6535MHz_TX

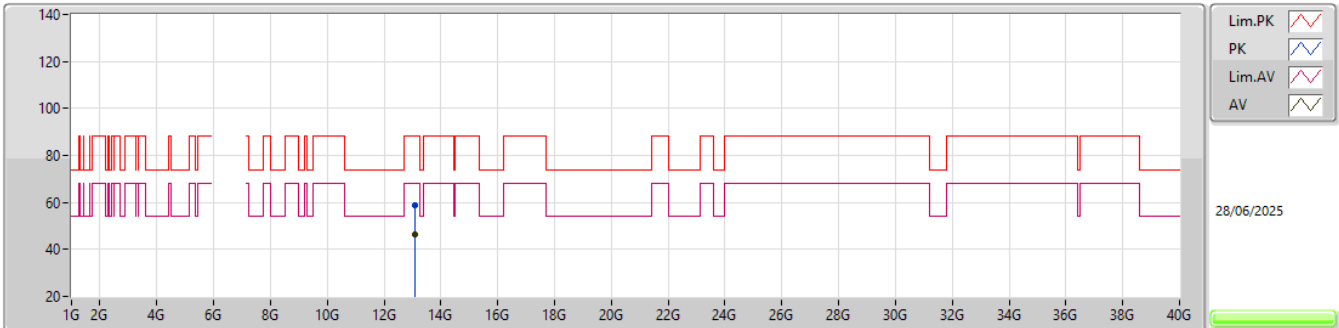


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06982G	58.58	88.20	-29.62	38.97	3	Vertical	249	1.02	-	39.94	13.24	33.57			
RMS	13.07099G	46.23	68.20	-21.97	26.62	3	Vertical	249	1.02	-	39.94	13.24	33.57			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6535MHz_TX

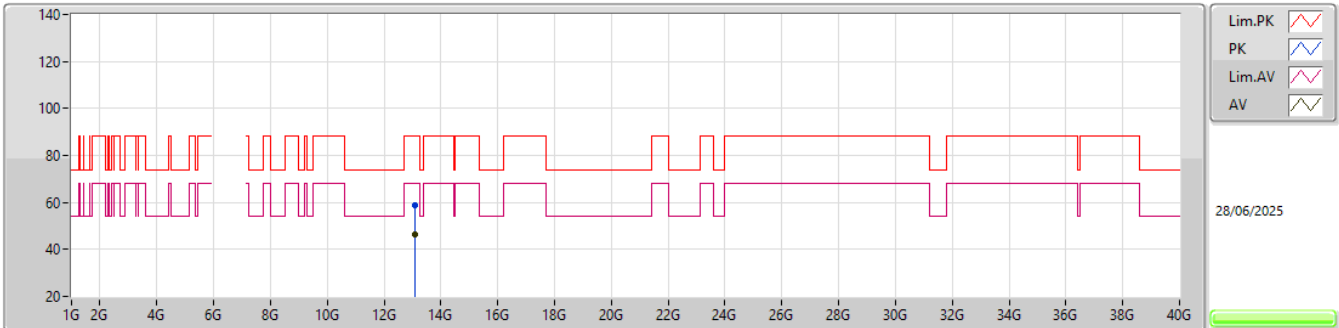EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07057G	58.54	88.20	-29.66	38.93	3	Horizontal	60	1.50	-	39.94	13.24	33.57			
RMS	13.07004G	46.22	68.20	-21.98	26.61	3	Horizontal	60	1.50	-	39.94	13.24	33.57			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6535MHz_TX

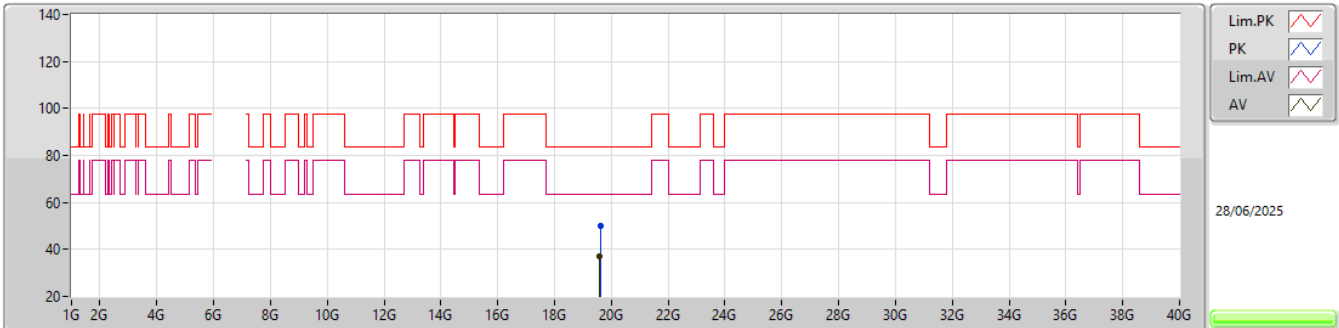


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60801G	49.84	83.54	-33.70	40.11	1	Vertical	264	2.93	-	37.70	20.83	48.80			
AV	19.60005G	37.12	63.54	-26.42	27.38	1	Vertical	264	2.93	-	37.70	20.84	48.80			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6535MHz_TX

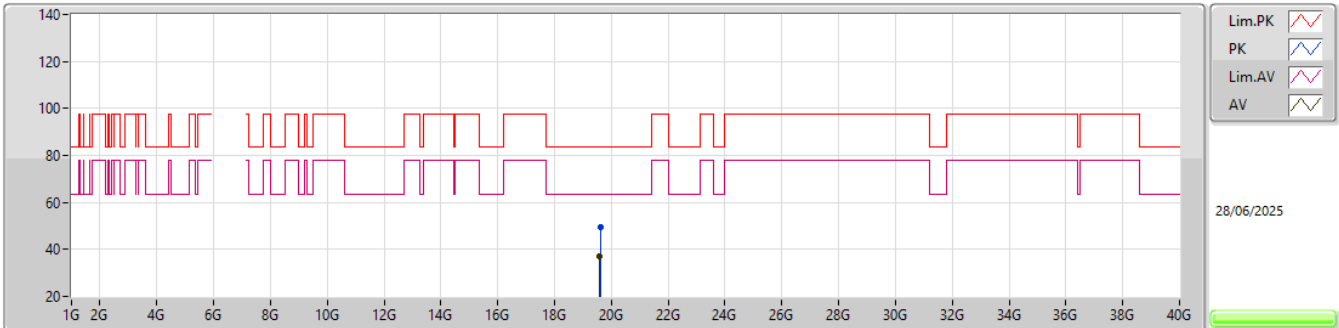EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60717G	49.53	83.54	-34.01	39.80	1	Horizontal	232	1.97	-	37.70	20.83	48.80			
AV	19.60017G	37.12	63.54	-26.42	27.38	1	Horizontal	232	1.97	-	37.70	20.84	48.80			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6695MHz_TX

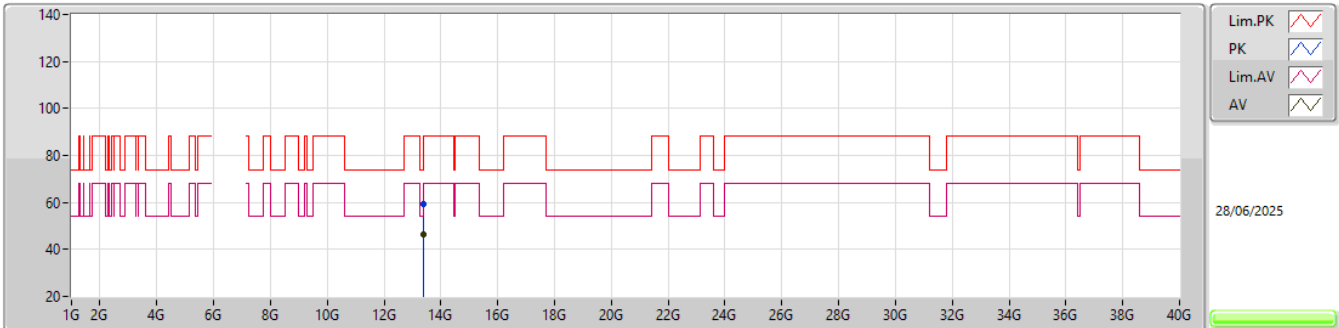EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38648G	59.18	74.00	-14.82	38.65	3	Vertical	159	1.78	-	40.40	13.57	33.44			
AV	13.39286G	46.48	54.00	-7.52	25.93	3	Vertical	159	1.78	-	40.40	13.58	33.43			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6695MHz_TX

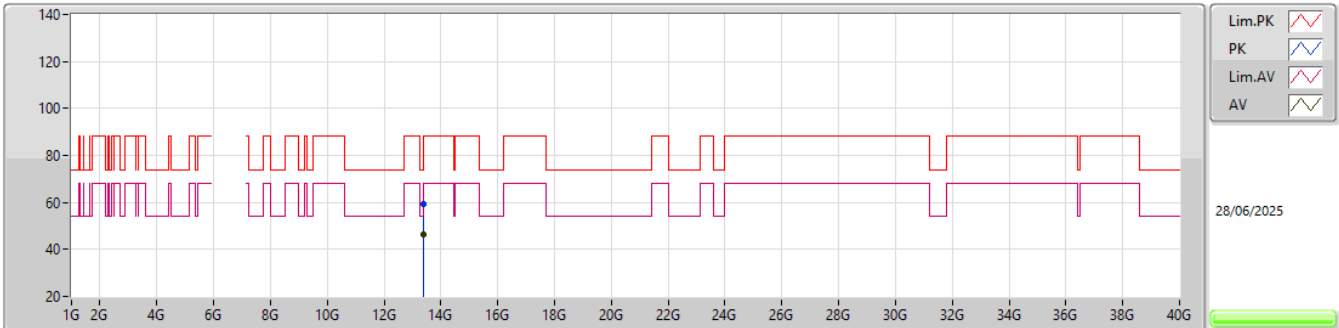


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38828G	59.11	74.00	-14.89	38.58	3	Horizontal	169	2.46	-	40.40	13.57	33.44			
AV	13.39047G	46.47	54.00	-7.53	25.93	3	Horizontal	169	2.46	-	40.40	13.58	33.44			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6695MHz_TX

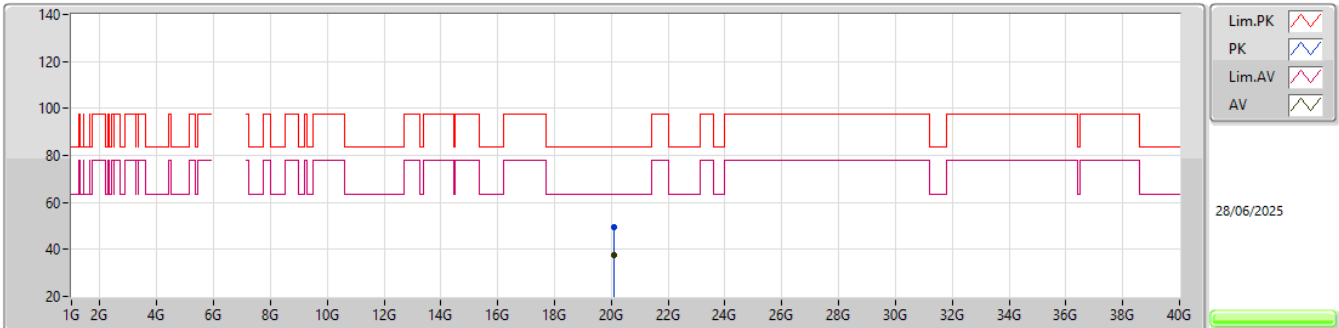EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08404G	49.69	83.54	-33.85	39.97	1	Vertical	60	2.28	-	37.80	20.70	48.78			
AV	20.08G	37.60	63.54	-25.94	27.88	1	Vertical	60	2.28	-	37.80	20.70	48.78			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6695MHz_TX

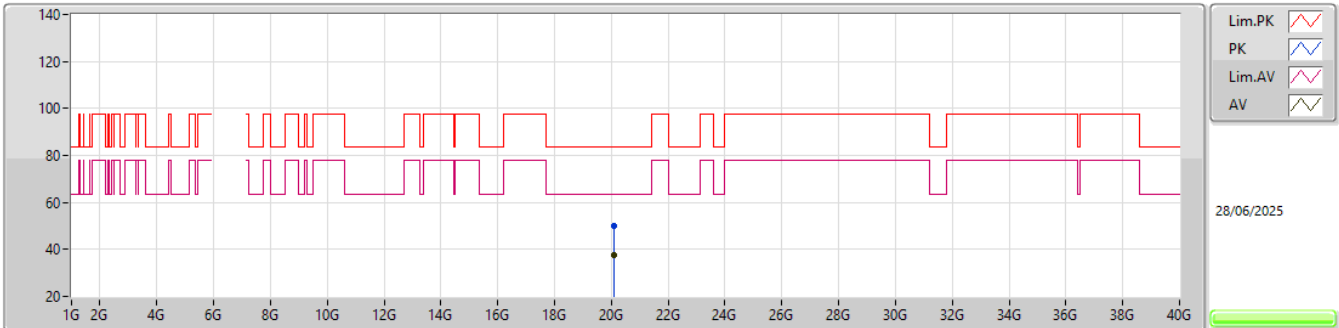EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08292G	49.81	83.54	-33.73	40.09	1	Horizontal	36	1.39	-	37.80	20.70	48.78			
AV	20.0809G	37.61	63.54	-25.93	27.89	1	Horizontal	36	1.39	-	37.80	20.70	48.78			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6875MHz_TX

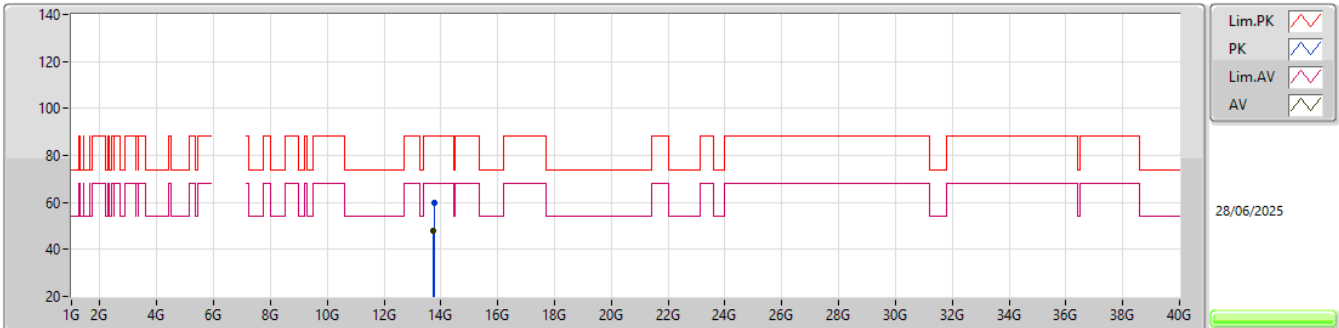


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75103G	59.97	88.20	-28.23	38.99	3	Vertical	187	2.47	-	40.50	13.95	33.47			
RMS	13.7465G	48.01	68.20	-20.19	27.02	3	Vertical	187	2.47	-	40.51	13.95	33.47			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6875MHz_TX

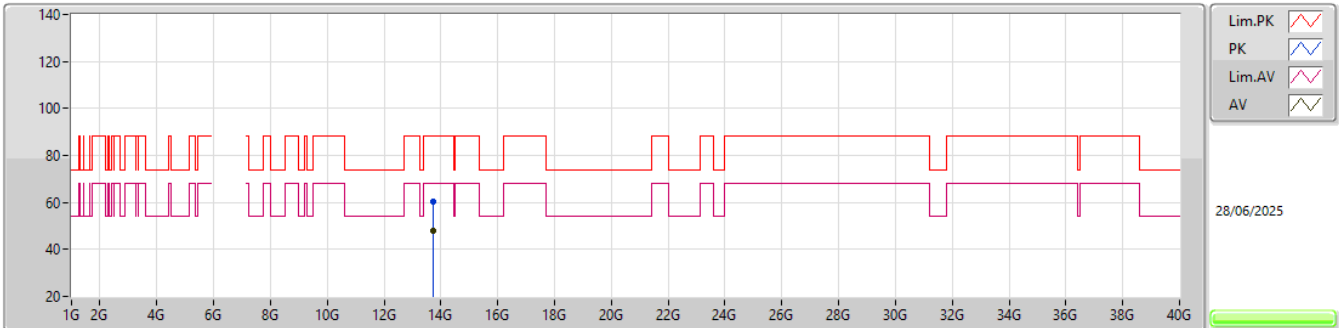


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.74881G	60.43	88.20	-27.77	39.45	3	Horizontal	327	2.45	-	40.50	13.95	33.47			
RMS	13.74678G	48.01	68.20	-20.19	27.02	3	Horizontal	327	2.45	-	40.51	13.95	33.47			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6875MHz_TX

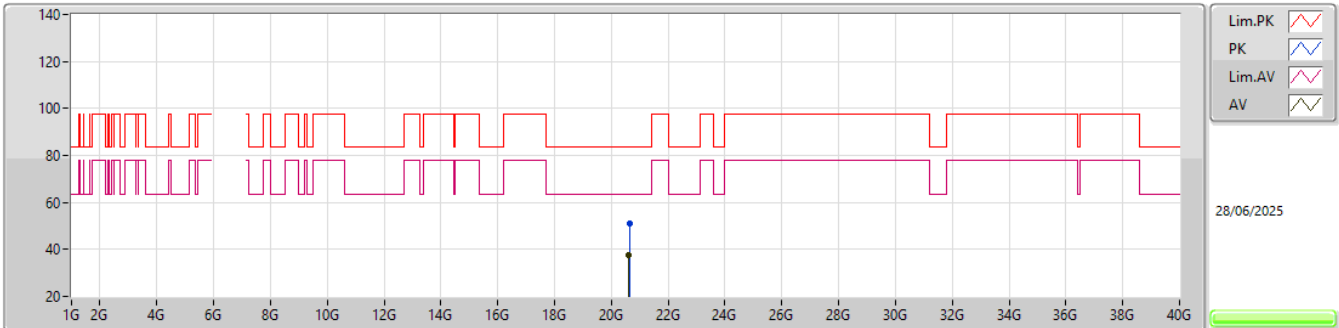


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.62868G	51.07	83.54	-32.47	40.28	1	Vertical	236	2.87	-	37.90	21.59	48.70			
AV	20.62006G	37.68	63.54	-25.86	26.90	1	Vertical	236	2.87	-	37.90	21.58	48.70			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6875MHz_TX

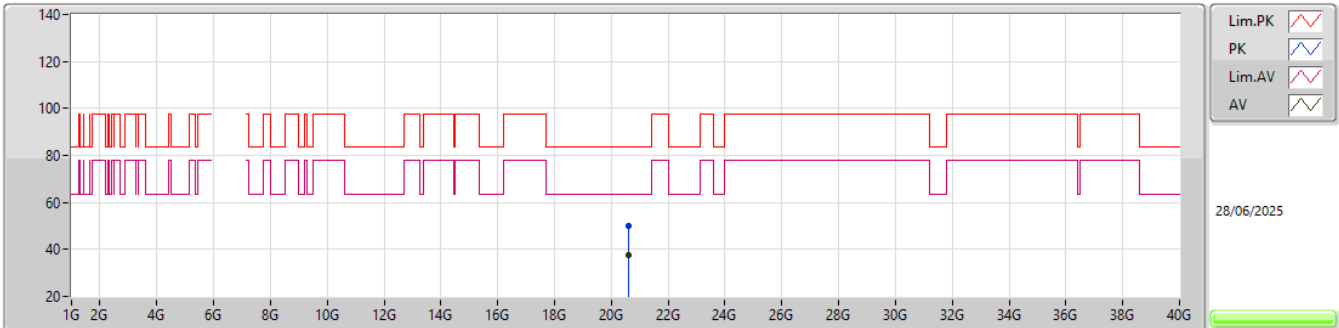


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.62088G	50.21	83.54	-33.33	39.43	1	Horizontal	311	2.42	-	37.90	21.58	48.70			
AV	20.62004G	37.68	63.54	-25.86	26.90	1	Horizontal	311	2.42	-	37.90	21.58	48.70			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6895MHz_TX

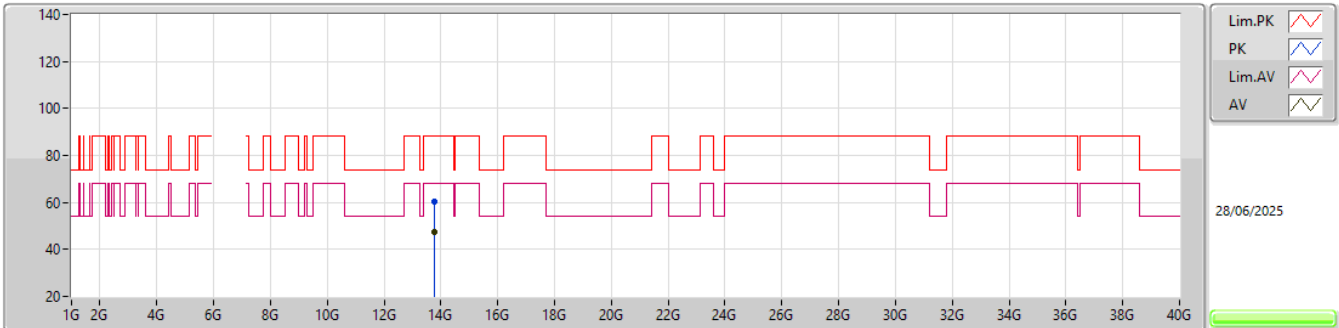


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.78654G	60.22	88.20	-27.98	39.28	3	Vertical	104	2.03	-	40.43	13.99	33.48			
RMS	13.7867G	47.39	68.20	-20.81	26.45	3	Vertical	104	2.03	-	40.43	13.99	33.48			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6895MHz_TX

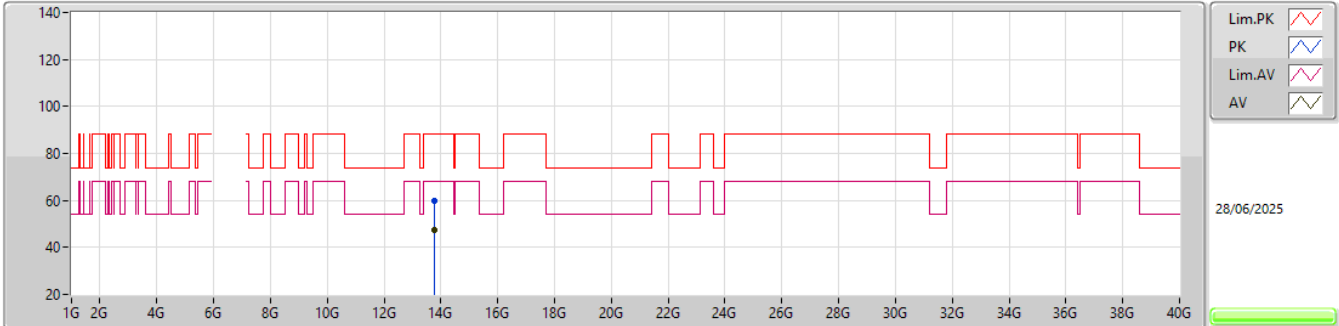


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.79056G	60.02	88.20	-28.18	39.09	3	Horizontal	125	2.37	-	40.42	13.99	33.48			
RMS	13.7881G	47.58	68.20	-20.62	26.65	3	Horizontal	125	2.37	-	40.42	13.99	33.48			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6895MHz_TX

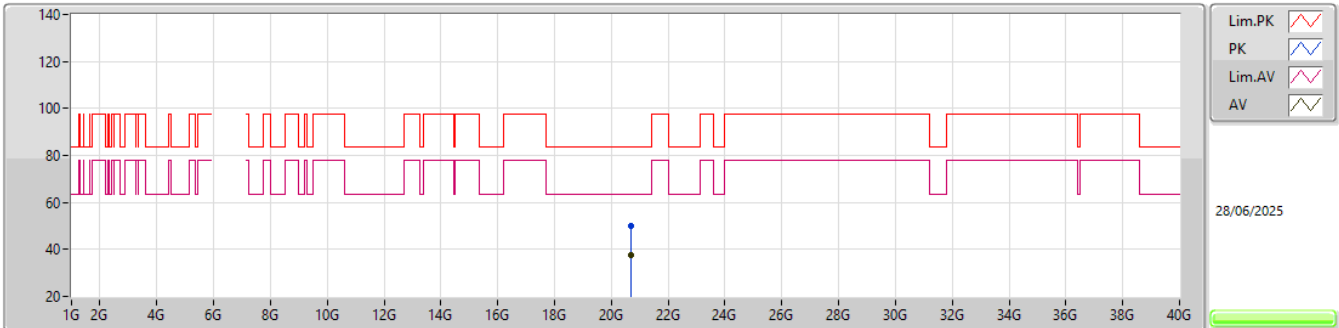EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.68006G	50.06	83.54	-33.48	39.22	1	Vertical	202	1.30	-	37.90	21.64	48.70			
AV	20.68012G	37.69	63.54	-25.85	26.85	1	Vertical	202	1.30	-	37.90	21.64	48.70			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6895MHz_TX

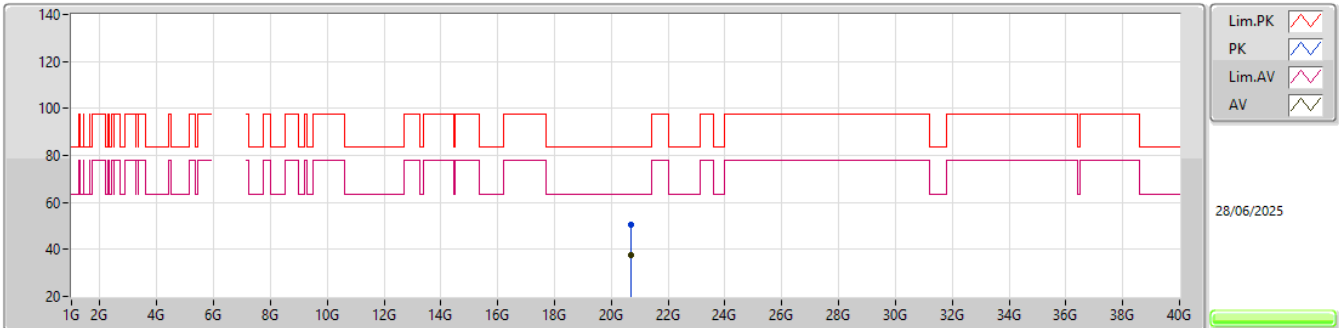


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.68039G	50.42	83.54	-33.12	39.58	1	Horizontal	256	2.01	-	37.90	21.64	48.70			
AV	20.6801G	37.69	63.54	-25.85	26.85	1	Horizontal	256	2.01	-	37.90	21.64	48.70			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6995MHz_TX

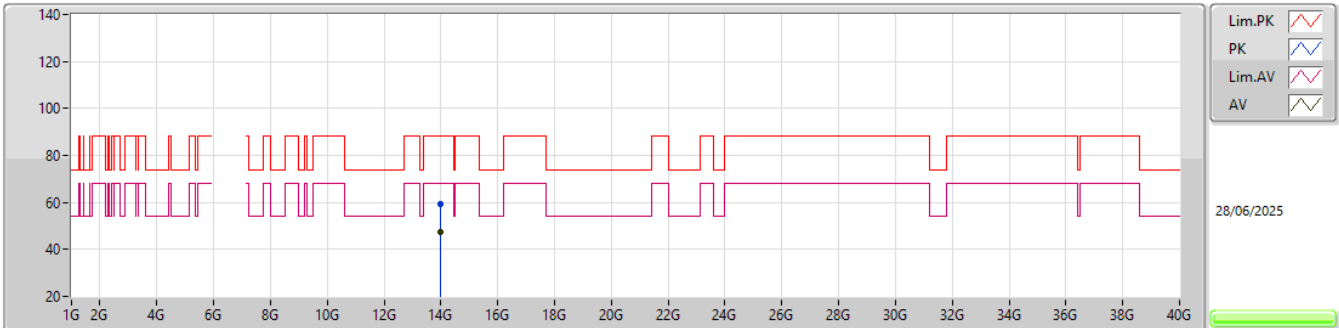


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.99312G	59.18	88.20	-29.02	37.93	3	Vertical	96	1.92	-	40.60	14.20	33.55			
RMS	13.99306G	47.26	68.20	-20.94	26.01	3	Vertical	96	1.92	-	40.60	14.20	33.55			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6995MHz_TX

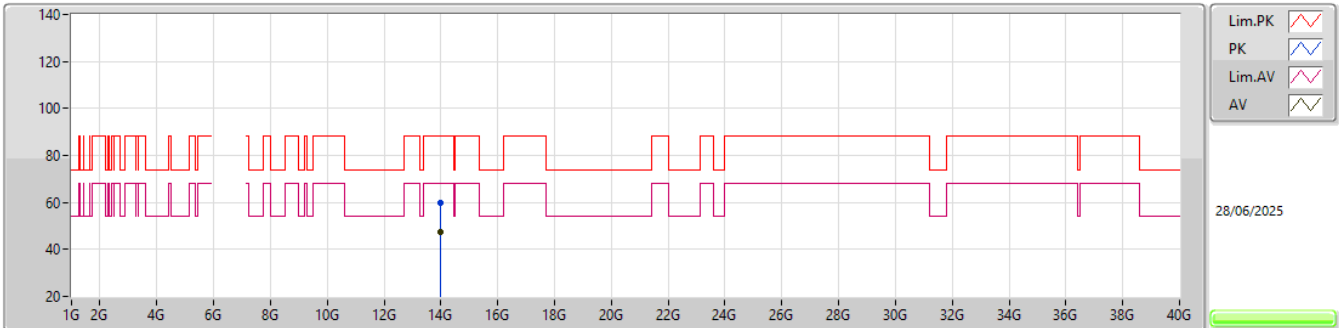


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.98866G	59.60	88.20	-28.60	38.35	3	Horizontal	303	2.67	-	40.60	14.20	33.55			
RMS	13.99299G	47.26	68.20	-20.94	26.01	3	Horizontal	303	2.67	-	40.60	14.20	33.55			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6995MHz_TX

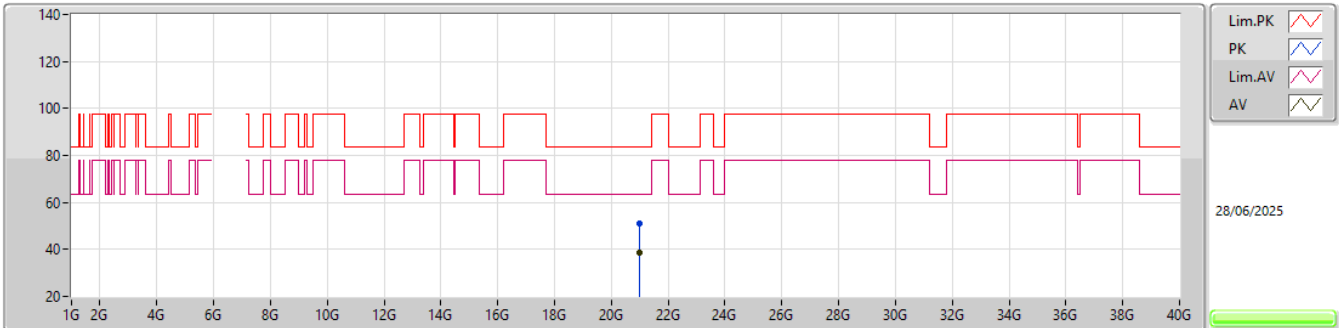


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.98604G	51.06	83.54	-32.48	39.83	1	Vertical	5	2.03	-	37.97	21.96	48.70			
AV	20.98534G	38.45	63.54	-25.09	27.22	1	Vertical	5	2.03	-	37.97	21.96	48.70			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6995MHz_TX

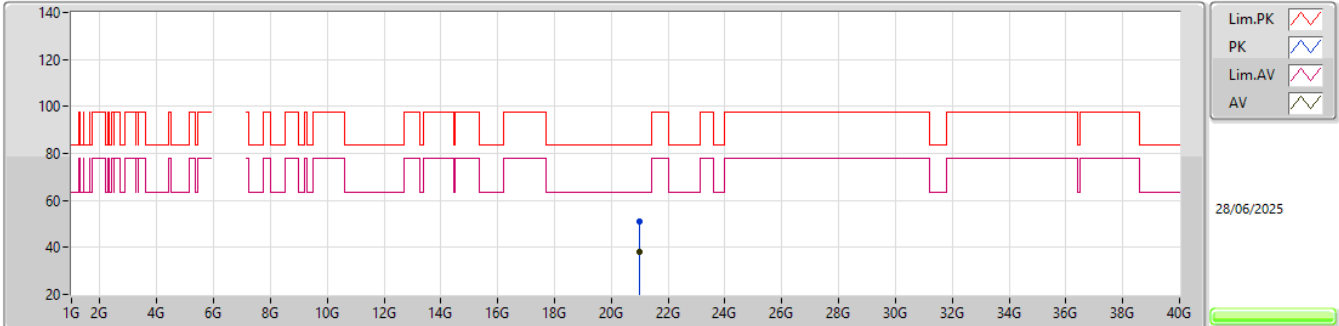EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.98113G	50.99	83.54	-32.55	39.78	1	Horizontal	43	2.47	-	37.96	21.95	48.70			
AV	20.98843G	38.36	63.54	-25.18	27.12	1	Horizontal	43	2.47	-	37.98	21.96	48.70			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7095MHz_TX

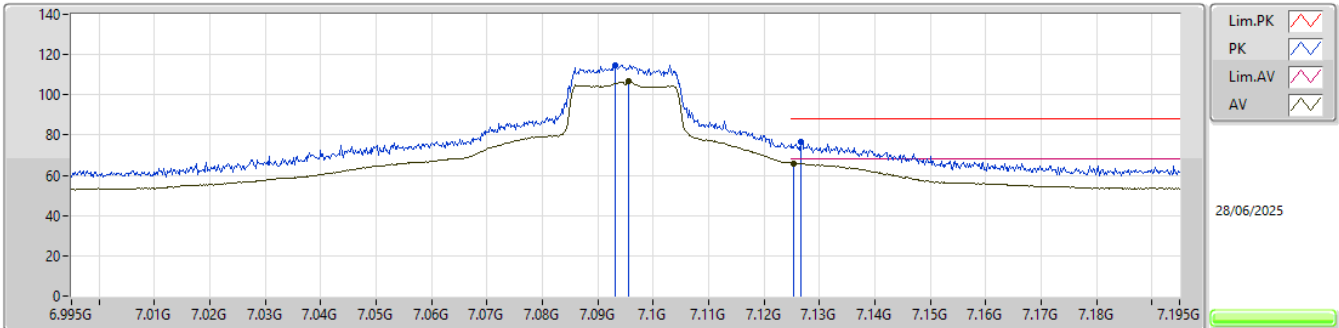


EUT_V_2TX
Setting 21.5
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0932G	114.66	Inf	-Inf	104.00	3	Vertical	32	2.80	-	36.56	9.27	35.17			
RMS	7.0956G	106.51	Inf	-Inf	95.84	3	Vertical	32	2.80	-	36.57	9.27	35.17			
PK	7.1266G	76.47	88.20	-11.73	65.54	3	Vertical	32	2.80	-	36.76	9.28	35.11			
RMS	7.1254G	66.07	68.20	-2.13	55.15	3	Vertical	32	2.80	-	36.75	9.28	35.11			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7095MHz_TX

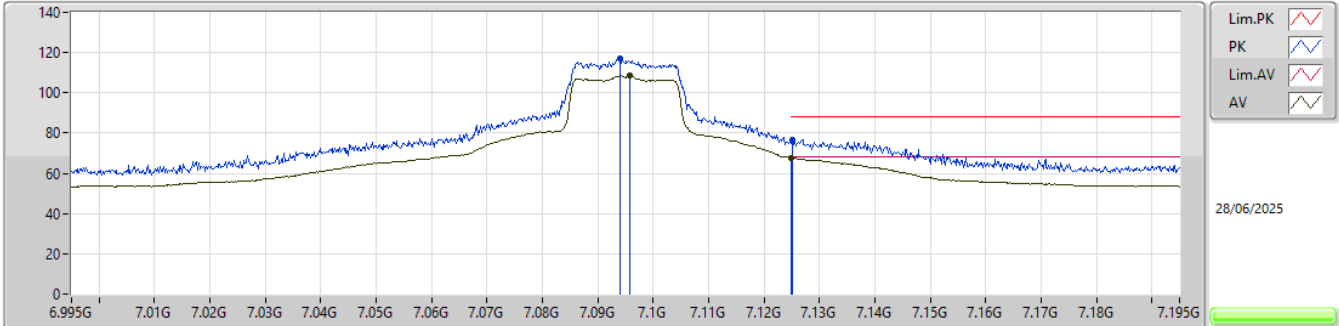


EUT_V_2TX
Setting 21.5
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.094G	117.20	Inf	-Inf	106.54	3	Horizontal	311	1.80	-	36.56	9.27	35.17			
RMS	7.0958G	108.57	Inf	-Inf	97.90	3	Horizontal	311	1.80	-	36.57	9.27	35.17			
PK	7.1252G	76.67	88.20	-11.53	65.75	3	Horizontal	311	1.80	-	36.75	9.28	35.11			
RMS	7.125G	67.82	68.20	-0.38	56.90	3	Horizontal	311	1.80	-	36.75	9.28	35.11			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7095MHz_TX

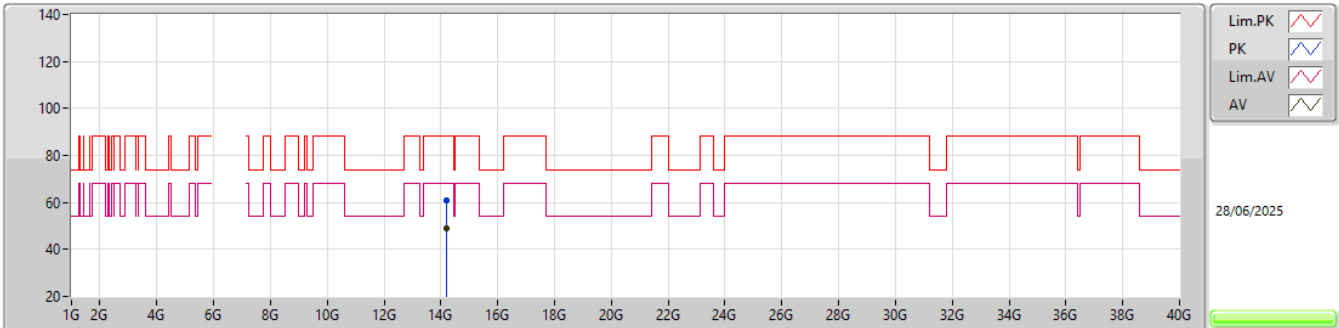


EUT_V_2TX
Setting 21.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.18574G	61.10	88.20	-27.10	39.88	3	Vertical	229	1.94	-	40.60	14.21	33.59			
RMS	14.18427G	48.93	68.20	-19.27	27.71	3	Vertical	229	1.94	-	40.60	14.21	33.59			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7095MHz_TX

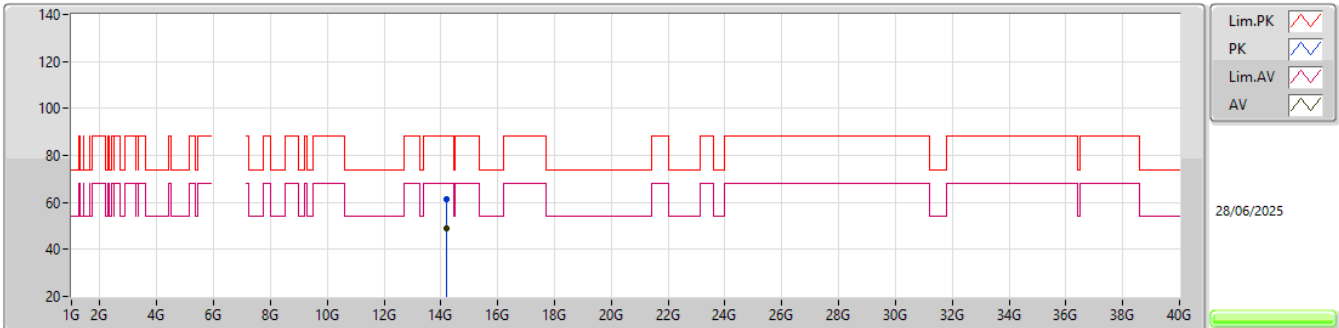


EUT_V_2TX
Setting 21.5
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.18665G	61.31	88.20	-26.89	40.09	3	Horizontal	24	1.02	-	40.60	14.21	33.59			
RMS	14.18501G	48.93	68.20	-19.27	27.71	3	Horizontal	24	1.02	-	40.60	14.21	33.59			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7095MHz_TX

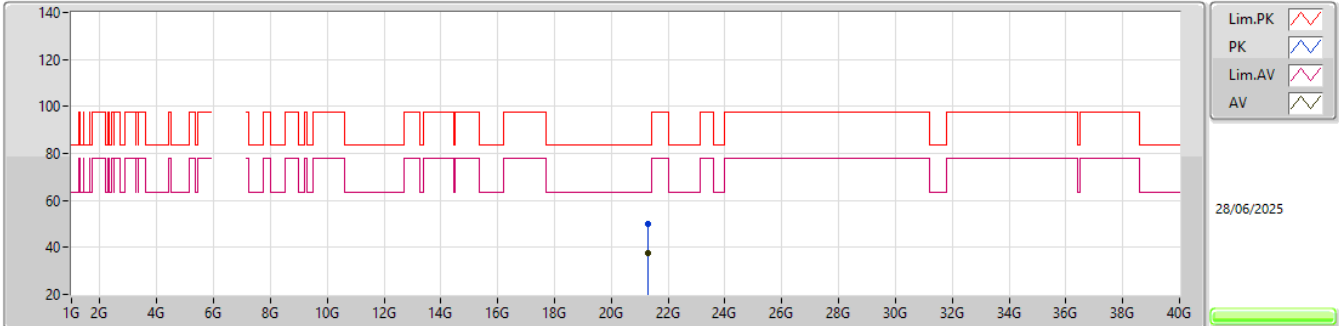


EUT V_2TX
Setting 21.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28731G	50.14	83.54	-33.40	38.92	1	Vertical	30	1.58	-	38.07	21.79	48.64			
AV	21.28107G	37.71	63.54	-25.83	26.49	1	Vertical	30	1.58	-	38.06	21.80	48.64			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX


7095MHz_TX

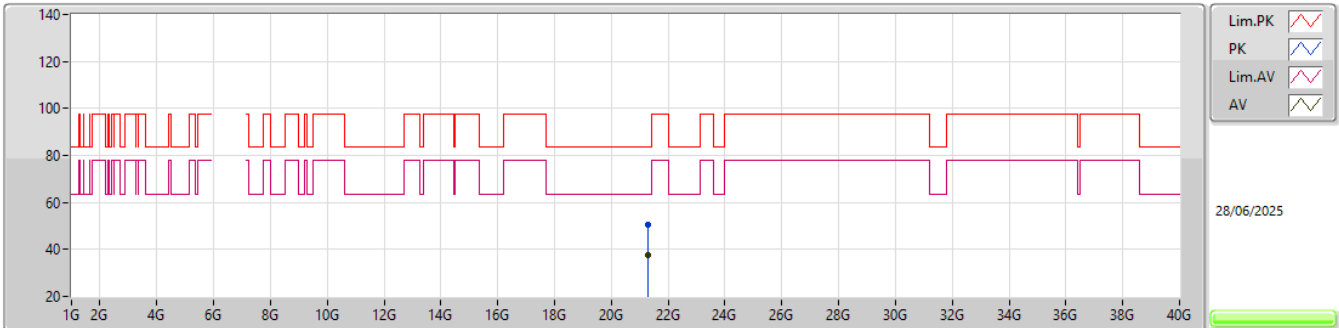EUT_V_2TX
Setting 21.5
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28498G	50.75	83.54	-32.79	39.53	1	Horizontal	350	2.94	-	38.07	21.79	48.64			
AV	21.28321G	37.70	63.54	-25.84	26.48	1	Horizontal	350	2.94	-	38.07	21.79	48.64			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7115MHz_TX

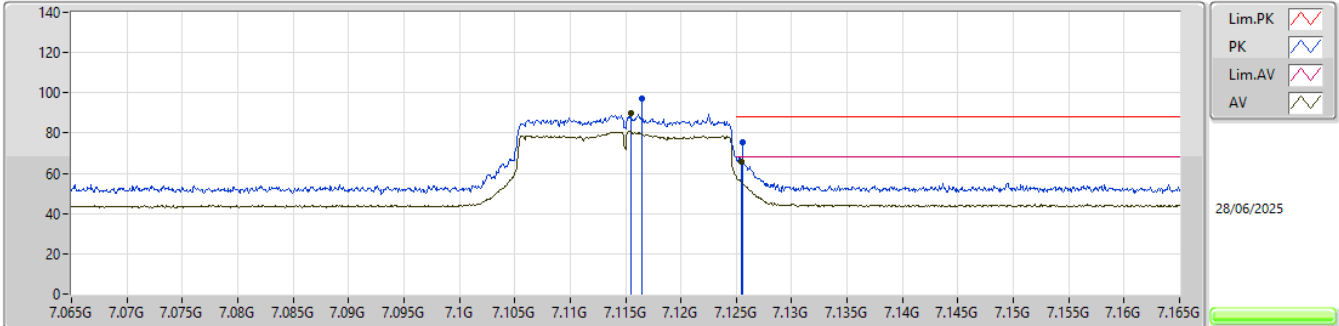


EUT Y_2TX
Setting 2
05-L-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1165G	97.18	Inf	-Inf	86.33	3	Vertical	35.9	1.80	BP 1MHz	36.70	9.28	35.13			
RMS	7.1155G	89.64	Inf	-Inf	78.80	3	Vertical	35.9	1.80	BP 1MHz	36.69	9.28	35.13			
PK	7.1255G	75.42	88.20	-12.78	64.50	3	Vertical	35.9	1.80	BP 1MHz	36.75	9.28	35.11			
RMS	7.1255G	65.50	68.20	-2.70	54.58	3	Vertical	35.9	1.80	BP 1MHz	36.75	9.28	35.11			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7115MHz_TX

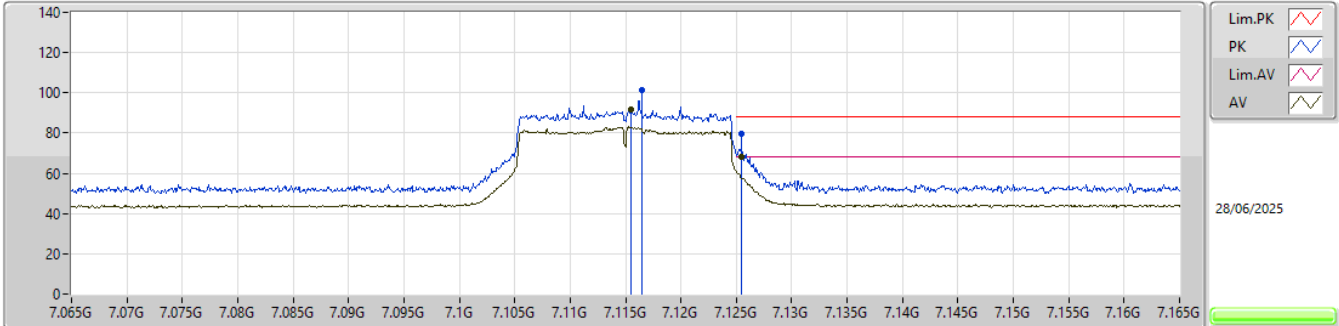


EUT Y_2TX
Setting 2
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.1165G	101.24	Inf	-Inf	90.39	3	Horizontal	316	1.80	BP 1MHz	36.70	9.28	35.13			
RMS	7.1155G	91.93	Inf	-Inf	81.09	3	Horizontal	316	1.80	BP 1MHz	36.69	9.28	35.13			
PK	7.1255G	79.52	88.20	-8.68	68.60	3	Horizontal	316	1.80	BP 1MHz	36.75	9.28	35.11			
RMS	7.1255G	67.97	68.20	-0.23	57.05	3	Horizontal	316	1.80	BP 1MHz	36.75	9.28	35.11			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX


7115MHz_TX

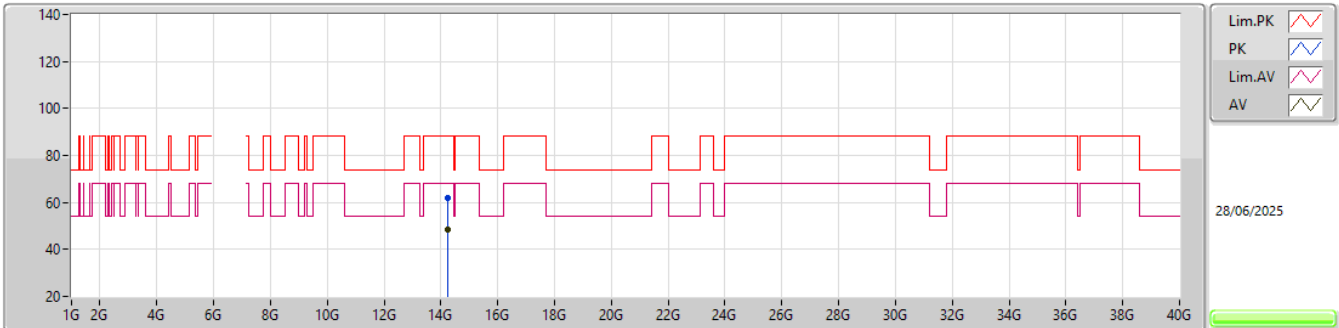EUT_V_2TX
Setting 2
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.2269G	61.77	88.20	-26.43	40.61	3	Vertical	95	2.36	-	40.55	14.21	33.60			
RMS	14.2325G	48.66	68.20	-19.54	27.51	3	Vertical	95	2.36	-	40.54	14.21	33.60			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

7115MHz_TX

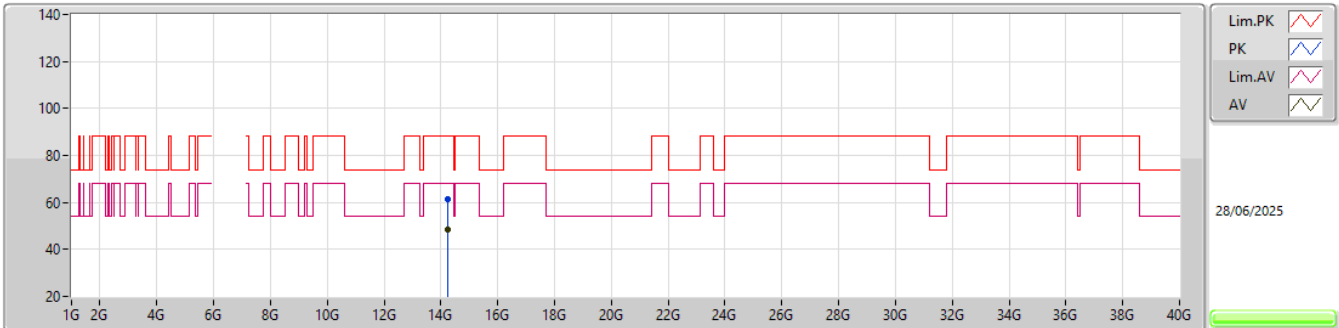


EUT_V_2TX
Setting 2
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.22881G	61.34	88.20	-26.86	40.19	3	Horizontal	26	1.45	-	40.54	14.21	33.60			
RMS	14.23239G	48.66	68.20	-19.54	27.51	3	Horizontal	26	1.45	-	40.54	14.21	33.60			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX


7115MHz_TX

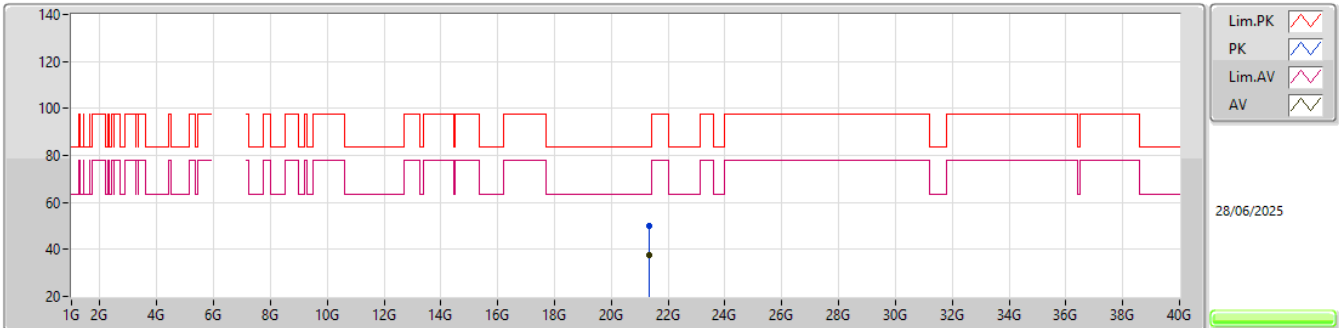EUT_V_2TX
Setting 2
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.3401G	49.95	83.54	-33.59	38.72	1	Vertical	233	2.25	-	38.10	21.76	48.63			
AV	21.34558G	37.56	63.54	-25.98	26.33	1	Vertical	233	2.25	-	38.10	21.76	48.63			

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX


7115MHz_TX

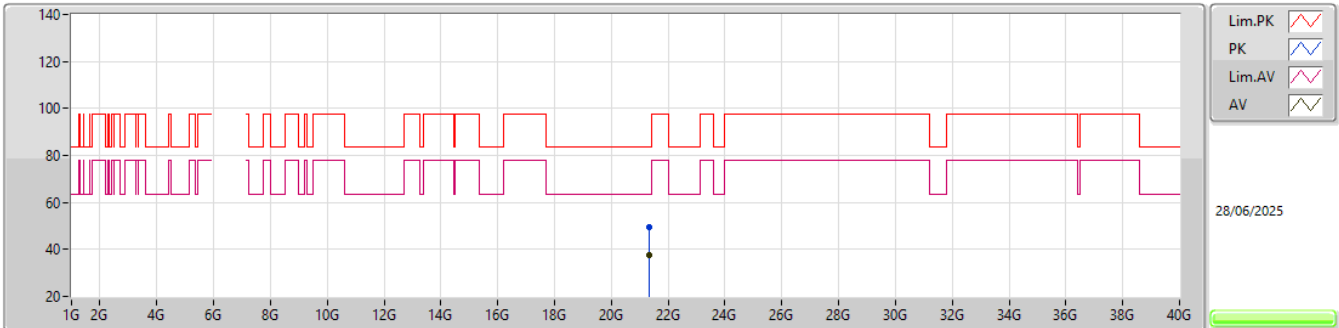EUT V_2TX
Setting 2
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.34947G	49.59	83.54	-33.95	38.37	1	Horizontal	215	2.08	-	38.10	21.75	48.63			
AV	21.34495G	37.56	63.54	-25.98	26.33	1	Horizontal	215	2.08	-	38.10	21.76	48.63			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5965MHz_TX

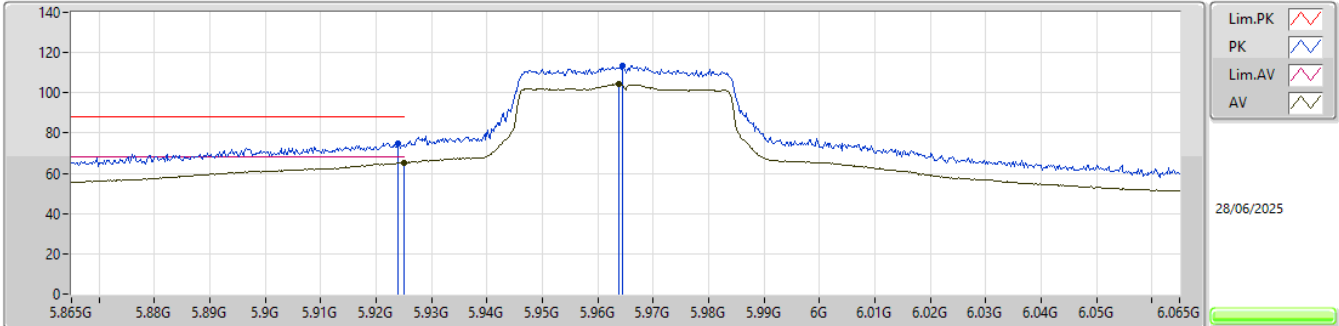


EUT V_2TX
Setting 23
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	75.00	88.20	-13.20	67.92	3	Vertical	21	1.80	-	34.15	8.51	35.58			
RMS	5.925G	65.22	68.20	-2.98	58.14	3	Vertical	21	1.80	-	34.15	8.51	35.58			
PK	5.9644G	113.53	Inf	-Inf	106.41	3	Vertical	21	1.80	-	34.20	8.52	35.60			
RMS	5.9638G	104.20	Inf	-Inf	97.08	3	Vertical	21	1.80	-	34.20	8.52	35.60			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5965MHz_TX

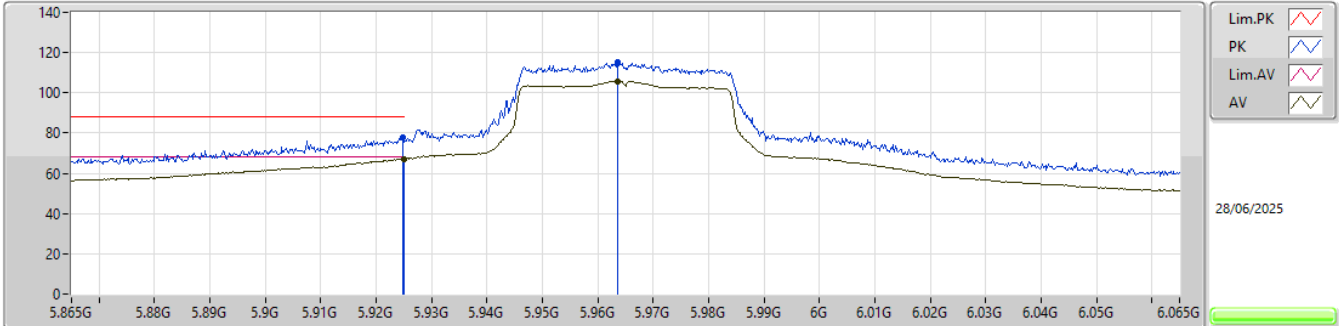


EUT_V_2TX
Setting 23
05-L-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9248G	77.61	88.20	-10.59	70.53	3	Horizontal	294	1.80	-	34.15	8.51	35.58				
RMS	5.925G	67.11	68.20	-1.09	60.03	3	Horizontal	294	1.80	-	34.15	8.51	35.58				
PK	5.9636G	115.42	Inf	-Inf	108.30	3	Horizontal	294	1.80	-	34.20	8.52	35.60				
RMS	5.9636G	105.84	Inf	-Inf	98.72	3	Horizontal	294	1.80	-	34.20	8.52	35.60				

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5965MHz_TX

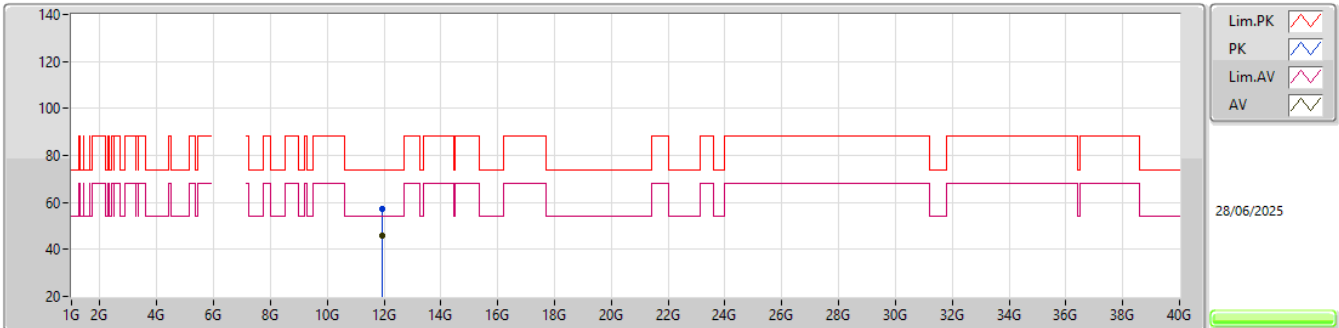


EUT V_2TX
Setting 23
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.93146G	57.32	74.00	-16.68	39.92	3	Vertical	9	2.95	-	38.70	12.09	33.39			
AV	11.9273G	45.63	54.00	-8.37	28.23	3	Vertical	9	2.95	-	38.70	12.09	33.39			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

5965MHz_TX

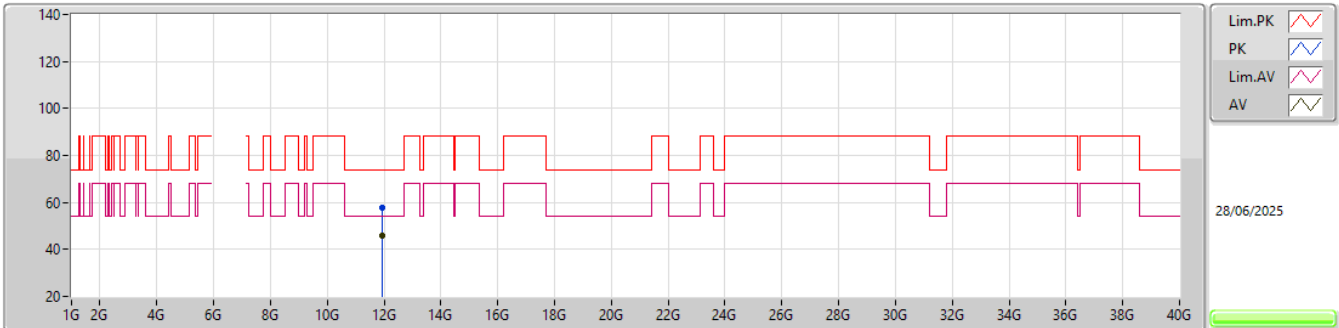


EUT V_2TX
Setting 23
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.92719G	57.60	74.00	-16.40	40.20	3	Horizontal	42	1.60	-	38.70	12.09	33.39			
AV	11.92989G	45.63	54.00	-8.37	28.23	3	Horizontal	42	1.60	-	38.70	12.09	33.39			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5965MHz_TX

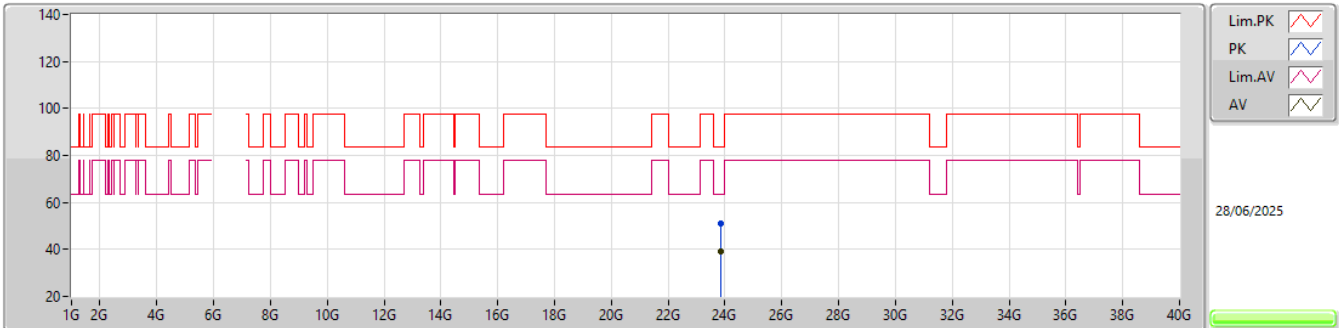EUT_V_2TX
Setting 23
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86023G	51.09	83.54	-32.45	36.65	1	Vertical	40	2.57	-	39.08	23.02	47.66			
AV	23.85675G	39.24	63.54	-24.30	24.79	1	Vertical	40	2.57	-	39.09	23.02	47.66			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


5965MHz_TX

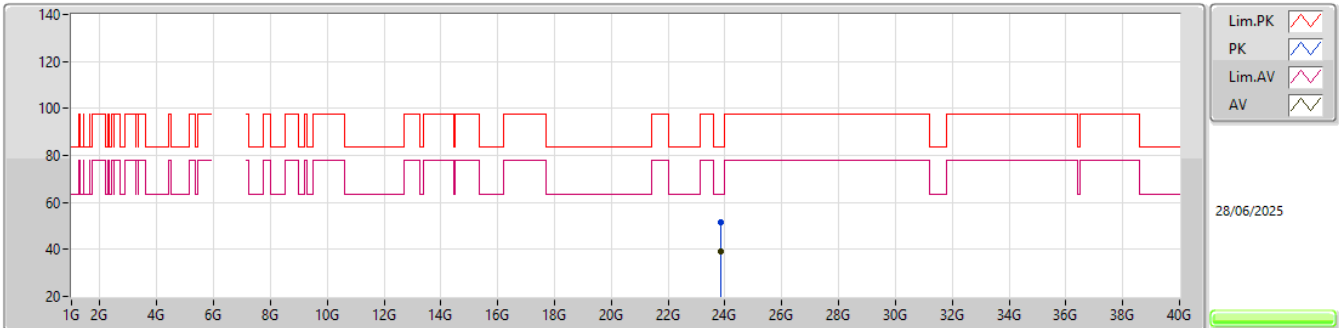EUT_V_2TX
Setting 23
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86243G	51.52	83.54	-32.02	37.08	1	Horizontal	48	1.43	-	39.08	23.02	47.66			
AV	23.85636G	39.08	63.54	-24.46	24.63	1	Horizontal	48	1.43	-	39.09	23.02	47.66			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6205MHz_TX

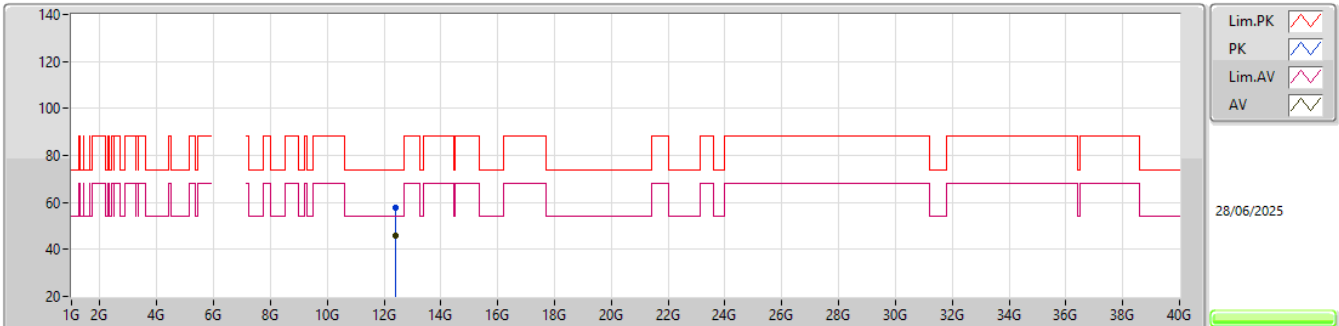EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41101G	57.61	74.00	-16.39	39.16	3	Vertical	143	1.92	-	38.90	12.56	33.01			
AV	12.40833G	45.79	54.00	-8.21	27.36	3	Vertical	143	1.92	-	38.90	12.55	33.02			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6205MHz_TX

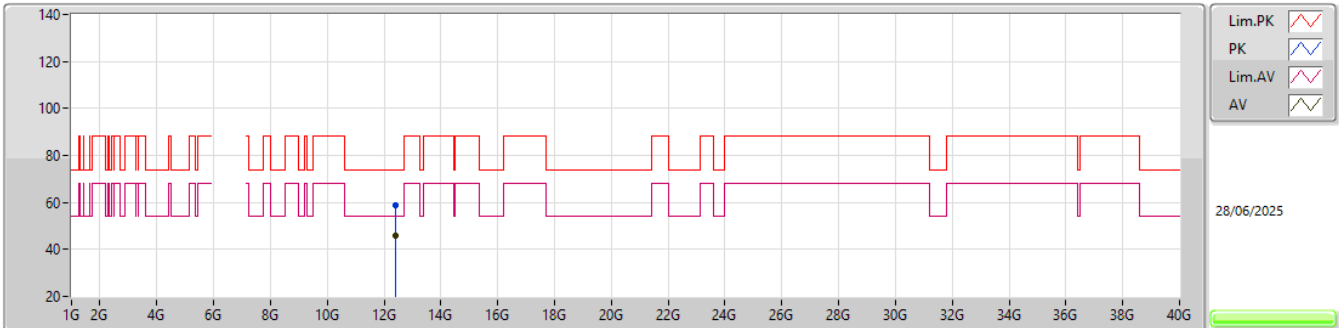EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.412G	58.55	74.00	-15.45	40.10	3	Horizontal	240	2.96	-	38.90	12.56	33.01			
AV	12.40794G	45.69	54.00	-8.31	27.26	3	Horizontal	240	2.96	-	38.90	12.55	33.02			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6205MHz_TX

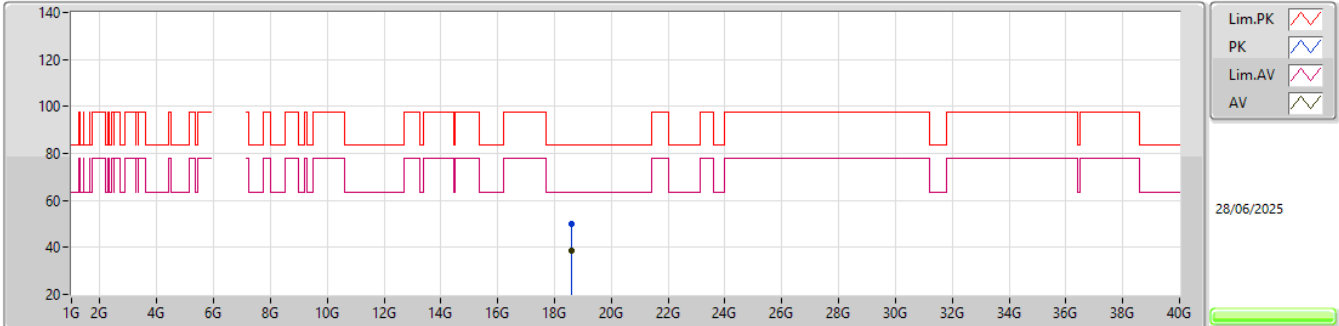EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61633G	50.22	83.54	-33.32	40.20	1	Vertical	358	1.41	-	37.83	20.61	48.42			
AV	18.6132G	38.61	63.54	-24.93	28.58	1	Vertical	358	1.41	-	37.83	20.61	48.41			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6205MHz_TX

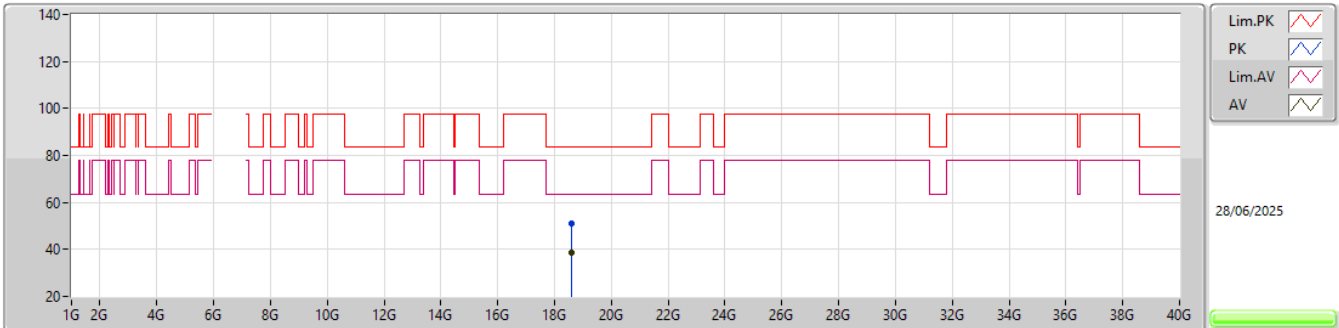


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61778G	51.11	83.54	-32.43	41.08	1	Horizontal	103	2.36	-	37.84	20.61	48.42			
AV	18.61902G	38.62	63.54	-24.92	28.59	1	Horizontal	103	2.36	-	37.84	20.61	48.42			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6405MHz_TX

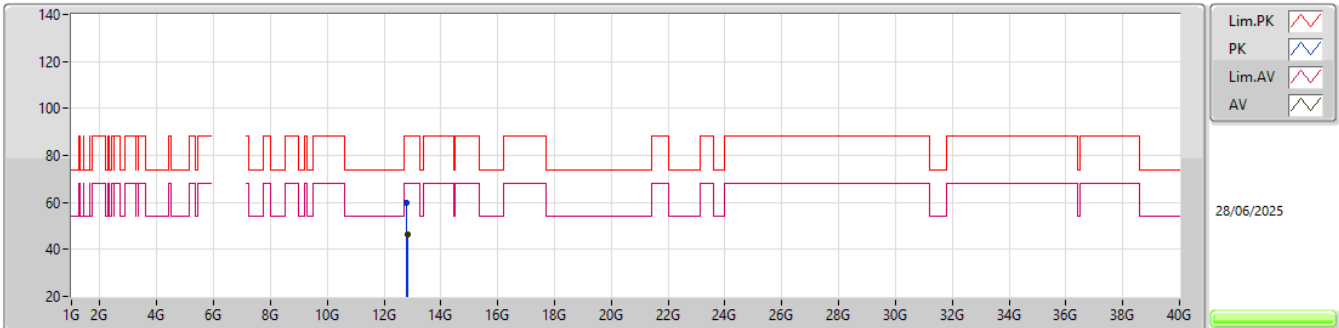


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81098G	59.68	88.20	-28.52	40.31	3	Vertical	128	2.61	-	39.74	12.97	33.34			
RMS	12.81251G	46.41	68.20	-21.79	27.03	3	Vertical	128	2.61	-	39.75	12.98	33.35			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6405MHz_TX

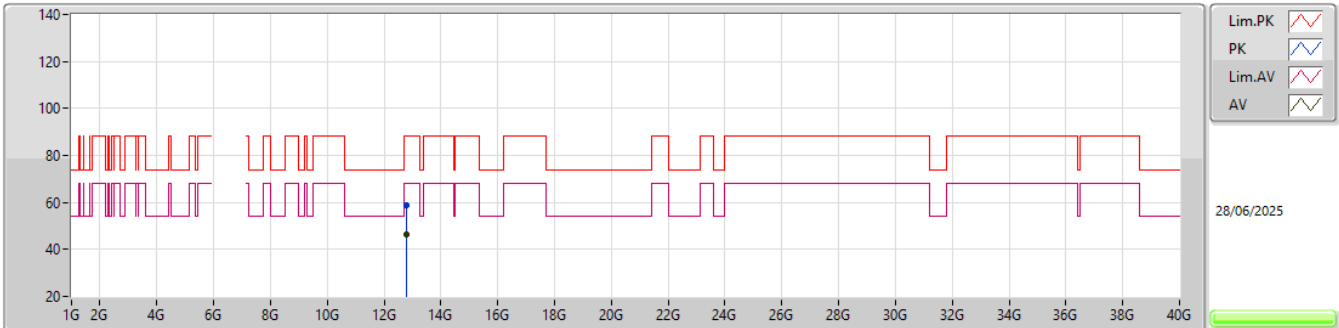EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8105G	58.58	88.20	-29.62	39.21	3	Horizontal	331	2.97	-	39.74	12.97	33.34			
RMS	12.81075G	46.50	68.20	-21.70	27.13	3	Horizontal	331	2.97	-	39.74	12.97	33.34			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6405MHz_TX

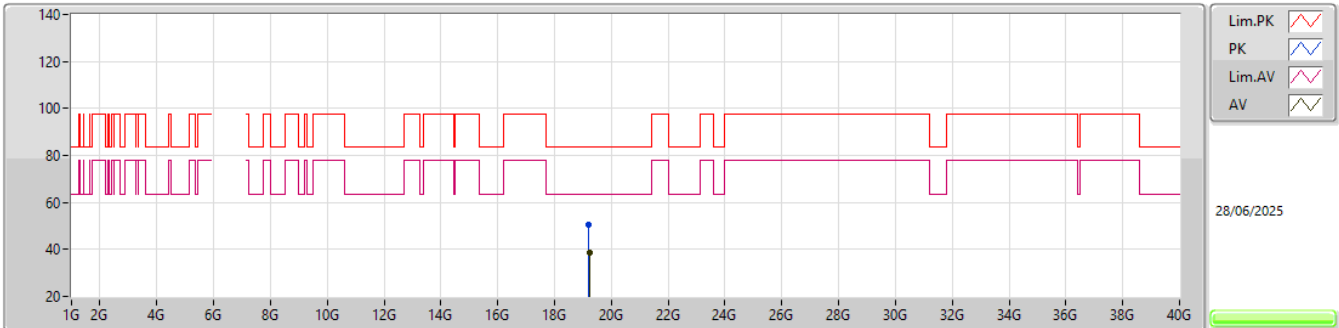EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.21207G	50.66	83.54	-32.88	40.85	1	Vertical	313	2.54	-	37.85	20.76	48.80			
AV	19.2192G	38.64	63.54	-24.90	28.80	1	Vertical	313	2.54	-	37.88	20.76	48.80			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6405MHz_TX

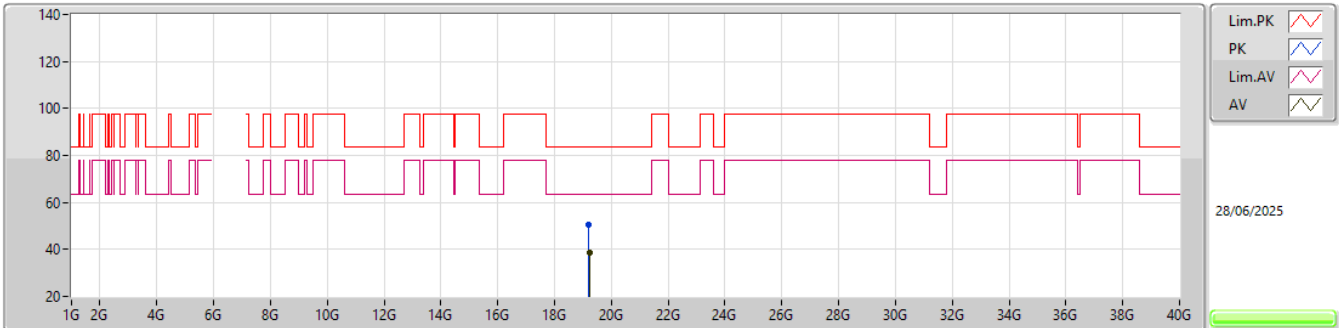EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21263G	50.72	83.54	-32.82	40.91	1	Horizontal	69	2.65	-	37.85	20.76	48.80			
AV	19.21898G	38.55	63.54	-24.99	28.71	1	Horizontal	69	2.65	-	37.88	20.76	48.80			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6445MHz_TX

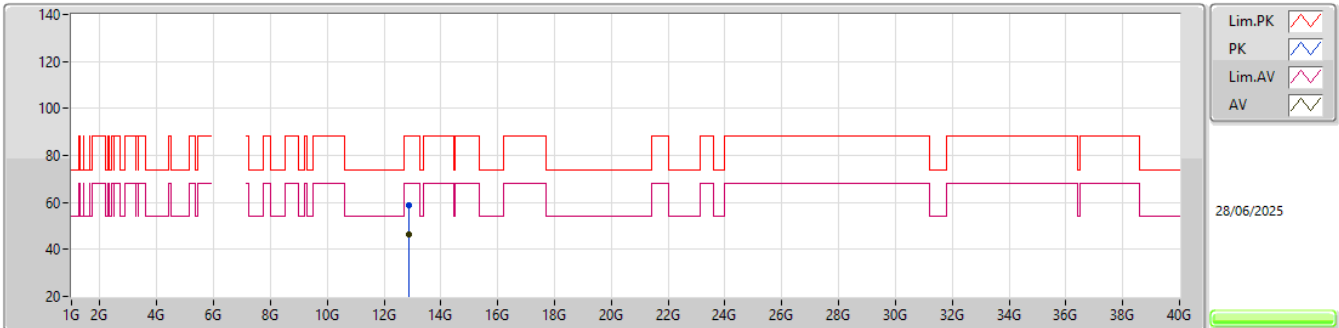


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89337G	58.63	88.20	-29.57	39.12	3	Vertical	234	1.25	-	39.90	13.06	33.45			
RMS	12.89274G	46.25	68.20	-21.95	26.74	3	Vertical	234	1.25	-	39.90	13.06	33.45			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6445MHz_TX

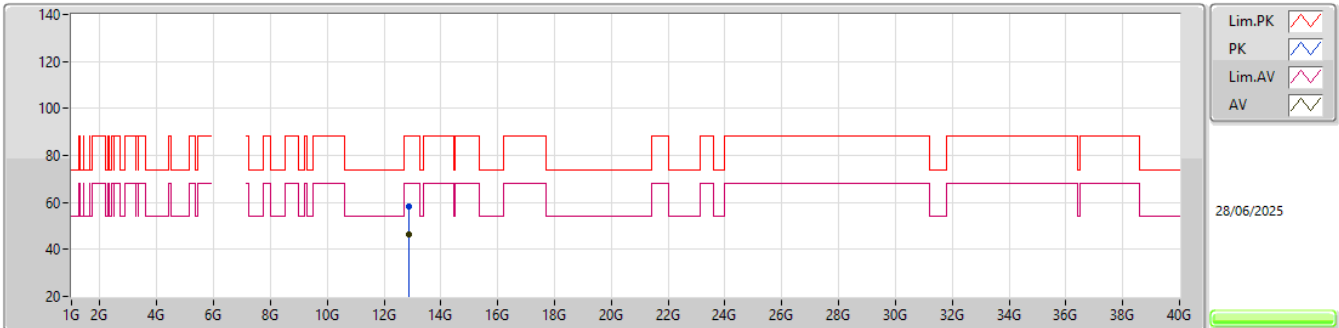


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.88885G	58.15	88.20	-30.05	38.65	3	Horizontal	207	1.39	-	39.90	13.05	33.45			
RMS	12.89104G	46.25	68.20	-21.95	26.74	3	Horizontal	207	1.39	-	39.90	13.06	33.45			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6445MHz_TX

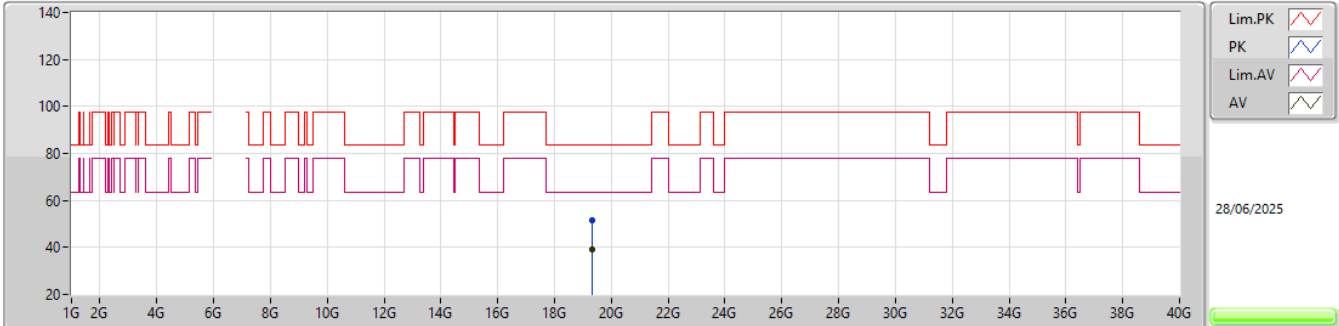EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33364G	51.80	83.54	-31.74	41.98	1	Vertical	199	1.32	-	37.80	20.82	48.80			
AV	19.33243G	38.99	63.54	-24.55	29.17	1	Vertical	199	1.32	-	37.80	20.82	48.80			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6445MHz_TX

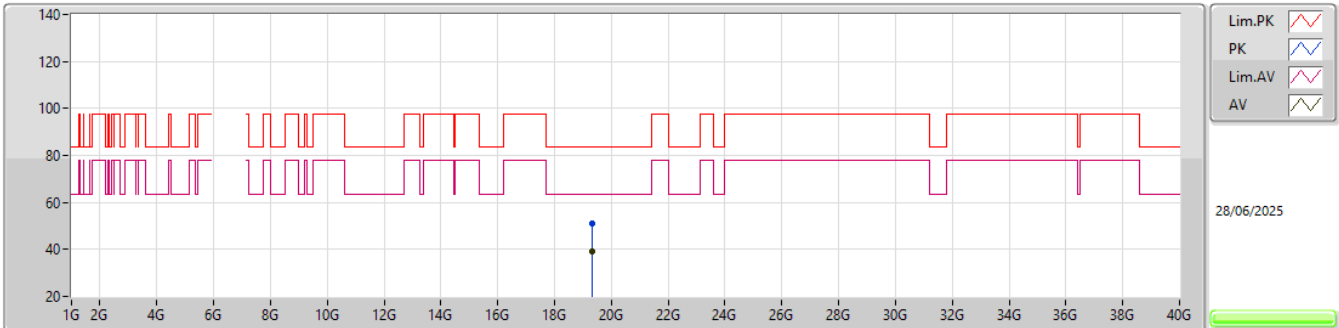EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33198G	51.28	83.54	-32.26	41.46	1	Horizontal	175	1.12	-	37.80	20.82	48.80			
AV	19.33756G	39.00	63.54	-24.54	29.17	1	Horizontal	175	1.12	-	37.80	20.83	48.80			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6485MHz_TX

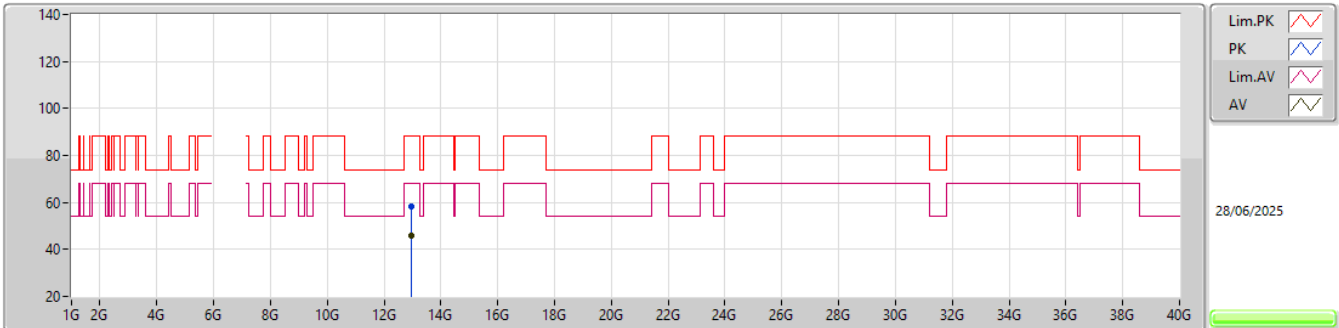


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.96863G	58.19	88.20	-30.01	38.45	3	Vertical	189	1.43	-	40.16	13.14	33.56			
RMS	12.96691G	45.92	68.20	-22.28	26.17	3	Vertical	189	1.43	-	40.17	13.14	33.56			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6485MHz_TX

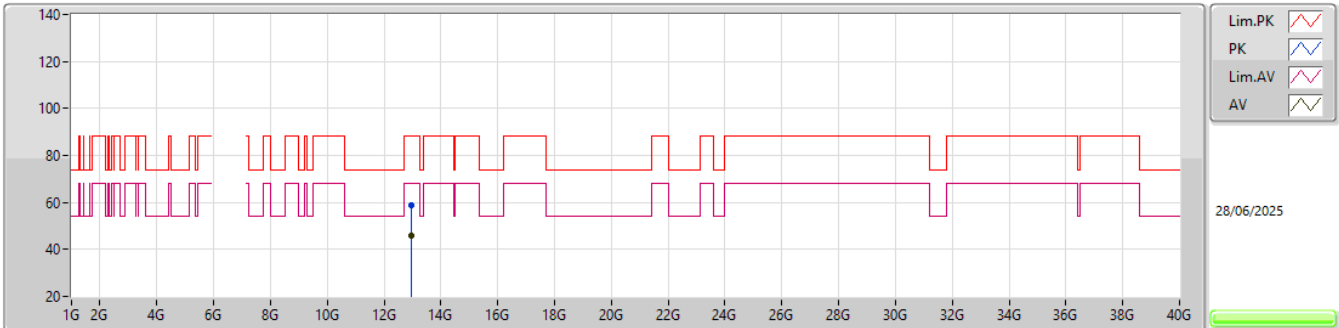


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.96866G	58.60	88.20	-29.60	38.86	3	Horizontal	240	2.69	-	40.16	13.14	33.56			
RMS	12.96647G	45.93	68.20	-22.27	26.17	3	Horizontal	240	2.69	-	40.17	13.14	33.55			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6485MHz_TX

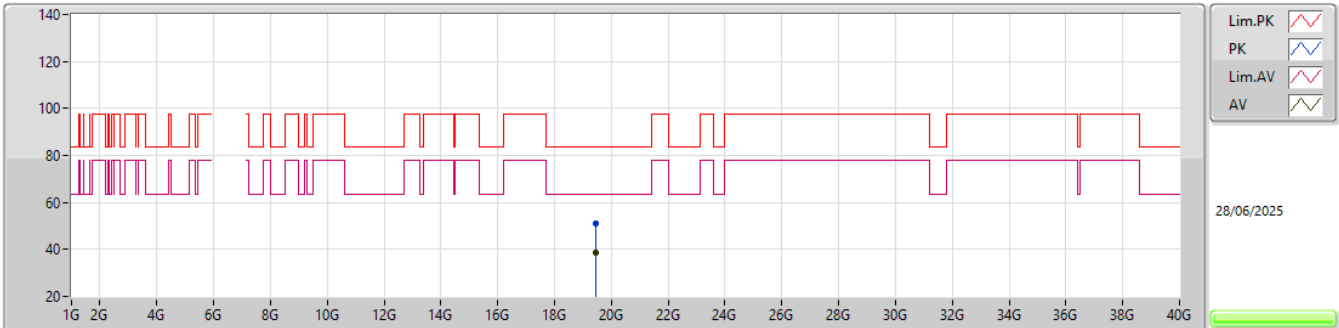


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45939G	51.20	83.54	-32.34	41.39	1	Vertical	201	1.57	-	37.72	20.89	48.80			
AV	19.45027G	38.38	63.54	-25.16	28.60	1	Vertical	201	1.57	-	37.70	20.88	48.80			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6485MHz_TX

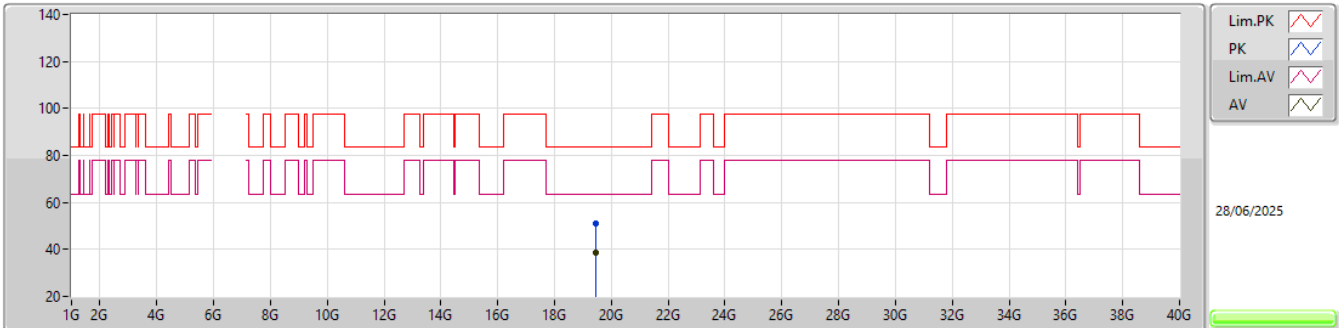EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45132G	50.97	83.54	-32.57	41.19	1	Horizontal	260	1.63	-	37.70	20.88	48.80			
AV	19.45343G	38.37	63.54	-25.17	28.57	1	Horizontal	260	1.63	-	37.71	20.89	48.80			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6525MHz_TX

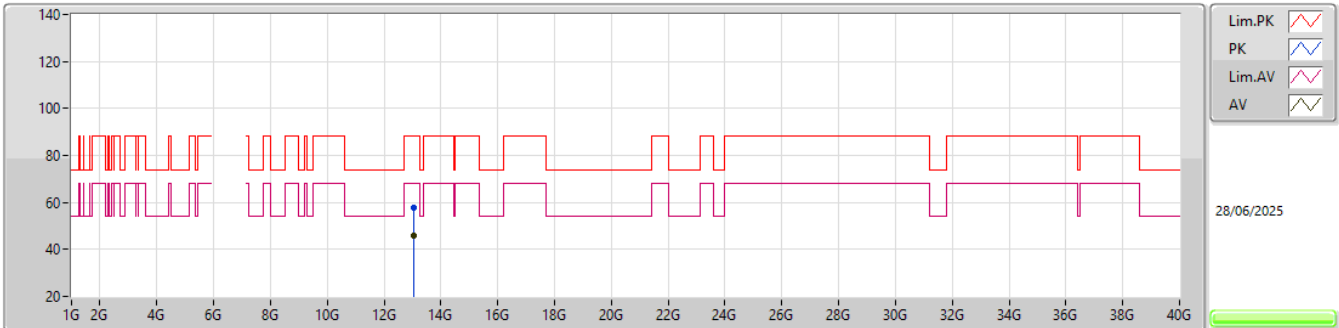


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.04819G	57.97	88.20	-30.23	38.42	3	Vertical	115	2.58	-	39.91	13.22	33.58			
RMS	13.05233G	46.12	68.20	-22.08	26.58	3	Vertical	115	2.58	-	39.90	13.22	33.58			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6525MHz_TX

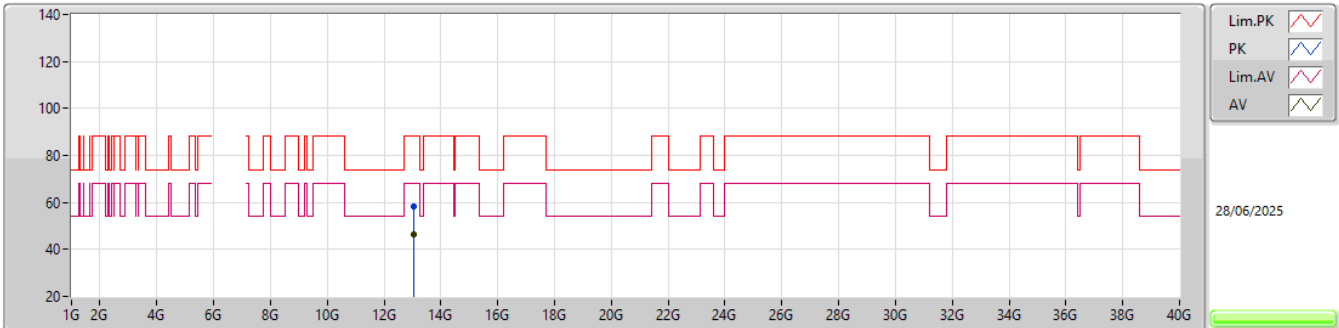EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04725G	58.10	88.20	-30.10	38.55	3	Horizontal	49	1.60	-	39.91	13.22	33.58			
RMS	13.0529G	46.24	68.20	-21.96	26.68	3	Horizontal	49	1.60	-	39.91	13.23	33.58			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6525MHz_TX

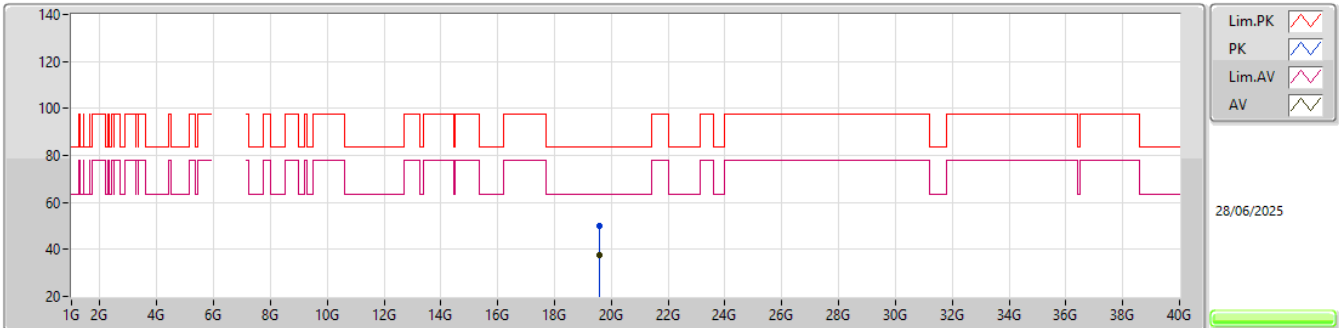EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57896G	49.76	83.54	-33.78	40.01	1	Vertical	53	1.18	-	37.70	20.85	48.80			
AV	19.5715G	37.37	63.54	-26.17	27.61	1	Vertical	53	1.18	-	37.70	20.86	48.80			

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6525MHz_TX

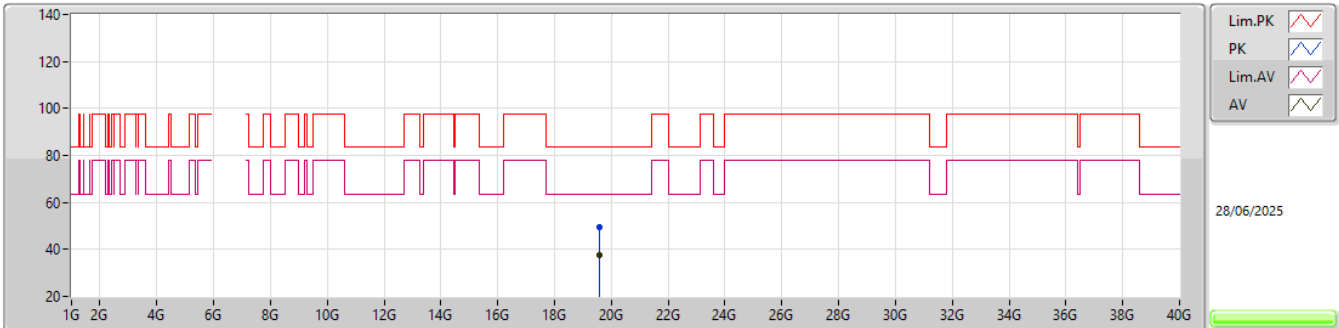


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57853G	49.55	83.54	-33.99	39.80	1	Horizontal	228	1.87	-	37.70	20.85	48.80			
AV	19.57082G	37.37	63.54	-26.17	27.61	1	Horizontal	228	1.87	-	37.70	20.86	48.80			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

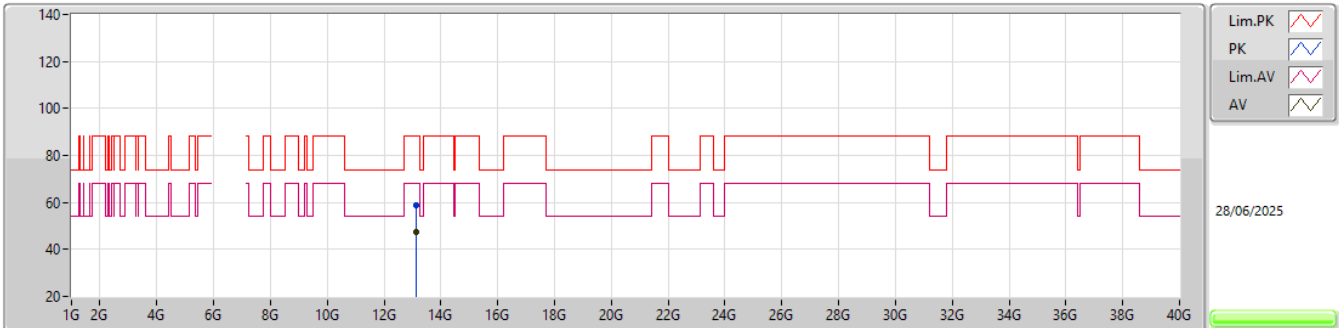


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.13215G	58.99	88.20	-29.21	39.09	3	Vertical	180	2.97	-	40.13	13.31	33.54			
RMS	13.13344G	47.21	68.20	-20.99	27.31	3	Vertical	180	2.97	-	40.13	13.31	33.54			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

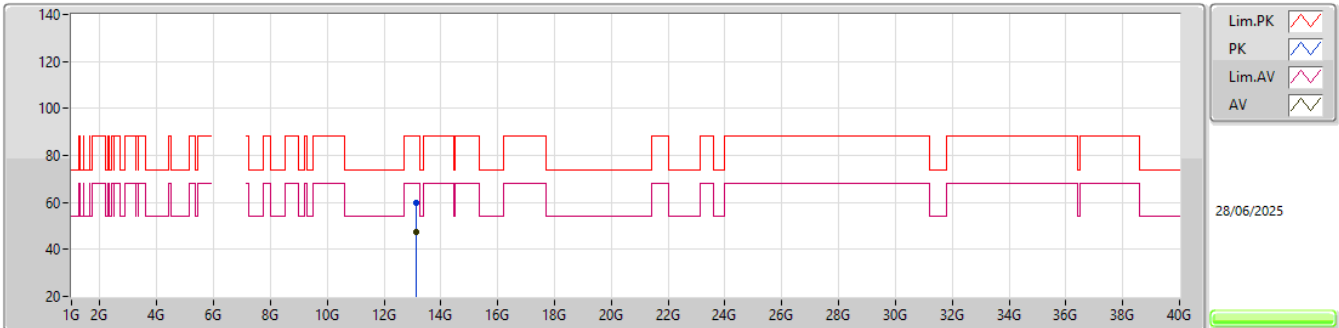


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.12641G	59.73	88.20	-28.47	39.87	3	Horizontal	239	2.25	-	40.11	13.30	33.55			
RMS	13.13227G	47.20	68.20	-21.00	27.30	3	Horizontal	239	2.25	-	40.13	13.31	33.54			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

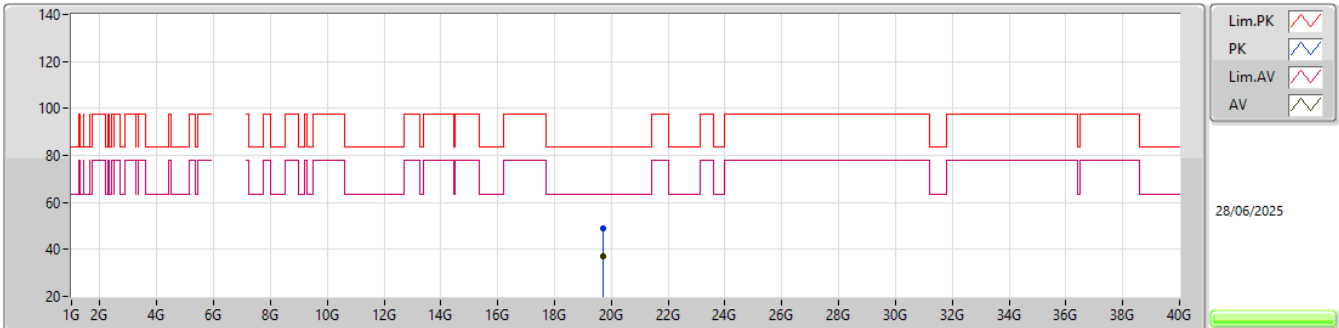


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69103G	49.19	83.54	-34.35	39.52	1	Vertical	132	1.57	-	37.70	20.77	48.80			
AV	19.69846G	37.16	63.54	-26.38	27.49	1	Vertical	132	1.57	-	37.70	20.77	48.80			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

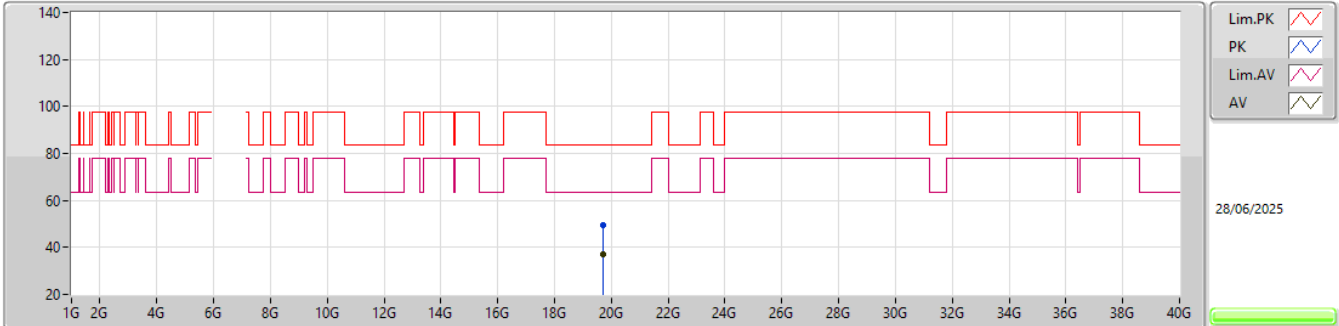


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69366G	49.51	83.54	-34.03	39.84	1	Horizontal	269	2.39	-	37.70	20.77	48.80			
AV	19.6902G	37.05	63.54	-26.49	27.38	1	Horizontal	269	2.39	-	37.70	20.77	48.80			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6685MHz_TX

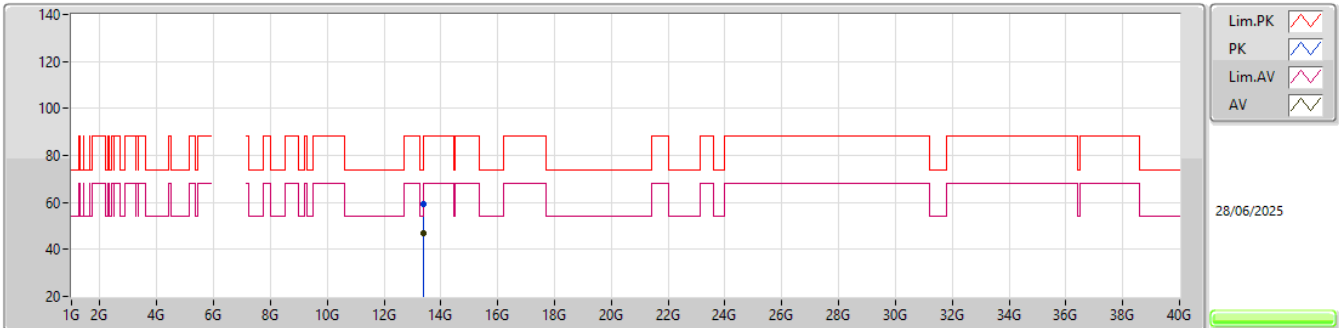


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.36767G	59.19	74.00	-14.81	38.69	3	Vertical	192	1.69	-	40.40	13.55	33.45			
AV	13.37391G	46.85	54.00	-7.15	26.33	3	Vertical	192	1.69	-	40.40	13.56	33.44			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6685MHz_TX

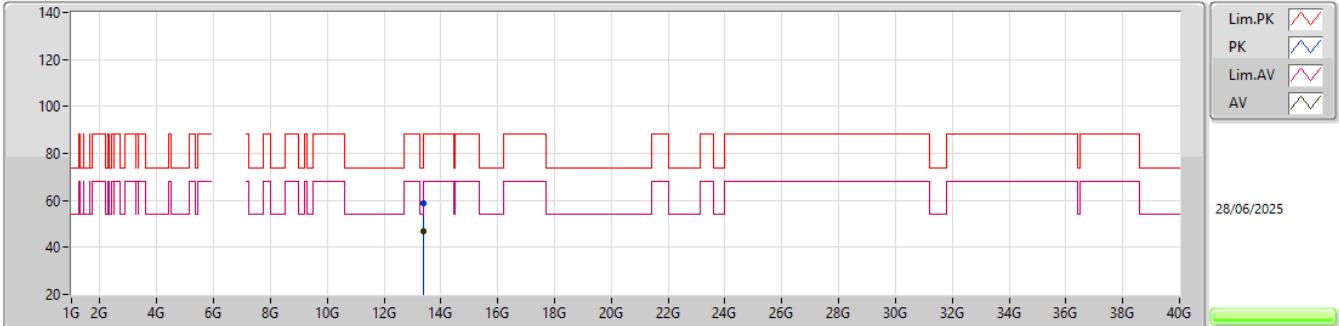


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.36801G	58.74	74.00	-15.26	38.24	3	Horizontal	15	1.17	-	40.40	13.55	33.45			
AV	13.37297G	46.85	54.00	-7.15	26.33	3	Horizontal	15	1.17	-	40.40	13.56	33.44			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6685MHz_TX

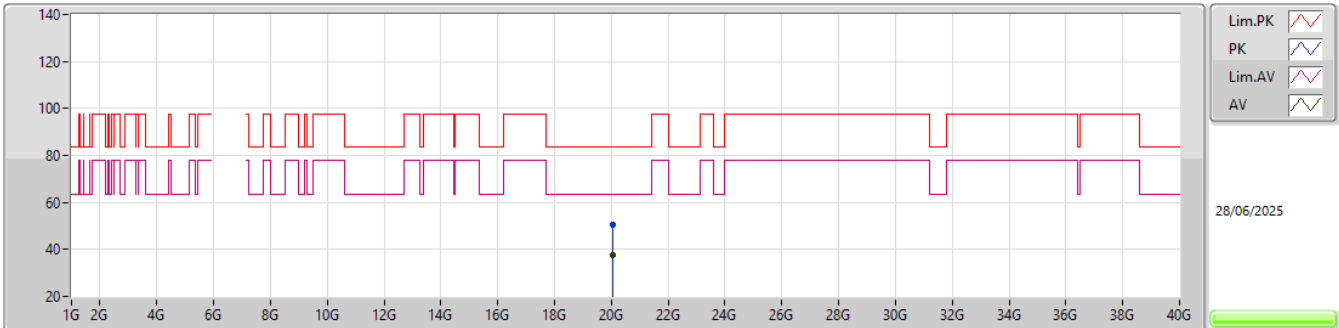EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.05446G	50.32	83.54	-33.22	40.66	1	Vertical	106	1.61	-	37.80	20.65	48.79			
AV	20.05294G	37.67	63.54	-25.87	28.01	1	Vertical	106	1.61	-	37.80	20.65	48.79			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6685MHz_TX

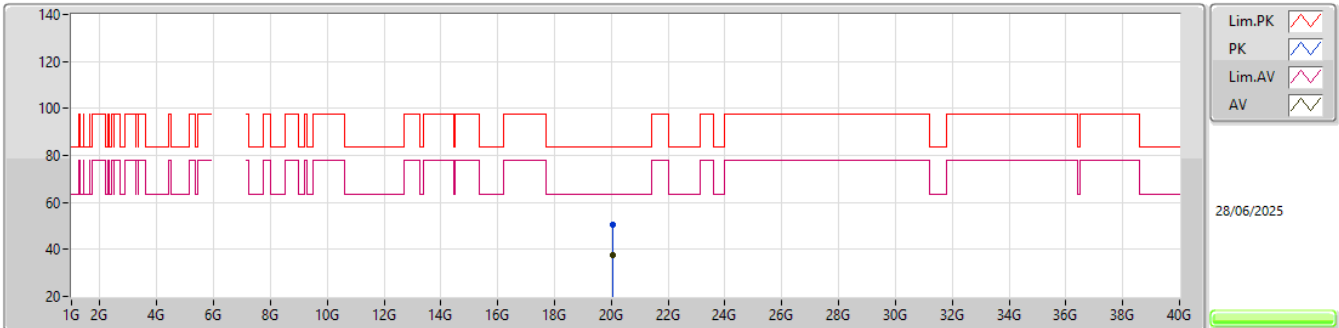EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.05274G	50.38	83.54	-33.16	40.72	1	Horizontal	297	1.50	-	37.80	20.65	48.79			
AV	20.0593G	37.62	63.54	-25.92	27.95	1	Horizontal	297	1.50	-	37.80	20.66	48.79			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6885MHz_TX

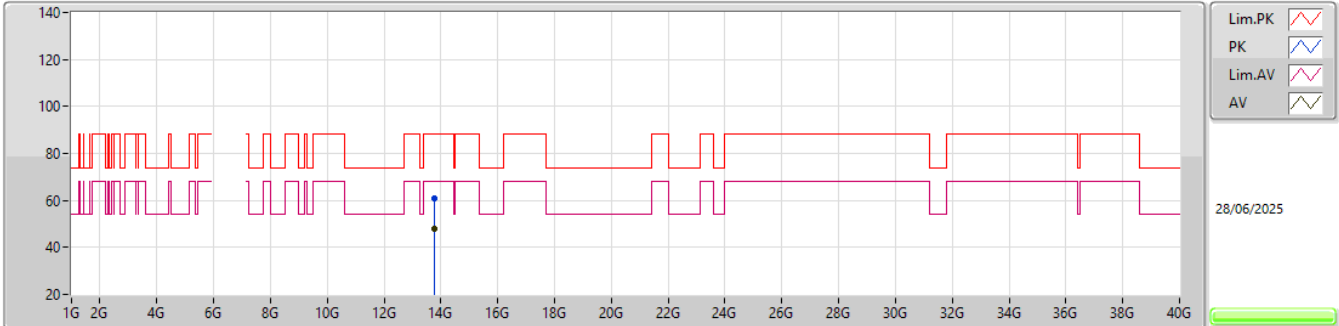EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.77031G	60.84	88.20	-27.36	39.89	3	Vertical	248	1.46	-	40.46	13.97	33.48			
RMS	13.76657G	47.92	68.20	-20.28	26.96	3	Vertical	248	1.46	-	40.47	13.97	33.48			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6885MHz_TX

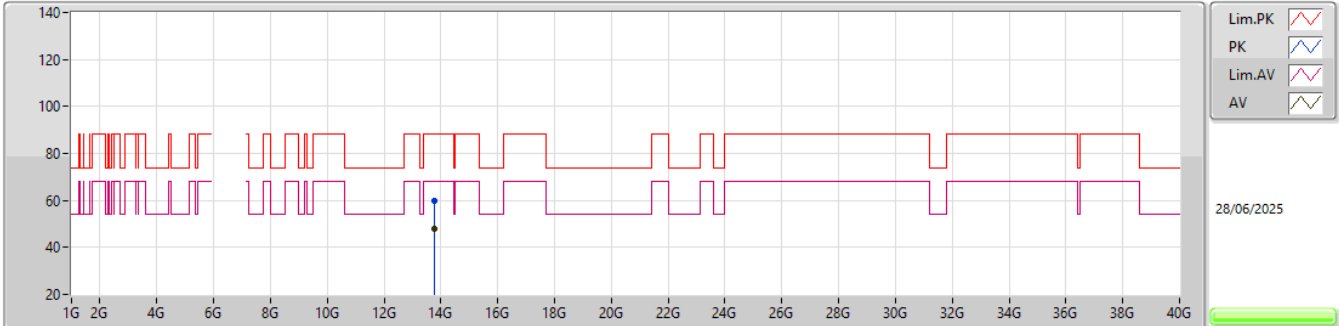


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.76938G	60.07	88.20	-28.13	39.12	3	Horizontal	181	2.59	-	40.46	13.97	33.48			
RMS	13.76646G	47.92	68.20	-20.28	26.96	3	Horizontal	181	2.59	-	40.47	13.97	33.48			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6885MHz_TX

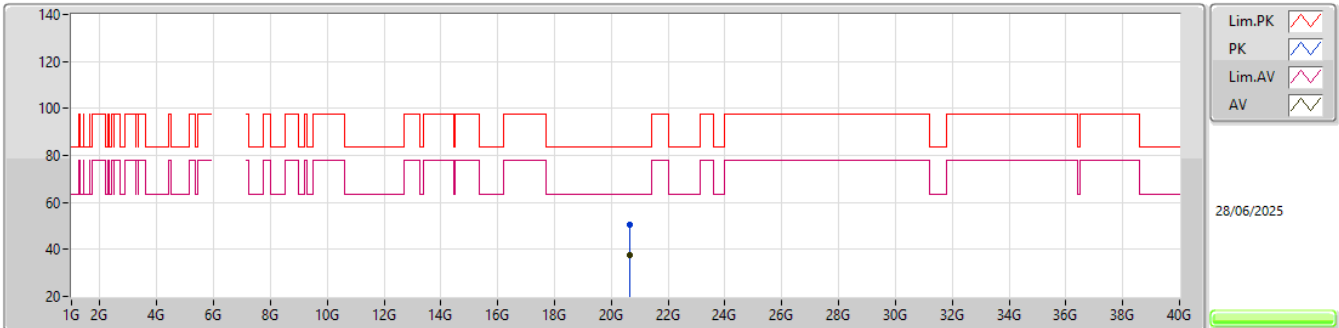


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65016G	50.47	83.54	-33.07	39.66	1	Vertical	105	1.32	-	37.90	21.61	48.70			
AV	20.65213G	37.81	63.54	-25.73	26.99	1	Vertical	105	1.32	-	37.90	21.62	48.70			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6885MHz_TX

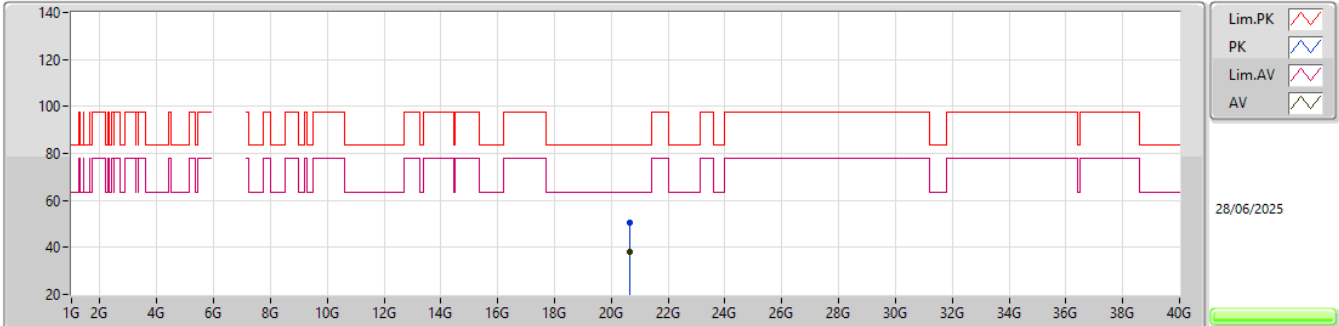EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65068G	50.56	83.54	-32.98	39.75	1	Horizontal	213	2.44	-	37.90	21.61	48.70			
AV	20.65009G	37.93	63.54	-25.61	27.12	1	Horizontal	213	2.44	-	37.90	21.61	48.70			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6925MHz_TX

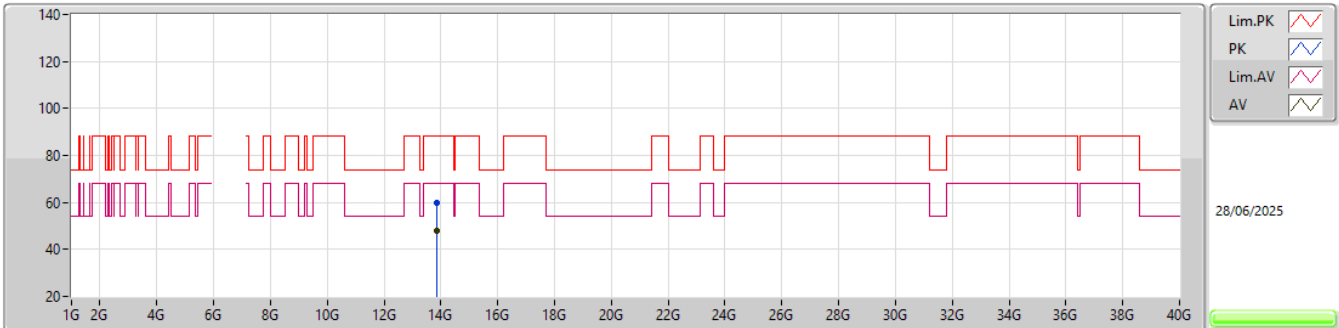


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.85163G	59.82	88.20	-28.38	38.95	3	Vertical	236	2.30	-	40.31	14.06	33.50			
RMS	13.85161G	47.76	68.20	-20.44	26.89	3	Vertical	236	2.30	-	40.31	14.06	33.50			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6925MHz_TX

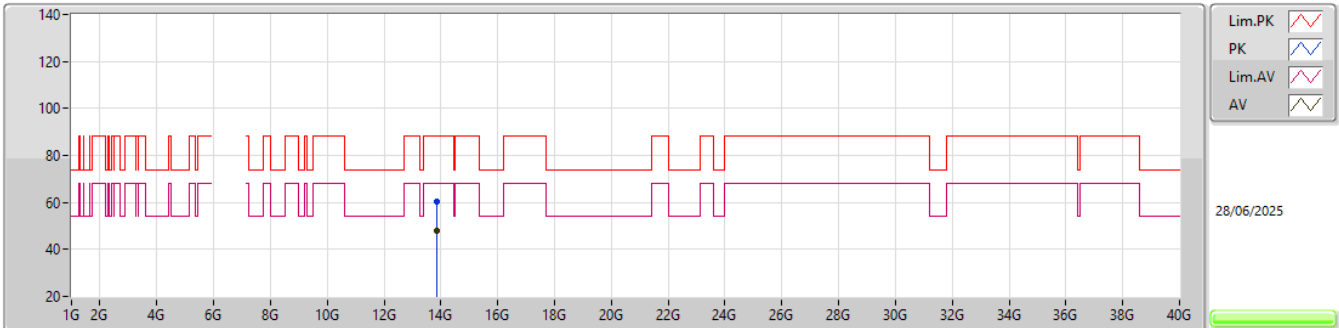


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.84896G	60.26	88.20	-27.94	39.41	3	Horizontal	65	1.95	-	40.30	14.05	33.50			
RMS	13.84694G	47.85	68.20	-20.35	26.99	3	Horizontal	65	1.95	-	40.31	14.05	33.50			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6925MHz_TX

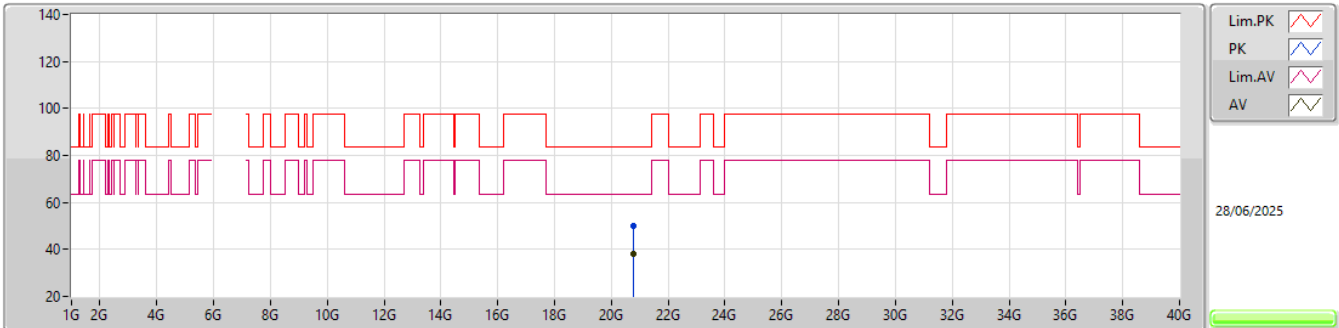


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.77668G	49.82	83.54	-33.72	38.88	1	Vertical	184	1.72	-	37.90	21.74	48.70			
AV	20.77349G	38.14	63.54	-25.40	27.20	1	Vertical	184	1.72	-	37.90	21.74	48.70			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6925MHz_TX

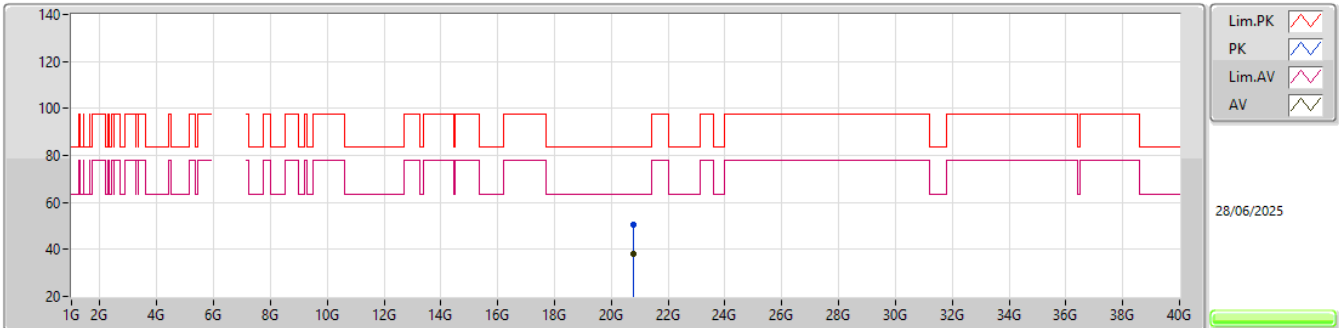


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.77117G	50.30	83.54	-33.24	39.36	1	Horizontal	6	2.09	-	37.90	21.74	48.70			
AV	20.77131G	38.01	63.54	-25.53	27.07	1	Horizontal	6	2.09	-	37.90	21.74	48.70			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7005MHz_TX

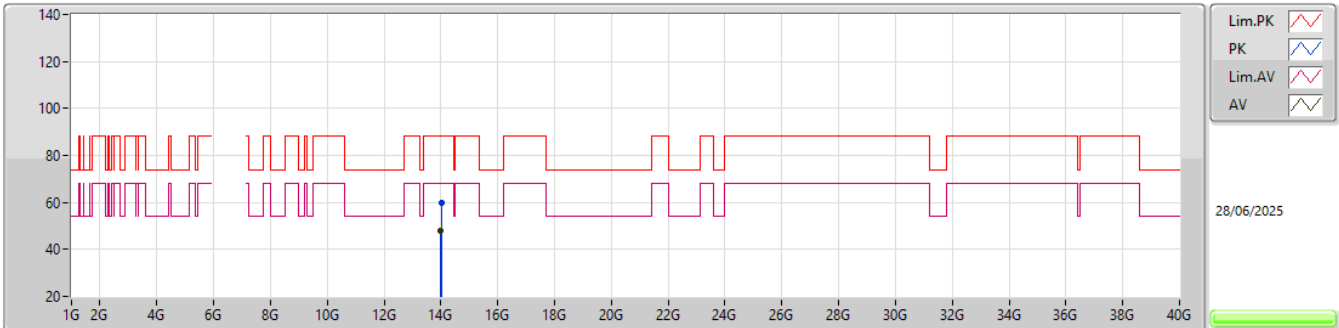


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.00935G	59.92	88.20	-28.28	38.68	3	Vertical	119	2.56	-	40.58	14.21	33.55			
RMS	14.0062G	47.95	68.20	-20.25	26.70	3	Vertical	119	2.56	-	40.59	14.21	33.55			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7005MHz_TX

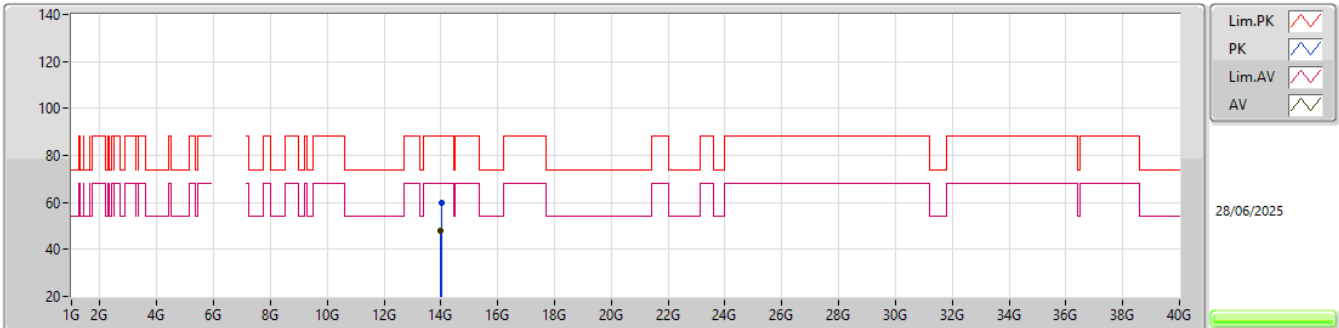


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.0074G	59.86	88.20	-28.34	38.61	3	Horizontal	314	2.47	-	40.59	14.21	33.55			
RMS	14.00638G	47.95	68.20	-20.25	26.70	3	Horizontal	314	2.47	-	40.59	14.21	33.55			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX


7005MHz_TX

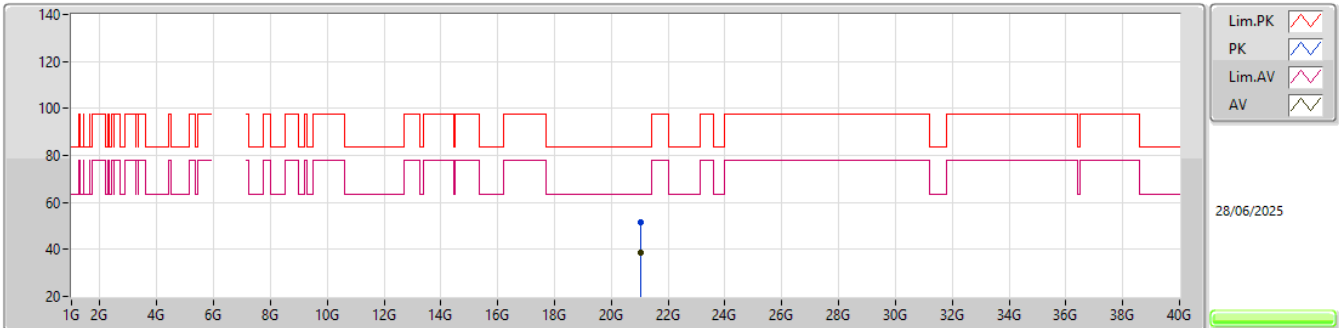EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01264G	51.70	83.54	-31.84	40.44	1	Vertical	311	1.17	-	38.00	21.96	48.70			
AV	21.01825G	38.57	63.54	-24.97	27.31	1	Vertical	311	1.17	-	38.00	21.96	48.70			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7005MHz_TX

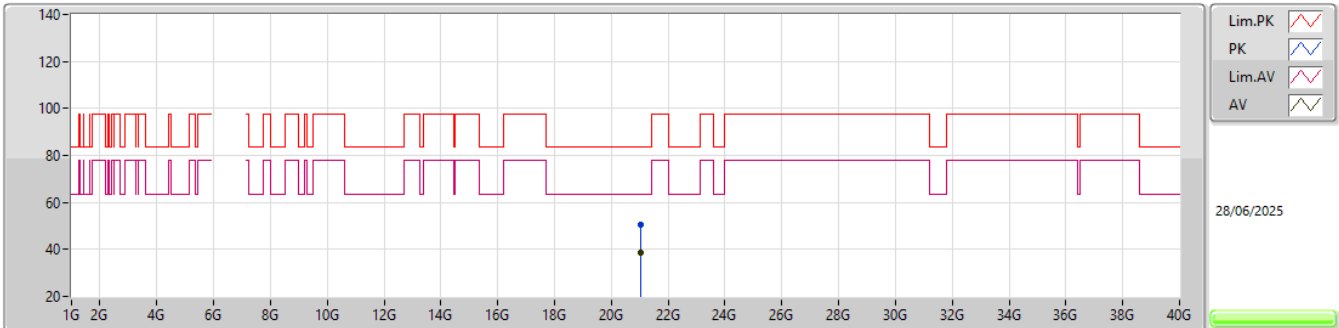


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01576G	50.73	83.54	-32.81	39.47	1	Horizontal	344	2.90	-	38.00	21.96	48.70			
AV	21.01916G	38.46	63.54	-25.08	27.20	1	Horizontal	344	2.90	-	38.00	21.96	48.70			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7085MHz_TX

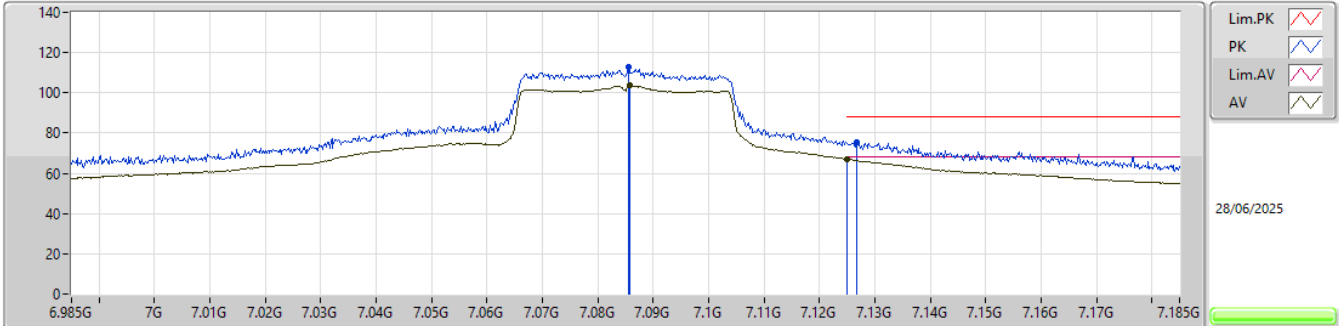


EUT Y_2TX
Setting 21
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0856G	112.57	Inf	-Inf	101.97	3	Vertical	31	2.79	-	36.51	9.27	35.18			
RMS	7.0858G	103.70	Inf	-Inf	93.10	3	Vertical	31	2.79	-	36.51	9.27	35.18			
PK	7.1268G	75.36	88.20	-12.84	64.43	3	Vertical	31	2.79	-	36.76	9.28	35.11			
RMS	7.125G	67.08	68.20	-1.12	56.16	3	Vertical	31	2.79	-	36.75	9.28	35.11			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7085MHz_TX

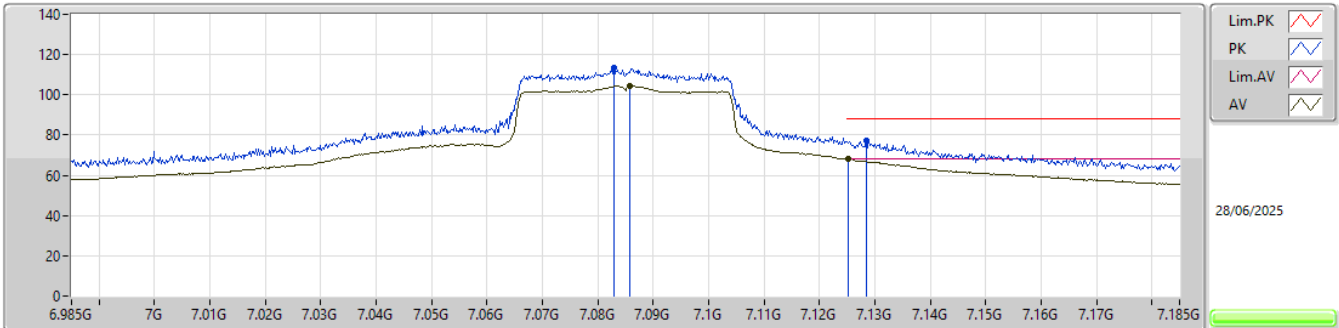


EUT V_2TX
Setting 21
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.083G	113.37	Inf	-Inf	102.79	3	Horizontal	313	1.80	-	36.50	9.27	35.19			
RMS	7.0858G	104.67	Inf	-Inf	94.07	3	Horizontal	313	1.80	-	36.51	9.27	35.18			
PK	7.1284G	77.13	88.20	-11.07	66.19	3	Horizontal	313	1.80	-	36.77	9.28	35.11			
RMS	7.1252G	68.17	68.20	-0.03	57.25	3	Horizontal	313	1.80	-	36.75	9.28	35.11			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7085MHz_TX

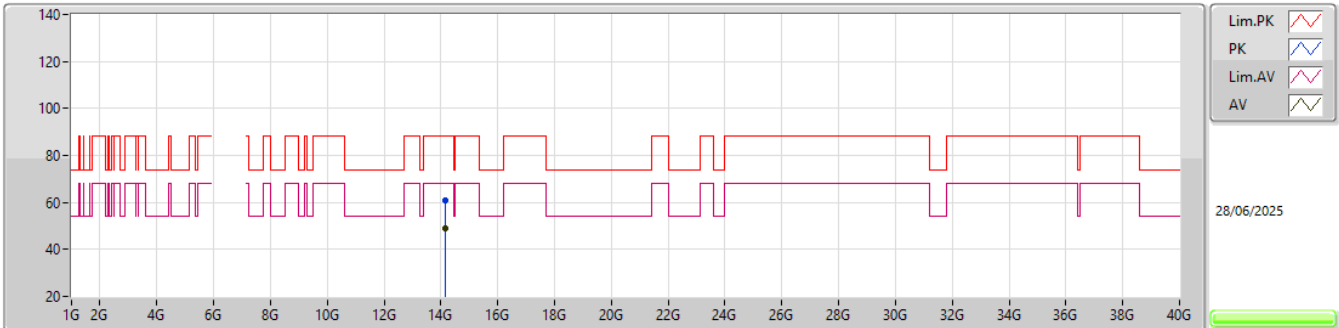


EUT_V_2TX
Setting 21
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.16986G	60.88	88.20	-27.32	39.66	3	Vertical	165	1.48	-	40.60	14.21	33.59			
RMS	14.17143G	48.89	68.20	-19.31	27.67	3	Vertical	165	1.48	-	40.60	14.21	33.59			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

7085MHz_TX

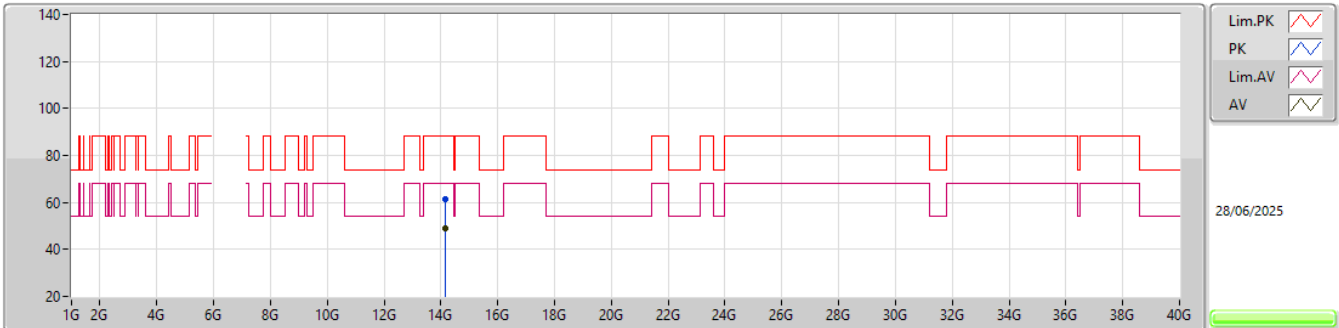


EUT_V_2TX
Setting 21
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.17112G	61.19	88.20	-27.01	39.97	3	Horizontal	263	1.84	-	40.60	14.21	33.59			
RMS	14.17497G	48.88	68.20	-19.32	27.66	3	Horizontal	263	1.84	-	40.60	14.21	33.59			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX


7085MHz_TX

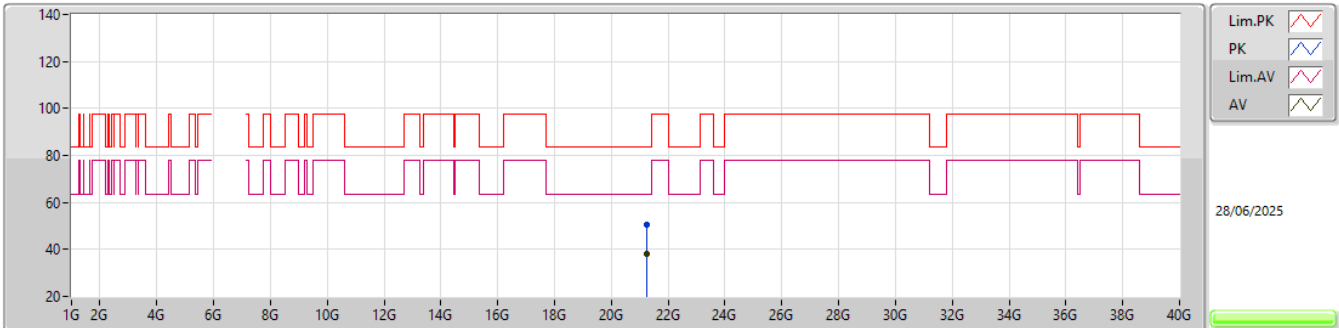EUT_V_2TX
Setting 21
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.25659G	50.52	83.54	-33.02	39.35	1	Vertical	153	1.40	-	38.01	21.81	48.65			
AV	21.25284G	37.88	63.54	-25.66	26.71	1	Vertical	153	1.40	-	38.01	21.81	48.65			

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX


7085MHz_TX

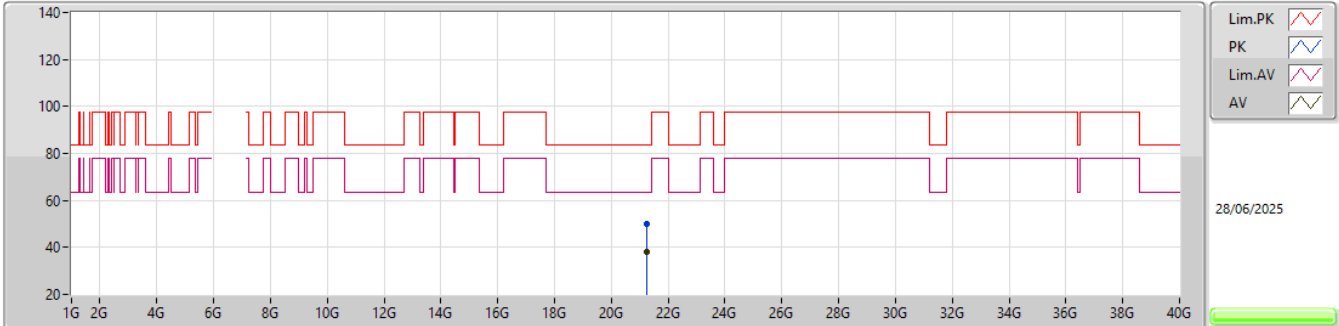EUT_V_2TX
Setting 21
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.25G	50.20	83.54	-33.34	39.04	1	Horizontal	1	1.53	-	38.00	21.81	48.65			
AV	21.25029G	37.87	63.54	-25.67	26.71	1	Horizontal	1	1.53	-	38.00	21.81	48.65			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5985MHz_TX

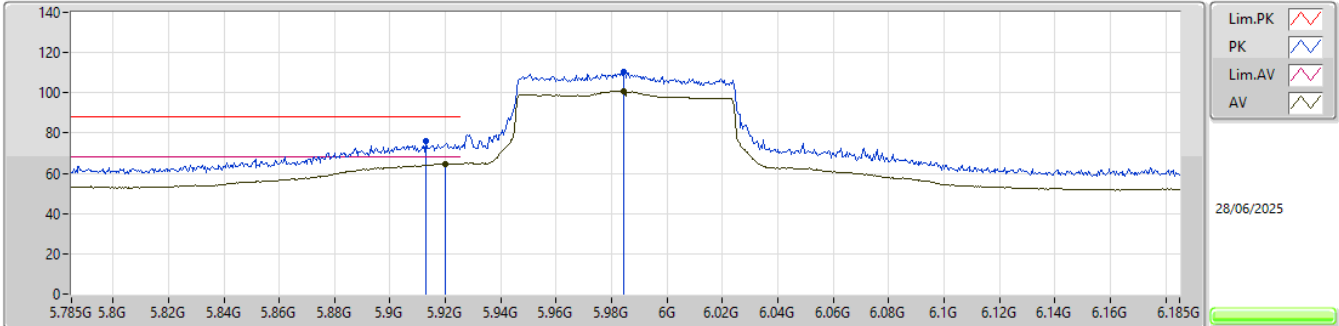


EUT Y_2TX
Setting 22
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.913G	75.89	88.20	-12.31	68.84	3	Vertical	21	1.80	-	34.13	8.50	35.58				
RMS	5.9198G	64.76	68.20	-3.44	57.70	3	Vertical	21	1.80	-	34.14	8.50	35.58				
PK	5.9842G	110.22	Inf	-Inf	103.09	3	Vertical	21	1.80	-	34.20	8.53	35.60				
RMS	5.9842G	100.97	Inf	-Inf	93.84	3	Vertical	21	1.80	-	34.20	8.53	35.60				

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5985MHz_TX

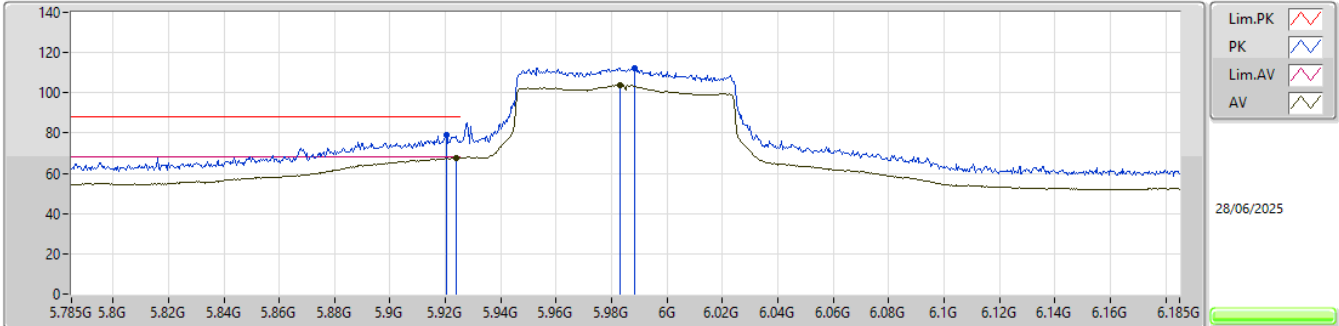


EUT_V_2TX
Setting 22
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9202G	78.85	88.20	-9.35	71.79	3	Horizontal	305	2.22	-	34.14	8.50	35.58			
RMS	5.9238G	67.60	68.20	-0.60	60.52	3	Horizontal	305	2.22	-	34.15	8.51	35.58			
PK	5.9882G	112.46	Inf	-Inf	105.34	3	Horizontal	305	2.22	-	34.20	8.53	35.61			
RMS	5.983G	103.73	Inf	-Inf	96.60	3	Horizontal	305	2.22	-	34.20	8.53	35.60			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5985MHz_TX

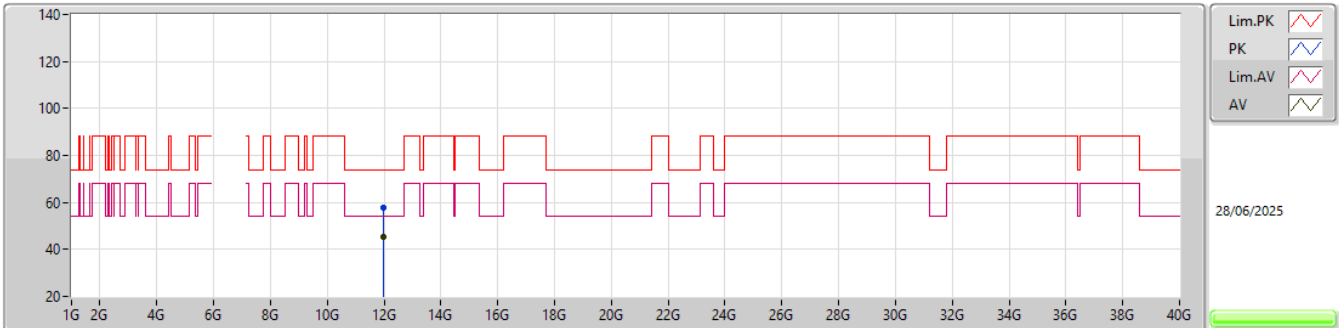


EUT V_2TX
Setting 22
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97488G	57.67	74.00	-16.33	40.23	3	Vertical	352	1.13	-	38.75	12.12	33.43			
AV	11.97209G	45.43	54.00	-8.57	28.00	3	Vertical	352	1.13	-	38.74	12.12	33.43			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

5985MHz_TX

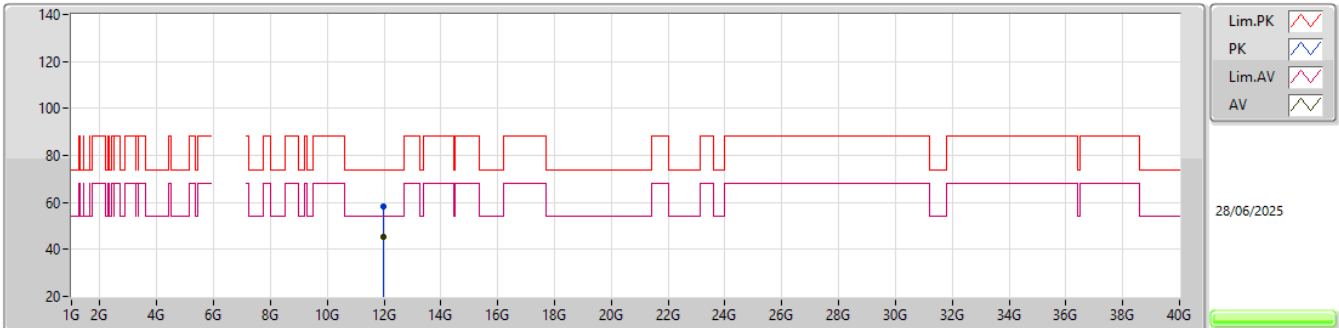


EUT V_2TX
Setting 22
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.96999G	58.21	74.00	-15.79	40.78	3	Horizontal	326	1.19	-	38.74	12.11	33.42			
AV	11.97152G	45.34	54.00	-8.66	27.91	3	Horizontal	326	1.19	-	38.74	12.11	33.42			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


5985MHz_TX

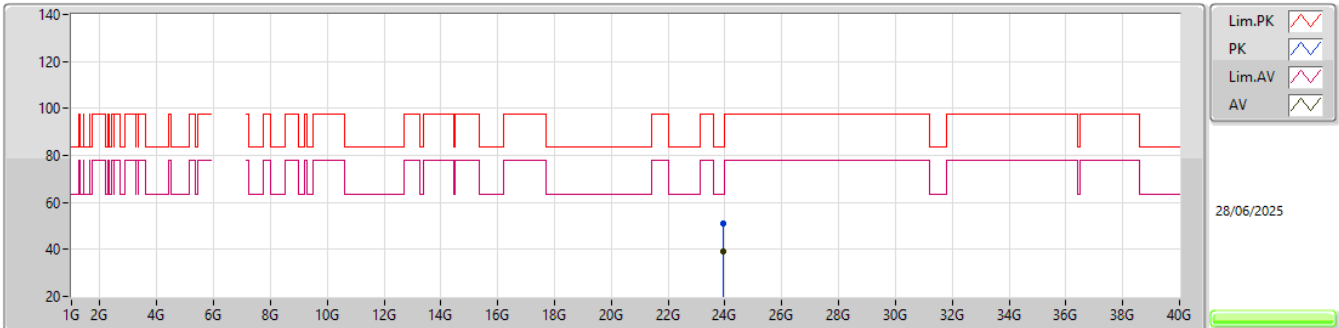EUT_V_2TX
Setting 22
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93663G	50.99	83.54	-32.55	36.55	1	Vertical	192	1.96	-	39.00	23.07	47.63			
AV	23.9376G	38.96	63.54	-24.58	24.50	1	Vertical	192	1.96	-	39.00	23.08	47.62			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


5985MHz_TX

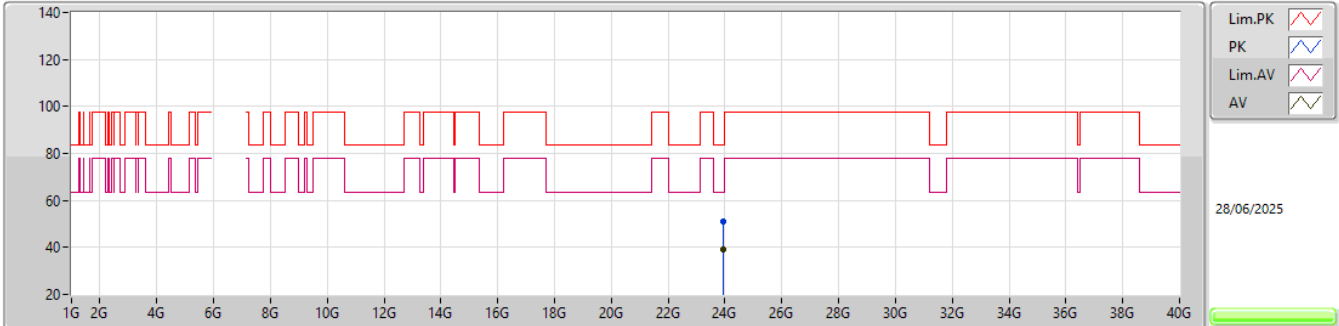EUT_V_2TX
Setting 22
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93986G	51.26	83.54	-32.28	36.80	1	Horizontal	105	1.74	-	39.00	23.08	47.62			
AV	23.93755G	38.96	63.54	-24.58	24.50	1	Horizontal	105	1.74	-	39.00	23.08	47.62			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6225MHz_TX

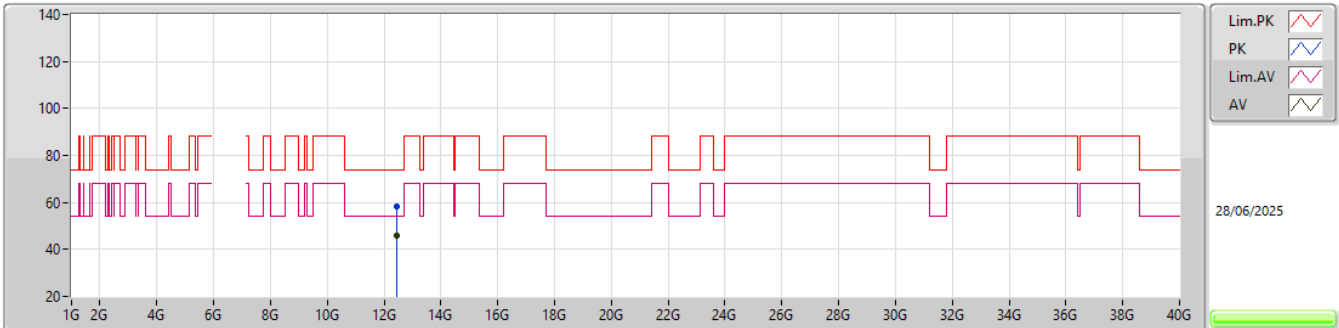


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4499G	58.24	74.00	-15.76	39.71	3	Vertical	103	1.56	-	38.90	12.60	32.97			
AV	12.44818G	45.64	54.00	-8.36	27.11	3	Vertical	103	1.56	-	38.90	12.60	32.97			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6225MHz_TX

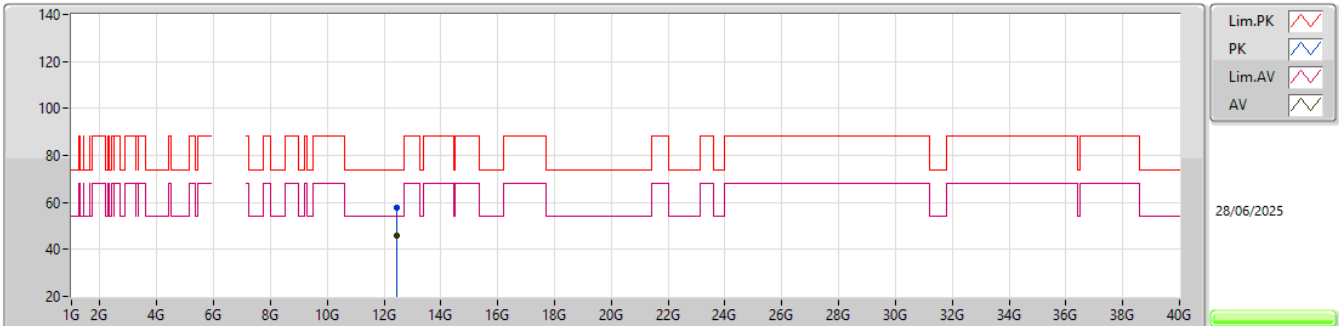


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.44863G	57.73	74.00	-16.27	39.20	3	Horizontal	92	1.61	-	38.90	12.60	32.97			
AV	12.45352G	45.69	54.00	-8.31	27.15	3	Horizontal	92	1.61	-	38.91	12.60	32.97			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6225MHz_TX

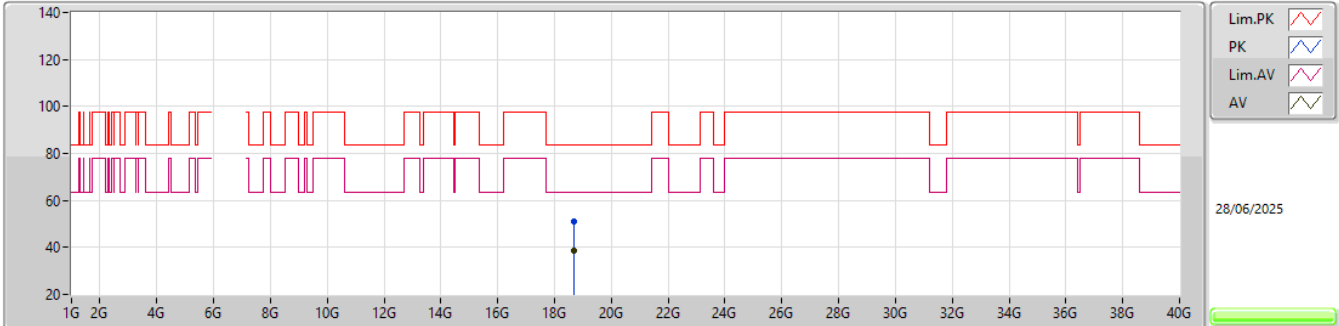EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67104G	51.13	83.54	-32.41	41.08	1	Vertical	197	2.93	-	37.90	20.62	48.47			
AV	18.67219G	38.44	63.54	-25.10	28.39	1	Vertical	197	2.93	-	37.90	20.62	48.47			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6225MHz_TX

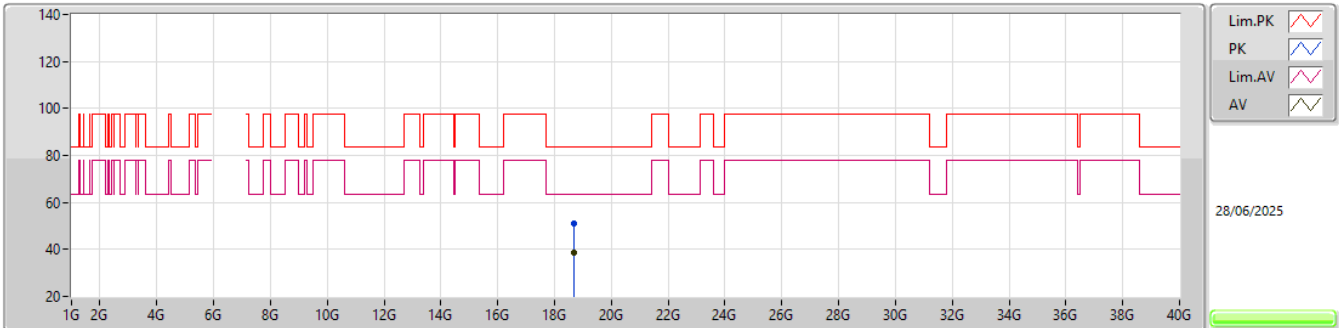


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6775G	51.05	83.54	-32.49	41.01	1	Horizontal	318	2.93	-	37.90	20.62	48.48			
AV	18.67555G	38.45	63.54	-25.09	28.41	1	Horizontal	318	2.93	-	37.90	20.62	48.48			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6385MHz_TX

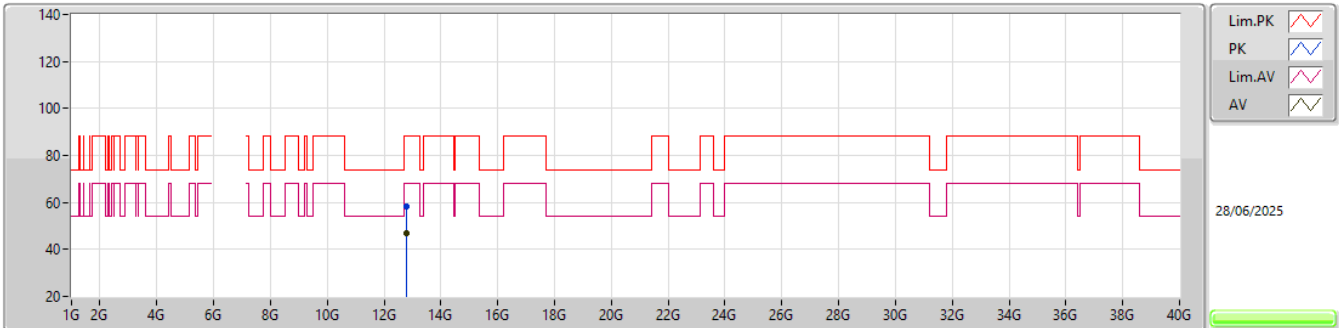


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77063G	58.50	88.20	-29.70	39.28	3	Vertical	325	1.86	-	39.58	12.93	33.29			
RMS	12.7715G	46.65	68.20	-21.55	27.42	3	Vertical	325	1.86	-	39.59	12.93	33.29			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6385MHz_TX

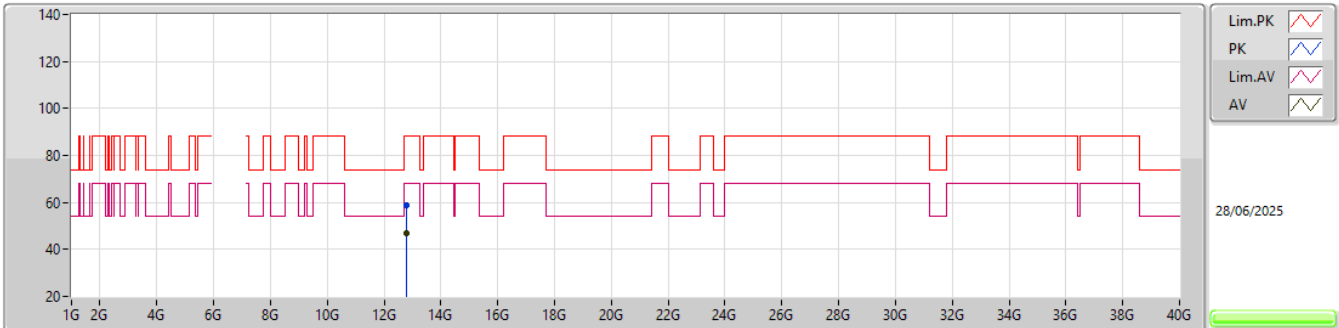


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77024G	59.03	88.20	-29.17	39.81	3	Horizontal	155	2.52	-	39.58	12.93	33.29			
RMS	12.77382G	46.67	68.20	-21.53	27.43	3	Horizontal	155	2.52	-	39.60	12.93	33.29			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6385MHz_TX

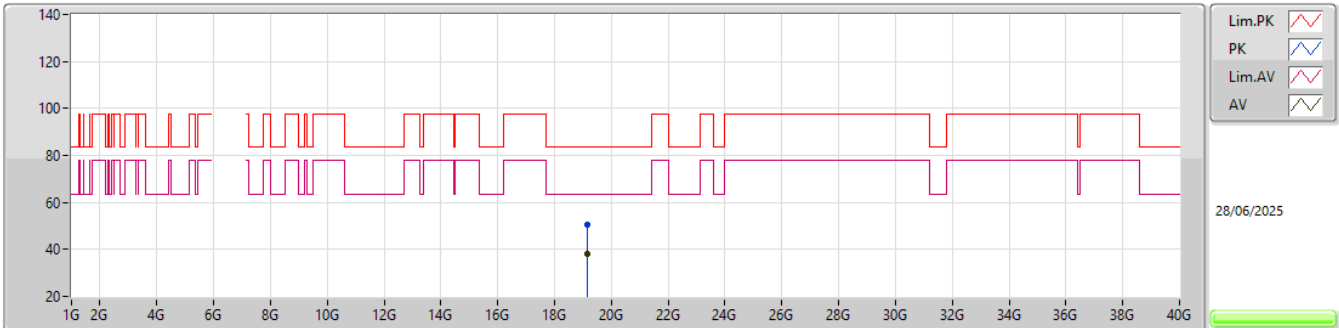EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.1524G	50.72	83.54	-32.82	40.80	1	Vertical	337	2.47	-	37.99	20.73	48.80			
AV	19.1572G	38.24	63.54	-25.30	28.34	1	Vertical	337	2.47	-	37.97	20.73	48.80			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6385MHz_TX

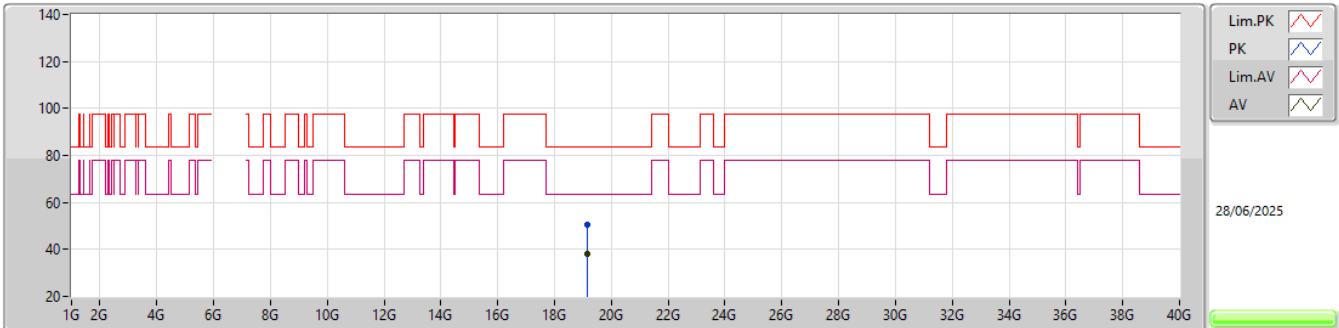EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15075G	50.29	83.54	-33.25	40.36	1	Horizontal	94	1.66	-	38.00	20.73	48.80			
AV	19.1548G	38.26	63.54	-25.28	28.35	1	Horizontal	94	1.66	-	37.98	20.73	48.80			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6465MHz_TX

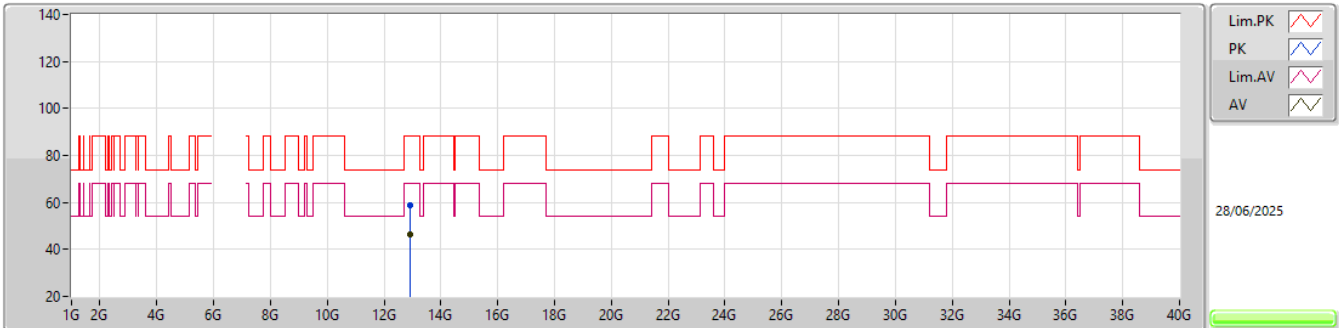


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92656G	58.86	88.20	-29.34	39.21	3	Vertical	12	1.74	-	40.06	13.09	33.50			
RMS	12.92802G	46.32	68.20	-21.88	26.65	3	Vertical	12	1.74	-	40.07	13.10	33.50			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6465MHz_TX

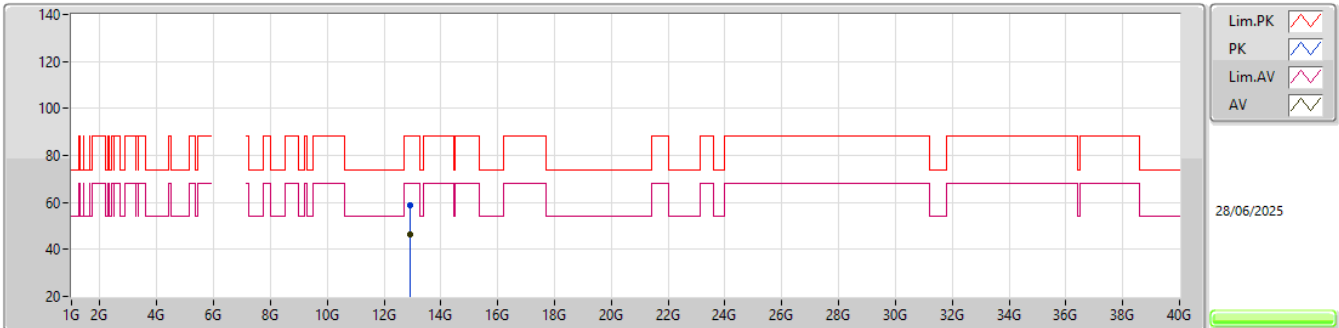


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92891G	58.68	88.20	-29.52	39.01	3	Horizontal	272	1.81	-	40.07	13.10	33.50			
RMS	12.92791G	46.32	68.20	-21.88	26.65	3	Horizontal	272	1.81	-	40.07	13.10	33.50			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6465MHz_TX

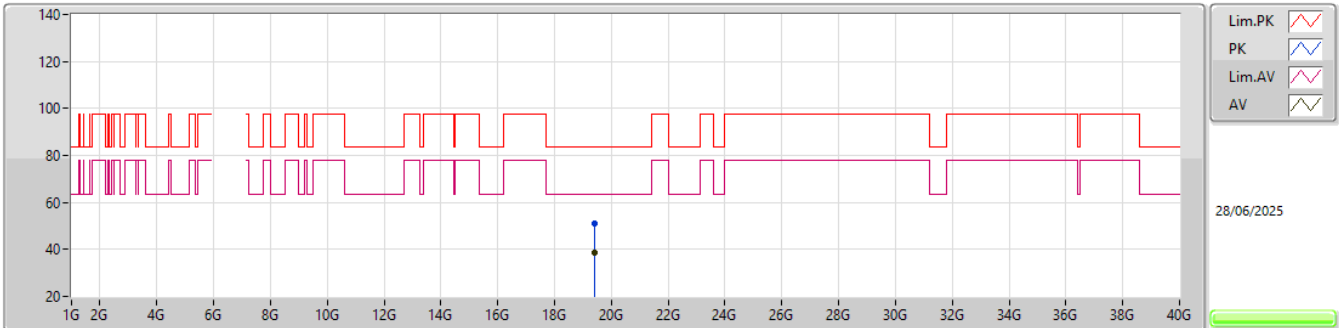EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39987G	51.29	83.54	-32.25	41.33	1	Vertical	217	1.34	-	37.90	20.86	48.80			
AV	19.39786G	38.87	63.54	-24.67	28.91	1	Vertical	217	1.34	-	37.90	20.86	48.80			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6465MHz_TX

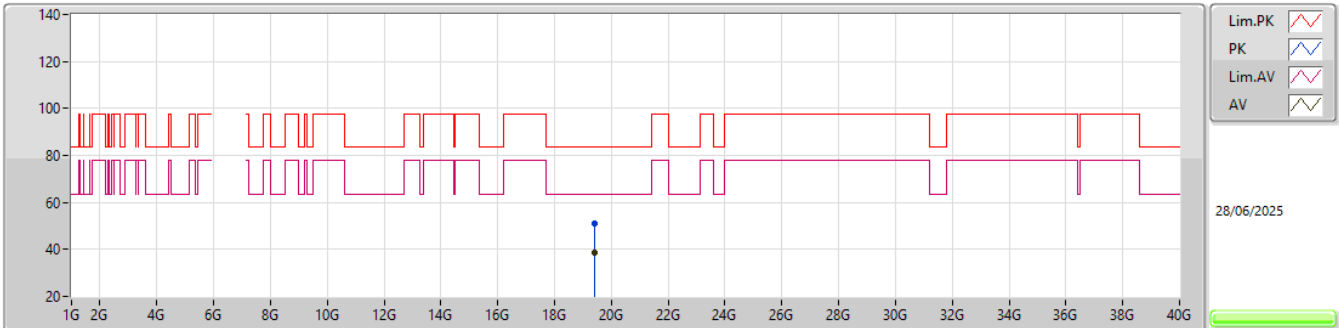EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39034G	51.29	83.54	-32.25	41.36	1	Horizontal	244	2.67	-	37.88	20.85	48.80			
AV	19.3945G	38.84	63.54	-24.70	28.89	1	Horizontal	244	2.67	-	37.89	20.86	48.80			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6545MHz_TX

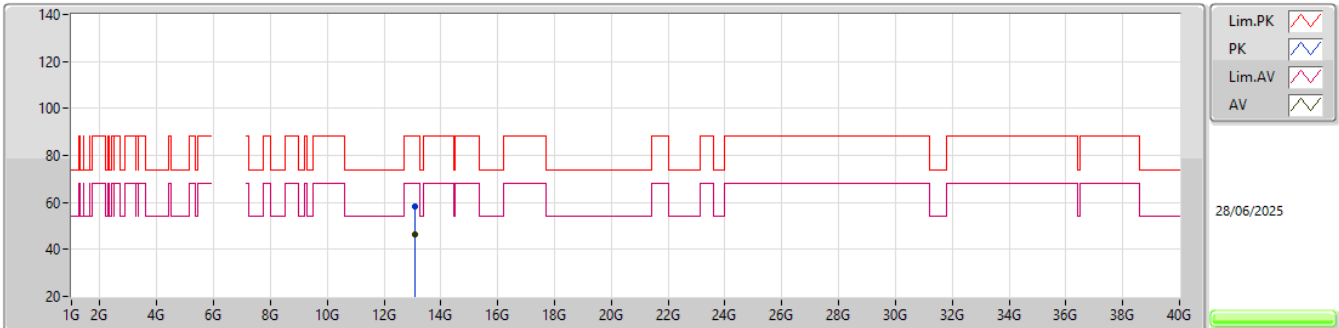


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.08667G	58.53	88.20	-29.67	38.86	3	Vertical	202	1.19	-	39.97	13.26	33.56			
RMS	13.08735G	46.41	68.20	-21.79	26.74	3	Vertical	202	1.19	-	39.97	13.26	33.56			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6545MHz_TX

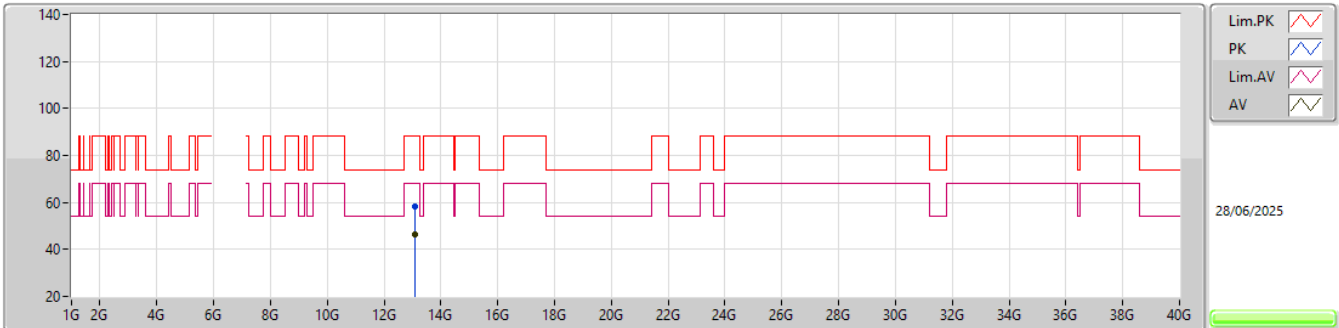


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09367G	58.44	88.20	-29.76	38.74	3	Horizontal	261	1.45	-	39.99	13.27	33.56			
RMS	13.0893G	46.43	68.20	-21.77	26.75	3	Horizontal	261	1.45	-	39.98	13.26	33.56			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6545MHz_TX

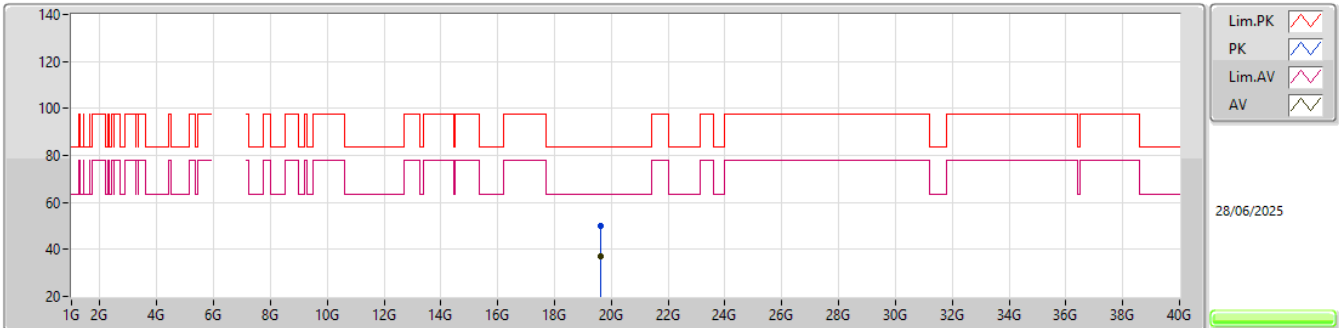


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63628G	50.10	83.54	-33.44	40.39	1	Vertical	315	2.80	-	37.70	20.81	48.80			
AV	19.63014G	37.24	63.54	-26.30	27.52	1	Vertical	315	2.80	-	37.70	20.82	48.80			

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6545MHz_TX

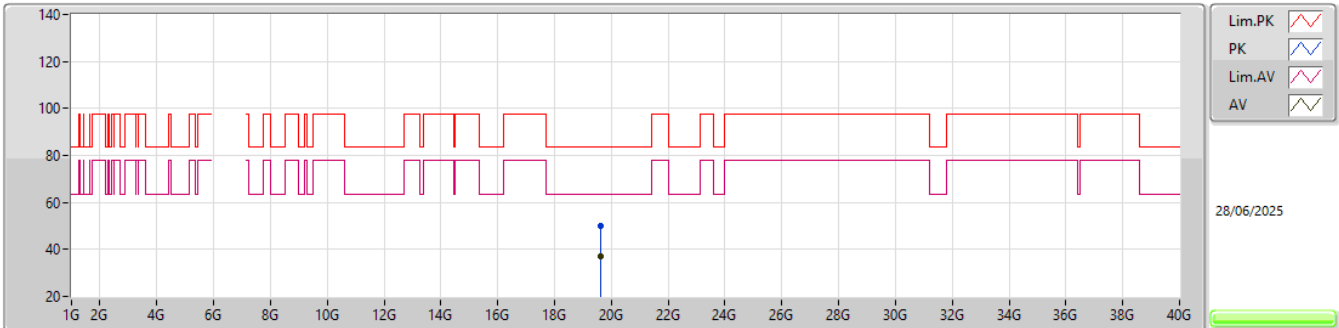


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63054G	50.02	83.54	-33.52	40.30	1	Horizontal	356	2.41	-	37.70	20.82	48.80			
AV	19.6329G	37.22	63.54	-26.32	27.51	1	Horizontal	356	2.41	-	37.70	20.81	48.80			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6625MHz_TX

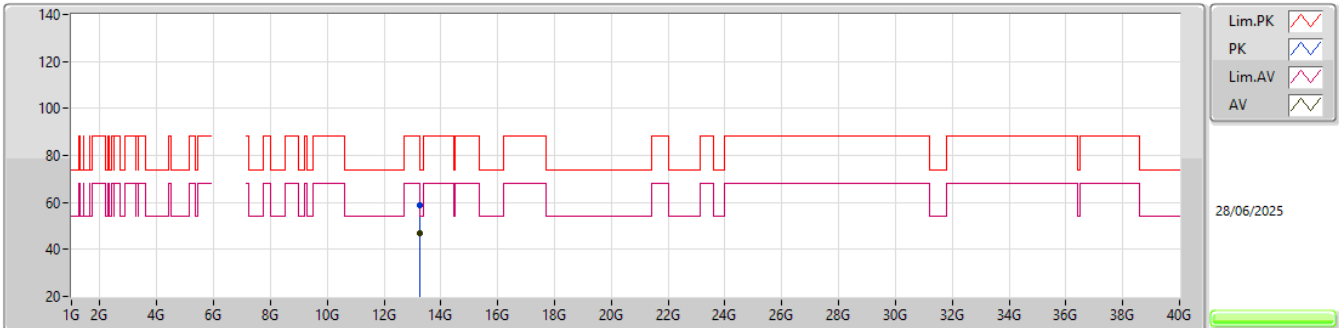


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.24616G	58.66	88.20	-29.54	38.63	3	Vertical	317	2.16	-	40.10	13.43	33.50			
RMS	13.2474G	47.11	68.20	-21.09	27.08	3	Vertical	317	2.16	-	40.10	13.43	33.50			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6625MHz_TX

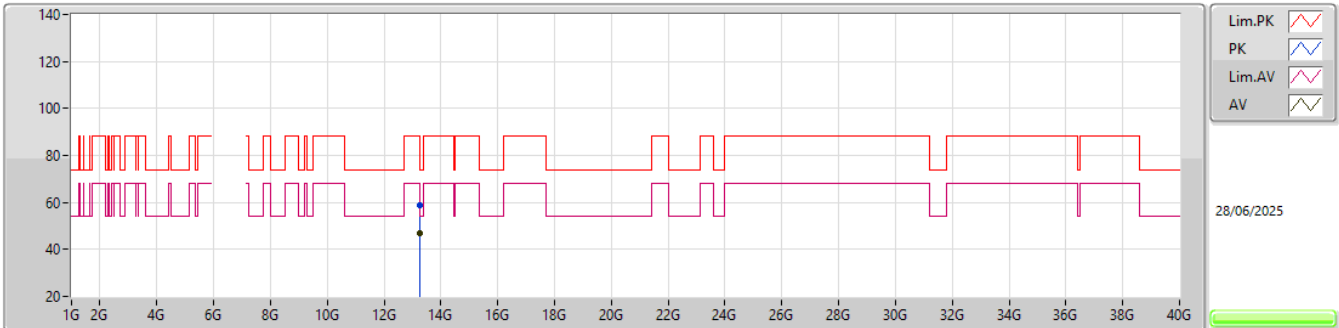


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.2497G	58.74	88.20	-29.46	38.71	3	Horizontal	280	2.97	-	40.10	13.43	33.50			
RMS	13.24787G	47.10	68.20	-21.10	27.07	3	Horizontal	280	2.97	-	40.10	13.43	33.50			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6625MHz_TX

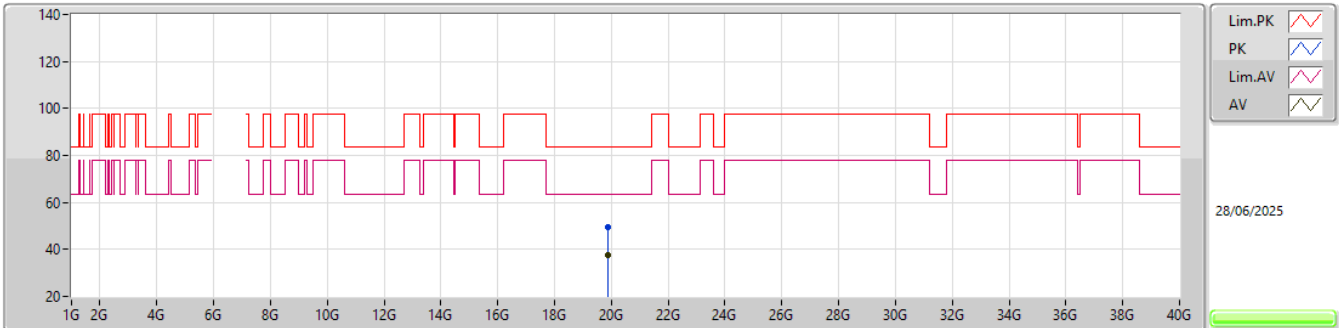EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87513G	49.56	83.54	-33.98	40.02	1	Vertical	112	1.75	-	37.70	20.64	48.80			
AV	19.87499G	37.34	63.54	-26.20	27.80	1	Vertical	112	1.75	-	37.70	20.64	48.80			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6625MHz_TX

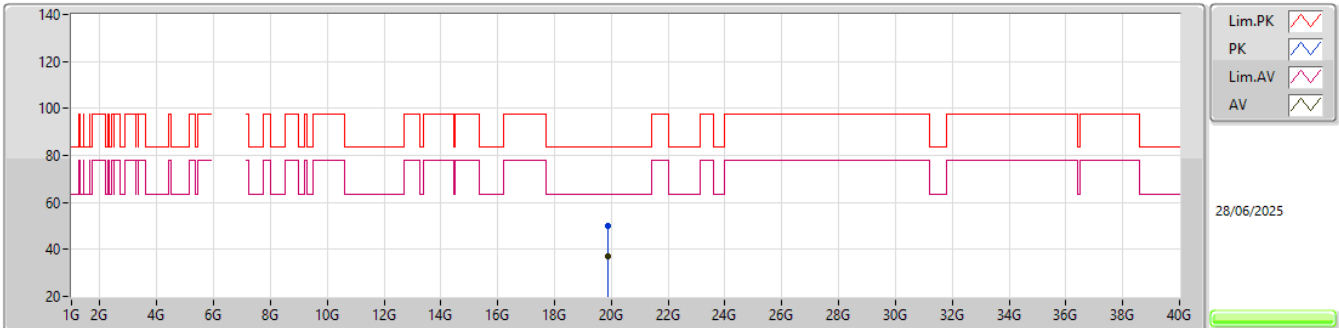


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87593G	50.00	83.54	-33.54	40.46	1	Horizontal	227	2.89	-	37.70	20.64	48.80			
AV	19.87013G	37.23	63.54	-26.31	27.69	1	Horizontal	227	2.89	-	37.70	20.64	48.80			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6705MHz_TX

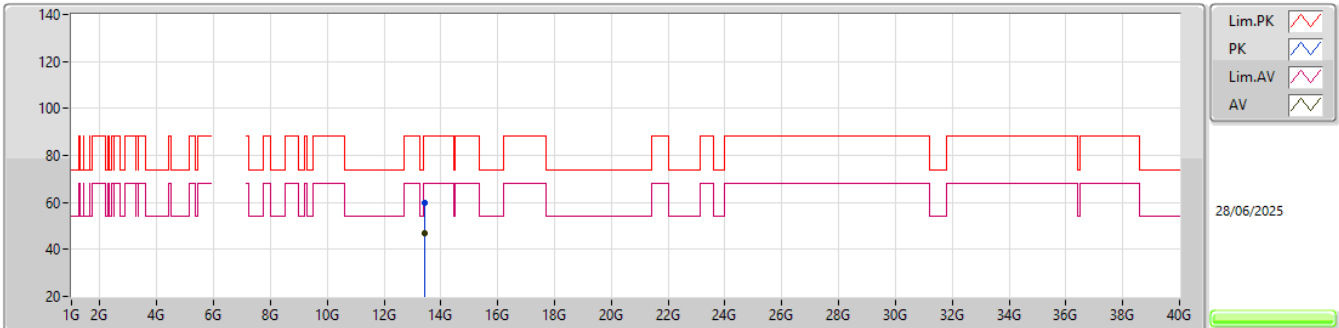


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41085G	59.74	88.20	-28.46	39.13	3	Vertical	144	2.11	-	40.44	13.60	33.43			
RMS	13.41369G	46.75	68.20	-21.45	26.13	3	Vertical	144	2.11	-	40.45	13.60	33.43			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6705MHz_TX

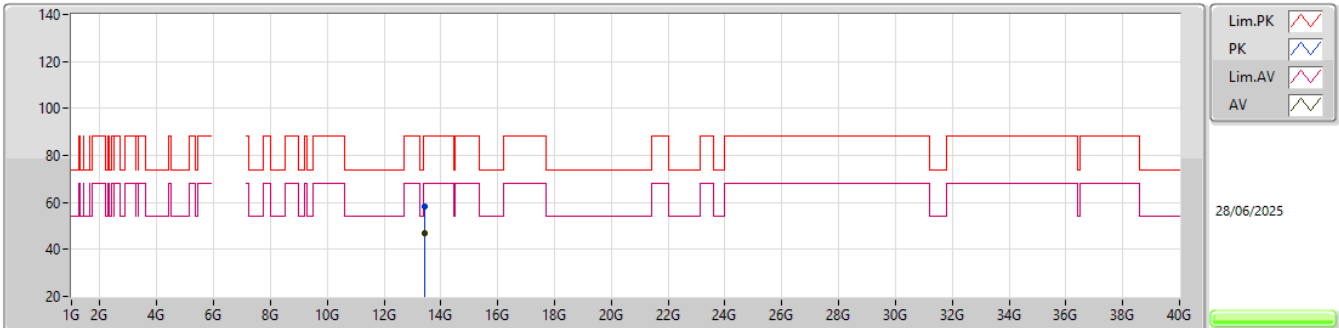


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41271G	58.26	88.20	-29.94	37.64	3	Horizontal	70	1.77	-	40.45	13.60	33.43			
RMS	13.41318G	46.65	68.20	-21.55	26.03	3	Horizontal	70	1.77	-	40.45	13.60	33.43			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6705MHz_TX

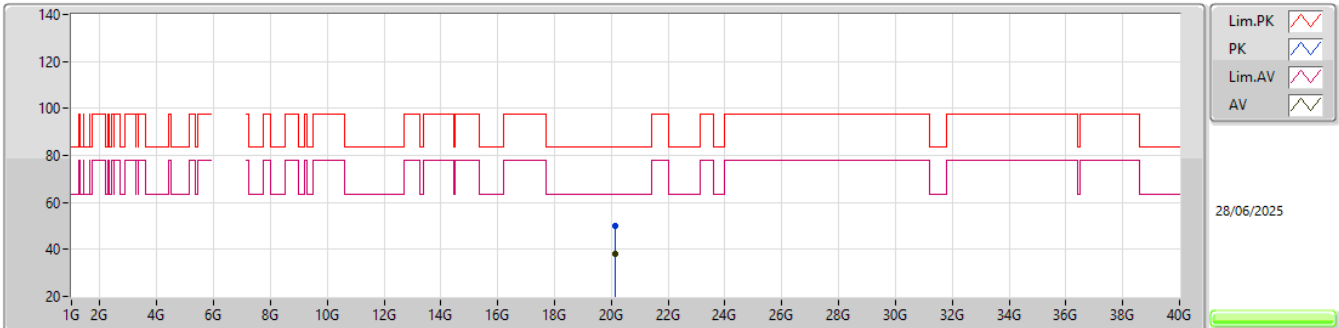


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11897G	49.94	83.54	-33.60	40.15	1	Vertical	280	1.56	-	37.80	20.77	48.78			
AV	20.11872G	37.88	63.54	-25.66	28.09	1	Vertical	280	1.56	-	37.80	20.77	48.78			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6705MHz_TX

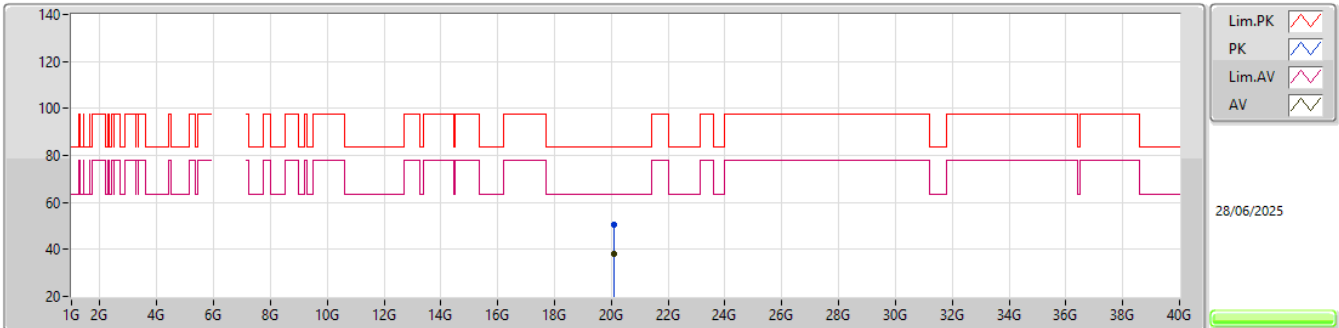EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11021G	50.46	83.54	-33.08	40.69	1	Horizontal	25	1.50	-	37.80	20.75	48.78			
AV	20.11414G	37.88	63.54	-25.66	28.10	1	Horizontal	25	1.50	-	37.80	20.76	48.78			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6785MHz_TX

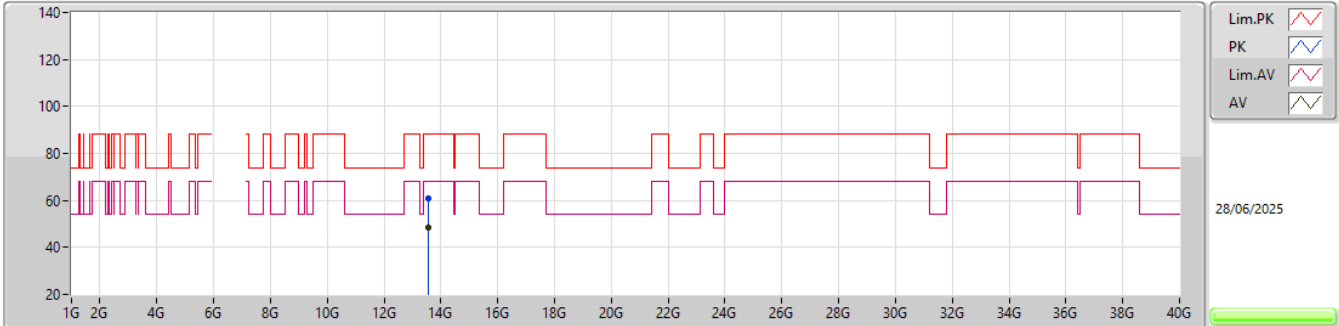


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.57264G	60.62	88.20	-27.58	39.35	3	Vertical	75	1.93	-	40.91	13.77	33.41			
RMS	13.57054G	48.47	68.20	-19.73	27.20	3	Vertical	75	1.93	-	40.92	13.76	33.41			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6785MHz_TX

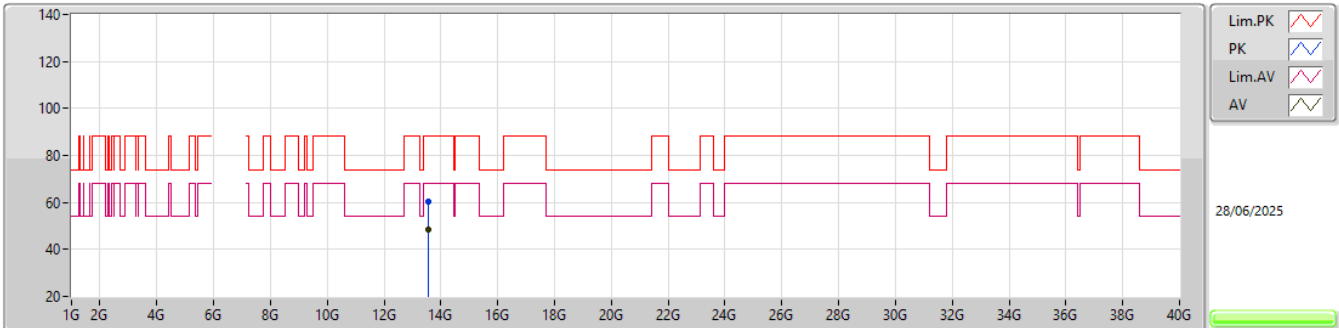EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.57297G	60.17	88.20	-28.03	38.90	3	Horizontal	204	1.11	-	40.91	13.77	33.41			
RMS	13.57312G	48.40	68.20	-19.80	27.13	3	Horizontal	204	1.11	-	40.91	13.77	33.41			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6785MHz_TX

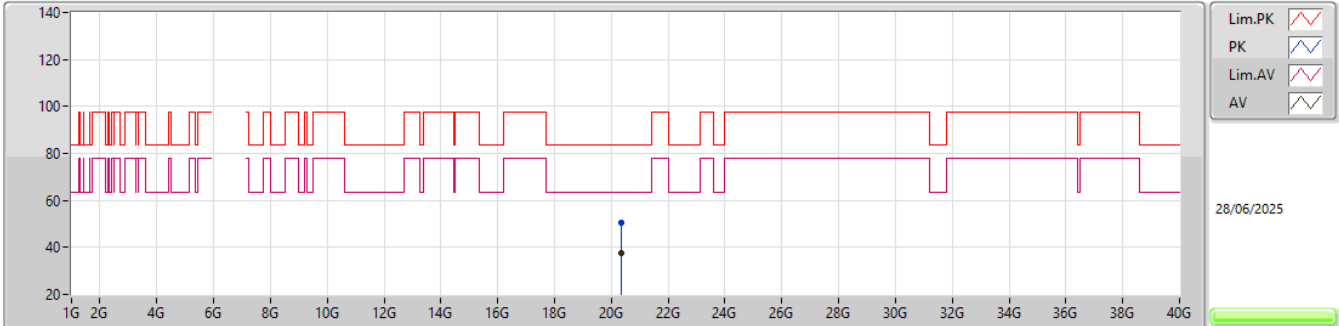EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35083G	50.45	83.54	-33.09	40.09	1	Vertical	281	2.12	-	37.90	21.19	48.73			
AV	20.35283G	37.72	63.54	-25.82	27.37	1	Vertical	281	2.12	-	37.89	21.19	48.73			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6785MHz_TX

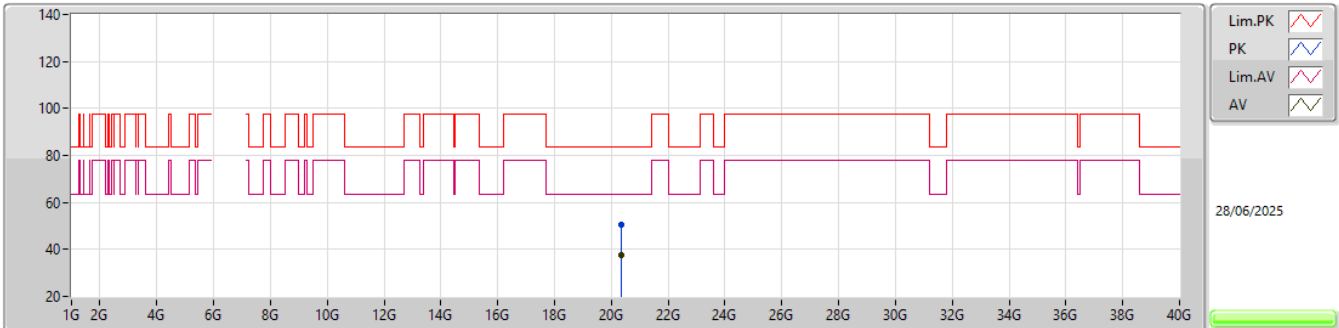EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.3518G	50.27	83.54	-33.27	39.91	1	Horizontal	149	1.62	-	37.90	21.19	48.73			
AV	20.3534G	37.73	63.54	-25.81	27.38	1	Horizontal	149	1.62	-	37.89	21.19	48.73			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6865MHz_TX

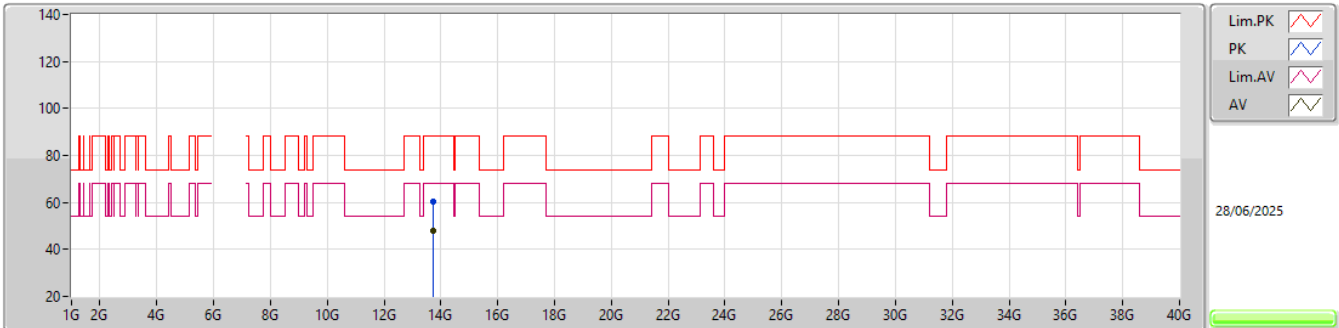


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.73393G	60.16	88.20	-28.04	39.16	3	Vertical	20	1.27	-	40.53	13.93	33.46			
RMS	13.73237G	48.04	68.20	-20.16	27.03	3	Vertical	20	1.27	-	40.54	13.93	33.46			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6865MHz_TX

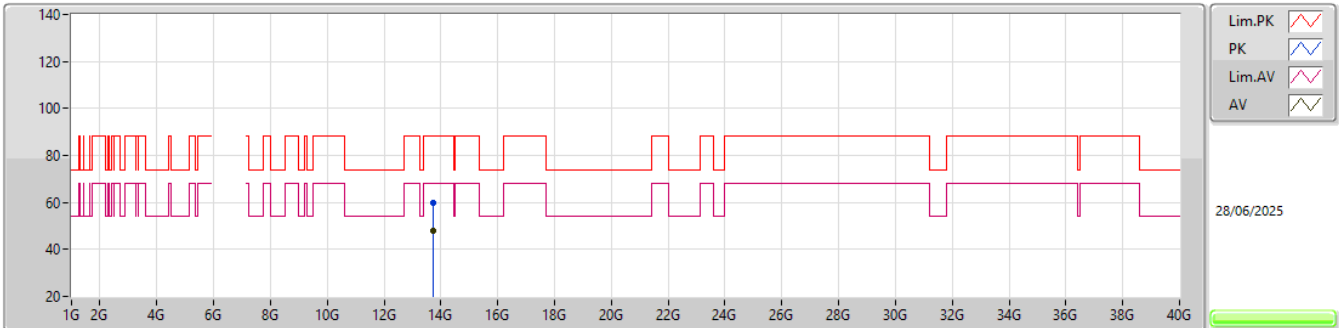


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.7328G	59.88	88.20	-28.32	38.88	3	Horizontal	2	2.55	-	40.53	13.93	33.46			
RMS	13.73212G	47.83	68.20	-20.37	26.82	3	Horizontal	2	2.55	-	40.54	13.93	33.46			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6865MHz_TX

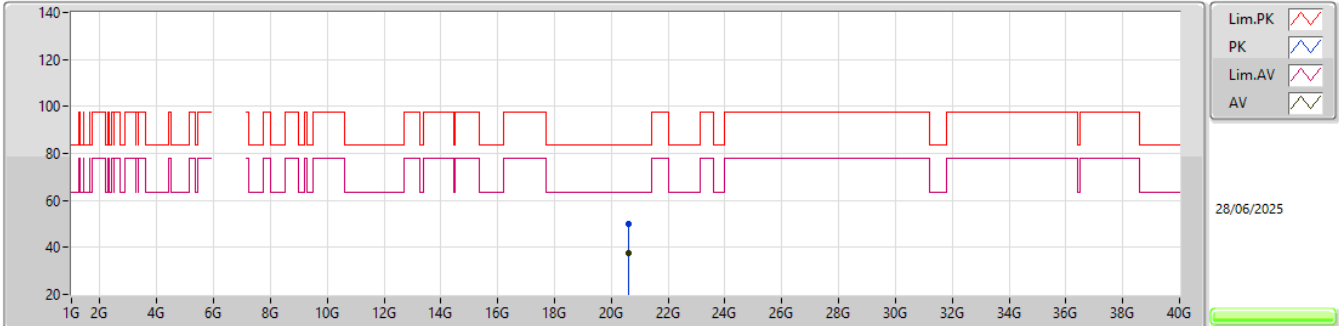EUT V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.59758G	50.12	83.54	-33.42	39.36	1	Vertical	192	2.34	-	37.90	21.56	48.70			
AV	20.59383G	37.81	63.54	-25.73	27.05	1	Vertical	192	2.34	-	37.90	21.56	48.70			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6865MHz_TX

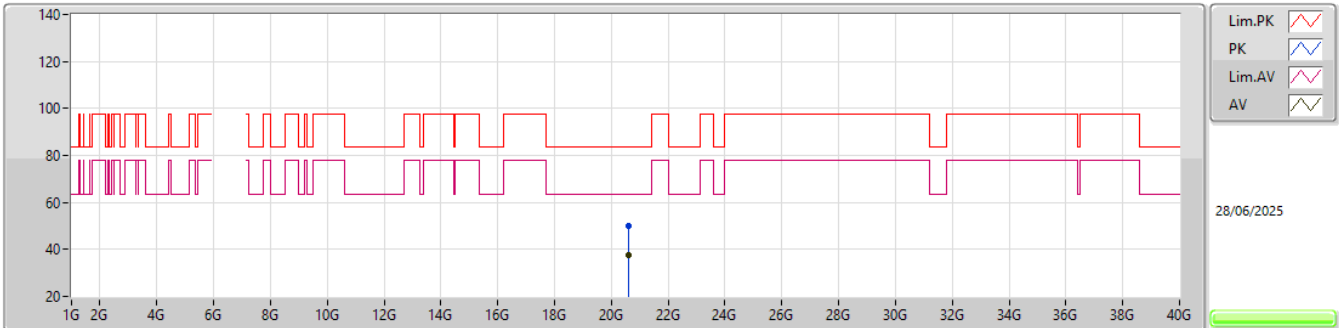


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.59953G	50.12	83.54	-33.42	39.36	1	Horizontal	262	1.75	-	37.90	21.56	48.70			
AV	20.5992G	37.80	63.54	-25.74	27.04	1	Horizontal	262	1.75	-	37.90	21.56	48.70			

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6945MHz_TX

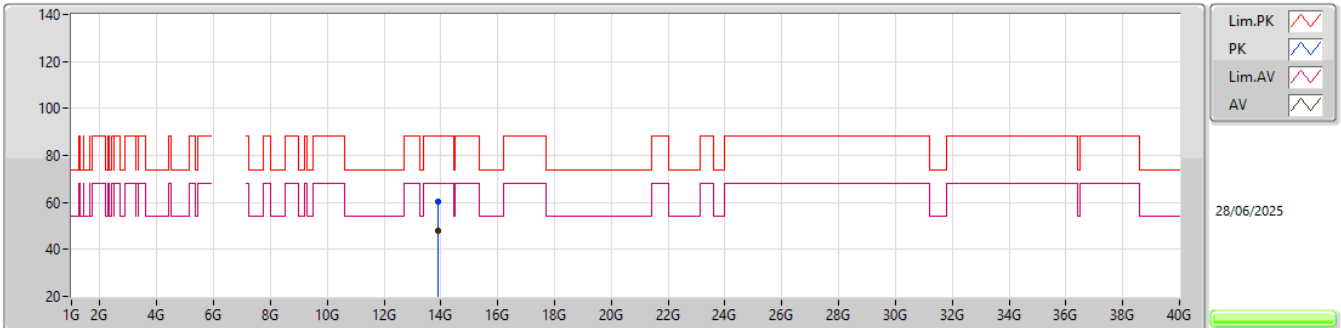


EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.88821G	60.51	88.20	-27.69	39.40	3	Vertical	300	1.49	-	40.53	14.09	33.51			
RMS	13.88819G	47.94	68.20	-20.26	26.83	3	Vertical	300	1.49	-	40.53	14.09	33.51			

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6945MHz_TX

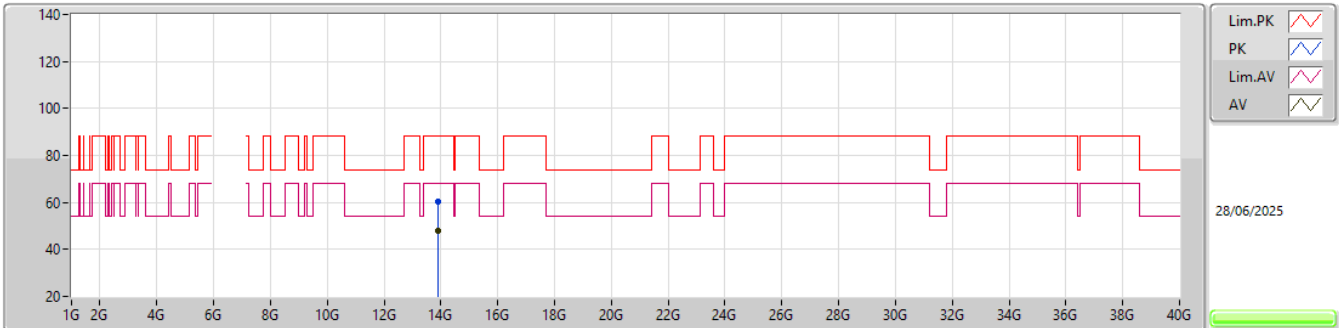


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.89144G	60.59	88.20	-27.61	39.46	3	Horizontal	29	2.37	-	40.55	14.10	33.52			
RMS	13.88836G	47.94	68.20	-20.26	26.83	3	Horizontal	29	2.37	-	40.53	14.09	33.51			

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6945MHz_TX

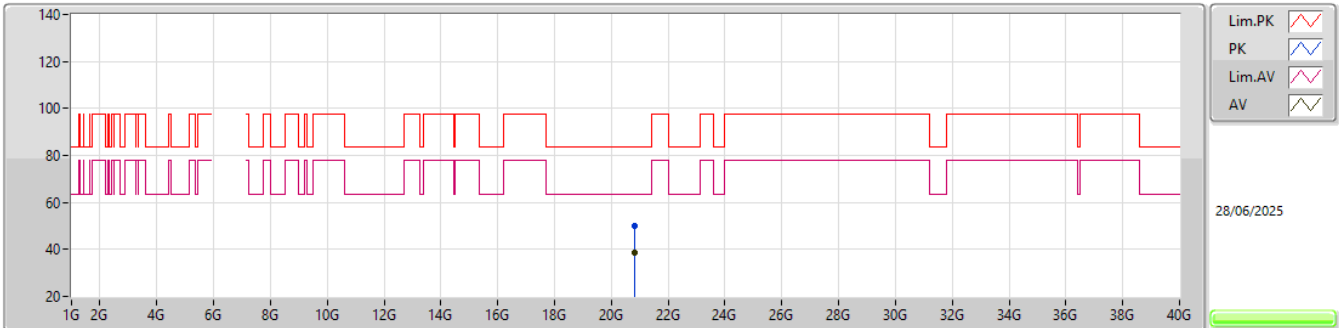


EUT_V_2TX
Setting 26
05-L-L-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.83156G	50.19	83.54	-33.35	39.19	1	Vertical	82	1.76	-	37.90	21.80	48.70			
AV	20.83123G	38.43	63.54	-25.11	27.43	1	Vertical	82	1.76	-	37.90	21.80	48.70			

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6945MHz_TX

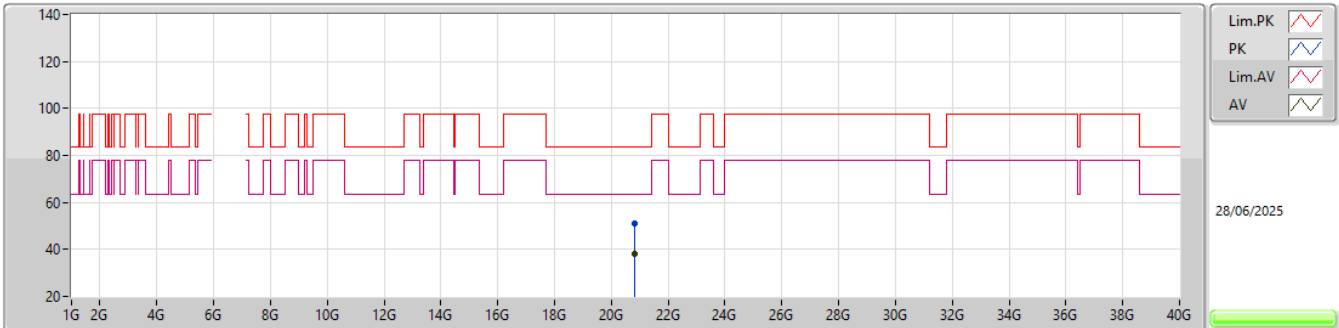EUT V_2TX
Setting 26
05-L-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83897G	50.78	83.54	-32.76	39.77	1	Horizontal	43	2.91	-	37.90	21.81	48.70			
AV	20.83075G	38.31	63.54	-25.23	27.31	1	Horizontal	43	2.91	-	37.90	21.80	48.70			

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

7025MHz_TX

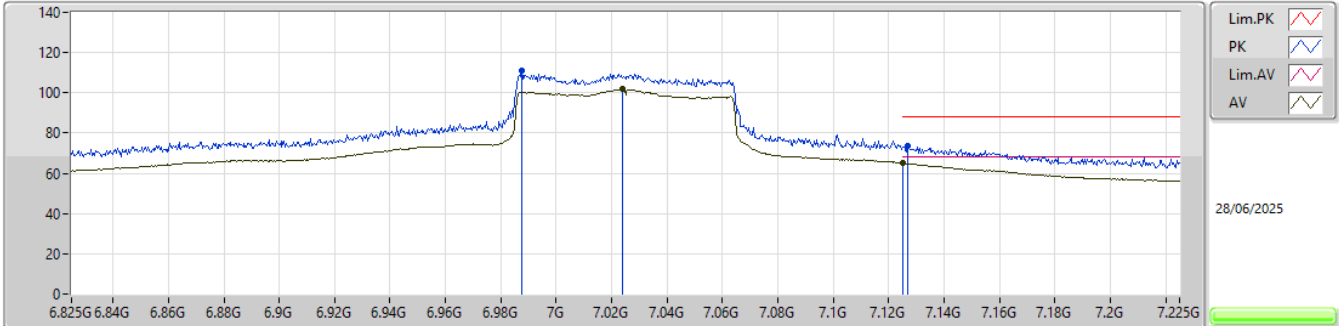


EUT Y_2TX
Setting 23.5
05-L-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	6.9874G	110.83	Inf	-Inf	100.82	3	Vertical	31	2.80	-	36.10	9.23	35.32				
RMS	7.0238G	101.76	Inf	-Inf	91.60	3	Vertical	31	2.80	-	36.20	9.26	35.30				
PK	7.127G	73.56	88.20	-14.64	62.63	3	Vertical	31	2.80	-	36.76	9.28	35.11				
RMS	7.125G	65.12	68.20	-3.08	54.20	3	Vertical	31	2.80	-	36.75	9.28	35.11				

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

7025MHz_TX

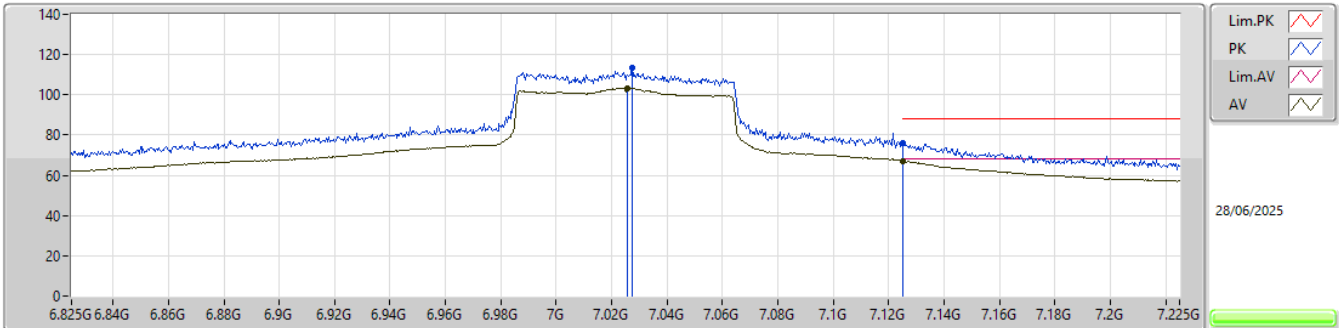

EUT_V_2TX
Setting 23.5
05-L-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	7.0274G	113.54	Inf	-Inf	103.36	3	Horizontal	312	1.80	-	36.21	9.26	35.29				
RMS	7.0258G	103.45	Inf	-Inf	93.28	3	Horizontal	312	1.80	-	36.20	9.26	35.29				
PK	7.125G	76.24	88.20	-11.96	65.32	3	Horizontal	312	1.80	-	36.75	9.28	35.11				
RMS	7.125G	67.22	68.20	-0.98	56.30	3	Horizontal	312	1.80	-	36.75	9.28	35.11				