



Report No.: FCC 1910107-04 File Reference No.: 2019-11-16

Applicant: VisionLabs.B.V.

Product: Biometrical access control terminals VisionLabs LUNA ACE

Model No.: ACE-0001

Trademark: N/A

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10,FCC Part 15 Subpart C, Paragraph 15.247 for the evaluation of electromagnetic

compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: November 16, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1910107-04 Page 2 of 98

Date: 2019-11-16



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	8
3.2	Test Standards	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Undesirable Emission and Restrict band.	12
7.0	Bandwidth Measurement.	31
8.0	Peak Transmit Power Measurement.	66
9.0	Peak Power Spectral Density Measurement	72
10.0	Frequency Stability.	93
11.0	Antenna Requirement.	95
12.0	IC Label.	96
13.0	Photo of Test Setup and EUT View.	97

Date: 2019-11-16



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: VisionLabs.B.V.

Address: Vijzelstraat 20,4th Floor,1017 HK, Amsterdam, The Netherlands

Telephone: +31 20 369 0493

Fax: --

1.3 Description of EUT

Product: Biometrical access control terminals VisionLabs LUNA ACE

Manufacturer: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: 4/Floor, west block, Longzhu Road, Xin WuCun Industry Building, NanShan

District, ShenZhen

Brand Name: N/A
Additional Brand Name: N/A

Model Number: ACE-0001

Additional Model Number: N/A

Type of Modulation IEEE 802.11a/n (HT20/HT40): OFDM(64QAM, 16QAM, QPSK, BPSK);

IEEE 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

Frequency Band 1: 5180MHz-5240MHz

Channel Separation 802.11a/802.11n20:20MHz, 802.11n40:40MHz, 802.11ac: 80MHz

Air Data Rate IEEE 802.11a : 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n/HT20: mcs0: 6.5Mbps,mcs1:13Mbps,mcs2:19.5Mbps,mcs3:26Mbps,

mcs4:39Mbps,mcs5:52Mbps,mcs6:58.5Mbps,mcs7:65Mbps

IEEE 802.11n/HT40: mcs0:15Mbps,mcs1:30Mbps,mcs2:45Mbps,mcs3:60Mbps,

mcs4:90Mbps,mcs5:120Mbps,mcs6:135Mbps,mcs7:150Mbps

IEEE 802.11ac: Up to 433.3Mbps

Antenna: Two Integral antennas used.

Antenna Gain: Maximum 3.0dBi for each one

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 98

Date: 2019-11-16

Report No.: FCC1910107-04



Test Mode: During testing, EUT was set to 100% duty cycle. 6Mbps air data rate was the worst case

for 802.11a mode; mcs0 air data rate was the worst case for 802.11n mode; 23.9Mbps air

data rate was the worst case for 802.11ac mode.

Frequency Selection By software

Input Voltage: DC5V, 5A from power supply or POE 48V

Each Channel Operation Frequency

Band 1						
802.11a / 11n HT2	20 / 802.11ac VHT20	802.11n HT4	0 / 802.11acVHT40	802.11ac VHT80		
Channel	Frequency	Channel	Frequency	Channel	Frequency	
36	5180MHz	38	5190 MHz	42	5210 MHz	
40	5200 MHz	46	5230 MHz			
44	5220 MHz					
48	5240 MHz					

The selected test channels as follows:

Band 1							
802.11a /	11n HT20	802.11:	n HT40	802.11ac VHT80			
Channel	Frequency	Channel	Frequency	Channel	Frequency		
36	5180MHz	38	5190 MHz	42	5210 MHz		
40	5200 MHz	46	5230 MHz				
48	5240 MHz						

Note: 802.11ac VHT20/VHT40 is similar with 802.11n HT20/HT40.

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2019-10-17 to 2019-11-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2020-06-20	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Date: 2019-11-16



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested ac	ccording to the following spec	ifications:	
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.407	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart E Paragraph 15.407 (b1/4/5/6/7), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	PASS	Complies
FCC Part 15, Paragraph 15.407 (a1/2/3)	Peak Transmit Power	PASS	Complies
FCC Part 15, Paragraph 15.407 (a)(6)	Peak Power Excursion	PASS	Complies
FCC Part 15, Paragraph 15.407 (a/1/2/3)	Peak Power Spectral Density	PASS	Complies
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.10:2013, ANSI C63.4:2014 789033 D02 General UNII Test Procedures New Rules v01r04

4.0 **EUT Modification**


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2019-11-16



5. Power Line Conducted Emission Test

5.1 Schematics of the test

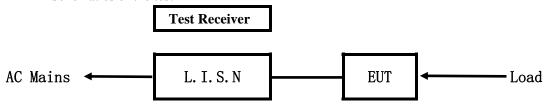


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

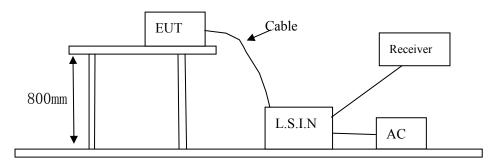

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Biometrical access control terminals VisionLabs LUNA ACE	GLORY STAR TECHNICS (SHENZHEN) CO., LTD.	ACE-0001	2AU6Z-ACE-0001RFID

The report refers only to the sample tested and does not apply to the bulk.

Page 9 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power	FUJIA	FJ-SW528G0505000E	Input: 100-240V~, 50/60Hz, 1.5A;
Supply			Output: DC5V, 5A

5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

Power line conducted Emission Limit according to Paragraph 15.207 and 15.107 5.5

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2019-11-16



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keeping WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

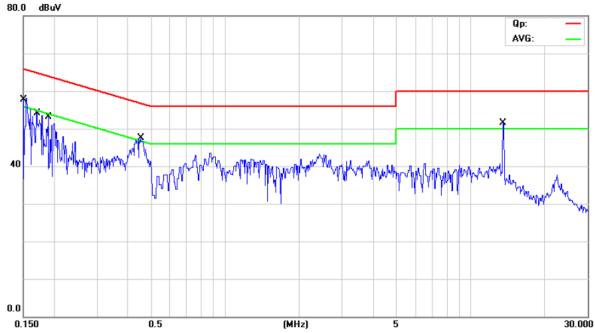

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1516	34.70	9.78	44.48	65.91	-21.43	QP	
2	0.1516	-1.50	9.78	8.28	55.91	-47.63	AVG	
3	0.1707	31.30	9.77	41.07	64.93	-23.86	QP	
4	0.1707	2.70	9.77	12.47	54.93	-42.46	AVG	
5	0.1884	26.70	9.76	36.46	64.11	-27.65	QP	
6	0.1884	12.10	9.76	21.86	54.11	-32.25	AVG	
7	0.4534	32.70	9.77	42.47	56.81	-14.34	QP	
8	0.4534	4.20	9.77	13.97	46.81	-32.84	AVG	
9 *	13.5620	36.40	10.32	46.72	60.00	-13.28	QP	
10	13.5620	6.70	10.32	17.02	50.00	-32.98	AVG	

Date: 2019-11-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keeping WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

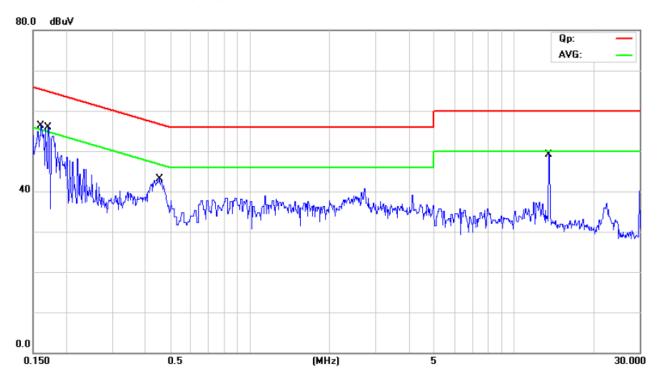

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1610	33.20	9.78	42.98	65.41	-22.43	QP	
2	0.1610	4.40	9.78	14.18	55.41	-41.23	AVG	
3	0.1716	30.20	9.77	39.97	64.88	-24.91	QP	
4	0.1716	0.50	9.77	10.27	54.88	-44.61	AVG	
5	0.4482	27.60	9.77	37.37	56.91	-19.54	QP	
6	0.4482	12.90	9.77	22.67	46.91	-24.24	AVG	
7 *	13.5601	37.20	10.32	47.52	60.00	-12.48	QP	
8	13.5601	17.20	10.32	27.52	50.00	-22.48	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-11-16




6 Undesirable Emission and Restrict band

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at GTS EMC Laboratory. This site is on file with the IC laboratory division, Registration No.9079A-02
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 40 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector.

 Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

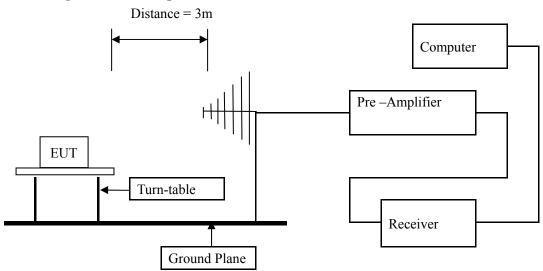

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC1910107-04 Page 13 of 98

Date: 2019-11-16



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Date: 2019-11-16



Page 14 of 98

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keeping WIFI Transmitting

Results: Pass

Page 15 of 98

800

1000


Report No.: FCC1910107-04

Date: 2019-11-16

0.0



Test Figure:

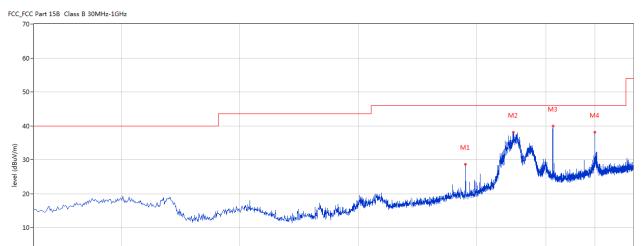

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	374.991	28.68	-9.44	46.0	-17.32	Peak	63.00	100	Н	Pass
2	496.453	38.11	-7.13	46.0	-7.89	Peak	49.00	200	Н	Pass
3	625.189	39.92	-4.84	46.0	-6.08	Peak	0.00	200	Н	Pass
4	799.988	38.10	-2.96	46.0	-7.90	Peak	0.00	200	Н	Pass

Frequency (MHz)

100


Page 16 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Test Figure:

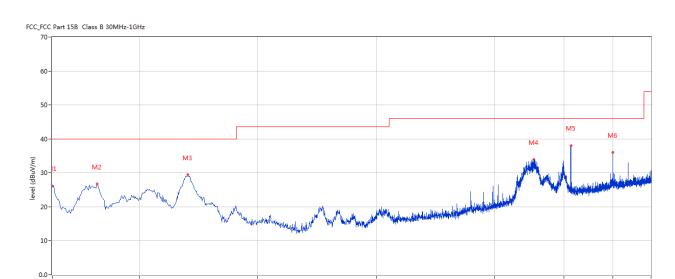

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	30.000	26.18	-14.19	40.0	-13.82	Peak	121.00	100	V	Pass
2	38.970	26.73	-12.59	40.0	-13.27	Peak	220.00	100	V	Pass
3	66.366	29.38	-14.08	40.0	-10.62	Peak	19.00	100	V	Pass
4	503.484	33.94	-7.01	46.0	-12.06	Peak	348.00	200	V	Pass
5	625.189	38.05	-4.84	46.0	-7.95	Peak	360.00	100	V	Pass
6	799.988	35.98	-2.96	46.0	-10.02	Peak	66.00	200	V	Pass

Frequency (MHz)

Report No.: FCC1910107-04 Page 17 of 98

Date: 2019-11-16



Operation Mode: Keeping Transmitting under CH36 for 11g at 6Mbps

			_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
5180.00	50.94 (PK)	Н	Eundomontal Eroguanov
5180.00	51.16 (PK)	V	Fundamental Frequency
10360		Н	74(Peak)/ 54(AV)
15540		V	74(Peak)/ 54(AV)
20720		H/V	74(Peak)/ 54(AV)
25900		H/V	74(Peak)/ 54(AV)
31080		H/V	74(Peak)/ 54(AV)
36260		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11a mode 6Mbps

Operation Mode: Keeping Transmitting under CH40 for 11g at 6Mbps

	1 0		-
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
5200.00	50.30 (PK)	Н	Eundamental Eraguenay
5200.00	51.68 (PK)	V	Fundamental Frequency
10400		Н	74(Peak)/ 54(AV)
15600		V	74(Peak)/ 54(AV)
20800		H/V	74(Peak)/ 54(AV)
26000		H/V	74(Peak)/ 54(AV)
31200		H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11a mode 6Mbps

Report No.: FCC1910107-04 Page 18 of 98

Date: 2019-11-16



Operation Mode: Keeping Transmitting under CH48 for 11g at 6Mbps

	1 0	8	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
5240.00	50.31 (PK)	Н	Eundomontal Eroguanov
5240.00	51.18 (PK)	V	Fundamental Frequency
10480		Н	74(Peak)/ 54(AV)
15720		V	74(Peak)/ 54(AV)
20960		H/V	74(Peak)/ 54(AV)
26200		H/V	74(Peak)/ 54(AV)
31440		H/V	74(Peak)/ 54(AV)
36680		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11a mode 6Mbps


Date: 2019-11-16




Please refer to the following test plots for details:

CH36 for 11a at 6Mbps: Horizontal



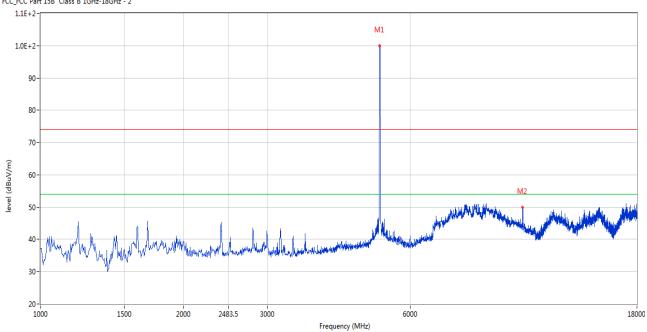


CH36 for 11a at 6Mbps: Vertical

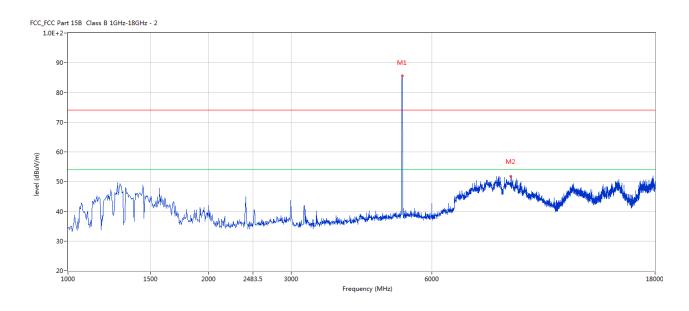


Date: 2019-11-16



CH40 for 11a at 6Mbps: Vertical

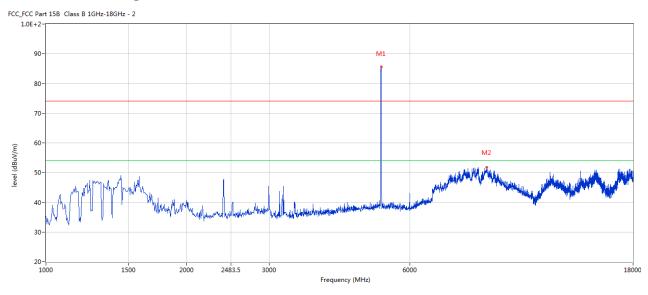


CH40 for 11a at 6Mbps: Horizontal

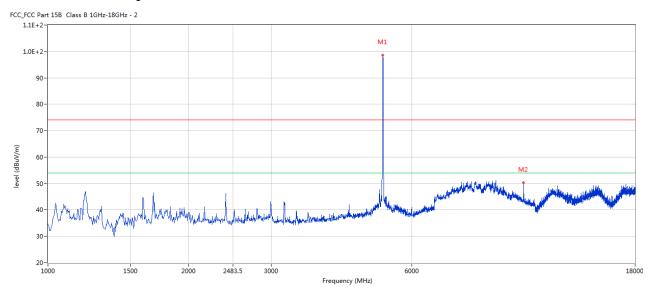


Date: 2019-11-16



CH48 for 11a at 6Mbps: Vertical

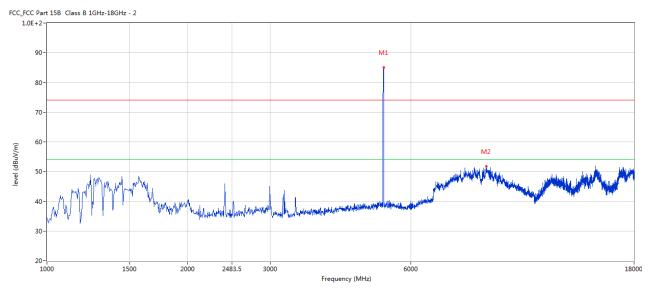

CH48 for 11g at 6Mbps: Horizontal

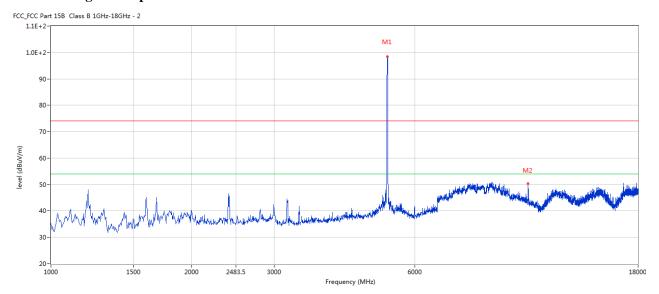

Note: 1. For radiated Emissions from 18-40GHz, it is only the floor noise.

2. 802.11a is the worst case.


Page 22 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 36 (5180MHz)-11a			
	VisionLa	bs LUNA ACE					
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
5150	PK (dBμV/m)	48.73 (PK)	T : :/	27.10 (241)			
	EIRP (dBm)	-46.47	Limit	-27dBm/MHz			
Polarity	Horizontal						
Test Figure	•						

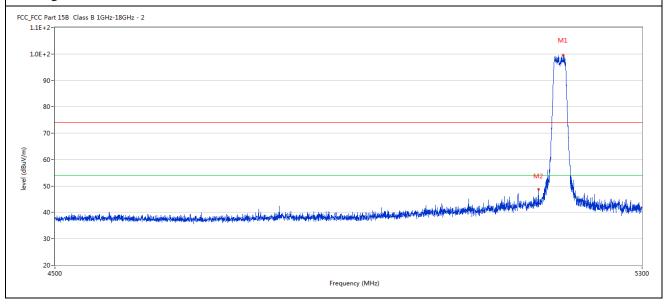

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=48.73 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 48.73 - 95.2 = -46.47dBm$

Page 23 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 36 (5180MHz)-11a			
	VisionLa	bs LUNA ACE					
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
5150	PK (dBµV/m)	39.61 (PK)	Ŧ	27 10 / 444			
	EIRP (dBm) -55.59		Limit	-27dBm/MHz			
Polarity	V	Vertical					

Test Figure

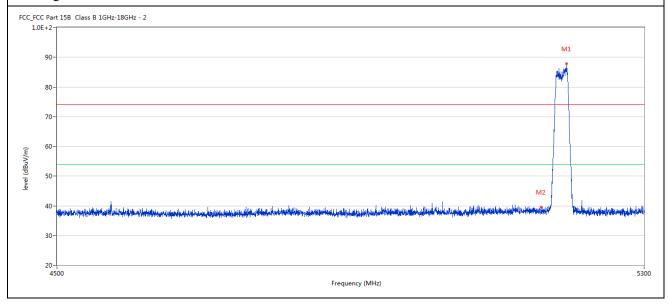

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=39.61 dB\mu V/m$,


 $EIRP[dBm] = E[dB\mu V/m] - 95.2=39.61-95.2=-55.59dBm$

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 48 (5240MHz)-11a			
	VisionLa	bs LUNA ACE					
Mode	Keeping	g Transmitting	Input Voltage	120V∼			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:		Pass	Detector	PK			
5250	PK (dBµV/m)	50.29 (PK)	Limit				
	EIRP (dBm)	IRP (dBm) -44.91		-27dBm/MHz			
Polarity	Н	orizontal					

Test Figure

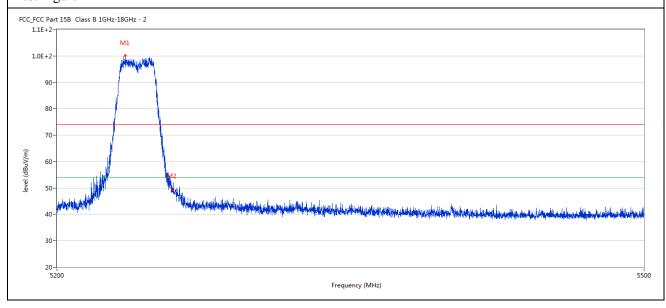

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=50.29 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 50.29 - 95.2 = -44.91dBm$

Page 25 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Kesu	ricted ba	ind Me	easurement			
	EUT		Biometrical access control terminals		Test Mode:	Channel 48 (5240MHz)-11a
			VisionLab	os LUNA ACE		
	Mode Keeping Transmitting		Input Voltage	120V~		
Te	emperati	ıre	24	deg. C,	Humidity	56% RH
Te	est Resu	lt:		Pass	Detector	PK
	5250		PK (dBµV/m)	46.90 (PK)	T : '/	27 ID /MI
			EIRP (dBm)	-48.30	Limit	-27dBm/MHz
	Polarity	,	V	ertical		
Test :	Figure					
FCC_FCC	C Part 15B Clas	s B 1GHz-1	8GHz - 2			
1.08	:+2-		M1			
	90-		المالية المالي			
	80-					
	70-					
(w/,						
evel (dBuV/m)	60-					
eve	50-		N/2			
	40-	Marie	And mining the last and and the last		Populari programa di podri di programa	
	30-					
	20-					
	5200				ency (MHz)	550

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=46.90 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.90 - 95.2 = -48.30dBm$

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 36			
	VisionLa	bs LUNA ACE		(5180MHz)-11n/HT20			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24	l deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
5150	PK (dBµV/m)	47.12 (PK)	Ŧ	27.15 (2.41)			
	EIRP (dBm) -48.08		Limit	-27dBm/MHz			
Polarity	Но	orizontal					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.12 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.12-95.2=-48.08dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 36			
	VisionLa	bs LUNA ACE		(5180MHz)-11n/HT20			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
5150	PK (dBµV/m)	40.92 (PK)	Limit	25.15			
	EIRP (dBm)	-54.28		-27dBm/MHz			
Polarity	7	Vertical		1			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 40.92 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 40.92 - 95.2 = -54.28dBm$

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 48 (5240MHz)-			
	VisionLa	bs LUNA ACE		11n/HT20			
Mode	Keeping	g Transmitting	Input Voltage	120V∼			
Temperature	24	l deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
5250	PK (dBµV/m)	49.16 (PK)	T 1 14	25.15			
	EIRP (dBm) -46.04		Limit	-27dBm/MHz			
Polarity	Н	orizontal					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 49.16 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=49.16-95.2=-46.04dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 48 (5240MHz)-			
	VisionLa	bs LUNA ACE		11n/HT20			
Mode	Keeping	g Transmitting	Input Voltage	120V∼			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5250	PK (dBµV/m)	44.32(PK)	T * */	27.10 /2411			
	EIRP (dBm) -50.08		Limit	-27dBm/MHz			
Polarity	7	Vertical		-			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 44.32dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=44.32-95.2=-50.08 dBm$

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 38			
	VisionLa	bs LUNA ACE		(5190MHz)-11n/HT40			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5150	PK (dBµV/m)	46.91 (PK)	T 114	27 ID/MII			
	EIRP (dBm) -48.29		Limit	-27dBm/MHz			
Polarity	Horizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 46.91 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=46.91-95.2=-48.29 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 38			
	VisionLa	bs LUNA ACE		(5190MHz)-11n/HT40			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5150	PK (dBμV/m) 40.87 (PK)		T 10014	27 ID/MII			
	EIRP (dBm) -54.33		Limit	-27dBm/MHz			
Polarity	V	Vertical		1			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 40.87 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 40.87 - 95.2 = -54.33dBm$

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 46 (5230MHz)-			
	VisionLa	bs LUNA ACE		11n/HT40			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5250	PK (dBµV/m)	47.69(PK)	T : '/	27 ID/MII			
	EIRP (dBm) -47.51		Limit	-27dBm/MHz			
Polarity	Horizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=47.69 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.69-95.2=-47.51 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 46 (5230MHz)-			
	VisionLa	bs LUNA ACE		11n/HT40			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5250	PK (dBµV/m)	PK (dBμV/m) 40.51 (PK)		27 ID /MI			
	EIRP (dBm) -54.69		Limit	-27dBm/MHz			
Polarity	V	Vertical		1			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 40.51 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 40.51 - 95.2 = -54.69dBm$

Date: 2019-11-16



Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 42			
	VisionLa	bs LUNA ACE		(5210MHz)-11ac/VHT80			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5150	PK (dBµV/m)	47.03 (PK)	T : :/	27 10 / MII			
	EIRP (dBm) -48.17		Limit	-27dBm/MHz			
Polarity	Horizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.03 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.03-95.2=-48.17 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement							
EUT	Biometrical acc	cess control terminals	Test Mode:	Channel 42 (5210MHz)-			
	VisionLa	bs LUNA ACE		11ac/VHT80			
Mode	Keeping	g Transmitting	Input Voltage	120V~			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
5150	PK (dBμV/m) 40.77 (PK)		T in it	27 ID/MII			
	EIRP (dBm) -54.43		Limit	-27dBm/MHz			
Polarity	V	Vertical		1			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 40.77 dB\mu V/m$,


 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 40.77 - 95.2 = -54.43 dBm$

Date: 2019-11-16



7.0 Emission Bandwidth

7.1 Test Setup



7.3 Test Procedure for Emission Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set VBW> RBW
- 3 Detector = Peak
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

7.4 Test Procedure for Minimum Bandwidth for the Band 5725-5850MHz

- 1. Set RBW = 100 kHz.
- 2. Set $VBW \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.5 Test Procedure for 99% Bandwidth

- 1. Set center frequency to the nominal EUT channel center frequency
- 2. Set span = 1.5 times to 5.0 times OBW
- 3. Set RBW= 1% TO 5% of the OBW
- 4. Set $VBW \ge 3 \times RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Other, peak detection and max mode (until trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 32 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



7.6 Test Result

EUT		Biometric terminals V	al access co visionLabs		Model	Model		ACE-0001		
Mode		8	302.11a		Input Vol	tage		120V~		
Temperati	ure	24	4 deg. C,		Humidity			56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		width Hz)	Minimum Limit (MHz)		Pass/ Fail		
26dB Bar	ndwidth									
36		5180	6	21	.96			Pass		
40		5200	6	22	.04			Pass		
48		5240	6	21	21.88					Pass
99% Ban	dwidth									
36		5180	6	17	.15			Pass		
40		5200	6	17	.15			Pass		
48		5240	6	16	.99			Pass		


Date: 2019-11-16



Test Figure:

26dB Bandwidth

Channel 36

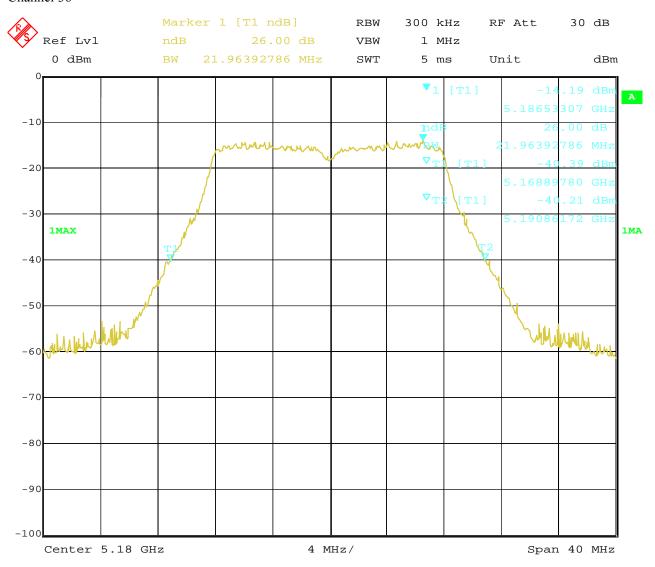

Date: 13.NOV.2019 08:53:13


Page 34 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 40

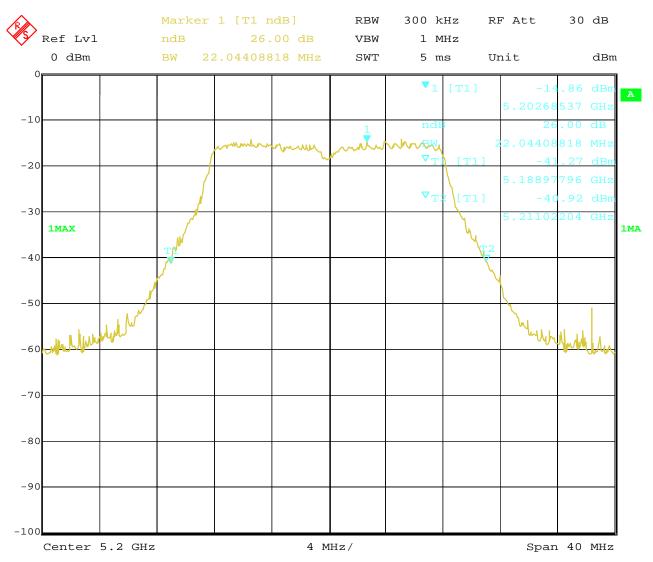

13.NOV.2019 08:58:57 Date:


Page 35 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 48

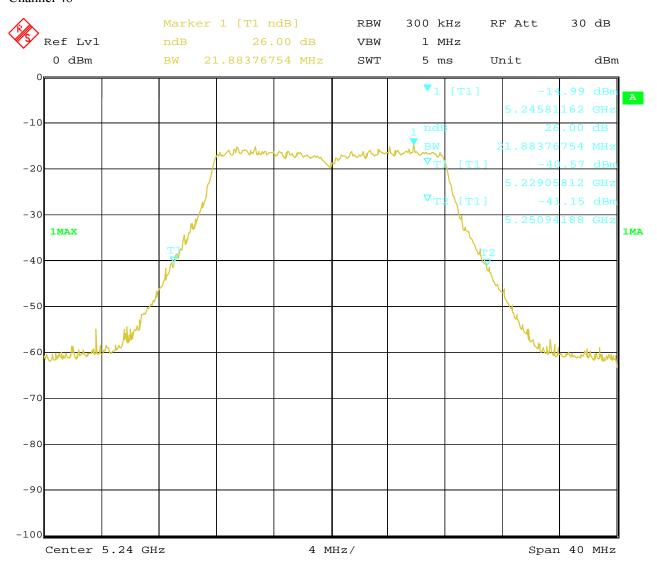

13.NOV.2019 09:00:48 Date:


Date: 2019-11-16



Test Figure:

99% Bandwidth

Channel 36

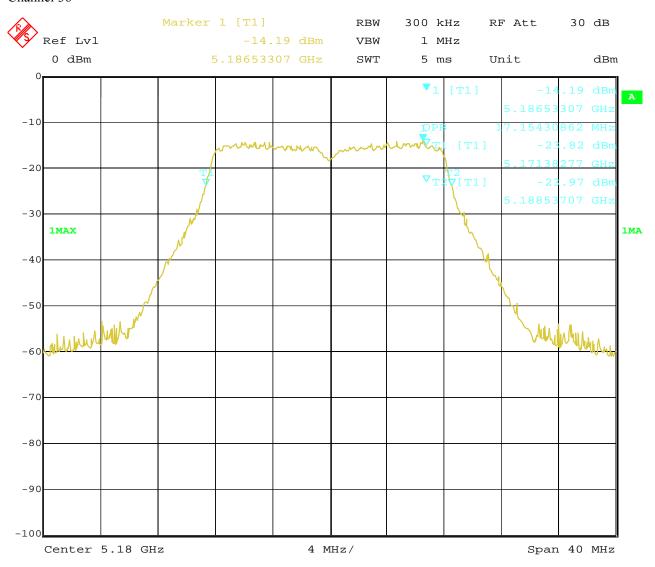

08:53:54 Date: 13.NOV.2019


Page 37 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 40

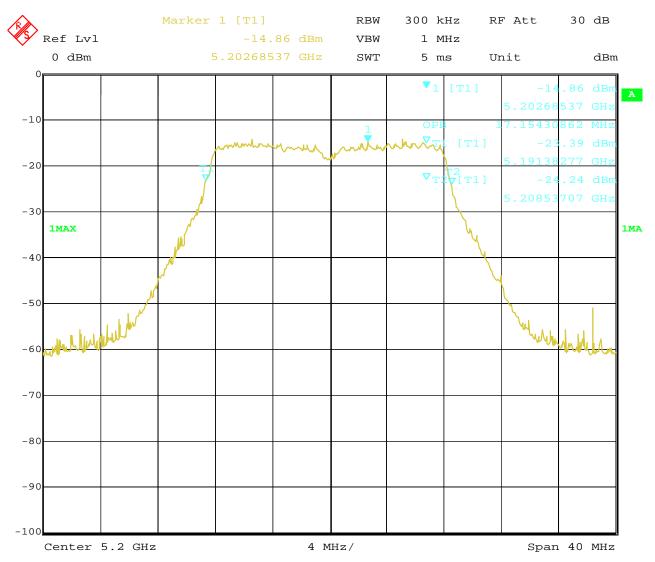

13.NOV.2019 08:58:19 Date:


Page 38 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 48

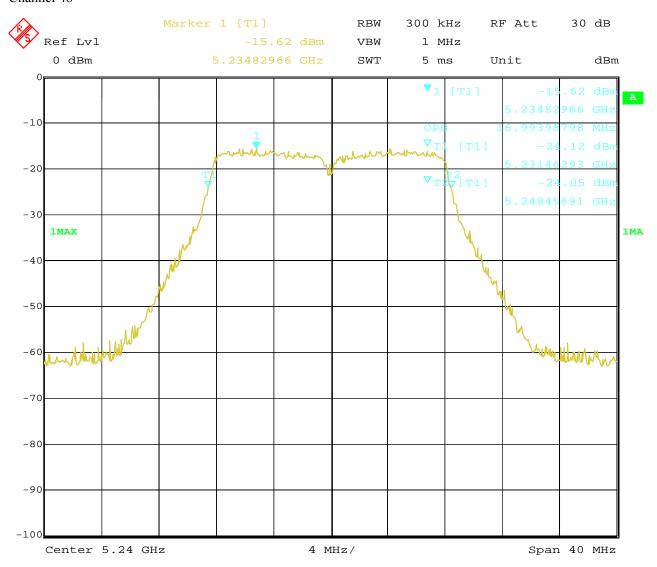

13.NOV.2019 09:03:05 Date:

Page 39 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometric terminals V	al access co		Model		ACE-0001		
Mode		802	.11n HT20		Input Voltage			120V~	
Temperat	ure	24	4 deg. C,		Humidity	7		56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)			num Limit MHz)	Pass/ Fail	
26dB Bai	ndwidth								
36	36 5180			22.12				Pass	
40		5200	mcs0	22.28				Pass	
48		5240	mcs0	22	.44			Pass	
99% Ban	dwidth								
36		5180	mcs0	18	.04			Pass	
40	5200		mcs0	18	.04			Pass	
48		5240	mcs0	18	.12			Pass	


Date: 2019-11-16



Test Configure

26dB Bandwidth

Channel 36

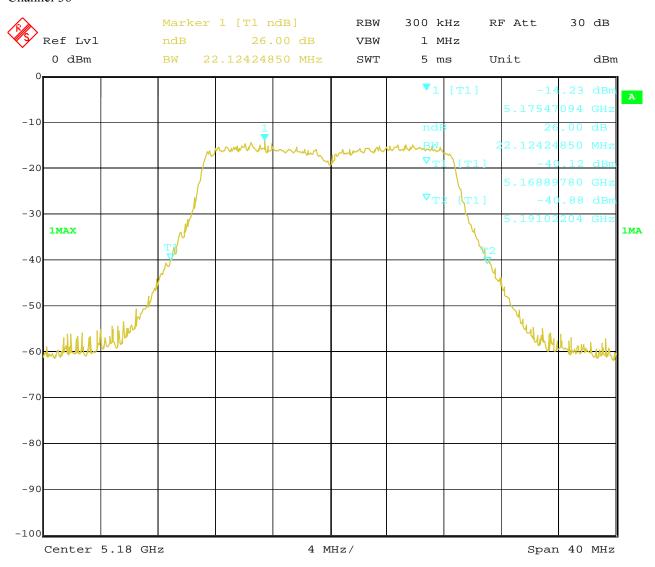

Date: 13.NOV.2019 09:40:52


Page 41 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 40

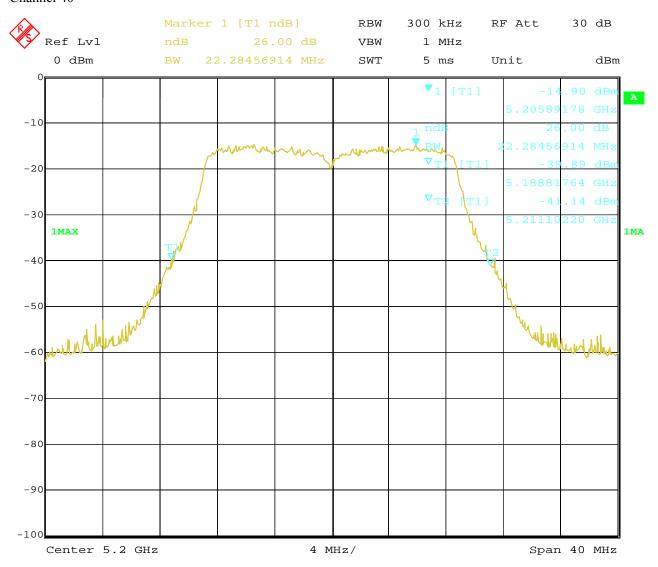

13.NOV.2019 09:39:22 Date:


Page 42 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 48

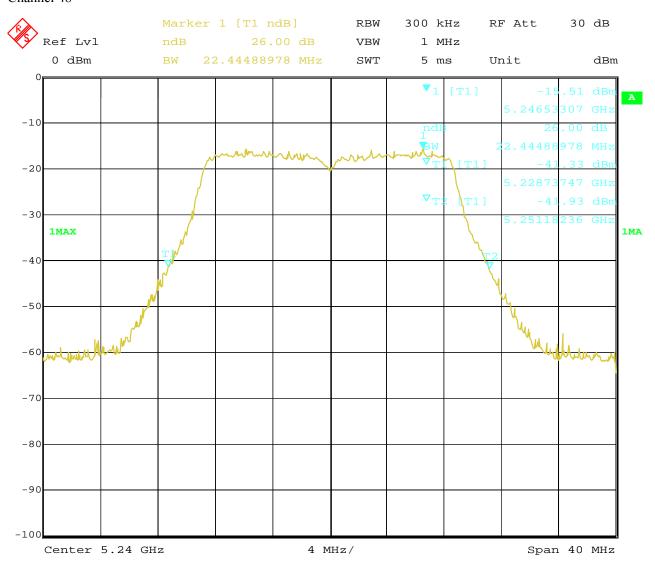

13.NOV.2019 09:38:40 Date:


Date: 2019-11-16



Test Configure

99% Bandwidth

Channel 36

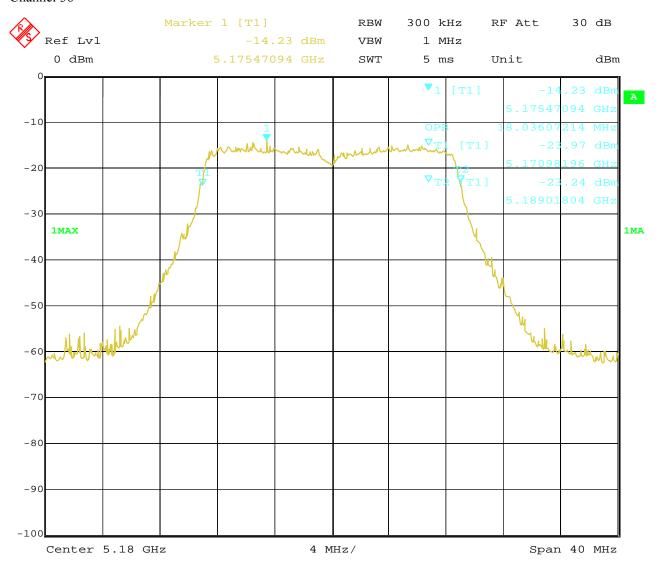

Date: 13.NOV.2019 09:40:24


Page 44 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 40

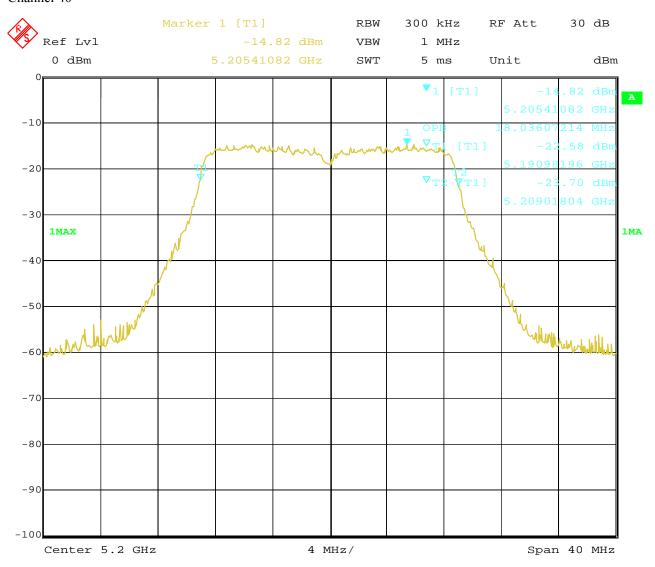

13.NOV.2019 09:39:43 Date:


Page 45 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 48

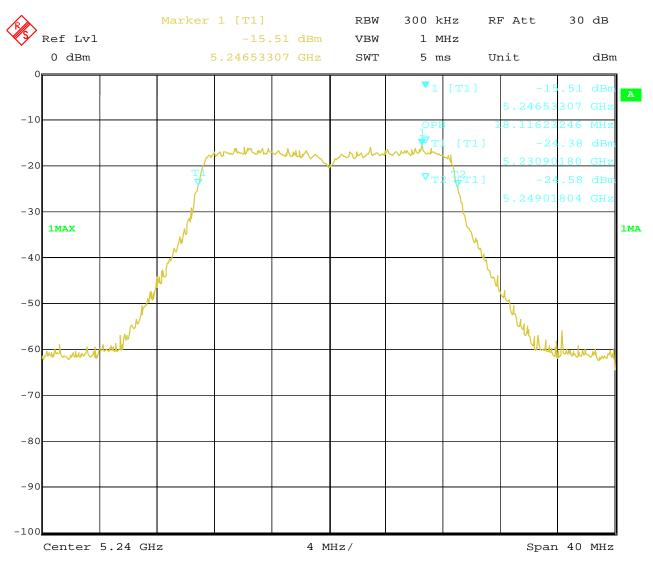

13.NOV.2019 09:38:25 Date:

Page 46 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometric	al access co	ontrol	Model			ACE-0001
		terminals V	isionLabs ¹	LUNA				
			ACE					
Mode		802	.11n HT40		Input Vol	tage		120V~
Temperat	ure	24	4 deg. C,		Humidity			56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
26dB Bar	ndwidth							
38		5190	mcs0	42.97				Pass
46		5230	mcs0	43	.77			Pass
99% Ban	dwidth							
38	38 5190 mcs0 3				.39			Pass
46	5230 mcs0			36.39				Pass


Date: 2019-11-16



Test Configure

26dB Bandwidth

Channel 38

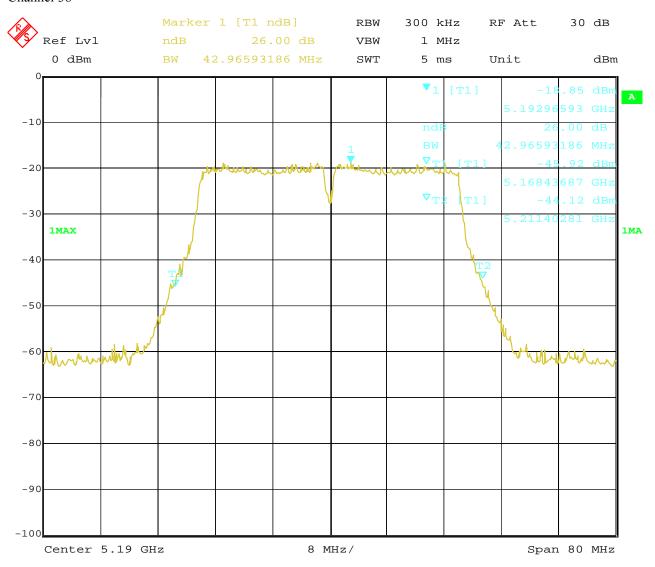

Date: 13.NOV.2019 09:41:27


Page 48 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 46

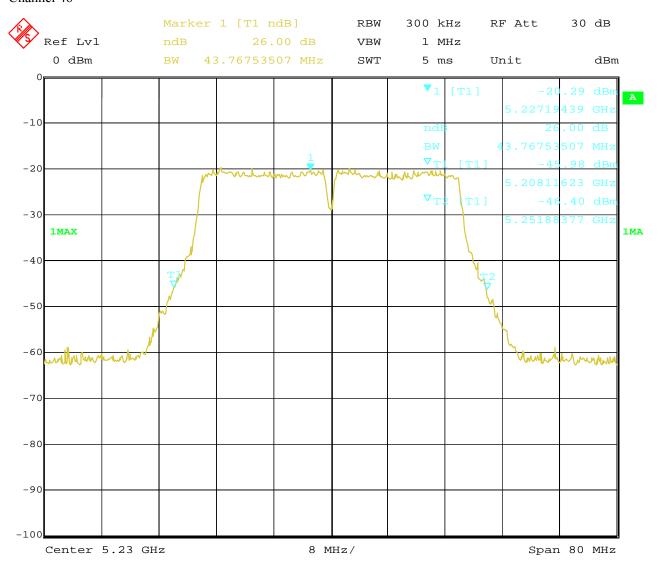

13.NOV.2019 09:42:43 Date:


Date: 2019-11-16



Test Configure

99% Bandwidth

Channel 38

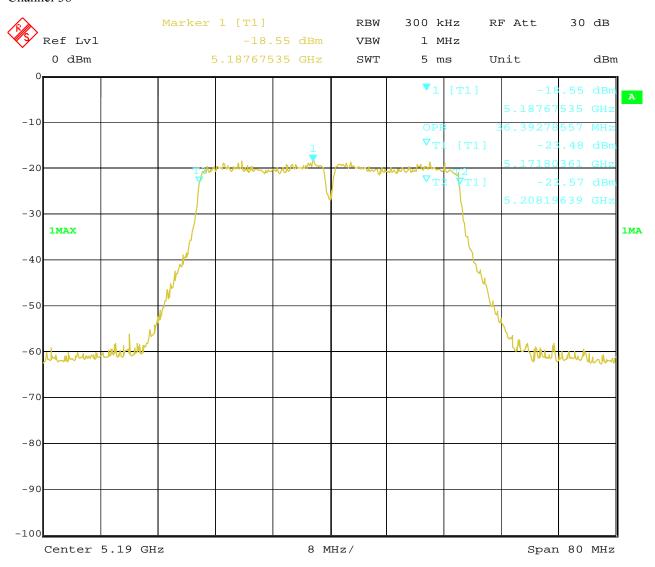

Date: 13.NOV.2019 09:41:43


Page 50 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 46

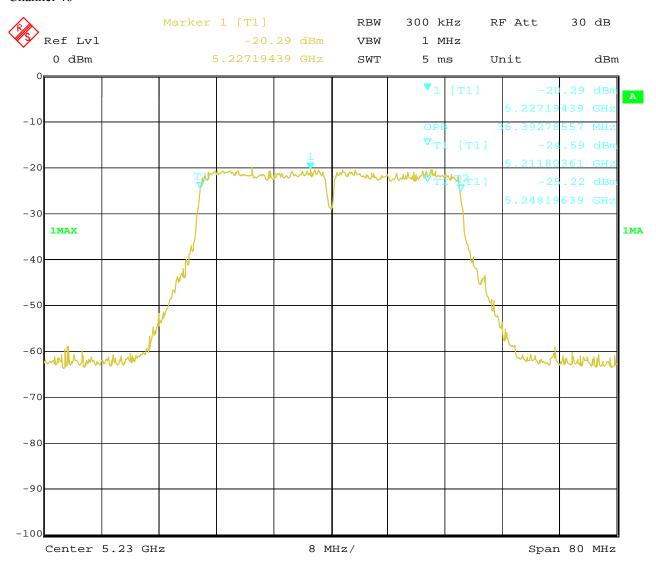

13.NOV.2019 09:42:24 Date:

Page 51 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometric terminals V	al access co		Model		ACE-0001	
Mode		802.1	1ac VHT20)	Input Voltage		120V~	
Temperat	ure	24	4 deg. C,		Humidity			56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
26dB Bar	ndwidth							
36	36 5180			22.69				Pass
40		5200	mcs0	22.61				Pass
48		5240	mcs0	22	.69			Pass
99% Ban	dwidth							
36		5180	mcs0	18	.04			Pass
40	5200		mcs0	18	.04			Pass
48		5240	mcs0	18	.12			Pass


Date: 2019-11-16



Test Configure

26dB Bandwidth

Channel 36

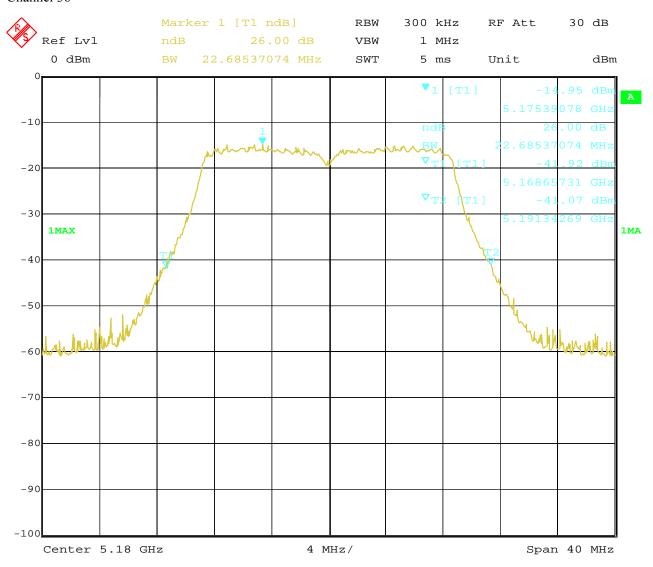

Date: 13.NOV.2019 10:21:37


Page 53 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 40

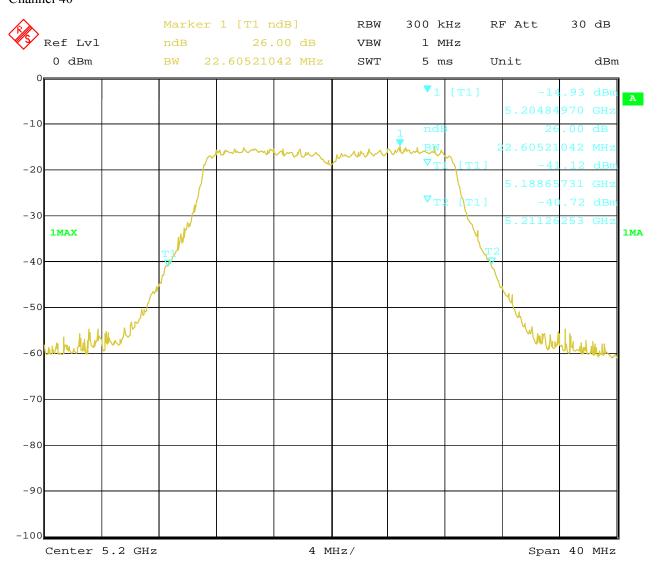

13.NOV.2019 10:18:18 Date:


Page 54 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 48

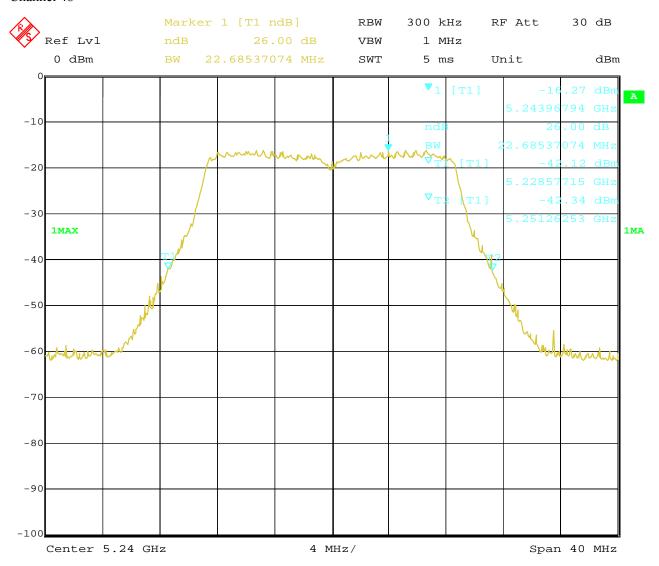

13.NOV.2019 10:16:11 Date:


Date: 2019-11-16



Test Configure

99% Bandwidth

Channel 36

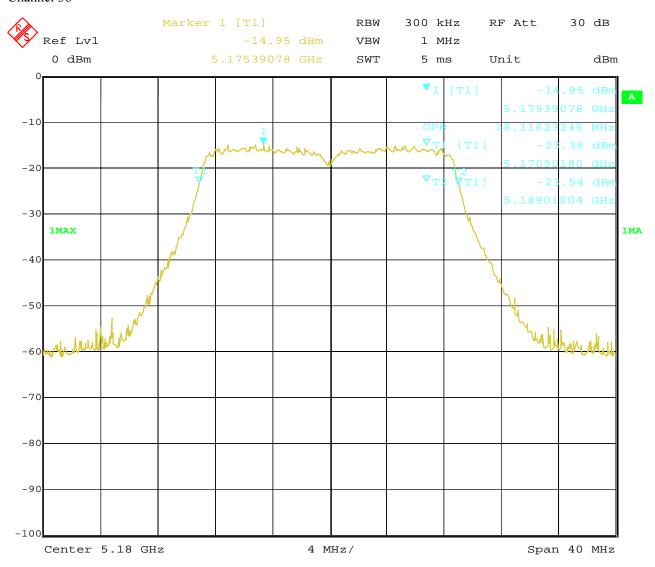

Date: 13.NOV.2019 10:21:24


Page 56 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 40

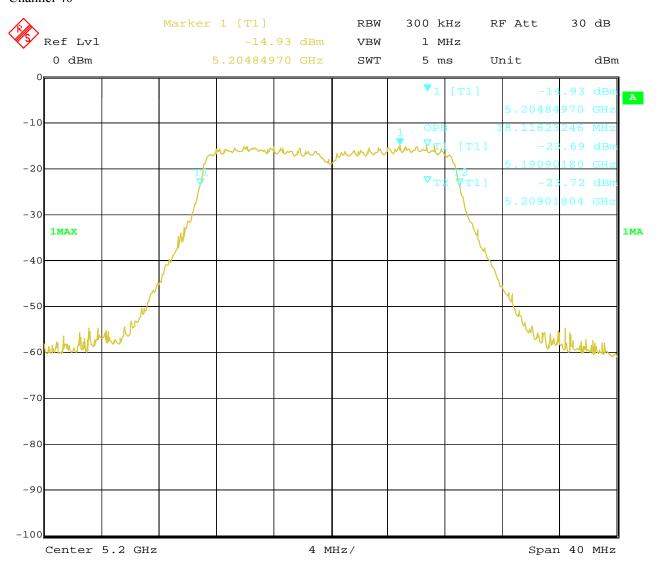

13.NOV.2019 10:18:34 Date:


Page 57 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 48

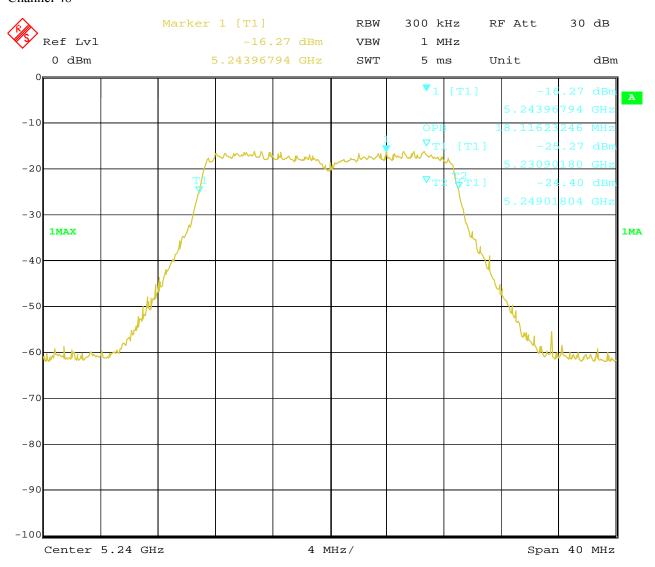

13.NOV.2019 10:15:58 Date:

Page 58 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometric terminals V	al access co visionLabs		Model		ACE-0001	
Mode	Mode 80)	Input Volt	tage		120V~
Temperate	mperature 24 deg.				Humidity			56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
26dB Bar	ndwidth							
38		5190	mcs0	43.29				Pass
46		5230	mcs0	43.29				Pass
99% Ban	dwidth							
38	3 5190 mcs0				.39			Pass
46		5230	mcs0	36	.39			Pass


Date: 2019-11-16



Test Configure

26dB Bandwidth

Channel 38

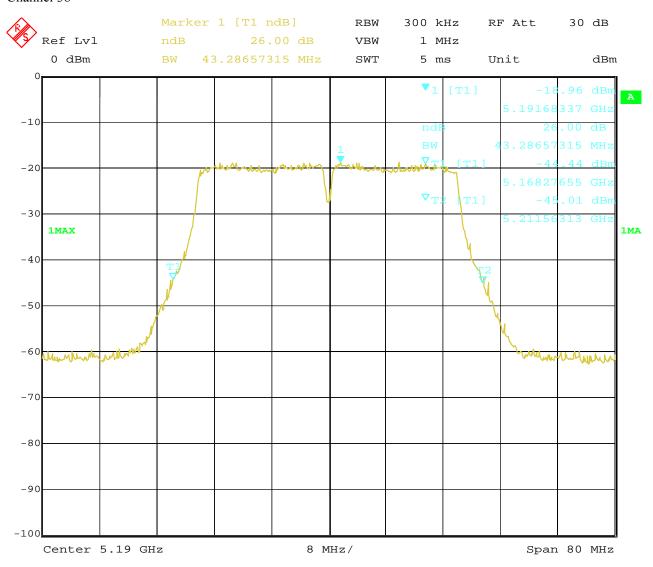

Date: 13.NOV.2019 09:59:09


Page 60 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 46

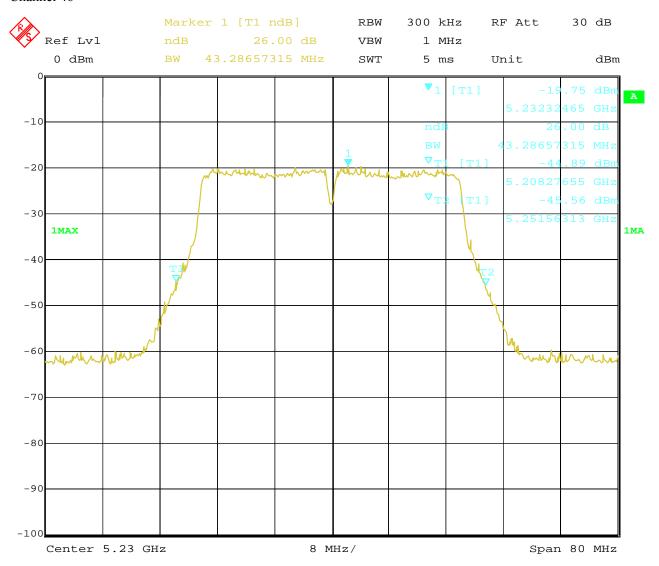

13.NOV.2019 09:59:47 Date:


Date: 2019-11-16



Test Configure

99% Bandwidth

Channel 38

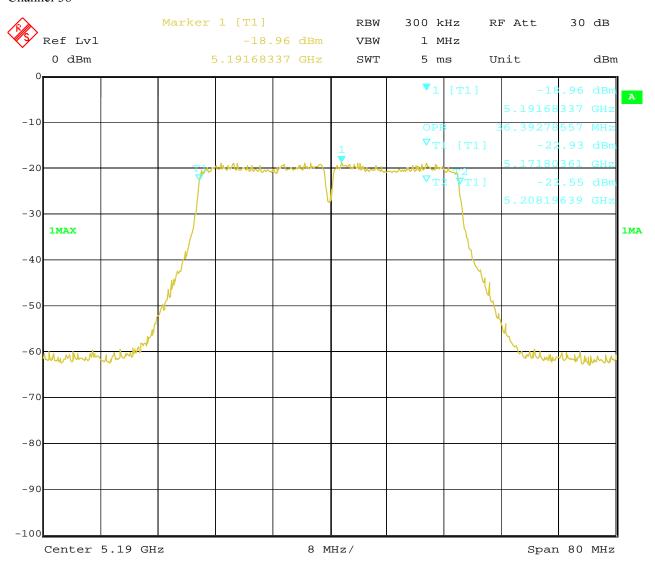

Date: 13.NOV.2019 09:58:57


Page 62 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



Channel 46

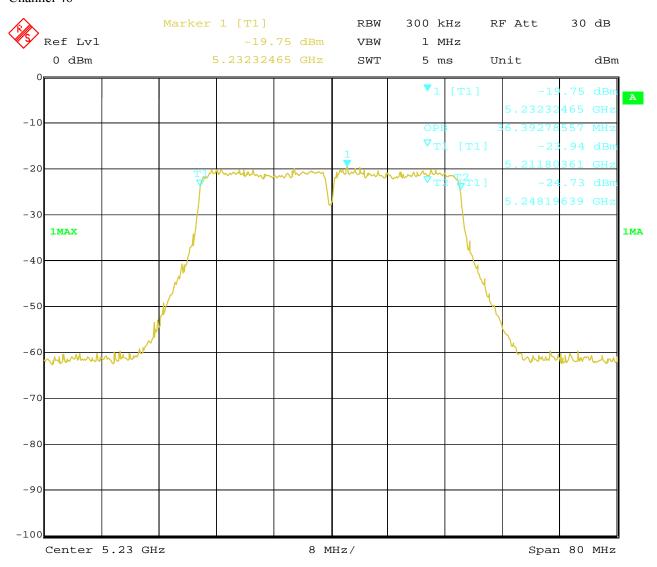

13.NOV.2019 10:00:00 Date:

Page 63 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT			al access co		Model			ACE-0001
		terminals V	visionLabs !	LUNA				
			ACE					
Mode		802.1	1ac VHT80	0	Input Volt	tage		120V~
Temperat	ure	24	4 deg. C,		Humidity			56% RH
l Channel I		el Frequency (MHz)	Data Transfer Rate (Mbps)		width Hz)		num Limit MHz)	Pass/ Fail
26dB Bar	ndwidth							
42		5210	23.9	82	.97			Pass
99% Ban	dwidth							
42 5210			23.9	79	.51			Pass


Date: 2019-11-16



Test Configure

26dB Bandwidth

Channel 42

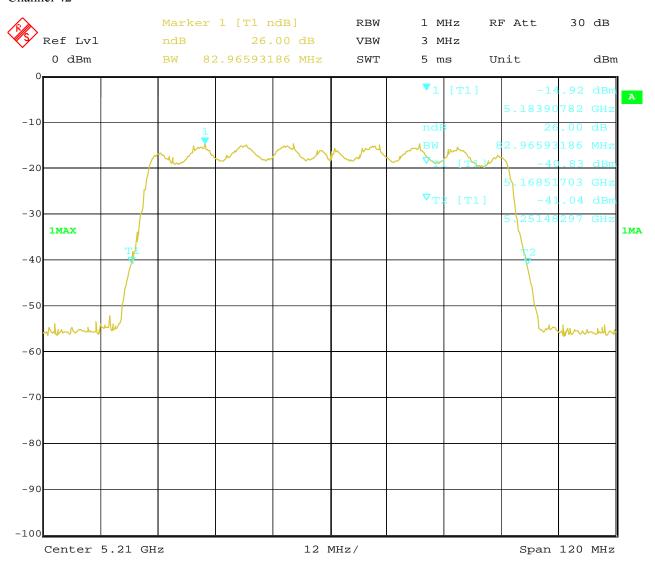

Date: 13.NOV.2019 09:56:38


Date: 2019-11-16



Test Configure

99% Bandwidth

Channel 42

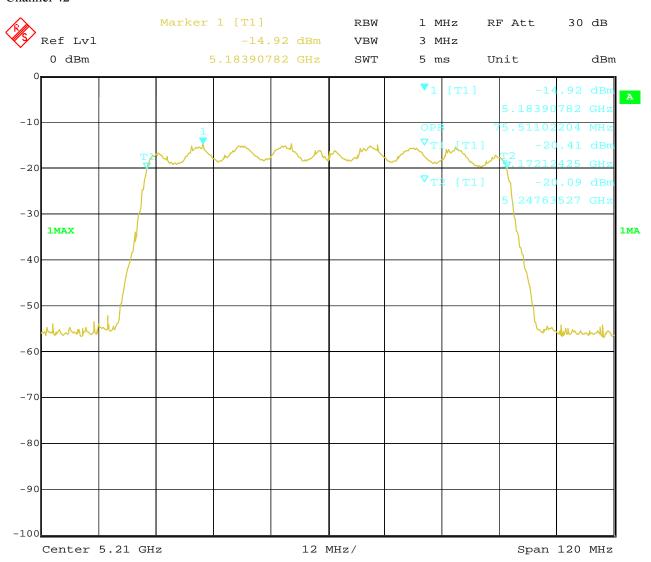


Date: 13.NOV.2019 09:56:20

Date: 2019-11-16



8.0 Peak Transmit Power Measurement

8.1 Test Setup



8.2 Limits of Peak Transmit Power Measurement

Operation Band	EUT Category	Limit
U-NII-2A		For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or
		$1.76 + 10 \log_{10} B^*$, dBm, whichever is less
	\checkmark	For other devices, the maximum e.i.r.p. shall
		not exceed 200 mW or $10 + 10 \log_{10} B^*$,
		dBm, whichever power is less

Note: 1. Where B is the 99% emission bandwidth in MHz.

2. EIRP was measured, EIRP=AV Power +Antenna Gain

U-NII-2A	-	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		1 Watt (30 dBm)

Note: 1. Where B is the 26dB emission bandwidth in MHz.

2. The average power was measured

8.3 Test Procedure

The average power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Page 67 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



8.4Test Results

EU	Т		metrical ac inals Vision AC	nLabs LUN		Model	F	ACE-0001		
Mod	Mode 802.11a				Inp	ut Voltage	120V~			
Temper	ature	ture 24 deg. C,			F	lumidity	56% RH			
Channel	Freque	ncy	Ant 1	Power	Ant	2 Power	Total Power	Limit	Pass/ Fail	
	(MH	z)	dBm	mW	dBm	mW	(dBm)	(dBm)		
36	5180	0	3.29	2.13	3.21	2.09	6.25	22.38	Pass	
40	5200	5200 2.9		1.98	2.92	1.96	5.95	22.38	Pass	
48	5240	0	1.65	1.46	1.54	1.43	4.61	22.38	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40, CH48, CH149, CH153 and CH161

2. The result basic equation calculation as follow: Average Power Output = AV Power Reading + Cable loss + Attenuator

- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

Report No.: FCC1910107-04 Page 68 of 98

Date: 2019-11-16



EU	Т		metrical ac inals Vision			N	Iodel	A	CE-0001		
		ACE									
Mod	Mode 802.11n HT20					Input	Voltage	120V~			
Temper	ature	24 deg. C,				Hu	midity	56% RH			
Channel	Freque	ncy	Ant 1	Power	A	Ant 2 Power		Total Power	Limit	Pass/ Fail	
	(MH	z)	dBm	mW	dI	Bm	mW	(dBm)	(dBm)		
36	5180	0	2.40	1.74	2.	.31	1.70	5.37	22.38	Pass	
40	5200	00 2.28 1.69 2		2.	.16	1.64	5.22	22.38	Pass		
48	5240	5240 1.43 1.39 1		1.	.35	1.36	4.39	22.38	Pass		

Note: 1. At finial test to get the worst-case emission at mcs0 (6.5Mbps) for CH36, CH40, CH48, CH149, CH153 and CH161

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

Page 69 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



Γ	Bio	metrical ac	cess contro	ol N	/lodel	ACE-0001			
	termi	inals Vision	nLabs LUN	JA					
ACE									
Mode 802.11n HT40				Inpu	t Voltage	120V~			
Temperature		24 deg	g. C,	Hu	ımidity		56% RH		
Freque	ncy	Ant 1	Power	Ant 2	Power	Total Power	Limit	Pass/ Fail	
(MH	z)	dBm	mW	dBm	mW	(dBm)	(dBm)		
5190)	1.83	1.52	1.74	1.49	4.79	23.01	Pass	
5230	5230 0.29 1.07		1.07	0.23	1.05	3.26	23.01	Pass	
	le ature Freque (MH: 5190	termi	terminals Vision	terminals VisionLabs LUN	terminals VisionLabs LUNA	terminals VisionLabs LUNA	terminals VisionLabs LUNA	terminals VisionLabs LUNA	

Note: 1. At finial test to get the worst-case emission at mcs0 (13.5Mbps) for CH38, CH46, CH151 and CH159

- 2. The result basic equation calculation as follow: Average Power Output = AV Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

Page 70 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EU	Т	_	metrical ac			N	Iodel	A	CE-0001		
		term	AC		NA						
Mod	ode 802.11ac VHT20					Input	Voltage	120V~			
Temper	ature	24 deg. C,				Hu	midity	56% RH			
Channel	Freque	ncy	Ant 1	Power	I	Ant 2	Power	Total Power	Limit	Pass/ Fail	
	(MH	z)	dBm	mW	dI	Bm	mW	(dBm)	(dBm)		
36	5180	0	2.65	1.84	2.	.60	1.82	5.63	22.58	Pass	
40	5200	00 1.90 1.55		1.	.78	1.51	4.86	22.58	Pass		
48	5240 1.55		1.43	1.	.47	1.40	4.52	22.58	Pass		

Note: 1. At finial test to get the worst-case emission at mcs0 (6.5Mbps) for CH36, CH40, CH48, CH149, CH153 and CH161

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

Date: 2019-11-16



EU	T	Bio	metrical ac	cess contro	ol	Model		ACE-0001			
	terminals VisionLabs LUNA										
	ACE										
Mod	Mode 802.11ac VHT40				In	out Voltag		120V~			
Temper	Temperature 24 deg. C,			;. C,]	Humidity		56% RH			
Channel	Freque	ncy	Ant 1	Power	Ant	2 Power	Total Pov	wer Limit	Pass/ Fail		
	(MH	z)	dBm	mW	dBm	mW	(dBm)	(dBm)			
38	5190	0	1.36	1.37	1.28	1.34	4.33	23.01	Pass		
46	5230	0 1.18 1.31			1.11	1.29	4.15	23.01	Pass		

Note: 1. At finial test to get the worst-case emission at mcs0 (13.5Mbps) for CH38, CH46, CH151, and CH159

- 2. The result basic equation calculation as follow:

 Average Power Output = AV Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

EUT		Biometrical access control			ol N	Model	ACE-0001		
		terminals VisionLabs LUNA			JA				
		ACE							
Mode		802.11ac VHT80			Inpu	t Voltage	120V~		
Temperature		24 deg. C,			Hı	ımidity	56% RH		
Channel	Channel Frequency (MHz)		Ant 1 Power		Ant 2	Power	Total Power	Limit	Pass/ Fail
			dBm	mW	dBm	mW	(dBm)	(dBm)	
42	5210	0	1.05	1.27	0.96	1.25	4.01	23.01	Pass

Note: 1. At finial test to get the worst-case emission at 23.9Mbps for CH42 and CH155

- 2. The result basic equation calculation as follow:
 - Average Power Output = AV Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

Page 72 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

Operation Band	Limit		
U-NII-1	10dBm/MHz		
U-NII-2A	11dBm/MHz		
U-NII-2C	11dBm/MHz		
U-NII-3	30dBm/500kHz		

9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz.
- 3. Set the VBW = 3MHz.
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = RMS
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Page 73 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



9.4Test Result

EUT		Biometrical access control terminals VisionLabs LUNA ACE			odel	ACE-0001		
Mode		802.11a 6Mbps		Input	Input Voltage		120V~	
Temperat	emperature		24 deg. C,	Hur	nidity	56% RH		
Channel	Free	quency	An1	Factor	Total Sp	ectral Density	Limit	Pass/ Fail
	(N	MHz)	Spectral Density			(dBm)	(dBm)	
36	5180		-6.08	3.01	-3.07		10	Pass
40	5	5200	-7.21	3.01	-4.20		10	Pass
48	5	5240	-8.20	3.01		-5.19	10	Pass

^{2.} Factor=10log2=3.01


^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Date: 2019-11-16



9.5 Plots of Power Spectral Density Measurement

1.802.11a at 6Mbps of CH36

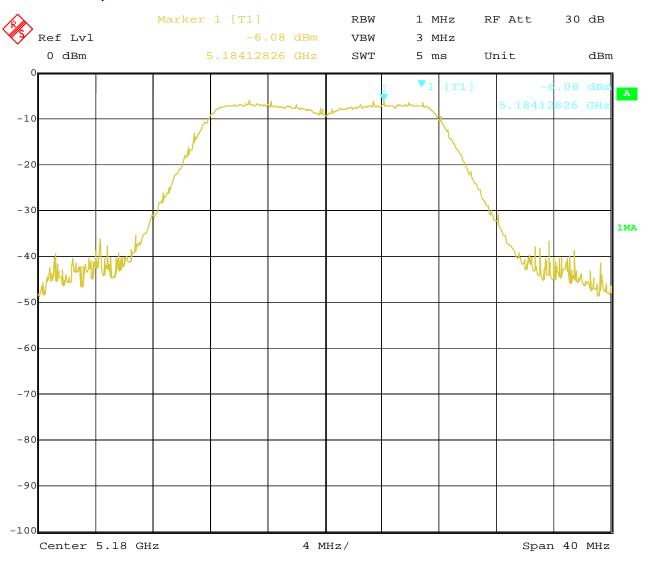

Date: 13.NOV.2019 07:58:03


Page 75 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



2.802.11a at 6Mbps of CH40

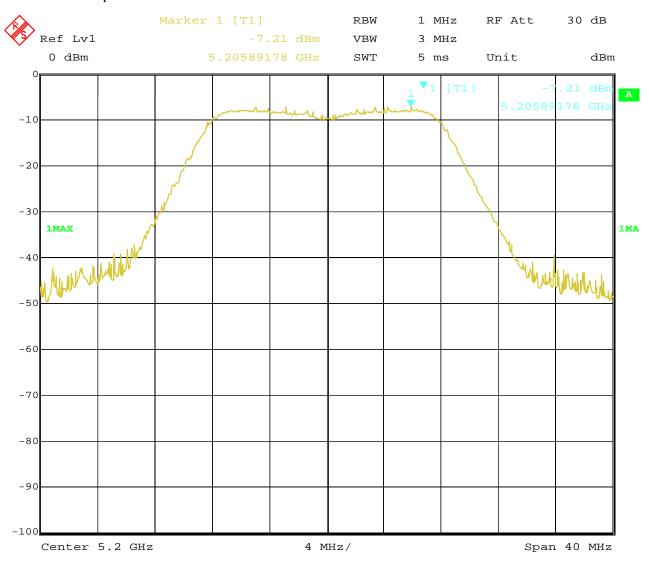

13.NOV.2019 08:01:58 Date:


Page 76 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



3.802.11a at 6Mbps of CH48

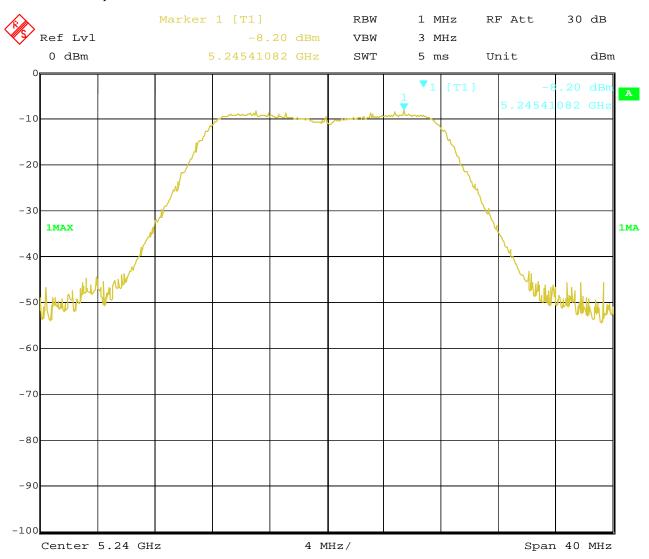

13.NOV.2019 08:04:25 Date:

Page 77 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometrical access control		Mo	odel	ACE-0001		
		terminal	ls VisionLabs LUN	4				
			ACE					
Mode	de 802.11n HT20 mcs0		Input	Input Voltage		120V~		
Temperat	Temperature		24 deg. C,	Hun	nidity	56% RH		
Channel	Free	quency	An1	Factor	Total Spectral Density		Limit	Pass/ Fail
	(MHz)		Spectral Density			(dBm)	(dBm)	
36	5180		-7.78	3.01	-4.77		10	Pass
40	40 5200 -7.75		3.01	-4.74		10	Pass	
48	5240		-8.59	3.01		-5.58	10	Pass

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 78 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



Test Plots

1.802.11n at mcs0 of CH36

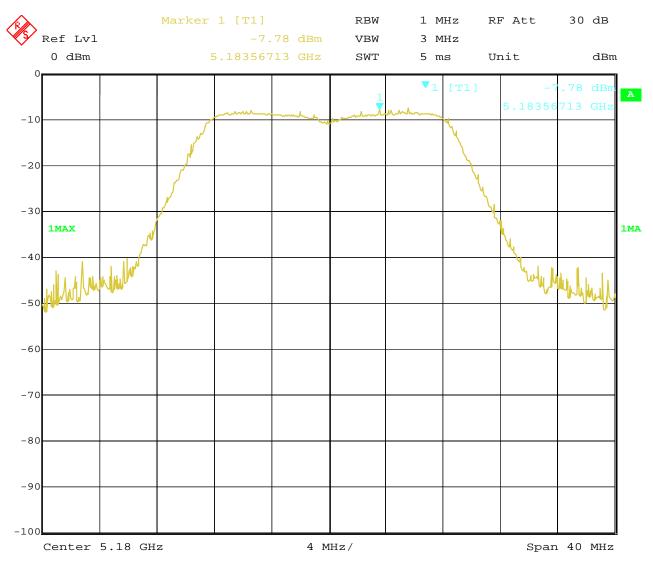

Date: 13.NOV.2019 08:23:56


Page 79 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



2.802.11n at mcs0 of CH40

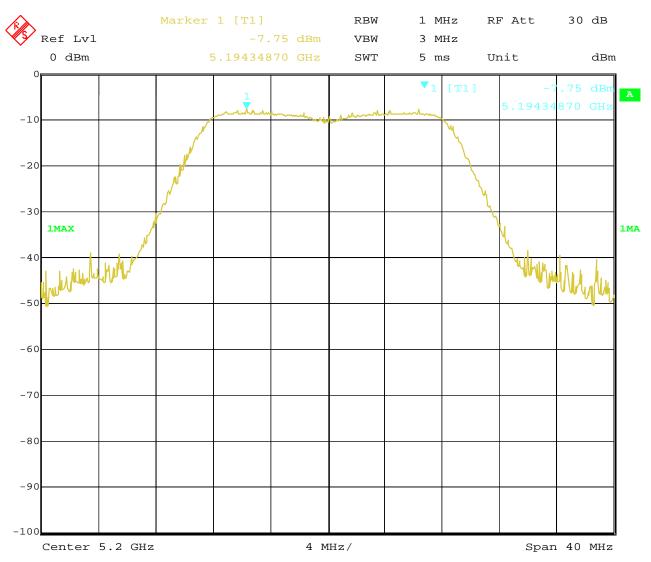

13.NOV.2019 08:21:40 Date:


Page 80 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



3.802.11n at mcs0 of CH48

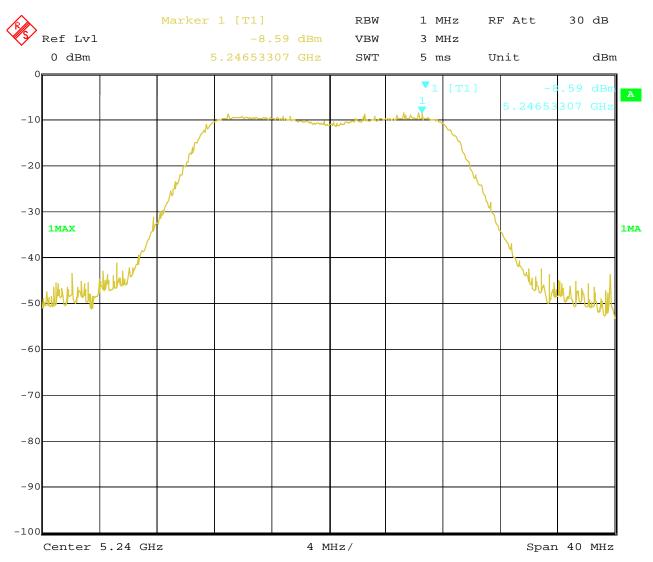

13.NOV.2019 08:20:13 Date:

Page 81 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometrical access control		Model		ACE-0001		
		terminals V	VisionLabs LUNA					
			ACE					
Mode	Mode 802.11n l		n HT40 mcs0	Input Voltage			120V~	
Temperat	Temperature 2		4 deg. C,	Humidity		56% RH		
Channel	nnel Frequency		An1 Spectral	Factor	Total S	pectral Density	Limit	Pass/ Fail
	((MHz)	Density			(dBm)	(dBm)	
38		5190	-11.84	3.01		-8.83	10	Pass
46		5230	-12.83	3.01		-9.82	10	Pass

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 82 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



Test Plots

1.802.11n HT40 at mcs0 of CH38

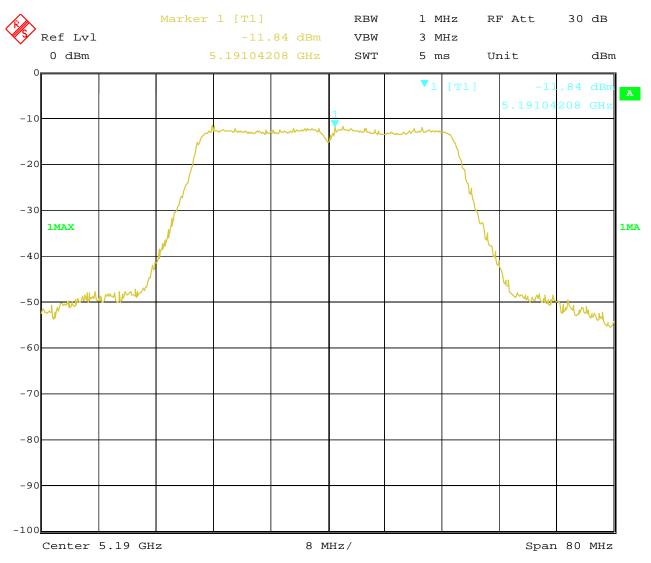

Date: 13.NOV.2019 08:26:39


Page 83 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



2.802.11n HT40 at mcs0 of CH46

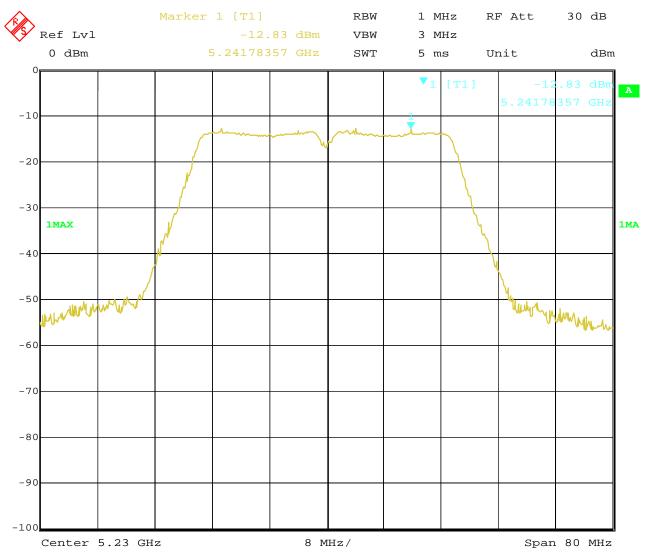

13.NOV.2019 08:27:57 Date:

Page 84 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometrical access contro			Model		ACE-0001		
		termina	ls VisionLabs LUN	4					
			ACE						
Mode	fode 802.11ac VHT		2.11ac VHT20	In	Input Voltage		120V~		
Temperat	Temperature		24 deg. C,		Humidity		56% RH		
Channel	Free	quency	An1	Facto	r	Total Spectral Density		Limit	Pass/ Fail
	(MHz)		Spectral Density			((dBm)	(dBm)	
36	5180		-7.39	3.01		-4.38		10	Pass
40	5	5200	-8.17	3.01			-5.16	10	Pass
48	5	5240	-8.96	3.01			-5.95	10	Pass

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 85 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



Test Plots

1.802.11ac at mcs0 of CH36

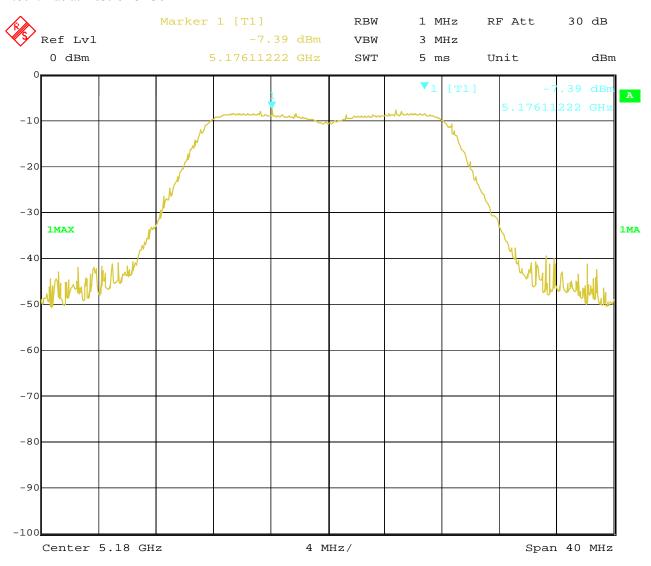

Date: 13.NOV.2019 08:41:27


Page 86 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



2.802.11ac at mcs0 of CH40

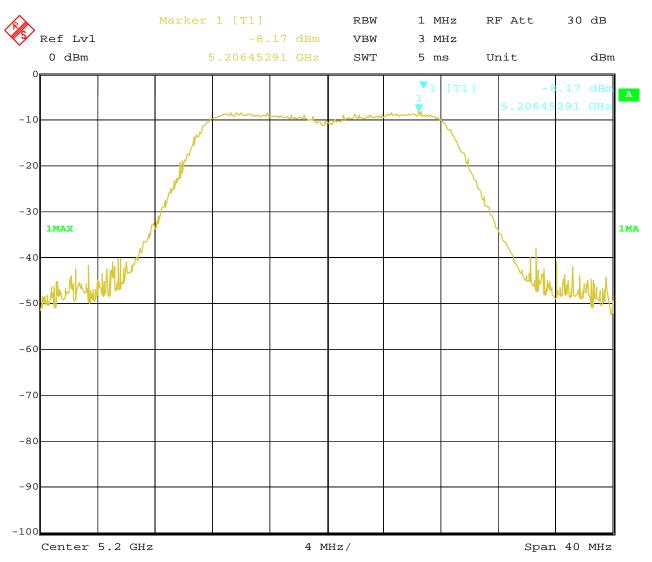

13.NOV.2019 08:42:44 Date:


Page 87 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



3.802.11ac at mcs0 of CH48

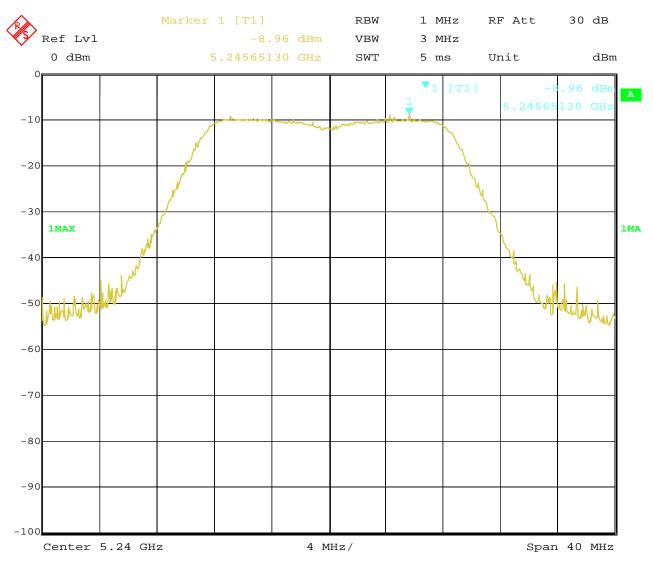

13.NOV.2019 08:44:19 Date:

Page 88 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometrical access control		Model		ACE-0001		
		terminals \	VisionLabs LUNA					
			ACE					
Mode	Iode 802.11ac		11ac VHT40	Input Vo	Input Voltage		120V~	
Temperat	Temperature 2		4 deg. C,	Humidity		56% RH		
Channel	nel Frequency		An1 Spectral	Factor	Total S	pectral Density	Limit	Pass/ Fail
	((MHz)	Density			(dBm)	(dBm)	
38		5190	-12.00	3.01		-8.99	10	Pass
46		5230	-12.51	3.01		-9.50	10	Pass

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 89 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



Test Plots

1.802.11ac at mcs0 of CH38

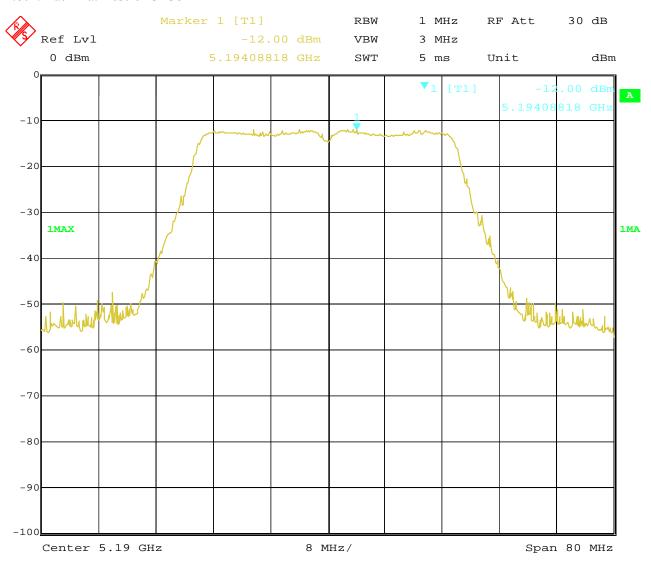

Date: 13.NOV.2019 08:34:32


Page 90 of 98

Report No.: FCC1910107-04

Date: 2019-11-16



2.802.11ac at mcs0 of CH46

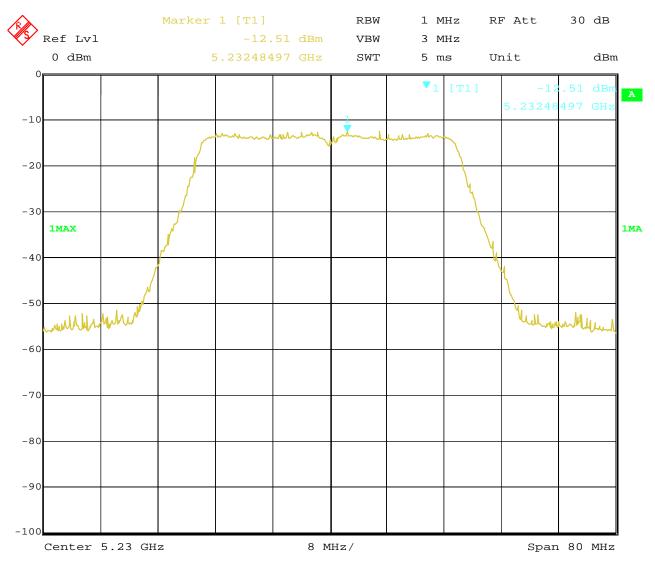

13.NOV.2019 08:36:12 Date:

Page 91 of 98 Report No.: FCC1910107-04

Date: 2019-11-16



EUT		Biometrical access control		Me	Model		ACE-0001	
	terminal		s VisionLabs LUNA	1				
		ACE						
Mode		802.11ac VHT80 23.9Mbps		Input	Voltage	ge 120V~		
Temperat	Temperature		24 deg. C,	Hun	Humidity		56% RH	
Channel	Fre	quency	Ant 1 Spectral	Factor	Total Sp	ectral Density	Limit	Pass/ Fail
	(1	MHz)	Density (dBm)			(dBm)	(dBm)	
42	5	5210	-14.21	3.01		-11.20	10	Pass

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 92 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



Test Plots

1.802.11ac at 23.9Mbps of CH42

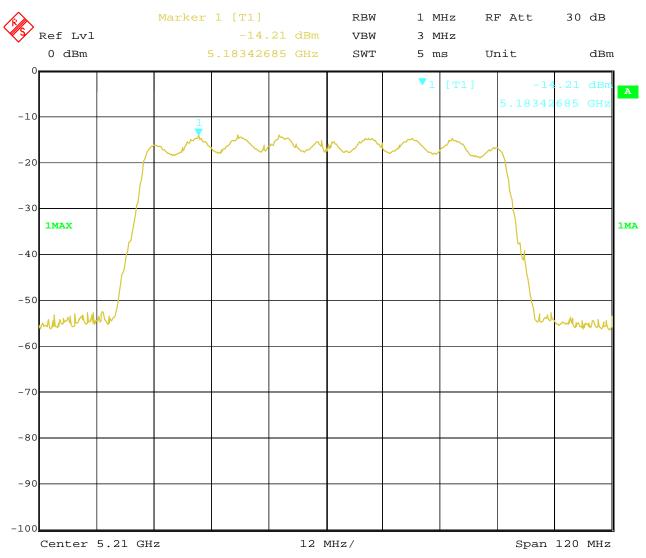

Date: 13.NOV.2019 08:32:08

Date: 2019-11-16



Page 93 of 98

10.0 Frequency Stability

10.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within \pm 0.02% of the operating frequency over a temperature variation of \pm 30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

10.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Date: 2019-11-16



10.3 Test Result

Channel 36 (5180MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5179.9816
120V	5179.9772
102V	5179.9808
Max. Deviation (MHz)	0.0228
Max. Deviation (ppm)	4.4

Rated working voltage: 120V~

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-30	5179.9803
-20	5179.9783
-10	5179.9809
0	5179.9775
10	5179.9821
20	5179.9789
30	5179.9793
40	5179.9812
50	5179.9768
Max. Deviation (MHz)	0.0232
Max. Deviation (ppm)	4.5

Date: 2019-11-16



Page 95 of 98

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Two Integral antenna used. The maximum Gain of each antenna is 3.0 dBi for 5G band.

Page 96 of 98

Report No.: FCC1910107-04

Date: 2019-11-16




12.0 FCC Label

FCC ID: 2AU6Z-ACE-0001RFID

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

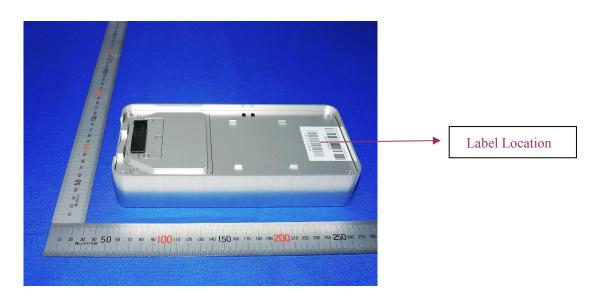

Page 97 of 98


Report No.: FCC1910107-04

Date: 2019-11-16



13.0 Photo of testing


Conducted Emission Test Setup:

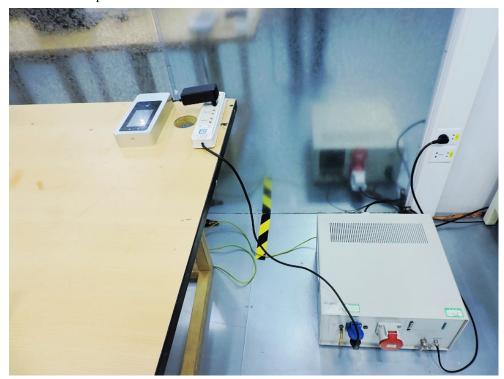


Date: 2019-11-16



Radiated Emission Test Setup:

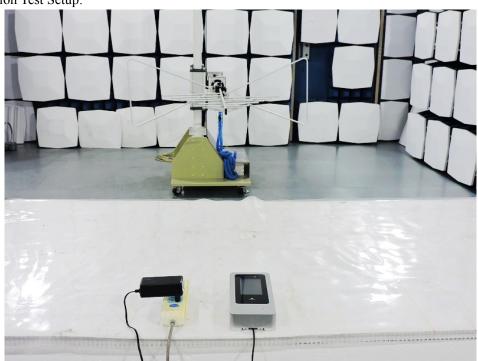

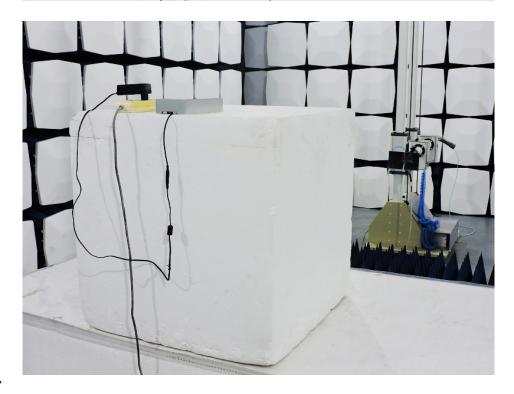

Photos of EUT

Please see test report FCC1910107-01

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.