

TEST REPORT

Applicant Name: ENCADIO-RITE ELECTRONICS PVT. LTD.
Address: A-7, INDUSTRIAL ESTATE, TALKATORA ROAD, LUCKNOW,
UP-226011, India
Report Number: SZ1240325-15550E-RF-00
FCC ID: 2AU85-EAN-95M

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: NEXAWAVE TiltSense
Model No.: EAN-95MW
Multiple Model(s) No.: N/A
Trade Mark: 
Date Received: 2024/03/25
Issue Date: 2024/08/09

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ga La Liu

Gala Liu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
FACTOR & OVER LIMIT/MARGIN CALCULATION	22
TEST DATA	22
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44

FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....47
 APPLICABLE STANDARD47
 TEST PROCEDURE47
 TEST DATA47
FCC §15.247(E) - POWER SPECTRAL DENSITY.....49
 APPLICABLE STANDARD49
 TEST PROCEDURE49
 TEST DATA50
EUT PHOTOGRAPHS.....52
TEST SETUP PHOTOGRAPHS53

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1240325-15550E-RF-00	Original Report	2024/08/09

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	NEXAWAVE TiltSense
Tested Model	EAN-95MW
Multiple Model(s)	N/A
Frequency Range	903-927MHz
Maximum Conducted Peak Output Power	13.51dBm
Modulation Technique	FSK
Antenna Specification [#]	4.44dBi (provided by the applicant)
Voltage Range	DC 7.20V from Battery or DC 9V Adapter
Sample serial number	2J6B-1 for Radiated Emissions Test 2J6B-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices .

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

Channel List

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	903.00	18	911.50	35	920.00
2	903.50	19	912.00	36	920.50
3	904.00	20	912.50	37	921.00
4	904.50	21	913.00	38	921.50
5	905.00	22	913.50	39	922.00
6	905.50	23	914.00	40	922.50
7	906.00	24	914.50	41	923.00
8	906.50	25	915.00	42	923.50
9	907.00	26	915.50	43	924.00
10	907.50	27	916.00	44	924.50
11	908.00	28	916.50	45	925.00
12	908.50	29	917.00	46	925.50
13	909.00	30	917.50	47	926.00
14	909.50	31	918.00	48	926.50
15	910.00	32	918.50	49	927.00
16	910.50	33	919.00	/	/
17	911.00	34	919.50	/	/

EUT was tested with Channel 1, 20 and 49.

Equipment Modifications


“RF-Test-SW V1 apk” exercise software was used and the power level is default#. The software and power level was provided by the manufacturer.

EUT Exercise Software

No Software was used

Duty cycle

Test Mode	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (Hz)
FSK	29.327	101.058	29.02	34	50

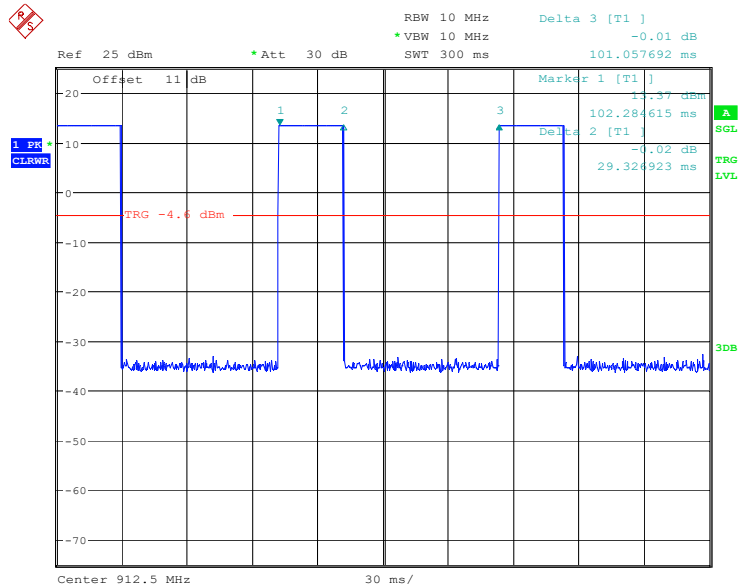

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 21:06:17

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TP-link	Adapter	T090085-2D1	Unknown
Unknown	GalaxyA04e	SM-A042F/DS	R9ZW90K0DHB

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC Cable	1.5	Receptacle	EUT
Unshielded Un-detachable DC Cable	1.0	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emissions:

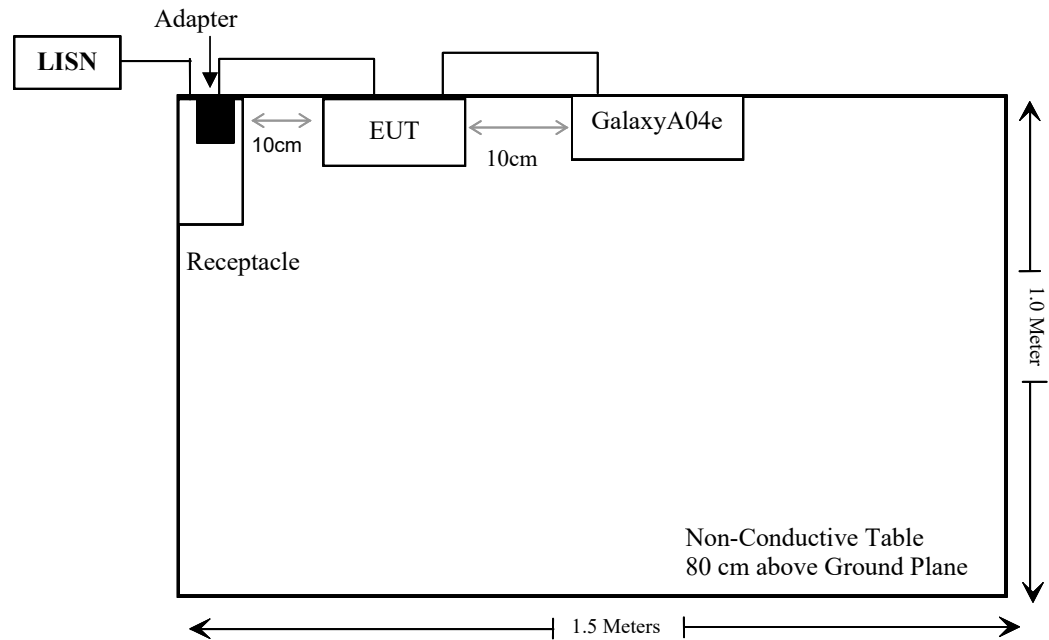

For Radiated Emissions (Battery):

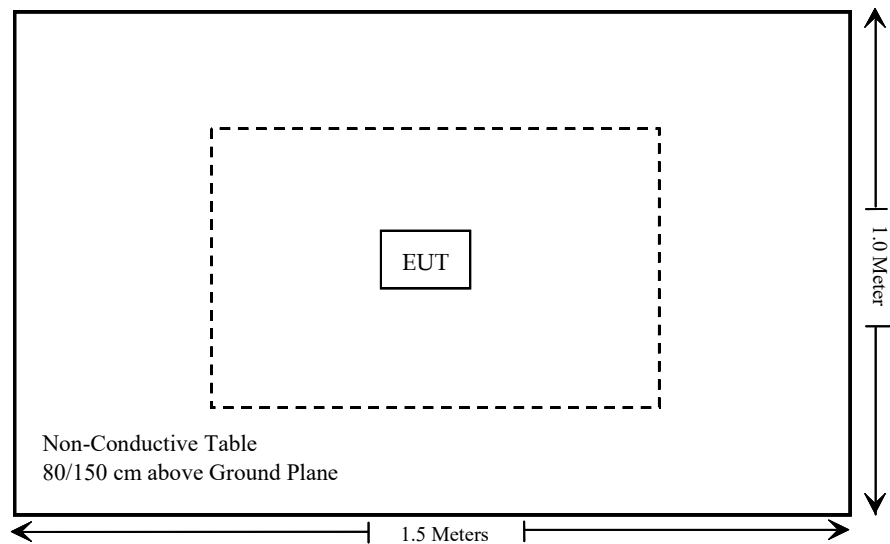

For Spurious emissions (Adapter):

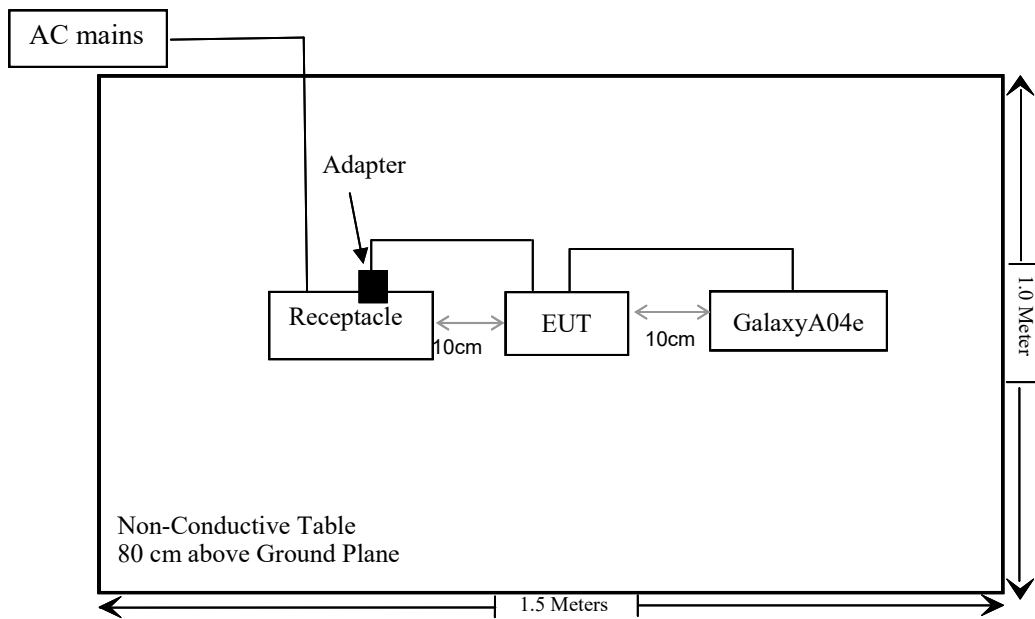

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (3) & §2.1091	Maximum Permissible Exposure(MPE)	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
FCC §15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
FCC §15.247(b)(3)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Radiated Emission Test(below 1GHz)					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
BACL	Active Loop Antenna	1313-1A	4031911	2024/03/21	2025/03/20
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Radiated Emission Test(above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200982	2023/12/18	2024/12/17
Unknown	10dB Attenuator	Unknown	F-03-EM122	2023/07/04	2024/07/03
Unknown	RF Cable	65475	01670515	2023/07/04	2024/07/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (W)
		(dBm)	(dBi)	(dBd)	(dBm)	(W)		
LoRa	903-927	14.0	4.44	2.29	16.29	0.043	0.2	0.462

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one external antenna with unique antenna connector, and the maximum antenna gain[#] is 4.44dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

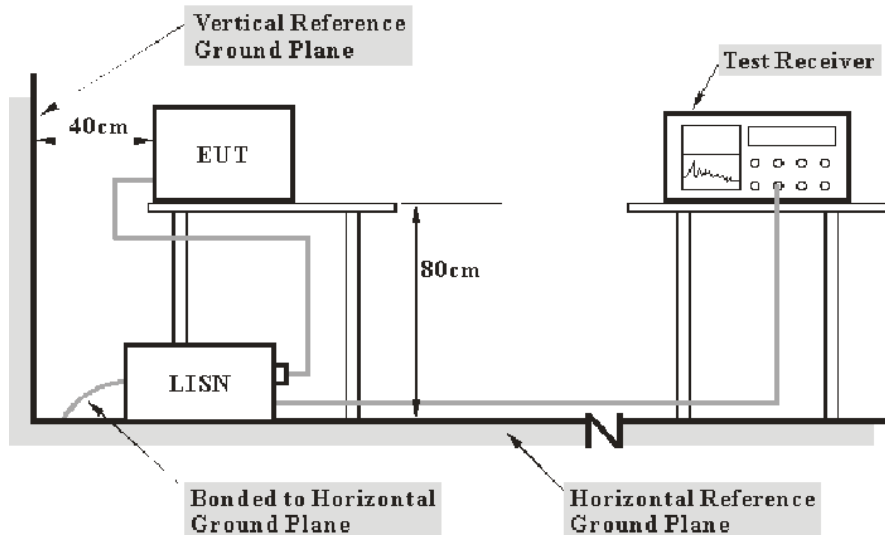

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	72 %
ATM Pressure:	101 kPa

The testing was performed by Macy Shi on 2024-08-05.

EUT operation mode: Transmitting (maximum power mode low channel)

AC 120V/60 Hz, Line

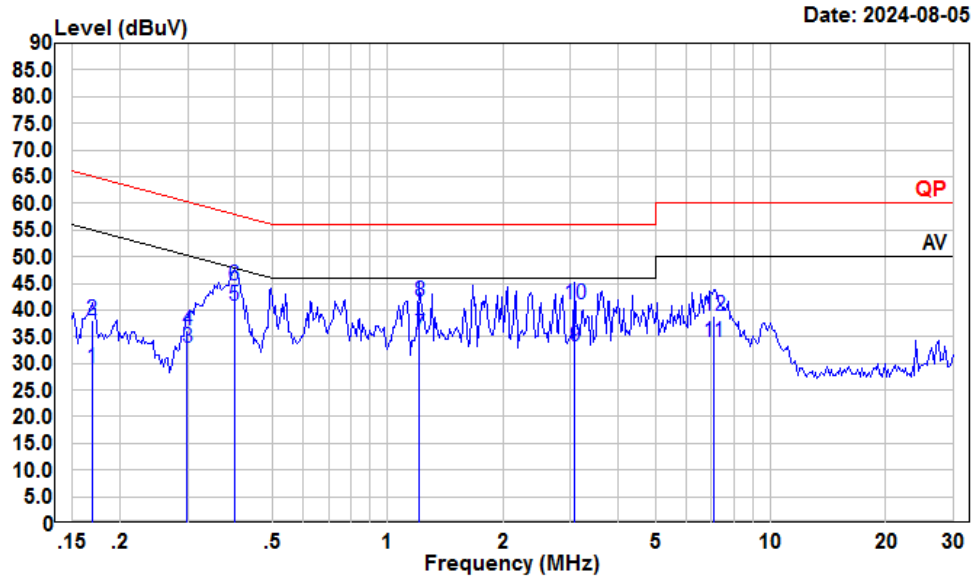

Condition: Line


Project : SZ1240325-15550E-RF

tester : Macy.shi

Note : lora

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	8.24	29.20	10.86	10.10	55.03	-25.83	Average
2	0.17	17.03	37.99	10.86	10.10	65.03	-27.04	QP
3	0.30	12.02	32.80	10.67	10.11	50.28	-17.48	Average
4	0.30	15.46	36.24	10.67	10.11	60.28	-24.04	QP
5	0.40	20.12	40.80	10.58	10.10	47.90	-7.10	Average
6	0.40	23.86	44.54	10.58	10.10	57.90	-13.36	QP
7	1.21	14.81	35.40	10.45	10.14	46.00	-10.60	Average
8	1.21	21.07	41.66	10.45	10.14	56.00	-14.34	QP
9	3.07	12.62	33.21	10.41	10.18	46.00	-12.79	Average
10	3.07	20.35	40.94	10.41	10.18	56.00	-15.06	QP
11	7.10	13.27	33.96	10.50	10.19	50.00	-16.04	Average
12	7.10	18.11	38.80	10.50	10.19	60.00	-21.20	QP

AC 120V/60 Hz, Neutral

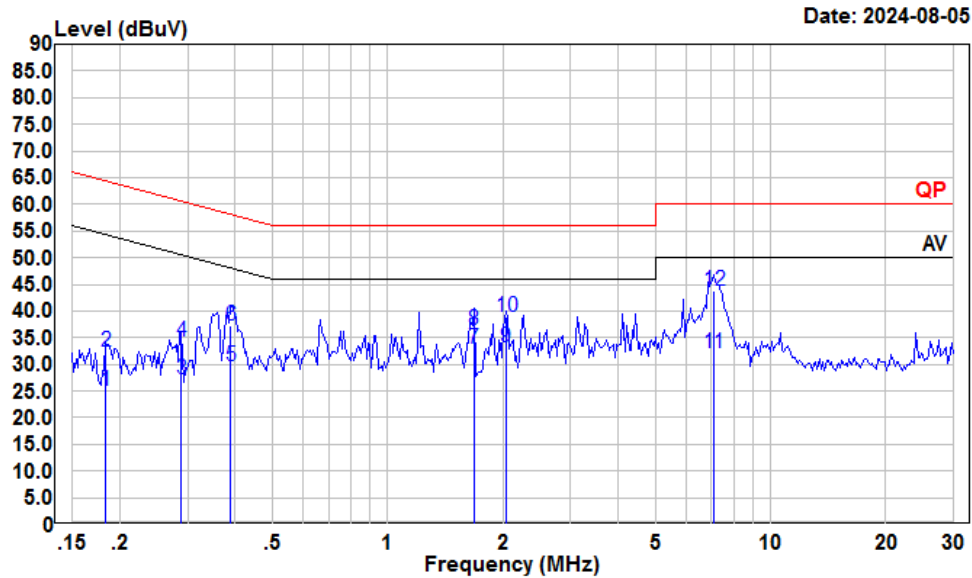

Condition: Neutral

Project : SZ1240325-15550E-RF

tester : Macy.shi

Note : lora

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.18	4.56	25.12	10.46	10.10	54.33	-29.21	Average
2	0.18	11.72	32.28	10.46	10.10	64.33	-32.05	QP
3	0.29	6.62	27.24	10.52	10.10	50.54	-23.30	Average
4	0.29	13.57	34.19	10.52	10.10	60.54	-26.35	QP
5	0.39	8.98	29.70	10.62	10.10	48.08	-18.38	Average
6	0.39	16.58	37.30	10.62	10.10	58.08	-20.78	QP
7	1.68	12.23	32.93	10.53	10.17	46.00	-13.07	Average
8	1.68	15.76	36.46	10.53	10.17	56.00	-19.54	QP
9	2.03	12.52	33.11	10.40	10.19	46.00	-12.89	Average
10	2.03	18.21	38.80	10.40	10.19	56.00	-17.20	QP
11	7.10	11.10	31.99	10.70	10.19	50.00	-18.01	Average
12	7.10	22.93	43.82	10.70	10.19	60.00	-16.18	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

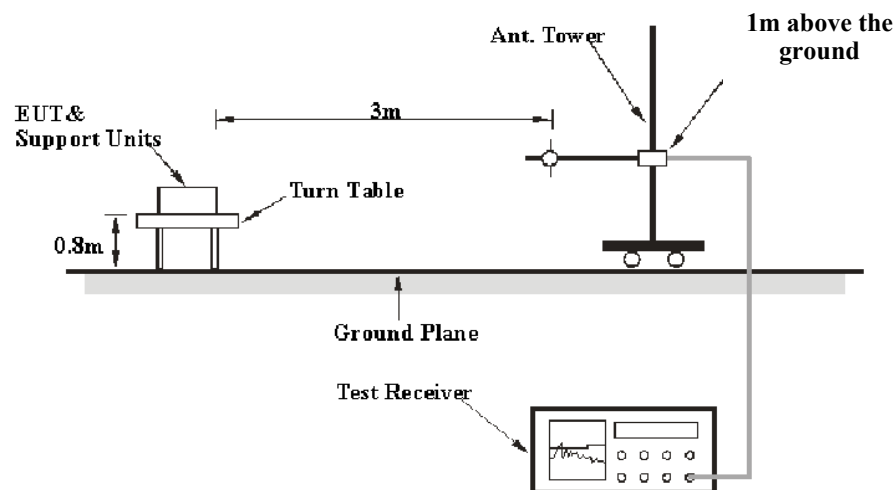

30MHz-1GHz:

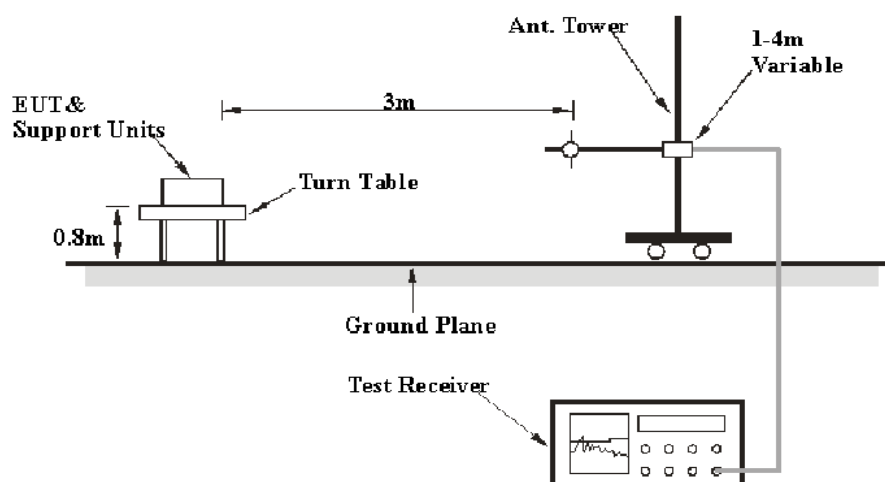

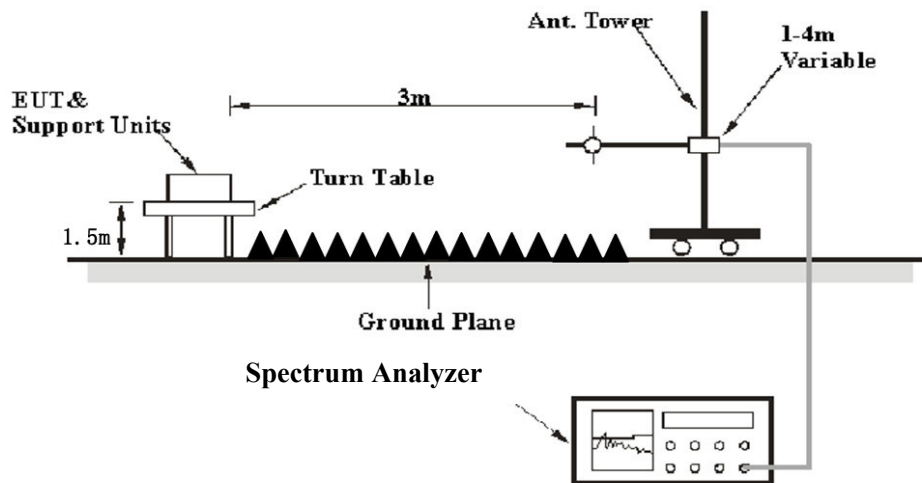Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	$\geq 1/T$ ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~25.6 °C
Relative Humidity:	50~54 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su2024-08-06 & 2024-08-08 for below 1GHz and Dylan Yang on 2024-05-13 for above 1GHz.

EUT operation mode: Transmitting


Note: Pre-scan in the X, Y and Z axes of orientation, the worst case of orientation was recorded.

9 kHz-30MHz: *(maximum power mode low channel)*

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30 MHz~1 GHz:
Power supply by adapter
903MHz


Horizontal

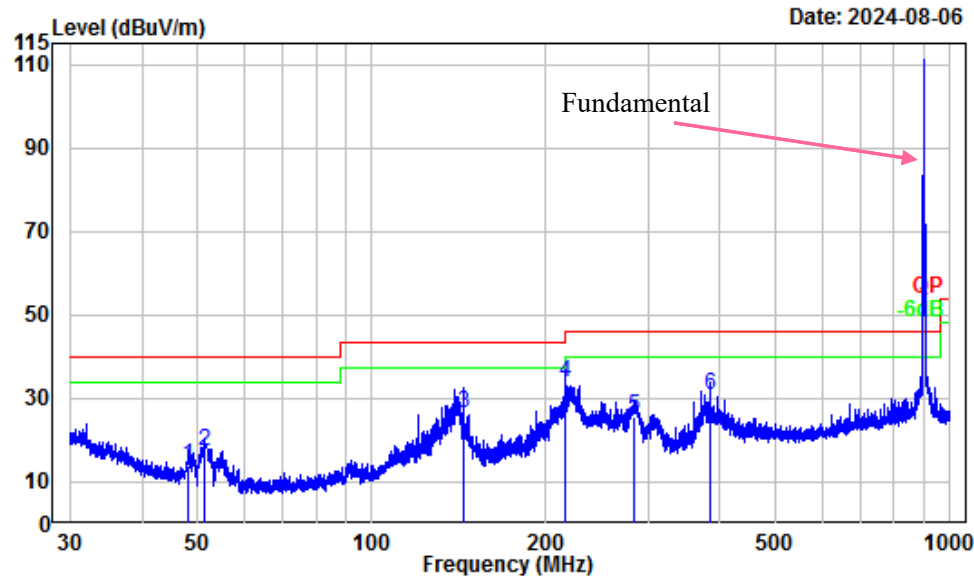

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.97	-16.80	30.51	13.71	40.00	-26.29 QP
2	51.46	-17.95	35.51	17.56	40.00	-22.44 QP
3	144.02	-12.12	38.60	26.48	43.50	-17.02 QP
4	216.02	-13.06	46.91	33.85	46.00	-12.15 QP
5	284.60	-11.78	37.30	25.52	46.00	-20.48 QP
6	384.10	-8.97	39.89	30.92	46.00	-15.08 QP

Vertical

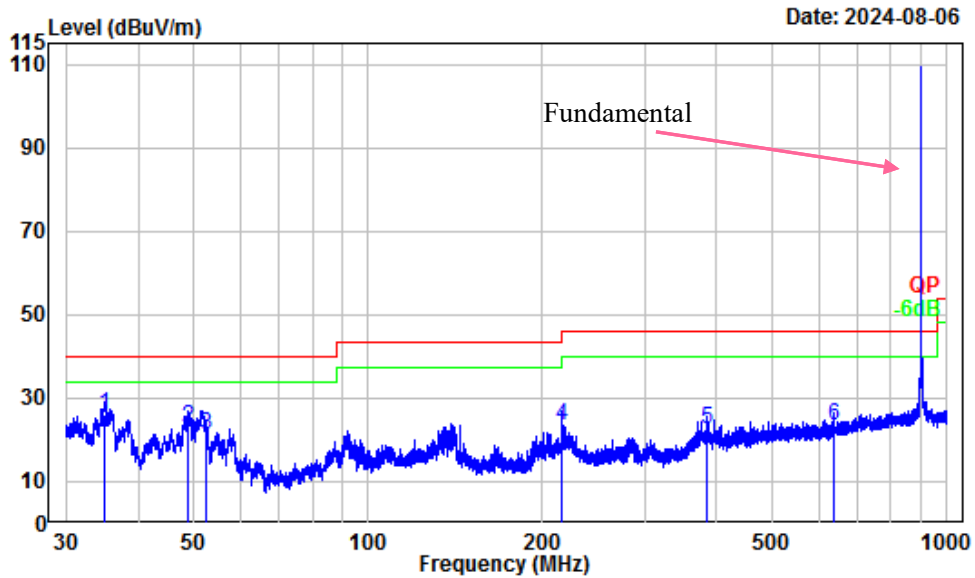


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	34.96	-9.16	35.30	26.14	40.00	-13.86	QP
2	48.82	-17.27	40.26	22.99	40.00	-17.01	QP
3	52.48	-17.96	39.07	21.11	40.00	-18.89	QP
4	216.02	-13.06	36.67	23.61	46.00	-22.39	QP
5	384.10	-8.97	31.45	22.48	46.00	-23.52	QP
6	636.13	-4.45	27.90	23.45	46.00	-22.55	QP

912.5MHz


Horizontal

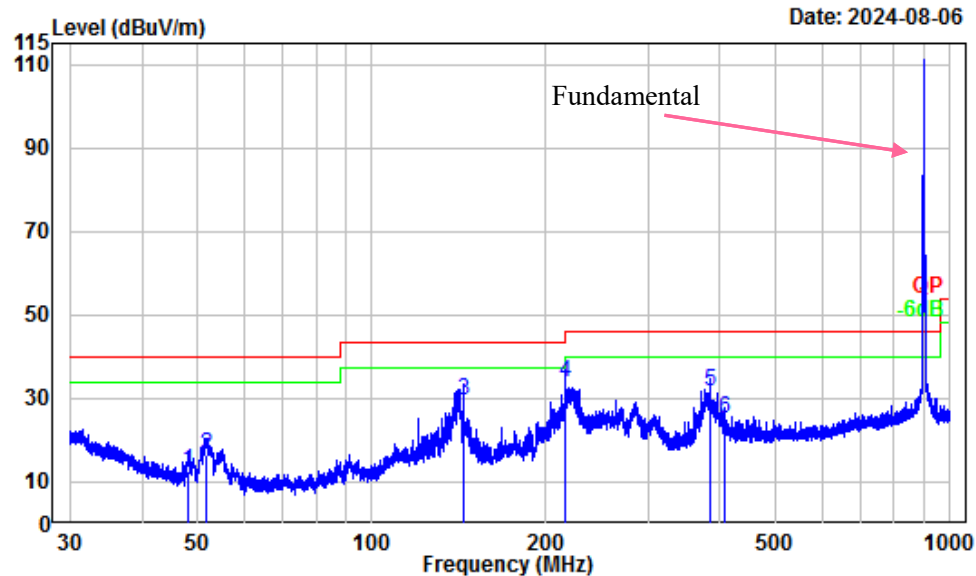

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.97	-16.80	29.58	12.78	40.00	-27.22	QP
2	51.77	-17.96	34.61	16.65	40.00	-23.35	QP
3	144.02	-12.12	41.60	29.48	43.50	-14.02	QP
4	216.02	-13.06	46.83	33.77	46.00	-12.23	QP
5	384.10	-8.97	40.73	31.76	46.00	-14.24	QP
6	408.05	-8.27	33.32	25.05	46.00	-20.95	QP

Vertical

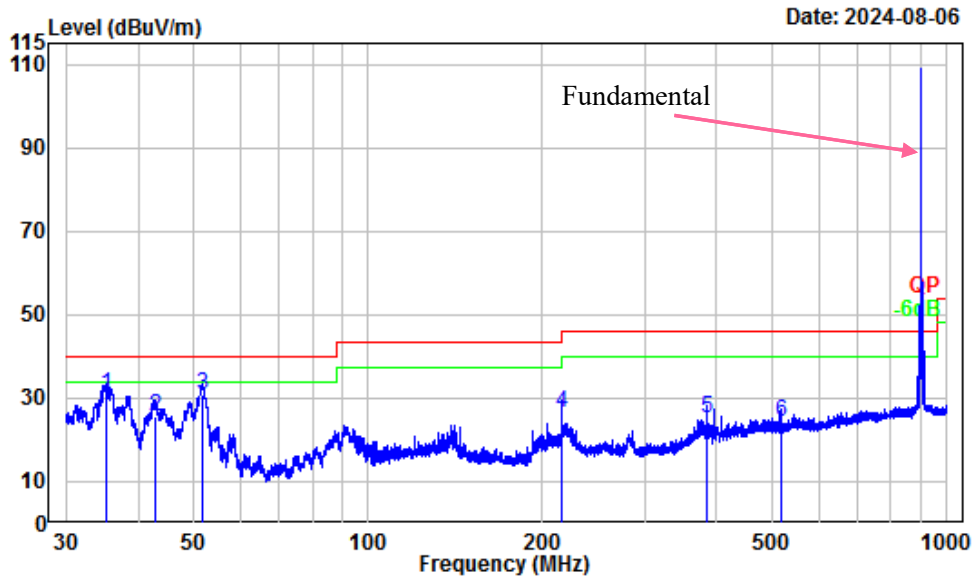


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	35.14	-9.28	40.00	30.72	40.00	-9.28	QP
2	42.79	-13.94	39.46	25.52	40.00	-14.48	QP
3	51.64	-17.95	48.56	30.61	40.00	-9.39	QP
4	216.02	-13.06	39.49	26.43	46.00	-19.57	QP
5	384.10	-8.97	34.27	25.30	46.00	-20.70	QP
6	516.34	-5.65	30.15	24.50	46.00	-21.50	QP

927MHz


Horizontal

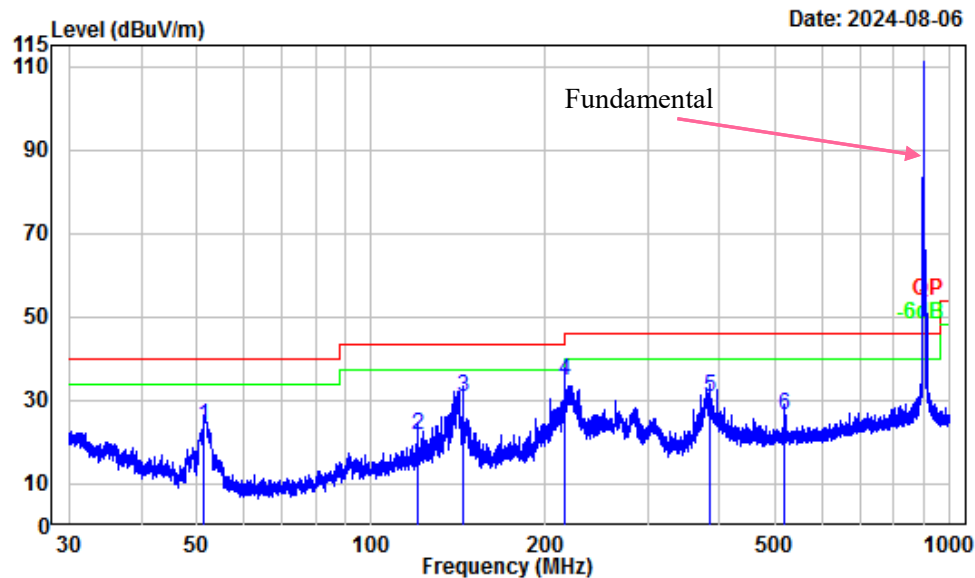

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	51.30	-17.95	41.61	23.66	40.00	-16.34	QP
2	120.01	-11.45	33.30	21.85	43.50	-21.65	QP
3	144.02	-12.12	42.90	30.78	43.50	-12.72	QP
4	216.02	-13.06	47.73	34.67	46.00	-11.33	QP
5	383.93	-8.97	39.58	30.61	46.00	-15.39	QP
6	519.06	-5.63	32.00	26.37	46.00	-19.63	QP

Vertical

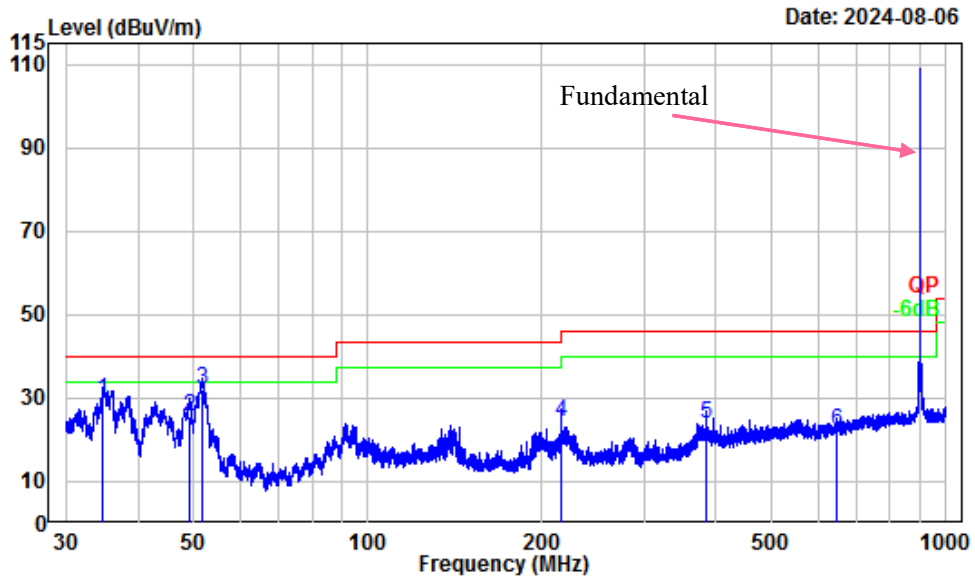


Site : Chamber A
 Condition : 3m Vertical
 Project Number: SZ1240325-15550E-RF
 Test Mode : Transmitting
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.82	-9.08	38.51	29.43	40.00	-10.57	QP
2	49.04	-17.39	43.16	25.77	40.00	-14.23	QP
3	51.71	-17.95	49.90	31.95	40.00	-8.05	QP
4	216.02	-13.06	37.39	24.33	46.00	-21.67	QP
5	384.10	-8.97	32.99	24.02	46.00	-21.98	QP
6	646.82	-4.20	26.53	22.33	46.00	-23.67	QP

Power supply by battery

903MHz


Horizontal

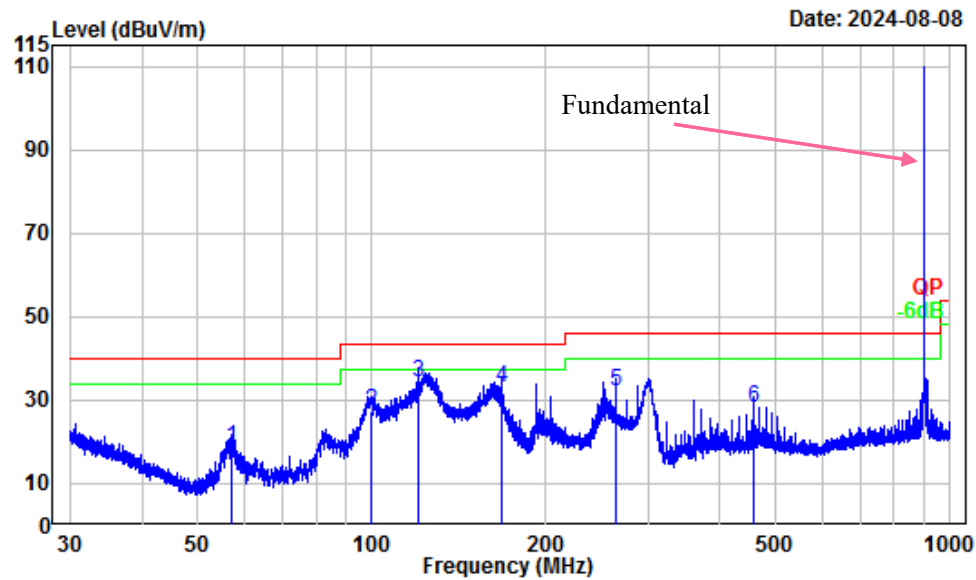

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	57.24	-17.79	36.60	18.81	40.00	-21.19 QP
2	99.57	-15.58	42.99	27.41	43.50	-16.09 QP
3	120.01	-12.37	46.62	34.25	43.50	-9.25 QP
4	167.97	-14.22	47.20	32.98	43.50	-10.52 QP
5	264.05	-14.03	46.11	32.08	46.00	-13.92 QP
6	456.11	-9.43	37.47	28.04	46.00	-17.96 QP

Vertical

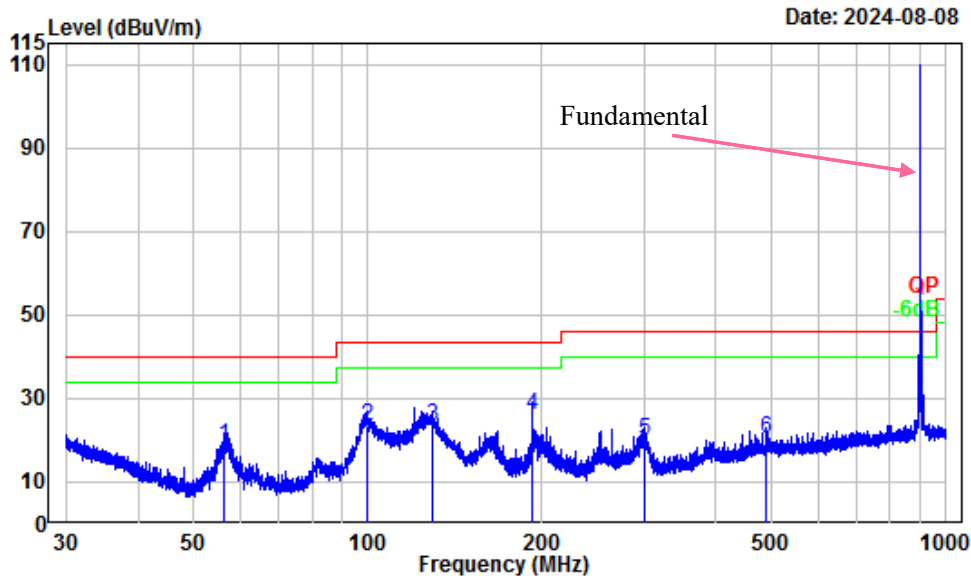


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	56.42	-18.79	37.40	18.61	40.00	-21.39 QP
2	99.57	-17.05	40.36	23.31	43.50	-20.19 QP
3	129.35	-12.57	36.20	23.63	43.50	-19.87 QP
4	192.00	-15.16	41.01	25.85	43.50	-17.65 QP
5	301.42	-13.16	33.15	19.99	46.00	-26.01 QP
6	489.67	-8.81	29.16	20.35	46.00	-25.65 QP

912.5MHz


Horizontal

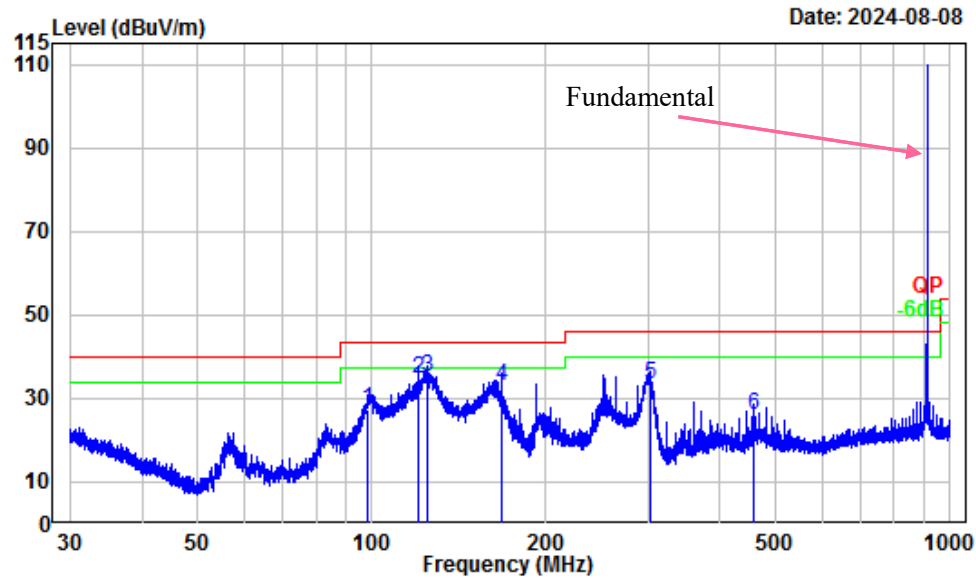

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	98.44	-15.87	43.27	27.40	43.50	-16.10	QP
2	120.01	-12.37	47.04	34.67	43.50	-8.83	QP
3	124.35	-12.24	47.20	34.96	43.50	-8.54	QP
4	167.97	-14.22	47.10	32.88	43.50	-10.62	QP
5	302.22	-12.75	46.35	33.60	46.00	-12.40	QP
6	456.11	-9.43	35.36	25.93	46.00	-20.07	QP

Vertical

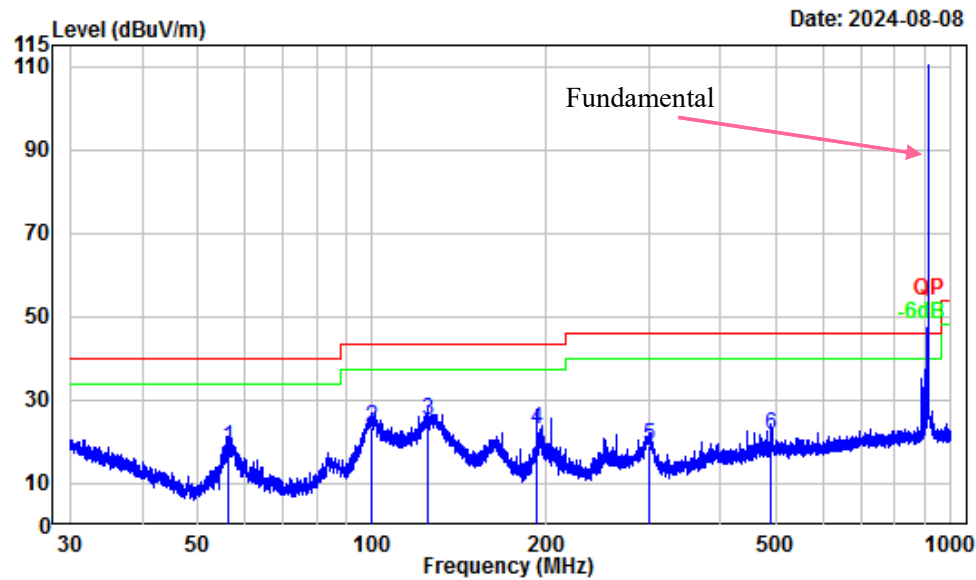


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	56.25	-18.78	37.50	18.72	40.00	-21.28 QP
2	99.92	-16.98	40.27	23.29	43.50	-20.21 QP
3	124.68	-12.68	37.63	24.95	43.50	-18.55 QP
4	192.00	-15.16	38.30	23.14	43.50	-20.36 QP
5	300.63	-13.17	32.27	19.10	46.00	-26.90 QP
6	489.24	-8.82	30.35	21.53	46.00	-24.47 QP

927MHz


Horizontal

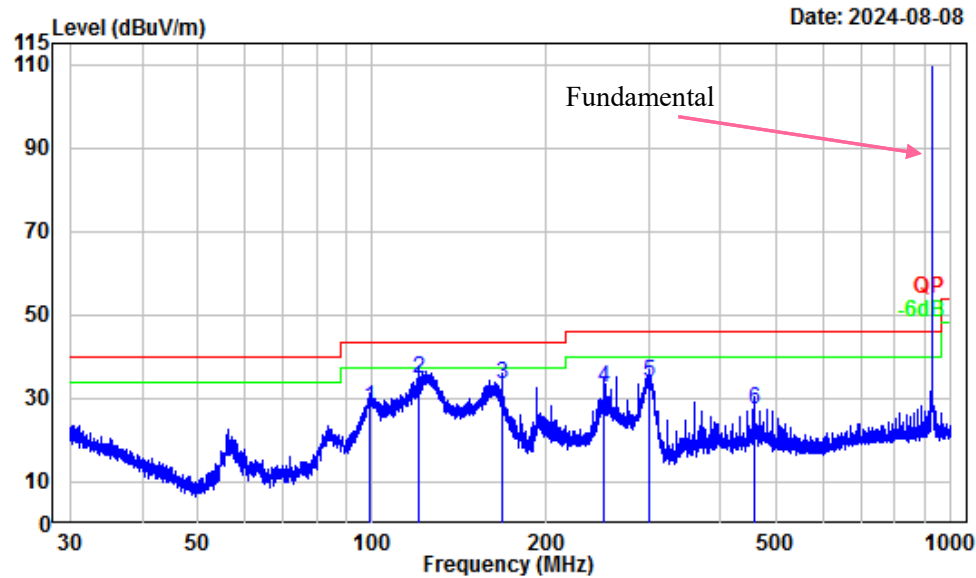

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240325-15550E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	98.83	-15.77	43.35	27.58	43.50	-15.92	QP
2	119.96	-12.37	47.06	34.69	43.50	-8.81	QP
3	168.05	-14.22	47.50	33.28	43.50	-10.22	QP
4	252.06	-14.46	46.80	32.34	46.00	-13.66	QP
5	301.55	-12.76	46.48	33.72	46.00	-12.28	QP
6	456.11	-9.43	36.98	27.55	46.00	-18.45	QP

Vertical

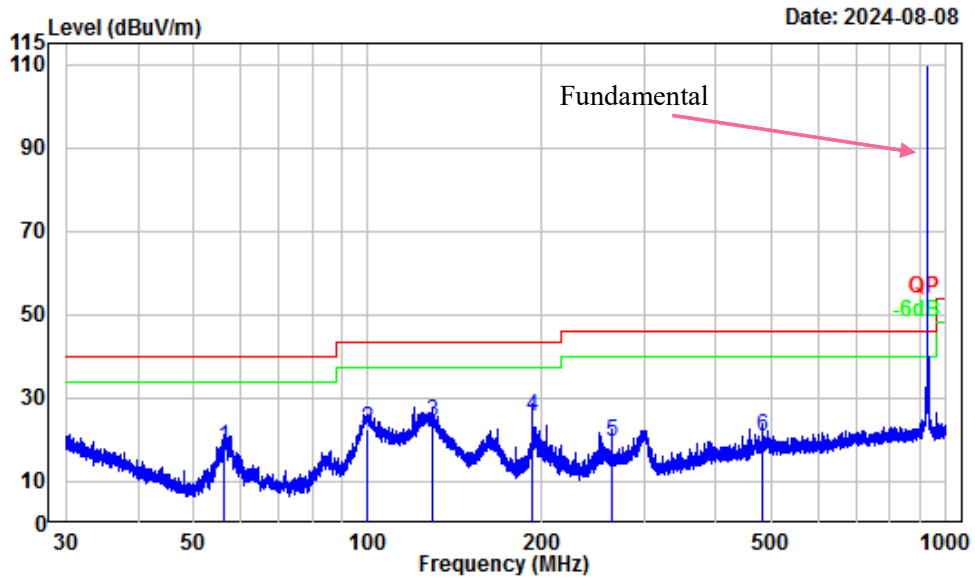

Site : Chamber A
 Condition : 3m Vertical
 Project Number: SZ1240325-15550E-RF
 Test Mode : Transmitting
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	56.49	-18.79	37.20	18.41	40.00	-21.59	QP
2	99.57	-17.05	39.50	22.45	43.50	-21.05	QP
3	129.30	-12.57	36.80	24.23	43.50	-19.27	QP
4	192.00	-15.16	40.61	25.45	43.50	-18.05	QP
5	264.05	-14.43	33.88	19.45	46.00	-26.55	QP
6	480.11	-9.12	30.07	20.95	46.00	-25.05	QP

Above 1 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
903MHz							
2709.00	45.36	PK	H	-2.49	42.87	74	-31.13
2709.00	31.18	AV	H	-2.49	28.69	54	-25.31
2709.00	45.15	PK	V	-2.49	42.66	74	-31.34
2709.00	31.07	AV	V	-2.49	28.58	54	-25.42
3612.00	45.13	PK	H	-2.04	43.09	74	-30.91
3612.00	32.08	AV	H	-2.04	30.04	54	-23.96
3612.00	45.36	PK	V	-2.04	43.32	74	-30.68
3612.00	32.74	AV	V	-2.04	30.70	54	-23.30
4515.00	45.92	PK	H	1.19	47.11	74	-26.89
4515.00	32.08	AV	H	1.19	33.27	54	-20.73
4515.00	46.23	PK	V	1.19	47.42	74	-26.58
4515.00	32.49	AV	V	1.19	33.68	54	-20.32
912.5MHz							
2737.50	45.00	PK	H	-2.49	42.51	74	-31.49
2737.50	30.18	AV	H	-2.49	27.69	54	-26.31
2737.50	44.64	PK	V	-2.49	42.15	74	-31.85
2737.50	30.73	AV	V	-2.49	28.24	54	-25.76
3650.00	44.44	PK	H	-1.94	42.50	74	-31.50
3650.00	32.06	AV	H	-1.94	30.12	54	-23.88
3650.00	45.07	PK	V	-1.94	43.13	74	-30.87
3650.00	32.35	AV	V	-1.94	30.41	54	-23.59
4562.50	45.76	PK	H	1.29	47.05	74	-26.95
4562.50	31.18	AV	H	1.29	32.47	54	-21.53
4562.50	45.88	PK	V	1.29	47.17	74	-26.83
4562.50	32.25	AV	V	1.29	33.54	54	-20.46

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
927MHz							
2781.00	44.59	PK	H	-2.46	42.13	74	-31.87
2781.00	32.57	AV	H	-2.46	30.11	54	-23.89
2781.00	45.94	PK	V	-2.46	43.48	74	-30.52
2781.00	32.48	AV	V	-2.46	30.02	54	-23.98
3708.00	45.94	PK	H	-1.54	44.40	74	-29.60
3708.00	32.43	AV	H	-1.54	30.89	54	-23.11
3708.00	45.96	PK	V	-1.54	44.42	74	-29.58
3708.00	32.78	AV	V	-1.54	31.24	54	-22.76
4635.00	45.92	PK	H	1.09	47.01	74	-26.99
4635.00	31.28	AV	H	1.09	32.37	54	-21.63
4635.00	45.72	PK	V	1.09	46.81	74	-27.19
4635.00	30.67	AV	V	1.09	31.76	54	-22.24

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Listed with the worst harmonic margin test plot:

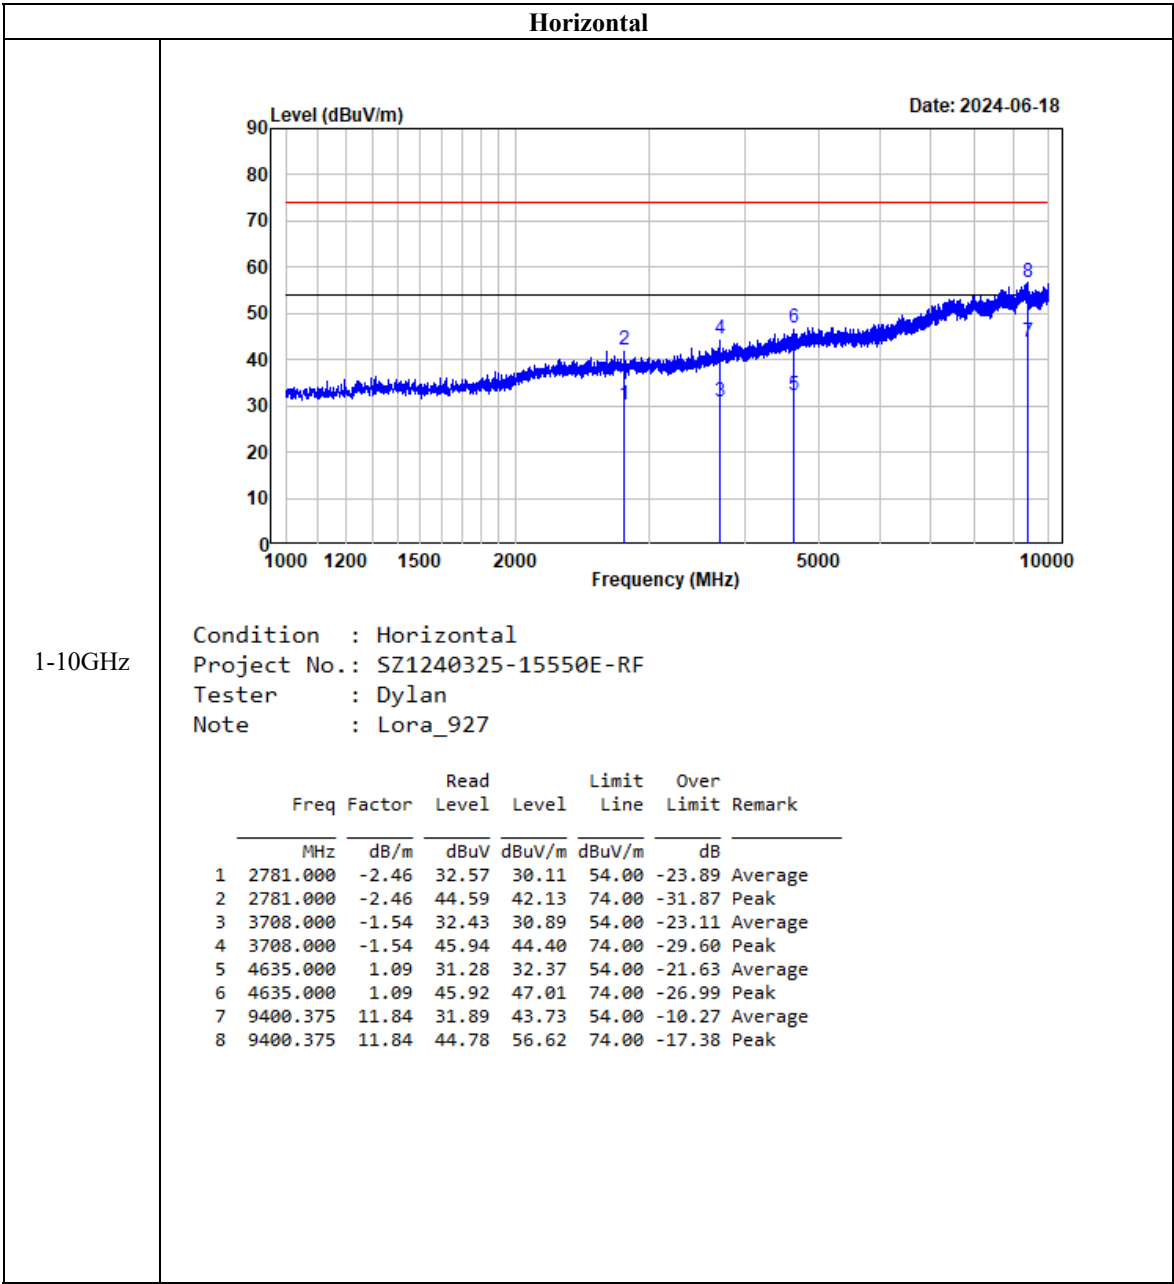

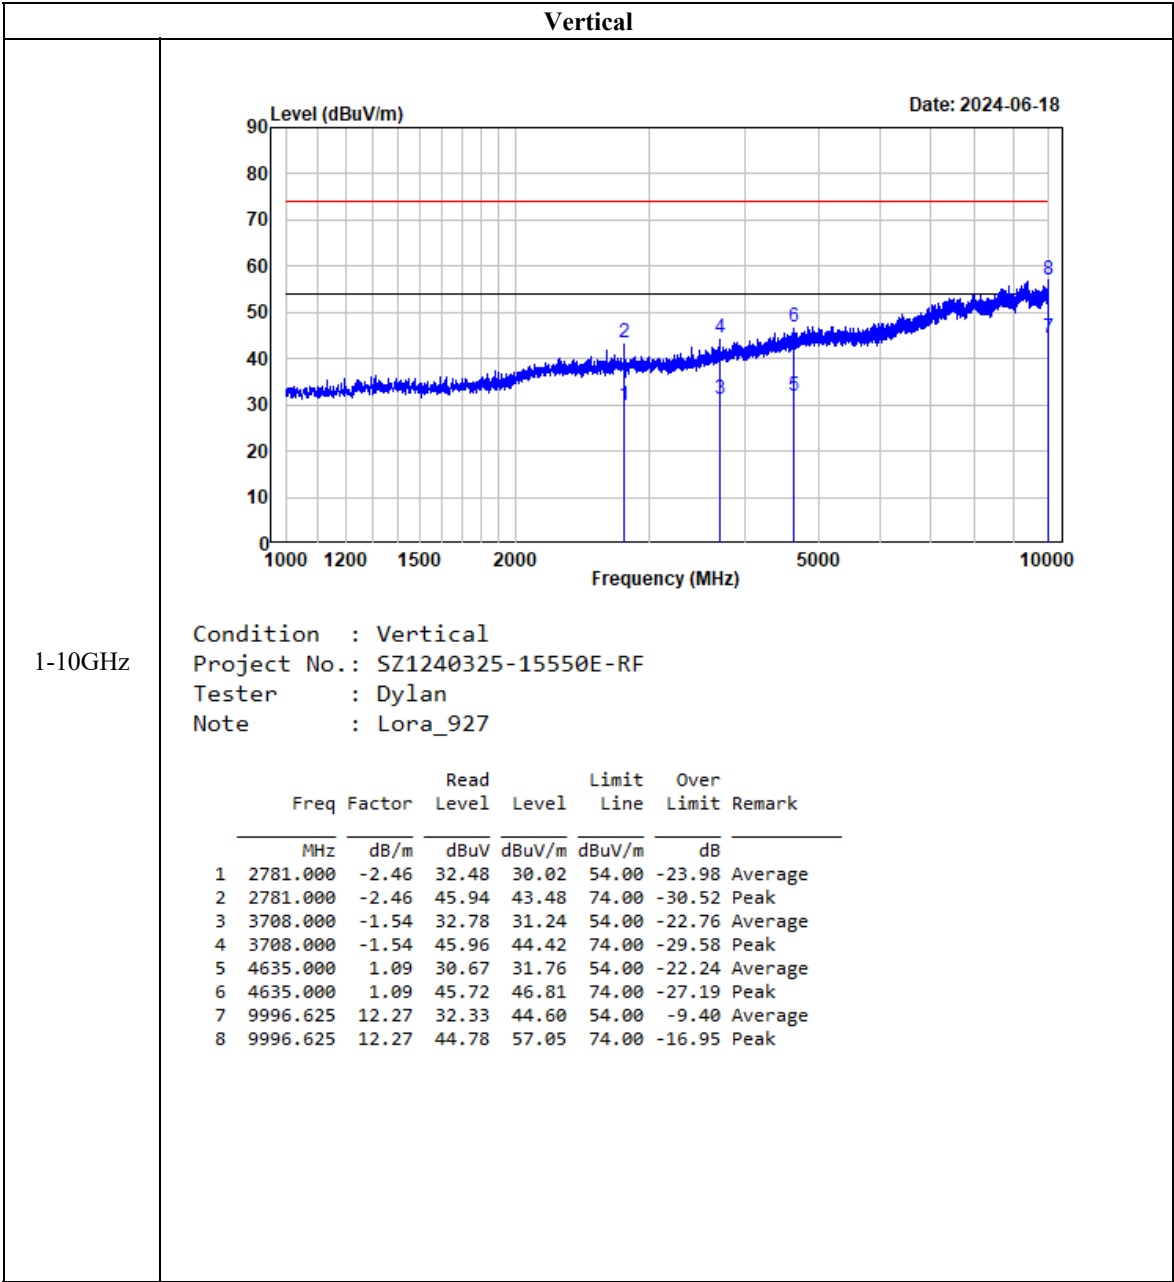

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25~26 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa


The testing was performed by Allen Bai from 2024-06-06 to 2024-06-10.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots.

Mode	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6dB BW Limit (MHz)
FSK	903	0.735	0.625	≥0.5
	912.5	0.721	0.622	≥0.5
	927	0.724	0.612	≥0.5


6dB bandwidth:

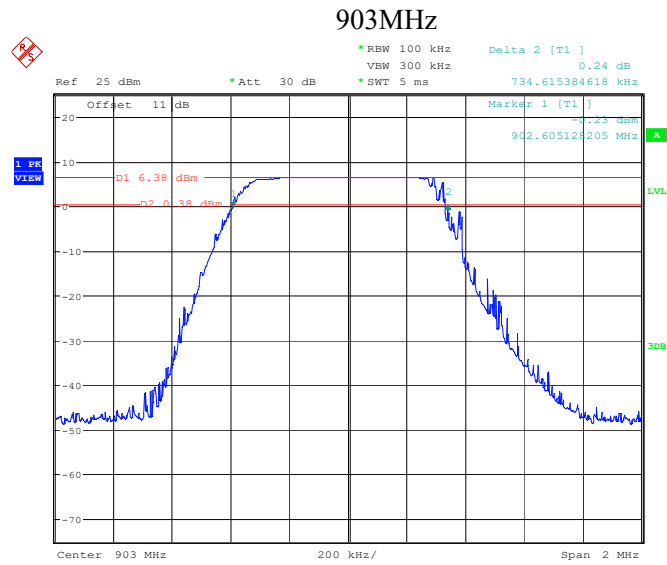

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 10.JUN.2024 18:39:22

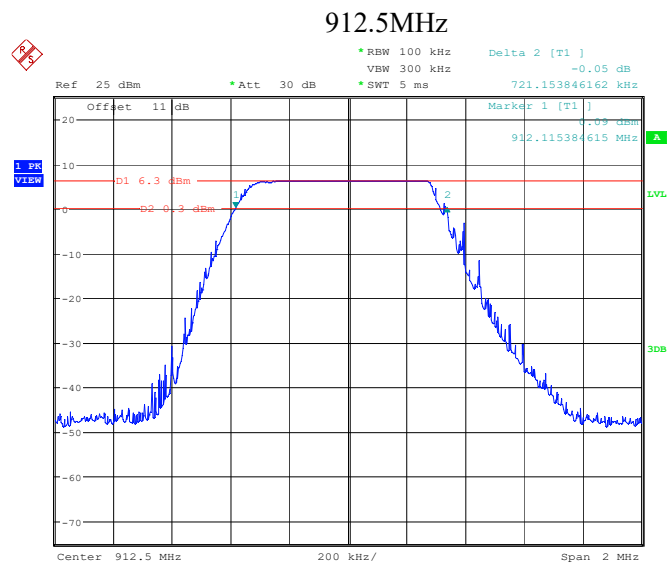


ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 10.JUN.2024 18:30:31

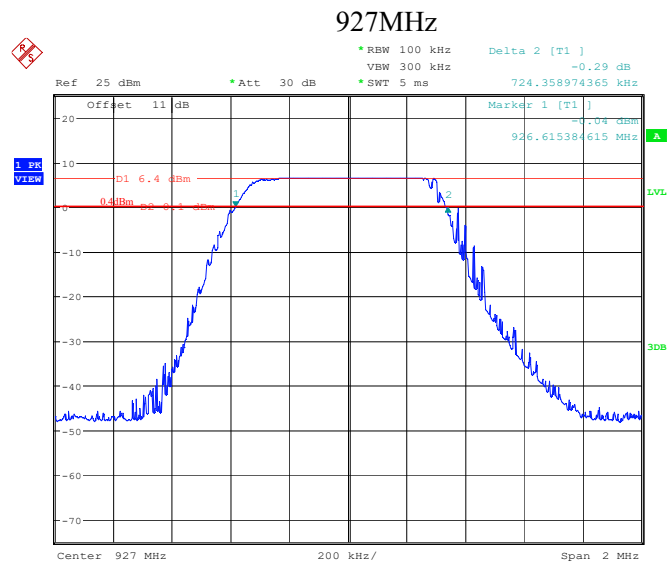


ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 10.JUN.2024 18:32:50


99% Occupied bandwidth:

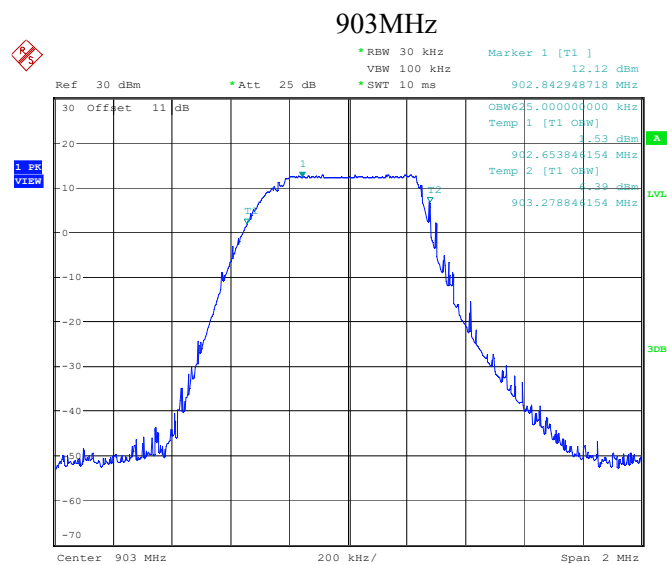

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 20:30:36

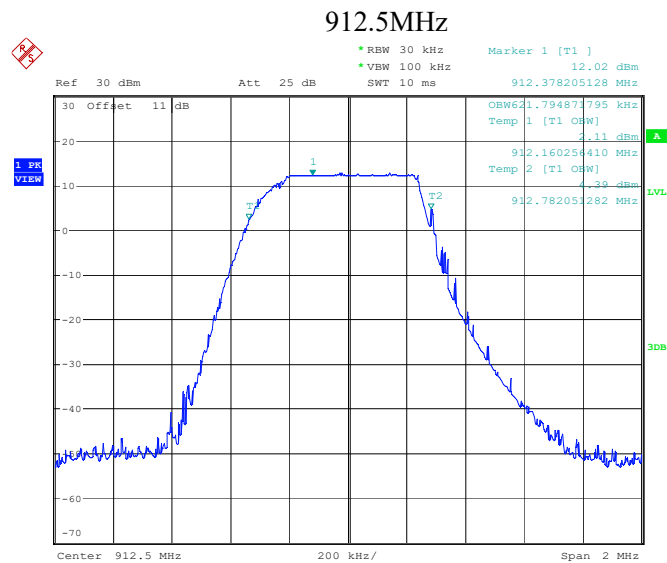

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 20:22:50

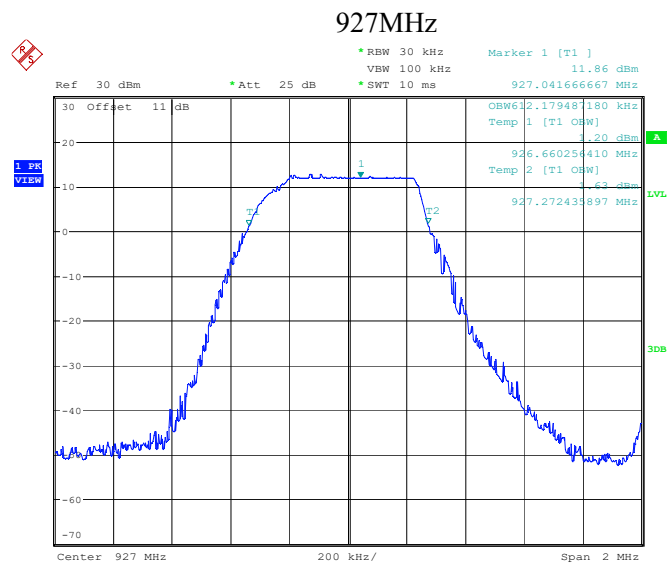

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 20:33:35

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions


Temperature:	25~26 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai on 2024-06-06.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Mode	Test Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)
FSK	903	13.51	≤30
	912.5	13.40	≤30
	927	13.14	≤30

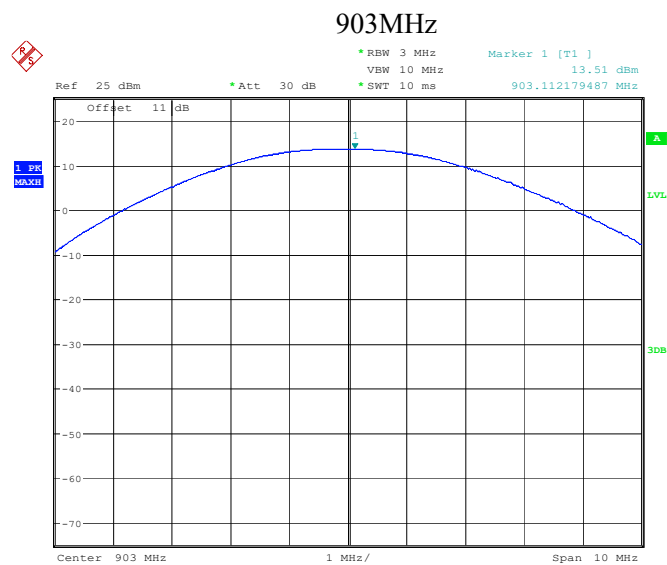

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 20:56:47

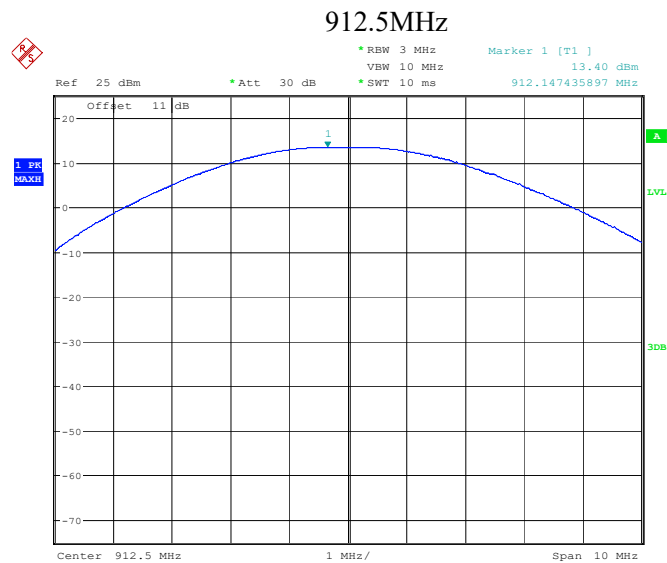

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 20:52:48

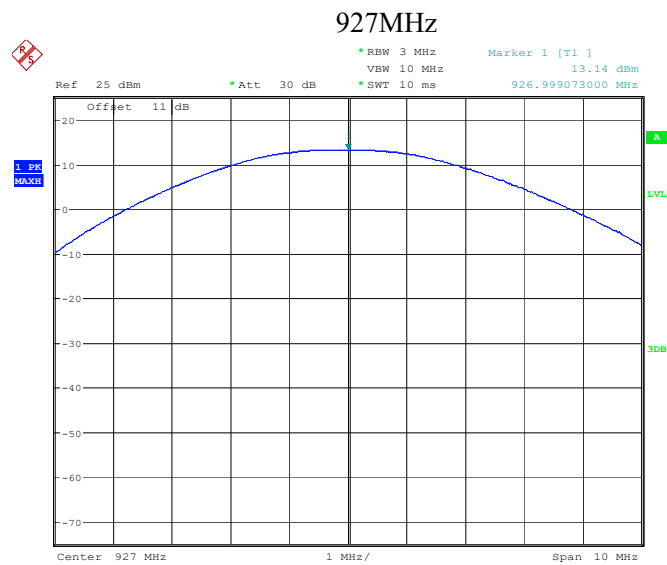

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 20:55:06

FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data


Environmental Conditions

Temperature:	25~26 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa


The testing was performed by Allen Bai on 2024-06-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following plots.

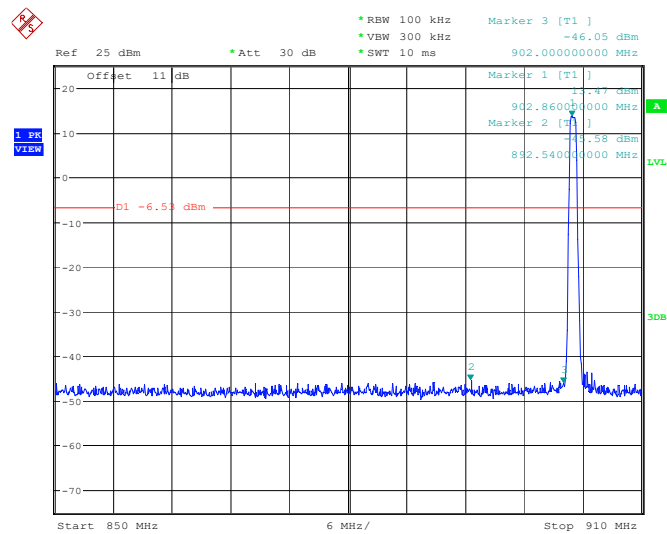

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 21:57:31

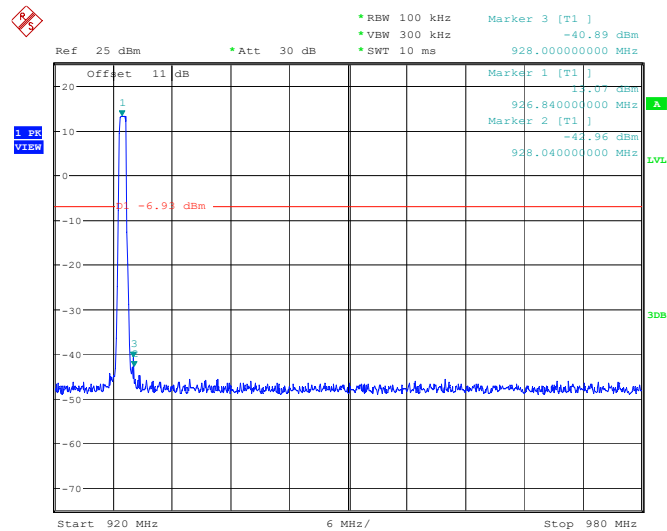

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 6.JUN.2024 21:59:41

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Method: ANSI C63.10-2013 Clause 11.10.5

Use this procedure when the maximum average conducted output power in the fundamental emission is used to demonstrate compliance.

1. Measure the duty cycle (D) of the transmitter output signal as described in ANSI C63.10-2013 11.6.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = Power Averaging (rms).
6. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
7. Sweep time = auto couple.
8. Trace mode = trace averaging (rms) mode over a minimum of 100 traces.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. When the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$), add $[10 \log (1 / D)]$, where D is the duty cycle measured in step 1), to the measured PSD to compute the average PSD during the actual transmission time.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions


Temperature:	25~26 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai on 2024-06-10.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Test Mode	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
FSK	903	-6.64	≤8.00
	912.5	-5.59	≤8.00
	927	-5.46	≤8.00

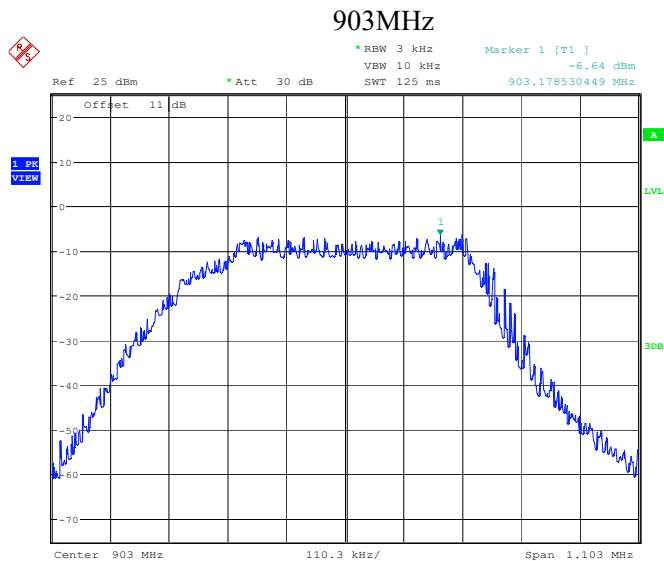

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 10.JUN.2024 18:43:18

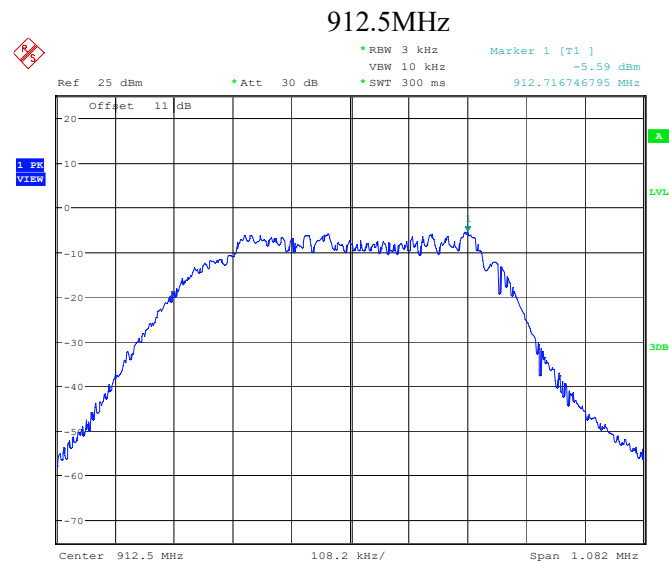

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 10.JUN.2024 18:48:51

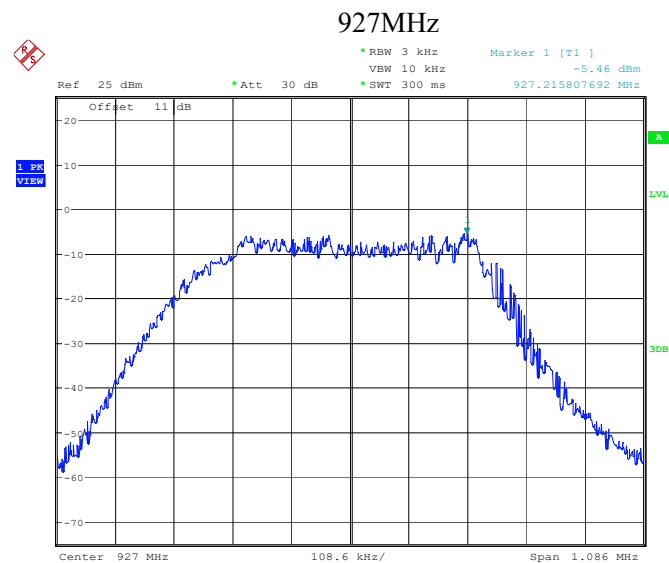

ProjectNo.:SZ1240325-15550E-RF Tester:Allen Bai
Date: 10.JUN.2024 18:50:50

EUT PHOTOGRAPHS

Please refer to the attachment SZ1240325-15550E-RF External photo and SZ1240325-15550E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment SZ1240325-15550E-RF Test Setup photo.

******* END OF REPORT *******