



RF TEST REPORT

Applicant Shanghai Smawave Technology Co. ,Ltd
FCC ID 2AU8HSRP410-A
Product LTE CPE
Brand Smawave
Model SRP410-a
Report No. R2001A0014-R3V1
Issue Date May 7, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR47 Part 27C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1	Test Laboratory	4
1.1	Notes of the Test Report	4
1.2	Testing Location	4
2	General Description of Equipment under Test	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
3	Applied Standards.....	6
4	Test Configuration.....	7
5	Test Case Results.....	8
5.1	Radiates Spurious Emission	8
6	Main Test Instruments.....	19



Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Radiates Spurious Emission	2.1053 /27.53(h) /27.53(g) /27.53(m) /27.53(f) /27.53(c)	PASS
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			
Date of Testing: April 11, 2020~ April 26, 2020			

Only Radiates Spurious Emission are tested in this report, and other conducted items please refer to the MGL6201A module report(Report No.: R2001A0002-R3V1).

Note: This revised report (Report No.: R2001A0014-R3V1) supersedes and replaces the previously issued report (Report No.: R2001A0014-R3). Please discard or destroy the previously issued report and dispose of it accordingly.



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Shanghai Smawave Technology Co. ,Ltd
Applicant address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China
Manufacturer	Shanghai Smawave Technology Co. ,Ltd
Manufacturer address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

2.2 General information

EUT Description			
Model	SRP410-a		
SN	6201A20010300144		
Hardware Version	SGL6010_V1.2		
Software Version	SG626_V1.0		
Power Supply	DC Power		
Antenna Type	External Antenna		
Antenna Gain	LTE Band 4:1.94dBi LTE Band 12:3.26dBi LTE Band 13:4.45dBi LTE Band 41:3.60dBi LTE Band 66:2.00dBi		
Test Mode(s)	LTE Band 4; LTE Band 12, LTE Band 13,LTE Band 41, LTE Band66;		
Test Modulation	(LTE)QPSK, 16QAM, 64QAM;		
LTE Category	12		
Rated Power Supply Voltage:	12V		
Extreme Voltage	Minimum: 9V Maximum: 14V		
Extreme Temperature	Lowest: -40°C Highest: +70°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 4	1710 ~1755	2110~2155
	LTE Band 12	699 ~ 716	729 ~ 746
	LTE Band 13	777 ~ 787	746 ~ 756
	LTE Band 41	2496 ~ 2690	2496 ~ 2690
	LTE Band 66	1710 ~ 1780	2110 ~ 2200
Note: 1. The information of the EUT is declared by the manufacturer.			



3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C(2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band

4/12/13/41/66:

Test items	Modes	Bandwidth (MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	50%	100%	L	M	H
Radiates Spurious Emission	LTE 4	O	-	O	-	-	O	O	-	-	O	-	-	-	O	-
	LTE 12	O	-	O	O	-	-	O	-	-	O	-	-	-	O	-
	LTE 13	-	-	O	O	-	-	O	-	-	O	-	-	-	O	-
	LTE 41	-	-	O	O	-	O	O	-	-	O	-	-	-	O	-
	LTE 66	O	-	O	-	-	O	O	-	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.															

5 Test Case Results

5.1 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz, VBW=600Hz for 9kHz-150kHz, RBW=10kHz, VBW=30kHz 150kHz-30MHz, RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz. And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (Pr). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
7. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

The measurement results are amend as described below:


Power(EIRP)=PMea- Pcl + Ga

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz~ 30MHz

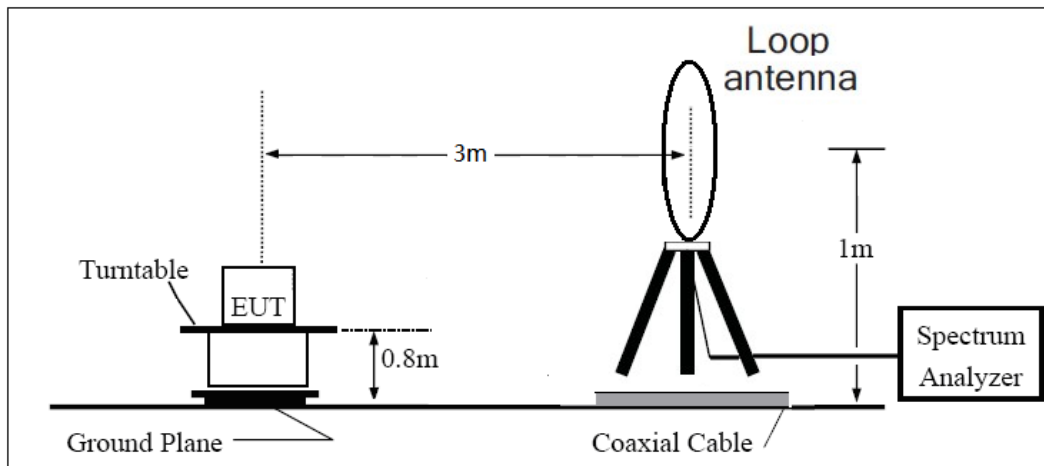

30MHz~ 1GHz

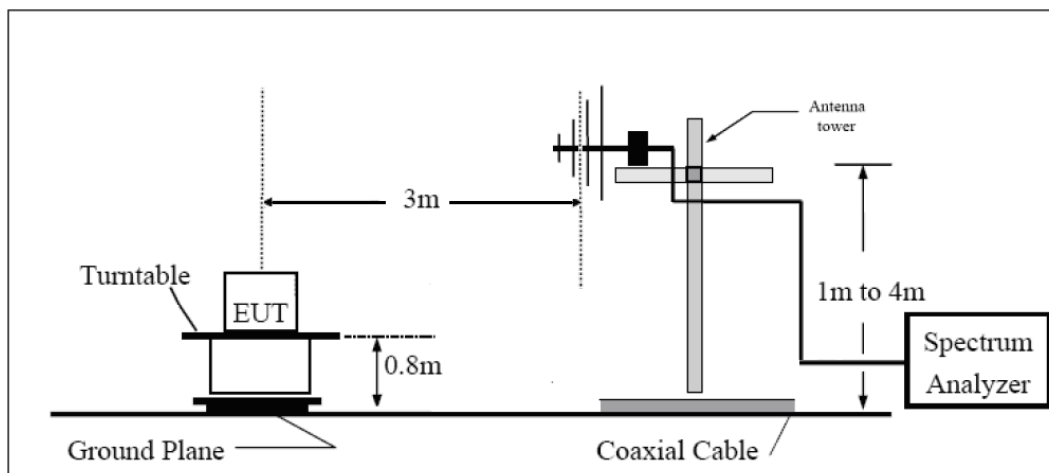

Above 1GHz

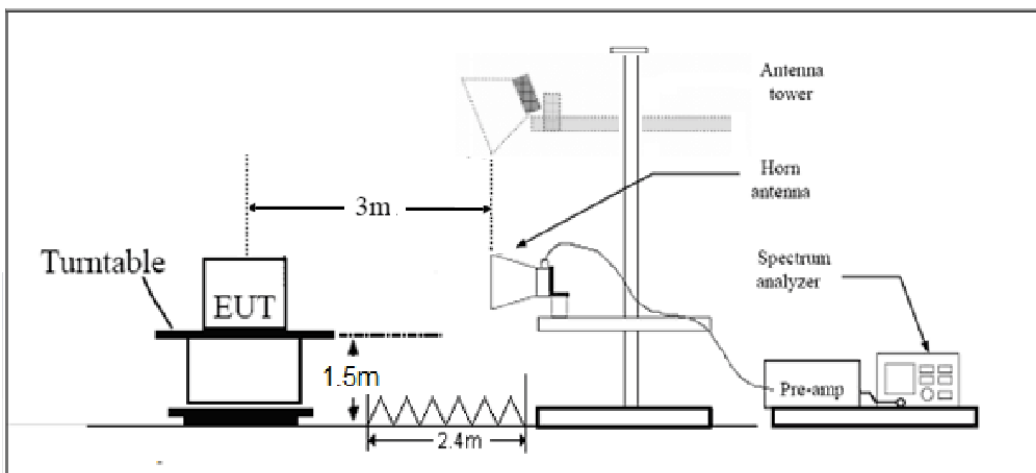

Note: Area side:2.4mX3.6m

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.”

Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;



- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Part 27.53(a)/(h)/(g) Limit		-13 dBm
Part 27.53(f) Limit	Limit out of the band 1559-1610 MHz	-13 dBm
	Limit in the band 1559-1610 MHz	-40 dBm
Part 27.53(m) Limit		-25 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3464.3	-46.14	2.6	10.75	Horizontal	-37.99	-13.00	24.99	135
3	5197.5	-38.71	2.4	11.05	Horizontal	-30.06	-13.00	17.06	90
4	6930.0	-53.86	4.5	11.15	Horizontal	-47.21	-13.00	34.21	180
5	8662.5	-53.20	5.1	11.35	Horizontal	-46.95	-13.00	33.95	0
6	10395.0	-49.06	5.3	11.95	Horizontal	-42.41	-13.00	29.41	135
7	12127.5	-50.60	5.5	13.55	Horizontal	-42.55	-13.00	29.55	180
8	13860.0	-48.22	6.3	13.75	Horizontal	-40.77	-13.00	27.77	0
9	15592.5	-46.29	6.7	13.85	Horizontal	-39.14	-13.00	26.14	135
10	17325.0	-46.95	6.8	14.25	Horizontal	-39.50	-13.00	26.50	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-47.84	2.6	10.75	Horizontal	-39.69	-13.00	26.69	135
3	5191.5	-37.44	2.4	11.05	Horizontal	-28.79	-13.00	15.79	0
4	6930.0	-55.40	4.5	11.15	Horizontal	-48.75	-13.00	35.75	180
5	8662.5	-53.89	5.1	11.35	Horizontal	-47.64	-13.00	34.64	45
6	10395.0	-51.20	5.3	11.95	Horizontal	-44.55	-13.00	31.55	0
7	12127.5	-52.41	5.5	13.55	Horizontal	-44.36	-13.00	31.36	135
8	13860.0	-51.32	6.3	13.75	Horizontal	-43.87	-13.00	30.87	270
9	15592.5	-49.04	6.7	13.85	Horizontal	-41.89	-13.00	28.89	225
10	17325.0	-46.91	6.8	14.25	Horizontal	-39.46	-13.00	26.46	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-49.38	2.6	10.75	Horizontal	-41.23	-13.00	28.23	135
3	5170.9	-36.24	2.4	11.05	Horizontal	-27.59	-13.00	14.59	45
4	6930.0	-52.57	4.5	11.15	Horizontal	-45.92	-13.00	32.92	0
5	8662.5	-53.78	5.1	11.35	Horizontal	-47.53	-13.00	34.53	180
6	10395.0	-51.51	5.3	11.95	Horizontal	-44.86	-13.00	31.86	90
7	12127.5	-50.38	5.5	13.55	Horizontal	-42.33	-13.00	29.33	270
8	13860.0	-47.05	6.3	13.75	Horizontal	-39.60	-13.00	26.60	225
9	15592.5	-47.29	6.7	13.85	Horizontal	-40.14	-13.00	27.14	0
10	17325.0	-45.59	6.8	14.25	Horizontal	-38.14	-13.00	25.14	135
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 12 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-59.60	2.00	10.75	Horizontal	-53.00	-13.00	40.00	315
3	2122.5	-65.16	2.51	11.05	Horizontal	-58.77	-13.00	45.77	90
4	2830.0	-46.46	4.20	11.15	Horizontal	-41.66	-13.00	28.66	225
5	3535.0	-43.73	5.20	11.15	Horizontal	-39.93	-13.00	26.93	135
6	4425.0	-55.85	5.50	11.95	Horizontal	-51.55	-13.00	38.55	90
7	5162.5	-55.97	5.70	13.55	Horizontal	-50.27	-13.00	37.27	270
8	5900.0	-55.74	6.30	13.75	Horizontal	-50.44	-13.00	37.44	180
9	6637.5	-55.15	6.80	13.85	Horizontal	-50.25	-13.00	37.25	225
10	7375.0	-55.85	6.90	14.25	Horizontal	-50.65	-13.00	37.65	270
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 12 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-59.01	2.00	10.75	Horizontal	-52.41	-13.00	39.41	45
3	2122.5	-67.17	2.51	11.05	Horizontal	-60.78	-13.00	47.78	180
4	2830.0	-45.73	4.20	11.15	Horizontal	-40.93	-13.00	27.93	135
5	3526.0	-43.19	5.20	11.15	Horizontal	-39.39	-13.00	26.39	135
6	4425.0	-54.59	5.50	11.95	Horizontal	-50.29	-13.00	37.29	90
7	5162.5	-54.29	5.70	13.55	Horizontal	-48.59	-13.00	35.59	270
8	5900.0	-55.25	6.30	13.75	Horizontal	-49.95	-13.00	36.95	180
9	6637.5	-56.22	6.80	13.85	Horizontal	-51.32	-13.00	38.32	225
10	7375.0	-50.81	6.90	14.25	Horizontal	-45.61	-13.00	32.61	270
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 12 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.0	-60.43	2.00	10.75	Horizontal	-53.83	-13.00	40.83	0
3	2122.5	-66.93	2.51	11.05	Horizontal	-60.54	-13.00	47.54	90
4	2830.0	-46.55	4.20	11.15	Horizontal	-41.75	-13.00	28.75	225
5	3515.0	-48.29	5.20	11.15	Horizontal	-44.49	-13.00	31.49	180
6	4425.0	-53.31	5.50	11.95	Horizontal	-49.01	-13.00	36.01	0
7	5162.5	-55.32	5.70	13.55	Horizontal	-49.62	-13.00	36.62	135
8	5900.0	-54.67	6.30	13.75	Horizontal	-49.37	-13.00	36.37	180
9	6637.5	-56.49	6.80	13.85	Horizontal	-51.59	-13.00	38.59	0
10	7375.0	-56.84	6.90	14.25	Horizontal	-51.64	-13.00	38.64	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 13 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-66.54	2.00	10.75	Horizontal	-59.94	-40.00	19.94	90
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2346.0	-58.11	2.51	11.05	Horizontal	-51.72	-13.00	38.72	225
4	3128.0	-57.34	4.20	11.15	Horizontal	-52.54	-13.00	39.54	135
5	3910.0	-47.37	5.20	11.15	Horizontal	-43.57	-13.00	30.57	90
6	4692.0	-49.91	5.50	11.95	Horizontal	-45.61	-13.00	32.61	135
7	5474.0	-55.46	5.70	13.55	Horizontal	-49.76	-13.00	36.76	90
8	6256.0	-54.24	6.30	13.75	Horizontal	-48.94	-13.00	35.94	270
9	7038.0	-44.04	6.80	13.85	Horizontal	-39.14	-13.00	26.14	180
10	7820.0	-45.11	6.90	14.25	Horizontal	-39.91	-13.00	26.91	225
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 13 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1555.3	-64.21	2.00	10.75	Horizontal	-57.61	-13.00	44.61	45
3	2346.0	-63.74	2.51	11.05	Horizontal	-57.35	-13.00	44.35	180
4	3128.0	-58.09	4.20	11.15	Horizontal	-53.29	-13.00	40.29	270
5	3910.0	-53.48	5.20	11.15	Horizontal	-49.68	-13.00	36.68	180
6	4692.0	-53.45	5.50	11.95	Horizontal	-49.15	-13.00	36.15	0
7	5474.0	-55.56	5.70	13.55	Horizontal	-49.86	-13.00	36.86	135
8	6256.0	-56.41	6.30	13.75	Horizontal	-51.11	-13.00	38.11	180
9	7038.0	-54.05	6.80	13.85	Horizontal	-49.15	-13.00	36.15	0
10	7820.0	-53.32	6.90	14.25	Horizontal	-48.12	-13.00	35.12	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 41 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5181.8	-36.49	2.00	9.15	Horizontal	-29.34	-25.00	4.34	135
3	7772.3	-56.26	2.50	11.35	Horizontal	-47.41	-25.00	22.41	180
4	9994.0	-54.58	4.20	12.05	Horizontal	-46.73	-25.00	21.73	0
5	12492.5	-54.10	5.20	12.85	Horizontal	-46.45	-25.00	21.45	45
6	14991.0	-54.51	5.50	14.23	Horizontal	-45.78	-25.00	20.78	135
7	17489.5	-50.84	5.70	12.15	Horizontal	-44.39	-25.00	19.39	0
8	19988.0	--	--	--	--	--	--	--	--
9	22486.5	--	--	--	--	--	--	--	--
10	24985.0	--	--	--	--	--	--	--	--

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 41 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5186.0	-36.12	2.00	10.15	Horizontal	-27.97	-25.00	2.97	180
3	7779.0	-81.95	2.50	11.35	Horizontal	-73.10	-25.00	48.10	0
4	10372.0	-54.28	4.20	12.05	Horizontal	-46.43	-25.00	21.43	135
5	12965.0	-54.52	5.20	14.85	Horizontal	-44.87	-25.00	19.87	45
6	15558.0	-54.85	5.50	13.23	Horizontal	-47.12	-25.00	22.12	0
7	18151.0	--	--	--	--	--	--	--	--
8	20744.0	--	--	--	--	--	--	--	--
9	23337.0	--	--	--	--	--	--	--	--
10	25930.0	--	--	--	--	--	--	--	--

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 66 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3510	-47.50	2.6	10.75	Horizontal	-39.35	-13.00	26.35	270
3	5265	-61.17	2.4	11.05	Horizontal	-52.52	-13.00	39.52	225
4	7020	-67.02	4.5	11.15	Horizontal	-60.37	-13.00	47.37	45
5	8775	-64.45	5.1	11.35	Horizontal	-58.20	-13.00	45.20	90
6	10530	-62.32	5.3	11.95	Horizontal	-55.67	-13.00	42.67	180
7	12285	-62.16	5.5	13.55	Horizontal	-54.11	-13.00	41.11	0
8	14040	-61.00	6.3	13.75	Horizontal	-53.55	-13.00	40.55	45
9	15795	-59.37	6.7	13.85	Horizontal	-52.22	-13.00	39.22	225
10	17550	-58.43	6.8	14.25	Horizontal	-50.98	-13.00	37.98	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 66 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3510	-47.62	2.6	10.75	Horizontal	-39.47	-13.00	26.47	90
3	5265	-59.52	2.4	11.05	Horizontal	-50.87	-13.00	37.87	45
4	7020	-66.44	4.5	11.15	Horizontal	-59.79	-13.00	46.79	225
5	8775	-64.83	5.1	11.35	Horizontal	-58.58	-13.00	45.58	270
6	10530	-62.72	5.3	11.95	Horizontal	-56.07	-13.00	43.07	0
7	12285	-61.90	5.5	13.55	Horizontal	-53.85	-13.00	40.85	180
8	14040	-60.48	6.3	13.75	Horizontal	-53.03	-13.00	40.03	135
9	15795	-60.40	6.7	13.85	Horizontal	-53.25	-13.00	40.25	225
10	17550	-58.22	6.8	14.25	Horizontal	-50.77	-13.00	37.77	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 66 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3510	-44.32	2.6	10.75	Horizontal	-36.17	-13.00	23.17	45
3	5265	-55.91	2.4	11.05	Horizontal	-47.26	-13.00	34.26	225
4	7020	-68.34	4.5	11.15	Horizontal	-61.69	-13.00	48.69	90
5	8775	-64.67	5.1	11.35	Horizontal	-58.42	-13.00	45.42	0
6	10530	-60.93	5.3	11.95	Horizontal	-54.28	-13.00	41.28	135
7	12285	-60.75	5.5	13.55	Horizontal	-52.70	-13.00	39.70	270
8	14040	-60.57	6.3	13.75	Horizontal	-53.12	-13.00	40.12	180
9	15795	-59.65	6.7	13.85	Horizontal	-52.50	-13.00	39.50	90
10	17550	-59.09	6.8	14.25	Horizontal	-51.64	-13.00	38.64	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2019-12-16	2020-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	01111	2019-09-12	2021-09-11
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2017-07-20	2020-07-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-19	2020-05-18
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-03-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****