



# RF TEST REPORT

**Applicant** Shanghai Smawave Technology Co. ,Ltd

**FCC ID** 2AU8HSRP410-A

**Product** LTE CPE

**Brand** Smawave

**Model** SRP410-a

**Report No.** R2001A0014-R8V1

**Issue Date** May 7, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards .....	6
4. Test Configuration .....	7
5. Test Case Results .....	9
5.1. Maximum output power.....	9
5.2. 99% Bandwidth and 6dB Bandwidth .....	13
5.3. Band Edge .....	19
5.4. Power Spectral Density .....	22
5.5. Spurious RF Conducted Emissions.....	34
5.6. Unwanted Emission .....	38
5.7. Conducted Emission .....	70
6. Main Test Instruments.....	73



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: April 11, 2020~ April 26, 2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

**Note: This revised report (Report No.: R2001A0014-R8V1) supersedes and replaces the previously issued report (Report No.: R2001A0014-R8). Please discard or destroy the previously issued report and dispose of it accordingly.**



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)



## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Shanghai Smawave Technology Co. ,Ltd
Applicant address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China
Manufacturer	Shanghai Smawave Technology Co. ,Ltd
Manufacturer address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

### 2.2. General information

EUT Description	
Model	SRP410-a
SN	6201A20010300144
Hardware Version	SGL6010_V1.2
Software Version	SG626_V1.0
Power Supply	DC Power
Antenna Type	External Antenna
Antenna Connector	SMA Female F
Antenna Gain	Antenna 1: 5dBi Antenna 2: 5dBi
additional beamforming gain	NA
Test Mode	802.11b 802.11g, 802.11n(HT20/HT40);
Modulation Type	802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G :18.25dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2019) Radio Frequency Devices**

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**



## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11b	11	11	11
802.11g	54	54	54
802.11n HT20	MCS7	MCS7	MCS7
802.11n HT40	MCS7	MCS7	MCS7



The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Maximum conducted output power	O	O	O
6dB Bandwidth	--	O	--
Band Edge	--	O	--
Power Spectral Density	O	O	O
Spurious RF Conducted Emissions	--	O	--
Unwanted Emissions	--	802.11b	802.11g 802.11n-HT20/40
Conducted Emission	--	O	--
Note: "O": test all bands			

## 5. Test Case Results

### 5.1. Maximum output power

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test Setup

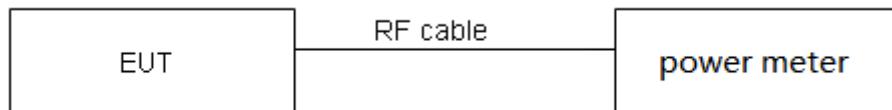

#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**

Single Antenna Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11b	41	41	41	43	43	43
802.11g	42	42	42	44	44	44
802.11n HT20	42	42	42	44	44	44
Packet Type	CH3	CH6	CH9	CH3	CH6	CH9
802.11n HT40	44	44	44	46	46	46

MIMO Antenna Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11b	36	36	36	37	37	37
802.11g	37	37	37	38	38	38
802.11n HT20	37	37	37	38	38	38
Packet Type	CH3	CH6	CH9	CH3	CH6	CH9
802.11n HT40	39	39	39	40	40	40

Band	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	1.30	1.44	0.90	0.44
802.11g	0.25	0.43	0.58	2.35
802.11n HT20	0.23	0.32	0.72	1.42
802.11n HT40	0.13	0.21	0.62	2.09

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.

**SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	17.43	17.87	30	PASS
	2437	17.51	17.95	30	PASS
	2462	17.32	17.76	30	PASS
802.11g	2412	12.55	14.90	30	PASS
	2437	12.35	14.70	30	PASS
	2462	12.38	14.73	30	PASS
802.11n HT20	2412	12.39	13.81	30	PASS
	2437	12.17	13.59	30	PASS
	2462	12.25	13.67	30	PASS
802.11n HT40	2422	11.84	13.93	30	PASS
	2437	11.79	13.88	30	PASS
	2452	11.66	13.75	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**SISO Antenna 2**

Network Standards	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	17.34	17.78	30	PASS
	2437	17.54	17.98	30	PASS
	2462	17.81	18.25	30	PASS
802.11g	2412	12.19	14.54	30	PASS
	2437	12.31	14.66	30	PASS
	2462	12.44	14.79	30	PASS
802.11n HT20	2412	12.57	13.99	30	PASS
	2437	12.22	13.64	30	PASS
	2462	12.45	13.87	30	PASS
802.11n HT40	2422	11.32	13.41	30	PASS
	2437	11.45	13.54	30	PASS
	2452	11.59	13.68	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



## MIMO

Network Standards	Carrier frequency (MHz)	MIMO Antenna 1		MIMO Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Average Power Measured (dBm)	Average Power with duty factor (dBm)	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11b	2412	14.11	14.55	14.29	14.73	17.66	30	PASS
	2437	14.20	14.64	14.38	14.82	17.75	30	PASS
	2462	14.33	14.77	14.24	14.68	17.74	30	PASS
802.11g	2412	9.59	11.94	9.51	11.86	14.91	30	PASS
	2437	9.42	11.77	9.11	11.46	14.63	30	PASS
	2462	9.49	11.84	9.63	11.98	14.92	30	PASS
802.11n HT20	2412	9.56	10.98	9.41	10.83	13.91	30	PASS
	2437	9.34	10.76	9.36	10.78	13.78	30	PASS
	2462	9.39	10.81	9.26	10.68	13.75	30	PASS
802.11n HT40	2422	8.41	10.50	8.57	10.66	13.59	30	PASS
	2437	8.64	10.73	8.77	10.86	13.80	30	PASS
	2452	8.57	10.66	8.68	10.77	13.72	30	PASS

Note: 1. Average Power with duty factor = Average Power Measured + Duty cycle correction factor

2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=2$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ , For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{ss})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 5 < 6$  dB. So the power limit is 30dBm

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup

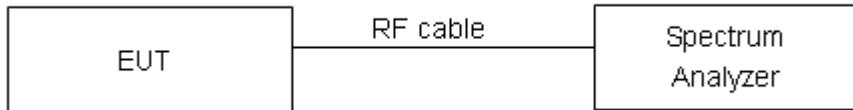

### Limits

Rule Part 15.247 (a) (2) specifies that "Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz."

minimum 6 dB bandwidth	$\geq 500$ kHz
------------------------	----------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**


Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	14.998	9.073	500	PASS
	2437	14.998	9.065	500	PASS
	2462	14.995	9.070	500	PASS
802.11g	2412	16.559	16.48	500	PASS
	2437	16.597	16.48	500	PASS
	2462	16.552	16.48	500	PASS
802.11n HT20	2412	17.780	17.74	500	PASS
	2437	17.795	17.72	500	PASS
	2462	17.791	17.74	500	PASS
802.11n HT40	2422	36.336	36.10	500	PASS
	2437	36.256	35.47	500	PASS
	2452	36.168	36.01	500	PASS

## 99%bandwidth

802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412

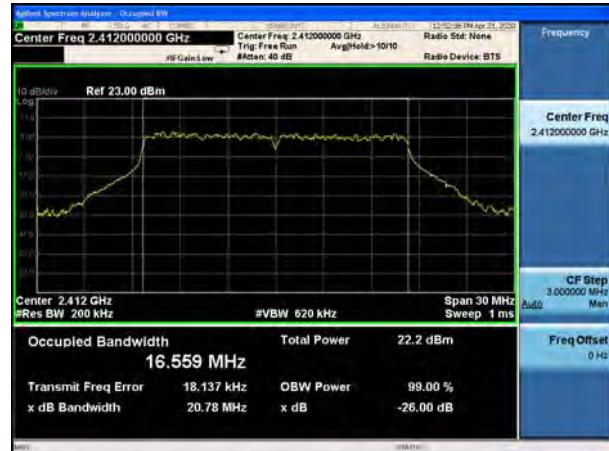

802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437

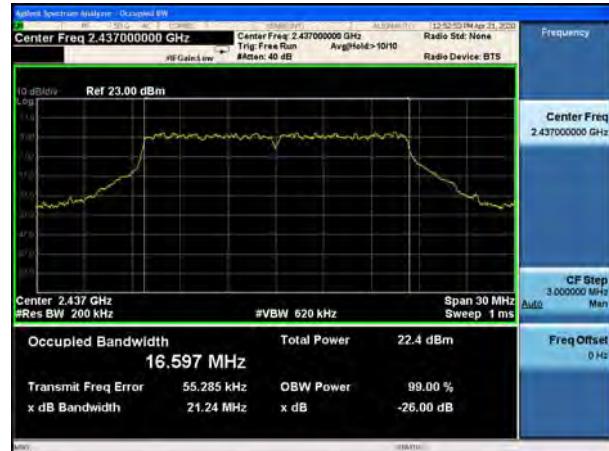


802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462




## 802.11n(HT20), Carrier frequency (MHz): 2412

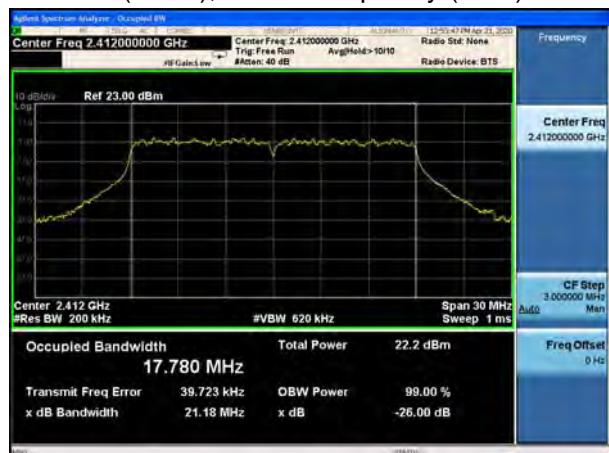


## 802.11n(HT40), Carrier frequency (MHz): 2422

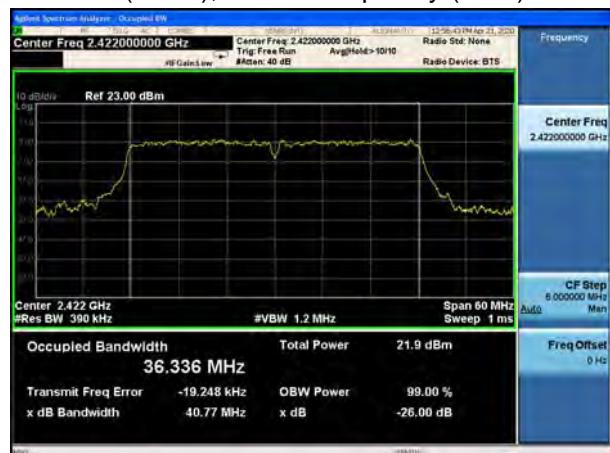


## 802.11n(HT20), Carrier frequency (MHz): 2437

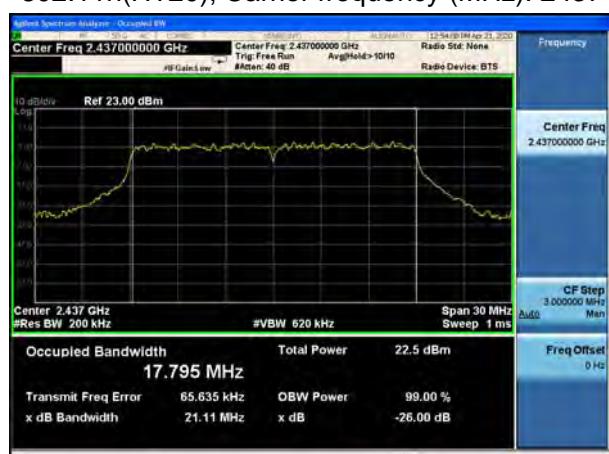


## 802.11n(HT40), Carrier frequency (MHz): 2437

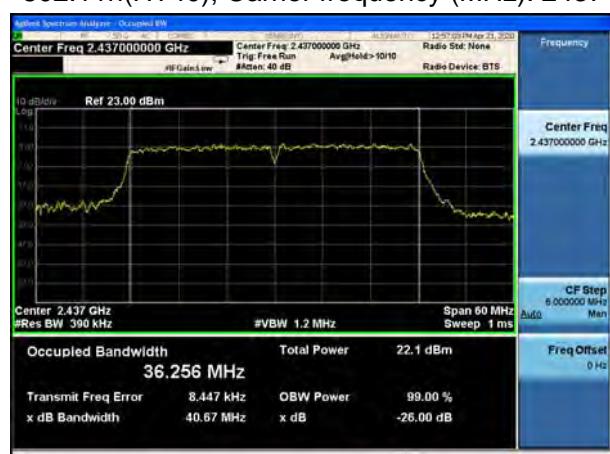

## 802.11n(HT20), Carrier frequency (MHz): 2462

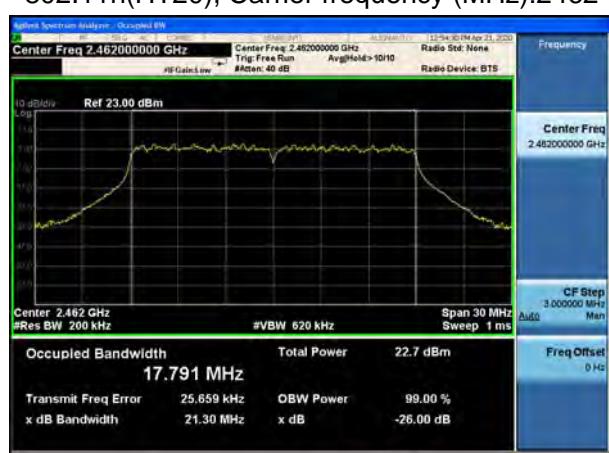

## 802.11n(HT40), Carrier frequency (MHz): 2452

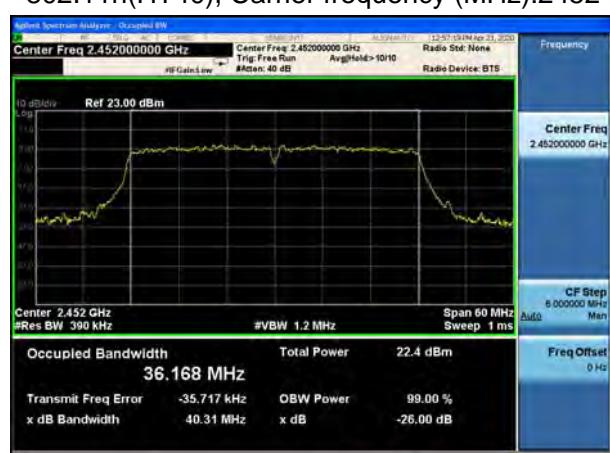


**6 dB bandwidth**

802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412

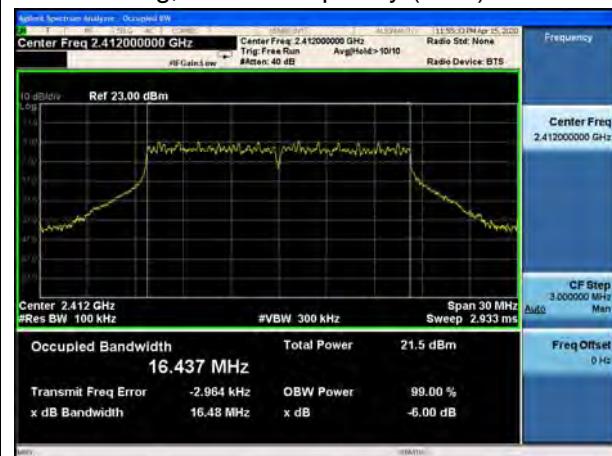

802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437

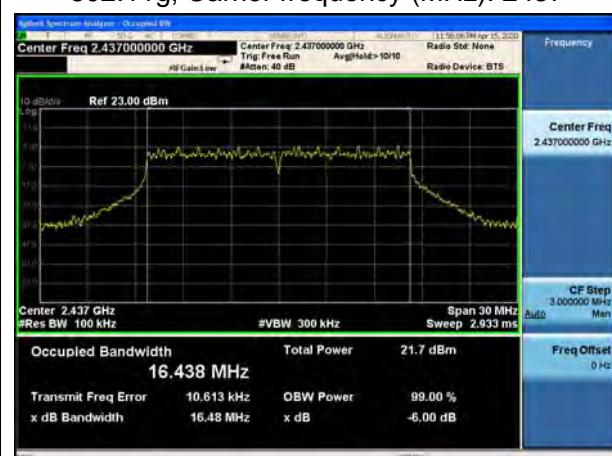

802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462

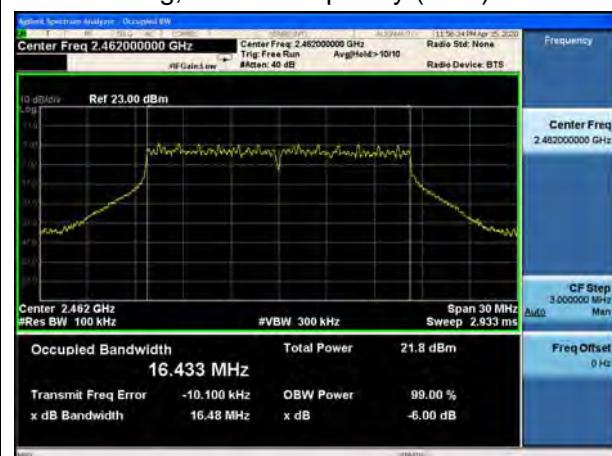


## 802.11n(HT20), Carrier frequency (MHz): 2412




## 802.11n(HT40), Carrier frequency (MHz): 2422

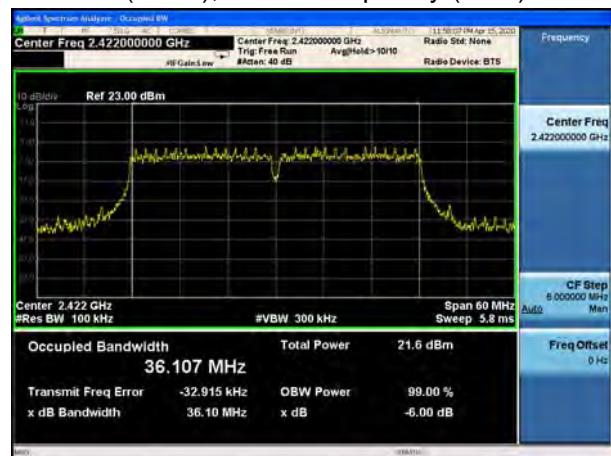


## 802.11n(HT20), Carrier frequency (MHz): 2437

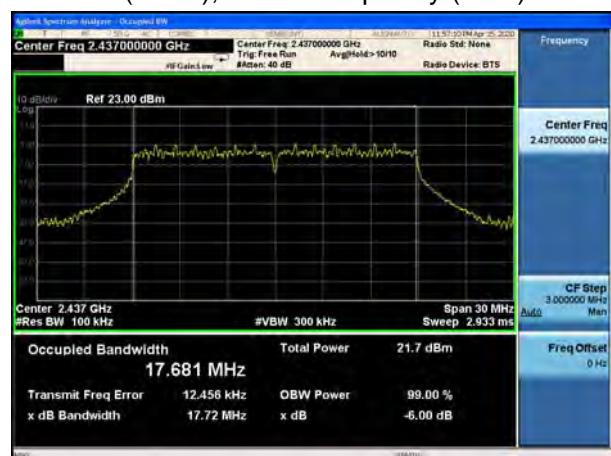


## 802.11n(HT40), Carrier frequency (MHz): 2437

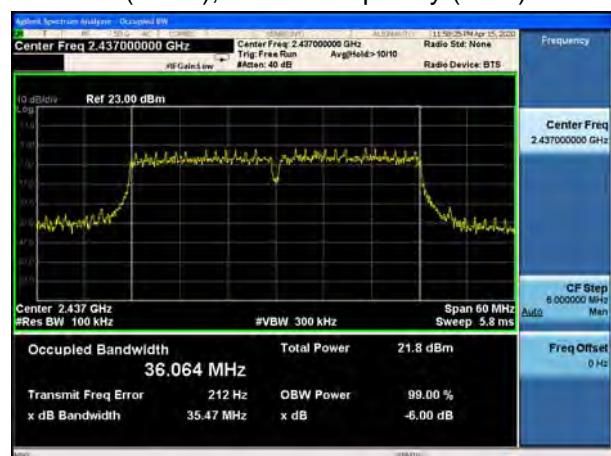

## 802.11n(HT20), Carrier frequency (MHz): 2462

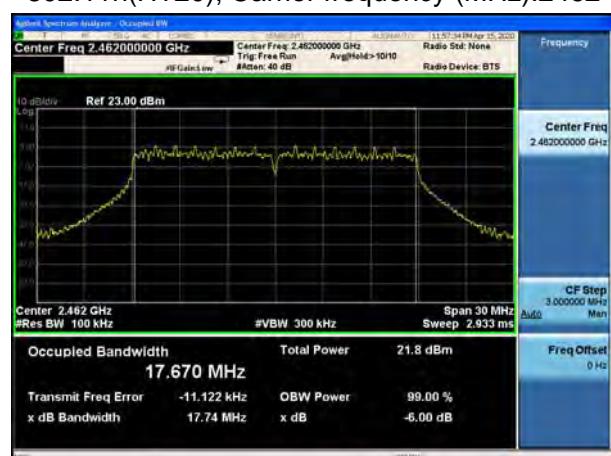

## 802.11n(HT40), Carrier frequency (MHz): 2452

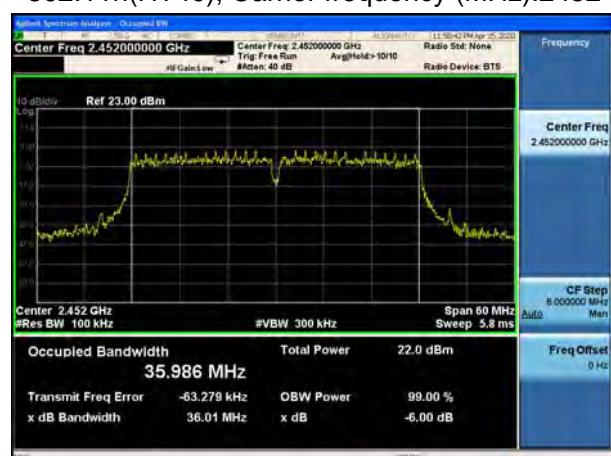

### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup

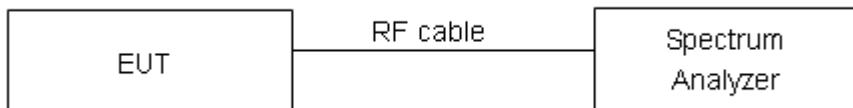

#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
2GHz-3GHz	1.407 dB




## Test Results: PASS

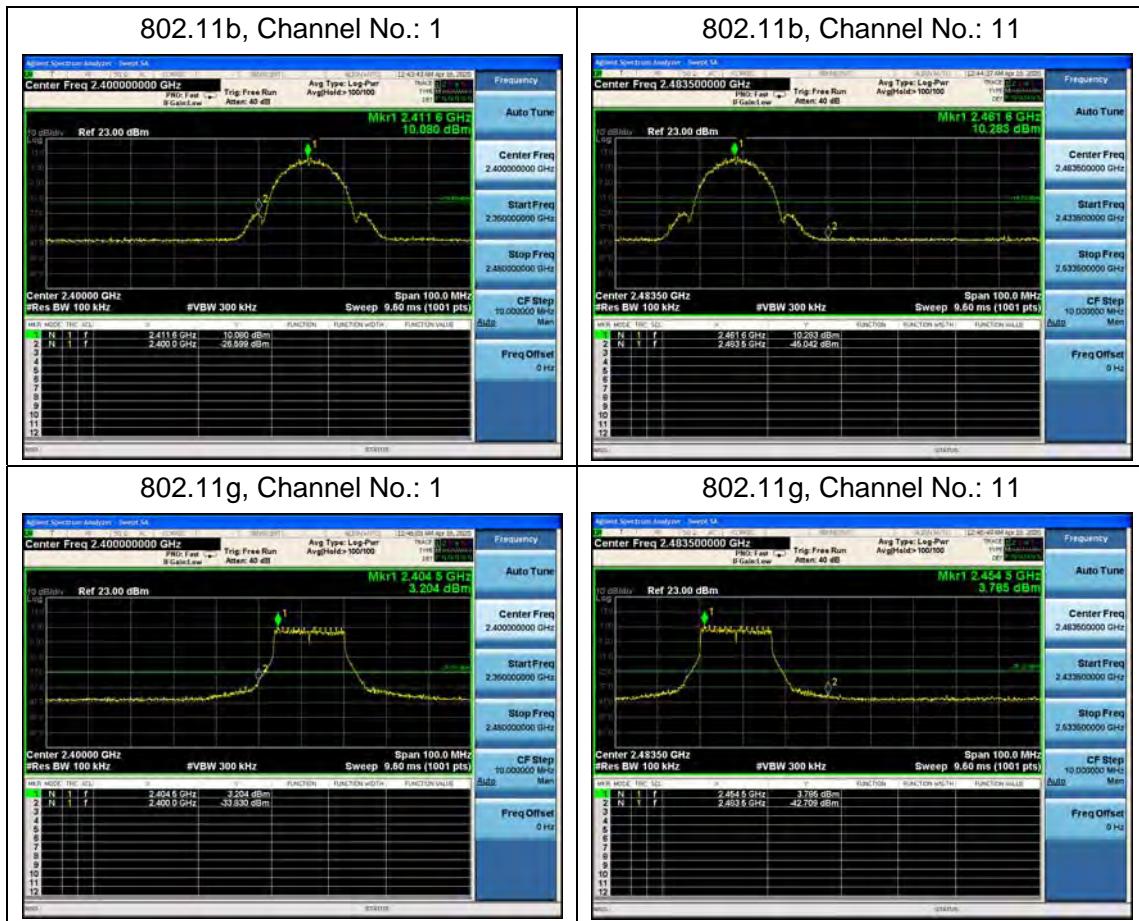

802.11n(HT20), Channel No.: 1

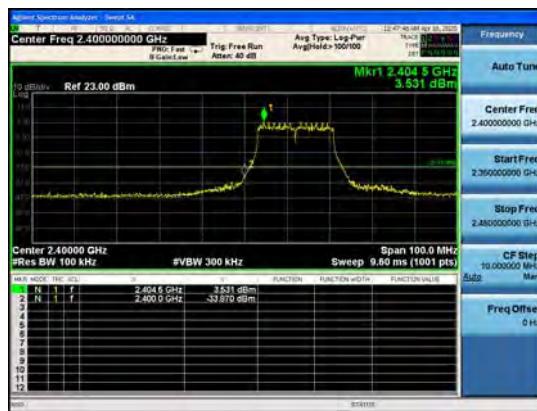

802.11n(HT20), Channel No.: 11

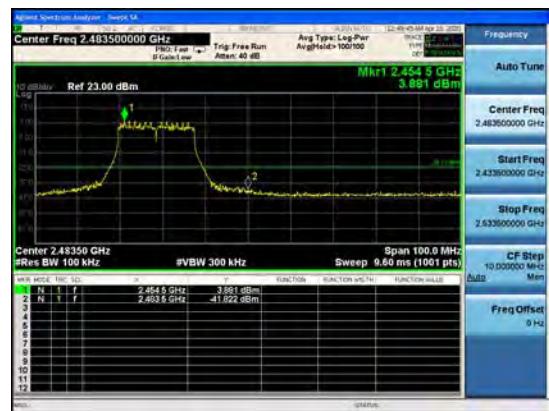

802.11n(HT40), Channel No.: 3



802.11n(HT40), Channel No.: 9



## 5.4. Power Spectral Density

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. Method AVGPSD-2 in KDB558074 D01 was used for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test setup

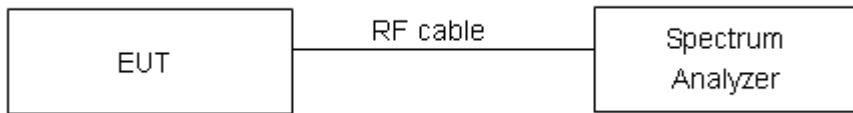

### Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission."

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:****SISO Antenna 1**

Network Standards	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-14.16	-13.72	8	PASS
	6	-14.52	-14.08	8	PASS
	11	-14.15	-13.71	8	PASS
802.11g	1	-20.43	-18.08	8	PASS
	6	-20.61	-18.26	8	PASS
	11	-19.97	-17.62	8	PASS
802.11n HT20	1	-20.75	-19.33	8	PASS
	6	-20.18	-18.76	8	PASS
	11	-20.67	-19.25	8	PASS
802.11n HT40	3	-23.46	-21.37	8	PASS
	6	-23.24	-21.15	8	PASS
	9	-23.64	-21.55	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor



## SISO Antenna 2

Network Standards	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-14.24	-13.79	8	PASS
	6	-14.69	-14.24	8	PASS
	11	-13.60	-13.16	8	PASS
802.11g	1	-20.28	-17.93	8	PASS
	6	-20.47	-18.12	8	PASS
	11	-19.43	-17.08	8	PASS
802.11n HT20	1	-19.93	-18.52	8	PASS
	6	-19.76	-18.34	8	PASS
	11	-19.88	-18.46	8	PASS
802.11n HT40	3	-23.62	-21.53	8	PASS
	6	-22.82	-20.74	8	PASS
	9	-23.50	-21.42	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor



## MIMO

Network Standards	Channel Number	Power Spectral Density				Total PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion			
		Antenna 1		Antenna 2							
		Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)						
802.11b	1	-15.88	-15.43	-16.84	-16.39	-12.87	8.00	PASS			
	6	-15.10	-14.65	-17.94	-17.49	-12.84	8.00	PASS			
	11	-14.66	-14.21	-16.05	-15.61	-11.84	8.00	PASS			
802.11g	1	-22.77	-20.42	-22.94	-20.59	-17.49	8.00	PASS			
	6	-21.99	-19.64	-22.93	-20.58	-17.08	8.00	PASS			
	11	-22.29	-19.94	-22.34	-19.99	-16.96	8.00	PASS			
802.11n HT20	1	-22.29	-20.87	-22.17	-20.75	-17.80	8.00	PASS			
	6	-21.37	-19.95	-22.25	-20.83	-17.36	8.00	PASS			
	11	-22.17	-20.75	-21.56	-20.14	-17.43	8.00	PASS			
802.11n HT40	3	-25.97	-23.88	-26.36	-24.27	-21.06	8.00	PASS			
	6	-25.68	-23.59	-26.11	-24.03	-20.79	8.00	PASS			
	9	-25.95	-23.86	-25.69	-23.60	-20.72	8.00	PASS			

Note: 1. Power Spectral Density = Read Value + Duty cycle correction factor


2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density =  $10\log(10^{(PSD_{antenna1\ in\ dBm/10})} + 10^{(PSD_{antenna2\ in\ dBm/10})})$

3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=2$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ , For PSD measurements on all devices, Array Gain =  $10\log(N_{ant}/N_{ss})$  dB, so directional gain =  $G_{ANT} + \text{Array Gain} < 6\text{dBi}$ . So the power limit is 8dBm




## SISO Antenna 1

802.11b, Channel No.: 1

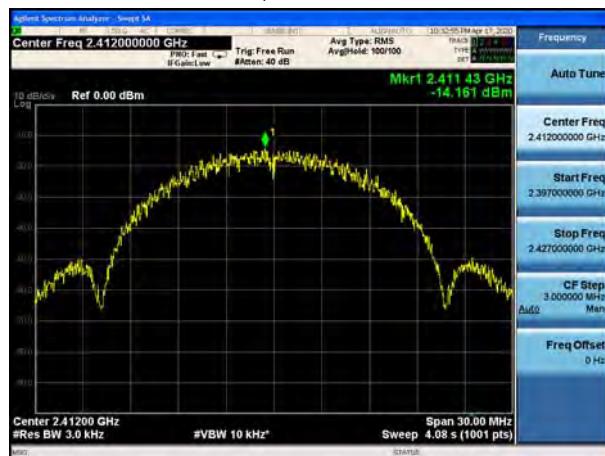


802.11g, Channel No.: 1

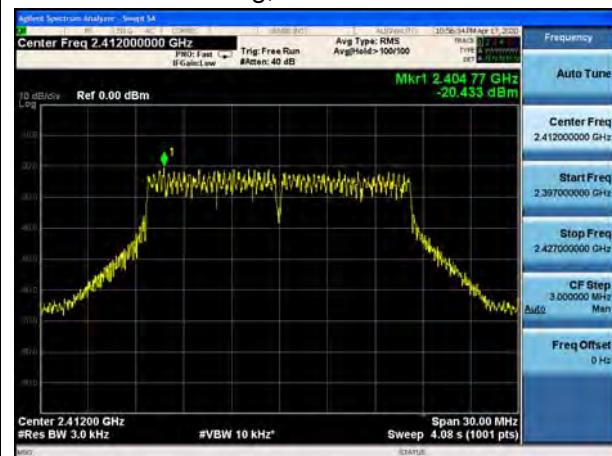


802.11b, Channel No.: 6




802.11g, Channel No.: 6

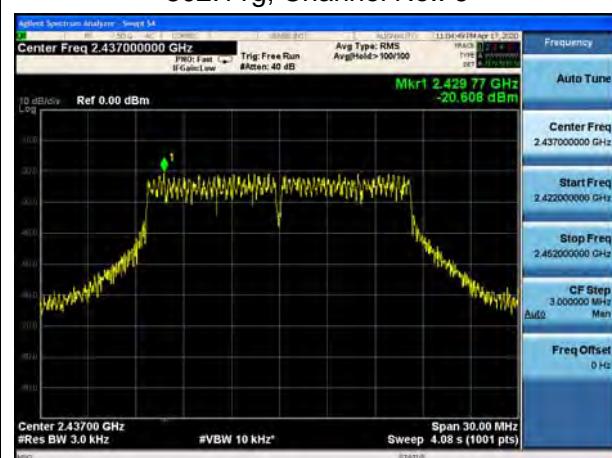


802.11b, Channel No.: 11

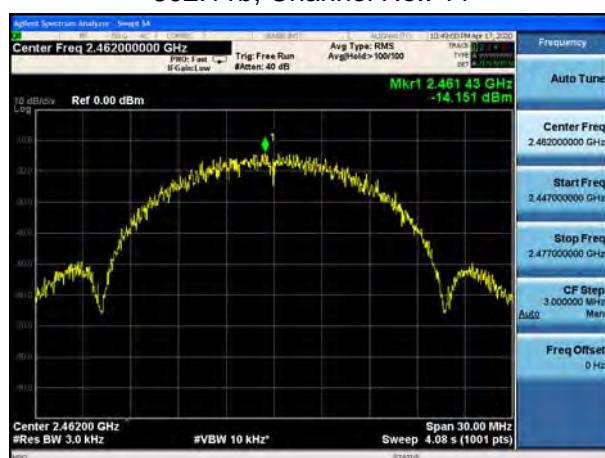


802.11g, Channel No.: 11

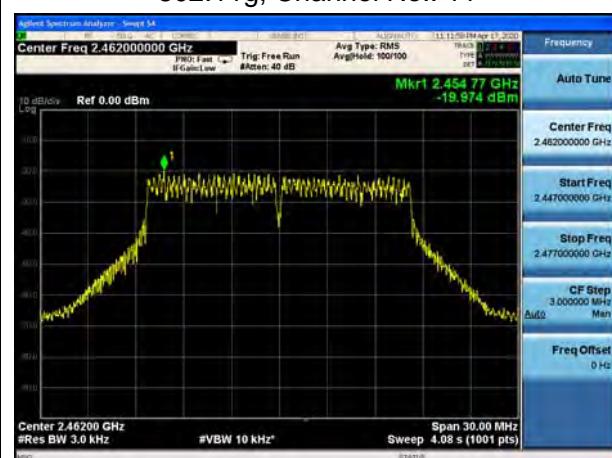


802.11n(HT20), Channel No. 1

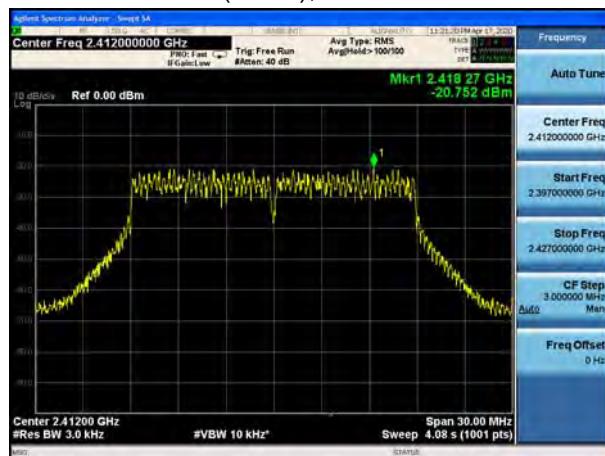


802.11n(HT40), Channel No. 3

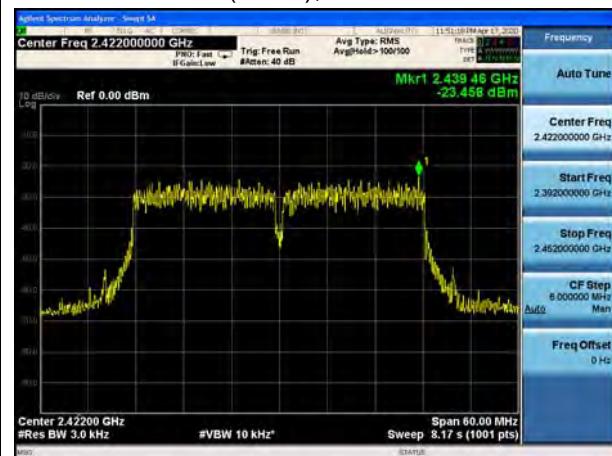


802.11n(HT20), Channel No. 6

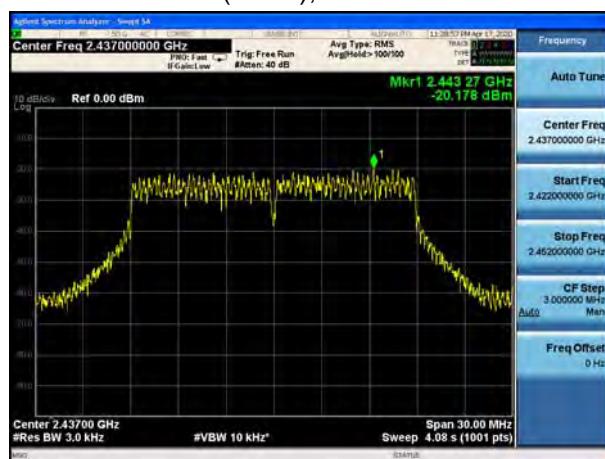


802.11n(HT40), Channel No. 6

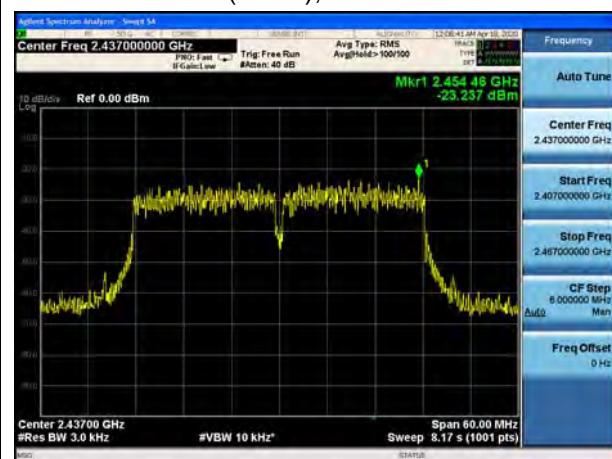

802.11n(HT20), Channel No. 11

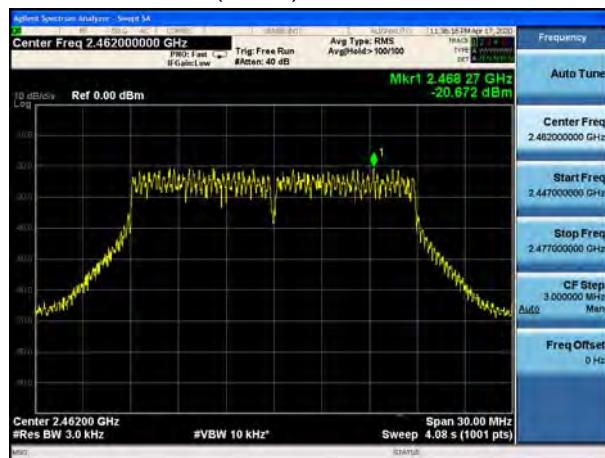

802.11n(HT40), Channel No. 9

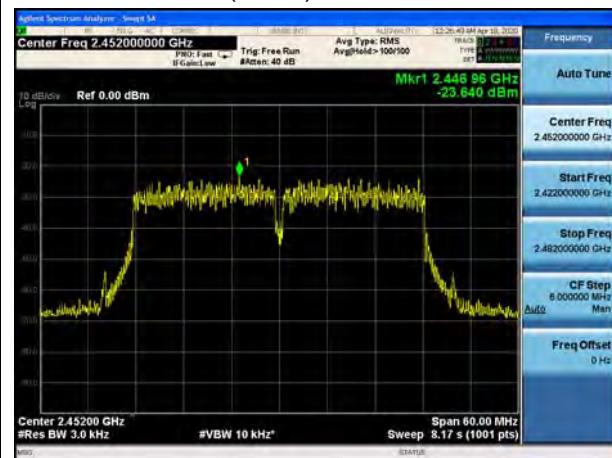




## SISO Antenna 2

802.11b, Channel No.: 1




802.11g, Channel No.: 1

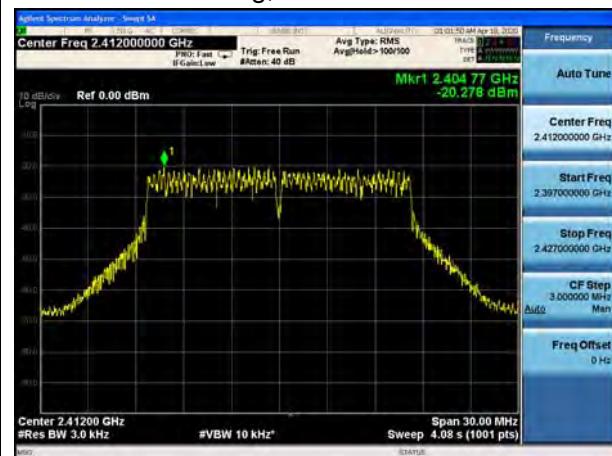

802.11b, Channel No.: 6




802.11g, Channel No.: 6






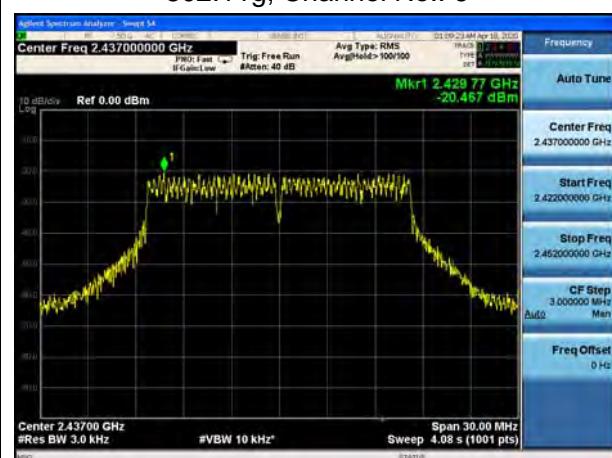


802.11b, Channel No.: 11



802.11g, Channel No.: 11

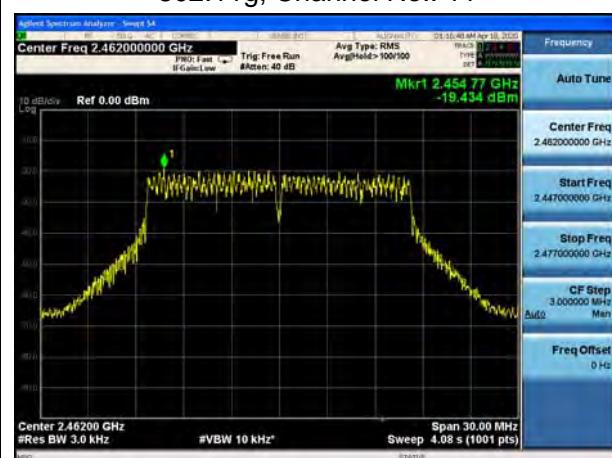


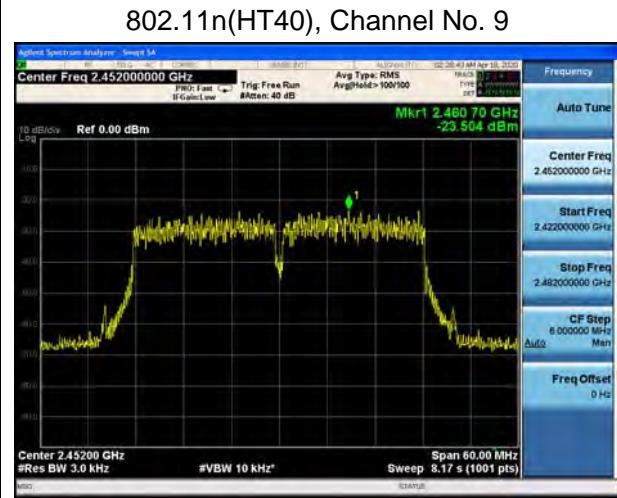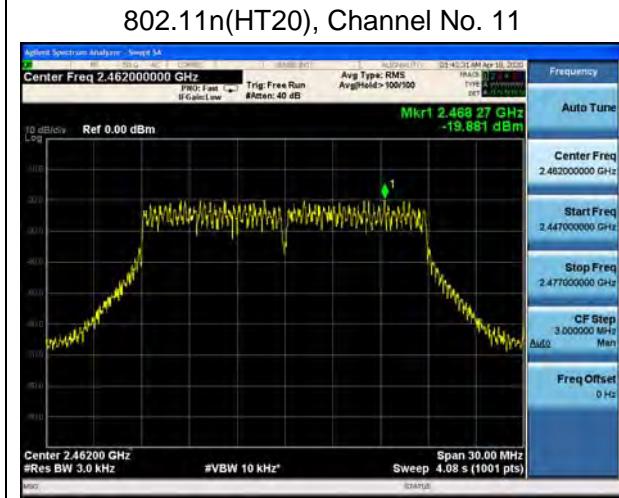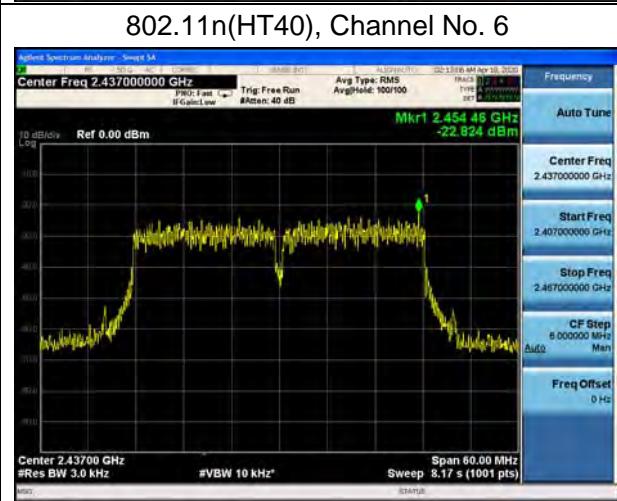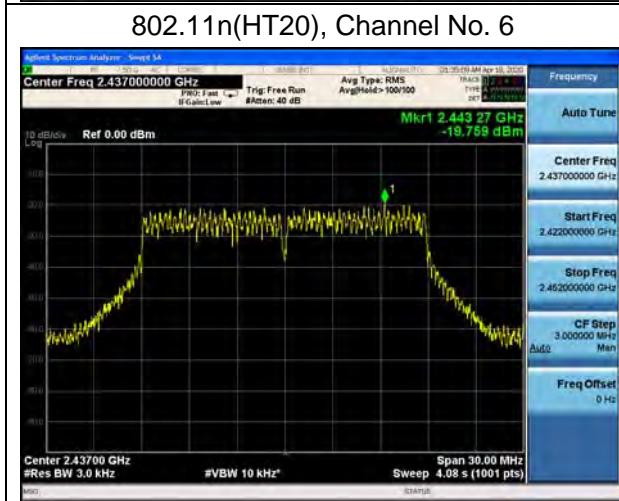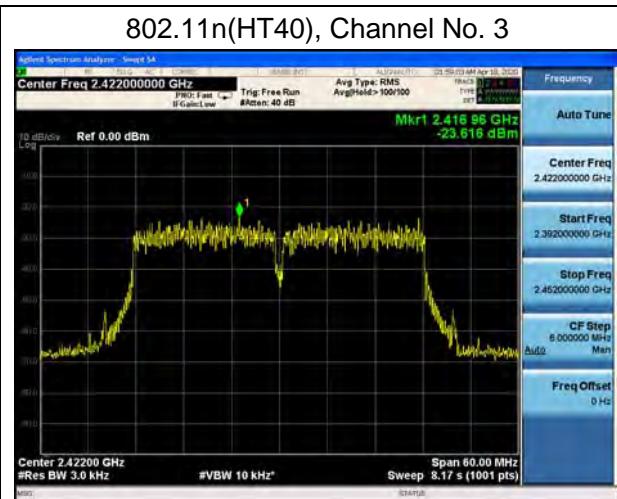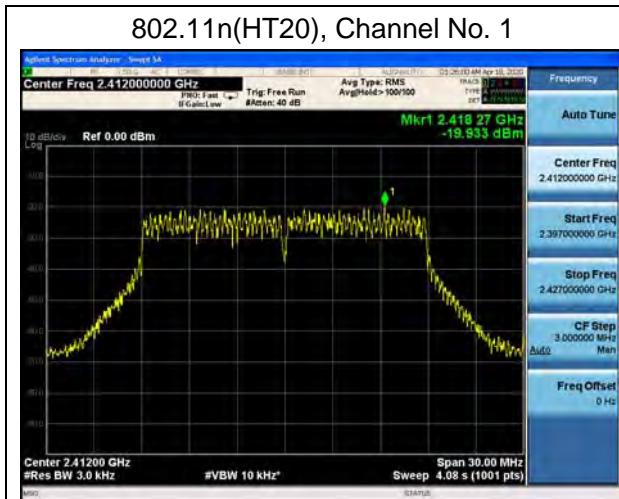




## MIMO Antenna 1


802.11b, Channel No.: 1

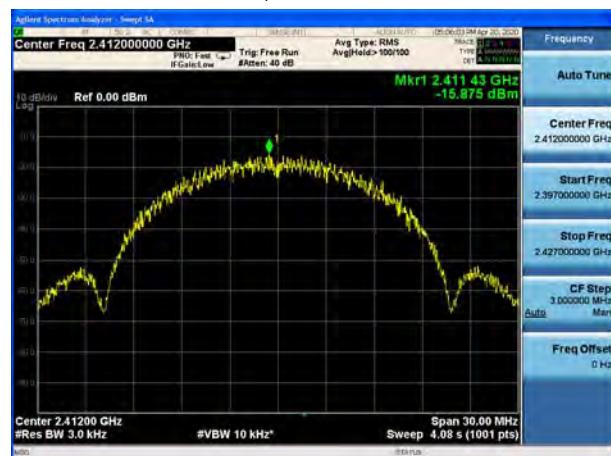


802.11g, Channel No.: 1

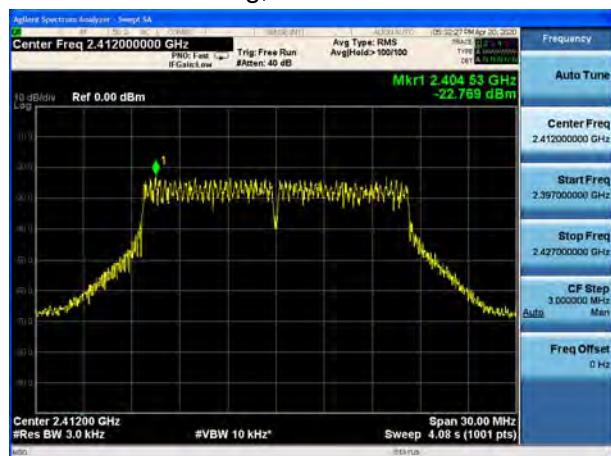


802.11b, Channel No.: 6

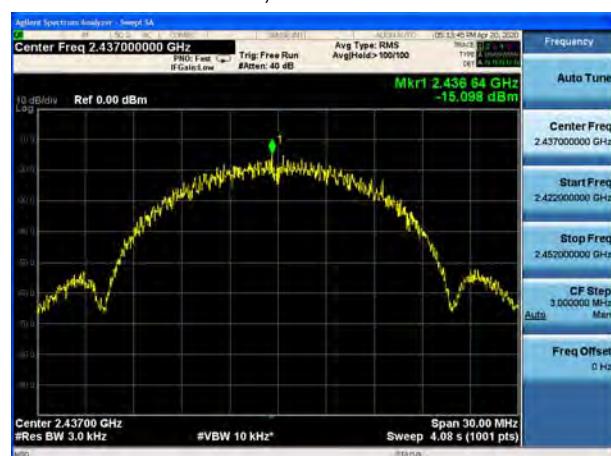


802.11g, Channel No.: 6

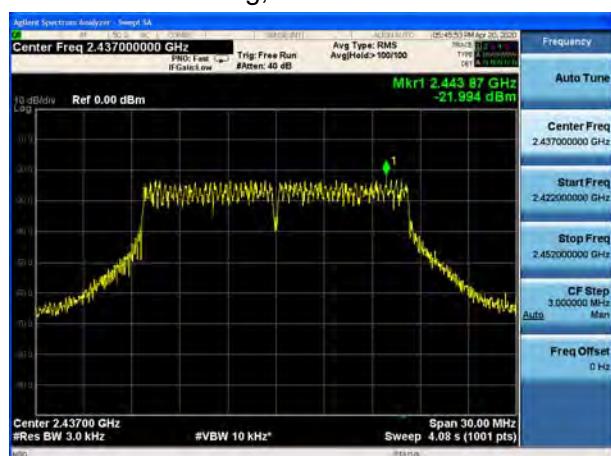

802.11b, Channel No.: 11

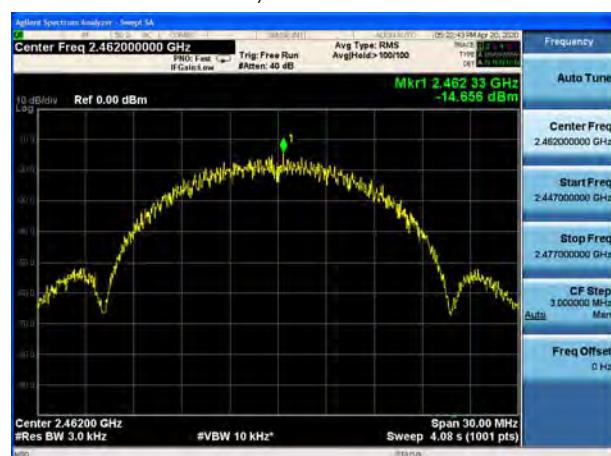


802.11g, Channel No.: 11

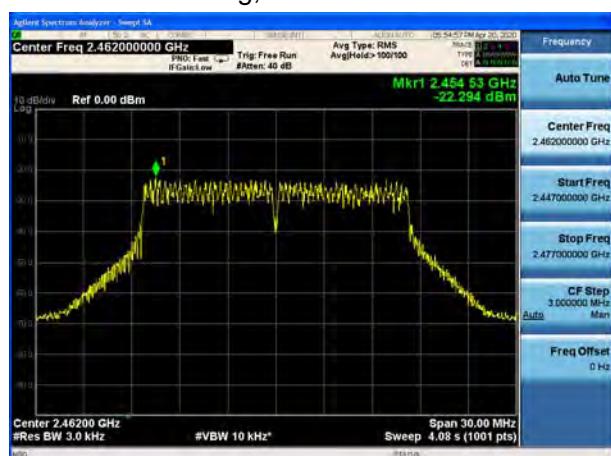





## 802.11n(HT20), Channel No. 1

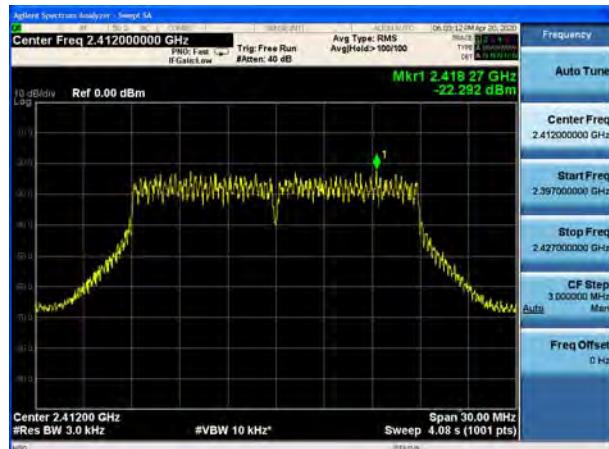


## 802.11n(HT40), Channel No. 3

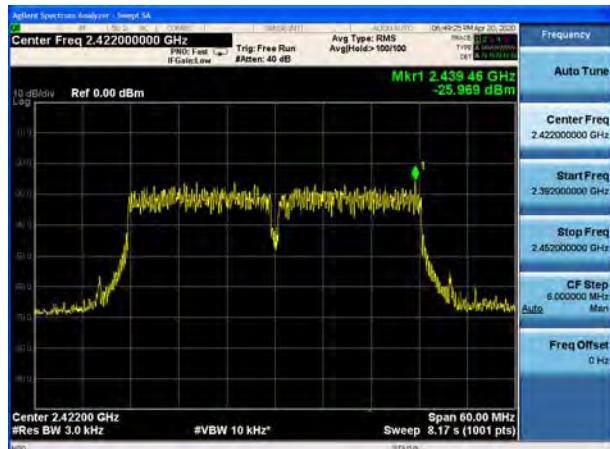


## 802.11n(HT20), Channel No. 6

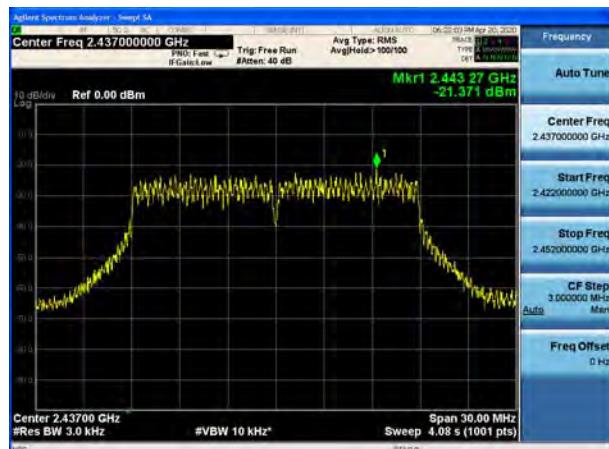


## 802.11n(HT40), Channel No. 6

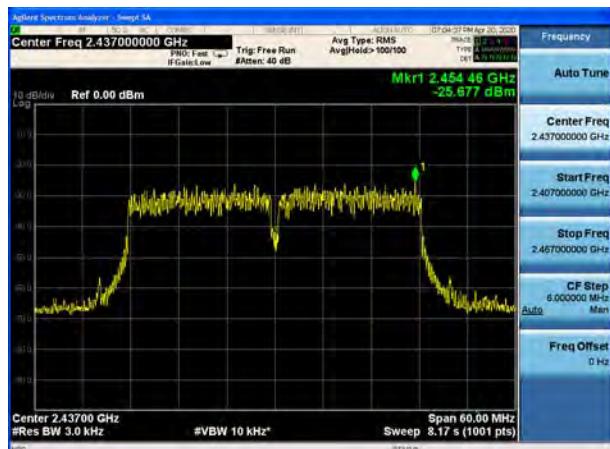

## 802.11n(HT20), Channel No. 11

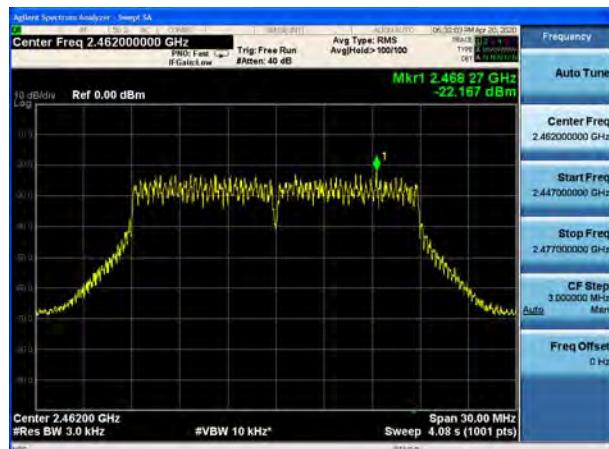


## 802.11n(HT40), Channel No. 9

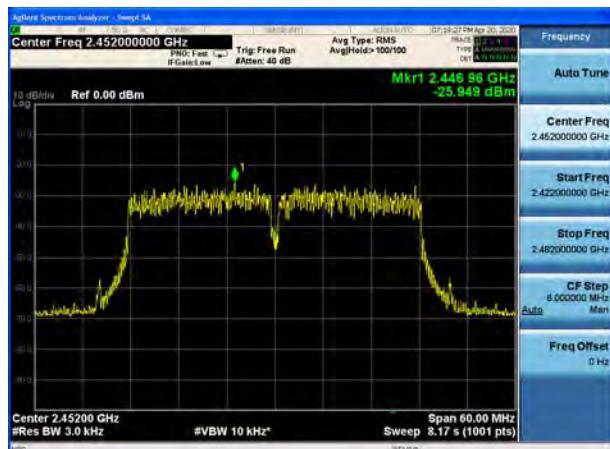




## MIMO Antenna 2

802.11b, Channel No.: 1

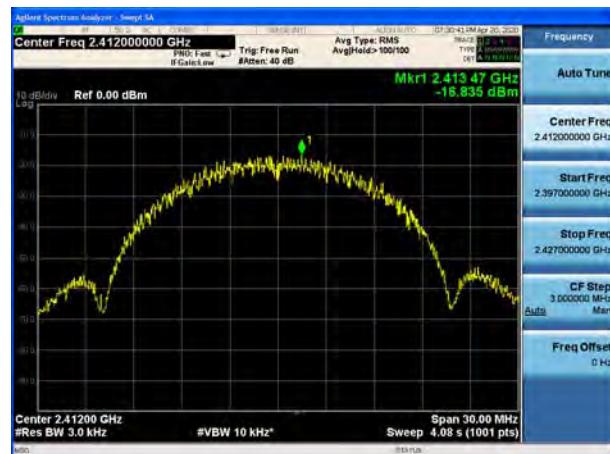


802.11g, Channel No.: 1

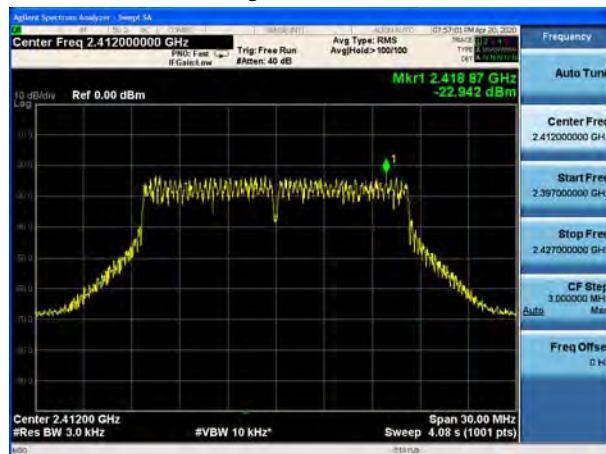


802.11b, Channel No.: 6




802.11g, Channel No.: 6

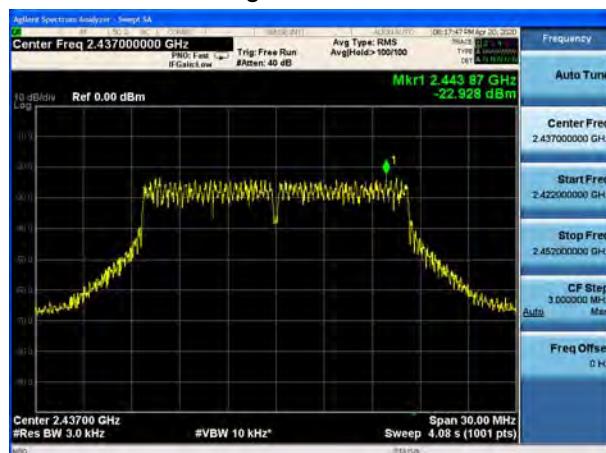

802.11b, Channel No.: 11

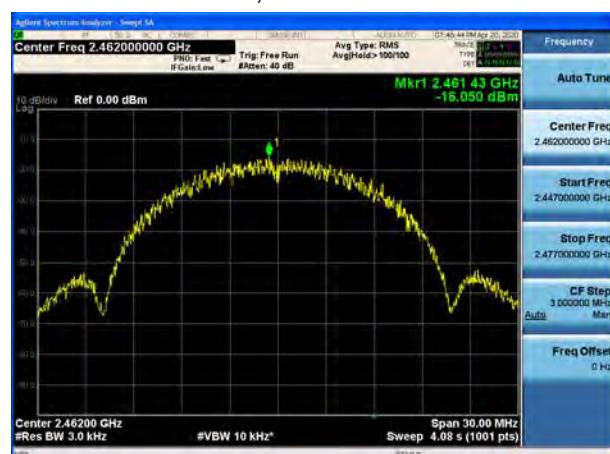


802.11g, Channel No.: 11

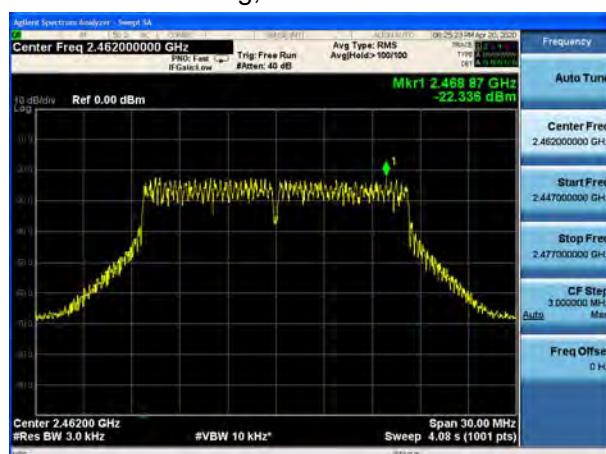





## 802.11n(HT20), Channel No. 1

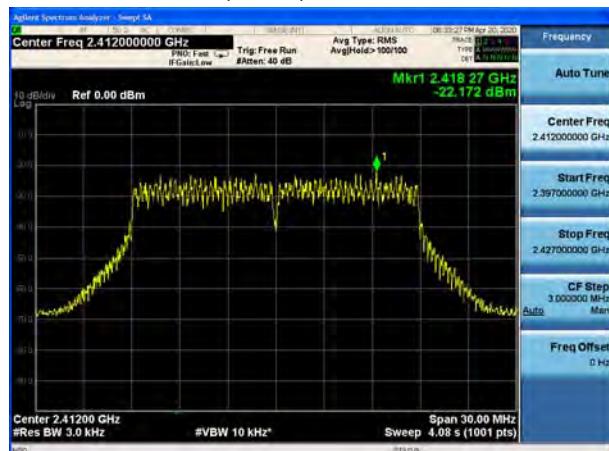


## 802.11n(HT40), Channel No. 3

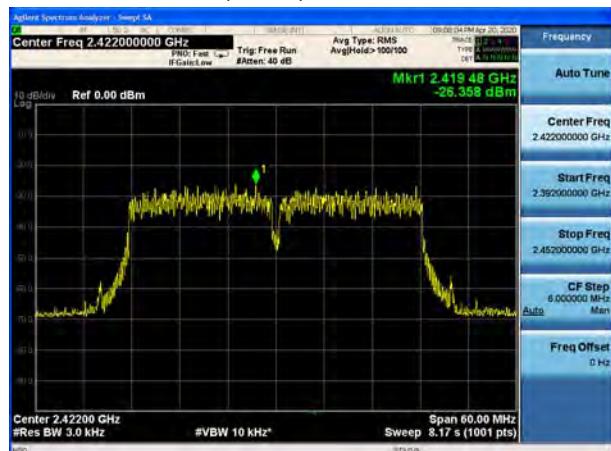


## 802.11n(HT20), Channel No. 6

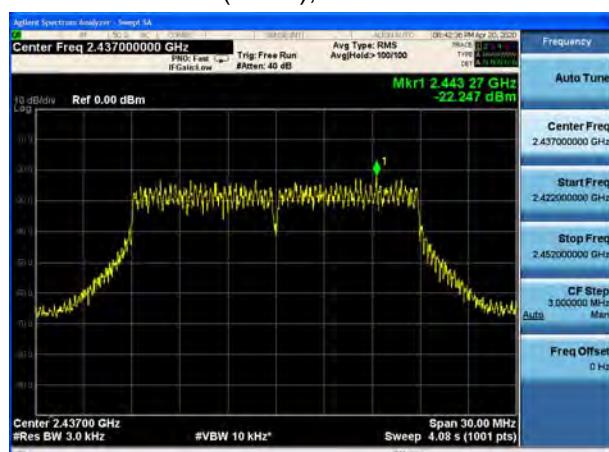


## 802.11n(HT40), Channel No. 6

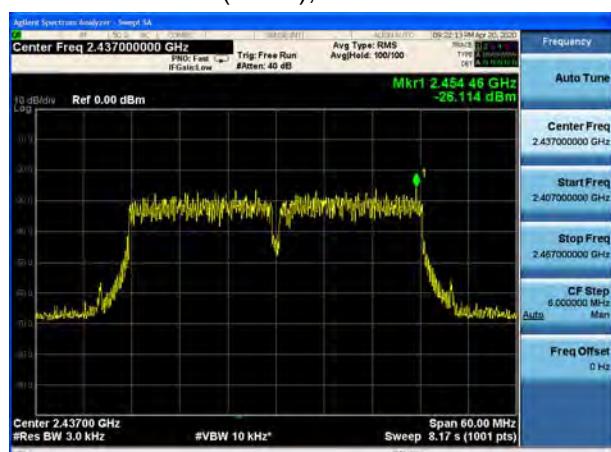

## 802.11n(HT20), Channel No. 11

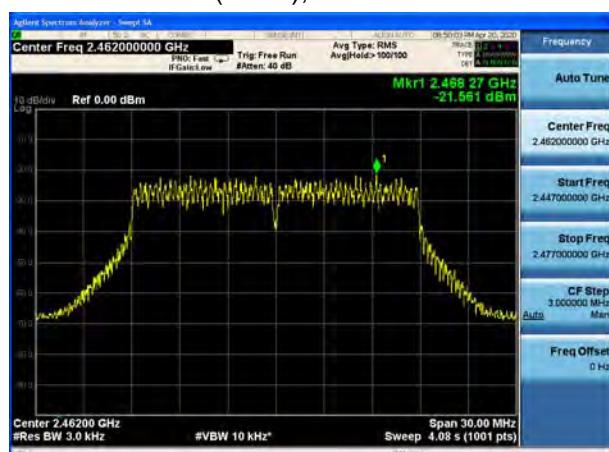

## 802.11n(HT40), Channel No. 9

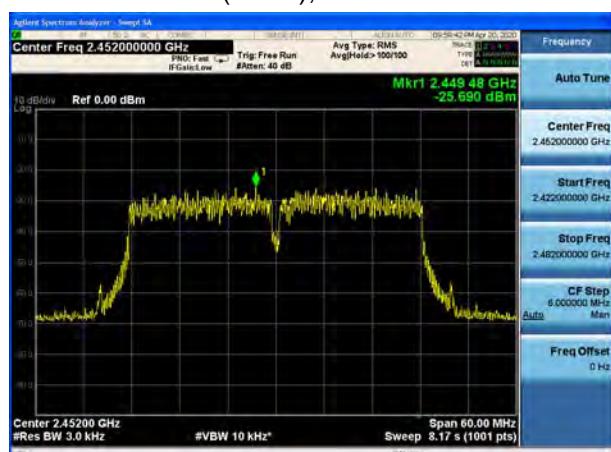



## 5.5. Spurious RF Conducted Emissions

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. "

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	10.54	-19.46
	2437	10.15	-19.85
	2462	10.44	-19.56
802.11g	2412	3.82	-26.18
	2437	3.97	-26.03
	2462	3.66	-26.34
802.11n HT20	2412	3.74	-26.26
	2437	3.54	-26.46
	2462	3.44	-26.56
802.11n HT40	2422	1.08	-28.92
	2437	1.64	-28.36
	2452	1.84	-28.16



## Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB



## Test Results:

802.11b, Channel No.: 1

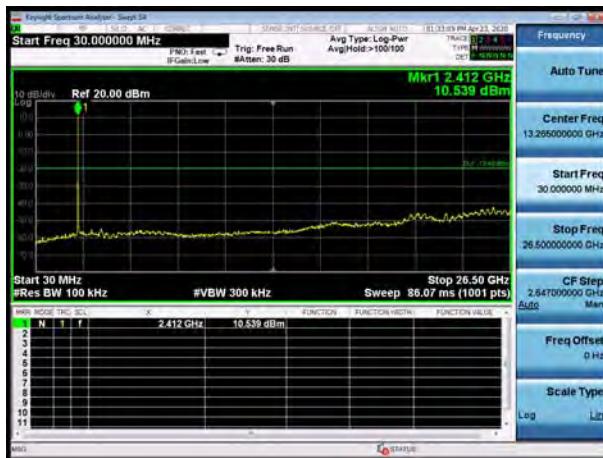

802.11g, Channel No.: 1




802.11b, Channel No.: 6



802.11g, Channel No.: 6



802.11b, Channel No.: 11

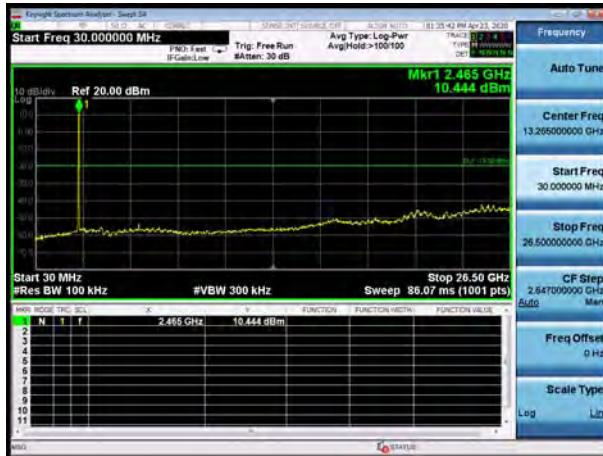

802.11g, Channel No.: 11







802.11n(HT20), Channel No. 1




802.11n(HT40), Channel No. 3

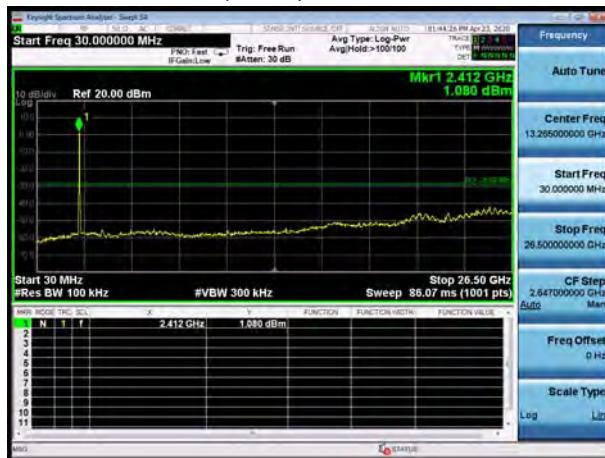


802.11n(HT20), Channel No. 6

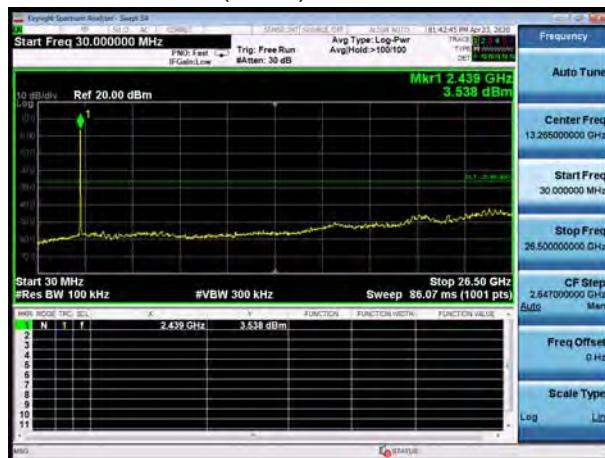


802.11n(HT40), Channel No. 6

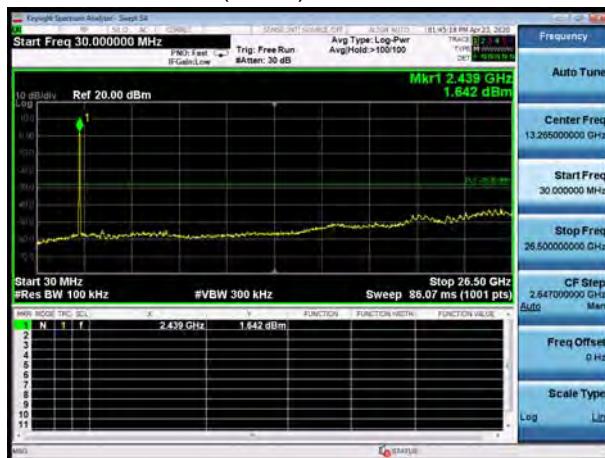

802.11n(HT20), Channel No. 11

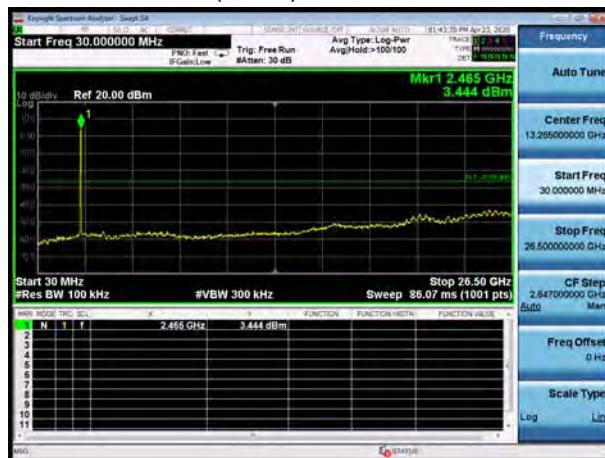

802.11n(HT40), Channel No. 9

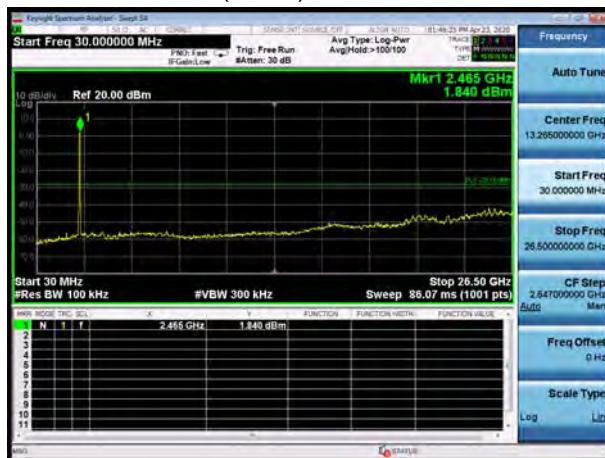



## 5.6. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10-2013.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW  $\geq$  [3  $\times$  RBW]
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.

6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW  $\geq$  [3  $\times$  RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)]  $\leq$  RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)




g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.

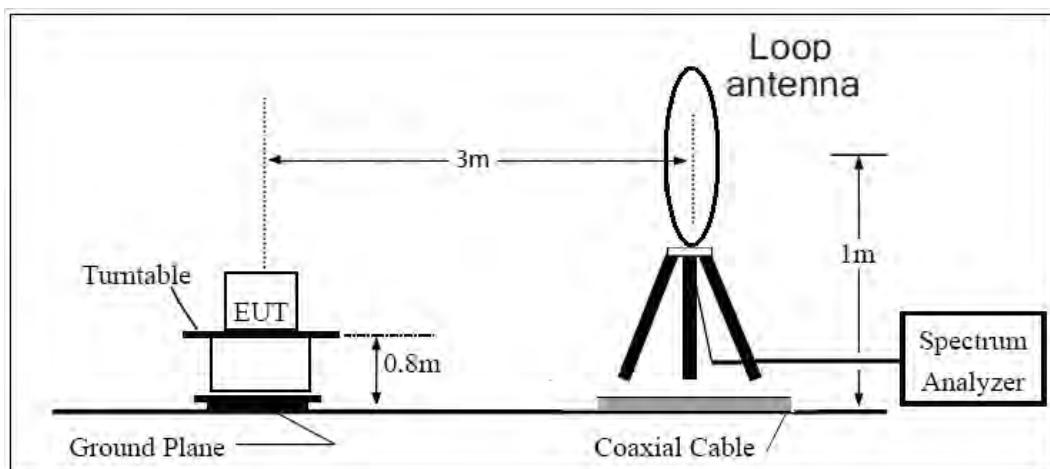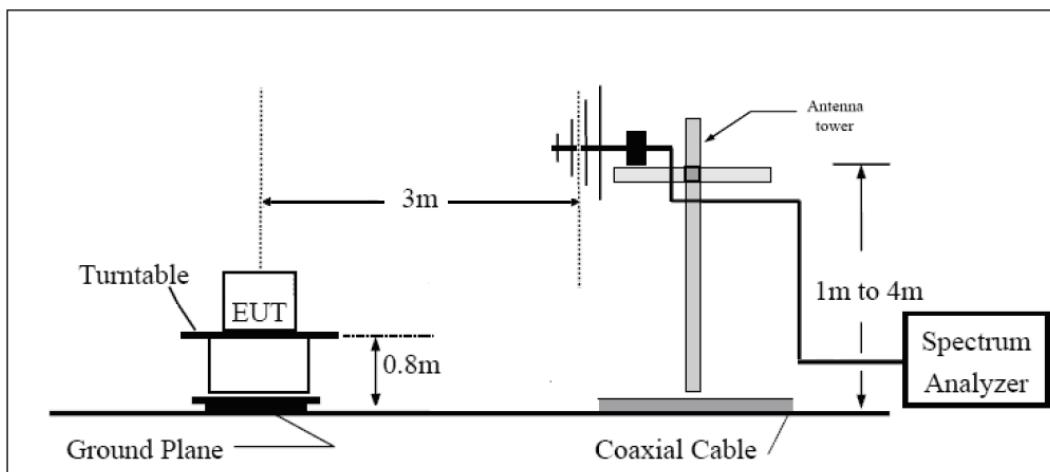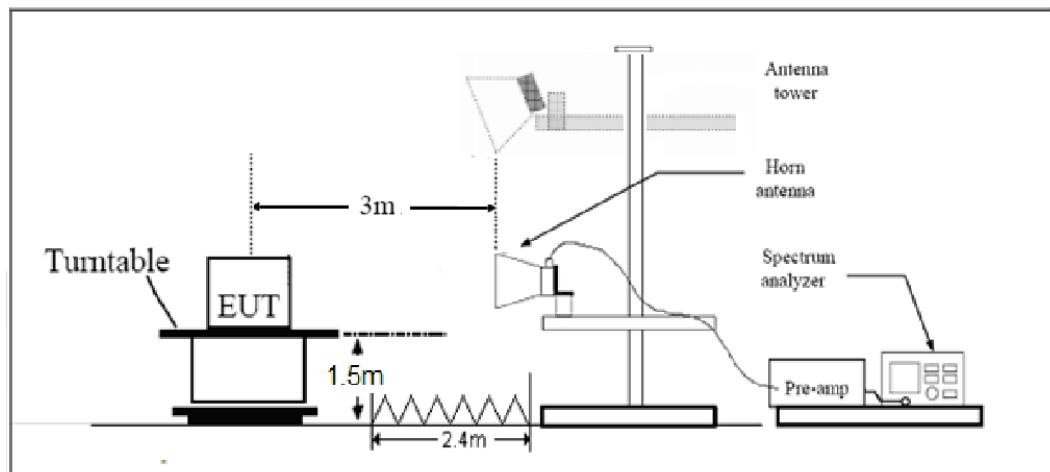**Test setup****9KHz ~ 30MHz****30MHz ~ 1GHz****Above 1GHz**

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			



## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

**Test Results:**

Band	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	1.30	1.44	0.90	0.44
802.11g	0.25	0.43	0.58	2.35
802.11n HT20	0.23	0.32	0.72	1.42
802.11n HT40	0.13	0.21	0.62	2.09
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

**802.11b-Channel 1**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.5	56.327	--	200.0	V	135	0.44	56.767	17.233	74
2387.2	--	46.832	200.0	V	135	0.44	47.272	6.728	54

**802.11b-Channel 11**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2485.2	53.927	--	200.0	V	135	0.44	54.367	19.633	74
2484.7	--	44.601	200.0	V	135	0.44	45.041	8.959	54

**802.11g-Channel 1**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.9	67.138	--	150	V	65	2.35	69.488	4.512	74
2390.0	--	50.662	150	V	65	2.35	53.012	0.988	54

**802.11g-Channel 11**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	69.077	--	150	V	78	2.35	71.427	2.573	74
2483.5	--	51.124	150	V	78	2.35	53.474	0.526	54



## 802.11n HT20 -Channel 1

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.8	59.628	--	200	V	90	1.42	61.048	12.952	74
2390.0	--	47.668	200	V	90	1.42	49.088	4.912	54

## 802.11n HT20-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.6	69.230	--	200	V	90	1.42	70.650	3.350	74
2486.9	--	43.363	200	V	90	1.42	44.783	9.217	54

## 802.11n HT40 -Channel 3

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2389.2	61.272	--	150	V	46	2.09	63.362	10.638	74
2389.8	--	51.034	150	V	46	2.09	53.124	0.876	54

## 802.11n HT40-Channel 9

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2484.5	70.514	--	150	V	46	2.09	72.604	1.396	74
2489.2	--	51.618	150	V	46	2.09	53.708	0.292	54

## Result of RE

### Test result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

**After the pretest, SISO Antenna 2 was selected as the worst antenna for 802.11b and MIMO was selected for 802.11g/n.**

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

#### Continuous TX mode:

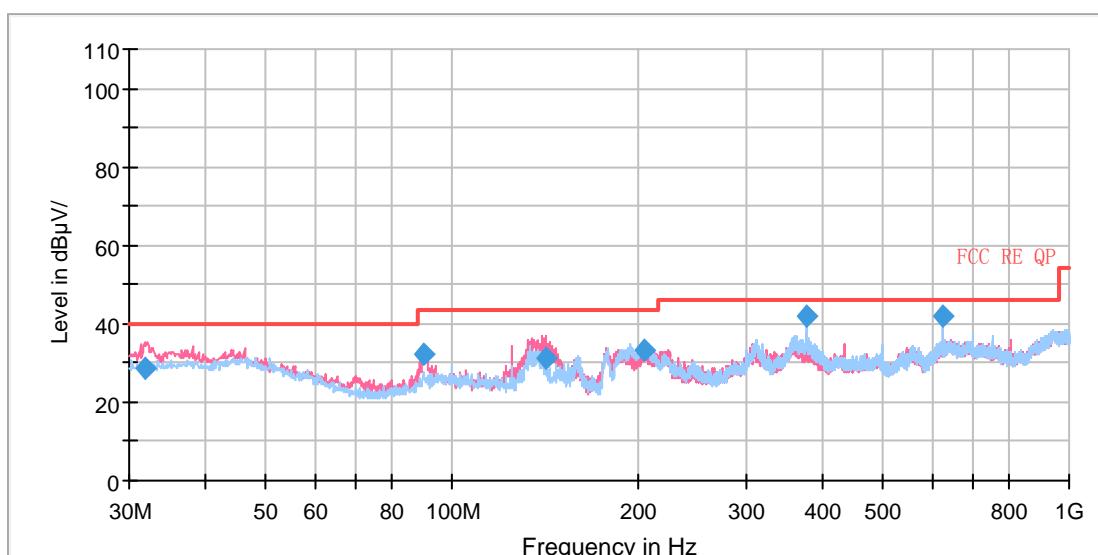


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.819203	28.73	109.0	V	287.0	3.9	11.27	40.00
90.033703	32.10	100.0	V	190.0	-3.4	11.40	43.50
141.598966	31.20	100.0	V	72.0	-7.3	12.30	43.50
205.217250	33.10	125.0	H	133.0	-5.5	10.40	43.50
375.018750	41.85	100.0	H	250.0	1.5	4.15	46.00
625.012500	41.82	122.0	H	241.0	4.2	4.18	46.00

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)**


**2. Margin = Limit – Quasi-Peak**

## 802.11b CH1

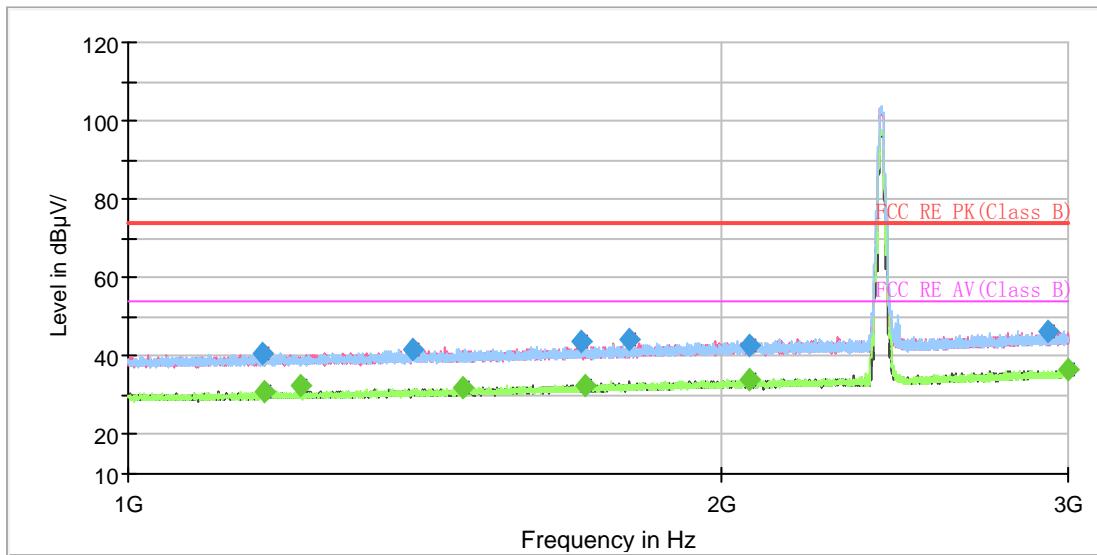

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

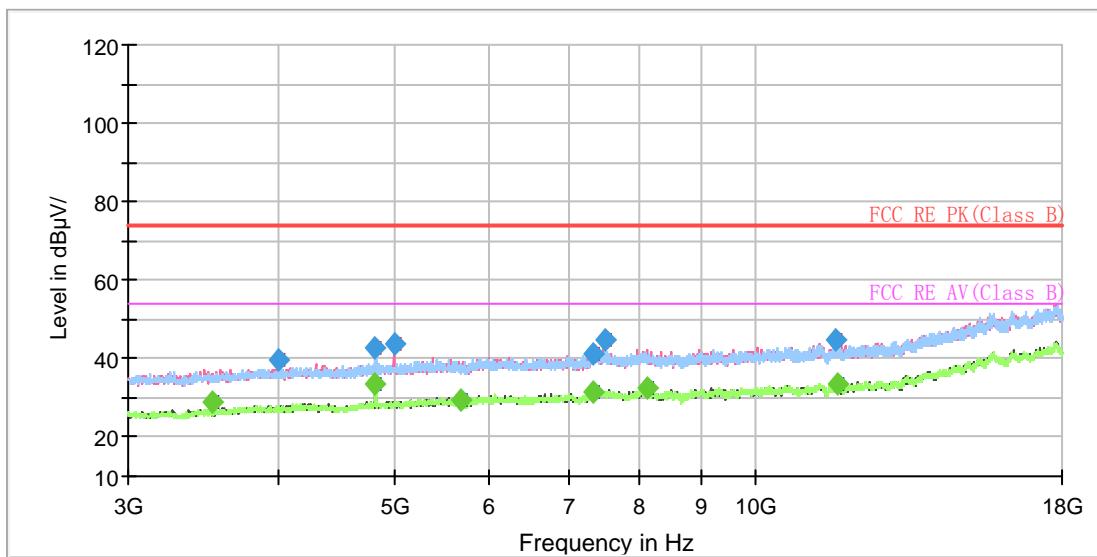


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1169.000000	40.80	---	74.00	33.20	200.0	V	230.0	-8.0
1173.750000	---	31.01	54.00	22.99	100.0	H	222.0	-8.0
1223.750000	---	32.54	54.00	21.46	200.0	V	107.0	-7.7
1394.000000	41.74	---	74.00	32.26	100.0	V	136.0	-6.7
1480.250000	---	32.08	54.00	21.92	100.0	V	338.0	-6.3
1699.750000	43.59	---	74.00	30.41	200.0	H	225.0	-5.0
1706.500000	---	32.74	54.00	21.26	200.0	H	271.0	-5.0
1797.250000	44.32	---	74.00	29.68	200.0	V	86.0	-4.5
2065.000000	42.94	---	74.00	31.06	100.0	H	49.0	-3.1
2068.500000	---	34.30	54.00	19.70	100.0	V	352.0	-3.1
2933.750000	46.47	---	74.00	27.53	200.0	V	62.0	0.7
2997.000000	---	36.51	54.00	17.49	100.0	H	208.0	1.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH6

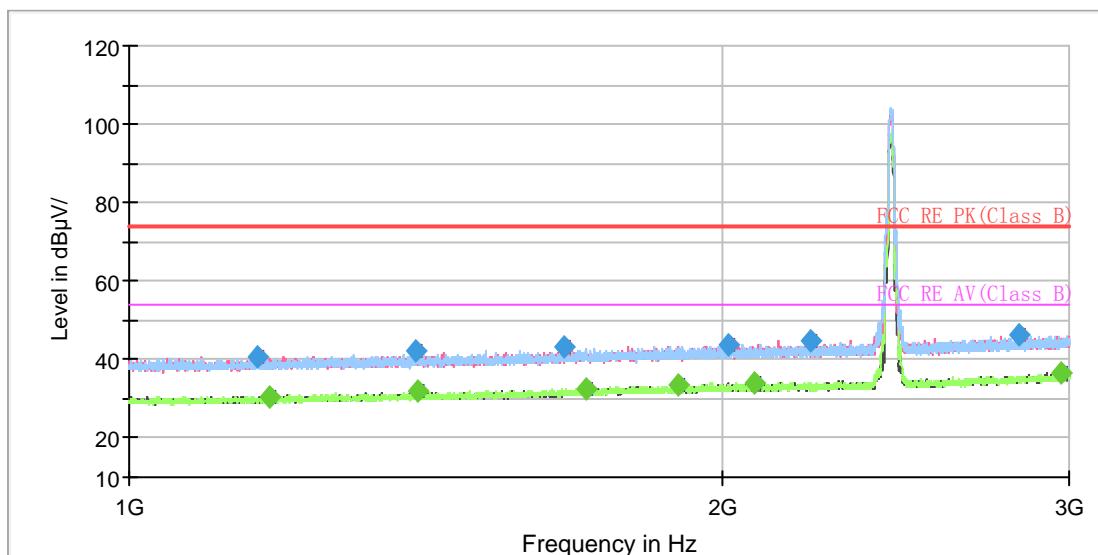

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

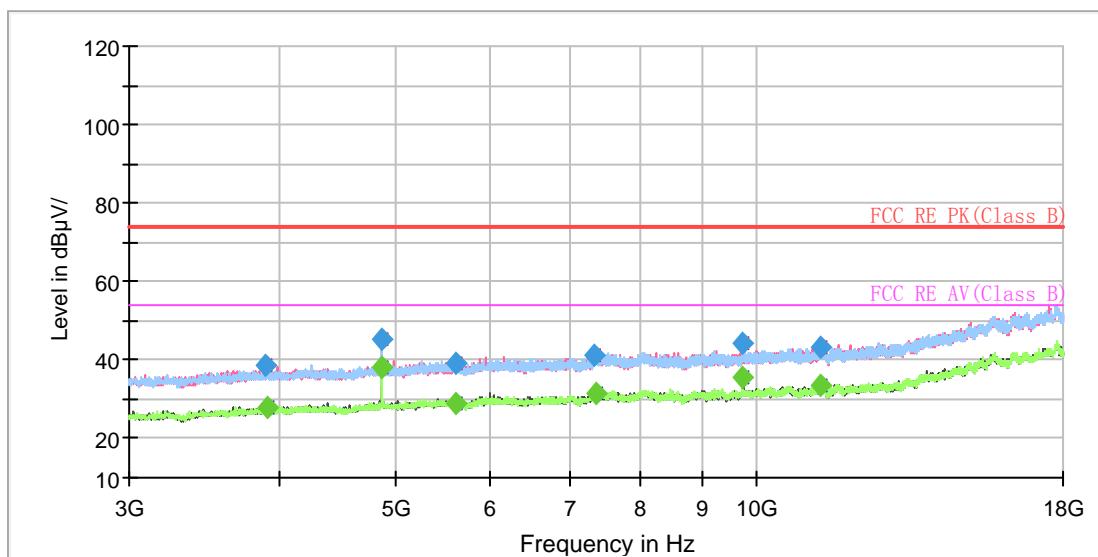


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1162.000000	40.69	---	74.00	33.31	200.0	H	293.0	-8.0
1177.000000	---	30.67	54.00	23.33	100.0	V	0.0	-7.9
1398.250000	42.06	---	74.00	31.94	100.0	H	329.0	-6.7
1401.750000	---	31.83	54.00	22.17	200.0	H	299.0	-6.7
1664.250000	43.00	---	74.00	31.00	200.0	H	283.0	-5.2
1707.250000	---	32.64	54.00	21.36	200.0	H	39.0	-5.0
1897.750000	---	33.70	54.00	20.30	200.0	V	234.0	-3.9
2015.500000	43.71	---	74.00	30.29	200.0	H	299.0	-3.3
2077.000000	---	34.27	54.00	19.73	100.0	H	86.0	-3.1
2218.500000	44.89	---	74.00	29.11	100.0	V	23.0	-2.6
2832.250000	46.09	---	74.00	27.91	100.0	V	333.0	0.3
2974.250000	---	36.57	54.00	17.43	100.0	V	333.0	0.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

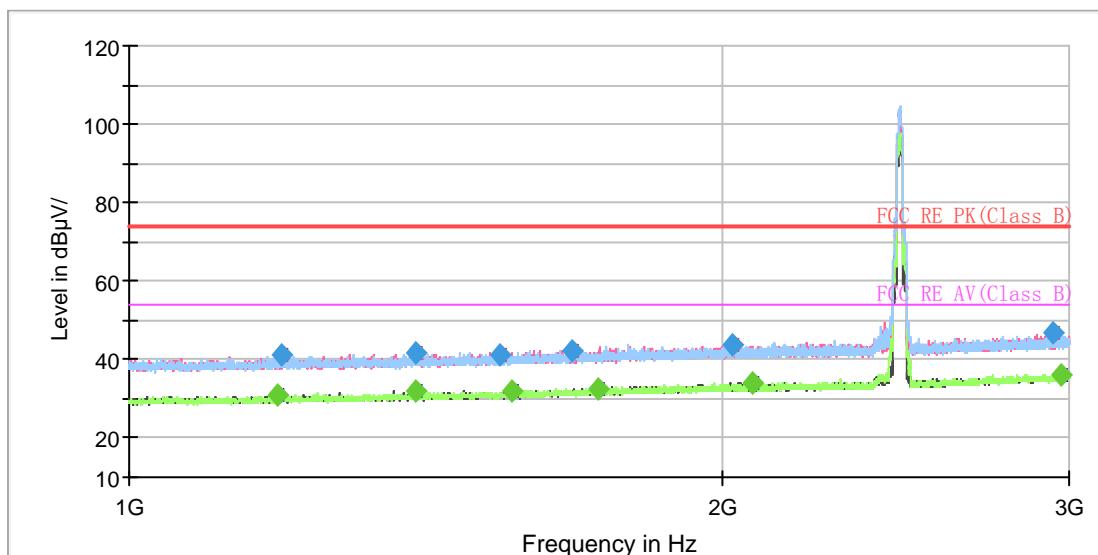

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

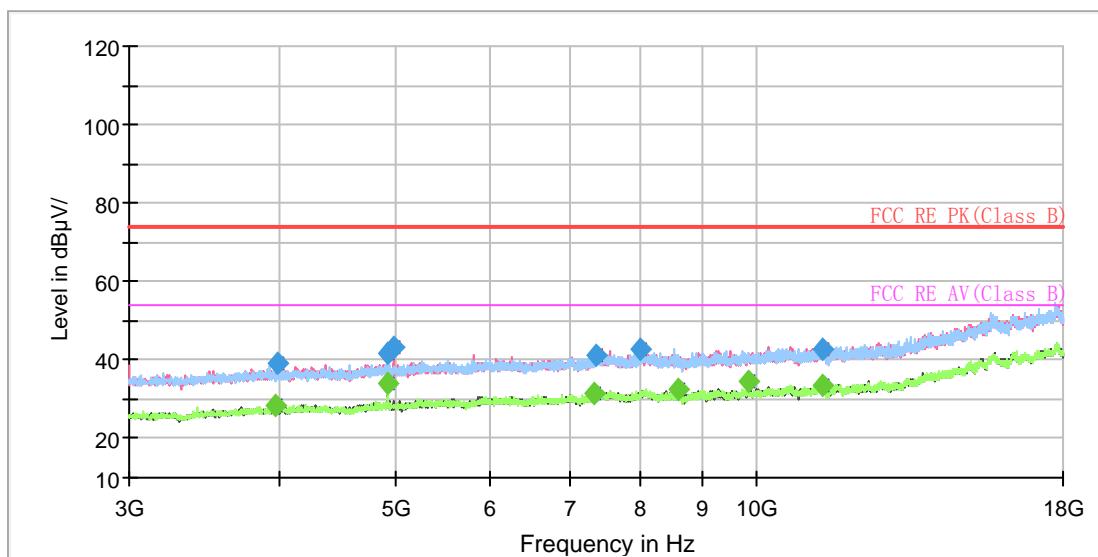


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1190.000000	---	31.19	54.00	22.81	100.0	V	132.0	-7.8
1195.000000	41.15	---	74.00	32.85	100.0	V	328.0	-7.8
1398.500000	---	31.91	54.00	22.09	200.0	V	208.0	-6.7
1398.500000	41.89	---	74.00	32.11	200.0	V	208.0	-6.7
1541.500000	41.43	---	74.00	32.57	100.0	V	91.0	-6.0
1563.000000	---	31.82	54.00	22.18	100.0	V	250.0	-5.8
1679.750000	42.45	---	74.00	31.55	100.0	H	127.0	-5.1
1730.750000	---	32.64	54.00	21.36	200.0	V	229.0	-4.9
2025.250000	44.00	---	74.00	30.00	100.0	H	238.0	-3.3
2070.750000	---	34.14	54.00	19.86	200.0	H	339.0	-3.1
2947.750000	46.96	---	74.00	27.04	200.0	V	149.0	0.9
2970.750000	---	36.32	54.00	17.68	200.0	V	240.0	0.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

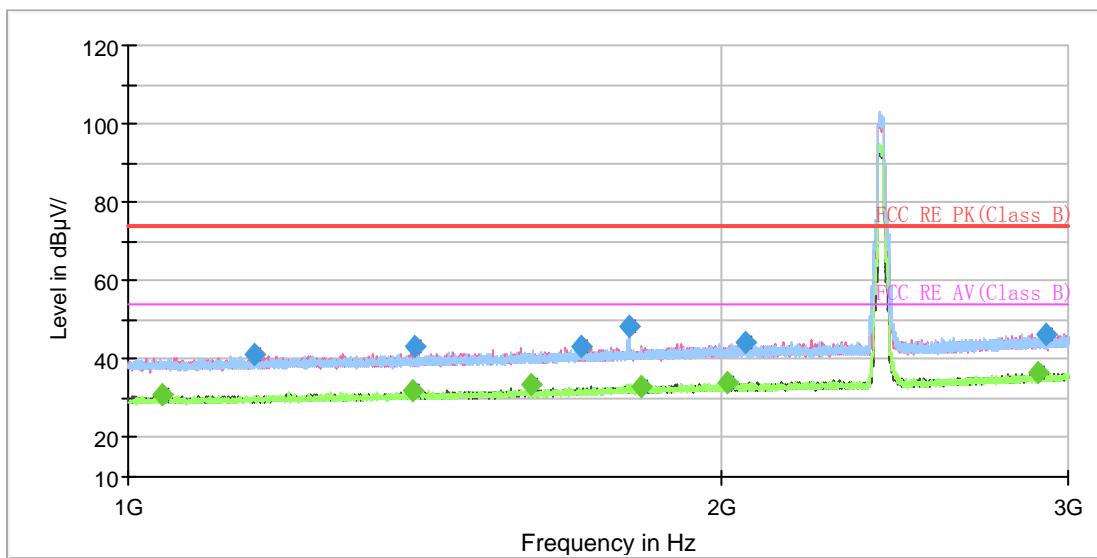

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

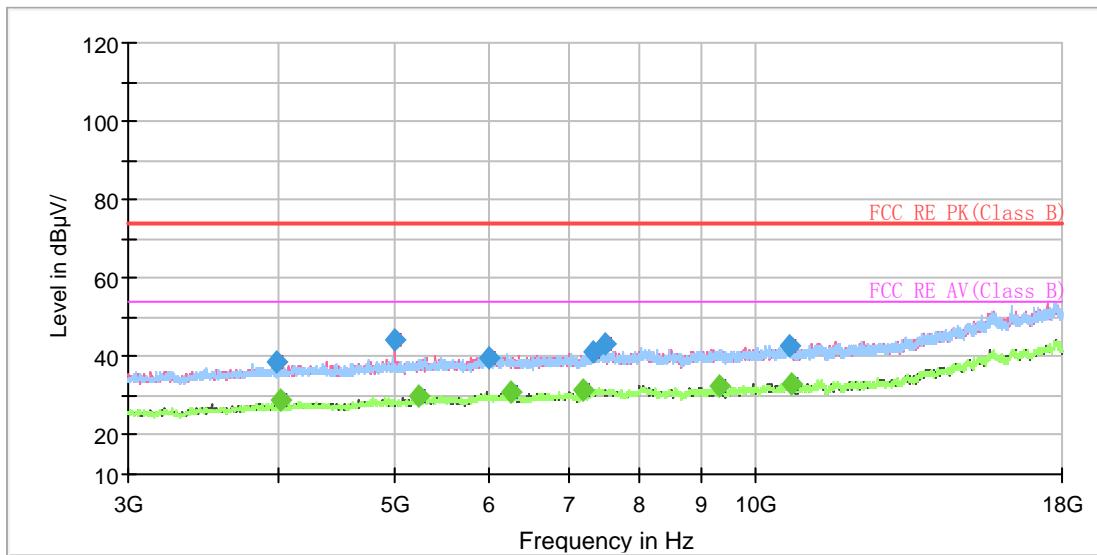


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1040.750000	---	30.96	54.00	23.04	100.0	V	68.0	-8.6
1158.750000	41.23	---	74.00	32.77	100.0	H	0.0	-8.0
1395.250000	---	32.07	54.00	21.93	100.0	V	78.0	-6.7
1398.000000	43.33	---	74.00	30.67	100.0	V	78.0	-6.7
1599.750000	---	33.61	54.00	20.39	100.0	V	73.0	-5.6
1696.750000	43.02	---	74.00	30.98	100.0	H	90.0	-5.0
1797.500000	48.13	---	74.00	25.87	100.0	H	298.0	-4.5
1822.750000	---	32.88	54.00	21.12	100.0	V	34.0	-4.3
2013.000000	---	34.23	54.00	19.77	100.0	V	251.0	-3.4
2057.500000	44.11	---	74.00	29.89	200.0	V	49.0	-3.1
2894.000000	---	36.80	54.00	17.20	200.0	V	132.0	0.5
2920.750000	46.55	---	74.00	27.45	100.0	V	63.0	0.6


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH6

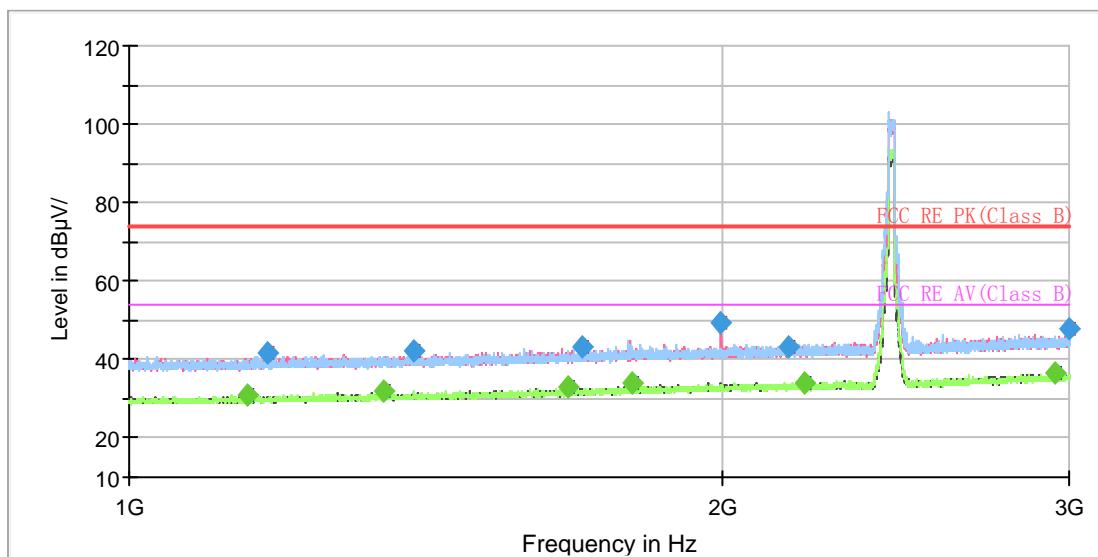

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

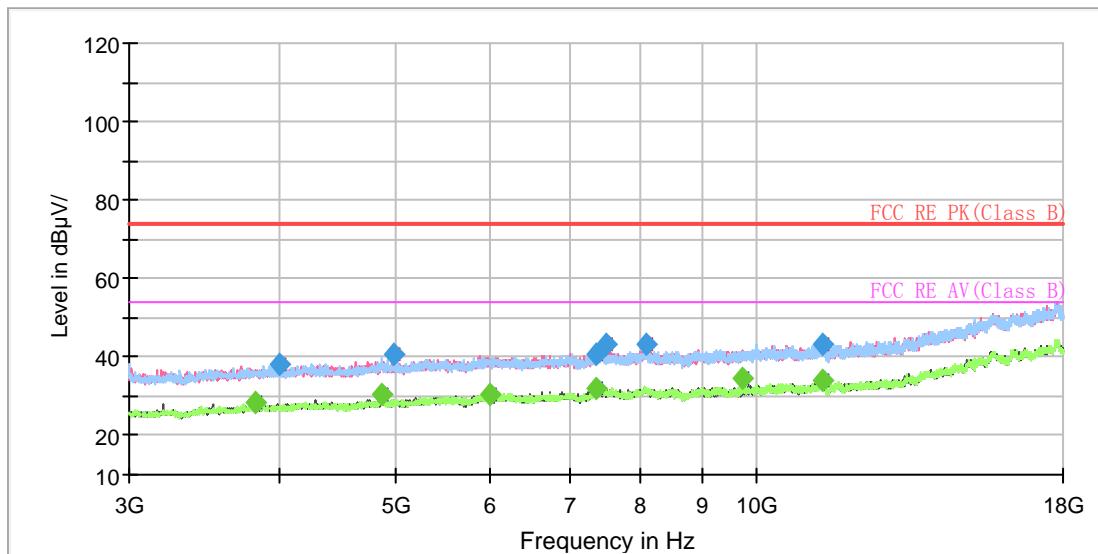


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1148.750000	---	30.88	54.00	23.12	100.0	V	264.0	-8.1
1176.250000	41.82	---	74.00	32.18	200.0	V	26.0	-7.9
1346.250000	---	31.83	54.00	22.17	100.0	V	159.0	-7.0
1395.250000	42.11	---	74.00	31.89	200.0	V	306.0	-6.7
1671.250000	---	32.90	54.00	21.10	200.0	H	84.0	-5.1
1697.000000	43.33	---	74.00	30.67	200.0	V	311.0	-5.0
1799.250000	---	34.18	54.00	19.82	100.0	H	208.0	-4.5
1998.000000	49.43	---	74.00	24.57	100.0	V	344.0	-3.4
2162.750000	43.33	---	74.00	30.67	100.0	V	71.0	-2.7
2200.500000	---	33.84	54.00	20.16	100.0	V	60.0	-2.7
2952.250000	---	36.47	54.00	17.53	200.0	V	276.0	0.9
2997.250000	47.90	---	74.00	26.10	100.0	V	341.0	1.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

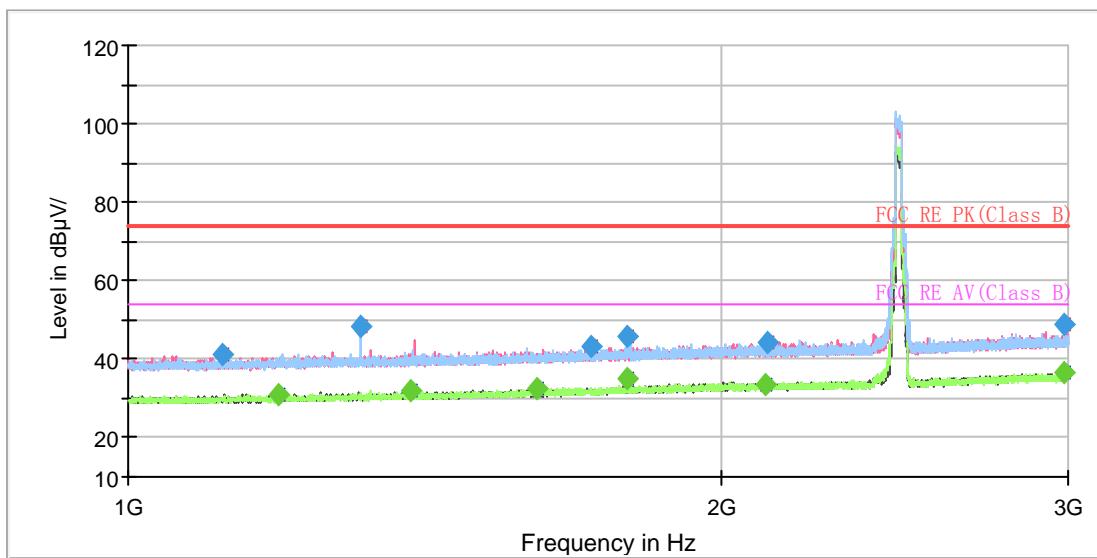

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

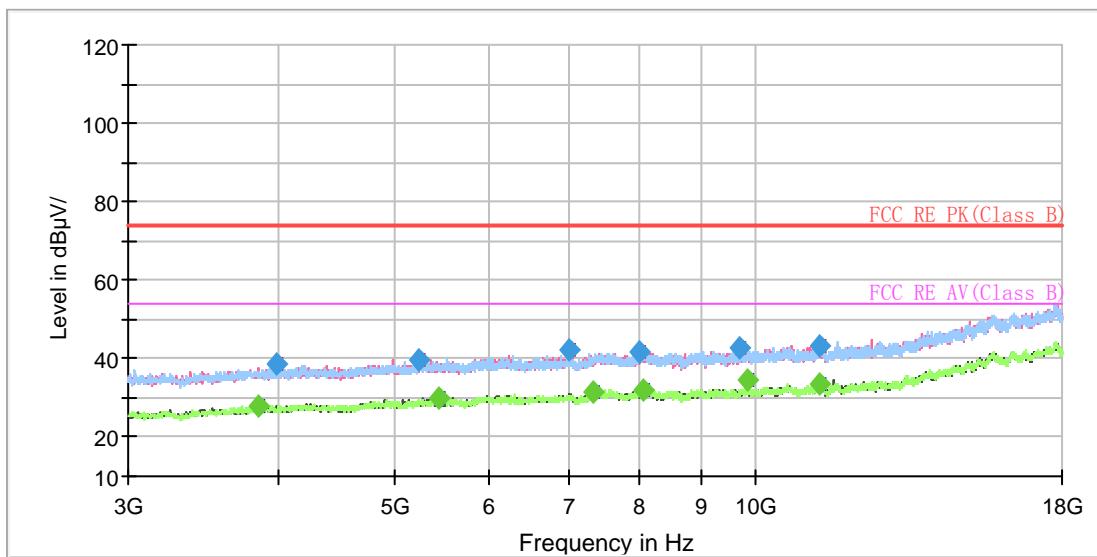


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1115.500000	41.10	---	74.00	32.90	100.0	H	240.0	-8.3
1192.250000	---	30.96	54.00	23.04	200.0	V	172.0	-7.8
1313.250000	48.55	---	74.00	25.45	100.0	H	326.0	-7.2
1392.500000	---	31.81	54.00	22.19	100.0	V	327.0	-6.7
1610.750000	---	32.67	54.00	21.33	100.0	V	211.0	-5.5
1716.000000	43.09	---	74.00	30.91	100.0	V	236.0	-5.0
1792.250000	45.81	---	74.00	28.19	100.0	H	126.0	-4.5
1792.250000	---	35.11	54.00	18.89	100.0	H	126.0	-4.5
2104.750000	---	33.28	54.00	20.72	200.0	V	0.0	-2.9
2112.500000	44.19	---	74.00	29.81	100.0	H	354.0	-2.9
2988.250000	48.75	---	74.00	25.25	200.0	V	60.0	1.0
2988.750000	---	36.54	54.00	17.46	100.0	H	299.0	1.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH1

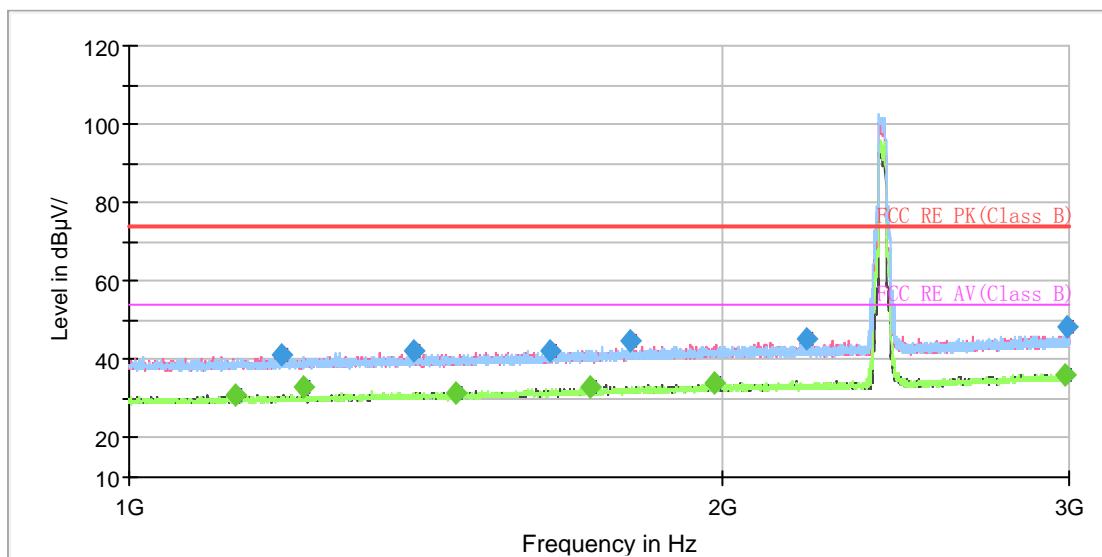

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

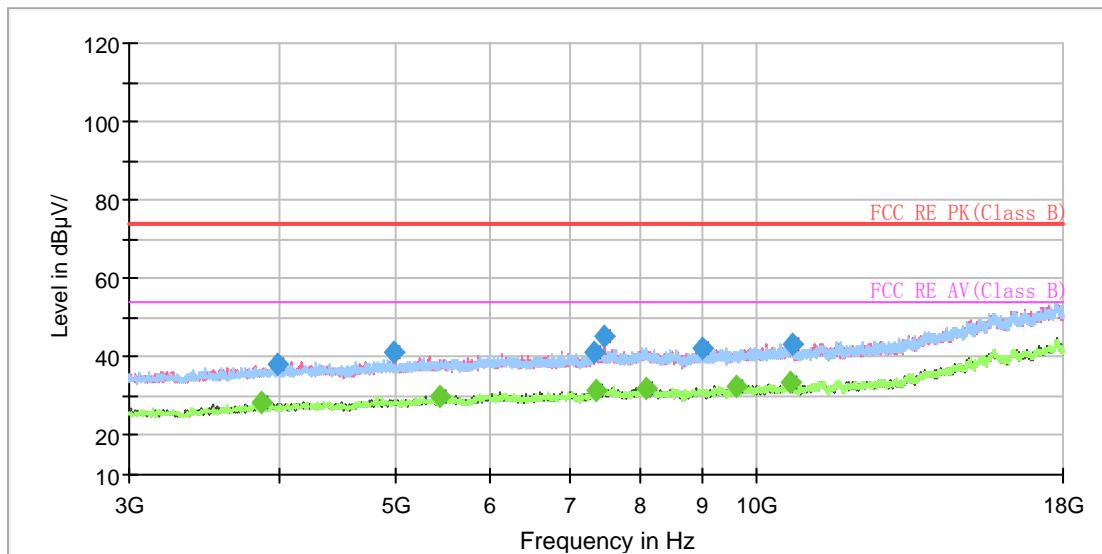


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1133.500000	---	31.00	54.00	23.00	100.0	H	164.0	-8.2
1194.750000	41.28	---	74.00	32.72	100.0	H	146.0	-7.8
1225.500000	---	33.21	54.00	20.79	100.0	H	131.0	-7.7
1396.250000	42.23	---	74.00	31.77	100.0	H	287.0	-6.7
1464.500000	---	31.39	54.00	22.61	100.0	V	164.0	-6.4
1636.750000	42.36	---	74.00	31.64	200.0	H	237.0	-5.4
1714.500000	---	33.00	54.00	21.00	200.0	V	125.0	-5.0
1798.000000	44.67	---	74.00	29.33	100.0	H	136.0	-4.5
1981.000000	---	34.17	54.00	19.83	200.0	V	354.0	-3.5
2209.000000	45.50	---	74.00	28.50	100.0	V	25.0	-2.6
2986.750000	---	36.33	54.00	17.67	200.0	H	147.0	1.0
2991.250000	48.45	---	74.00	25.55	100.0	V	159.0	1.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

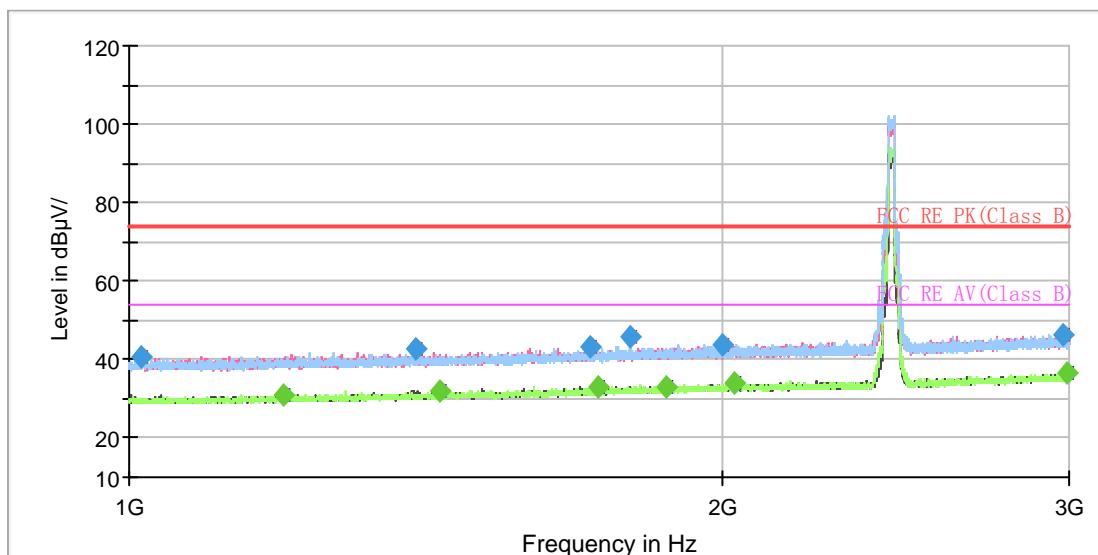

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

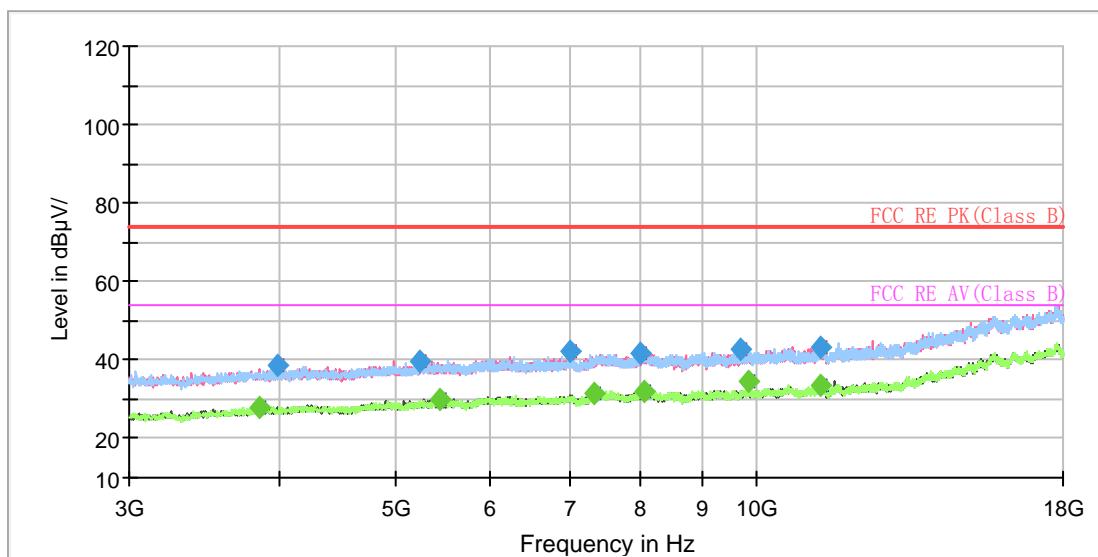


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1015.250000	40.85	---	74.00	33.15	100.0	H	225.0	-8.8
1198.500000	---	31.07	54.00	22.93	200.0	V	141.0	-7.8
1398.250000	42.97	---	74.00	31.03	200.0	H	319.0	-6.7
1437.000000	---	32.13	54.00	21.87	100.0	V	0.0	-6.5
1714.500000	43.22	---	74.00	30.78	100.0	H	285.0	-5.0
1732.000000	---	32.99	54.00	21.01	100.0	H	82.0	-4.8
1794.500000	45.70	---	74.00	28.30	100.0	H	236.0	-4.5
1872.000000	---	33.25	54.00	20.75	100.0	H	37.0	-4.1
2000.250000	43.79	---	74.00	30.21	100.0	H	290.0	-3.4
2029.750000	---	33.82	54.00	20.18	100.0	V	152.0	-3.3
2977.250000	46.35	---	74.00	27.65	200.0	H	121.0	0.9
2990.250000	---	36.41	54.00	17.59	100.0	V	87.0	1.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH11

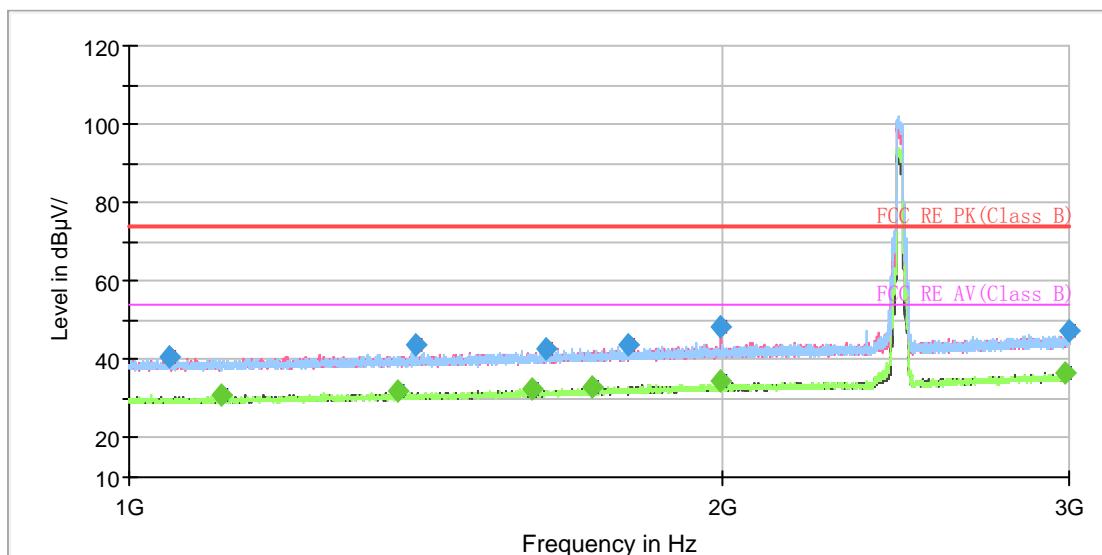

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

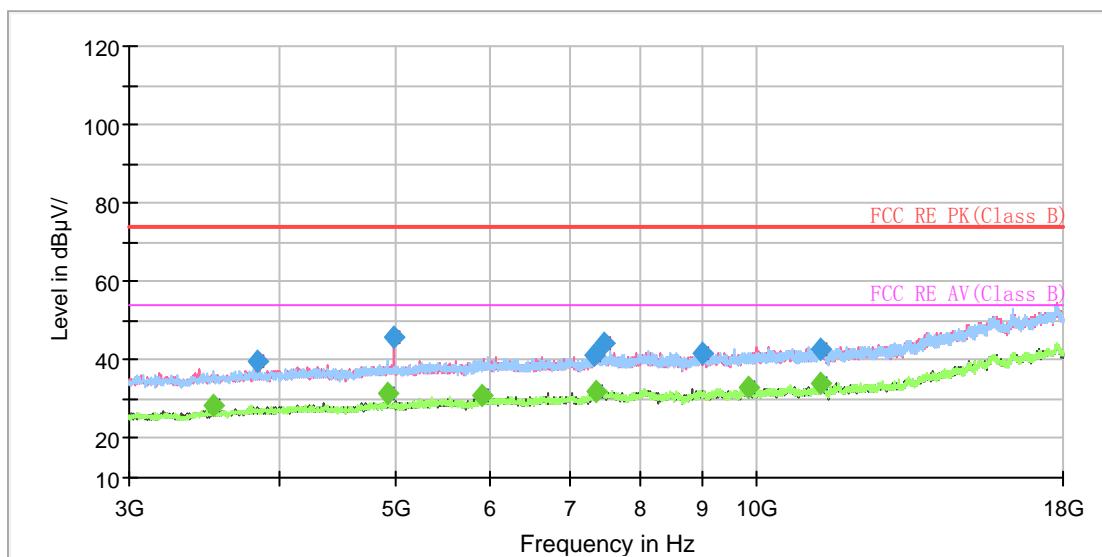


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1049.000000	40.69	---	74.00	33.31	100.0	V	135.0	-8.6
1113.000000	---	31.08	54.00	22.92	200.0	H	35.0	-8.3
1369.250000	---	31.90	54.00	22.10	100.0	V	156.0	-6.9
1398.750000	43.62	---	74.00	30.38	100.0	H	195.0	-6.7
1599.750000	---	32.32	54.00	21.68	200.0	V	340.0	-5.6
1629.250000	42.88	---	74.00	31.12	100.0	H	299.0	-5.5
1716.500000	---	33.08	54.00	20.92	100.0	V	307.0	-5.0
1790.500000	43.99	---	74.00	30.01	100.0	H	134.0	-4.5
1998.000000	48.37	---	74.00	25.63	100.0	V	298.0	-3.4
1998.000000	---	34.75	54.00	19.25	100.0	V	298.0	-3.4
2988.750000	---	36.52	54.00	17.48	100.0	H	189.0	1.0
2999.500000	47.51	---	74.00	26.49	100.0	V	1.0	1.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT40) CH3

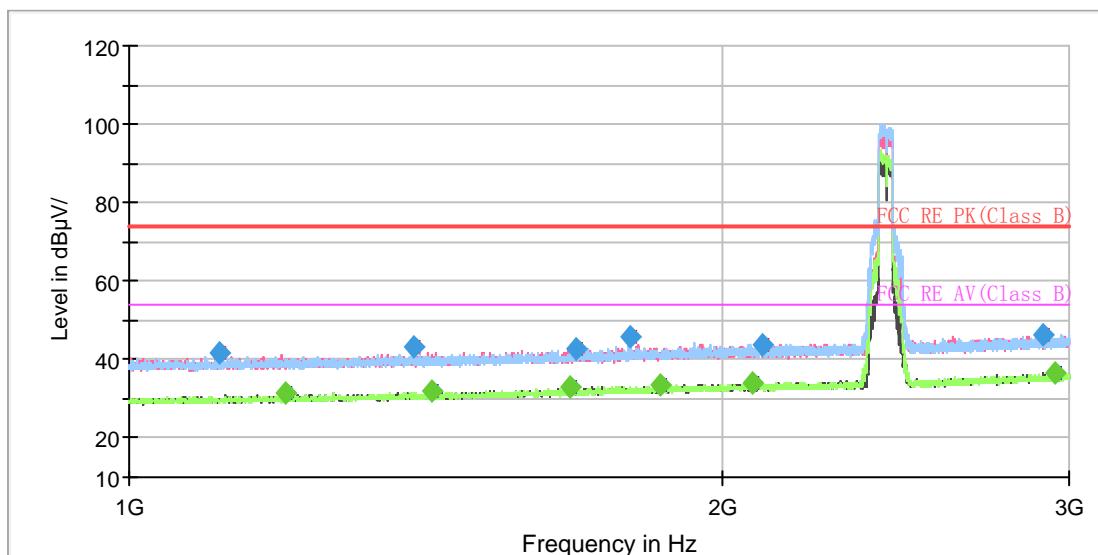

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

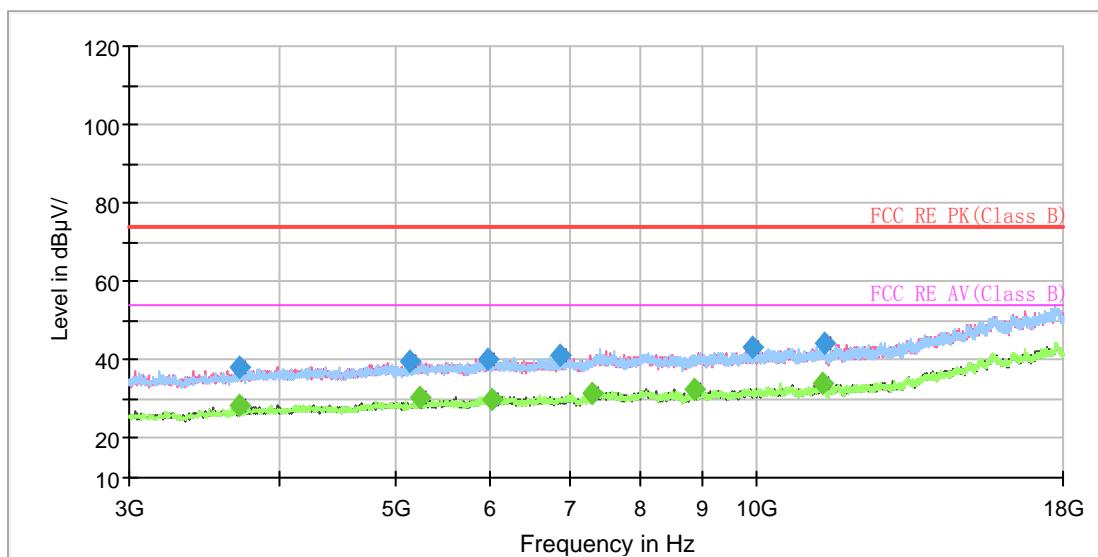


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1110.500000	41.62	---	74.00	32.38	100.0	V	44.0	-8.3
1200.750000	---	31.44	54.00	22.56	200.0	V	147.0	-7.8
1396.250000	43.49	---	74.00	30.51	100.0	H	171.0	-6.7
1423.250000	---	31.86	54.00	22.14	100.0	V	178.0	-6.6
1675.250000	---	32.89	54.00	21.11	200.0	V	121.0	-5.1
1686.500000	42.76	---	74.00	31.24	200.0	V	329.0	-5.1
1796.250000	45.83	---	74.00	28.17	100.0	H	117.0	-4.5
1858.750000	---	33.62	54.00	20.38	200.0	V	0.0	-4.2
2074.250000	---	34.00	54.00	20.00	200.0	H	81.0	-3.1
2094.000000	43.85	---	74.00	30.15	200.0	V	213.0	-3.0
2909.750000	46.26	---	74.00	27.74	200.0	V	334.0	0.6
2950.500000	---	36.72	54.00	17.28	100.0	V	21.0	0.9


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH6

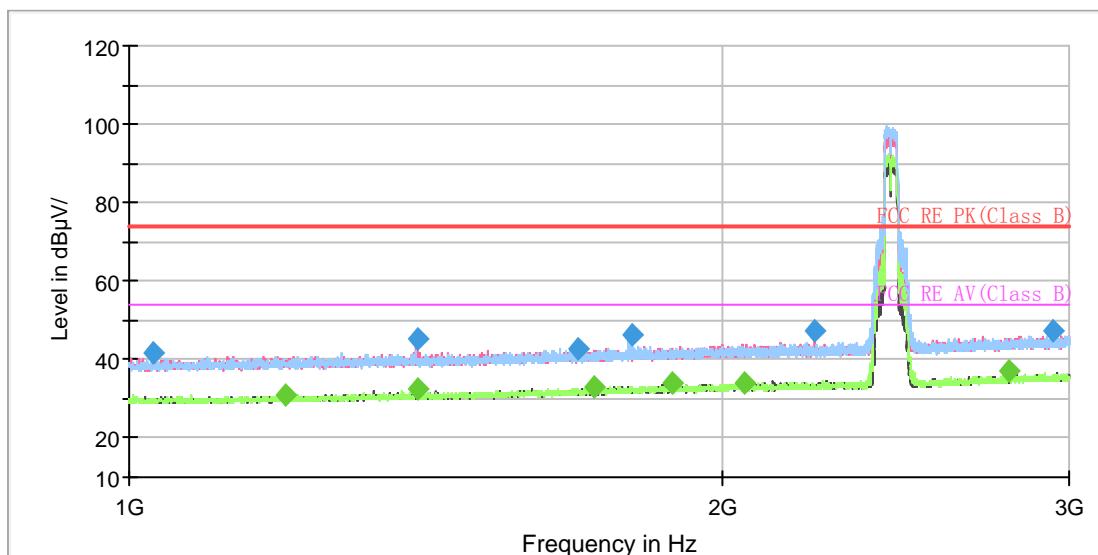

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

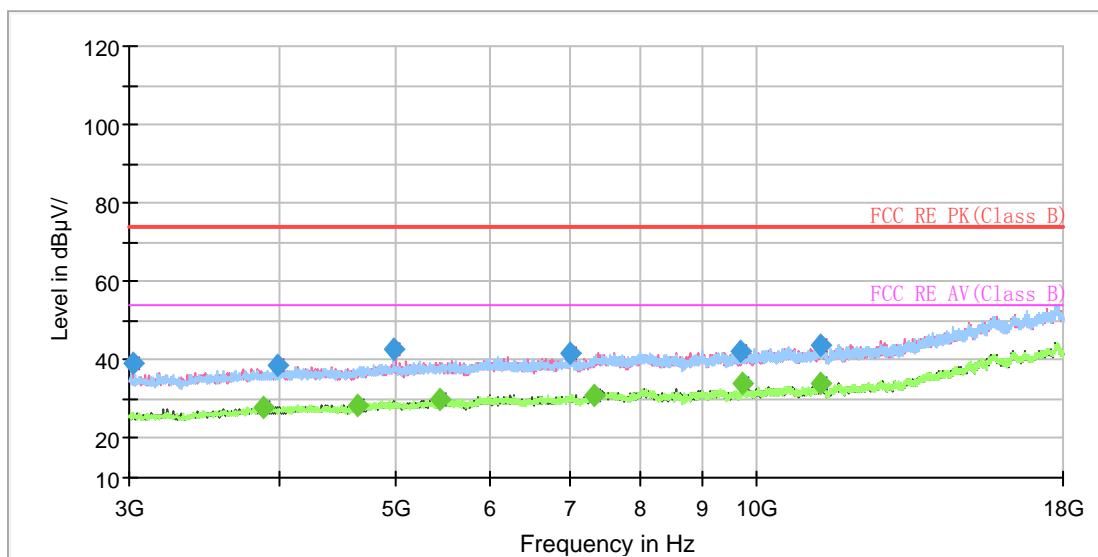


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1027.500000	41.59	---	74.00	32.41	200.0	H	0.0	-8.8
1200.000000	---	30.93	54.00	23.07	100.0	H	307.0	-7.8
1399.750000	---	32.72	54.00	21.28	100.0	V	137.0	-6.7
1399.750000	45.21	---	74.00	28.79	100.0	V	137.0	-6.7
1689.750000	42.86	---	74.00	31.14	100.0	H	101.0	-5.1
1722.750000	---	32.81	54.00	21.19	200.0	H	119.0	-4.9
1798.500000	46.19	---	74.00	27.81	100.0	H	333.0	-4.5
1887.000000	---	34.06	54.00	19.94	100.0	V	153.0	-4.0
2053.250000	---	34.07	54.00	19.93	200.0	V	251.0	-3.1
2225.750000	47.42	---	74.00	26.58	100.0	V	32.0	-2.6
2799.250000	---	36.89	54.00	17.11	200.0	H	16.0	-1.5
2945.000000	47.22	---	74.00	26.78	100.0	V	223.0	0.8


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH9

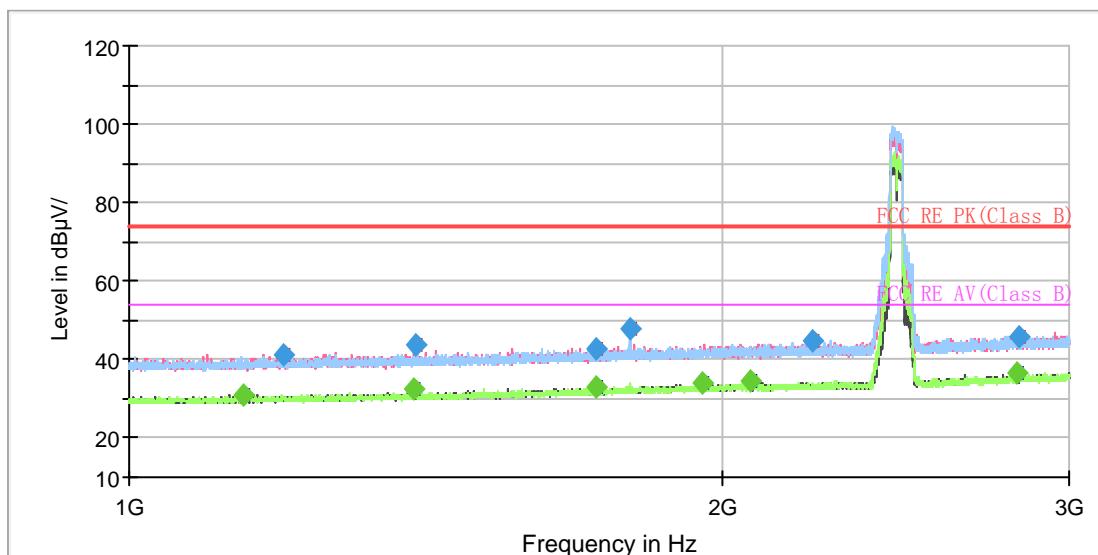

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

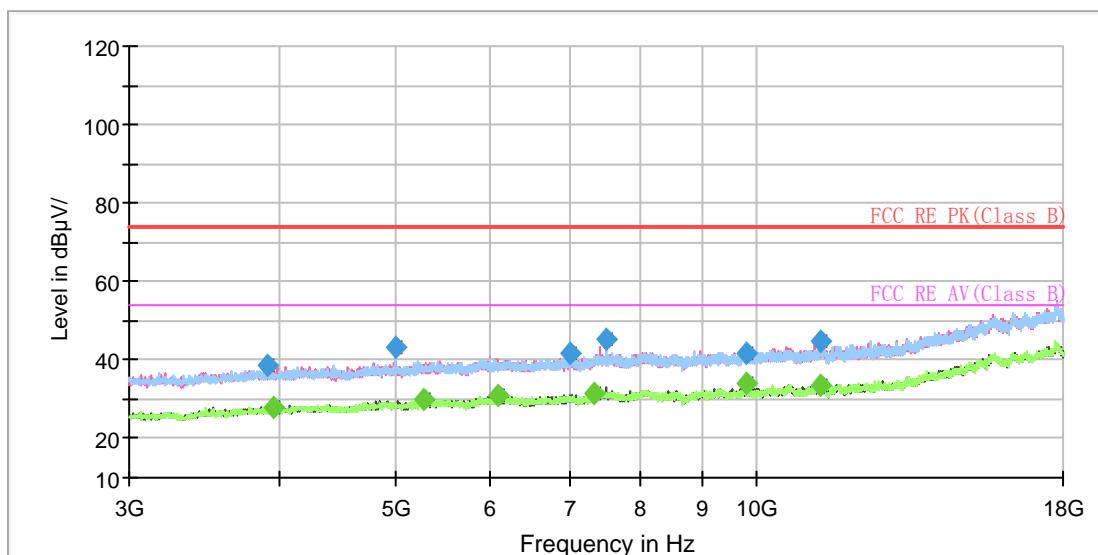

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1141.750000	---	30.91	54.00	23.09	100.0	H	150.0	-8.1
1198.000000	41.10	---	74.00	32.90	200.0	H	0.0	-7.8
1394.750000	---	32.57	54.00	21.43	100.0	V	26.0	-6.7
1397.750000	43.62	---	74.00	30.38	100.0	V	138.0	-6.7
1725.250000	---	32.87	54.00	21.13	200.0	V	233.0	-4.9
1725.500000	42.92	---	74.00	31.08	100.0	H	295.0	-4.9
1795.500000	47.87	---	74.00	26.13	100.0	H	140.0	-4.5
1954.250000	---	33.90	54.00	20.10	200.0	H	148.0	-3.6
2065.500000	---	34.43	54.00	19.57	100.0	V	0.0	-3.1
2222.500000	44.79	---	74.00	29.21	200.0	V	75.0	-2.6
2825.500000	---	36.39	54.00	17.61	200.0	H	0.0	0.2
2827.750000	45.93	---	74.00	28.07	200.0	H	305.0	0.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 5.7. Conducted Emission

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

### Test Setup

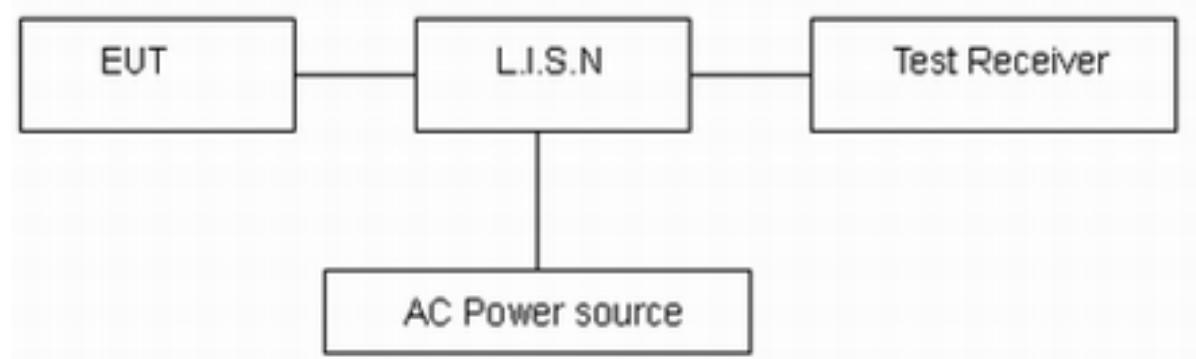

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


\*: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G) with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

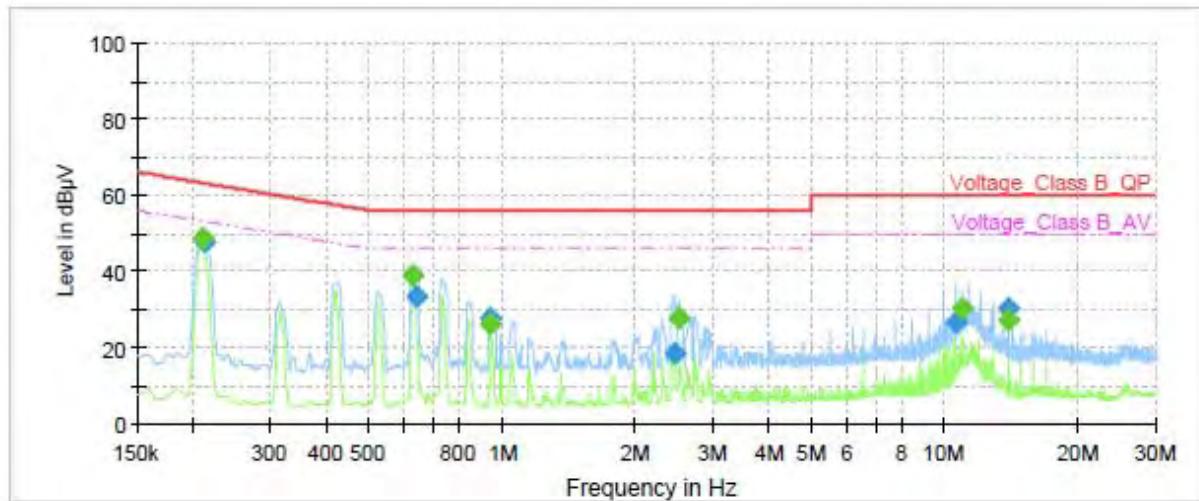

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.21	---	48.88	53.18	4.30	1000.0	9.000	L1	ON	19
0.21	47.64	---	63.09	15.45	1000.0	9.000	L1	ON	19
0.63	---	39.22	46.00	6.78	1000.0	9.000	L1	ON	19
0.64	33.41	---	56.00	22.59	1000.0	9.000	L1	ON	19
0.94	---	26.22	46.00	19.78	1000.0	9.000	L1	ON	19
0.94	27.45	---	56.00	28.55	1000.0	9.000	L1	ON	19
2.47	18.55	---	56.00	37.45	1000.0	9.000	L1	ON	19
2.51	---	27.51	46.00	18.49	1000.0	9.000	L1	ON	19
10.66	26.76	---	60.00	33.24	1000.0	9.000	L1	ON	19
10.96	---	30.36	50.00	19.64	1000.0	9.000	L1	ON	19
13.95	---	27.36	50.00	22.64	1000.0	9.000	L1	ON	19
13.95	30.47	---	60.00	29.53	1000.0	9.000	L1	ON	19

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 KHz to 30 MHz

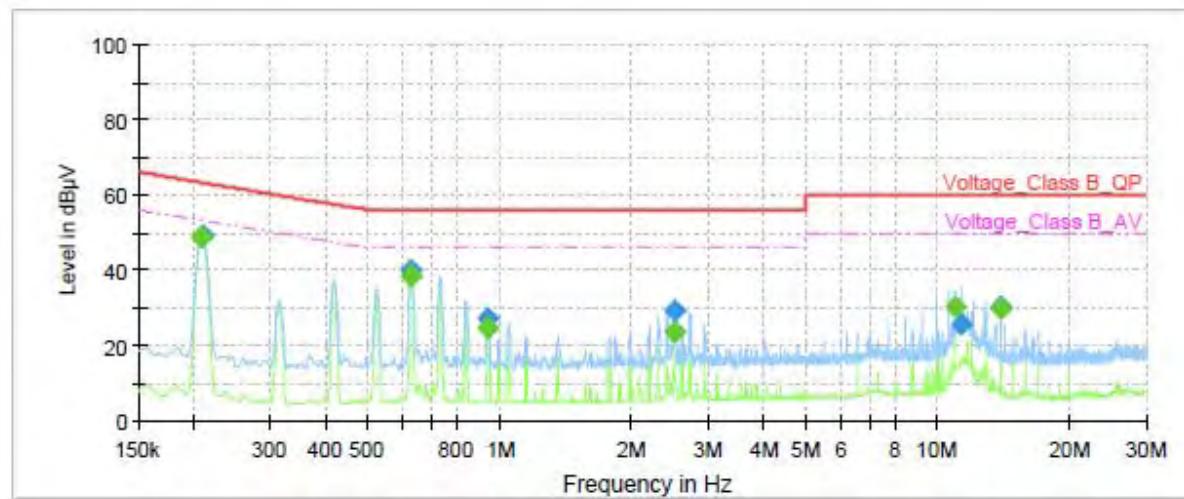

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.21	---	48.50	53.27	4.77	1000.0	9.000	N	ON	19
0.21	49.06	---	63.18	14.12	1000.0	9.000	N	ON	19
0.63	---	38.35	46.00	7.65	1000.0	9.000	N	ON	19
0.63	39.84	---	56.00	16.16	1000.0	9.000	N	ON	19
0.94	27.25	---	56.00	28.75	1000.0	9.000	N	ON	19
0.94	---	24.43	46.00	21.57	1000.0	9.000	N	ON	19
2.51	29.29	---	56.00	26.71	1000.0	9.000	N	ON	19
2.51	---	23.45	46.00	22.55	1000.0	9.000	N	ON	19
10.96	---	30.42	50.00	19.58	1000.0	9.000	N	ON	19
11.39	25.77	---	60.00	34.23	1000.0	9.000	N	ON	19
13.95	---	29.62	50.00	20.38	1000.0	9.000	N	ON	19
13.95	30.10	---	60.00	29.90	1000.0	9.000	N	ON	19

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
EMI Test Receiver	R&S	ESCI	100948	2019-05-19	2020-05-18
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2017-11-18	2020-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
EMI Test Receiver	R&S	ESR	101667	2019-05-19	2020-05-18
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	Agilent	N9010A	MY47191109	2019-05-19	2020-05-18
Power Meter	R&S	NRP2	104306	2019-05-19	2020-05-18
Power Sensor	R&S	NRP-Z21	104799	2019-05-19	2020-05-18
20dB Attenuator	Star River Highlight	UCL-TS2S-20	18013001	2019-12-15	2020-12-14
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-06-12
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT\*\*\*\*\*