




Band Edge NVNT 802.11n(HT20) 5240MHz Ant1

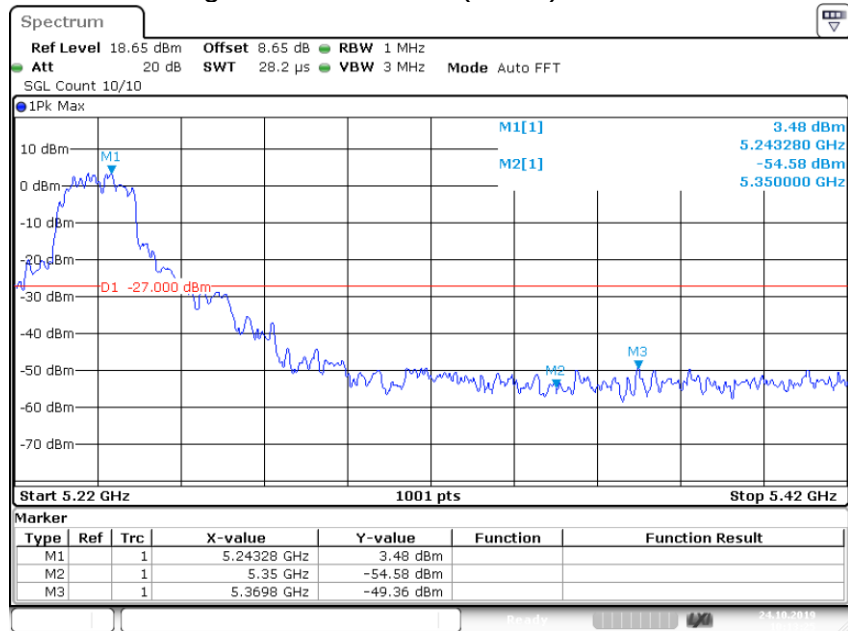

Band Edge NVNT 802.11n(HT40) 5190MHz Ant1

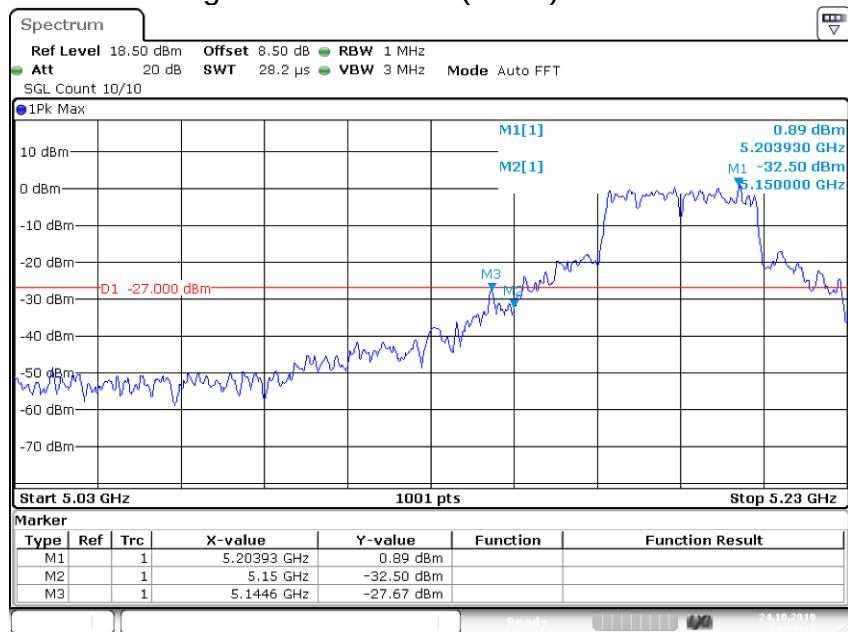


Band Edge NVNT 802.11n(HT40) 5230MHz Ant1

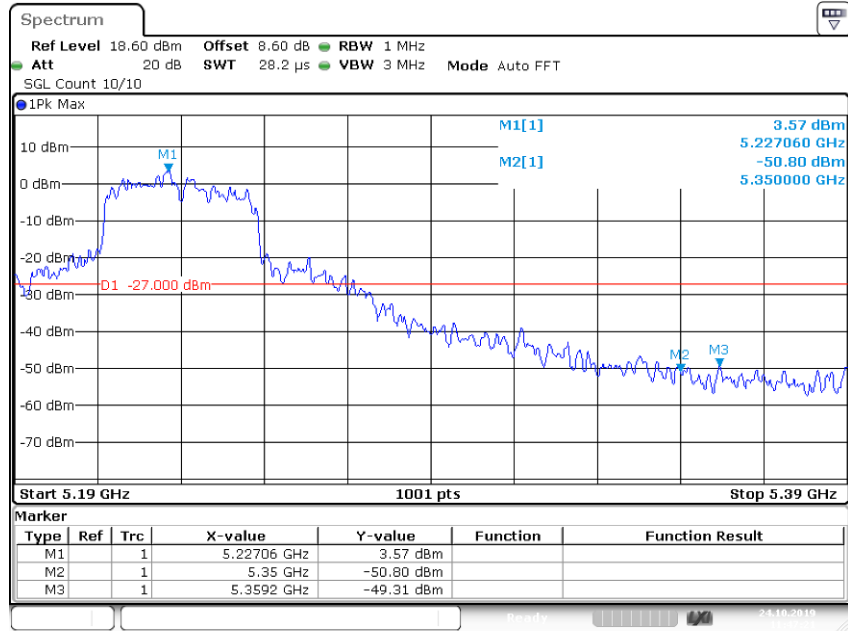

Date: 24.OCT.2019 11:47:21


U-NII-2A						
Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5260	Ant 1	-50.97	-27	Pass
NVNT	802.11a	5320	Ant 1	-47.95	-27	Pass
NVNT	802.11ac20	5260	Ant 1	-48.97	-27	Pass
NVNT	802.11ac20	5320	Ant 1	-48.77	-27	Pass
NVNT	802.11ac40	5270	Ant 1	-51.69	-27	Pass
NVNT	802.11ac40	5310	Ant 1	-38.59	-27	Pass
NVLT	802.11ac80	5290	Ant 1	-36.97	-27	Pass
NVNT	802.11n(HT20)	5260	Ant 1	-50.12	-27	Pass
NVNT	802.11n(HT20)	5320	Ant 1	-48.54	-27	Pass
NVNT	802.11n(HT40)	5270	Ant 1	-49.88	-27	Pass
NVNT	802.11n(HT40)	5310	Ant 1	-40.8	-27	Pass

Band Edge NVLT 802.11a 5260MHz Ant1

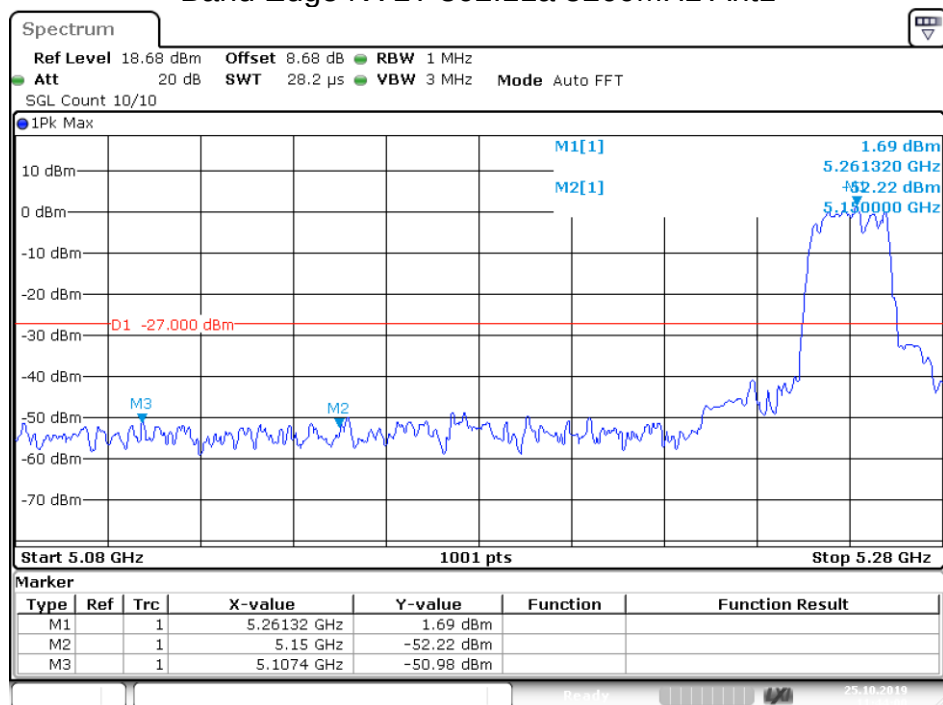


Date: 25.OCT.2019 11:43:59

Band Edge NVLT 802.11a 5320MHz Ant1

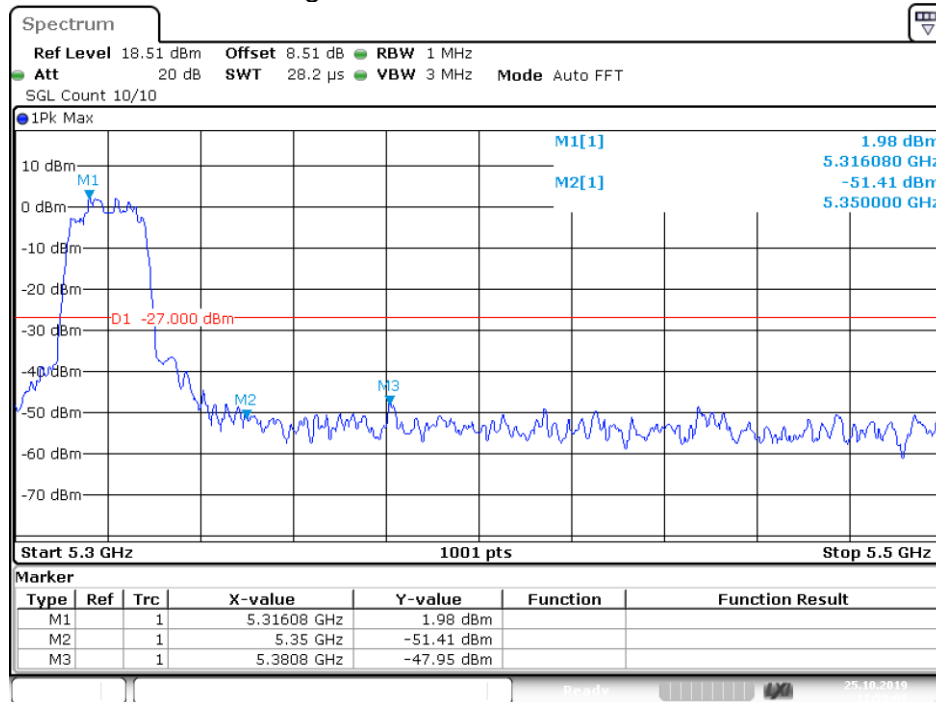


Date: 25.OCT.2019 11:58:09

Band Edge NVLT 802.11ac20 5260MHz Ant1

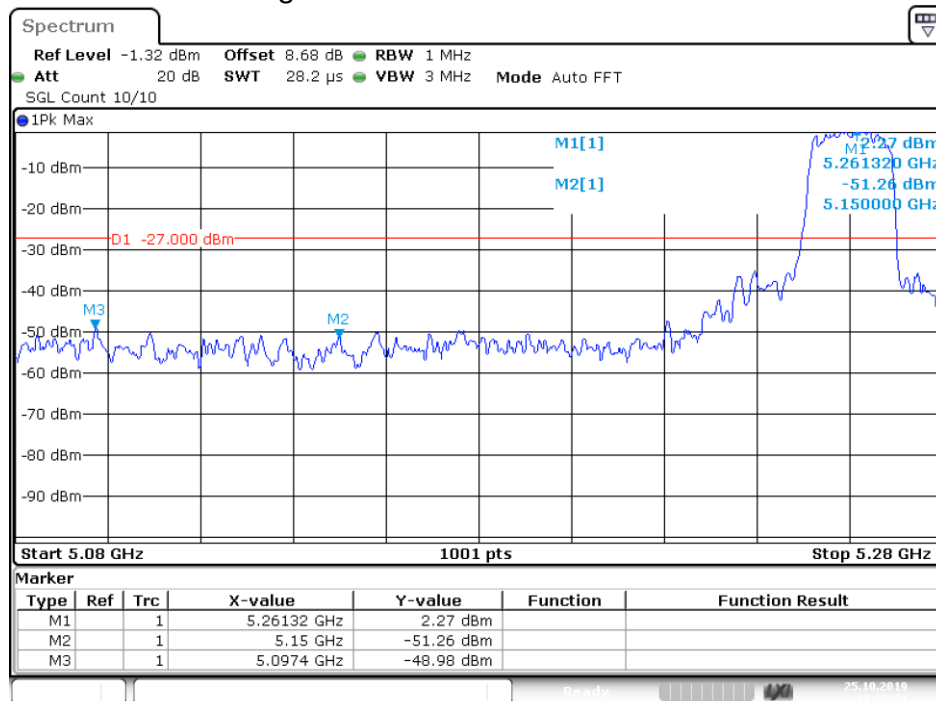


Date: 25.OCT.2019 11:27:51

Band Edge NVLT 802.11ac20 5320MHz Ant1

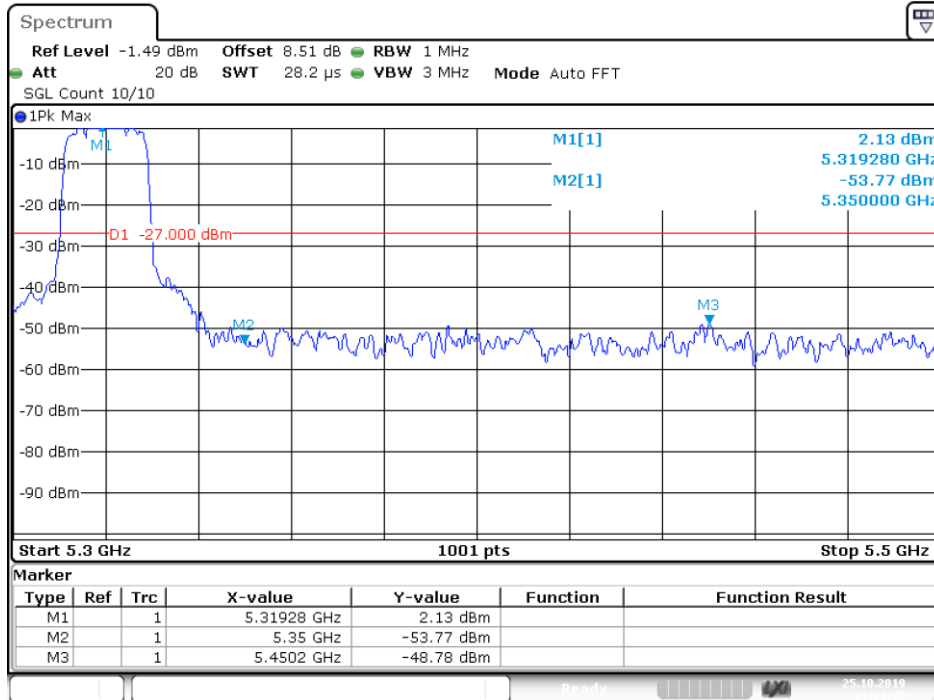


Date: 25.OCT.2019 11:34:17

Band Edge NVLT 802.11ac40 5270MHz Ant1

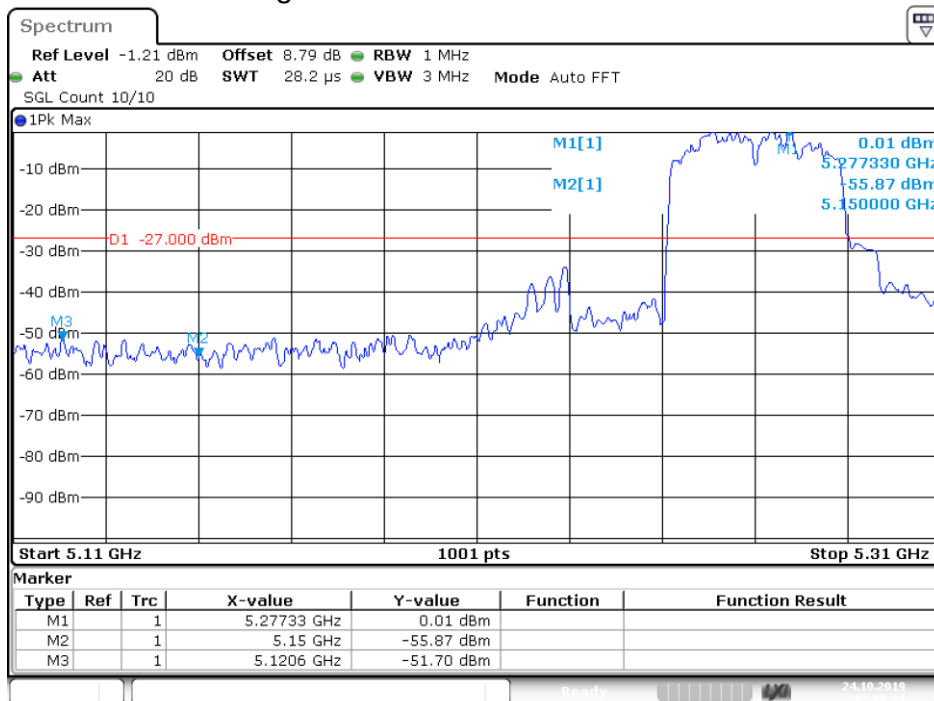


Date: 24.OCT.2019 12:28:21

Band Edge NVLT 802.11ac40 5310MHz Ant1

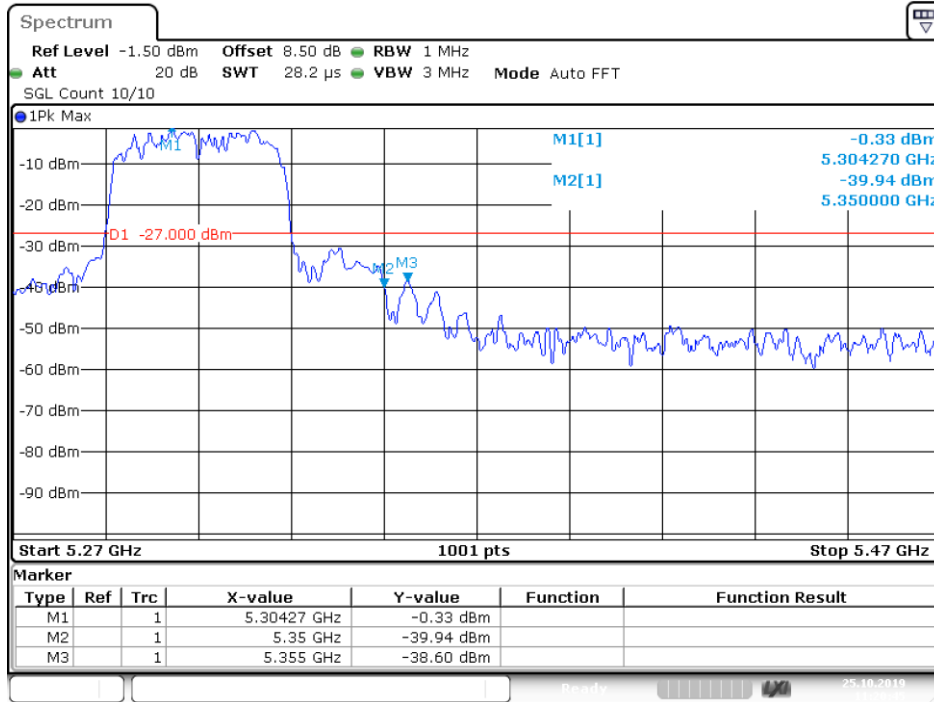


Date: 25.OCT.2019 11:20:45

Band Edge NVLT 802.11ac80 5290MHz Ant1

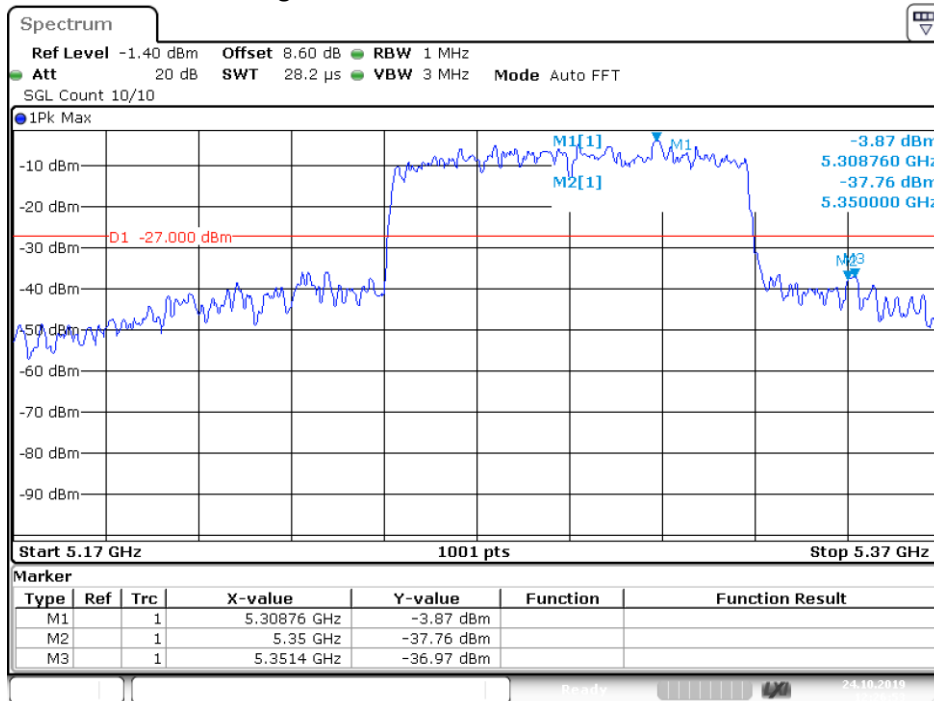


Date: 24.OCT.2019 12:26:53

Band Edge NVLT 802.11n(HT20) 5260MHz Ant1

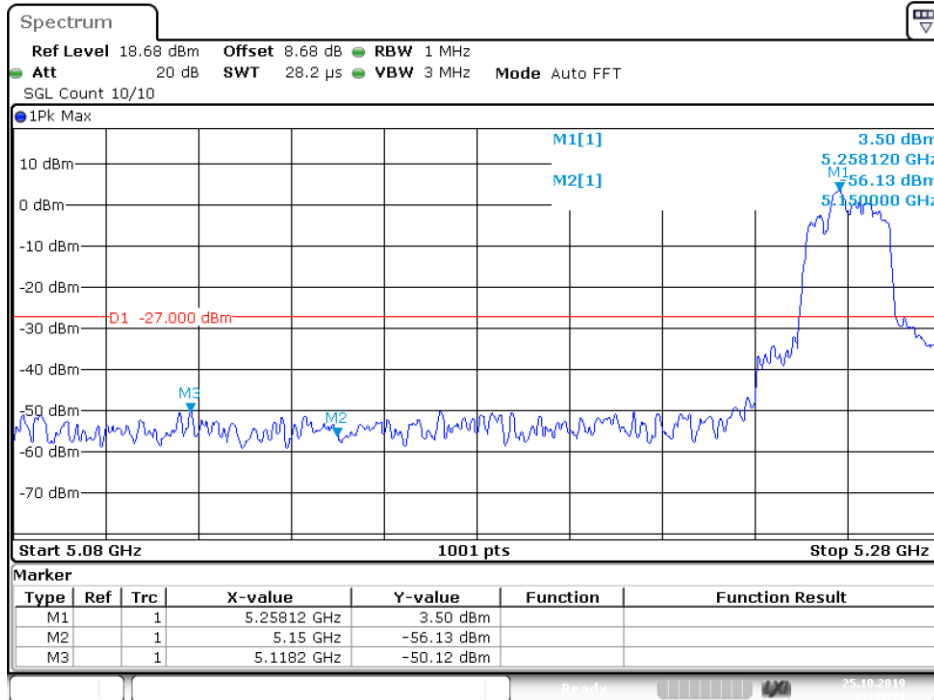


Date: 25.OCT.2019 11:40:51

Band Edge NVLT 802.11n(HT20) 5320MHz Ant1

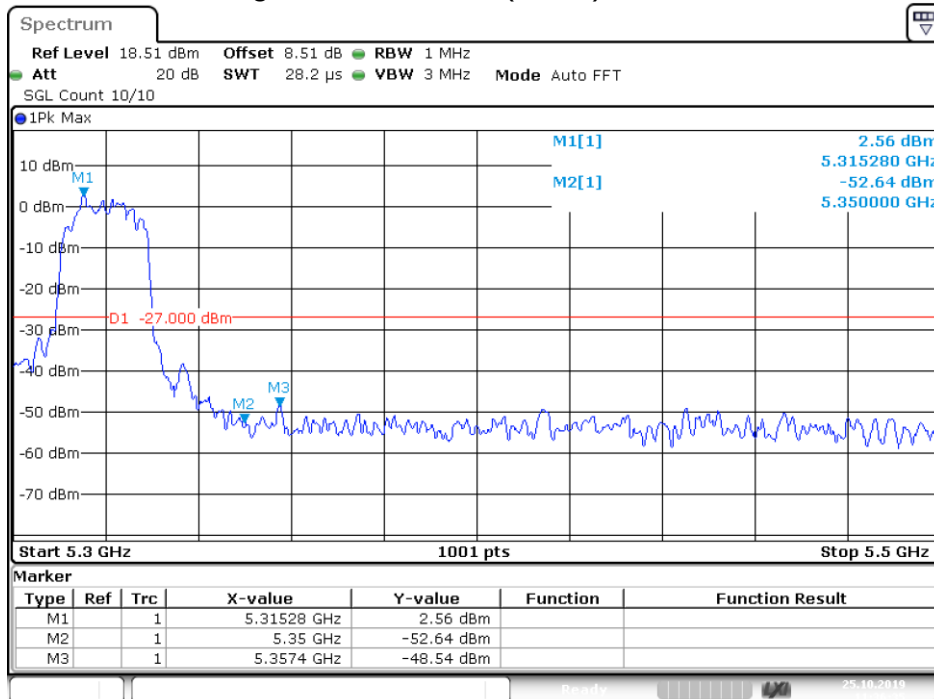

Date: 25.OCT.2019 11:36:35

Band Edge NVLT 802.11n(HT40) 5270MHz Ant1

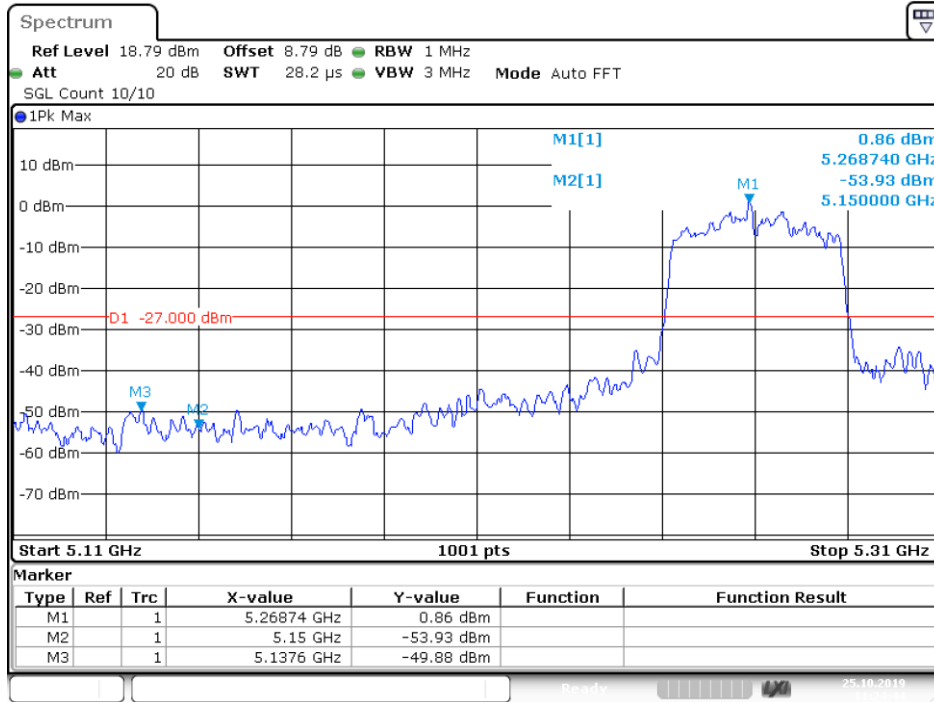

Date: 25.OCT.2019 11:24:43


Band Edge NVLT 802.11n(HT40) 5310MHz Ant1




Date: 25.OCT.2019 11:22:40

U-NII-3					
Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Verdict
NVNT	802.11a	5745	Ant 1	-37.86	Pass
NVNT	802.11a	5825	Ant 1	-39.46	Pass
NVNT	802.11ac20	5745	Ant 1	-37.96	Pass
NVNT	802.11ac20	5825	Ant 1	-39.34	Pass
NVNT	802.11ac40	5755	Ant 1	-34.92	Pass
NVNT	802.11ac40	5795	Ant 1	-38.87	Pass
NVNT	802.11ac80	5775	Ant 1	-39.85	Pass
NVNT	802.11n(HT20)	5745	Ant 1	-39.14	Pass
NVNT	802.11n(HT20)	5825	Ant 1	-28.36	Pass
NVNT	802.11n(HT40)	5755	Ant 1	-29.42	Pass
NVNT	802.11n(HT40)	5795	Ant 1	-34.93	Pass


Band Edge NVNT 802.11a 5745MHz Ant1

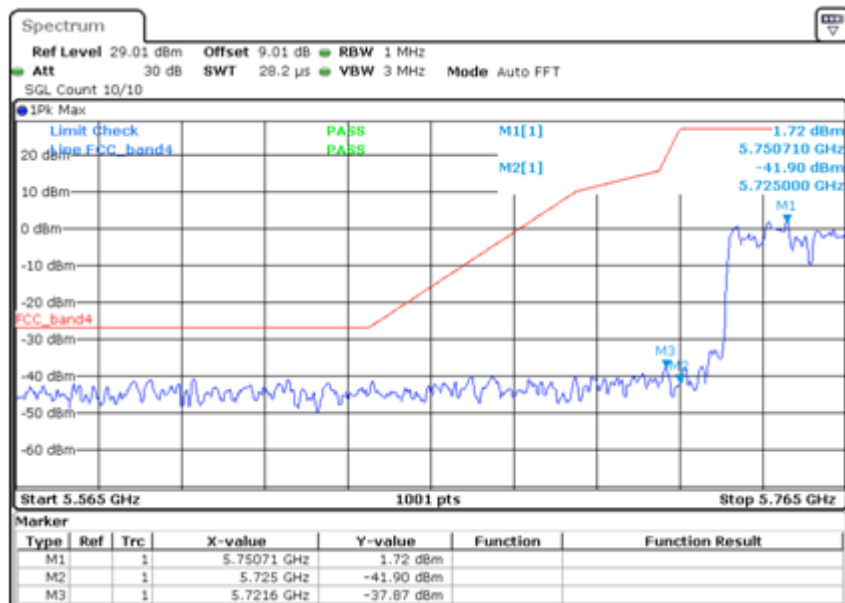


Band Edge NVNT 802.11a 5825MHz Ant1

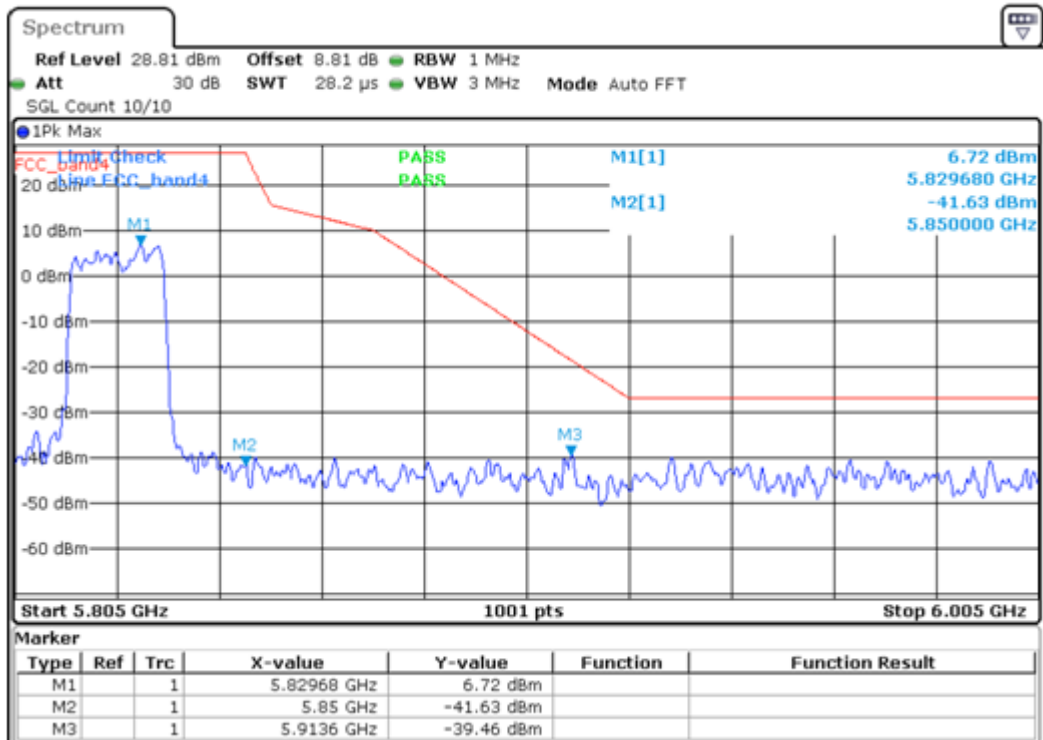


Band Edge NVNT 802.11ac20 5745MHz Ant1

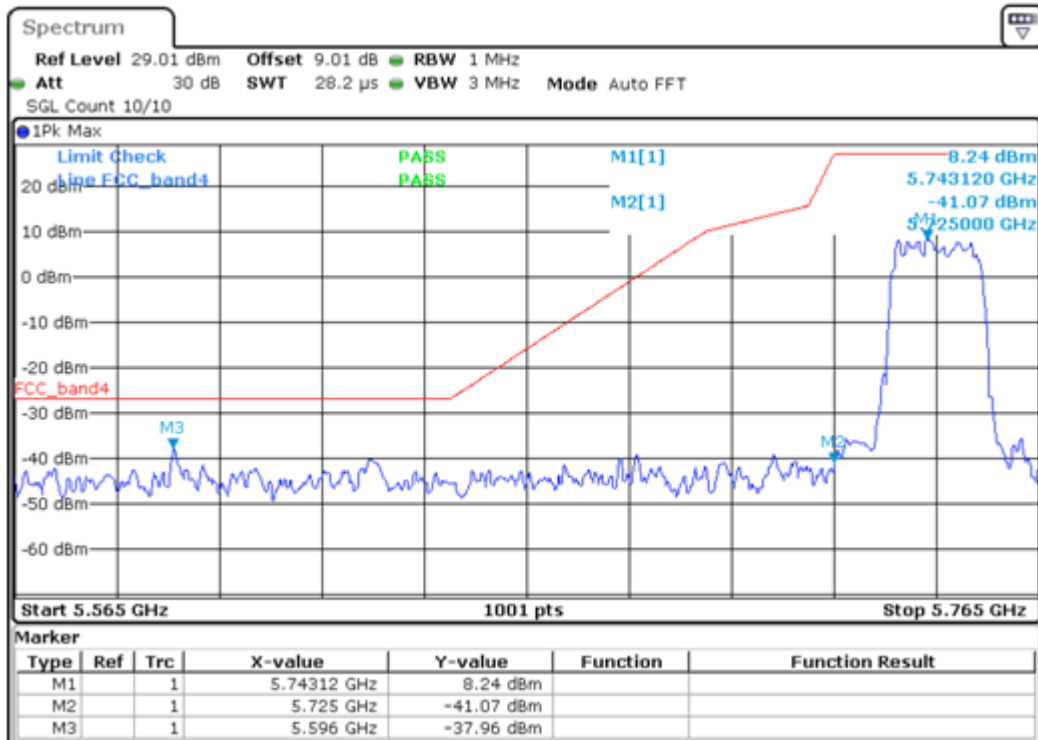


Band Edge NVNT 802.11ac20 5825MHz Ant1

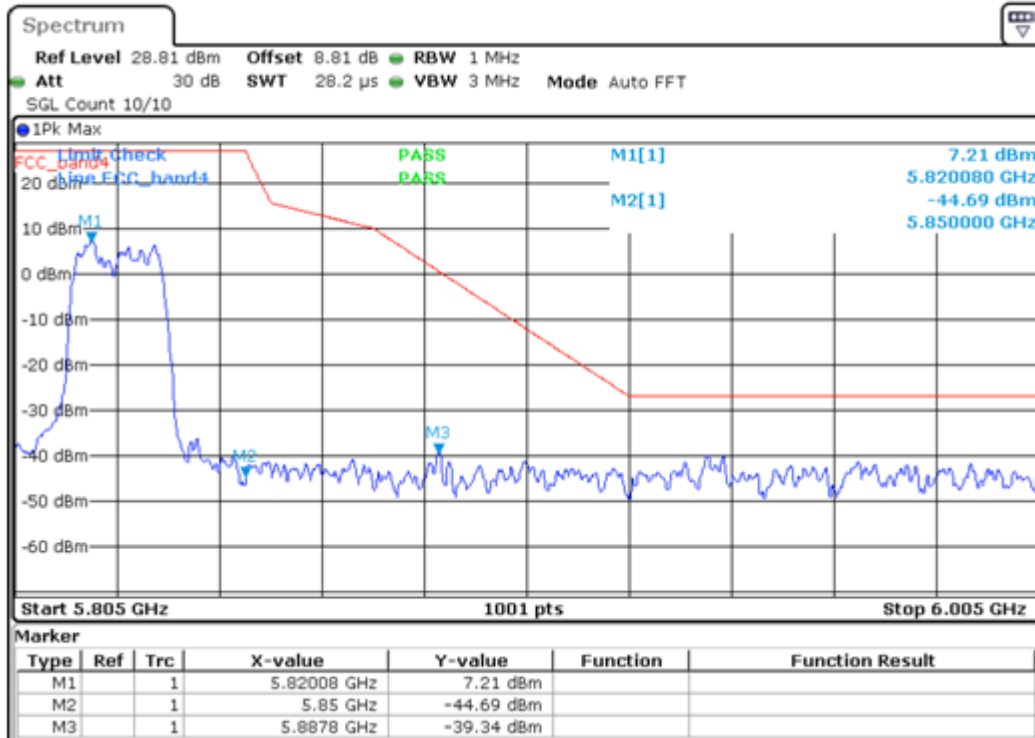


Band Edge NVNT 802.11ac40 5755MHz Ant1

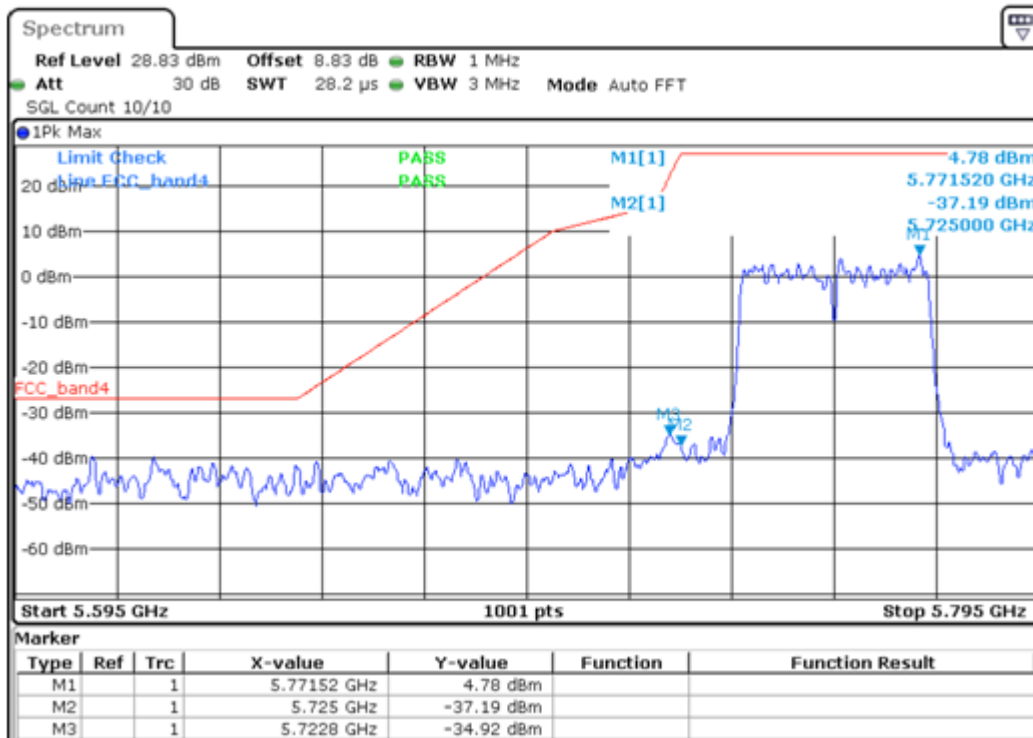


Band Edge NVNT 802.11ac40 5795MHz Ant1

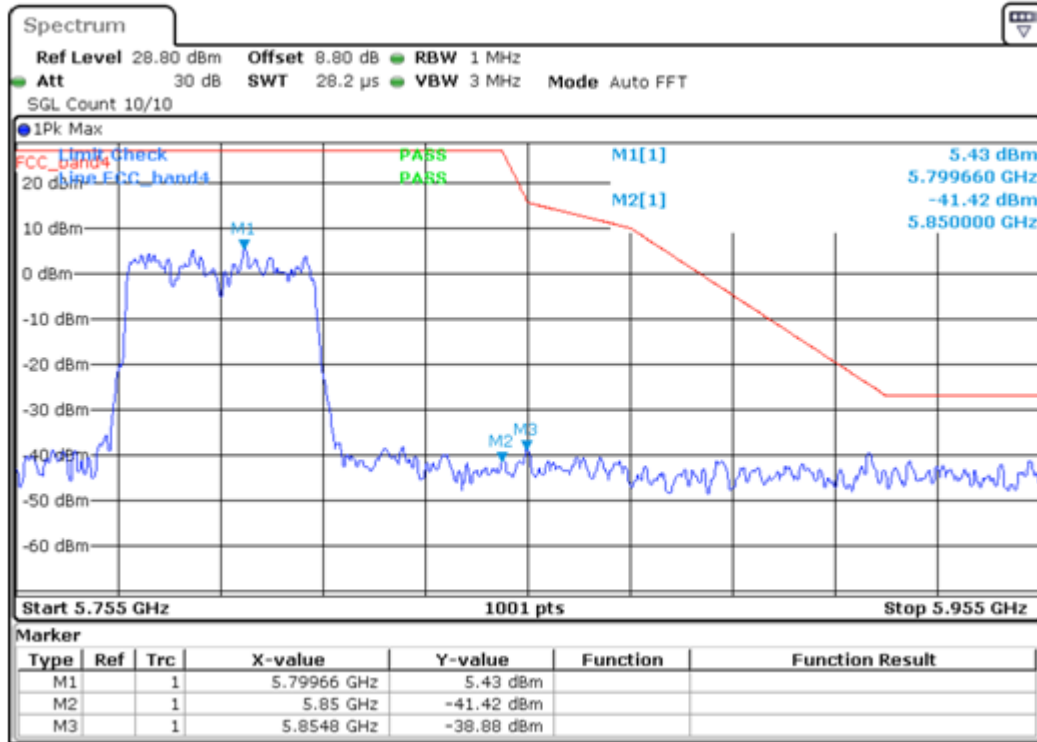


Band Edge NVNT 802.11ac80 5775MHz Ant1

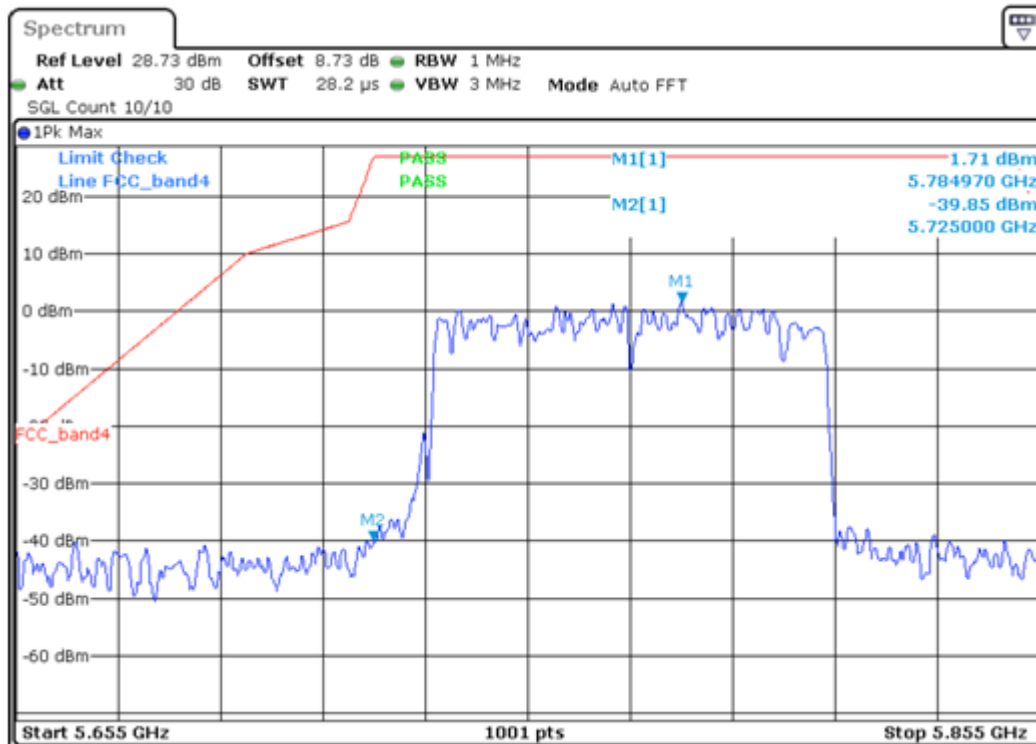


Band Edge NVNT 802.11n(HT20) 5745MHz Ant1

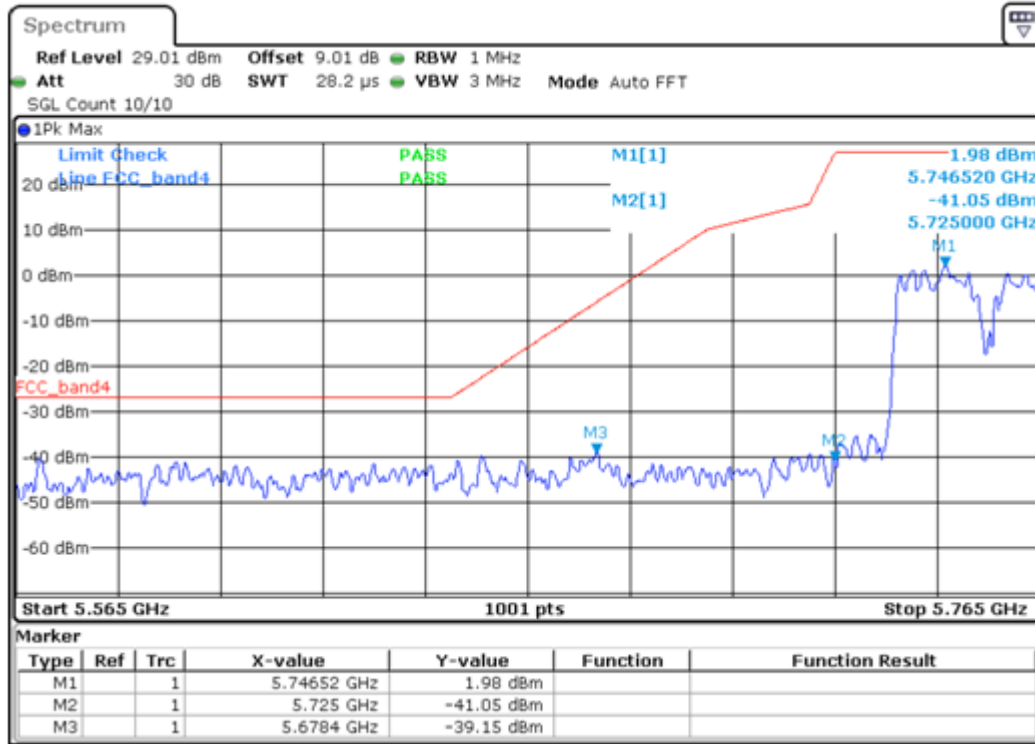


Band Edge NVNT 802.11n(HT20) 5825MHz Ant1

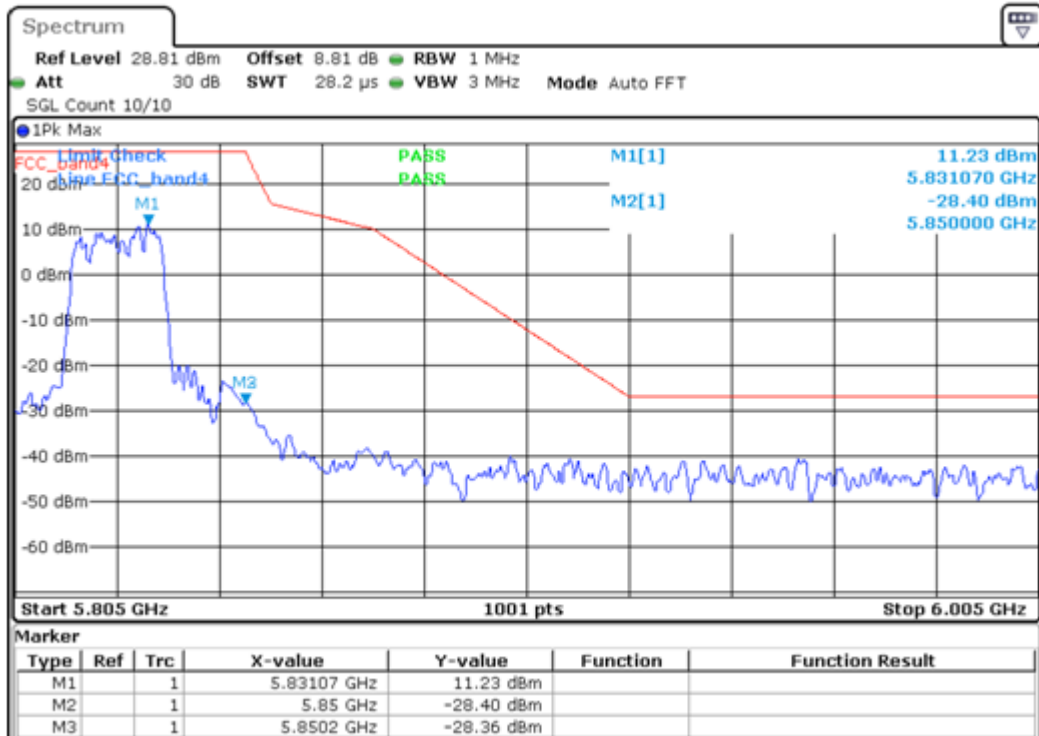

Band Edge NVNT 802.11n(HT40) 5755MHz Ant1

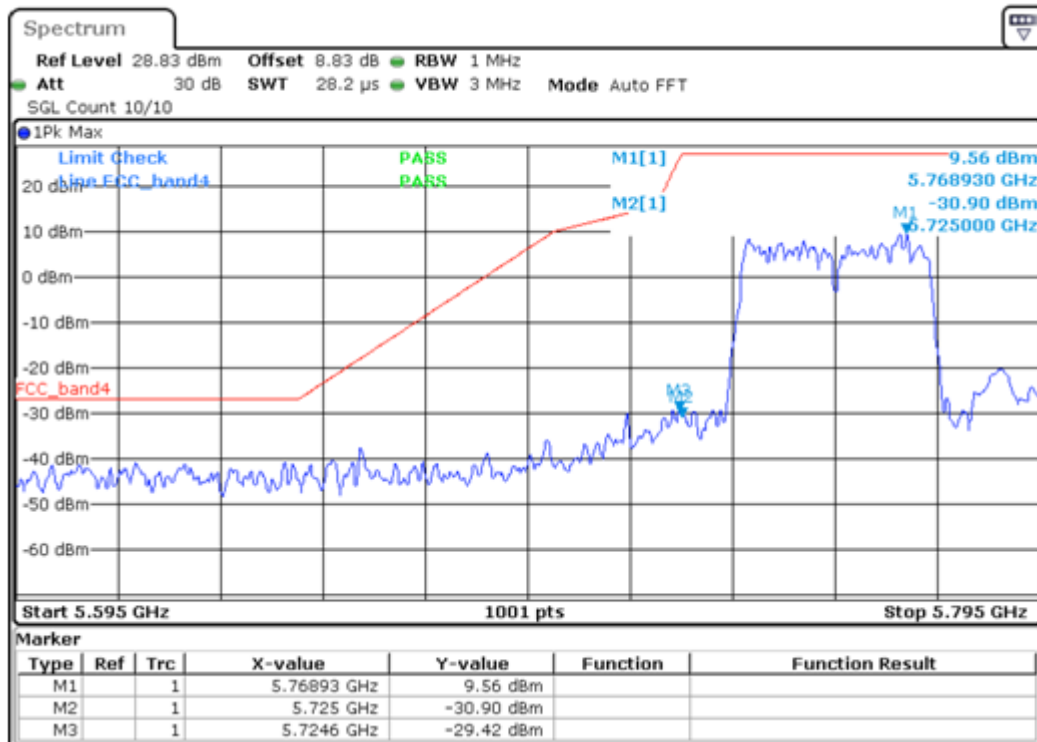



Band Edge NVNT 802.11n(HT40) 5795MHz Ant1

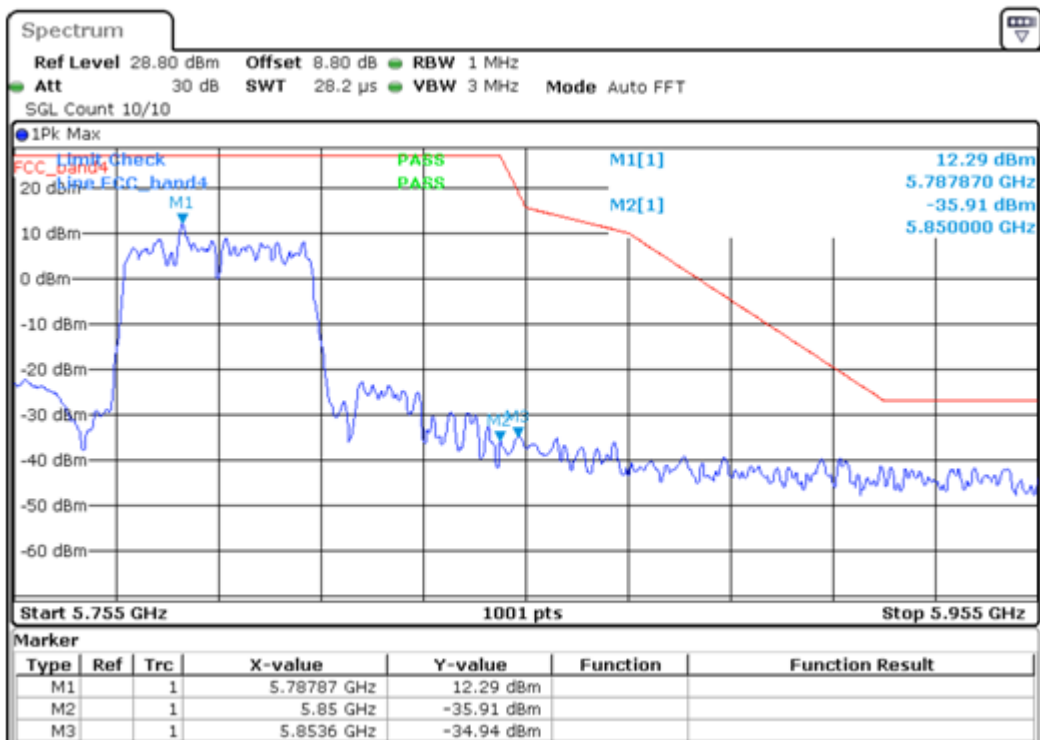

4.6 Radiated Emission


Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the				

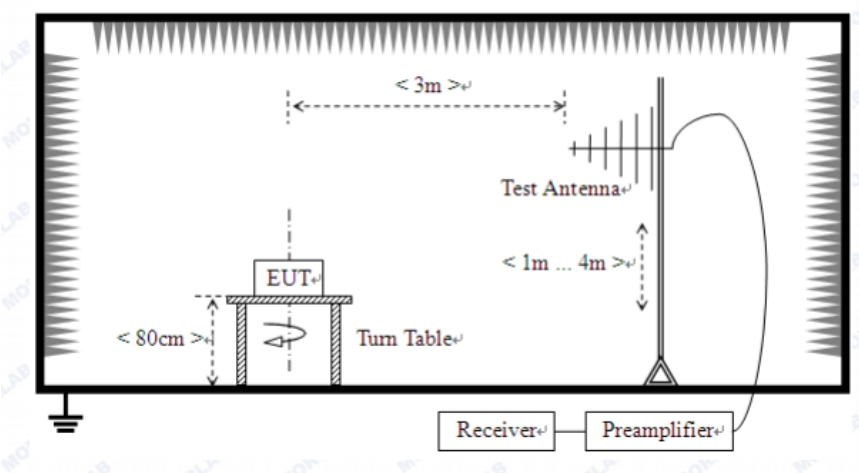	transmitter under test. - The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. - Repeat step 4 for test frequency with the test antenna polarized horizontally. - Remove the transmitter and replace it with a substitution antenna - Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. - Repeat step 7 with both antennas horizontally polarized for each test frequency. - Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

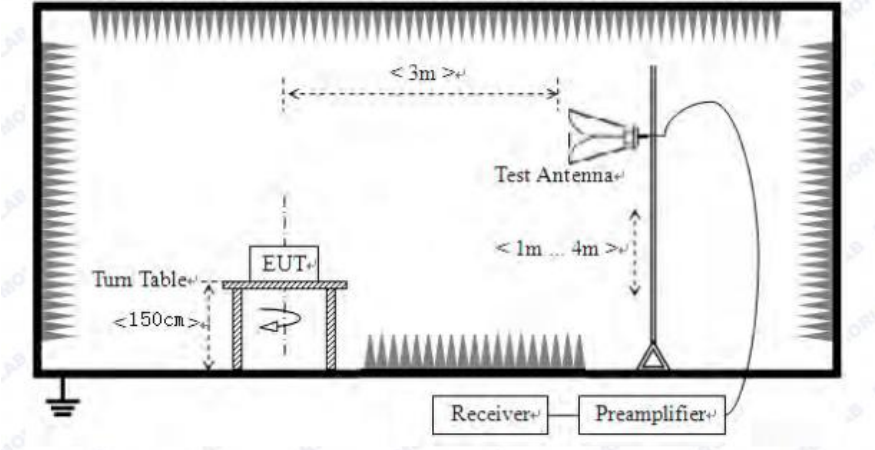
	
Test results:	Pass

From 30MHz to 1000MHz: Conclusion: PASS

EUT Description	Handheld data collection terminal	Model No.	P8II
Temperature	24°C	Humidity	56%
Pol	Vertical	Test date	2019/10/10
Test Voltage	DC 3.8V from motherboard	Test mode	802.11a (5240MHz)

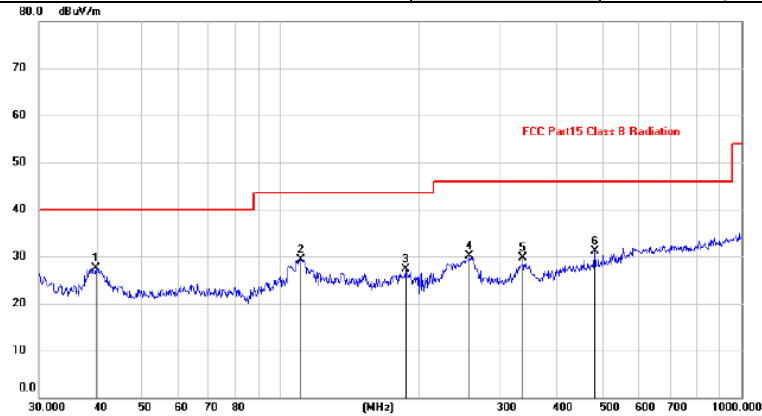

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	39.7146	12.98	14.47	27.45	40.00	-12.55	peak		
2		110.9569	17.40	11.95	29.35	43.50	-14.15	peak		
3		187.7529	15.47	11.74	27.21	43.50	-16.29	peak		
4		257.4221	17.14	12.92	30.06	46.00	-15.94	peak		
5		336.0350	14.72	14.98	29.70	46.00	-16.30	peak		
6		480.5276	13.09	17.96	31.05	46.00	-14.95	peak		

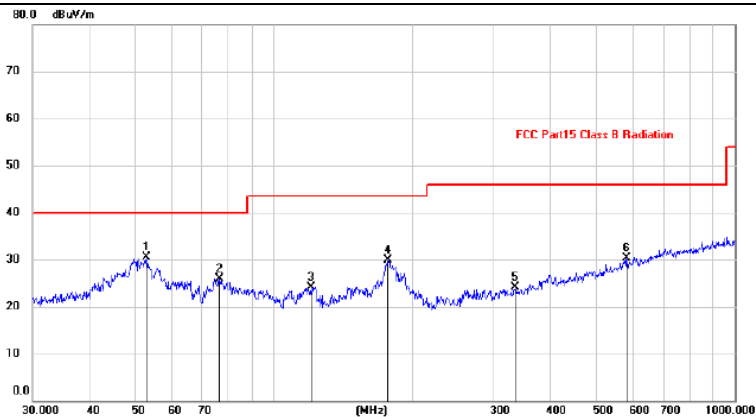Pol**Horizontal**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	52.9453	16.68	13.73	30.41	40.00	-9.59	peak		
2		76.2442	15.57	10.43	26.00	40.00	-14.00	peak		
3		120.2766	10.98	13.06	24.04	43.50	-19.46	peak		
4		177.5089	16.95	13.03	29.98	43.50	-13.52	peak		
5		333.6865	9.24	14.92	24.16	46.00	-21.84	peak		
6		584.7894	10.39	19.92	30.31	46.00	-15.69	peak		

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data was listed in this report.

Above 1GHz:**802.11a 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	29.04	39.67	14.62	32.65	50.68	74.00	-23.32	Vertical
15540	30.21	38.60	17.66	34.46	52.01	74.00	-21.99	Vertical
10360	31.00	39.67	14.62	32.65	52.64	74.00	-21.36	Horizontal
15540	32.81	38.60	17.66	34.46	54.61	74.00	-19.39	Horizontal

802.11a 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	27.07	39.67	14.62	32.65	48.71	74.00	-25.29	Vertical
15600	29.22	38.60	17.66	34.46	51.02	74.00	-22.98	Vertical
10400	33.03	39.67	14.62	32.65	54.67	74.00	-19.33	Horizontal
15600	32.92	38.60	17.66	34.46	54.72	74.00	-19.28	Horizontal

802.11a 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	26.42	39.67	14.62	32.65	48.06	74.00	-25.94	Vertical
15720	29.04	38.60	17.66	34.46	50.84	74.00	-23.16	Vertical
10480	29.98	39.67	14.62	32.65	51.62	74.00	-22.38	Horizontal
15720	33.78	38.60	17.66	34.46	55.58	74.00	-18.42	Horizontal

802.11ac20 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	28.03	39.67	14.62	32.65	49.67	74.00	-24.33	Vertical
15540	30.43	38.60	17.66	34.46	52.23	74.00	-21.77	Vertical
10360	32.99	39.67	14.62	32.65	54.63	74.00	-19.37	Horizontal
15540	33.78	38.60	17.66	34.46	55.58	74.00	-18.42	Horizontal

802.11ac20 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	26.67	39.67	14.62	32.65	48.31	74.00	-25.69	Vertical
15600	30.60	38.60	17.66	34.46	52.40	74.00	-21.60	Vertical
10400	30.85	39.67	14.62	32.65	52.49	74.00	-21.51	Horizontal
15600	30.77	38.60	17.66	34.46	52.57	74.00	-21.43	Horizontal

802.11ac20 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	28.27	39.67	14.62	32.65	49.91	74.00	-24.09	Vertical
15720	28.99	38.60	17.66	34.46	50.79	74.00	-23.21	Vertical
10480	32.59	39.67	14.62	32.65	54.23	74.00	-19.77	Horizontal
15720	33.36	38.60	17.66	34.46	55.16	74.00	-18.84	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	28.63	39.67	14.62	32.65	50.27	74.00	-23.73	Vertical
15540	31.84	38.60	17.66	34.46	53.64	74.00	-20.36	Vertical
10360	30.45	39.67	14.62	32.65	52.09	74.00	-21.91	Horizontal
15540	30.78	38.60	17.66	34.46	52.58	74.00	-21.42	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	27.24	39.67	14.62	32.65	48.88	74.00	-25.12	Vertical
15600	31.55	38.60	17.66	34.46	53.35	74.00	-20.65	Vertical
10400	32.37	39.67	14.62	32.65	54.01	74.00	-19.99	Horizontal
15600	29.88	38.60	17.66	34.46	51.68	74.00	-22.32	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	29.95	39.67	14.62	32.65	51.59	74.00	-22.41	Vertical
15720	29.79	38.60	17.66	34.46	51.59	74.00	-22.41	Vertical
10480	33.45	39.67	14.62	32.65	55.09	74.00	-18.91	Horizontal
15720	32.10	38.60	17.66	34.46	53.90	74.00	-20.10	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	26.98	39.67	14.62	32.65	48.62	74.00	-25.38	Vertical
15570	31.63	38.60	17.66	34.46	53.43	74.00	-20.57	Vertical
10380	32.58	39.67	14.62	32.65	54.22	74.00	-19.78	Horizontal
15570	30.35	38.60	17.66	34.46	52.15	74.00	-21.85	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	28.94	39.67	14.62	32.65	50.58	74.00	-23.42	Vertical
15690	31.39	38.60	17.66	34.46	53.19	74.00	-20.81	Vertical
10460	29.96	39.67	14.62	32.65	51.60	74.00	-22.40	Horizontal
15690	32.16	38.60	17.66	34.46	53.96	74.00	-20.04	Horizontal

802.11ac40 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	27.53	39.67	14.62	32.65	49.17	74.00	-24.83	Vertical
15570	30.05	38.60	17.66	34.46	51.85	74.00	-22.15	Vertical
10380	31.28	39.67	14.62	32.65	52.92	74.00	-21.08	Horizontal
15570	31.62	38.60	17.66	34.46	53.42	74.00	-20.58	Horizontal

802.11ac40 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	27.53	39.67	14.62	32.65	49.17	74.00	-24.83	Vertical
15690	30.05	38.60	17.66	34.46	51.85	74.00	-22.15	Vertical
10460	31.28	39.67	14.62	32.65	52.92	74.00	-21.08	Horizontal
15690	31.62	38.60	17.66	34.46	53.42	74.00	-20.58	Horizontal


802.11ac80 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	29.08	39.67	14.62	32.65	50.72	74.00	-23.28	Vertical
15630	31.53	38.60	17.66	34.46	53.33	74.00	-20.67	Vertical
10420	33.61	39.67	14.62	32.65	55.25	74.00	-18.75	Horizontal
15630	30.53	38.60	17.66	34.46	52.33	74.00	-21.67	Horizontal

Note:


1. Level = Read Level + Antenna Factor+ Cable loss- Preamplifier Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case (U-NII-1).

4.7 Frequency Stability Measurement

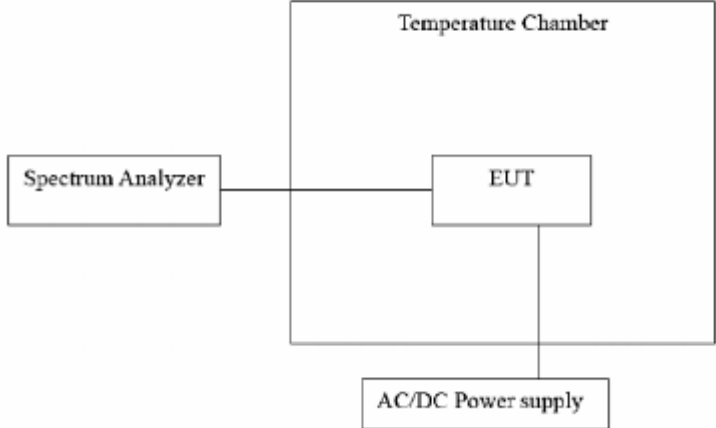Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	 <pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end EUT --- P[AC/DC Power supply] </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	Only record the worst data.


U-NII-1						
Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	802.11a	5180	5179.96	7.72	25	Pass
NVNT	802.11a	5200	5200.02	3.85	25	Pass
NVNT	802.11a	5240	5239.98	3.82	25	Pass
NVNT	802.11ac20	5180	5179.93	1.35	25	Pass
NVNT	802.11ac20	5200	5200.02	3.85	25	Pass
NVNT	802.11ac20	5240	5239.98	3.82	25	Pass
NVNT	802.11ac40	5190	5189.96	7.71	25	Pass
NVNT	802.11ac40	5230	5230.00	0	25	Pass
NVNT	802.11ac80	5210	5210.00	0	25	Pass
NVNT	802.11n(HT20)	5180	5179.94	1.16	25	Pass
NVNT	802.11n(HT20)	5200	5200.00	0	25	Pass
NVNT	802.11n(HT20)	5240	5239.98	3.82	25	Pass
NVNT	802.11n(HT40)	5190	5190.00	0	25	Pass
NVNT	802.11n(HT40)	5230	5229.96	7.65	25	Pass

Freq. Stability NVNT 802.11a 5180MHz

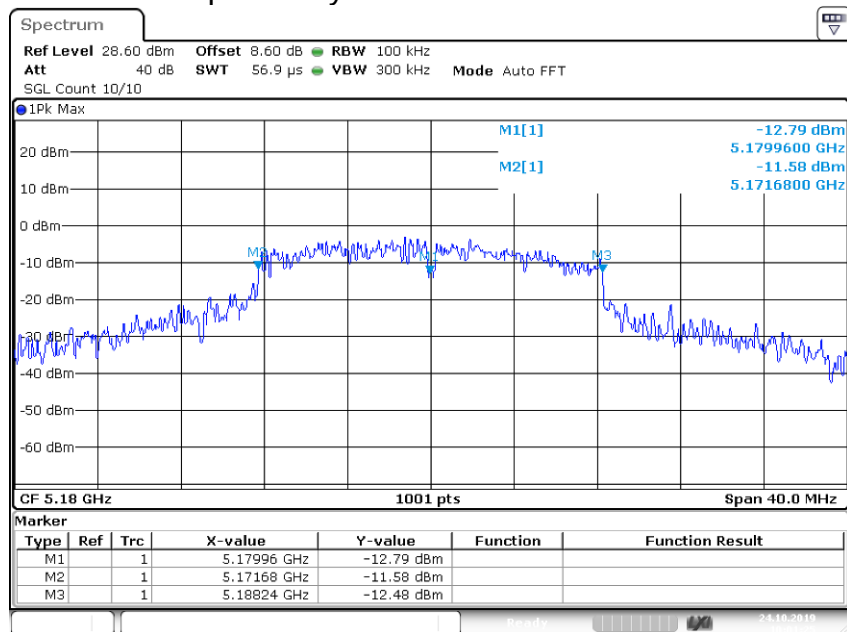


Date: 24.OCT.2019 10:01:25


Freq. Stability NVNT 802.11a 5200MHz

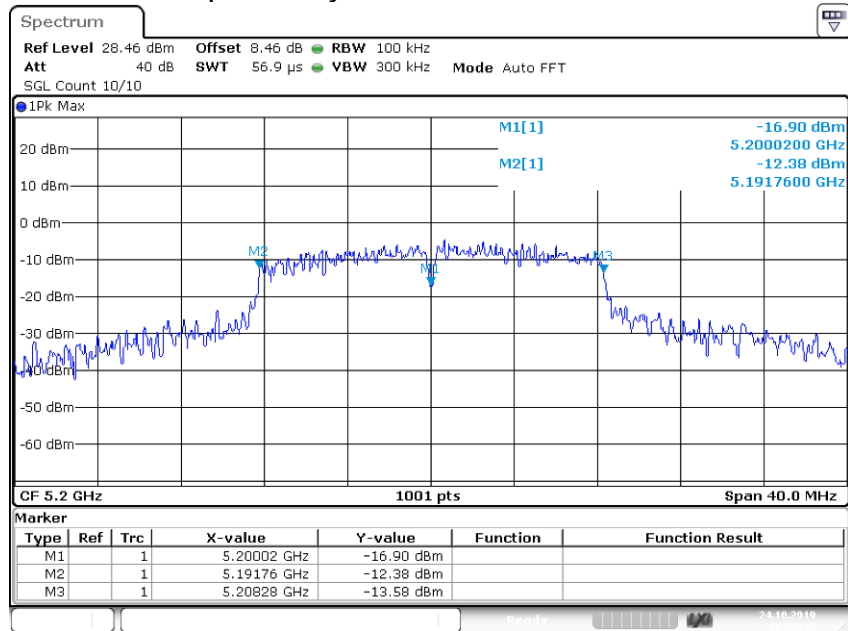

Freq. Stability NVNT 802.11a 5240MHz

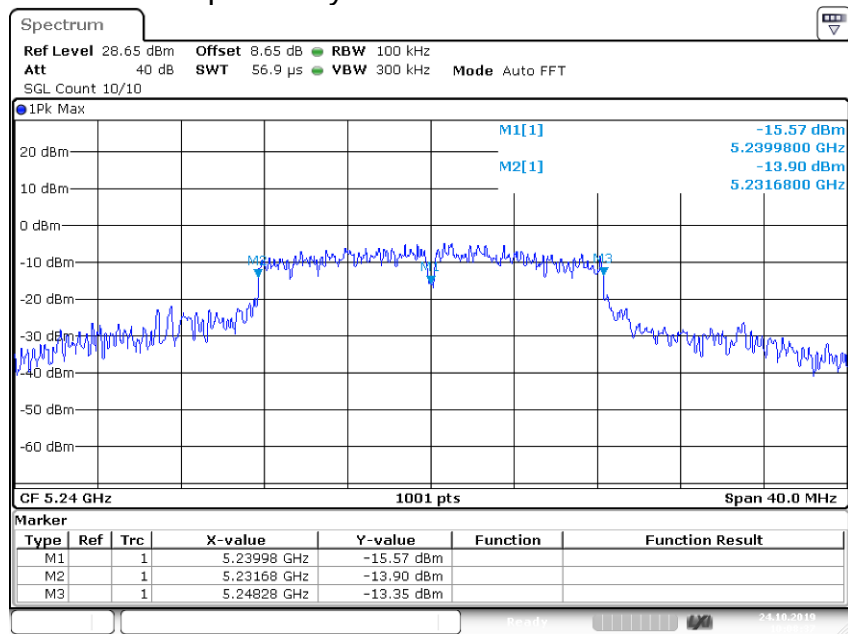


Freq. Stability NVNT 802.11ac20 5180MHz

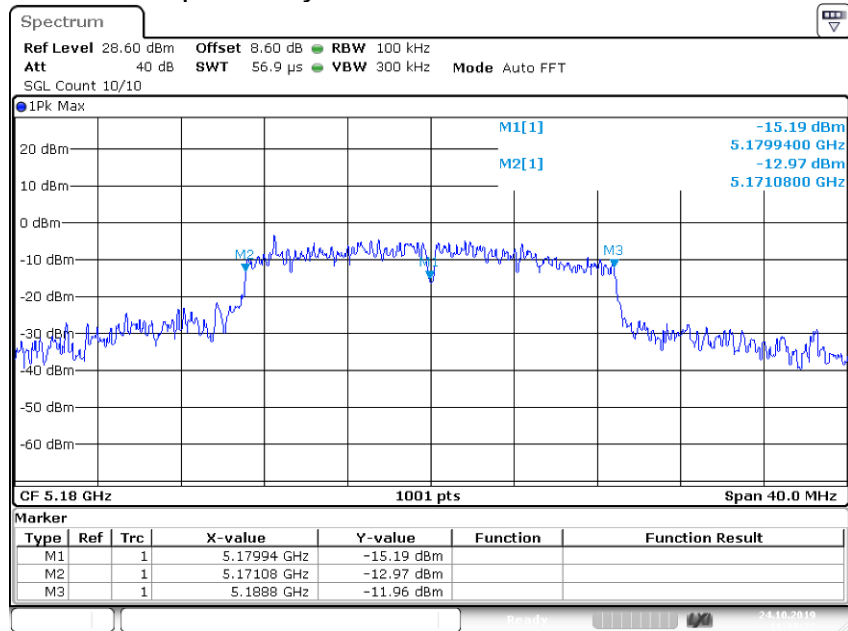


Date: 24.OCT.2019 11:39:21

Freq. Stability NVNT 802.11ac20 5200MHz

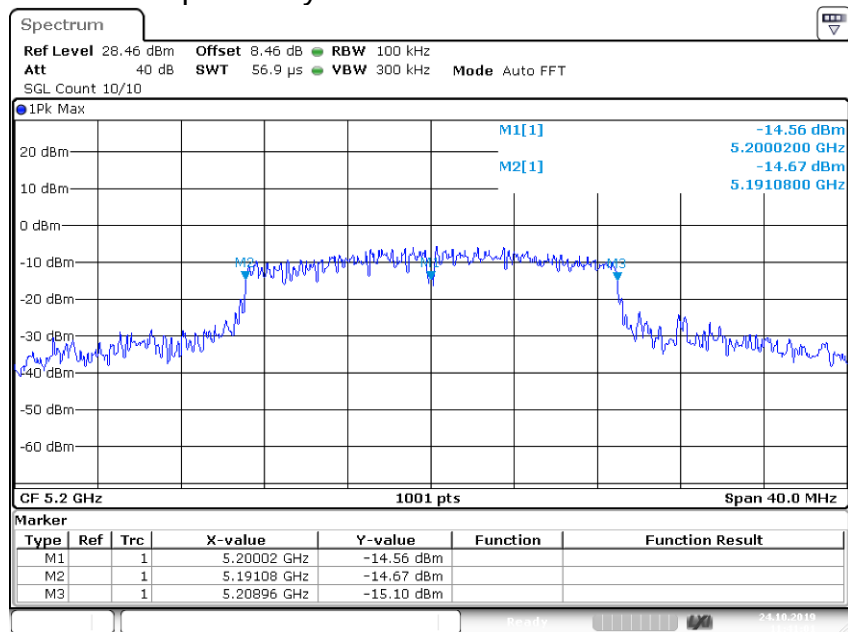


Date: 24.OCT.2019 11:41:01

Freq. Stability NVNT 802.11ac20 5240MHz

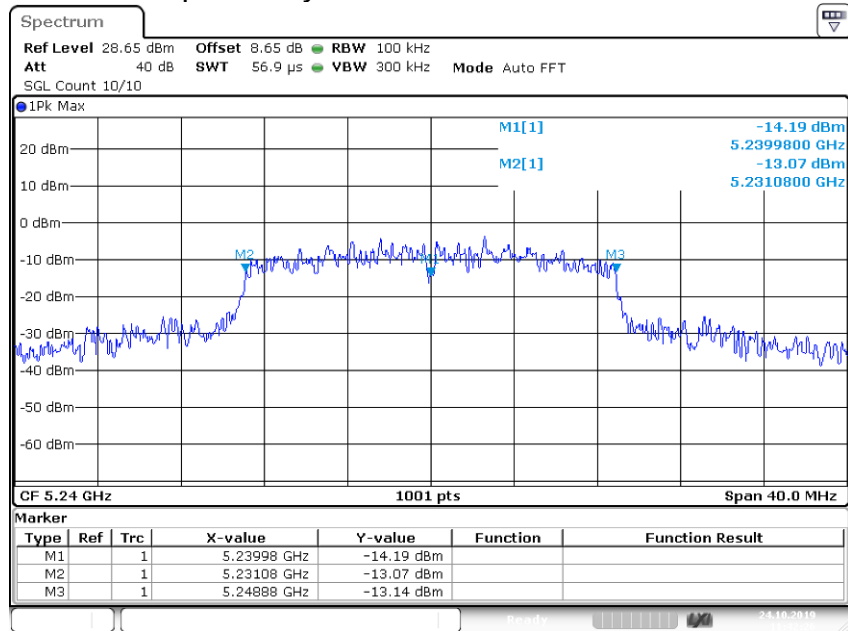


Date: 24.OCT.2019 11:42:26

Freq. Stability NVNT 802.11ac40 5190MHz

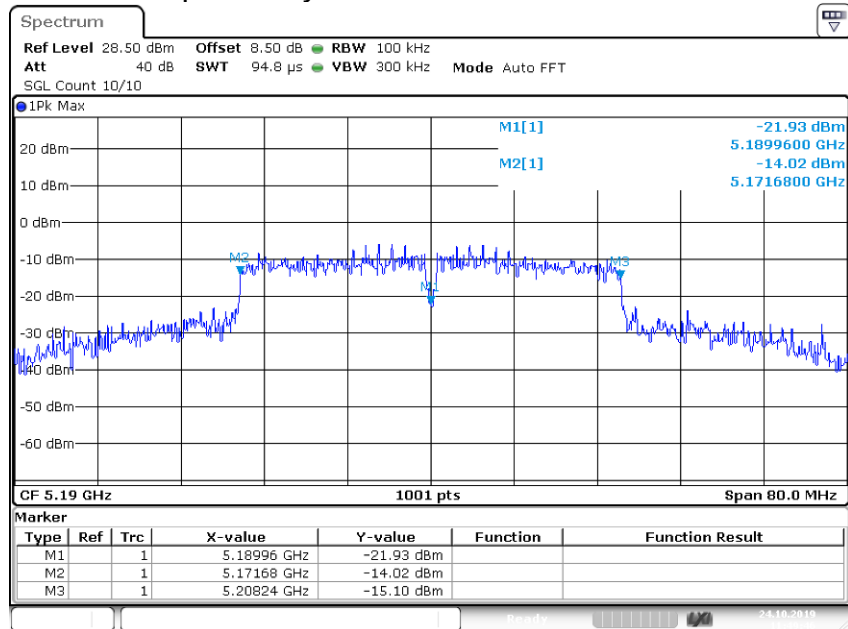


Date: 24.OCT.2019 11:49:46


Freq. Stability NVNT 802.11ac40 5230MHz

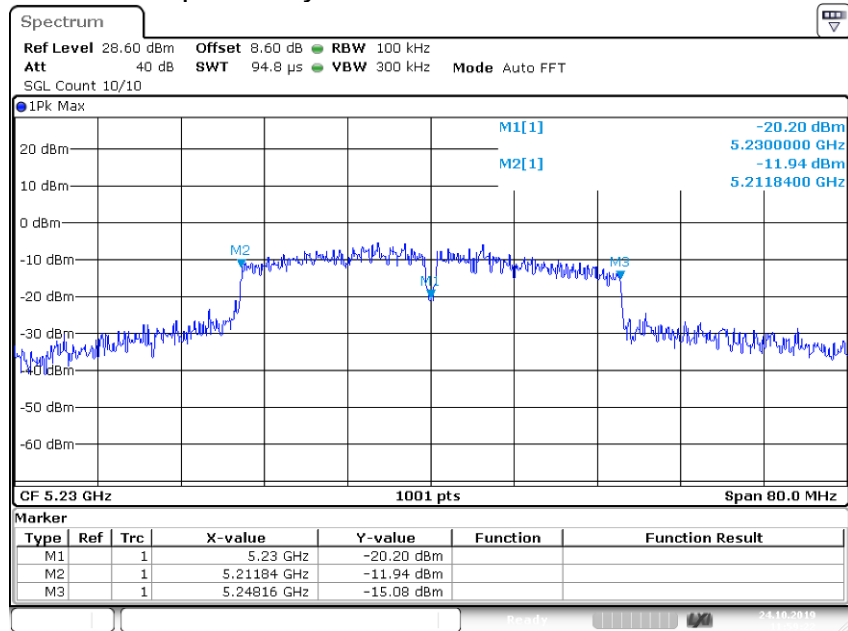

Freq. Stability NVNT 802.11ac80 5210MHz

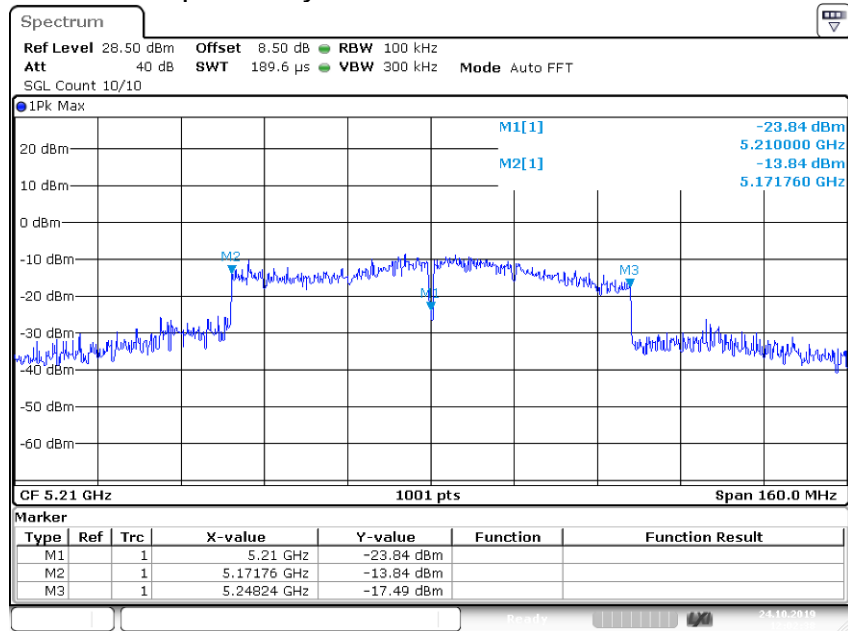


Freq. Stability NVNT 802.11n(HT20) 5180MHz

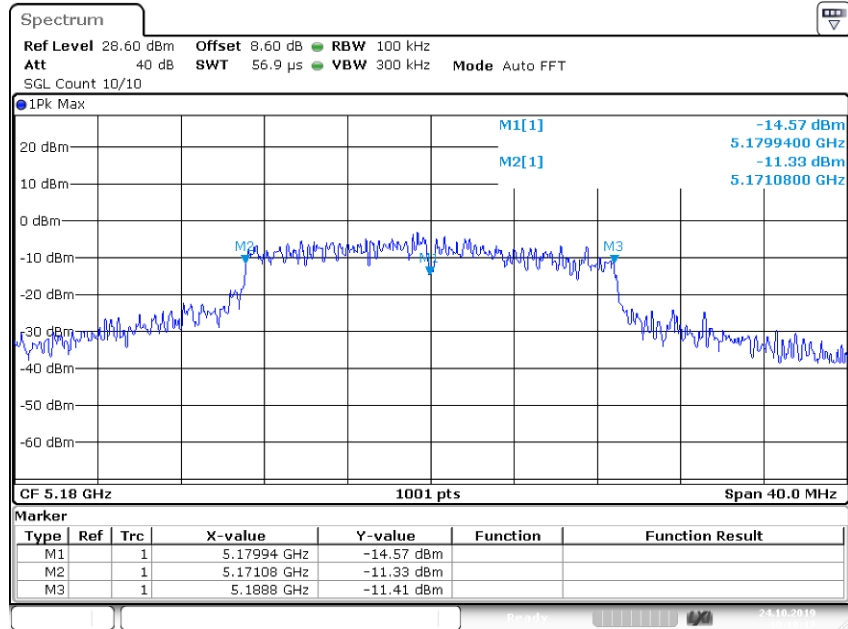


Date: 24.OCT.2019 10:10:17

Freq. Stability NVNT 802.11n(HT20) 5200MHz

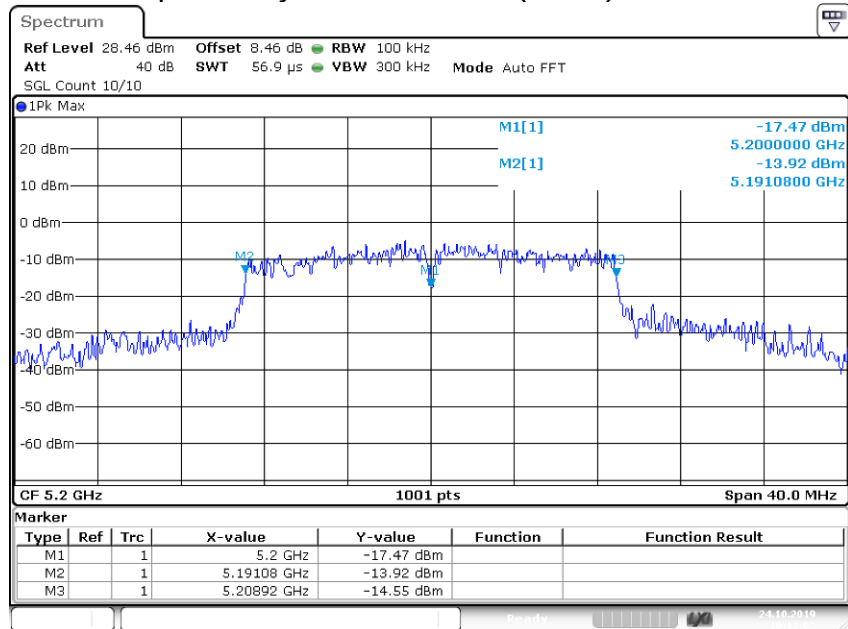


Date: 24.OCT.2019 10:12:02

Freq. Stability NVNT 802.11n(HT20) 5240MHz

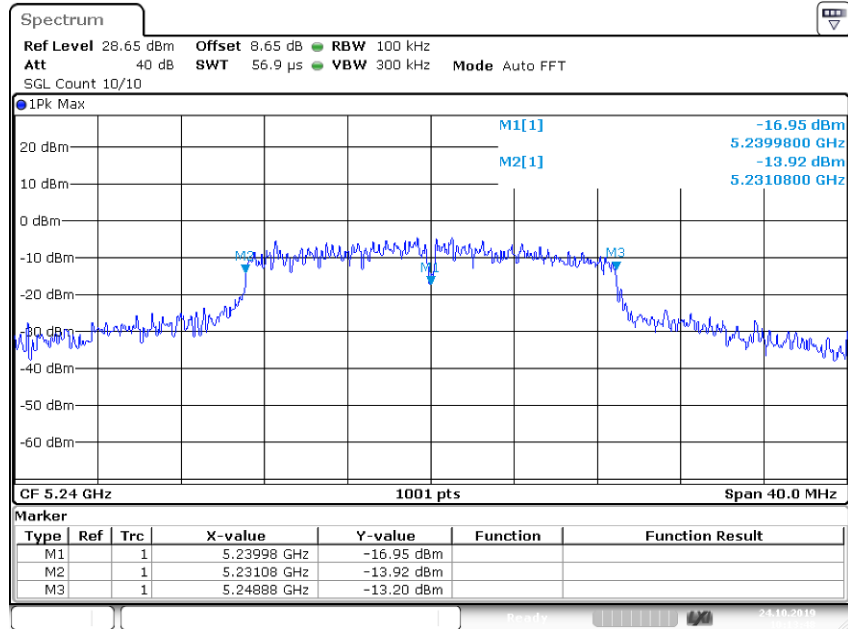


Date: 24.OCT.2019 10:13:47

Freq. Stability NVNT 802.11n(HT40) 5190MHz

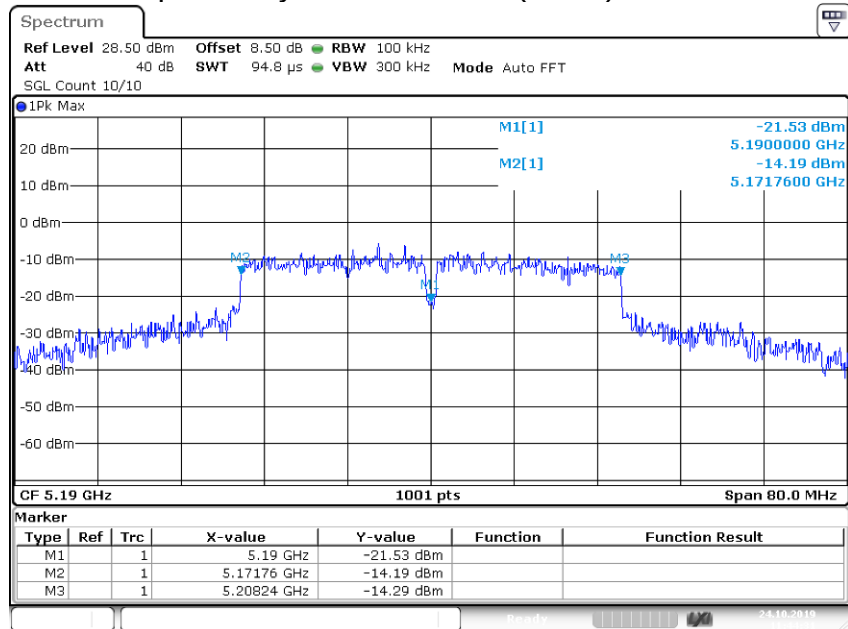

Date: 24.OCT.2019 11:44:31


Freq. Stability NVNT 802.11n(HT40) 5230MHz

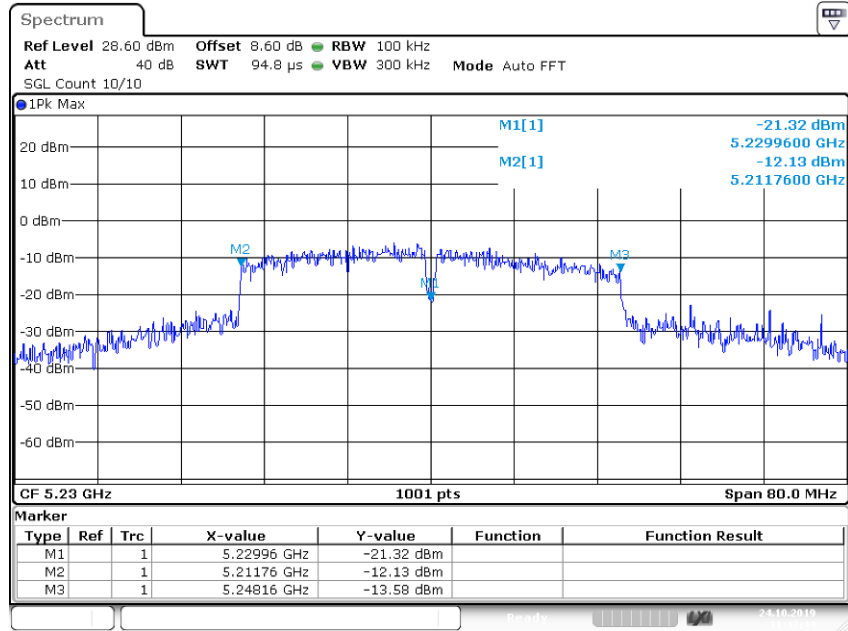

Date: 24.OCT.2019 11:47:44


U-NII-2A						
Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVLT	802.11a	5260	5260.02	3.8	25	Pass
NVLT	802.11a	5280	5280	0	25	Pass
NVLT	802.11a	5320	5320.02	3.76	25	Pass
NVLT	802.11ac20	5260	5260.04	7.6	25	Pass
NVLT	802.11ac20	5280	5279.98	3.79	25	Pass
NVLT	802.11ac20	5320	5319.98	3.76	25	Pass
NVLT	802.11ac40	5270	5270	0	25	Pass
NVLT	802.11ac40	5310	5310	0	25	Pass
NVLT	802.11ac80	5290	5290	0	25	Pass
NVLT	802.11n(HT20)	5260	5259.96	7.6	25	Pass
NVLT	802.11n(HT20)	5280	5280	0	25	Pass
NVLT	802.11n(HT20)	5320	5320.02	3.76	25	Pass
NVLT	802.11n(HT40)	5270	5270	0	25	Pass
NVLT	802.11n(HT40)	5310	5310.04	7.53	25	Pass

Freq. Stability NVLT 802.11a 5260MHz

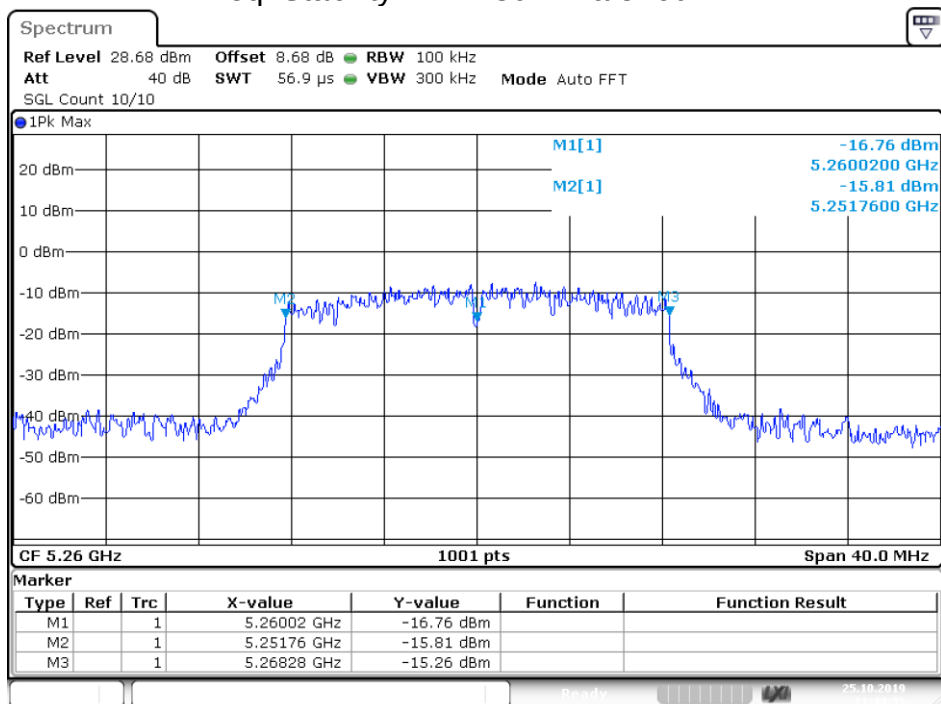


Date: 25.OCT.2019 11:44:35

Freq. Stability NVLT 802.11a 5280MHz

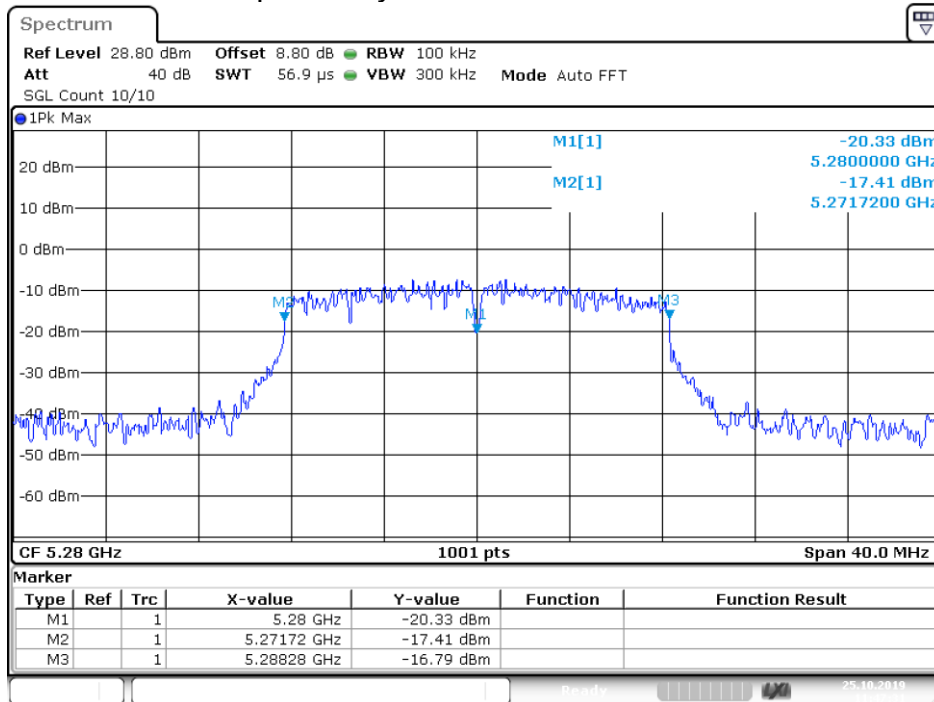


Date: 25.OCT.2019 11:47:30

Freq. Stability NVLT 802.11a 5320MHz

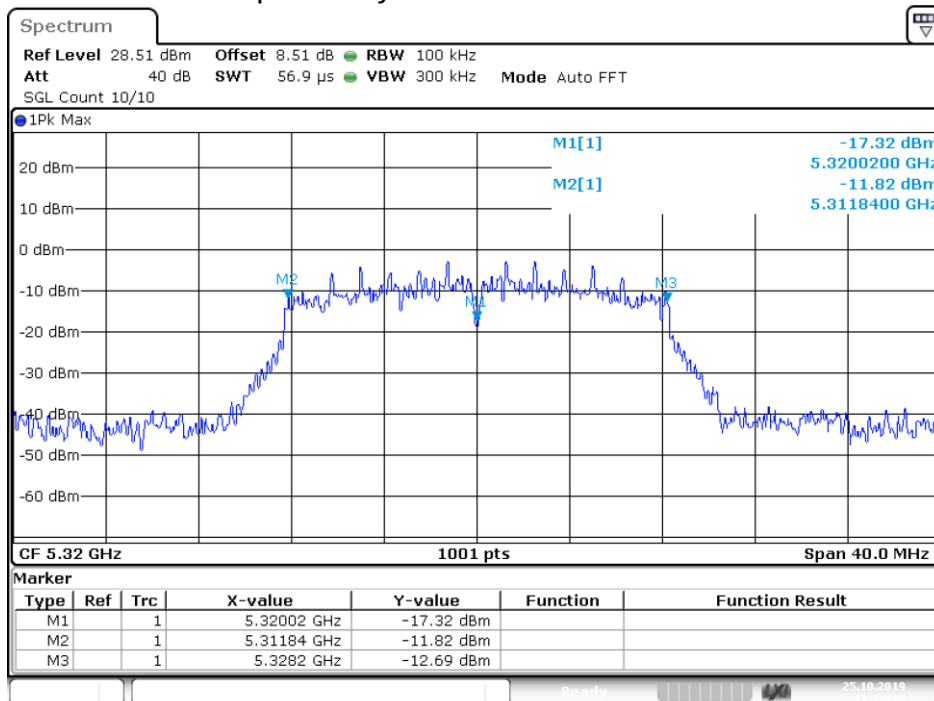


Date: 25.OCT.2019 11:58:25

Freq. Stability NVLT 802.11ac20 5260MHz

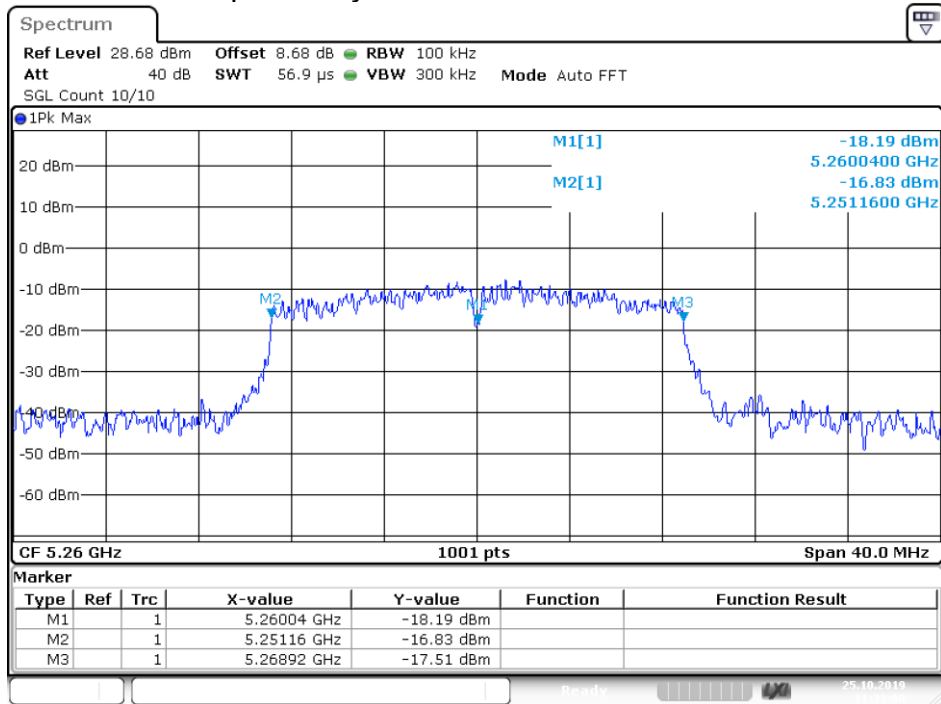


Date: 25.OCT.2019 11:33:01

Freq. Stability NVLT 802.11ac20 5280MHz

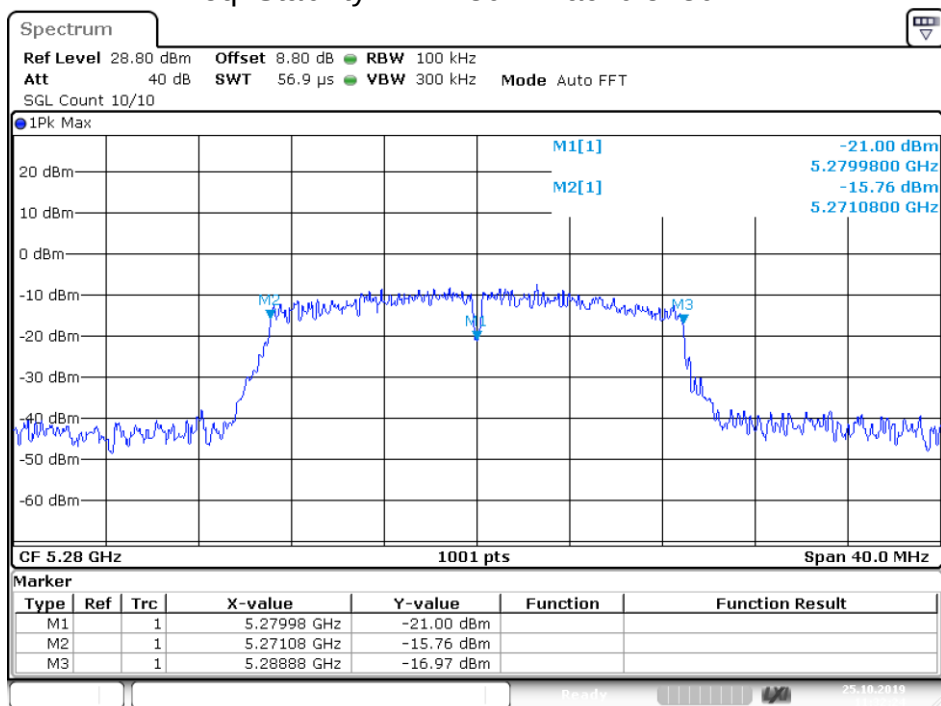


Date: 25.OCT.2019 11:32:25

Freq. Stability NVLT 802.11ac20 5320MHz

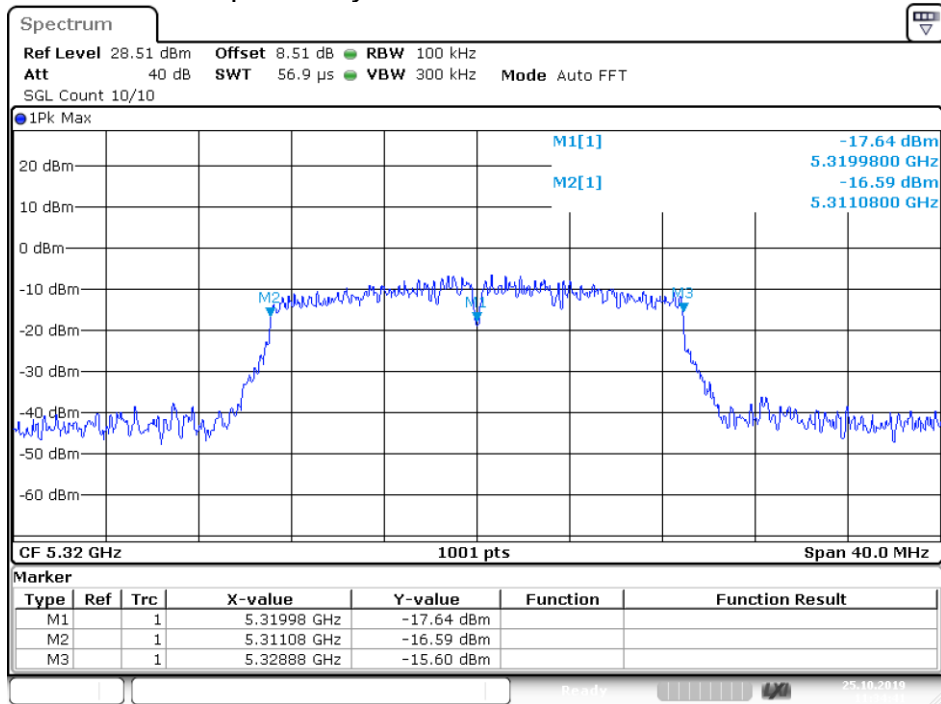


Date: 25.OCT.2019 11:34:41

Freq. Stability NVLT 802.11ac40 5270MHz

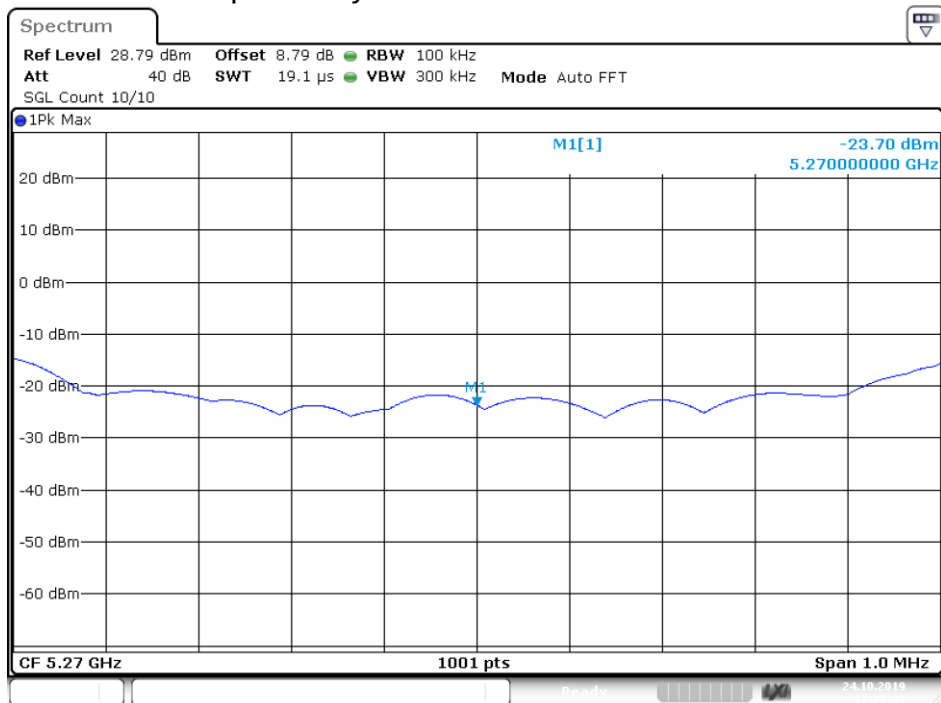


Date: 24.OCT.2019 12:28:39

Freq. Stability NVLT 802.11ac40 5310MHz

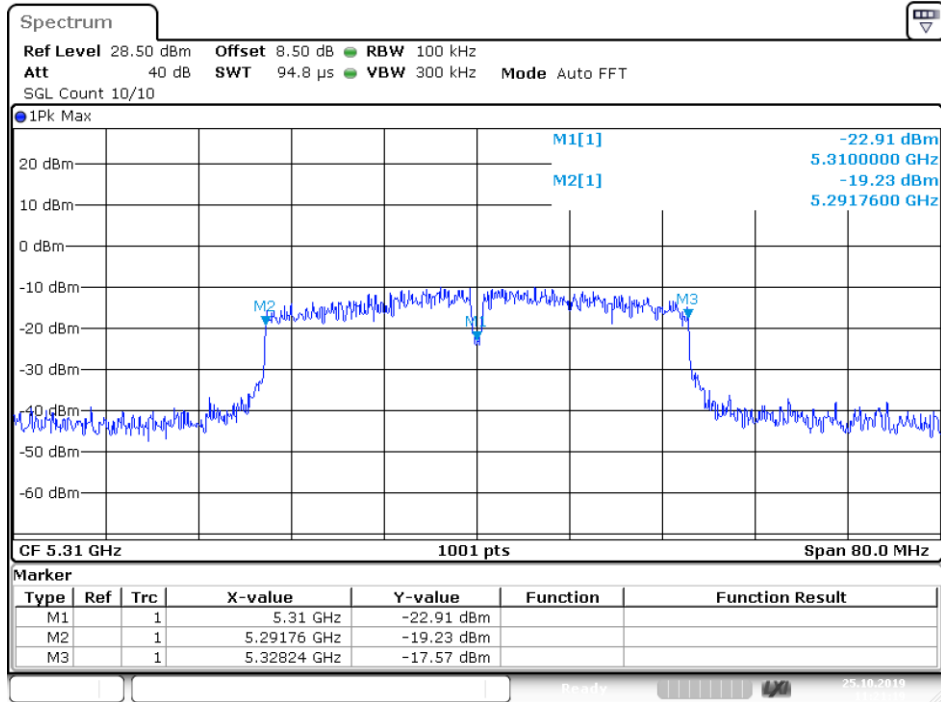


Date: 25.OCT.2019 11:21:18

Freq. Stability NVLT 802.11ac80 5290MHz

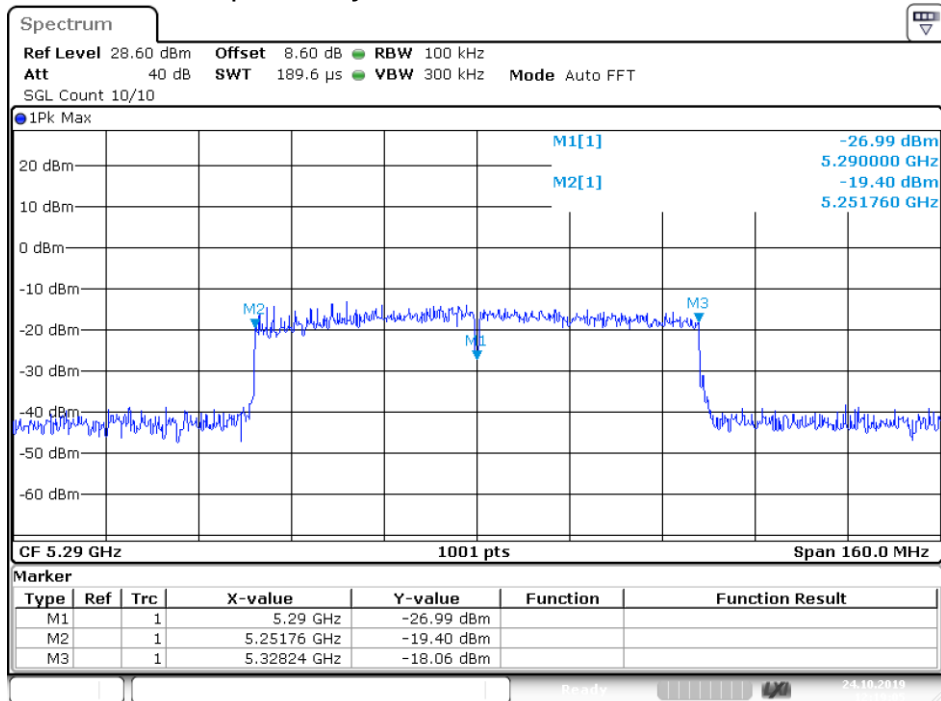


Date: 24.OCT.2019 12:19:05

Freq. Stability NVLT 802.11n(HT20) 5260MHz

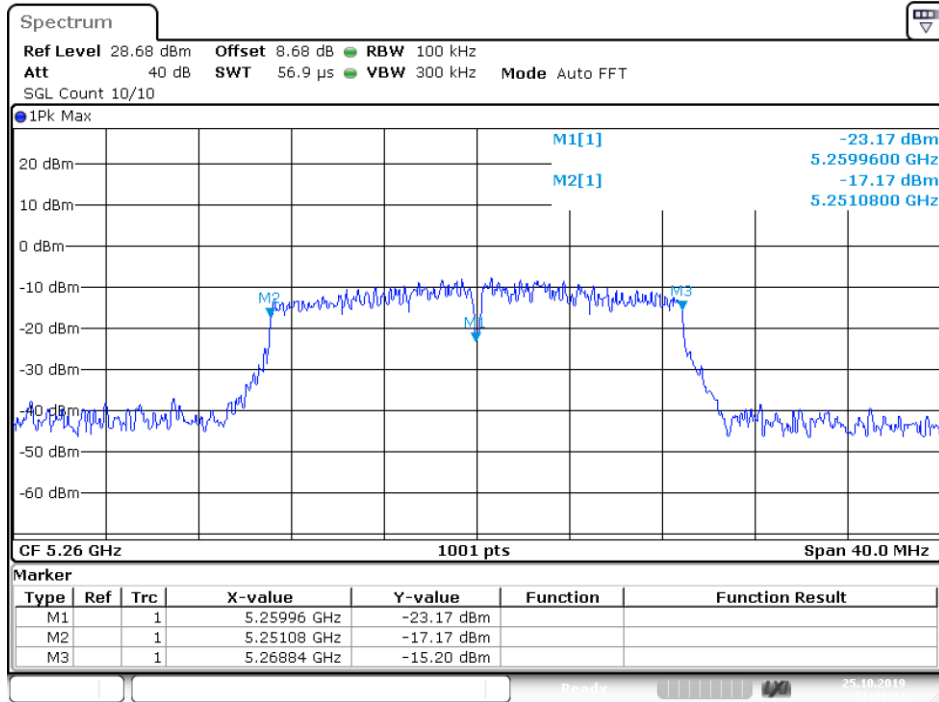


Date: 25.OCT.2019 11:41:24

Freq. Stability NVLT 802.11n(HT20) 5280MHz

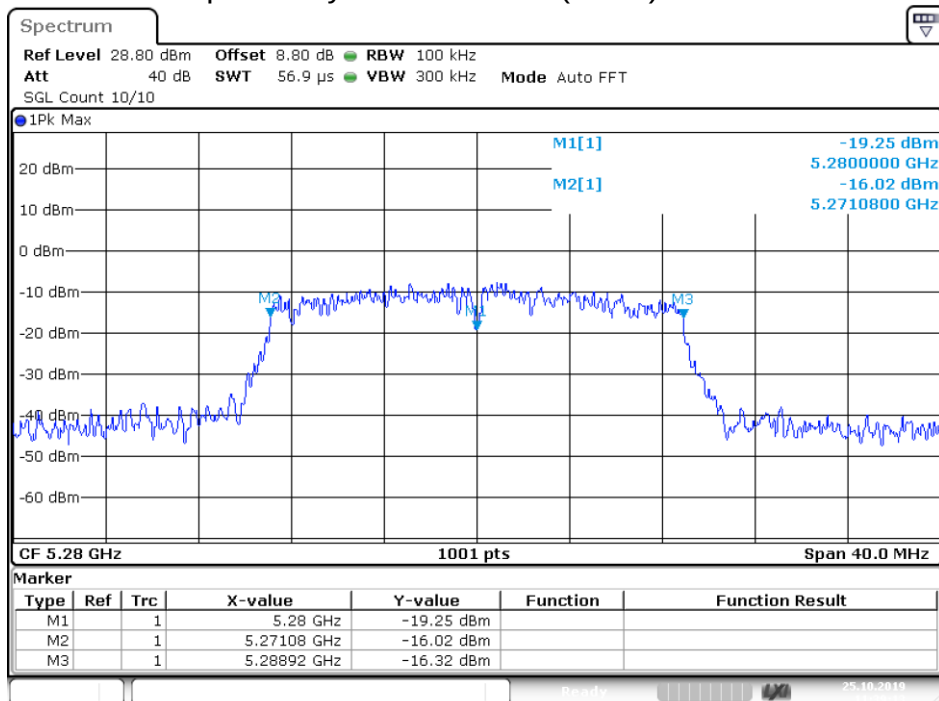


Date: 25.OCT.2019 11:39:13

Freq. Stability NVLT 802.11n(HT20) 5320MHz

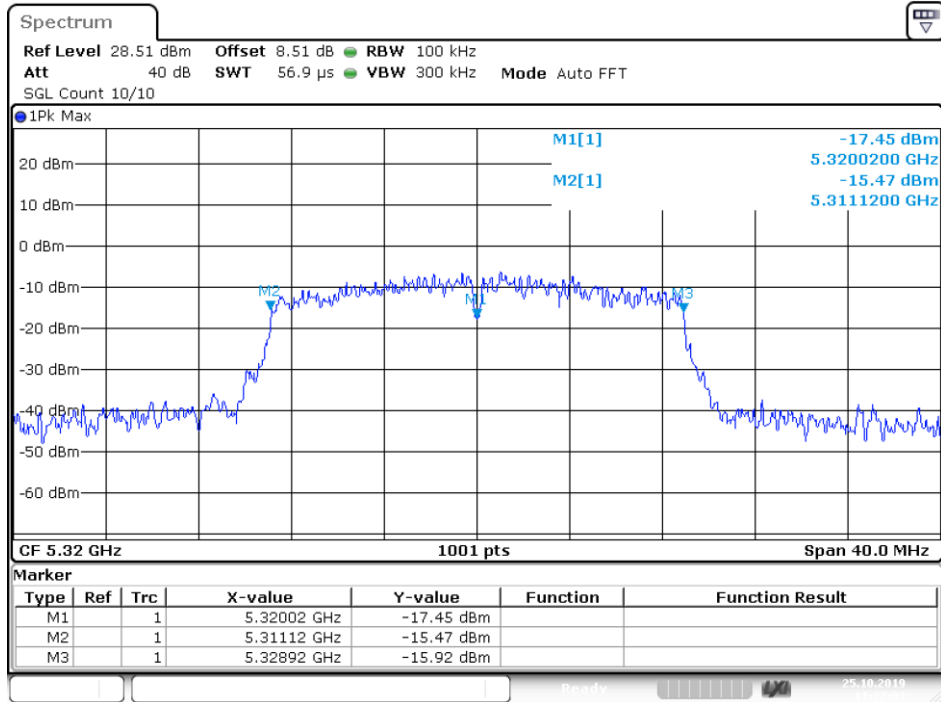


Date: 25.OCT.2019 11:37:04

Freq. Stability NVLT 802.11n(HT40) 5270MHz

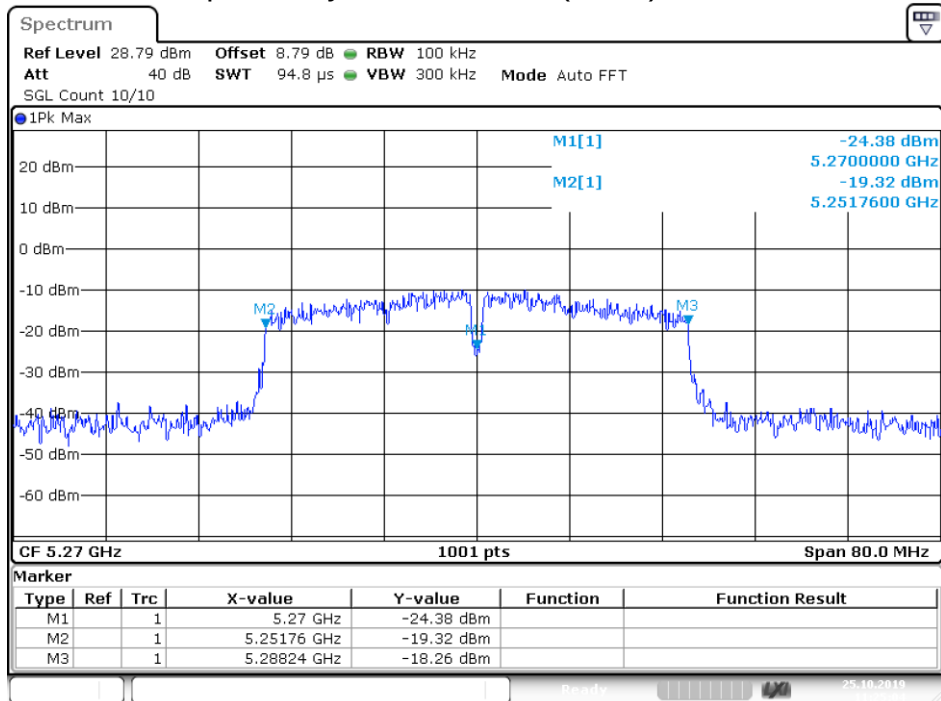

Date: 25.OCT.2019 11:25:04


Freq. Stability NVLT 802.11n(HT40) 5310MHz

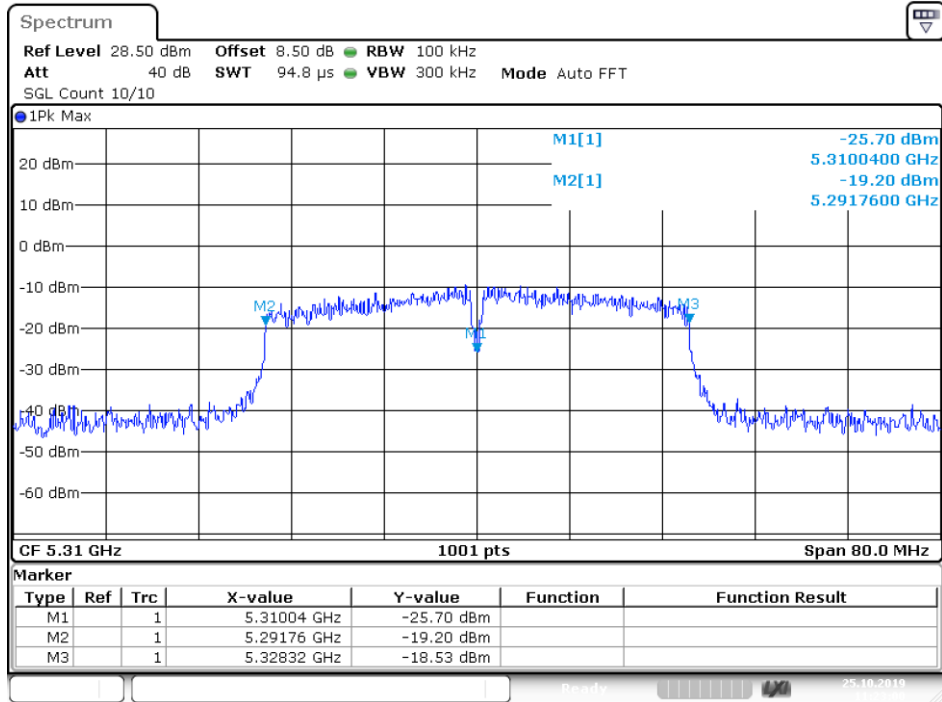

Date: 25.OCT.2019 11:23:00


U-NII-3						
Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	802.11a	5745	5744.98	3.48	25	Pass
NVNT	802.11a	5785	5785.04	6.91	25	Pass
NVNT	802.11a	5825	5825	0	25	Pass
NVNT	802.11ac20	5745	5744.98	3.48	25	Pass
NVNT	802.11ac20	5785	5785.02	3.46	25	Pass
NVNT	802.11ac20	5825	5825.02	3.43	25	Pass
NVNT	802.11ac40	5755	5755	0	25	Pass
NVNT	802.11ac40	5795	5795.12	20.71	25	Pass
NVNT	802.11ac80	5775	5775	0	25	Pass
NVNT	802.11n(HT20)	5745	5745	0	25	Pass
NVNT	802.11n(HT20)	5785	5785.02	3.46	25	Pass
NVNT	802.11n(HT20)	5825	5825	0	25	Pass
NVNT	802.11n(HT40)	5755	5754.96	6.95	25	Pass
NVNT	802.11n(HT40)	5795	5795	0	25	Pass

Freq. Stability NVNT 802.11a 5745MHz

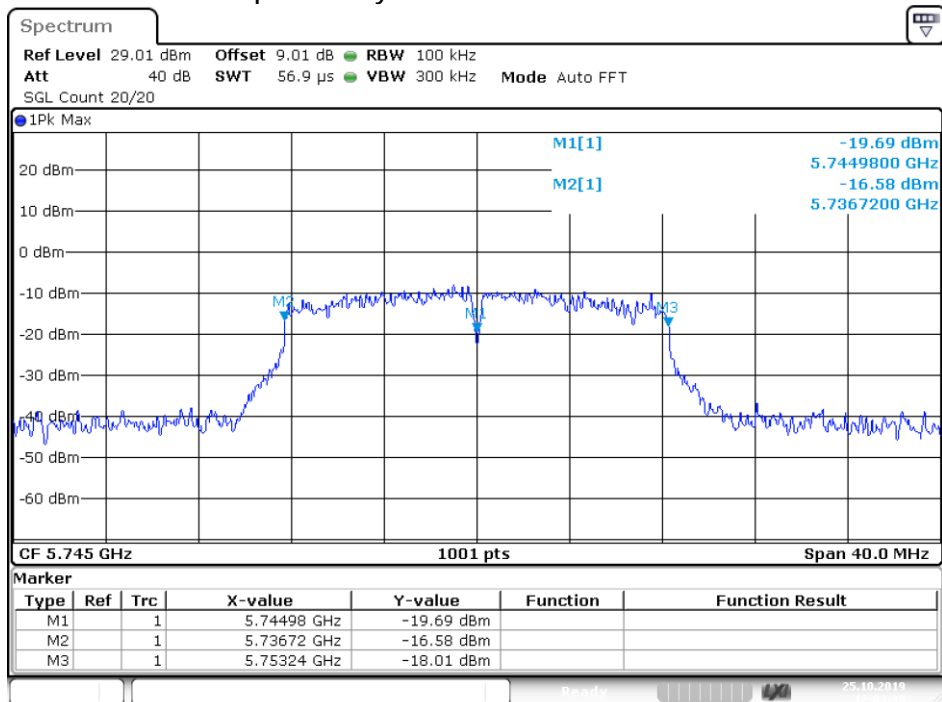


Date: 25.OCT.2019 12:03:39

Freq. Stability NVNT 802.11a 5785MHz

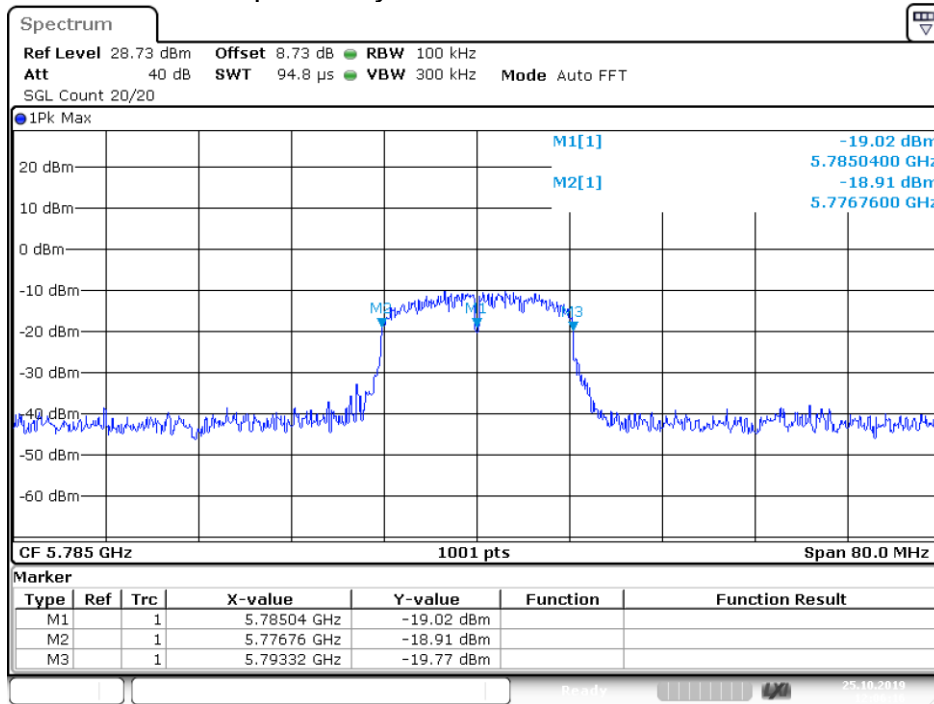


Date: 25.OCT.2019 12:06:16

Freq. Stability NVNT 802.11a 5825MHz

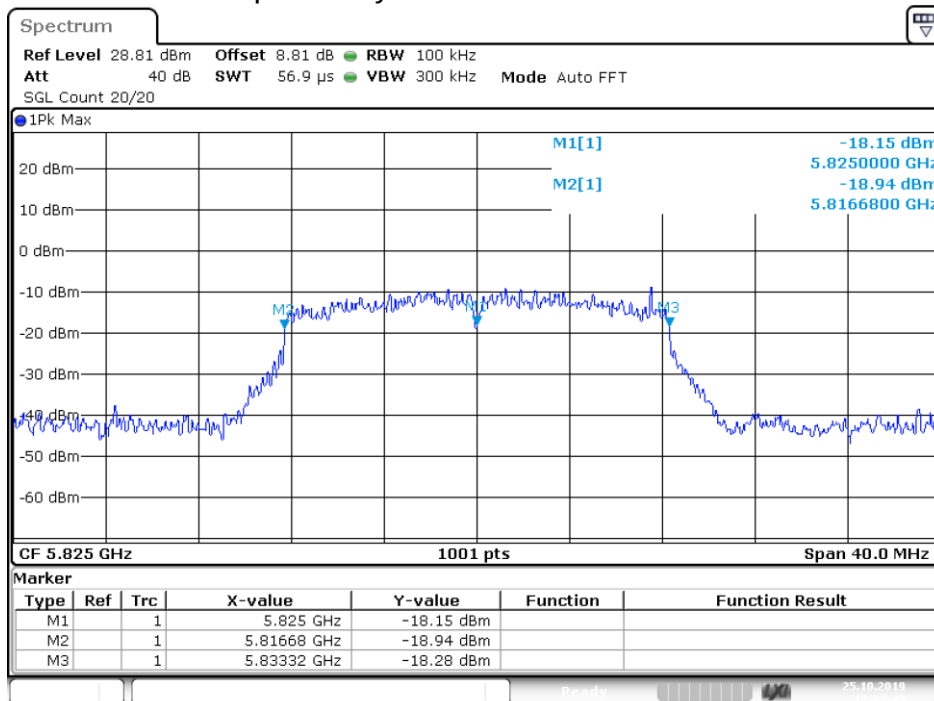


Date: 25.OCT.2019 12:07:46

Freq. Stability NVNT 802.11ac20 5745MHz

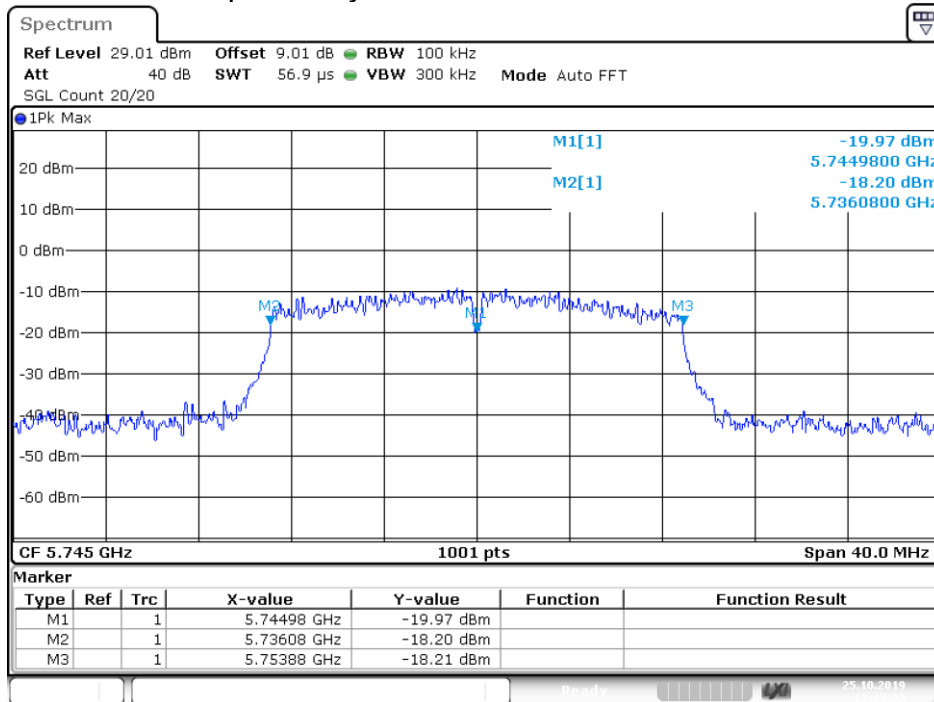


Date: 25.OCT.2019 12:15:22

Freq. Stability NVNT 802.11ac20 5785MHz

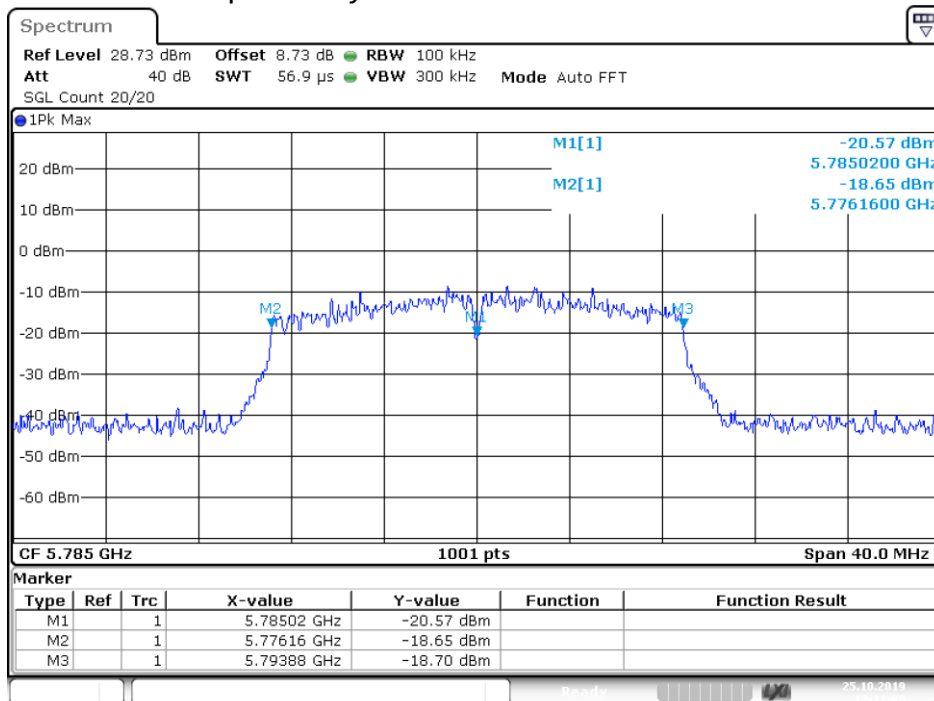


Date: 25.OCT.2019 12:17:09

Freq. Stability NVNT 802.11ac20 5825MHz

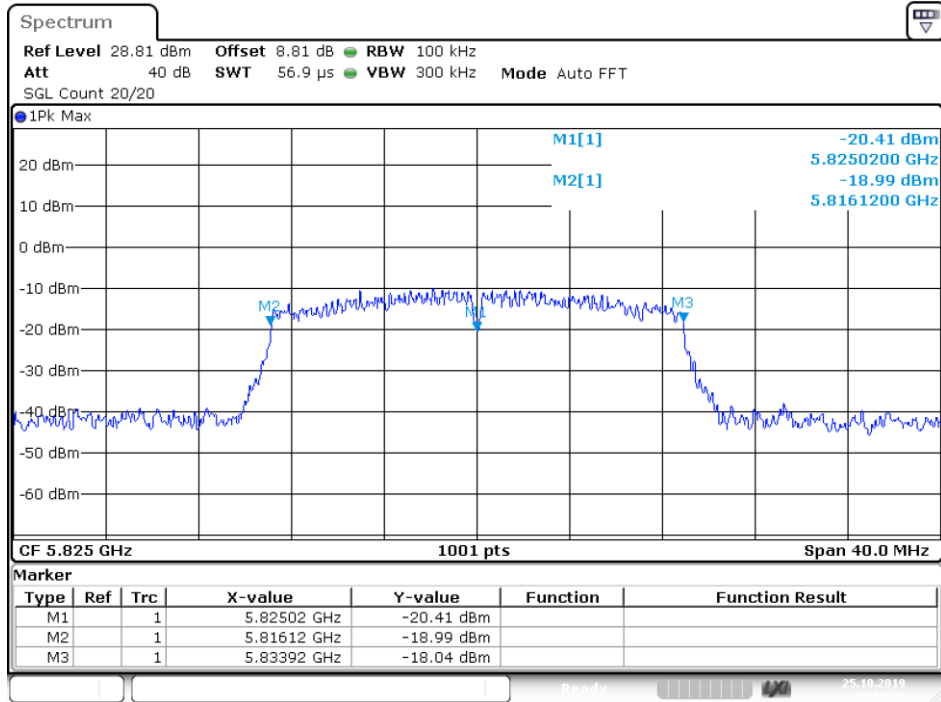


Date: 25.OCT.2019 12:19:28

Freq. Stability NVNT 802.11ac40 5755MHz

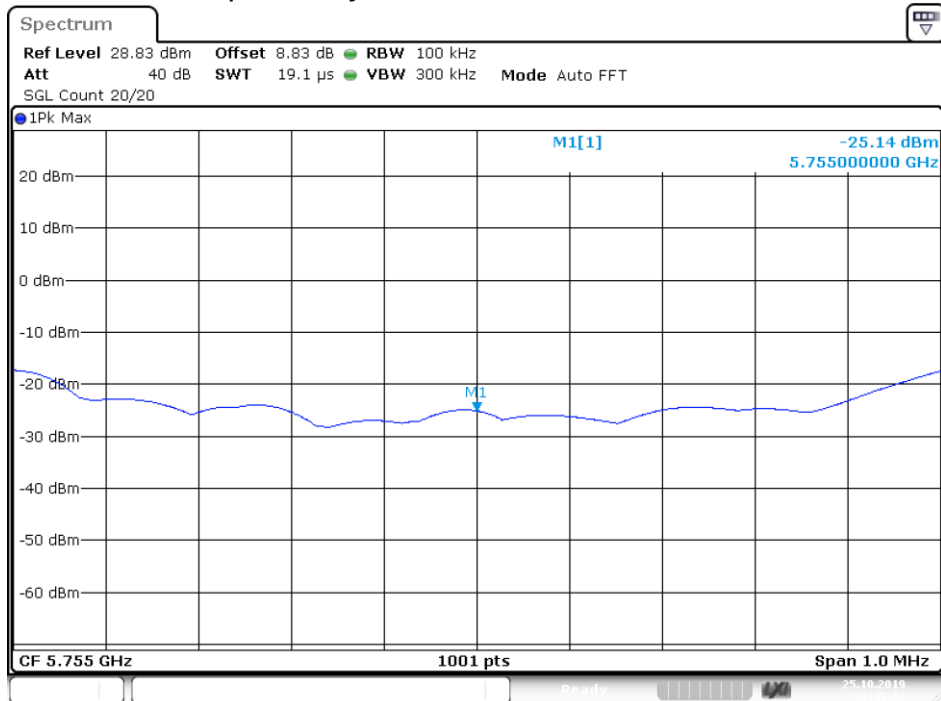


Date: 25.OCT.2019 12:45:02

Freq. Stability NVNT 802.11ac40 5795MHz

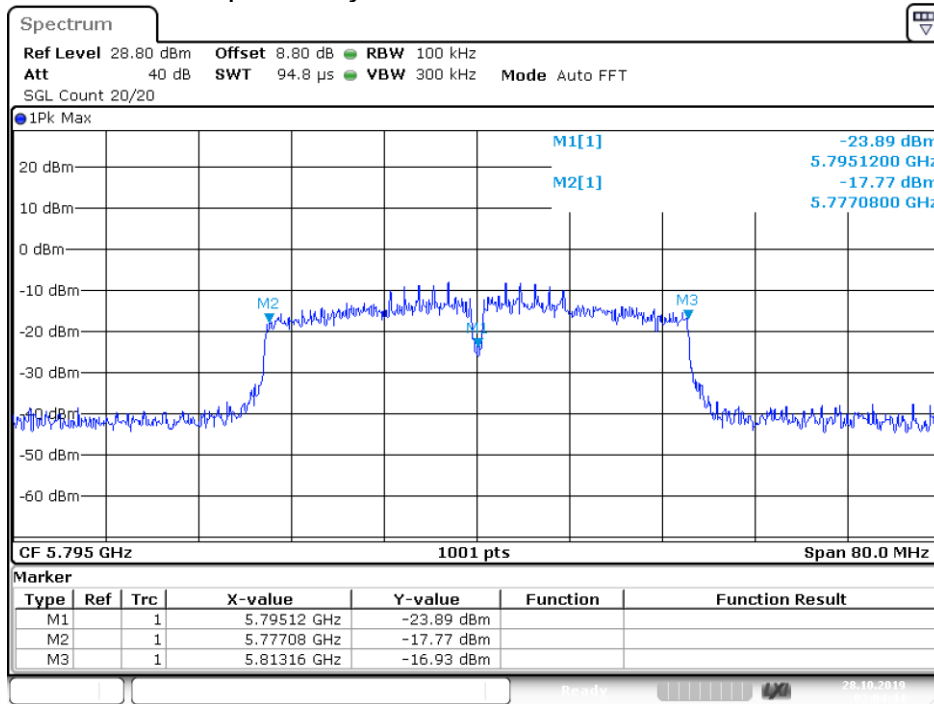


Date: 28.OCT.2019 03:04:43

Freq. Stability NVNT 802.11ac80 5775MHz

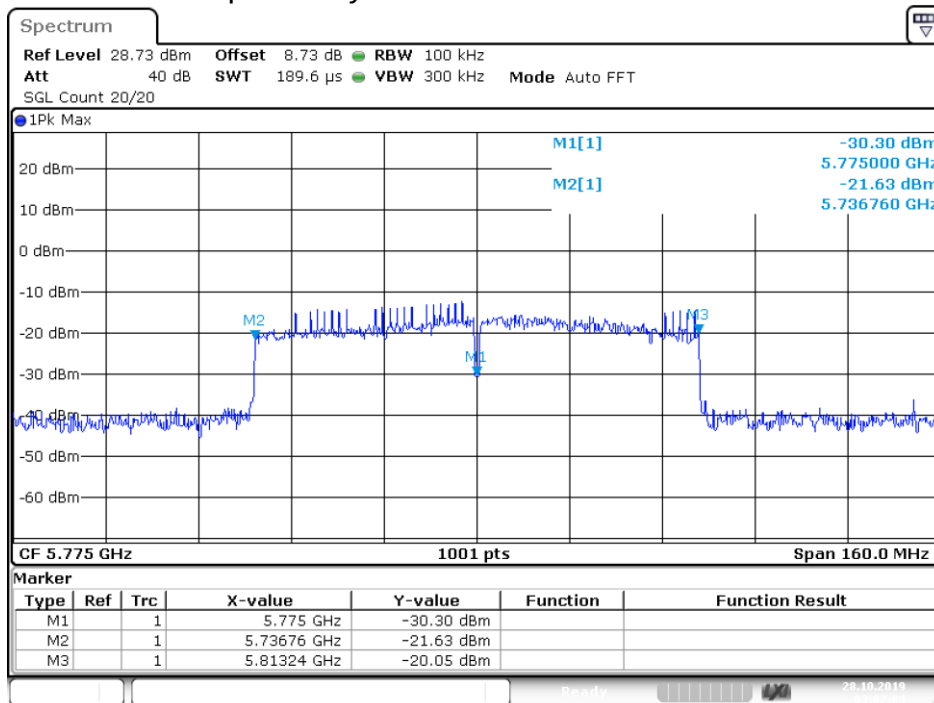


Date: 28.OCT.2019 03:07:04

Freq. Stability NVNT 802.11n(HT20) 5745MHz

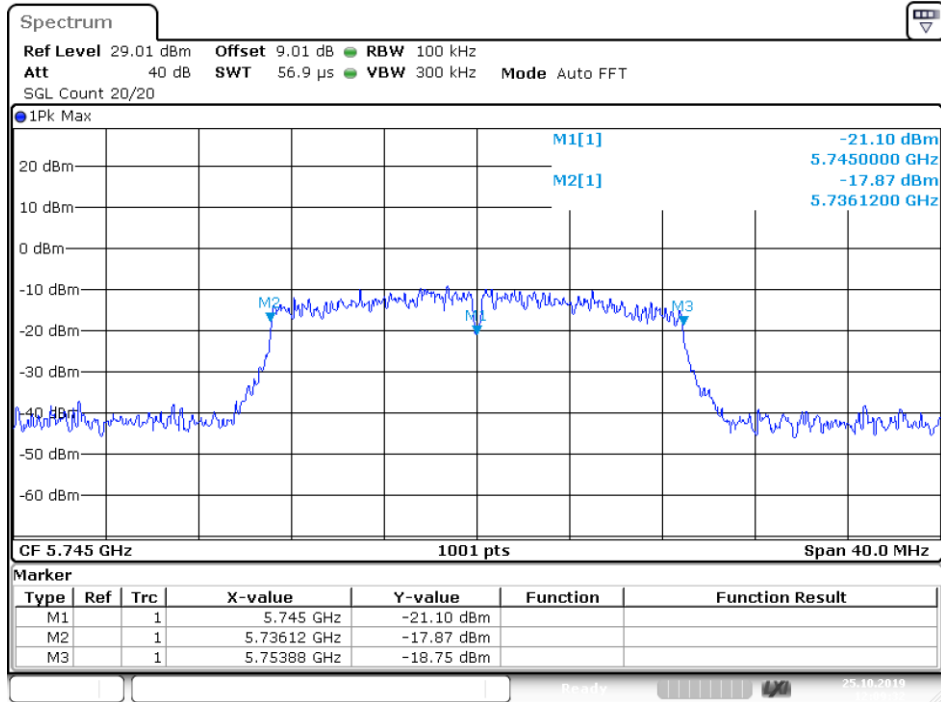


Date: 25.OCT.2019 12:09:32

Freq. Stability NVNT 802.11n(HT20) 5785MHz

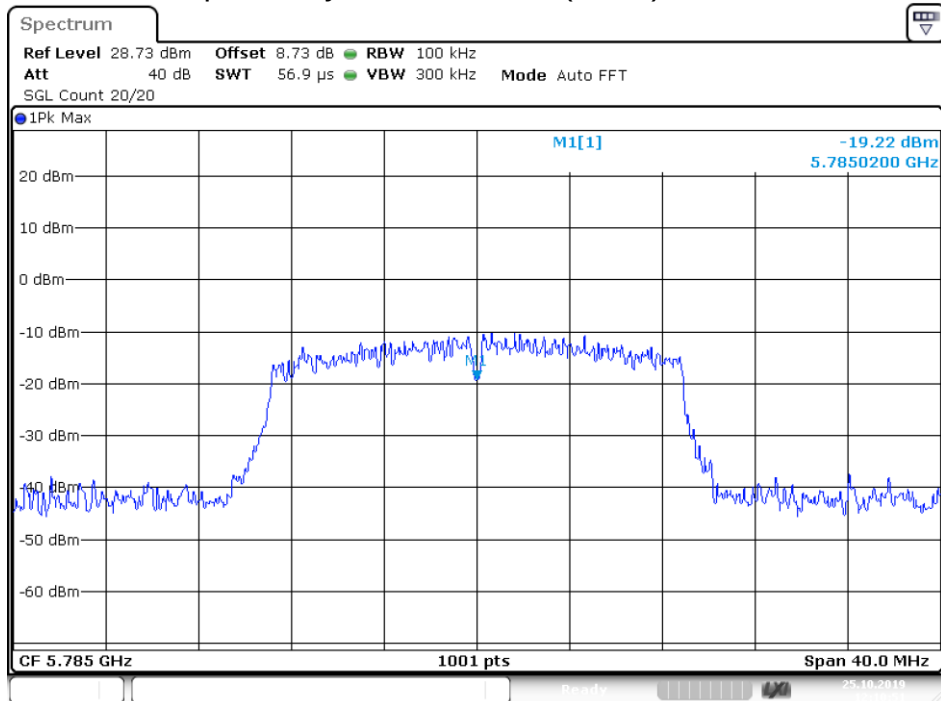


Date: 25.OCT.2019 12:10:51

Freq. Stability NVNT 802.11n(HT20) 5825MHz

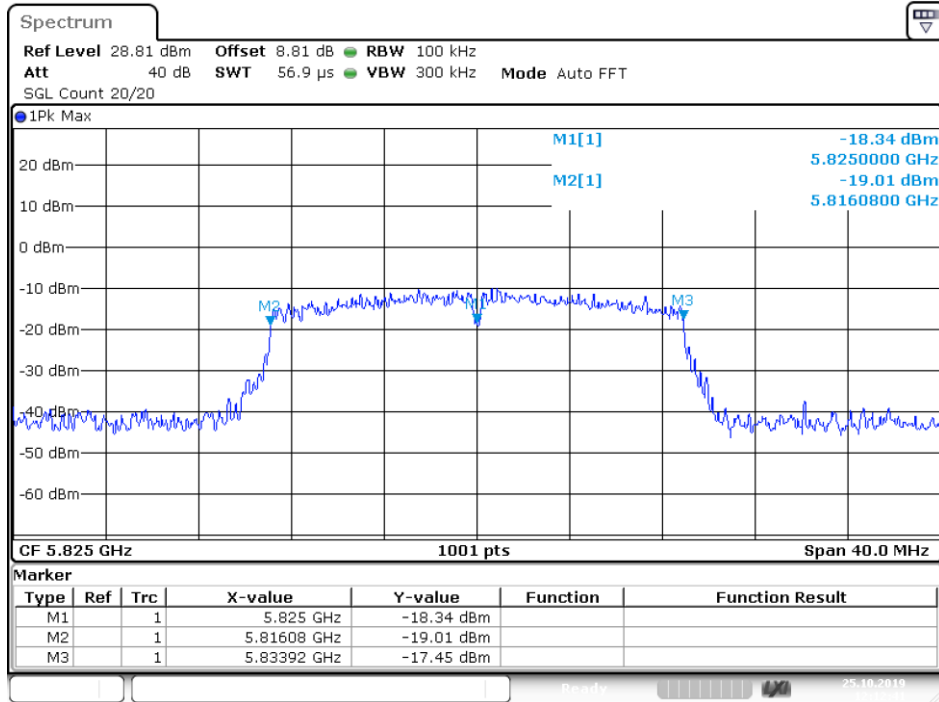


Date: 25.OCT.2019 12:12:42

Freq. Stability NVNT 802.11n(HT40) 5755MHz

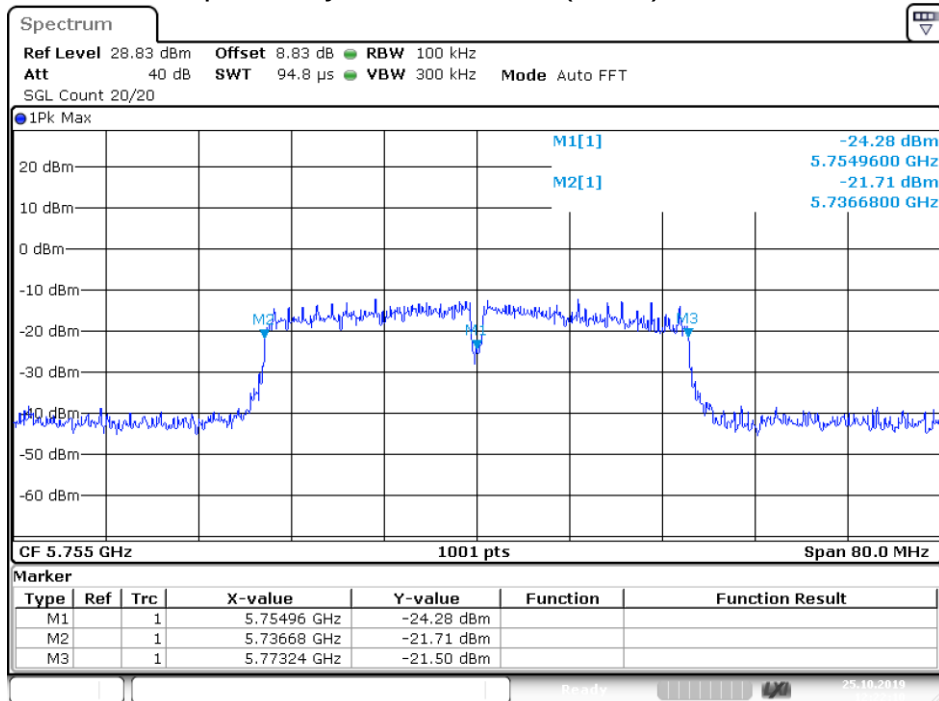

Date: 25.OCT.2019 12:22:10

Freq. Stability NVNT 802.11n(HT40) 5795MHz

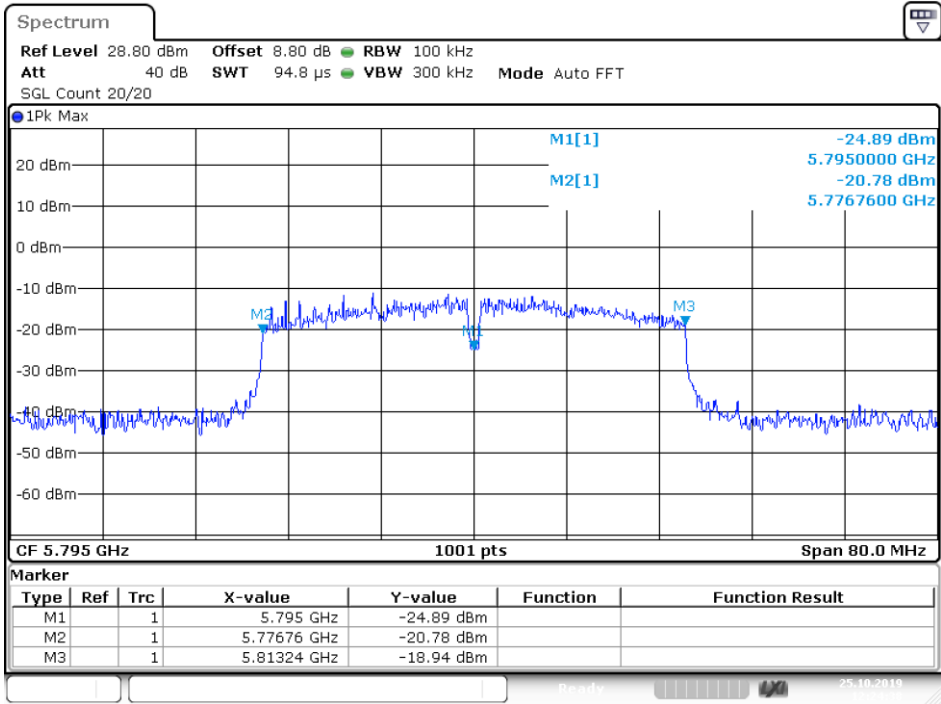

Date: 25.OCT.2019 12:24:38

---END---