

CUSTOMER : Standard

DATE : 2020. 06. 22

REV : Rev. 1.0

SPECIFICATIONS FOR APPROVAL

REBE-TZ21K

Model	Part Number	Customer P/N
2.13" 3-Color Graphic	REBE-TZ21K	-



APPROVAL	REMARK	APPENDIX	DESIGNED	CHECKED	APPROVED
			2020.06.19	2020.06.19	2020.06.22
			K.S.AN	H.H.HAN	I.U.KIM

TABLE OF CONTENTS

1. Application	3/26
2. Quality	3/26
3. Appearance and Characteristics	3/26
4. Overall Service Scenario	4/26
5. General Features	5/26
6. Absolute Maximum Rating	7/26
7. Electrical Specification	8/26
8. Mechanical Information	9/26
9. Packaging	15/26
10. User Quick Manual	18/26
11. RoHS Compliance	20/26
12. Related Certification	21/26
13. Disclaimers	25/26
14. Ordering Information	26/26

1. Application

This Specification is applied to ATEC AP Wireless Electronic Shelf Label. (REBE-TZ21K)

REBE-TZ21K is used by retailers for displaying product pricing on shelves. Typically, electronic display modules are attached to the front edge of retail shelving. These modules use Electrophoretic Display (EPD) or similar screen technologies to show the current product price to the customer.

A communication network allows the price display to be automatically updated whenever a product price is changed.

2. Quality

Quality should meet each condition which mentioned on this specification. However, the items which are not mentioned on this specification follow the inspection agreements and standards which are agree with both companies.

3. Appearance and Characteristics


3.1. Appearance

Appearance should not be contaminated by harmful materials and should not have cracks, etc. Mechanical dimensions should meet the contents of clause 9.

3.2. Characteristic

Electrical Characteristics should meet the contents of clause 7.

4. Overall Service Scenario

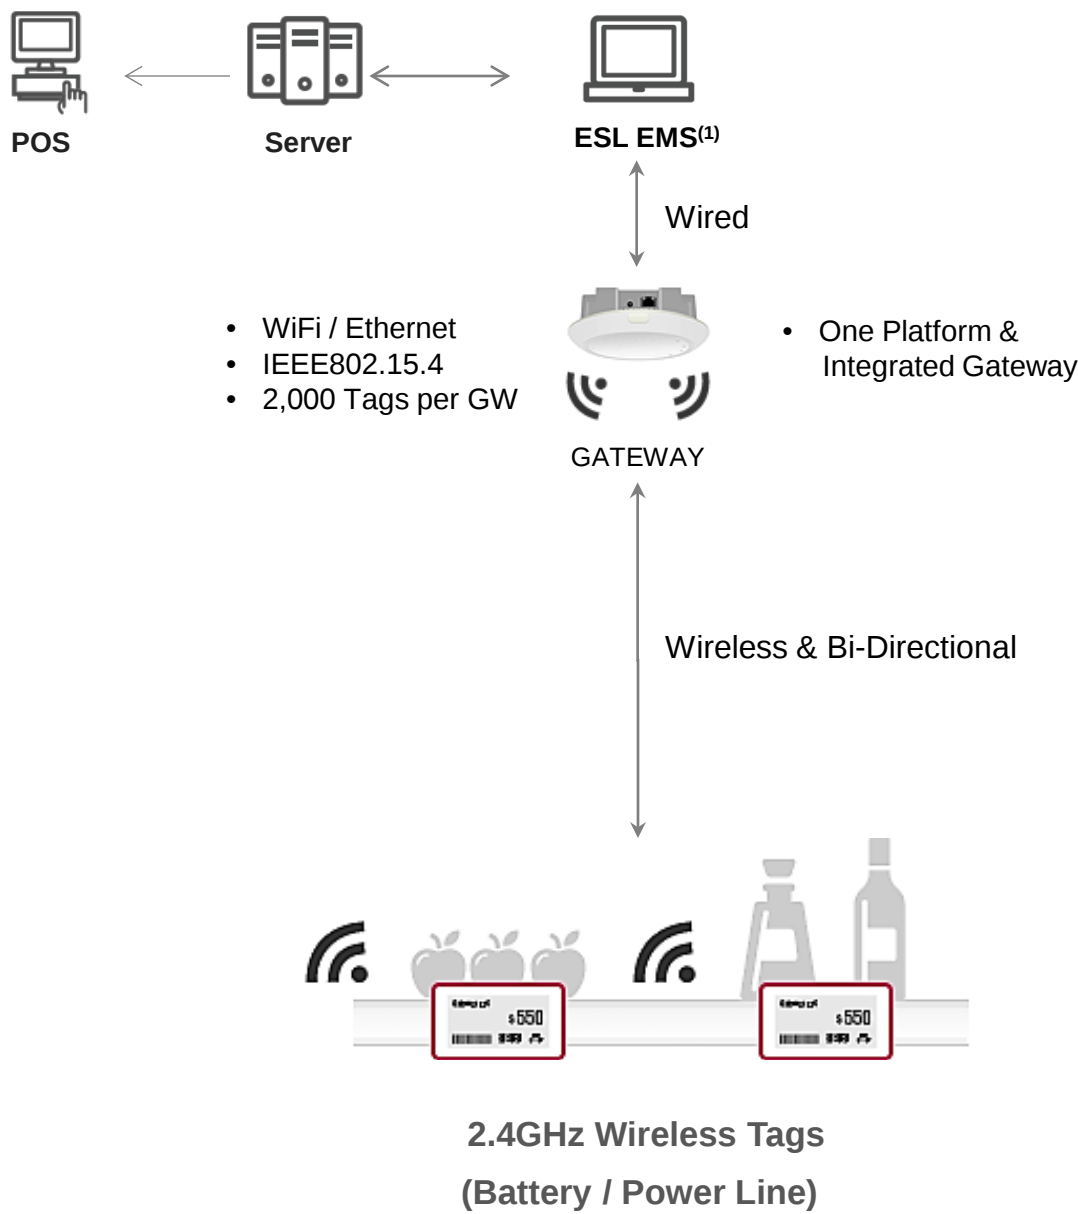

(1) EMS : ESL Management Software

5. General Features

5.1. Description

Item		Description
Size		64.5 x 36.5 x 12.0 (mm)
Weight		Typ. 31g (Include Battery - Battery 13g)
Digital Display		Type : Electrophoretic Display Size / DPI : 48.55(H) x 23.8(V) (mm) / 111
Display Color		3-Color (Red/Black/White) ⁽¹⁾
Power		Rate : 3.0 V / 100 mA CR2450 Coin Battery 2in1 PKG (Removable) Battery Capacity : Max. 1,100 mAh Battery life time: 5 year at 23℃ and 50% RH ⁽²⁾ (Image update 2 times per day)
NFC		Operating frequency of 13.56 MHz
Network	802.15.4	2.4GHz IEEE802.15.4 compliant RF Transceiver
	Security	Robust wireless network (ATEC AP own protocol)
	Protocol	Compatible with ATEC AP protocol communication devices
	Comm. Range	Max. 30m (Under LoS) ⁽³⁾⁽⁴⁾

- [Notice]** (1) If the background of display is red, display quality can be decreased.
Generally, we recommend that the portion of red color has less than 50%.
- (2) The battery life time depends on operating conditions
(Temperature, humidity, wireless environment, image update count...etc)
- (3) LoS (Line of Sight) : Without any sort of an obstacle between a gateway and end devices.
- (4) Communication Range depends on surrounding environment.

6. Absolute Maximum Rating

6.1. Environmental Conditions

The normal operating environmental conditions are those as below. In such conditions, ESL must be in conformity with the present specification. The conformity to such requirement must be certified by the manufacturer.

Parameter	Condition	Min.	Typ.	Max.	Unit
Operating Environment ⁽¹⁾	Temperature	10	23	30	℃
	Humidity	35	50	65	%RH
Storage Environment ⁽²⁾	Temperature	10	23	30	℃
	Humidity	-	-	55	%RH

[Notice] (1) Tag can operate at 0~40℃. But only assure the image quality of EPD at 10~30℃.
(2) After receiving the product, it should be installed within 3 months

6.2. Electrical Conditions

The operating electrical conditions are those as below. In such conditions the ESL must be in conformity with the present specification. All devices can be damaged or non-operated over the specification as below. The conformity to such requirement must be certified by the manufacturer.

Parameter	Condition	Min	Typ.	Max	Unit
Supply Voltage	DC Power Supply	2.2	3.0	3.3	V
Power Consumption	@ 3.0~3.3V	-	-	100	mA
ESD Protection	Air Condition @Soft Fail	-8	-	+8	kV

7. Electrical Specification

7.1. IEEE802.15.4

The REBE-TZ21K supports IEEE802.15.4.

7.2. General Specification

- Standard : Only IEEE802.15.4 PHY
- Frequency : 2405 ~ 2480MHz
- Channel : 16CH. (5MHz Spacing)
- Modulation : DSSS/O-QPSK
- Max. Data Rate : 250Kbps

7.3. Electrical Specification



- Channel power depend on each country regulations (EX. KC, etc)
- The electrical specification which is shown below is ATEC AP internal specification.
- All values depend on surrounding environment and current statement of access point

RF Performance					
Parameter	Condition	Min	Typ	Max	Unit
Output Power	-	0	-	-	dBm
Receiver Sensitivity	PER=1% (Required -85dBm)	-85	-	-	dBm
Maximum Input Level	PER=1% (Required -20dBm)	-	-	-20	dBm
Frequency Tolerance	Required Max. ± 75 kHz	-75	-	75	kHz
Error Vector Magnitude	Required Max. 35%	-	-	35	%


8. Mechanical Information

8.1. Mechanical Dimension

Size	64.5 x 36.5 x 12.0 (mm)
Weight	Typ. 31g (Include Battery - Battery 13g)

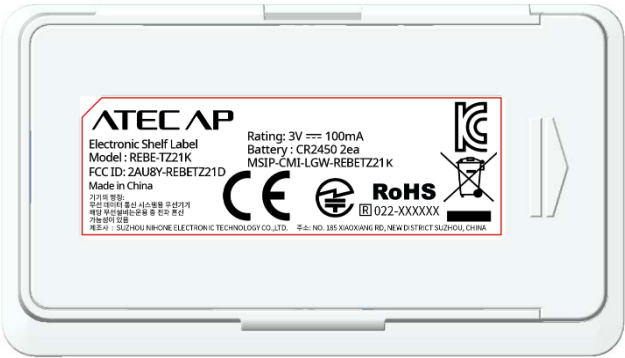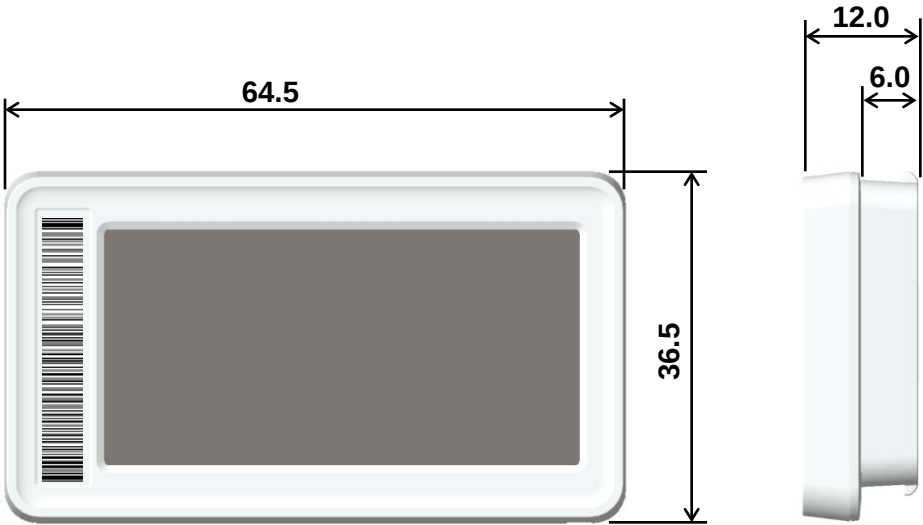


8.2. Battery Dimension

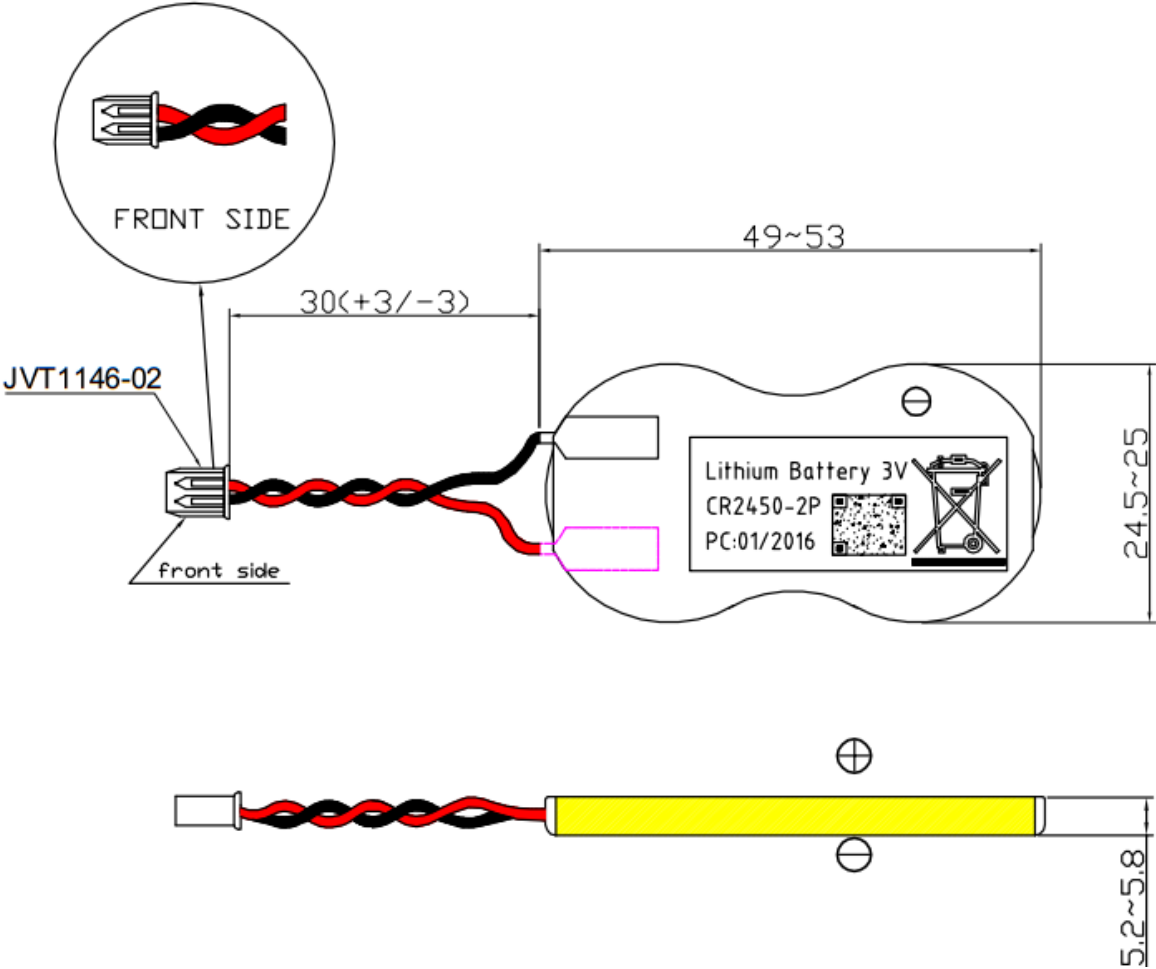

8.3. Label Specification

8.3.1. Product Label Specification

unit : mm

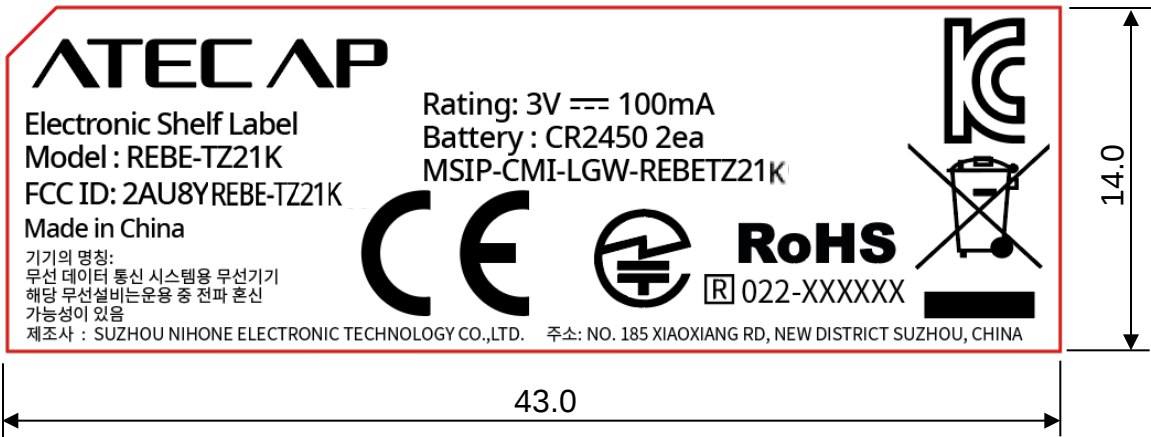

8.3.2. MAC Barcode Labeling Specification



Unit : mm

Label Size : 28 x 5mm
Barcode Size : 23 x 3mm

8.3.3. Serial Barcode Labeling Specification




Label Size : 28 x 5mm
Barcode Size : 26 x 3mm

Serial Barcode Information (19-codes)

YY	M	DD	F	L	XXXXXXX	12345
↓	↓	↓	↓	↓	↓	↓
Year	Month	Date	Factory	SMT Line	Model No.	Production Sequence 5-digit Serial No
2016 : 16	1 : 1	01	LGIT Kwangju : A	Line 1 : 1		
	2 : 2	.	LGIT Osan : B	Line 2 : 2		
	3 : 3	.	LGIT Indonesia : C	Line 3 : 3		
	4 : 4	.	LGIT China : D	Line 4 : 4		
	5 : 5	31	ShineFul : K	Line 5 : 5		
	6 : 6		DainTech : L	Line 6 : 6		
	7 : 7					
	8 : 8					
	9 : 9					
	10 : A					
	11 : B					
	12 : C					

8.3.4. Labeling Specification

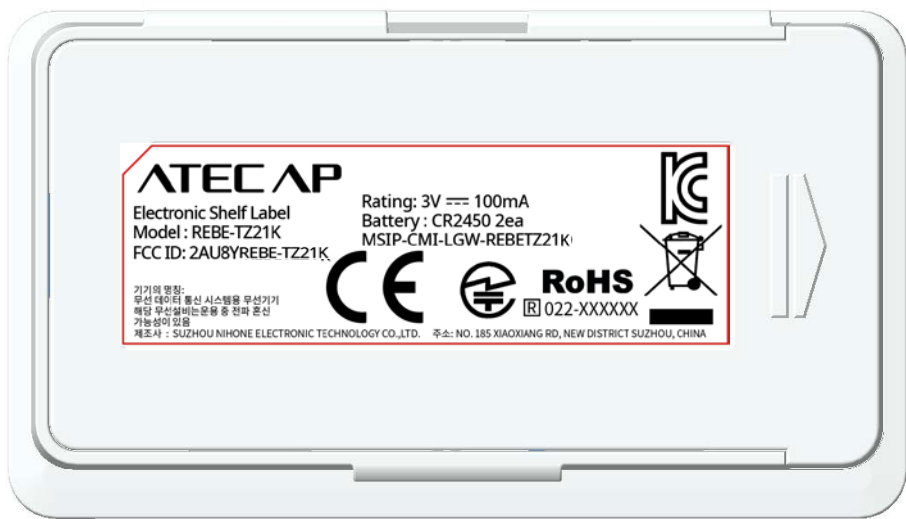

8.4. Rendering



9. Packaging

9.1. Packaging Specification

Copyright © 2015 by LG Innotek Co., Ltd. All rights reserved. No part of this document may be reproduced, stored in a storage device or retrieval system, or transmitted in any form or by any means, whether electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of LG Innotek Co., Ltd.

이 도면은 LG이노텍 주식회사의 자산으로 무단 복제 또는 배포 시, 관련법과 회사규정에 의해 처벌됨

10

Tag

20

2

48

5

30

20

40

40

60

50

70

WRAPPING

100EA

Summary of packing

Item	Qty of Tag	Max. Weight [kg]	Ways of Packing
Inner Box	100EA	3.1kg	100 Tag/Inner Box
Outer Box	200EA	61kg	3 Inner Boxes/Outer Box
Pallet	10AB00EA	353kg	36 Outer Boxes/Pallet

70

—

Pallet 820*1100*100

TEA/56 Outer Box

60

—

Tag 97*150*5.000/Reel

TEA/Inner BOX

50

—

Outer Box Label (LG Innotek Form)

TEA/Inner BOX

40

—

Outer Box (442*270*255)

3 Inner BOX/Outer BOX

30

—

Inner Box Label (LG Innotek Form)

TEA/Inner BOX

20

—

Inner Box (352*265*80)

100EA/Inner BOX

10

—

FE Bag (100*65*0.15)

TEA/Tag

Dimensions, Tolerances

	~ under 30	30 ~ under 100	100 ~ under 200	200 ~ under 500	500 ~ under
C	Δ	Δ	Δ	Δ	Δ
H	Δ	Δ	Δ	Δ	Δ
E	Δ	Δ	Δ	Δ	Δ
S	Δ	Δ	Δ	Δ	Δ

UNLESS OTHERWISE SPECIFIED

SCALE

UNIT

mm

QUANTITY

NO

DESCRIPTION

QUANTITY

NOTE

LG Innotek

RECEIVED 2016.08.19

C.S. Kim

DRWN 2016.08.19

J.S. Kim

CHKD 2016.08.19

G.S. Lee

REBE - M/2210

ITEM NO

1

2

3

4

LG Innotek Confidential

9.2. Packaging Label Specification

9.2.1. Inner Box Label Specification

Unit : mm

100

Inner Box ATEC AP Suzhou, CHINA		2018-10-31	
12345678-100		Q'ty	100
Part No.	Customer P/N	Inspection	
ATEC AP P/N	REBE-TZ21K	PASS 18.10.31	
Lot No.	I1844A31B10001		

50

Production Region

Inner Box ATEC AP Suzhou, CHINA		2018-10-31	
12345678-100		Q'ty	100
Part No.	Customer P/N	Inspection	
ATEC AP P/N	REBE-TZ29E	PASS 18.10.31	
Lot No.	I1844A31B10001		

Customer Code + Quantity

Customer Product No.

ATEC AP Product No.

Lot No. Information

(14-codes)

Manufacturing Date (YYYYMMDD)

Quantity in a Box

Inspection Stamp or Sticker

I

18

44

A

31

K

1

0001

Serial No. (0~ 9999)

Product Line (1 ~ 4)

Factory (K, B)

Date (1 ~31)

Month (1 ~ 9, A, B, C)

Week (01 ~ 53)

Year (2018 → 18)

Inner / Outer Box (I, O)

16 / 26


ATECAP



9.2.2. Outer Box Label Specification

100

Unit : mm

50

Outer Box ATEC AP Suzhou, CHINA		2018-10-31	
 12345678-200		Q'ty	200
Part No.	Customer P/N		
ATEC AP P/N	REBE-TZ21K		
Lot No.	 O1844A31B10001		
Inner Box Lot No.	 I1844A31B10001	 I1844A31B10002	

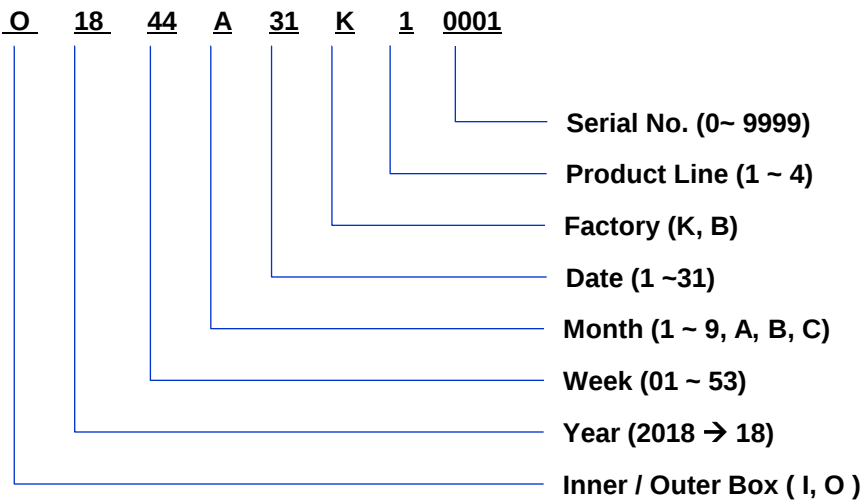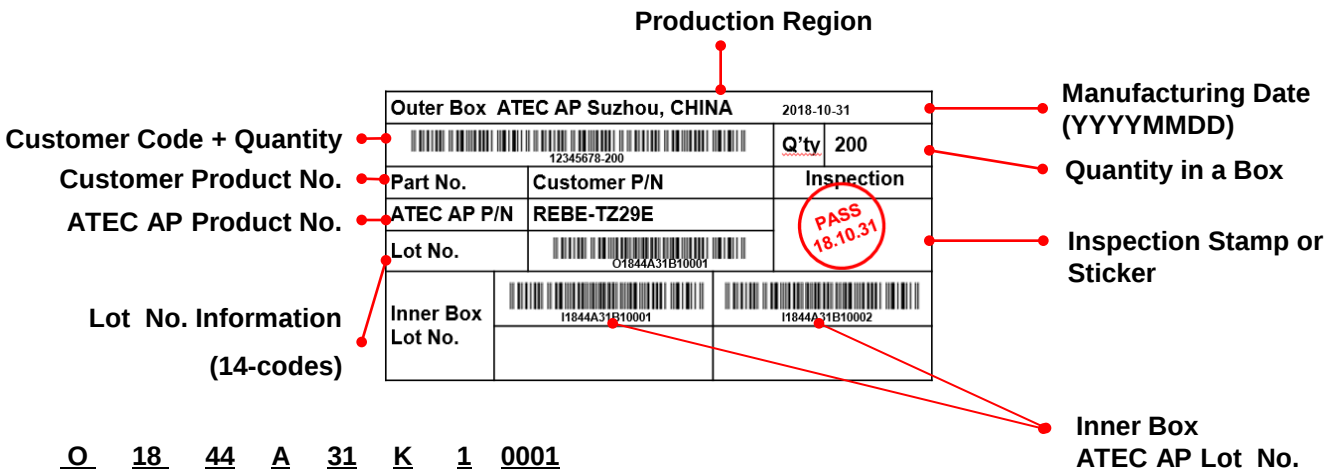

10. User Quick Manual

10.1. Tag Information

Symbol	Mode	Function	Image
	Deep Sleep	Initial Mode	
	Connected	Connected to Gateway	
	Disconnected	Disconnected to Gateway	
	Low Battery	Battery Discharged	
	Busy	Ready to image download	


[Notice]

- * In this status of low battery, we can not ensure any normal operations.
- * After change battery, the tag’s display will be changed to normal status within next keep alive interval


12.2. Description & Key Function

Remote control device provides customer with several functions as below

- Waking Tag up from sleep mode
- Updating new purchase image on Tag
- Deleting purchase image on Tag
- Returning a Tag to be factory settings




(a) function



(b) Contact direction

< Remote control device >

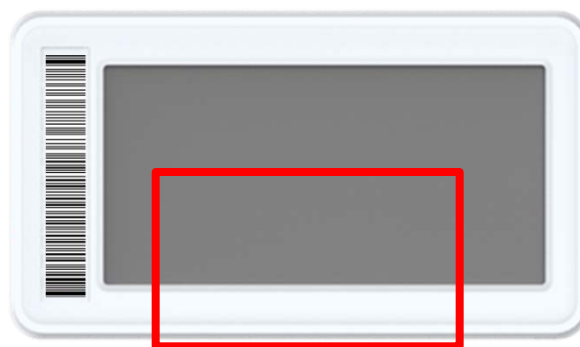

A remote controller or a NFC Device contact point for communication.

11. RoHS Compliance

REBE-TZ21K devices meet the requirements of Directive 2002/95/EC of the European Parliament and of the Council on the Restriction of Hazardous Substance (RoHS)

12. Related Certification

- KC, FCC, CE, TELEC

12.1 KC (Korean Certification)



* 제품 사양

- 무선 사양 : IEEE 802.15.4(Zigbee)
- 사용주파수 : 2 402 MHz ~ 2 480 MHz (Zigbee), 13.56 MHz (NFC 수신)
- 채널수 : 16 개 - 출력 : 10 mW/MHz 이하

* 인증표시사항

- 기기 명칭 : 특정소출력 무선기기(무선데이터통신시스템용 무선기기)
+ RFID/USN용 무선기기(13.56 MHz 대역 사용기기)
- 인증자 상호 : 엘지이노텍(주)
- 모델명 : REBE-TZ21D
- 제조사 / 제조국가 : SUZHOU NIHONE Electronics Technology Co., LTD / 중국
- 제조년월 : 제품 별도 표기
- 인증번호 : MSIP-CMI-LGW-REBETZ21D



본 기지재는 통상이용상태에서 인체로부터 20 cm 이내 사용하지 않는
기지재이므로 SAR 비 대상 기지재로 간주하여 SAR 시험하지 않음

해당 무선설비는 전파혼신가능성이 있으므로
인명안전과 관련된 서비스는 할 수 없음

12.2 FCC (Federal Communications Commission)



Regulation Information

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution:

Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void user's authority to operate the equipment. This appliance and its antenna must not be co-located or operation in conjunction with any other antenna or transmitter.

A minimum separation distance of 20 cm must be maintained between the antenna and the person for this appliance to satisfy the RF exposure requirement.

12.3 CE (Conformity European)

EU DECLARATION OF CONFORMITY¹ LG Innotek

Number²

DoC_LGIT_REBE-TZ21D_171208

Name and address of the Manufacturer³

LG Innotek Co., Ltd.
26, Hanasandan 5beon-ro, Gwangsan-gu, Gwangju, 62229, Korea

This declaration of conformity is issued under the sole responsibility of the manufacturer.⁴

Object of the declaration⁵

Product information⁶

Product name: Electronic Shelf Label, Model name: REBE-TZ21D

Additional information⁷

SW version: 1.x (x can be 1 digit or 2 digit number)

The object of the declaration described above is in conformity with the relevant Union harmonization legislation:⁸

- References to the relevant harmonized standards used or references to the technical specifications in relation to which conformity is declared⁹

Radio Equipment Directive 2014/53/EU
EN 300 320 V2.1.1, EN 300 330 V2.1.1
EN 623 11:2008
EN 301 400-1 V2.1.1, EN 301 400-3 V2.1.1, EN 301 400-17 V3.1.1
EN 609 50-1:2008+A11:2009+A12:10+A2:2011+A2:2013

RoHS Directive 2011/65/EU
EN 505 01:2012

The notified body¹⁰ MICOOM Labs, Inc.

performed

a conformity assessment of the technical construction files

and issued the certificate

Additional information⁷

Signed for and on behalf of: LG Innotek Co., Ltd.

Senior Research Engineer/ Inchang Jeong



Date of issue: Dec. 8, 2017

Signature of Authorized person

EU Representative: LG Innotek Co., Ltd. Am Limespark 2 (Innovapark) 65843 Sulzbach am Taunus, Germany
<http://www.lginnotek.com/esl/index.jsp>

1/2

12.4 TELEC (Technical Regulations Conformity Certification)



**BUREAU
VERITAS**

工事設計認証書

認 証 を 受 け た 者	LG Innotek Co., Ltd.
特 定 無 線 設 備 の 種 別	第2条第1項第19号に掲げる無線設備
電波の型式、周波数及び空中線電力	G1D 2405~2480MHz (5MHz間隔16波) 0.003W/MHz
特定無線設備の型式又は名称	REBE-TZ21D
特定無線設備の製造者名	Suzhou Nihune Electronic Technology Co., Ltd.
工 事 設 計 認 証 番 号	022-100052
認 証 を し た 年 月 日	平成29年11月9日
備 考	

上記のとおり、電波法第38条の24第1項の規定に基づく工事設計認証を行ったものであることを証する。

平成29年11月9日

ビューローベリタスジャパン株式会社




Bureau Veritas Japan Co., Ltd.
Yamashirocho BSK Building 3F,
22 Yamashiro-cho, Nishi-ku, Yokohama,
231-0025 Japan
Tel: +81(0)45-641-6217 Fax: +81(0)45-641-8493
www.bureauveritas.jp

13. Disclaimers

- *ATEC AP* is not responsible for any damages caused by any accidents or operational environments exceeding the absolute maximum ratings.
- Consultation with *ATEC AP* is recommended for unassured environments or operations to avoid any possible malfunctions or damages of the products or risk of life or health.
- Any unauthorized, without prior written consents from *ATEC AP*, disassembly is prohibited if purposed for reverse-engineering. All defected devices must be reported to *ATEC AP* and not to be disassembled or analyzed.
- The product information can be modified and upgraded without prior notice.

14. Ordering Information

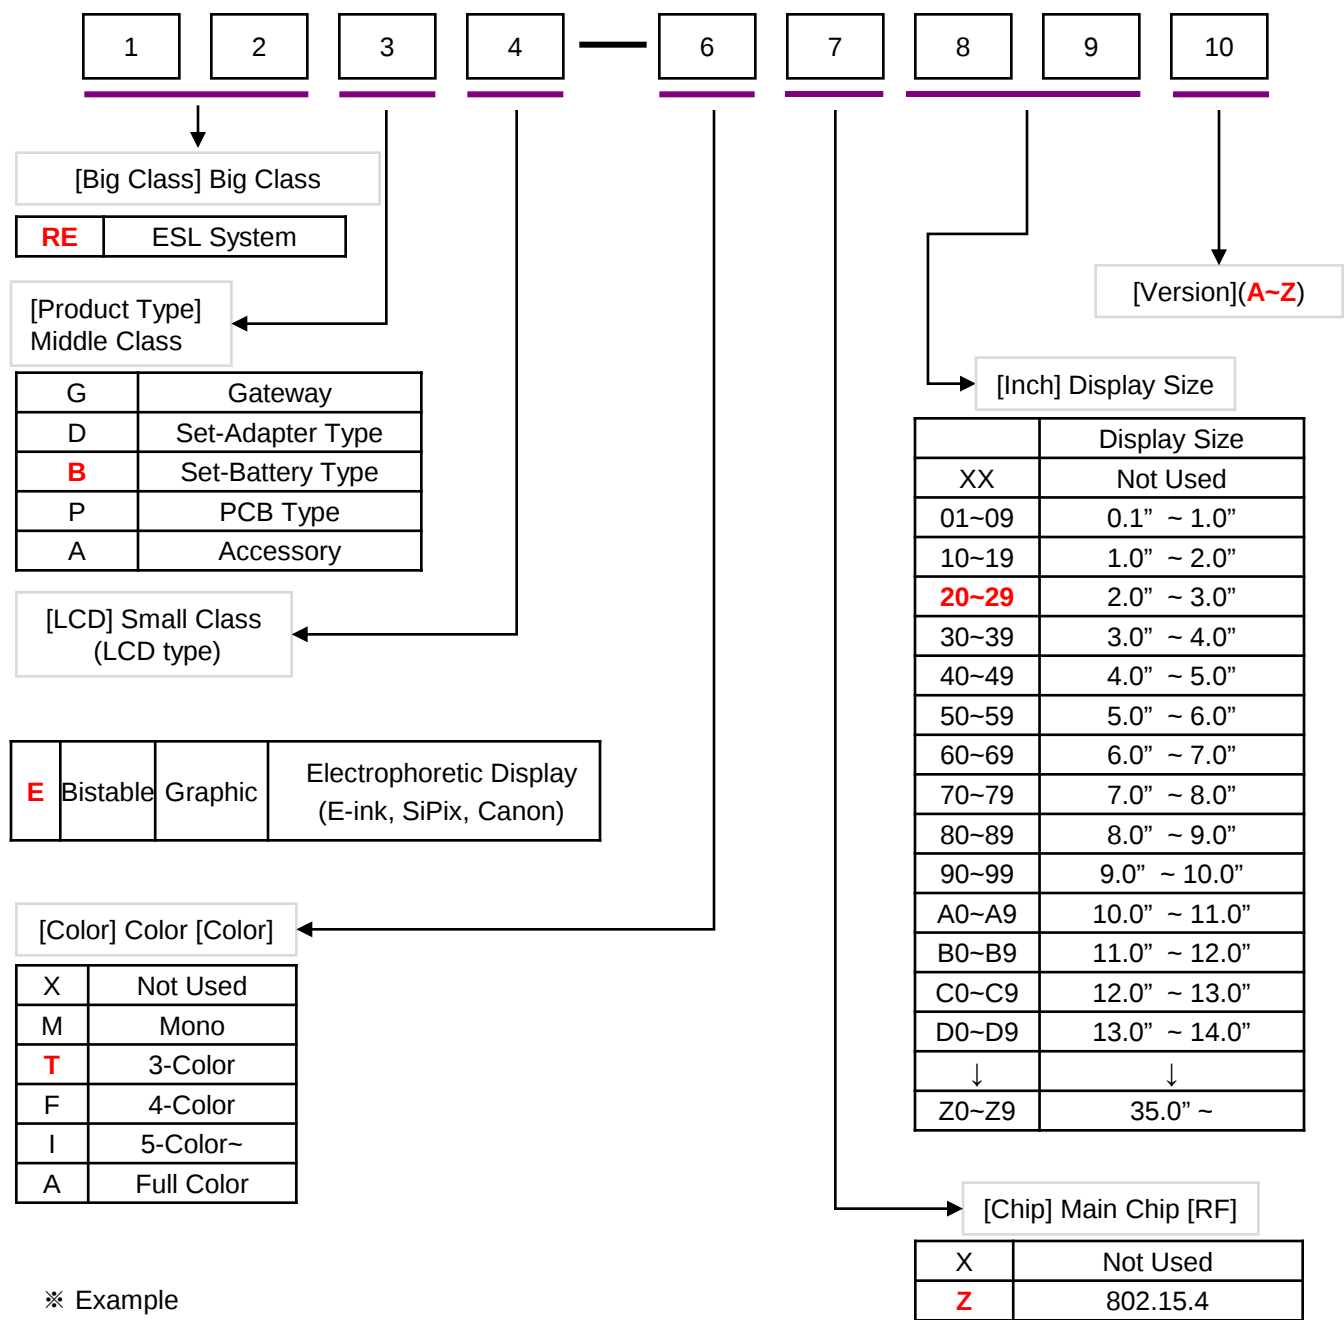

※ Example
REBE-TZ21K
: 2.13 Inch 3-color ESL
Revision D